



Little Crow

Solar Park

Little Crow Solar Park, Scunthorpe

ENVIRONMENTAL STATEMENT: TECHNICAL APPENDICES

APPENDIX 3.2

PHASE 1 GROUND CONDITIONS DESK STUDY

Revision:
APFP Reg:
PINS Reference:

Submission
5(2)(a)
EN010101

Author:
Date:

Integral
November 2020

Phase I Ground Conditions Desk Study
Little Crow Solar Park
Scunthorpe
Lincolnshire
DN20 0BG

Client: INRG Solar (Little Crow) Limited

Intégrale Report No. 1844, Version 9, November 2020, Submission

		Signature/Date
Project Co-ordinator & Report Preparation:	Dr Kay Boreland	
Report Approved by:	Gareth Thomas	
Final Check by:	Kay Boreland	

This report is addressed to and may be relied upon by the following:

INRG Solar (Little Crow) Limited

LIST OF CONTENTS

- EXECUTIVE SUMMARY -

1.0	INTRODUCTION	3
2.0	THE SITE	4
2.1	Location and Description	4
2.2	Published Geology and Mining	5
2.2.1	British Geological Survey Mapping	5
2.2.2	BGS Previous Investigation Records	5
2.2.3	Soils Information	6
2.2.4	Past Mining	6
2.2.4.1	Historical Mapping Evidence	6
2.2.4.2	Humberside Minerals Resources (2006)	7
2.2.4.3	TerraSearch Assess Report (August 2017)	7
2.2.4.4	Conventional Oil Well	7
2.3	Outline History	9
2.4	Hydrogeology, Hydrology & Groundwater Vulnerability	11
2.5	Environmental Information	12
2.5.1	Pollution Information and Licencing	12
2.5.2	Geological Information	13
2.5.3	Background Soils Chemistry	13
2.5.4	Contemporary Trade Directories	14
2.5.5	Groundsure Radon Risk Information	14
2.6	Conceptual Exposure Model	14
2.6.1	Proposed Redevelopment	14
2.6.2	Potential Sources of Contamination	15
2.6.3	Potential Receptors	16
2.6.4	Potential Pathways	17
2.6.5	Conceptual Site Model with Respect to Human Health	17
2.6.6	Conceptual Site Model with Respect to Controlled Waters	18
3.0	ANTICIPATED GROUND & GROUNDWATER CONDITIONS	19
3.1	Anticipated Strata	19
3.2	Anticipated Groundwater and Leachate	20
3.3	Anticipated Ground Gas Regime	21
4.0	CONTAMINATED LAND CONSIDERATIONS	22
4.1	General	22
4.2	Qualitative Risk Assessment	22
4.3	Conclusions	22
5.0	GEOTECHNICAL CONSIDERATIONS	24

APPENDICES

- A. Site Location & Layout Plans
- B. Site Photographs
- C. Geological Information
- D. Terrafirma Mining Report
- E. Groundsure Data Report
- F. Off-Site Conventional Exploration Well

EXECUTIVE SUMMARY

Little Crow Solar Park – Phase 1 Ground Conditions Desk Study **Report No. 1844, Version 9, November 2020, Submission**

A Phase 1 Desk Study on ground conditions, geotechnical and contamination aspects for this proposed solar energy scheme has been completed.

This 225 hectare site comprises a higher eastern area of level or gently eastward sloping arable land, a central zone moderately sloping down to the west, and a lower western area of very gentle to level ground. Agricultural soils predominate, with small areas of woodland & vegetation. To the west of the site are opencast ironstone workings and steel works

Geological records indicate the lower slopes overlain by Blown Sand comprising up to 7m of fine-grained silty sand. The bedrock beneath forms a sequence of north-south outcrops. The higher eastern area comprises Jurassic limestones; the central area is underlain by Jurassic mudstones and locally limestones; the middle and lower slopes are blanketed in the Blown Sand, underlain by mudstones and marls, including the commercially important Pecten Ironstone. The complete site area is classified as freely draining slightly acid sandy soils.

There are potentially small-scale surface ironstone workings in the lower western area. Northeast of the site is the Broughton B1 conventional oil well trial, sunk to 1.9km depth in 1984. This Report includes additional information on the well site, subsequent to the scoping direction by the Planning Inspectorate.

Historically the majority of site has remained agricultural, with Gokewell Priory Farm in the north. Overhead power cable routes cross the site and mapping indicates periodic expansion of the ironstone workings and steel plant to the west. A former WWII anti-aircraft battery in the eastern area is reported removed.

In the higher area, the regional strata dip to the east directs surface water and moderate depth groundwater flow to the east, forming a Principal Aquifer. Midslope surface water and shallow groundwater flow within the Blown Sand is to the west, forming a Secondary A Aquifer, with a discontinuous springline midslope. Very shallow groundwater is anticipated in the lower western area where drainage ditches are frequent, with hummocky marshy areas.

Potential contaminant sources are considered limited to remnant metals in soils within any localised backfilled ironstone pits, and air-borne particulates from the industrial complex to the west, within topsoil.

Potential receptors comprise construction workers and maintenance staff. Drainage ditches and the groundwater within the Principal and Secondary A

aquifers are controlled waters receptors. For the limited groundworks, risk to groundworkers is considered negligible with standard protection.

The shallow groundworks will have negligible potential to cause or increase leaching. Run-off during construction works will need to be controlled and managed, as standard practice. Future run-off is unlikely due to predominant topsoil cover and anticipated infiltration characteristics, but requires consideration.

Combined geotechnical and contaminated land assessment should concentrate on specific features from historical maps to confirm ground conditions within solar panel array zones, occurrence of small scale ironstone working, typical gas regime, infiltration and permeability of near surface soils and identify any specific areas of concern.

There is no current evidence of ground conditions that would preclude development.

1.0 INTRODUCTION

INRG Solar (Little Crow) Limited are considering the construction, operation, maintenance and decommissioning of a ground mounted solar park with an intended design capacity of over 50MWp (megawatts peak) with associated development. Their planning consultants are Pegasus Planning Group.

Intégrale Limited are commissioned to undertake a Phase 1 Desk Study, concentrated on ground conditions, geotechnical and contamination aspects. The desk study is also to inform drainage considerations by Clive Onions Limited.

This desk study report describes the geological setting, mining risk and historical and environmental data reports. The ground and groundwater conditions are anticipated and used to establish a conceptual model of potential pollutant linkages. Implications for the development are discussed and recommendations for further investigation or potential remedial works or design measures given.

The desk study was originally undertaken in August 2017 and a Version 1 draft report prepared. As the project has progressed the desk study has been updated, and Version 4, July 2018 of the report was issued to North Lincolnshire Council Environmental Health section and the Environment Agency in September 2018. Their comments have been taken into account in the report, and in scoping subsequent intrusive investigations which are reported separately.

This Report also includes additional information on the off-site conventional oil well, at the request of the Planning Inspectorate in their Scoping Direction response. Consideration of the setting and history of the well and its potential for impact on the proposed solar development is included in the current report.

The original Version 1 desk study was completed without a site visit, and was therefore based on photographic and satellite imagery, mapping and data reports by others. Site visits were then completed during September and November 2018 to undertake intrusive investigation, and this Report has been updated where appropriate, based on those site visits.

2.0 THE SITE

2.1 Location and Description

As shown in Appendix A, the site is located to the east of Scunthorpe and north of Ravensthorpe. It has a central Ordnance Survey Grid Reference of 494000 410000 and postcode DN20 0BG. A slightly smaller site area initially considered has subsequently been extended to comprise the area shown in Appendix A. Where a red outline is given on drawings in the appendices, this is indicative of the study area and does not represent the Order Limits unless specifically annotated as such.

No site reconnaissance visit was completed by Intégrale at the initial stage, and the typical photographs included in Appendix B have been provided by the client. The main features and pertinent aspects on the site and immediately adjacent land are summarised below:

Current Use	Predominantly arable agricultural land.
Site Area & Plan Shape	225 Hectares
Maximum Dimensions	1700m N-S by 1100-1500m E-W.
Ground Slopes & Topography	Higher eastern half at 60-67mAOD, level or with very gentle slopes down to east. Central quarter at 40-60mAOD, with moderate slopes (1:15 to 1:20) down to west. Western zone at 30-40mAOD, with moderate slope (1:12) down to west. Extreme western zone at 25-30m, with very gentle slope (1:50 to 1:60).
Buildings & Condition	None significant.
Surfacings & Condition Vegetation & Trees	Agricultural soils predominate, with small areas of woodland & vegetation. Three large plantations of trees (Gokewell Strip & Icehouse Strip in SE quadrant, and Little Crow Covert in northwest) do not form part of proposed development area.
Water Courses	Mapping shows numerous drainage ditches within western zone run down to west, feeding into north-south drains. Pond at site of former Gokewell Priory may feed into stream flowing northwest into a lower pond adjacent to Santon Wood.
Boundary Features	Agricultural fencing & hedges predominantly.
Contamination Issues	None noted from photographs. Beyond to west is area of opencast ironstone workings and steel works. Google Earth imagery shows substantial mound in SW from 2003 and centrally from 2008 (see below).

Geotechnical Issues	Former ironstone workings etc. – see below. Former Oil Well off-site to northeast – see historical maps and below.
---------------------	---

2.2 Published Geology and Mining

2.2.1 British Geological Survey Mapping

BGS geological maps indicate the following strata beneath and adjacent to the site:

Map / Scale	Sheet 89 at 1:50,000 scale (Solid & Drift Sheets).
BGS On-Line Viewer	BGS Maps Portal Accessed 8 th August 2017.
Artificial Ground	None mapped on site. Frodingham Ironstone Backfilled Opencast Workings immediately beyond western boundary.
Superficial Deposits	Lower slopes overlain by Sutton Sand (Devensian Blown Sand): up to 7m of fine grained silty sand. Further area of Blown Sand mapped at high level beyond eastern site boundary is likely to form a thin cover in parts of the eastern zone.
Solid Geology	Sequence of north-south outcrops from: 1. Kirton Cementstones of Lower Lincolnshire Limestone Formation (LLLS) of Middle Jurassic period forming higher eastern area, including Scawby Limestone and Santon Oolite, overlies; 2. Lower Estuarine Series and Northampton Sands (10-20m thickness), overlies; 3. Coleby Mudstones with Marlstone Rock of Lias Group of Lower Jurassic period on middle and lower slopes, including Pecten Ironstone.
Geological Features	None mapped other than superficial Blown Sand masking Jurassic bedrock. No dip arrows, however cross-section & more remote data indicates regional dip down to east at 1-3°.

Summary drawings of the geological formations and potential groundwater zones are included in Appendix C.

2.2.2 BGS Previous Investigation Records

Previous investigation records available on the BGS website under the Open Government Licence include 5 boreholes sunk across the northern area. These are also included in Appendix C and indicate:

- Higher Eastern half of site, at or above 55mAOD – Topsoil over Weathered oolitic limestone of Lincolnshire Limestone Formation;

- Central northern area between 40-50mAOD – Blown Sand to 2-4m depth, overlying Middle & Lower Lias mudstones and locally limestones;
- Lower northwestern area at 36mAOD – yellow and grey clays of Coleby Mudstones (with thin veneer of Blown Sand likely).

No details of groundwater levels are included in these records.

2.2.3 Soils Information

Data available on the LandIS Soilscales Viewer and within a Soil Site Extended Report is included in Appendix C and indicates:

- The complete site area is classified as underlain by freely draining slightly acid sandy soils. These have typically low fertility arable land cover, and drain to groundwater.
- The complete site area is underlain by Newport 1 Type Soils. These are deep well drained sandy and coarse loamy soils. They are free draining and permeable in unconsolidated sands or gravels, which have a relatively high permeability and high storage capacity. They have a very low potential for ground movement (shrinkage or swelling).
- These soils will, by nature of their high permeability, readily transmit a wide range of pollutants because of the rapid drainage and low attenuation potential.
- The uppermost 300mm of the soil profile is sandy and 'light'.
- Newport 1 Soils have typically an upper 250mm of dark brown slightly stony sandy loam or loamy sand, overlying brown slightly stony loamy sand or sand, with a weak fine subangular blocky structure. Below 500-550mm depth, these develop into yellowish red or brownish yellow slightly stony sand of single grain structure.

2.2.4 Past Mining

2.2.4.1 Historical Mapping Evidence

Historical maps are discussed in more detail below and are included in Appendix E. There is evidence for potential small scale near surface workings in the lower western area, where small pit features, some ponds and a hummocky area in the extreme southwest are shown.

A summary plan of such historical features has been included after those maps at the end of Appendix E. It is assumed that if these are evidence for surface working or mining, they represent ironstone extraction. It is noted that several such features align north-south, potentially reflecting the geological trend of ironstone outcrops. Google Earth imagery shows a substantial vegetated mound with approximate maximum dimensions of 70m by 45m in the southwest area between 20-26mAOD from 2003 onwards, which could relate to such workings. From 2008 a mound of material approximately 50m diameter appears centrally, south of the main access track to Gokewell Priory Farm, perhaps more likely to be agricultural in origin or related to the demolition of farm buildings.

The opencast workings to the west include a linear excavation, with steep side slopes and apparently extending well below 5mAOD, based on Google Earth spot heights.

2.2.4.2 Humberside Minerals Resources (2006)

The Humberside Minerals Resources plan obtained from the BGS website (an extract of which is included in Appendix C) indicates the complete site area as having “Underground planning permission (valid and expired)”. This suggests that the Minerals Planning Authority had granted permission for (assumed) ironstone working by underground mining, presumably as an extension to the opencast area to the west, but that this has now expired. Whether any workings beneath the site area did in fact occur, remains undetermined to date.

2.2.4.3 TerraSearch Assess Report (August 2017)

A Terra Search Assess report was therefore obtained from TerraFirma Mine Searches Limited and is included in Appendix D. The report is based on the original slightly smaller site area (as shown on the maps) however, it includes information from a larger surrounding ‘buffer zone’ and therefore covers the complete Order Limits. This indicates:

- Negligible to low risk from past coal mining, evaporate working, brine extraction, or metalliferous mining for tin, lead etc.
- Moderate risk of past limestone or other stone extraction.
- Moderate risk of planned or future mineral extraction (of ironstone).

For ongoing current site use, TerraFirma therefore conclude:

- A Moderate risk from past ironstone extraction, due to a number of suspected extraction features (see hazard map within report).
- A Moderate risk due to a hydrocarbon well off-site to the northeast. TerraFirma have confirmed that DECC (Dept. of Energy & Climate Change) data indicates the hydrocarbon field area extends within the site boundary. “Therefore associated extraction features such as underground workings and shafts could be present and have the potential to impact ground stability in the area”. See also Section 2.3.

For future development of the site, TerraFirma therefore conclude:

- “...prior to any site works or future development activity, it is considered prudent to commission a full Site Survey by a qualified mining geologist/engineer.”

2.2.4.4 Conventional Oil Well

Immediately northeast of the site at Top Wood is the site of a conventional oil well, known as Broughton B1. This was sunk in 1984 by BP Petroleum

Development Limited. Details originally obtained from the UK Onshore Geophysical Library open-access resource are included in Appendix C.

This indicates:

- Well was sunk at 63.1mAOD and taken to 1920m depth, as a vertical boring;
- The well is cased to 1909m depth, casing decreasing from 340mm to 140mm down its length;
- The Upper, Middle and Lower Lias strata were proven from surface to 100m depth. The underlying Triassic, Penarth and Mercia Mudstone Groups, and Upper Permian strata occur to 800m. Beneath, the Lower Permian marl/shale and Rotliegendes Sandstone reservoir were found to 1120m, with Carboniferous strata below to the base of the well. It is tentatively assumed that the oil shales or sandstones being targeted are those below 800m depth.

On-line searches for details of this oil well found that Egdon Resources plc have stated: "The two prospects are located along an oil productive trend with the Crosby Warren producing oil field at one end and the Brigg oil discovery at the other. The Broughton-B1 well drilled by BP in 1984 flowed on test at up to 40 barrels of oil per day before being abandoned".

Subsequent consultation with the local authority and Environment Agency did not raise any points in regard to the off-site well. The Planning Inspectorate however have requested additional information on the well, specifically the current condition of the well site, any existing surface infrastructure and potential for hydrocarbon contamination.

Further enquiries have provided additional details, given in Appendix F of this report, which include:

- a) Correspondence from Egdon Resources plc, who have held the current Petroleum Exploration and Development licence (PEDL 182) from July 2008. They confirmed that the well was drilled in 1984 and tested in 1985. The operator BP capped off and decommissioned the well prior to relinquishing the licence (PL 182) in 1991.
- b) According to Egdon, "...the site has not been restored and remains in place having had various uses by the landowner in the intervening years...".
- c) A drilling completion report provided by the client confirms this was purely an exploration well, aimed at the Namurian and Westphalian (Carboniferous age) strata below 1100m.
- d) The drilling details give an elevation of 63mAOD. The test bore was taken to 46m at 445mm diameter, prior to being cemented to ground level. A 317mm bore was then cored through the cement seal to depth. There was a loss of drilling fluid at 23m, within the Coleby Mudstone (and limestone) Formation. A diagram of the well head indicates the test well

set into a 'cellar floor' ie excavated working area of the well head to 2m below ground level.

- e) The test pumping recovered oil which was taken off-site by lorries, ie there is no infrastructure of pipelines, tanks or other storage plant.

Since the well site lies beyond the current site boundary, Lidar data has been used by Intégrale to provide contour plots, and cross-sections included in Appendix F, to complement the historical map data. This confirms the well site lies on the east side of a north-south aligned topographic ridge between 60-65mAOD. The overall ground slope falls gently east northeastwards, ie away from the solar development site. This is in line with the overall regional dip of the Lias strata. The well site compound, approximately 100m by 80m in plan, has been levelled at 63-63.5mAOD, presumably as a working platform prior to well sinking in 1984. A heavily vegetated bund surrounds the former compound, with banks to typically 65-66m, increasing along the northern side to a wide bund at over 75mAOD.

Just north of centre is the remaining concrete slab, assumed to be the well capping. Historical Google Earth satellite imagery indicates that by 2003 the area was being used for agricultural storage (bales?), with more varied materials apparently by 2008-9, when ponding had occurred in the west central area. By 2017 the vegetation on the surrounding bunds had matured to shrubs and small trees.

In summary, this 300-500mm diameter exploration well sunk 35 years ago, has a cement seal placed to c.45m depth, and was used for test pumping, with the produced oil being tankered off-site. The well was decommissioned by 1991 and the former compound since used for temporary agricultural storage. The overall ground slope falls gently to the east or northeast, in line with the regional dip of the bedrock. The compound is level and bunded, with the only infrastructure remaining being the concrete slab centrally. Given the findings, potential future exploitation seems highly unlikely.

The potential for significant remnant hydrocarbon contamination dating from the well test pump phase appears minimal. The potential for current or future failure of the well sealing and decommissioning such that hydrocarbons could pollute the solar development site is considered negligible given the siting, bunding, topography and the dip direction of the Lias bedrock.

2.3 Outline History

Historical maps obtained from a Groundsure report are included in Appendix E, together with a summary plan of pertinent features. The Groundsure report is based on the original slightly smaller site area (as shown on the maps) however, it includes information from a larger surrounding 'buffer zone' and therefore covers the complete current boundaries. These indicate the following pertinent information:

Map Date	Site Features / Land Use	Adjacent Features (distance from site)
1885-1906	Majority of site agricultural fields with drainage ditches in lower area. Gokewell Priory Farm with pond in N area. Hummocky /marshy area in extreme lower SW with pond. Several small scale excavations or pits in lower W area may indicate surface diggings for ironstone (known locally as gulleys).	Icehouse and Gokewell Strip woodlands present as existing. Redbourne Hill and Appleby Iron Works 2kms W and NW respectively. Small excavations (surface ironstone workings?) beyond SW corner near Gorse Covert. Larger ironstone quarries 1.5kms SW at Emmanuel Bridge.
1948-55	No significant changes apparent within site	Ironstone quarries extended to within 800m of W boundary. Iron & Steel Works extended to within 750m NW.
1968-80	Overhead powerlines constructed crossing SW to NE from substation within Iron & Steel Works to SW. Possible new drainage ditches (and small pond?) within hummocky area in extreme NW near Crow Covert. Clearance of Sodwall Plantation (possible ironstone workings?)	Iron & Steel Works expanded to within 500m W. Opencast Ironstone Workings mapped to within 500m NW. Emanuel Air Strip West and East within 500-750m SW of site. Drainage ditches apparently expanded just beyond site to SW, around Bottesford Beck. By 1979 Iron & Steel Works had expanded to SW site corner across former Air Strips and opencast ironstone workings typically to within 100m W. In extreme SW corner, opencast extended to site boundary, and two parallel drainage ditches constructed at cutting face.
1994-2002	Gokewell Priory Farm buildings demolished – exact date unclear from mapping. Opencast ironstone workings annotated in extreme SW site extension area.	Poultry Farm constructed beyond central E boundary near Heron Holt woodland.

2002-14	No significant changes apparent. Maximum elevation of drainage ditches / surface water courses on this mapping at 36mAOD in N, 43mAOD centrally, 35mAOD central southern, and 30mAOD in southern area.	Oil Well mapped at Top Wood c. 100m NE*. Opencast workings to W marked as Disused. Linear water feature c. 100-200m W of site reflects flooded workings (also shown on Google Earth imagery from 2003). Tree planting beyond SW corner on former opencast area.
---------	---	---

* See 2.2.4.4 above.

A Built Heritage Assessment by Cotswold Archaeology [Document Ref 6.8 LC ES CH8] has identified a WWII Heavy Anti-Aircraft Battery in the upper eastern area (north of Gokewell Strip). They report it de-armed in 1942 and conclude that remains are unlikely to survive below ground.

2.4 Hydrogeology, Hydrology & Groundwater Vulnerability

BGS groundwater data available on-line indicates that a hydrometric area boundary runs north-south across the higher slopes of the eastern area. Upslope of the highest main extent of the Devensian Blown Sand (Sutton Sand) is approximately 45-55mAOD, the regional geological dip of the bedrock strata at 1-3° to the east directs both any surface water flows and groundwater flow direction eastwards. (The nearest surface water course to the higher eastern boundary is 600-800m remote). Downslope of 45-55mAOD, where the bedrock is overlain by the Blown Sand, both surface water and shallow groundwater flow within the Sand is to the west. The contours on the estimated minimum groundwater level or pressure surface within the Lincolnshire Limestone was also at c. 45mAOD (based on mid 1960's data).

From the published geological strata and topographic maps showing surface water courses, the following can be anticipated at this site:

Shallow Soils Permeability	Permeable with intergranular flow in superficial deposits. High fracture/fissure permeability in limestone bedrock.
Anticipated Groundwater Table Depth	Very Shallow (<3m below ground level) in lowest western area. Shallow (3-5m below ground level) centrally. Moderate (5-10m below ground level) in higher eastern area.
Anticipated Groundwater Flow Direction	Extreme western boundary zone with opencast & ironworks, flow direction may be controlled by drainage ditches and likely low flow rate. Western zone and up to 45-55mAOD, flow direction to west. Eastern boundary and down to 45-55mAOD, down dip to east.

Surface Water Courses and Flow Direction	Unnamed drainage ditches (unnamed Tertiary Rivers) on site in western area, typically flow west and north-south. Springs & stream in Far Wood/ Heron Holt c. 600m east of site at c. 42mAOD flow east northeast.
Aquifer Type	Secondary A Permeable layers in superficial deposits. Bedrock strata from east to west: Principal Aquifer in higher limestones. Secondary Aquifer in lower Coleby Mudstones and Marlstone Rock. Unproductive Strata formed by upper Coleby Mudstones. (See page 33 of Groundsure Environmental Data for details).
Environment Agency Soils Classification	High leaching potential.
Hydraulic Continuity of Groundwater and Water Courses	Likely throughout site.

A summary plan has been included in Appendix C to indicate:

- Western area below 30mAOD has the likely shallowest groundwater table draining westwards;
- Likely hydraulic continuity with artificial drainage ditches also flowing north-south;
- There is a potential discontinuous springline at 40-43mAOD;
- The upper eastern area drains to east and water table is likely below 45-55mAOD;
- This causes spring issues at c. 40-45mAOD remote from the site to the east;
- Shallow depth soils in complete area are classed as being well drained.

2.5 Environmental Information

The following pertinent information on activities within 250m of the site has been extracted from the Groundsure report included in Appendix E.

2.5.1 Pollution Information and Licencing

	Number	Distance from Site
Surface Water Abstractions	0	
Groundwater Abstractions	0	
Contaminated Land Register Entry/ Enforcement / Prohibition	0	
Known Pollution to Controlled Waters	0	
Integrated Pollution Control	0	

Fuel Station Entry	0	
Registered Radioactive Substances	0	
Discharge Consent	1	Revoked (1997) effluent discharge Cokewell Priory
Known Landfills / Waste Management / Transfer Sites within 250m	2	190mW Crosby North Landfill Waste landfilling (excluding Inert) Current 144m W Scunthorpe Concast Surrendered Licence for Industrial, liquid, sludge, British Steel Corporation, last recorded 1992.
Source Protection Zones	None	
Floodplain Area / Flood Warning Status	None	Potential for groundwater flooding at surface locally

2.5.2 Geological Information

Hazard Type	Hazard Rating
Natural and Mining Cavities	Possible small scale mining within site boundaries for ironstones (see historical maps also)
Potential for Ground Dissolution Stability Hazard	Very Low
Potential for Landslide Ground Stability Hazard	Moderate
Potential for Shrinking/Swelling Clay Ground Stability Hazard	Low
Potential for Compressible Deposits Ground Stability Hazard	Moderate
Potential for Collapsible Deposits Ground Stability Hazard	Very Low
Potential for Running Sands Ground Stability Hazard	Low

2.5.3 Background Soils Chemistry

The Groundsure report includes BGS estimated background soil chemistry for 5 metals within shallow soils. This indicates that naturally occurring chromium marginally raised in this area. However interpretation suggests that at these levels, such metals would be unlikely to exceed generic assessment criteria for commercial use. Current National Planning Policy guidance does not consider naturally occurring metals as evidence of contamination.

2.5.4 Contemporary Trade Directories

Potentially Contaminative Activities on Site	No additional activities other than the overhead power supply pylons are given in the Groundsure data.
Potentially Contaminative Business Activities within 250-300m of Site	No additional significant activities other than the oil well detailed above and the steel works westwards are given in the Groundsure data.

2.5.5 Groundsure Radon Risk Information

The Groundsure report indicates that the specific site lies in a Radon Affected Area, requiring Full protection measures, for new buildings and dwellings.

2.6 Conceptual Exposure Model

This section draws together desk study information, outlines an initial conceptual exposure model, and provides a qualitative assessment of potential contamination via a source-pathway-receptor framework for the proposed redevelopment.

2.6.1 Proposed Redevelopment

Outline details of the proposed redevelopment are shown in Appendix A and can be summarised as:

Buildings	Small Control Room and Switchroom Buildings
Car Parking	Minimal
Access Roads	Main access from northeastern area to centre and former Gokewell Priory area. Smaller access roadways to each solar panel array area and inverter stations
Landscaping	Not considered substantial
Development Level	As existing
Drainage	Watercourses to be retained with 8m buffer zone alongside. Swales (c. 300mm depth by 3m width) to run N-S across central lower and extreme southwest areas to limit overland flows into watercourses.
Substation Building and Compound, and Battery Energy Storage System	Substation Building and Compound (Work No. 4; Battery Energy Storage System (Work No. 2 A with potential for alternative location Work No. 2B), Inverter & Transformer stations for each area of solar panel arrays

- The proposed arrays of solar panels are to be laid in rows approximately east – west across the field enclosures. Solar panels are typically mounted on a metal framework, fixed onto steel pins driven between 1-

2m depth into the ground, depending on the ground conditions. Alternatively, a system of installing small 'foot pads' for the arrays may be adopted. It is assumed that the east-west alignment across these gentle to moderate westerly facing slopes will require either very minor cutting into the slope, or more likely design of the metal frameworks to incorporate any more critical slope angles.

- In addition there will be a requirement for shallow depth cable trenches, assumed no deeper than 0.5m below existing ground level. Gravel filled drainage trenches of up to 0.5m depth are also assumed.
- The transformer and containerised battery units will be placed on a 300mm permeable gravel bed to allow attenuation and infiltration of rainfall and surface run-off into the underlying soil.
- Structures are limited to inverter and transformer stations, which typically site on reinforced concrete foundation slab, on sub-base aggregate, with a drain surrounding if required. Fencing and CCTV cameras are generally required around the boundary.
- The proposed layout shows the area of the former Gokewell Priory Farm, its associated pond and stream course remaining as existing. There are to be no solar panels within the overhead power cable and pylon corridor.
- The off-site former exploration well compound may be used as a temporary storage compound during the construction period.

2.6.2 Potential Sources of Contamination

The desk study has been used to identify the likely remnant contaminant sources and distribution. The potential current and historical on- and off-site sources and the contaminants associated with these, derived using CLR8 Potential Contaminants for the Assessment of Land, and through experience of industrial land use, are detailed below.

Potential Contaminants Associated with On-Site Sources			
Description	Metals, semi-metals, non-metals, inorganic chemicals and others	Organic chemicals	Ground Gases & Vapours
Localised small ironstone pits, if backfilled	Range of metals possible, given age	Unlikely given age of likely backfilling	Unlikely given age of likely backfilling
Recent Agricultural Use & Maintenance	Unlikely significant given usage and historical development		

Potential Relevant Contaminants Associated with Off-Site Sources			
Description	Metals, semi-metals, non-metals, inorganic chemicals and others	Organic chemicals	Ground Gases & Vapours
Opencast Ironstone Workings, if backfilled	Range of contaminants possible, although unlikely mobile in site direction	Range of contaminants possible, although unlikely mobile in site direction	Unlikely given distance, topography and ground conditions
Electricity Substation and overhead cables/pylons infrastructure	Unlikely to impact within site boundaries due to distance, topography and ground conditions		
Iron & Steel Works	Air borne dust & particulate contamination possible for range of metals	Unlikely given distance, topography and ground conditions	
Oil Well Infrastructure at Top Wood (95m remote)	Unlikely given land usage and ground conditions, depth of well seal, date of test pumping, and subsequent decommissioning. Geological and topographic conditions indicate no direct link to solar development site.		

The potential relevant contamination sources are therefore considered to be limited to remnant metals in soils within any localised backfilled ironstone pits, and air borne derived particulates from the extensive industrial complex to the west and southwest, remaining within shallow depth site topsoil. The Gokewell Priory Farm building area has been demolished since 1994-2002, and no specific development in that area is proposed. The hummocky areas west of this (near Crow and Little Crow Coverts) may relate to either this demolition or drainage works, or less likely to ironstone working.

2.6.3 Potential Receptors

A future solar park end use and known neighbouring agricultural land uses have been used to develop an understanding of the likely sensitive human receptors. In view of the very limited ground intrusion needed to install the panels, and the shallow depth of any service runs, or access track/roadways, it is envisaged that potential receptors to contamination (if present within the soils on-site, or via migration from adjacent sites) are limited to:

- Construction Workers during installation or maintenance. The most critical receptor would therefore be a female adult.

- Future maintenance staff or neighbouring workers.

Information gathered during the site research has been used to develop an understanding of the likely sensitive controlled waters receptors. These are considered to be the drainage ditches, streams and ponds on-site, and the groundwater within the Principal and Secondary A aquifers.

2.6.4 Potential Pathways

The presence of Blown Sand superficial deposits beneath both the site and adjacent areas creates a direct potential pathway for cross-migration of ground gases, leachate or mobile contaminants. The presence of drainage water courses indicates a potential pathway for leachate or other mobile contaminants within the site to locally impact on water receptors.

To develop further an understanding of the potential risks posed by the contaminants to human receptors, the pathways through which contaminants may impact sensitive receptors need to be identified. The CLEA model indicates potential exposure routes for assessing risks to human health for a solar panel array use to be limited to:

- Dermal exposure if contaminated soil exposed during groundworks;
- Inhalation of particulates if contaminated soil exposed during groundworks.

It is considered that the potential pathways with respect to controlled waters will be limited to:

- Lateral migration of perched groundwater or leachate to surface water (drainage ditches or ponds) during construction.
- Surface run-off to water courses if uncontrolled drainage allowed.

2.6.5 Conceptual Site Model with Respect to Human Health

The conceptual site model has been developed based upon the following potential source-pathway-receptor linkages:

SOURCE		PATHWAY		RECEPTOR
Contaminated soils	→	Dermal exposure (if exposed during groundworks).	→	On-site female adult construction worker.
Contaminated soils	→	Outdoor inhalation of soil dust/particulates.	→	On-site female adult construction worker.

The construction of foundations for the solar panel arrays typically comprises driving a short pre-formed steel pin into the ground, without production of spoil, or installation of a small diameter 'foot-pad' to support the steel legs. In view of the very limited groundworks required, and the minimal interaction with existing soils, it is considered that the actual risk to groundworkers,

should contaminated soils be present within the topsoil and subsoil, is negligible.

2.6.6 Conceptual Site Model with Respect to Controlled Waters

The conceptual site model has been developed, based upon the following potential source-pathway-receptor linkages:

SOURCE		PATHWAY		RECEPTOR
Contaminated soils (if present within construction depth)	→	Leaching from soils or migration of liquid contaminants through the unsaturated zone by means of new man-made or natural pathways	→	Surface Water Courses & Groundwater
Contaminated soils (if present within construction depth)	→	Run-off from disturbed surface soils	→	Surface Water Courses

The very limited groundworks required to install the arrays of solar panels is considered to have negligible potential to cause or increase leaching, should any contaminated soils be present within the shallow depth of penetration. Run-off during construction works will need to be controlled and managed, as is standard practice. During future use, run-off is unlikely due to the predominant topsoil and turf cover and anticipated infiltration characteristics, but requires consideration.

3.0 ANTICIPATED GROUND & GROUNDWATER CONDITIONS

3.1 Anticipated Strata

In view of the above, the following ranges of ground conditions are anticipated:

Higher Eastern Area at or Above 60m AOD

Weathered Oolitic Limestones (Lincolnshire Limestone Formation of Inferior Oolite Group)

<u>Depth (m)</u>	<u>Description</u>
GL to 0.5/0.75	TOPSOIL and SUBSOIL (brashy/stony and sandy with limestone gravel)
0.5/0.75 to 1.0/3.0	Medium dense silty SAND with increasing gravel and sandy GRAVEL with a variable (loamy) silty binder, clayey in parts (WEATHERED INFERIOR OOLITE GROUP)
Below 1.0/3.0	Cream oolitic LIMESTONE, highly fractured with brown sandy SILT infilling (INFERIOR OOLITE GROUP)

Central Area between 50-60m AOD

Sandy Ironstone and Sandstones (Grantham Formation & Northampton Sand) or Coleby Mudstones)

<u>Depth (m)</u>	<u>Description</u>
GL to 0.5/0.75	TOPSOIL and SUBSOIL (slightly stony and very sandy)
0.5/0.75 to 1.0/2.0	Medium dense silty SAND and SILT (WEATHERED OOLITE OR LIAS GROUP)
1.0/2.0 to 2.0/4.0	Dense gravel becoming weathered bedrock of SILTSTONE, sandy IRONSTONE and SANDSTONE (NORTHAMPTON SAND) or Firm yellow or grey CLAY, highly weathered laminated MUDSTONE/ SILTSTONE OR SANDSTONE (LIAS GROUP)

Central & Western area between 30-50m AOD

Blown Sand overlying Lias mudstones and locally limestones

<u>Depth (m)</u>	<u>Description</u>
GL to 0.5/0.75	TOPSOIL and SUBSOIL (slightly stony and very sandy)
0.5/0.75 to 2.0/4.0	Loose or medium dense yellow brown silty SAND with some gravelly sand (SUTTON SAND / DEVENSIAN BLOWN SAND)

Below 2.0/4.0 Dense sandy IRONSTONE and SANDSTONE (NORTHAMPTON SAND) or Firm yellow or grey CLAY, highly weathered laminated MUDSTONE/ SILTSTONE OR SANDSTONE (LIAS GROUP)

Lower Western area at or below 30m AOD

Blown Sand overlying Lias Mudstones

<u>Depth (m)</u>	<u>Description</u>
GL to 0.5/0.75	TOPSOIL and SUBSOIL (slightly stony and clayey, very sandy)
0.5/0.75 to 2.0/4.0	Loose or medium dense yellow brown slightly clayey silty SAND with some gravelly sand (SUTTON SAND / DEVENSIAN BLOWN SAND)
Below 2.0/4.0	Firm dark grey CLAY, highly weathered laminated shaley MUDSTONE/ SILTSTONE (LIAS GROUP) (includes Pecten Ironstone)

3.2 Anticipated Groundwater and Leachate

It is anticipated that rainfall infiltration will rapidly move down through the free-draining topsoil and into the superficial granular deposits in the central and western area, and into the fissured predominant limestones in the higher eastern area. The potential groundwater conditions, springline and drainage directions are shown on an annotated plan included in Appendix C.

The groundwater table within the higher Lincolnshire Limestone Formation will be controlled by regional dip direction, which here is predominantly eastwards at 1-3°. The likely groundwater elevation is between 45-55mAOD, i.e. at least 5m below ground level in this higher area.

Below 50mAOD the occurrence of Blown Sand deposits appears to promote good drainage of the shallow depth soils, and the moderate slopes within the central area at 1 in 10 to 1 in 20, are likely to have an unconfined groundwater table within the basal layers of these sands.

Below 30mAOD on the lowest western area, the Blown Sands may well become more clayey or silty, and the underlying Coleby Mudstone of the Upper Lias, with a shallow surface slope of 1 in 50 to 1 in 60 appears to promote a shallower water table. Spring issues are noted on the historical mapping at around 40-43mAOD and drainage ditches are prevalent below this elevation. Below 30mAOD the extreme western area may well have more poorly draining shallow soils, with frequent drainage ditches required. In addition, any backfilled ironstone workings could create localised poorly drained surface soils.

Nevertheless, the soils throughout the complete site area are classified as well drained or free draining.

3.3 Anticipated Ground Gas Regime

There is a substantial industrial area downslope to the west and major opencast ironstone workings, which may have been partially backfilled. It is not anticipated that an abnormal ground gas regime will be present beneath the majority of the site, in view of the topography, distance and apparent lack of continuity within the Blown Sand deposits.

However there remains a potential for abnormal ground gas development beneath the more level and closer western zone, and locally where small scale ironstone workings may have been backfilled.

4.0 CONTAMINATED LAND CONSIDERATIONS

4.1 General

The desk study has indicated that the current site has a prolonged history of agricultural usage. There is no specific evidence of significant large-scale ironstone extraction or landfilling within the boundaries proven to date, with the exception of the extreme southwestern zone, where opencast workings are annotated on the 1994 map. There appears also to have been small scale extraction via pits and near surface digging in the lower western area. Adjacent to the west and northwest boundaries, where there has been substantial ironstone working off-site, both opencast and underground mining areas may well be backfilled with unknown materials. There has been prolonged heavy industry immediately beyond the site boundaries.

4.2 Qualitative Risk Assessment

The currently proposed solar park is likely to involve construction activity within the uppermost 500-1500mm of ground level. The likelihood of solar panel array construction creating an adverse, or worsening impact on the contaminant exposure model given above, is therefore considered negligible for most of the site and low for potential backfilled features.

There is a negligible risk of a new controlled waters pollutant linkage being created due to the very shallow depth of construction activity, and the non-polluting nature of the development.

It is not currently anticipated that shallow depth soils will include significant remnant contamination, however this will need to be confirmed in view of the proximity of industrial sites and suggested small scale pit extraction in the extreme western boundary area, and recent 1990's opencast working in one small area. The majority of proposed construction however involves minimal ground intrusion, and it is considered that the pathway for exposure of groundworkers during construction is unlikely to create a significant contaminant linkage, with standard practice.

The overall ground gas regime beneath the site is likely to be normal or near normal. The proposed construction of solar panel arrays will not have any overall adverse impact on that ground gas regime. In the lower western area there is potential for an abnormal ground gas regime, due to any backfilled workings, and requires further consideration in view of the proposal for buried electrical plant and cabling.

4.3 Conclusions

In view of the above low levels of risk and proposed change of use, it is advisable that limited investigation/assessment be completed. It is concluded that for contaminated land assessment:

- Confirmatory intrusive contamination investigation is recommended, concentrated on the western boundary, targeted at specific features

shown on historical maps. This will provide data on the occurrence and variation in shallow depth soils conditions (typically between ground level to 1m depth, and with deeper investigation at limited locations). The most technically appropriate method of investigation would be with shallow open-drive sampling boreholes.

- If these boreholes confirm the absence of significant extraction or landfilling in the western boundary zone, it seems unlikely to be necessary to undertake further investigation for this aspect across the remainder of the site. However where other geotechnical or drainage investigations are to be undertaken to provide data for design and construction, the opportunity to inspect and sample at those locations can be taken, to confirm deeper ground conditions and obtain additional soils samples for confirmatory analyses.
- Near surface and deeper gas monitoring should confirm the typical gas regime, particularly in the lower western area. This can be achieved by gas measurements within the borehole standpipes, which should have a variety of response zone depths. A sufficient programme of gas and groundwater monitoring would be 1- 2 visits initially during low or rapidly falling atmospheric pressure periods. That would identify whether any further monitoring is required.
- Assuming groundwater is proven within the standpipe installations, sampling can provide analyses of water quality and confirm any contaminant impact on controlled waters beneath the current site.

Following intrusive investigations the conceptual model can be updated and a quantitative risk assessment made. That will identify any specific areas of concern and the need for any further investigation, risk assessment or design measures.

5.0 GEOTECHNICAL CONSIDERATIONS

The anticipated ground conditions indicate predominantly granular superficial deposits or over-consolidated mudstones beneath the majority of the western and central area, and limestone derived soils in the higher eastern area. Under the anticipated minor loading changes due to solar panel array construction, these soils are unlikely to prove problematic.

If confirmation of shallow depth soils characteristics suggests it is merited, for instance in any shallow backfilled ironstone pits or backfilled workings, consideration could either be given to use of geogrid reinforcement in specific areas to increase soil stability and tensile strength, or shallow vibro compaction simply to produce a uniform formation and limit differential movement of solar panel arrays to within acceptable limits. The stability of the proposed anchoring / foundation system should provide adequate resistance to self-weight, wind and snow loadings.

The construction of the arrays should ensure that enhanced surface run-off, or erosion does not occur. Across the majority of the proposed array areas this is not considered likely, in view of the granular soils, described as being well-drained or free-draining. However where transformer and battery units are proposed, these should be sat on a permeable gravel bed to promote attenuation and infiltration to the underlying soils.

Intrusive geotechnical investigation will therefore be required to confirm the following aspects:

- The typical thickness of topsoil, subsoil and superficial deposits and their material, grading and strength properties;
- Description and classification of shallow depth soils, along with field infiltration trials via soakaway testing, to measure in situ permeability of near surface soils, and to compare against design permeability, drainage assumptions and design;
- Evidence for past shallow ironstone working or backfilling of such features, perhaps by 'bell pit' extraction or similar, in the lower western area, specifically investigating features indicated on historical mapping, where they occur within proposed solar panel array zones.

It would be prudent to take specialist advice on the need for Unexploded Ordnance supervision during any works close to the former WWII anti-aircraft battery identified by the heritage consultant in the eastern area.



The geotechnical investigation should be combined with contamination assessments discussed above. Machine excavated trial pitting will be the most appropriate technique for investigation and soakaway trials on this large area.

Appendix A

Site Location



KEY: ORDER LIMITS AERIAL PLAN

-  ORDER LIMITS
-  AREA NOT PART OF ORDER LIMITS


DOCUMENT REFERENCE NUMBER: 2.39 LC DRW

APFP REG: 5(2)(0)

INDICATIVE PLAN FOR INFORMATION ONLY

LITTLE CROW SOLAR PARK - INDICATIVE AERIAL IMAGE OF ORDER LIMITS



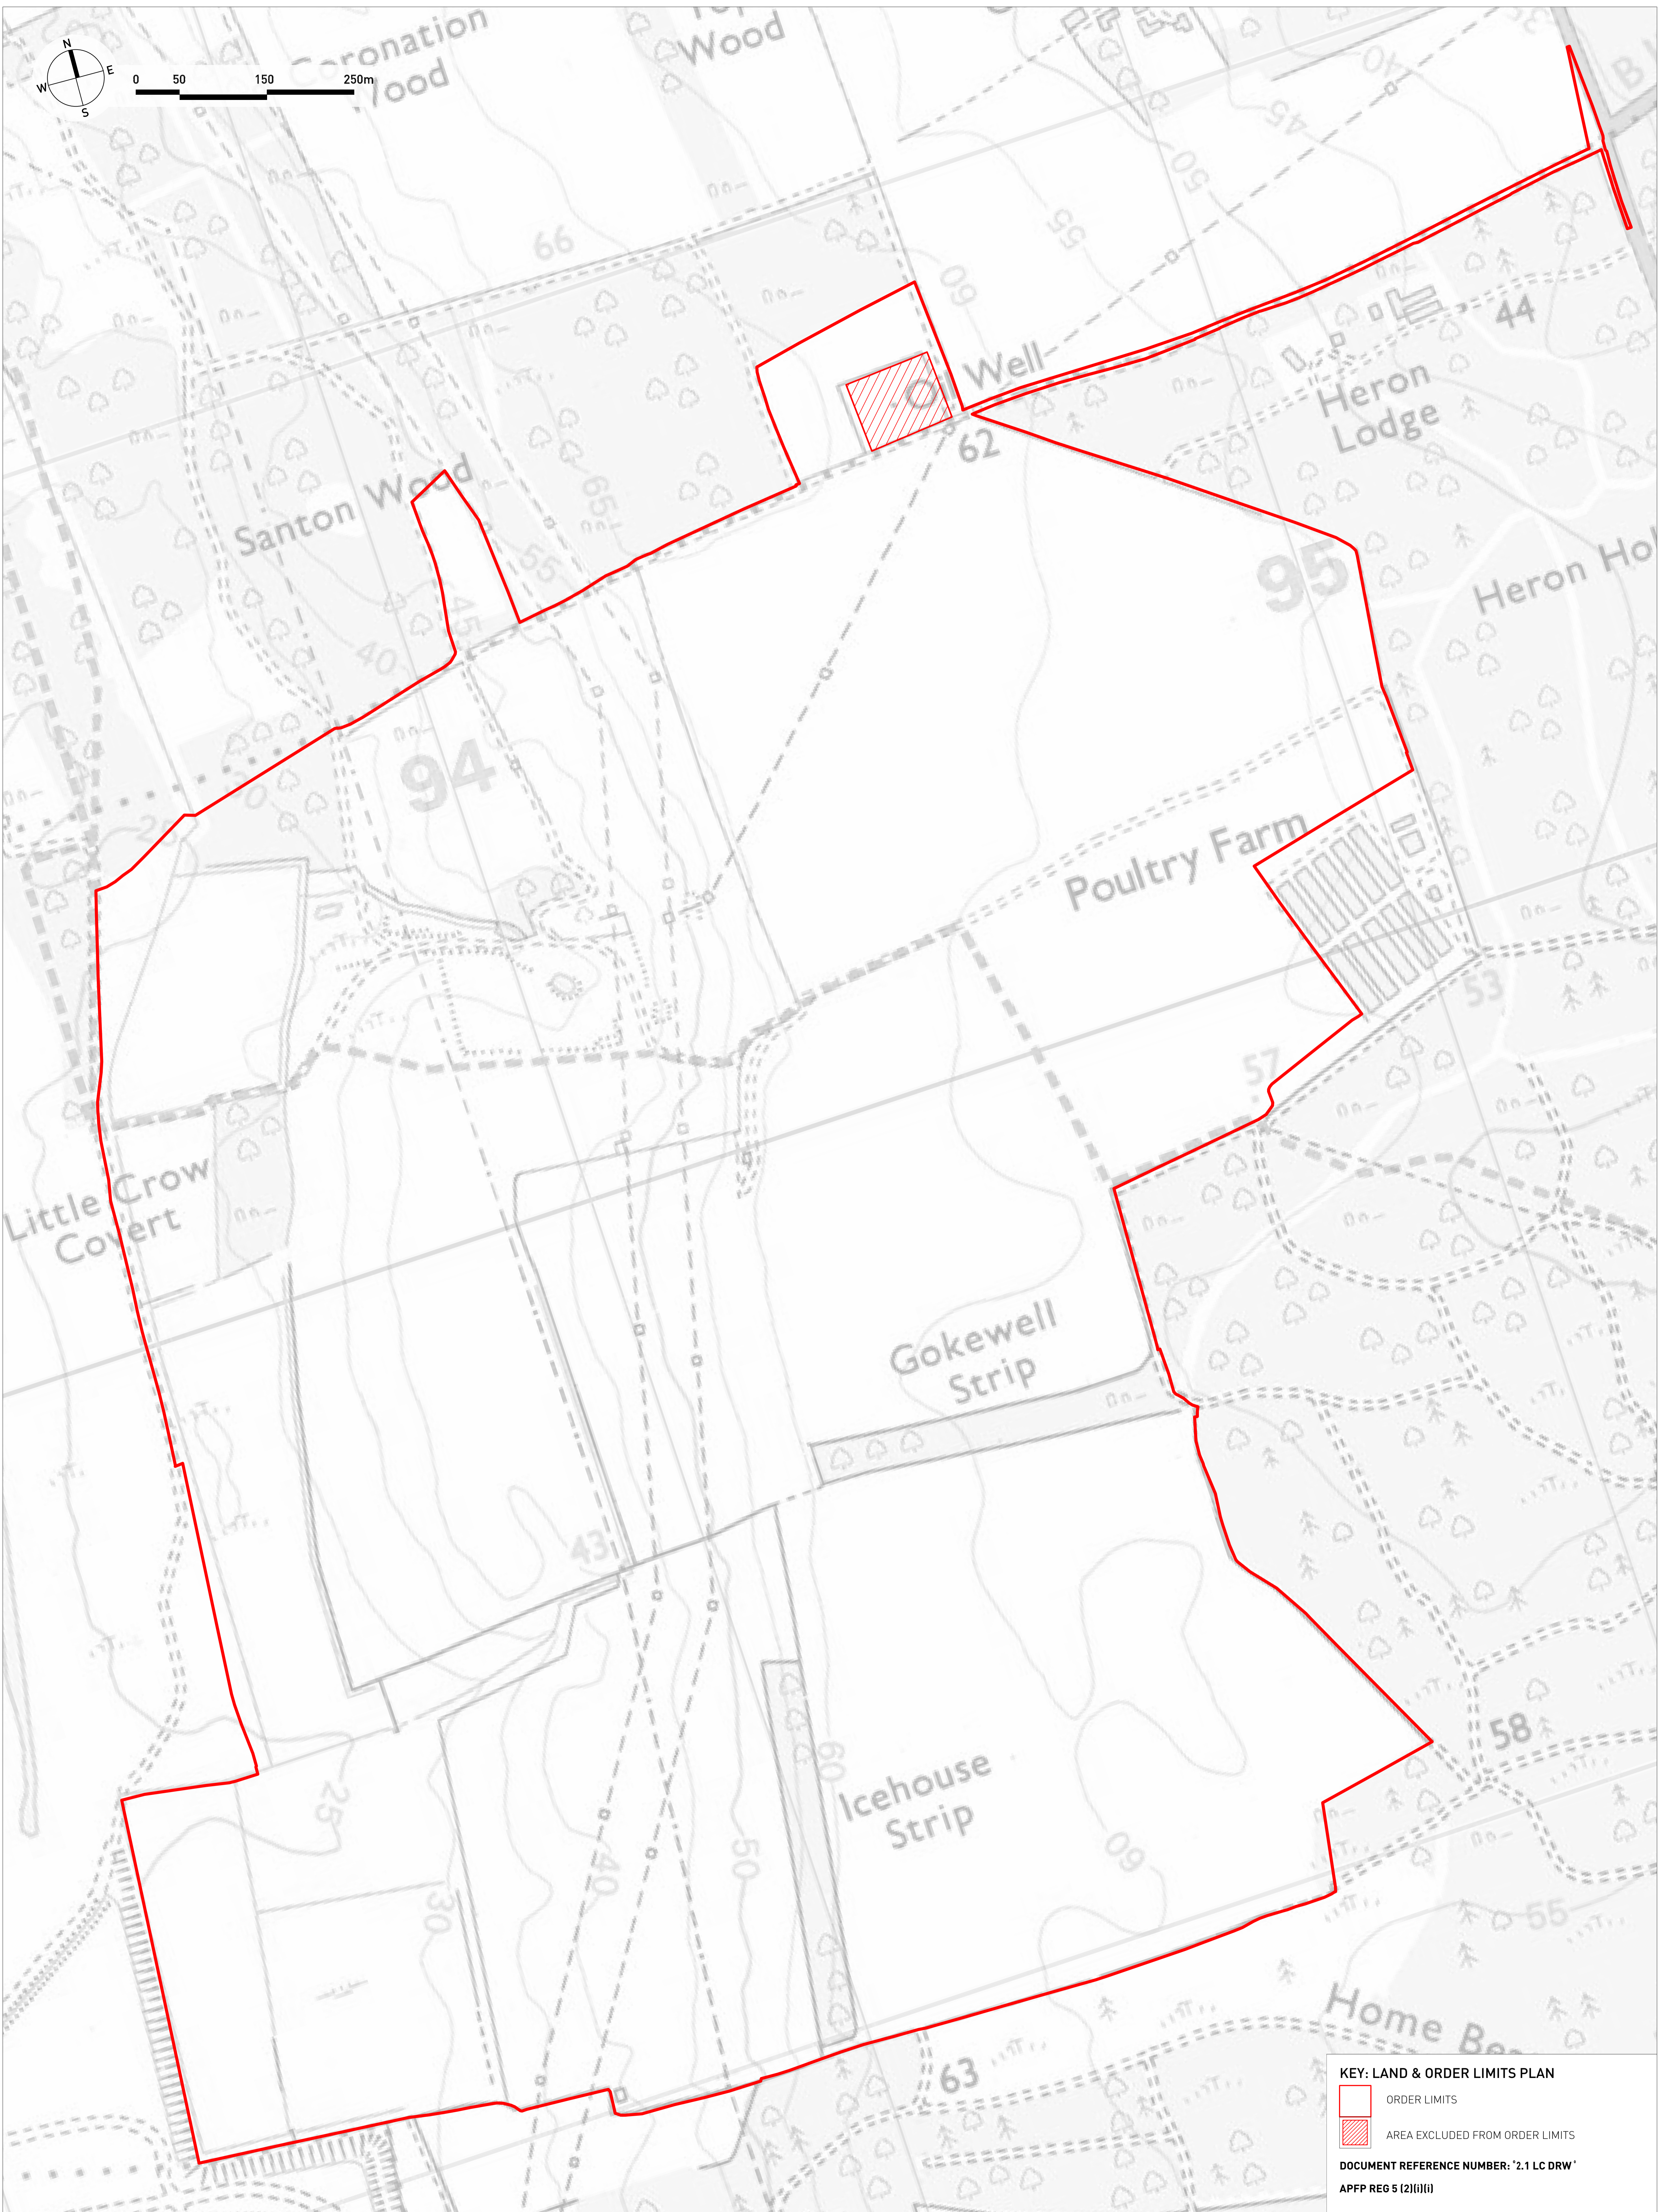

LITTLE CROW SOLAR PARK - LAND PLAN INCLUDING ORDER LIMITS

Pegasus Design


Appendix B

Site Description/Photographs

Santon
Solar/Battery
Site survey photos



View 1

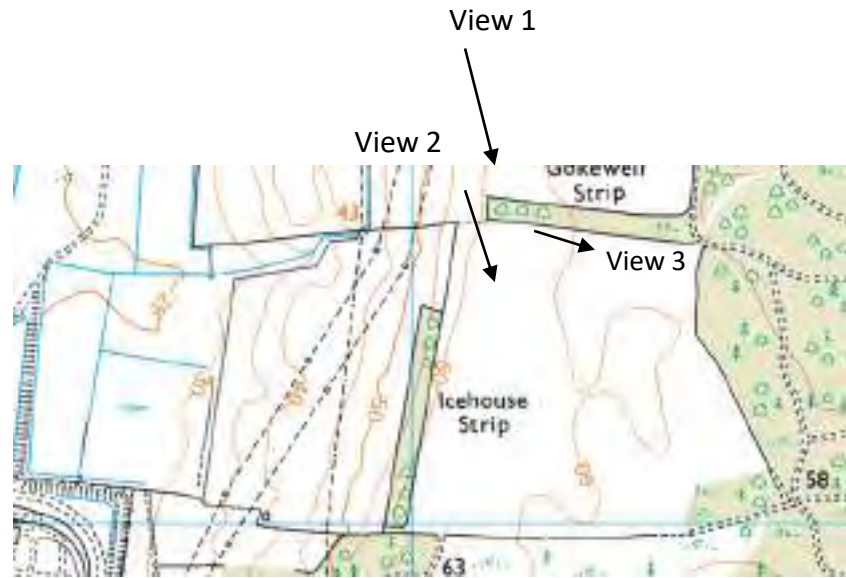


View 2



View 3

View 4

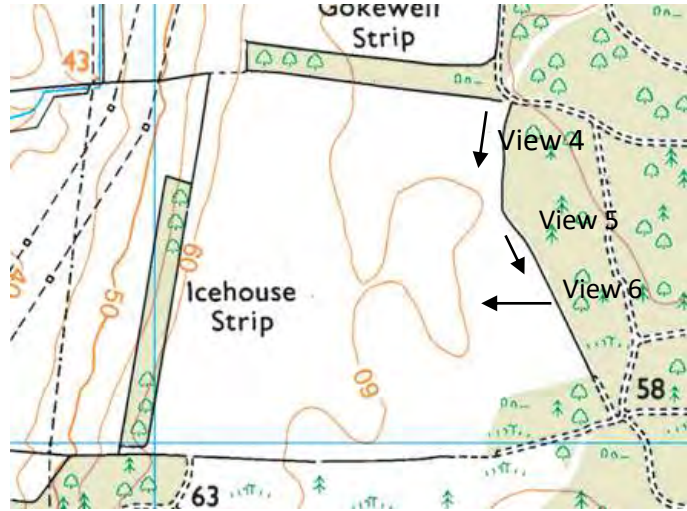


View 5



View 6



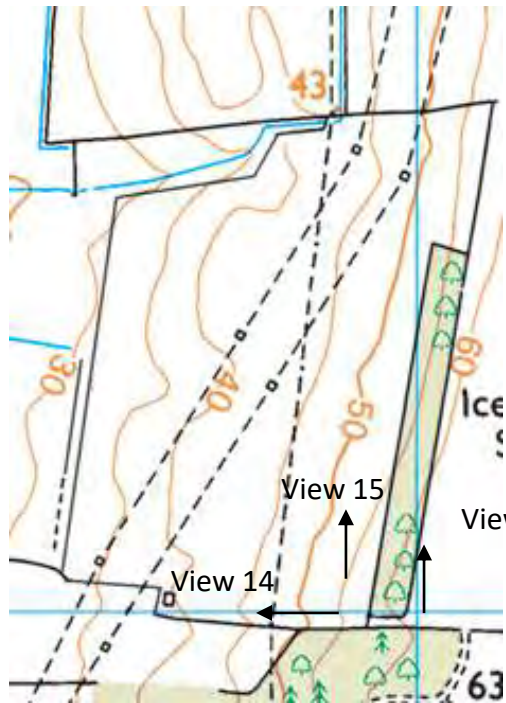


View 13



View 14

View 15



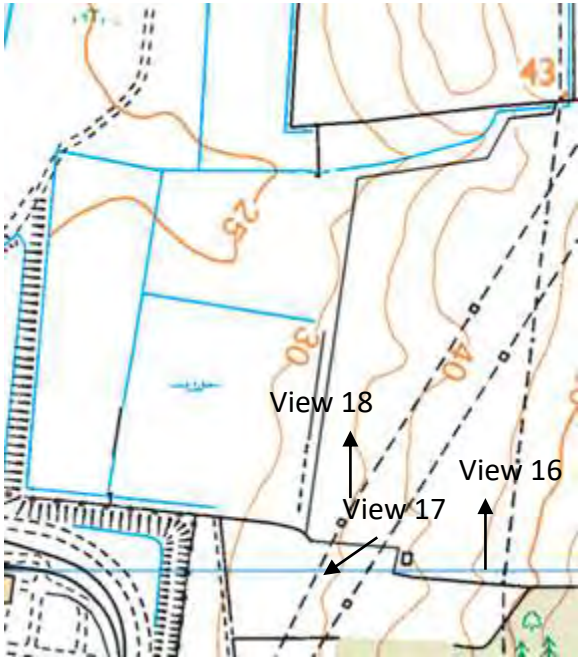


View 16



View 17 Sub

View 18



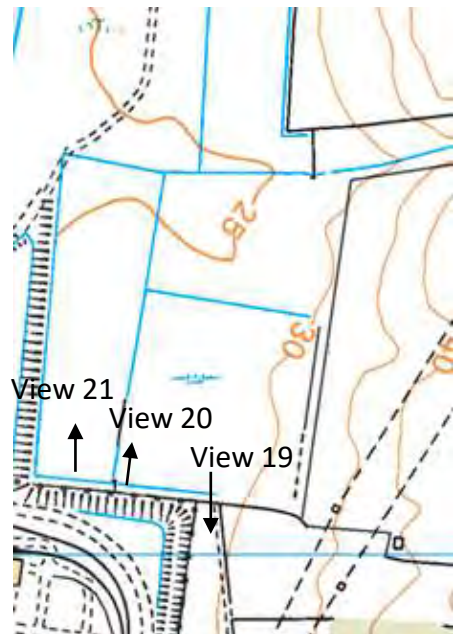


View 19 Sub



View 20

View 21



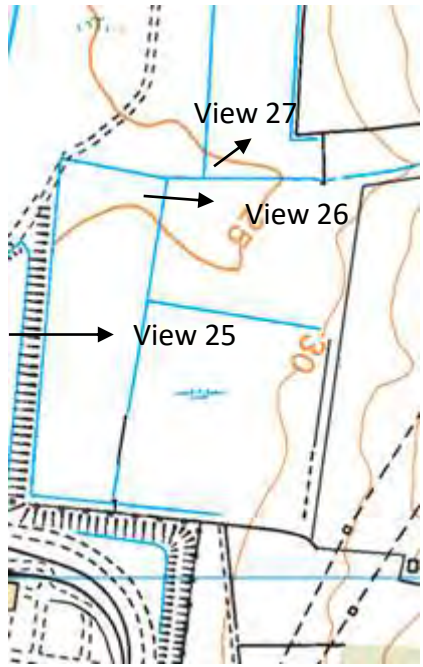


View 25



View 27

View 26



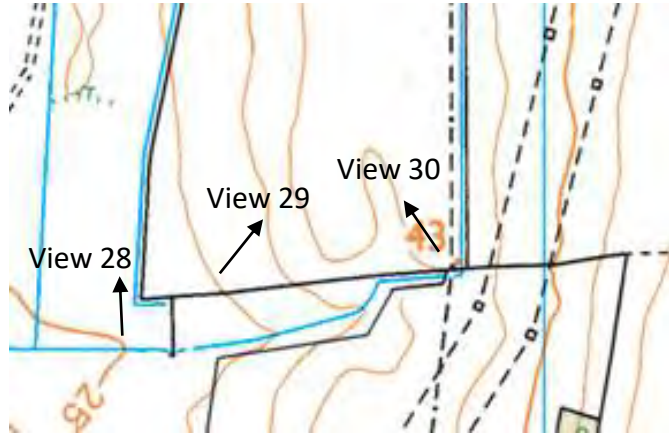


View 28



View 30

View 29



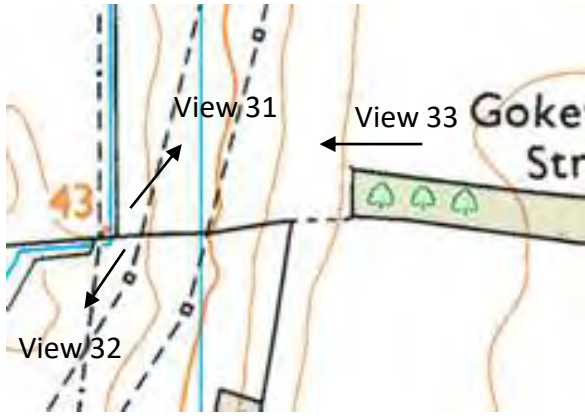


View 31



View 33

View 32



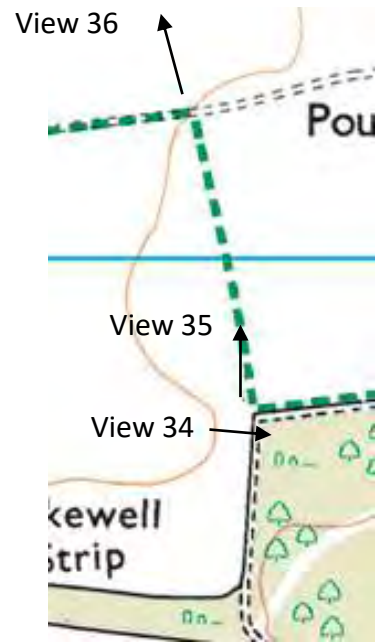


View 34



View 36

View 35



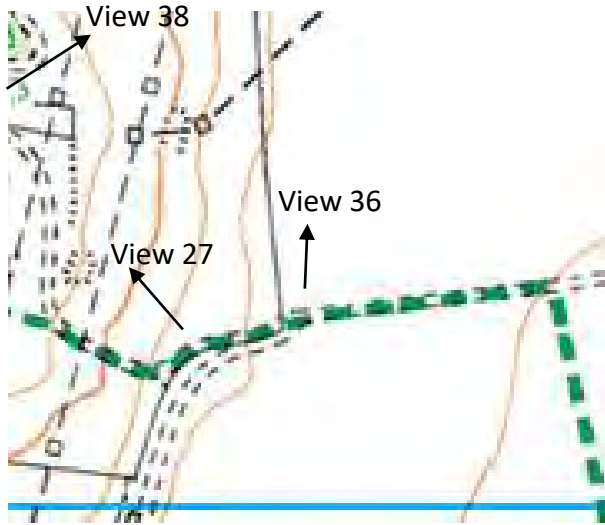

View 36




View 37



View 38



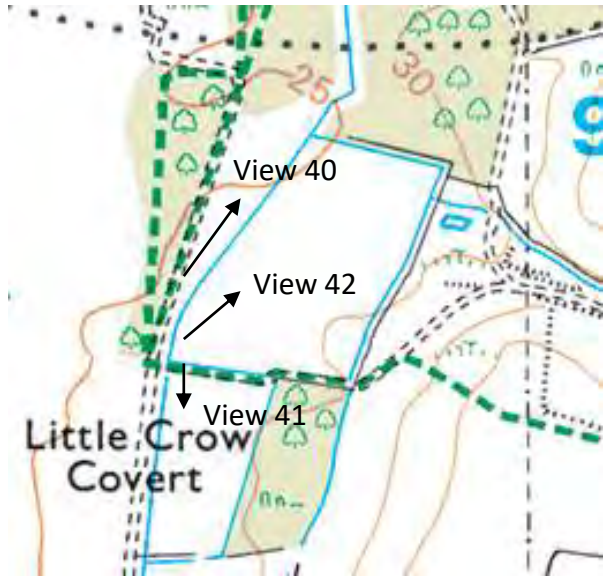

View 40




View 41



View 42



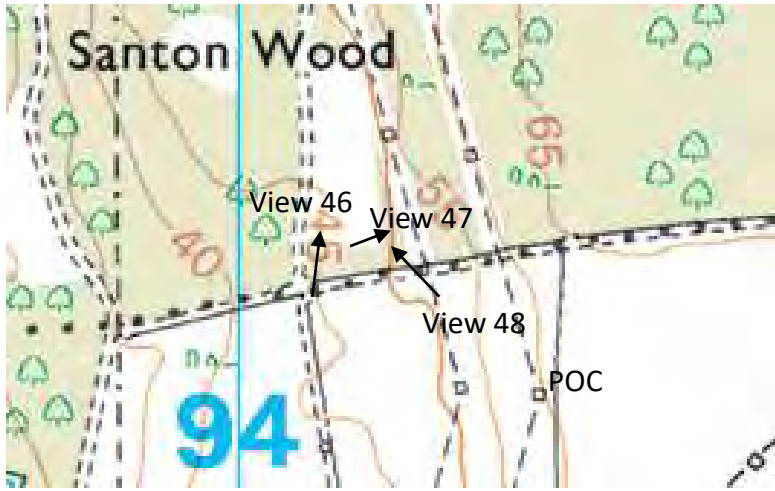


View 46



View 48

View 47



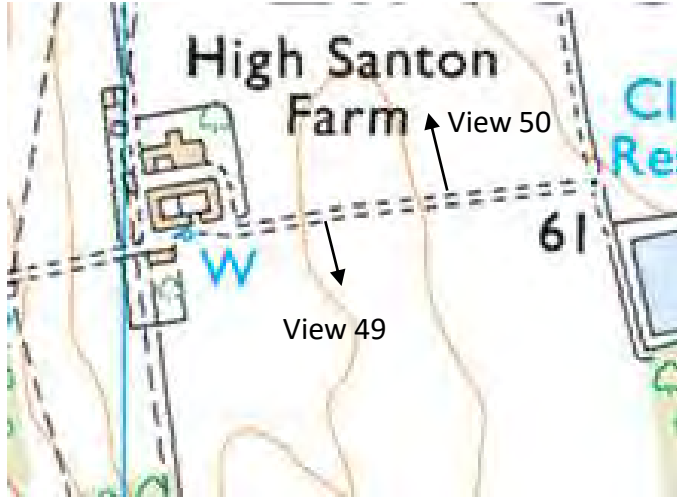


View 49



View 50



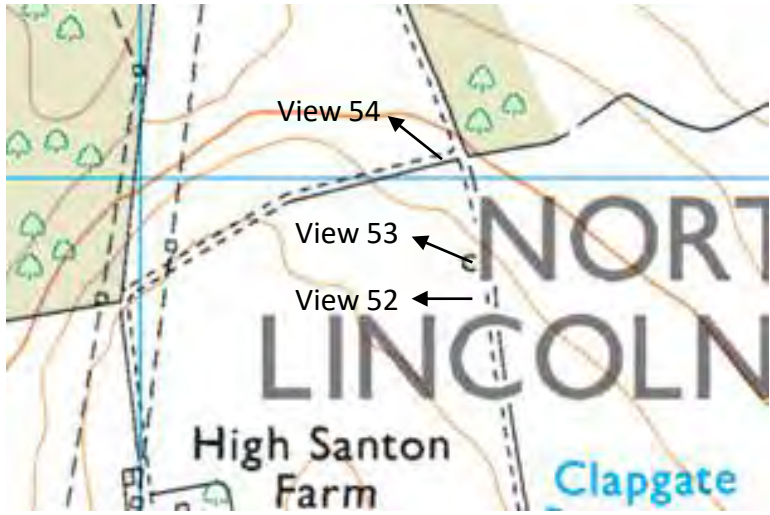

View 52



View 54

View 53



Appendix C

Geological Information

GEOLOGICAL • GEOTECHNICAL • ENVIRONMENTAL • ENGINEERING

Intégrale Limited, Suite 7, Westway Farm Business Park, Wick Road, Bishop Sutton, Somerset, BS39 5XP United Kingdom
Tel: 01275 333 036 www.integrale.uk.com

Registered Office: The Granary, Chewton Fields, Ston Easton, Somerset, BA3 4BX United Kingdom VAT Reg. No. 609 7402 37

Annotated Extract from BGS Sheet 89
Site Boundary approximate marked in red

Santon Oolite

Lower slopes overlain by
Sutton Sand
Devensian Blown Sand
< 7m of fine grained silty sand

Grantham Formation
Inferior Oolite Group

Northampton Sand

Scawby Limestone

Marlstone Rock Bed

Raventhorpe Beds
with Cleatham
Limestone

Coleby
Mudstones with
Marlstone Rock
= Charmouth
Mudstone

Pecten Ironstone

Higher area mapped as
overlain by Sutton Sand
(Devensian Blown Sand) may
extend locally as thin deposits
within site boundaries

Frodingham Ironstone
Backfilled Opencast

Kirton Cementstones with
limestones



Geology of Britain viewer

Surface Geology

3D Models

Borehole Scans

Earthquake Timeline


Borehole Scans

Click on a borehole to view scan.

Borehole depth

- 0 - 10m
- 10 - 30m
- 30m+
- Unknown
- Confidential or Restricted

[More on boreholes](#)

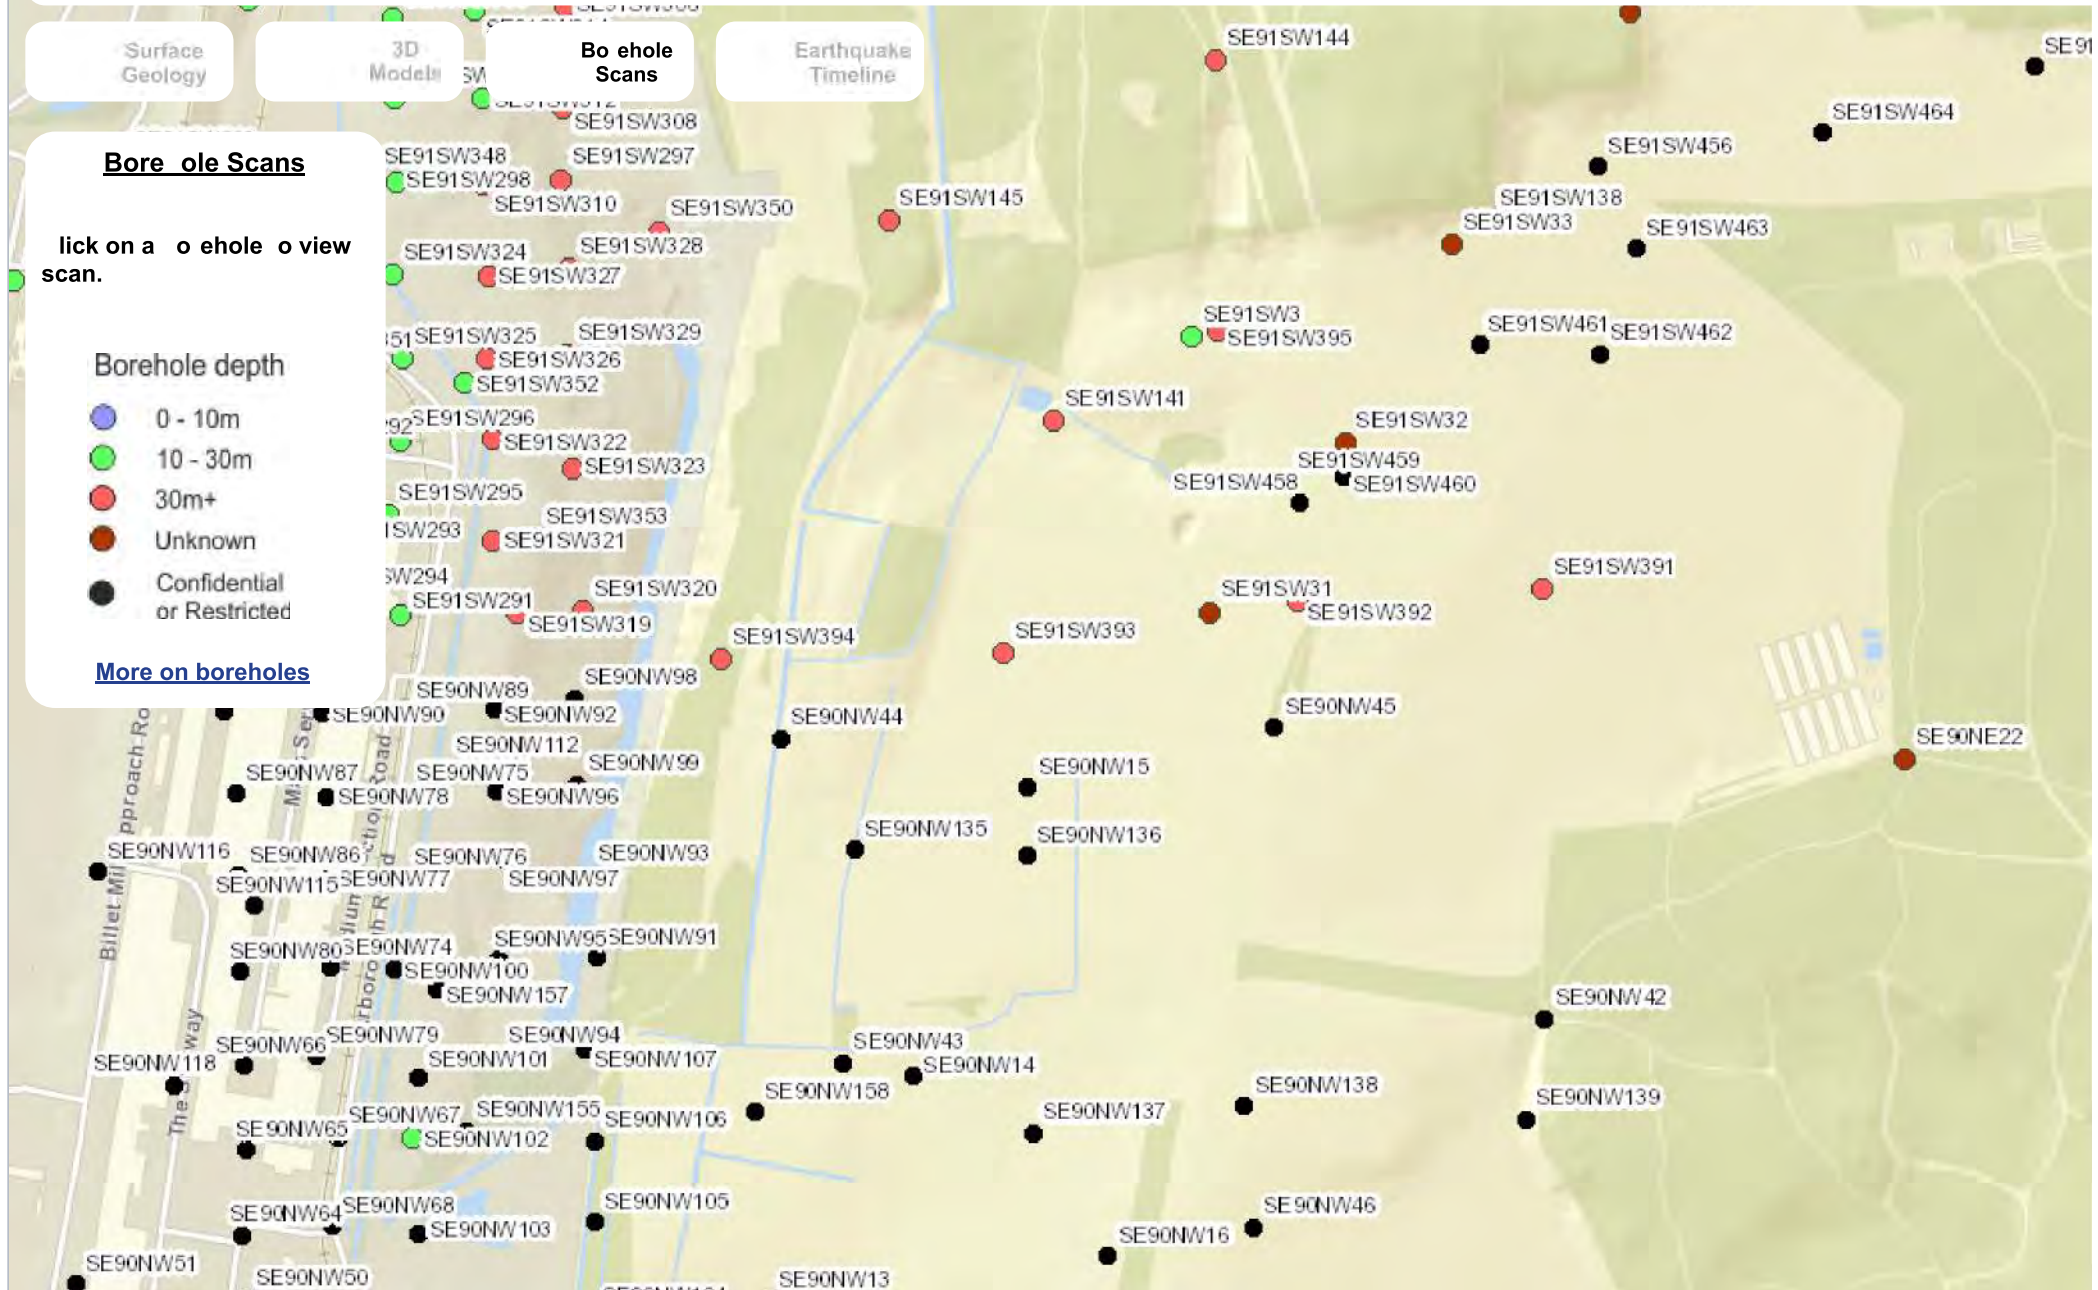



(*11932) Wt.80370/0370 10,000 9/39 A.& B.W.L.A.D. Gp.685

RECORD OF SHAFT OR BORE FOR MINERALS

SE 91 SW / 14-1

County Lincs

6" Quarter Sheet SE 91 SW / SE

1" N.S. Geol. Map 89 Brigg

1" O.S. Geol. Map

Whether Confidential

SE 93871039

Name and Number of Shaft or Bore given by Geological Survey:

Goswell Priory Farm

Name and Number given by owner (if different from above):

M106

Town or Village

Date of sinking

Exact site

near pond to west of Goswell Priory Farm

A sketch-map or tracing from a large-scale map is desirable.

Purpose for which made

29.5.1

Level at which bore commenced relative to O.D.

96.8

If not down bore, state if horizontal or up

Made by

for Messrs.

Information from

Date received

Specimens

Dip of strata

GEOLOGICAL CLASSIFICATION	DESCRIPTION	THICKNESS		DEPTH	
	Blown Sand			3.66	12 0
	Blue clay			11.58	38 0
	Pecten Bed		41.61-42.06	12.80	42 0
	Blue clay. Soft clayey ironstone band at 136'6"-138'; the clays are sandy bet. 138' + 142'. Practically no fossils above 85'. Bottom 6' no core		42.06-43.28	47.55	156 0
	Frod. Ironstone: red-brown and golden brown and greenish brown ool. + shelly ironstones. Blue grey calc. + clayey beds 160'-163'6"; bluish clayey ironstone 164'9"-165'6"; band of re-worked ironstone pebbles 174'-5'		48.77-49.84		114
			50.22-50.44		
			53.04-53.34	56.16	184 3
	Blue clay			56.39	185 0
FOSSILS	Plicatula spinosa from 47'-48'; Serpula plicatilis from 61'; Polymorphites (gen. nov.) sp. nov., Colodroceras sp. ind., Ameirhynchia sp., Encyclus sp., Lima sp., L. pectinoides, Entolium hehli, Zygopleura sp., Nemipedia coriari, Katosira aff. periniana, Nuculana minor, Ameirhynchia cf. dalmasi, Nuculana complanata, Zygopleura sp. nov., Katosira sp., Procerithium cf. granosum, Riselloidea subdijuncta, Plicatula spinosa all from 85'-102' (taylori zone). Ameirhynchia sp. from 86' to 106'. Nuculana complanata, Plectambonites striato-sulcata, Procerithium cf. slateri, Grandirhynchia + Zygopleura sp. all from 110'. Echioceras (Enechioceras) sp. nov. + Nemimicroceras sp. from 115' (macedoni zone). Echioceras aff. varicostoides, E. sp. juv. from 132'-138' (varicostoides zone). Zagatioceras zagatium, G. spp. juv., Parechioceras spp. juv. from 142'-148' (zagatium zone).				
	Topo/F.I. - 59.2				
	Down up TPF				

British Geological Survey

British Geological Survey

British Geological Survey

**GEOLOGICAL SURVEY AND MUSEUM,
SOUTH KENSINGTON,
LONDON, S.W.7.**

**G.S.M. Office
File No.**

**Site marked
on 6" Map by**

**Site marked
on 1" Map by**

British Geological Survey

British Geological Survey

British Geological Survey



Yokewell Southeast SE 91 SW/391

The United Steel Cos. Ltd. ORE MINING BRANCH Colsterworth/Scunthorpe		EXPLORATION RECORD		Hole No. <u>Y.192</u>		
O.S. Sheet Ref. _____		Lease <u>Yarboro⁹</u>	Area <u>Yarboro⁹</u>	Date Started <u>28.3.64</u>		
Position <u>94541016 O.S. 224</u>		Parish of <u>Broughton</u>		Date Completed <u>19.4.64</u>		
GEOLOGICAL LOG				DRILL LOG		
Depth Feet From	Thick. Ft.	Description	Geological Horizon	CROWNS USED		
0.0	0.76	Top Soil	Linos.	Size	No.	Feet
2.5	12.0	Green colitic limestone	Limestone	143		5.0
12.0	21.0	Grey sandy clay	L.S.S.	131		35.5
21.0	22.0	Brown sandy clay		114		10.5
22.0	27.0	Sandstone		116	FB	251.0
37.0	78.0	Grey clay		101	631269	33.0
78.0	88.0	Brown Shale	Upper Lias	REAMERS USED		
88.0	105.0	Grey clay		Size	No.	Feet
105.0	112.0	Marlstone				
112.0	192.0	Grey clay	Middle Lias			
192.0	195.5	Peeten				
195.5	302.0	Grey clay	Lower Lias			
302.0	334.3	P.I.B.		CASING USED		
334.3	335.0	Blue Sand		Size	Set (Ft.)	Recovered (Ft.)
				143	5.3	5.3
				128	41.3	41.3
Hole Plugged at 302.0 ⁰ .				Water Used <u>48,600</u>		
				Rest Water Level		
				LEVELS <u>60.45</u>		
				Surface	198.3	
				Top 1 st	-103.7	
				Bottom 1 st	-136.0	

[signature redacted]



Tokewell South

SE 91 SW/392

The United Steel Cos. Ltd. ORE MINING BRANCH Colsterworth/Scunthorpe		EXPLORATION RECORD		Hole No. I.188
O.S. Sheet Ref.	Lease Yarboro'	Area Yarboro'	Date Started 12.3.64	
Position 94171016 O.S. 268 Parish of Broughton			Date Completed 28.3.64	

GEOLOGICAL LOG				DRILL LOG			
Depth From	Feet To	Thick. Ft.	Description	Geological Horizon	CROWNS USED		
0.0	4.42	4.42	Yellow Clay	Recent	Size	No.	Feet
14.5	16.0	1.5	Hard Grey Limestone	Middle Lias	143		14.5
16.0	18.5	2.5	Brown Sandy Shale		131		27.5
34.5	52.0	17.5	Grey Clay		116		10.5
52.0	59.0	7.0	Marlstone	Lower Lias	116	FB	199.5
59.0	139.0	80.0	Grey Clay		101	631269	32.0
139.0	142.5	3.5	Peotien	Lower Lias	REAMERS USED		
142.5	252.0	109.5	Grey clay		Size	No.	Feet
252.0	282.3	30.3	F.I.B.				
282.3	282.3	0.0	Grey Clay				
Hole plugged at 282'-3"				CASING USED			
				Size	Set (Ft.)	Recovered (Ft.)	
				145	15.1	15.1	
				128	162.3	162.3	
				Water Used 36,100			
				Rest Water Level			
				LEVELS			
				Surface	161.3		
				Top 1'st.	- 90.7		
				Bottom 1'st.	-120.7		



Little Cross Court East SE 91 SW / 393

The United Steel Cos. Ltd. ORE MINING BRANCH Colsterworth/Scunthorpe		EXPLORATION RECORD		Hole No. I.189
O.S. Sheet Ref. _____	Lease Yarboro'	Area Yarboro'	Date Started 12.3.64	
Position 93841020 O.S.268 Parish of Broughton.			Date Completed 23.3.64	

GEOLOGICAL LOG				DRILL LOG			
Depth From	Feet To	Thick. Ft.	Description	Geological Horizon	CROWNS USED		
0.0	3.05	3.05	Yellow clay	Lower Lias	Size	No.	Feet
10.0	30.03	17.53	Grey clay		131	FB	61.5
67.5	21.4	1.07	Fecten		131	-	3.5
71.0	54.86	33.32	Grey clay		116	FB	116.0
180.0	64.31	9.45	F.I.B.		101	631723	33.0
211.0	64.92	0.30	Grey Bed				
	213.0	2.0					
					REAMERS USED		
					Size	No.	Feet
					CASING USED		
					Size	Set (Ft.)	Recovered (Ft.)
					143	5.0	5.0
					128	72.0	72.0
					Water Used 24,520		
					Rest Water Level		
					LEVELS 36.40		
					Surface	119.4	
					Top 1'st.	-60.6	
					Bottom 1'st.	-91.6	

$$\begin{array}{r} 54.86 \\ 20.03 \\ \hline 34.83(1.07) \end{array}$$

$$\begin{array}{r} 54.86 \\ 36.40 \\ \hline 18.46 \end{array}$$



Jokewell Farm North SE 91 SW / 395

The United Steel Cos. Ltd. ORE MINING BRANCH Colsterworth/Scunthorpe		EXPLORATION RECORD		Hole No. I.193.																																						
O.S. Sheet Ref. _____		Lease Yarboro'	Area Yarboro'	Date Started 13.4.64																																						
Position 94901051 0.3.273		Parish of Broughton.		Date Completed 29.4.64																																						
GEOLOGICAL LOG				DRILL LOG																																						
Depth Feet From	To	Thick. Ft.	Description	Geological Horizon	CROWNS USED																																					
0.0	6.0	6.0	Brown Sand)	Recent	Size	No.	Feet																																			
6.0	14.0	8.0	Yellow Clay)	Middle Lias	143		9.0																																			
14.0	21.0	7.0	Marlstone)		131		16.0																																			
21.0	31.0	10.0	Grey Clay)		114	FB	12.0																																			
31.0	37.0	6.0	Pecten)		101	642333	33.7																																			
37.0	47.0	10.0	Grey Clay)	Lower Lias																																						
47.0	74.0	27.0	F.I.B.)																																							
74.0	245.7	171.7	Blue Bind)																																							
245.7	250.7	5.0																																								
<p>Water lost in ironstone.</p> <p>Hole plugged at 245.7'</p>				<table border="1"> <thead> <tr> <th colspan="3">REAMERS USED</th> </tr> <tr> <th>Size</th> <th>No.</th> <th>Feet</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="3">CASING USED</th> </tr> <tr> <th>Size</th> <th>Set (Ft.)</th> <th>Recovered (Ft.)</th> </tr> </thead> <tbody> <tr> <td>143</td> <td>10.3</td> <td>10.3</td> </tr> <tr> <td>128</td> <td>31.9</td> <td>31.9</td> </tr> </tbody> </table> <p>Water Used 30,600</p> <p>Rest Water Level _____</p> <table border="1"> <thead> <tr> <th colspan="2">LEVELS 43.54</th> </tr> </thead> <tbody> <tr> <td>Surface</td> <td>142.8</td> </tr> <tr> <td>Top 1st.</td> <td>-74.2</td> </tr> <tr> <td>Bottom 1st.</td> <td>-102.9</td> </tr> </tbody> </table>				REAMERS USED			Size	No.	Feet										CASING USED			Size	Set (Ft.)	Recovered (Ft.)	143	10.3	10.3	128	31.9	31.9	LEVELS 43.54		Surface	142.8	Top 1st.	-74.2	Bottom 1st.	-102.9
REAMERS USED																																										
Size	No.	Feet																																								
CASING USED																																										
Size	Set (Ft.)	Recovered (Ft.)																																								
143	10.3	10.3																																								
128	31.9	31.9																																								
LEVELS 43.54																																										
Surface	142.8																																									
Top 1st.	-74.2																																									
Bottom 1st.	-102.9																																									

Soil Site Report

Extended Soil Report



Santon 1844

Easting: 493973

Northing: 409748

Site Area: 1km x 1km

Prepared for: Kay Boreland, Integrale Ltd

Date: 08 Aug 2017



Citation

Citations to this report should be made as follows:

National Soil Resources Institute (2017) Soils Site Report for location 493973E, 409748N, 1km x 1km, National Soil Resources Institute, Cranfield University. Accessed via:
<https://www.landis.org.uk/sitereporter>

Disclaimer

The report, modules and risk maps have been prepared by Cranfield University for you, the client. Whilst every care has been taken by Cranfield University to ensure the accuracy and completeness of the reports, modules and risk maps, the client must recognise that as with any such items errors are possible through no fault of Cranfield University and as such the parties give no express or implied representations or warranty as to:

(i) the quality or fitness for any particular purpose of the report, modules or risk maps contained herein or of any design, workmanship, materials or parts used in connection therewith or correspondence with regard to any description or sample;

or

(ii) the accuracy, sufficiency or completeness of the report modules or risk maps provided herewith. In particular, there are hereby expressly excluded all conditions, warranties and other terms which might otherwise be implied (whether by common law, by statute or otherwise) as to any of the matters set out in paragraphs (i) and (ii) above.

Cranfield University, its employees, servants and agents shall accept no liability for any damage caused directly or indirectly by the use of any information contained herein and without prejudice to the generality of the foregoing, by any inaccuracies, defects or omissions in the report, modules or risk maps provided.

About this report

This Soil Site Report identifies and describes the properties and capacities of the soil at your specified location as recorded in the National Soil Map for England and Wales. It has been produced by Cranfield University's [National Soil Resources Institute](#).

The National Soil Map represents the most accurate and comprehensive source of information about the soil at the national coverage in England and Wales. It maps the distribution of soil mapping units (termed soil associations) which are defined in terms of the main soil types (or soil series) that were recorded for each soil association during field soil survey. Each soil association is named after its principal soil series and these bear the location name from where they were first described (e.g. Windsor). Each of these soil associations have differing environmental characteristics (physical, chemical and biological) and it is by mapping these properties that the range of thematic maps in this report have been produced.

Soil types and properties vary locally, as well as at the landscape scale. It is not possible to identify precisely the soil conditions at a specific location without first making a site visit. We have therefore provided you with information about the range of soil types we have identified at and around your selected location. Schematic diagrams are also provided to aid accurate identification of the soil series at your site.

Whilst an eight-figure national grid reference should be accurate to within 100m, a single rural Postcode can cover a relatively large geographical area. Postcodes can therefore be a less precise basis for specifying a location. The maps indicate the bounded area the reports relate to.

Your Site Soil Report will enable you to:

- identify the soils most likely to be present at and immediately around your specified location;
- understand the patterns of soil variation around your location and how these correlate with changes in landscape;
- identify the nature and properties of each soil type present within the area;
- understand the relevant capacities and limitations of each of the soils and how these might impact on a range of factors such as surface water quality.

Provided that this Site Soil Report is not modified in any way, you may reproduce it for a third-party.

Table of Contents

1. Soil Thematic Maps	1
1a Soils - Spatial Distribution	2
1b Hydrology of Soil Type (HOST)	4
1c Ground Movement Potential	6
1d Flood Vulnerability	8
1e Risk of Corrosion to Ferrous Iron	10
1f Pesticide Leaching Risk	12
1g Pesticide Runoff Risk	14
1h Potential for Pesticide Adsorption	16
1i Hydrogeological Rock Type	18
1j Ground Water Protection Policy (GWPP)	20
1k Soil Parent Material	22
1l Expected Crops and Land Use	24
1m Natural Soil Fertility	26
1n Simple Topsoil Texture	28
1o Typical Habitats	30
2. Soil Association Descriptions	32
BANBURY (544)	33
NEWPORT 1 (551d)	35
3. Soil Series Properties	37
SOIL PROPERTY DEFINITIONS	38
5.44 BANBURY (Bp) (101)	39
8.21 BLACKWOOD (bK) (124)	40
5.45 IRONDOWN (Ir) (802)	41
5.51 NEWPORT (Na) (1310)	42
5.53 RUDGE (rJ) (1743)	43
5.44 TADMARTON (tM) (1900)	44
5.41 WICK (wQ) (2225)	45
4. Topsoil Element Background Levels	46
a. Analysis Within a 15km Radius (28 Sample Points)	48
b. Analysis Within a 50km Radius (271 Sample Points)	49
c. National Analysis (5686 Sample Points)	50
SOIL GUIDELINES VALUES (SGV)	51
ANALYSES DEFINITIONS	52
References	55

1. Soil Thematic Maps

This section contains a series of maps of the area surrounding your selected location, presenting a number of themes relating to the characteristics of the soils. These provide an overview of the nature and condition of the local soil conditions. It is these conditions that may be used to infer the response of an area to certain events (with the soil as a receptor), such as pollution contamination from a chemical spill, or an inappropriate pesticide application and the likelihood of these materials passing through the soil to groundwater. Other assessments provide an insight into the way a location may impact, by corrosive attack or ground movement, upon structures or assets within the ground, for example building or engineering foundations or pipes and street furniture.

Soil is a dynamic environment with many intersecting processes, chemical, physical and biological at play. Even soils 'sealed' over by concrete and bitumen are not completely dormant. The way soils respond to events and actions can vary considerably according to the properties of the soil as well as other related factors such as land-use, vegetation, topography and climate. There are many threats facing our national soil resource today and importance should be given to identifying the best measures aimed towards soil protection, ensuring the usage of soils in the most sustainable way. This report is therefore a useful snapshot of the soil properties for your given area, providing a summary of a broad range of ground conditions



Figure 1: Location of study area

1a Soils - Spatial Distribution





Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

Contains OS data © Crown Copyright and database right 2017



Soils - Spatial Distribution Key

-  544 BANBURY
Well drained brashy fine and coarse loamy ferruginous soils over ironstone.
-  551d NEWPORT 1
Deep well drained sandy and coarse loamy soils.

SOIL ASSOCIATION DESCRIPTION


Soil associations represent a group of soil series (soil types) which are typically found occurring together, associated in the landscape (Avery, 1973; 1980; Clayden and Hollis, 1984). Soil associations may occur in many geographical locations around the country where the environmental conditions are comparable. For each of these soil associations, a collection of soil types (or soil series) are recorded together with their approximate proportions within the association. Soil associations have codes as well as textual names, thus code '554a' refers to the 'Frilford' association. Where a code is prefixed with 'U', the area is predominantly urbanised (e.g. 'U571v'). The soil associations for your location, as mapped above, are described in more detail in Section 2: Soil Association Descriptions.

1b Hydrology of Soil Type (HOST)





Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

Contains OS data © Crown Copyright and database right 2017

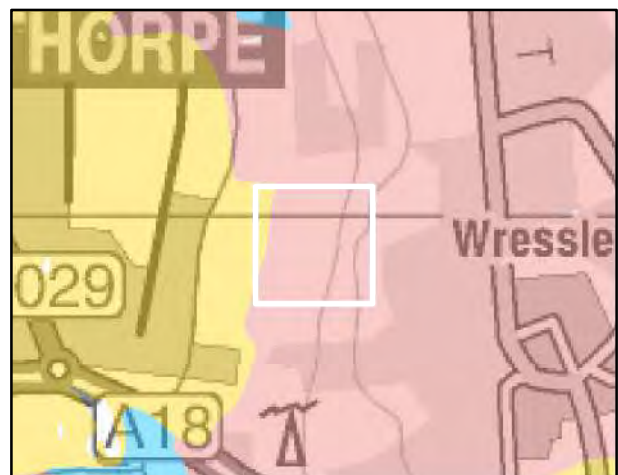

Hydrology of Soil Type (HOST) Key


-  2 Free draining permeable soils on 'brashy' or dolomitic limestone substrates with high permeability and moderate storage capacity

-  5 Free draining permeable soils in unconsolidated sands or gravels with relatively high permeability and high storage capacity

HOST CLASS DESCRIPTION


The Hydrology of Soil Types (HOST) classification describes the dominant pathways of water movement through the soil and, where appropriate, the underlying substrate. Eleven drainage models are defined according to the permeability of the soil and its substrate and the depth to a groundwater table, where one is present (Boorman et al, 1995). These are further subdivided into 29 HOST classes to which all soil series have been assigned. These classes identify the way soil water flows are partitioned, with water passing over, laterally through, or vertically down the soil column. Analysis of the river hydrograph and the extent of soil series for several hundred gauged catchments allowed mean values for catchment hydrological variables to be identified for each HOST class. The HOST classification is widely used to predict river flows and the frequency and severity of flood events and also to model the behaviour of diffuse pollutants (Hollis et al, 1995).

1c Ground Movement Potential

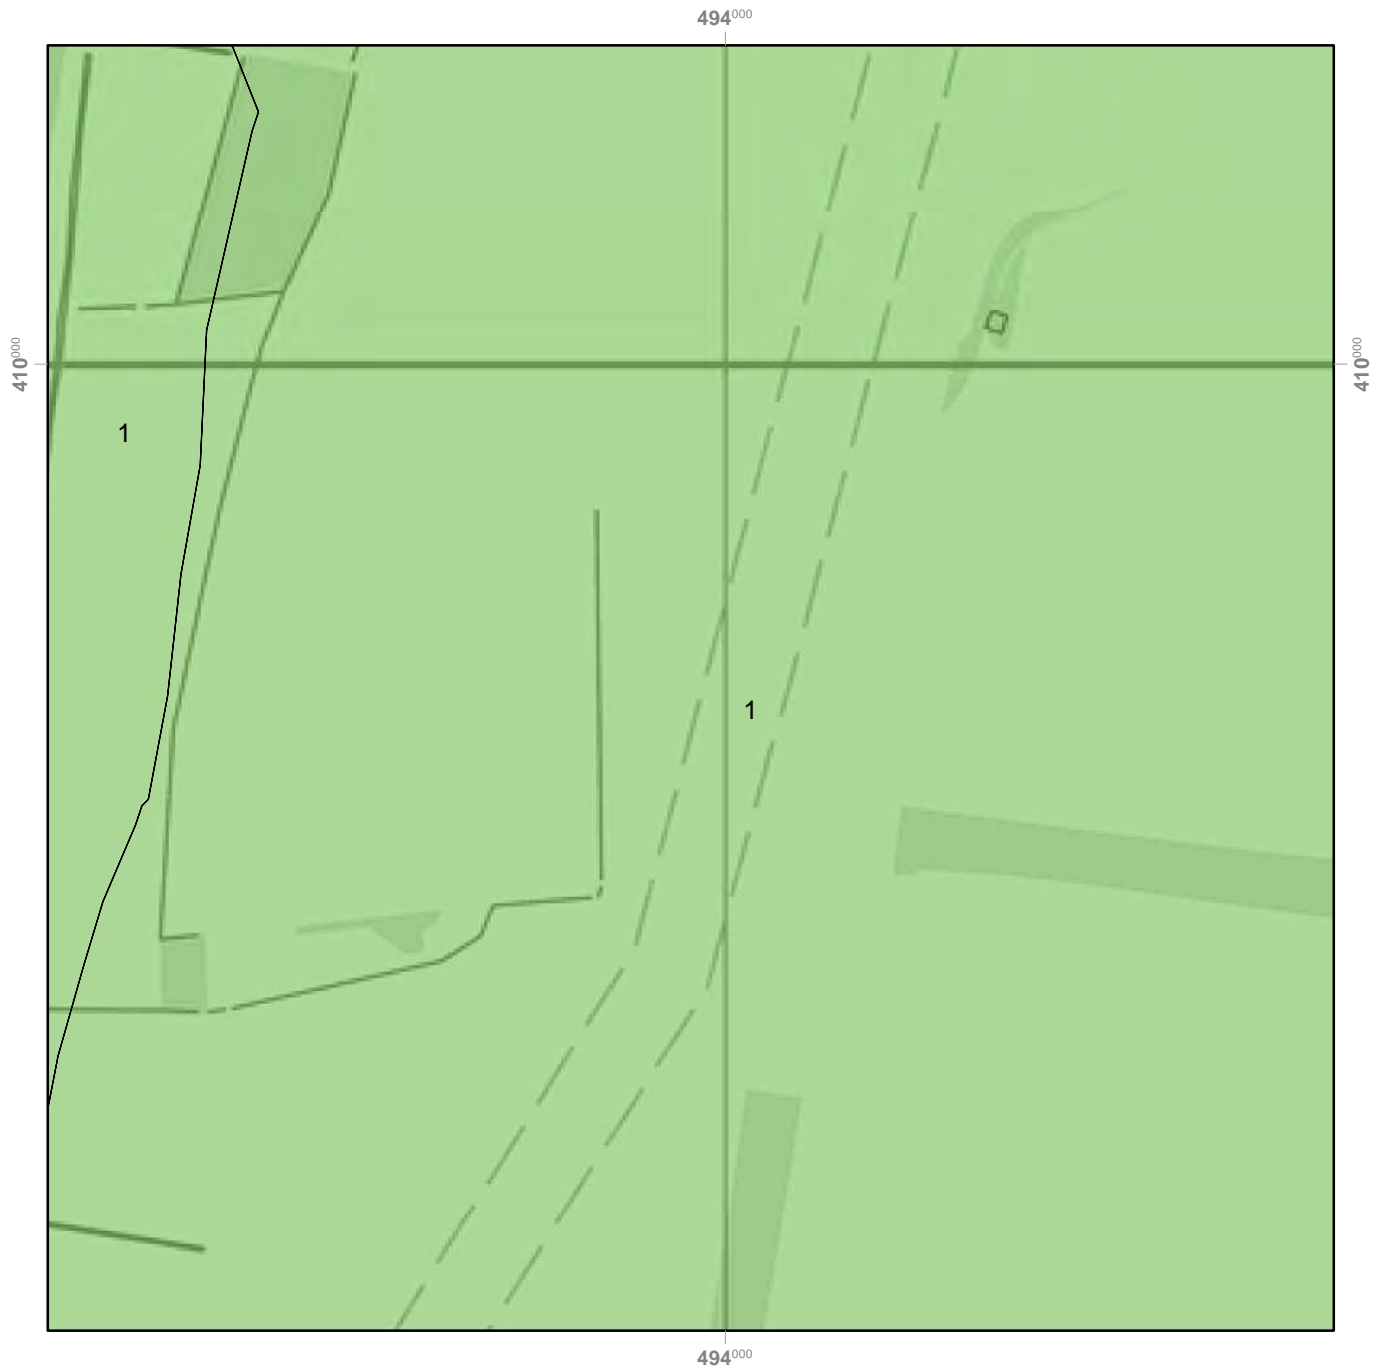

Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

Contains OS data © Crown Copyright and database right 2017

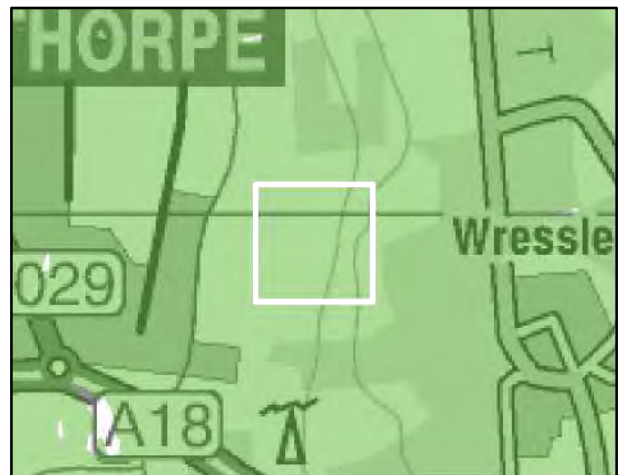

Ground Movement Potential Key



1 Very low

* If a High class is starred, a Very High ground movement potential is likely to be achieved if these soils are drained to an effective depth of at least two metres.

GROUND MOVEMENT POTENTIAL DESCRIPTION

Clay-related ground movement is the most widespread cause of foundation failure in the UK and is linked to seasonal swelling and shrinkage of the clay. The content of clay within the soils of your selected area has therefore a direct bearing upon the likelihood of ground movement.

Among the inorganic particles that constitute the solid component of any soil, clay particles are the smallest and defined as being less than 0.002 mm - equivalent spherical diameter (esd) in size. Clay particles occur in most kinds of soil but they only begin to exert a predominant influence on the behaviour of the whole soil where there is more than 35 per cent (by weight) of clay-sized material present.


Because clay particles are very small and commonly platy in shape they have an immense surface area onto which water can be attracted, relative to the total volume of the soil material. In addition to surface attraction or inter-crystalline absorption of water, some clay minerals, those with three layers of atoms (most other kinds of clay have only two layers of atoms) are able to absorb and hold additional water between these layers. It is these types of clay mineral, which are widespread in British soils and commonly known as smectites that have the greatest capacity to shrink and swell.

In a natural undisturbed condition, the moisture content of deep subsoil clay does not change greatly through the year and consequently there are no changes in volume leading to shrinkage and swelling. However, when clays are exposed at or near the ground surface and especially when vegetation is rooting in them seasonal moisture and volume changes can be dramatic. Plants and trees transpire moisture from the soil to support their growth and transfer necessary nutrients into their structures. Surface evaporation also takes place from soil and plant structures, and the combination of evaporation from surfaces and transpiration by plants and trees is termed evapotranspiration. Thus, the layer of soil material down to 2m depth into which plants will root is critical when assessing the vulnerability of land to subsidence.

Whenever soil moisture is continuously being replenished by rainfall, the soil moisture reserves will be unaffected by the removal of moisture by plants as there is no net loss. However, in many parts of Britain, particularly in the south and east, summer rainfall is small and is exceeded by evapotranspiration. Water reserves are then not sufficiently replenished by rainfall and so a soil moisture deficit develops. The water removed from a clayey soil by evapotranspiration leads to a reduction in soil volume and the consequent shrinkage causes stress in the soil materials leading in turn to stress on building foundations that are resting in the soil (Hallett, et al, 1994).


The foundations themselves may then move and thus cause damage to building structures. This problem can be exacerbated by the fact that the soil beneath the structure may not dry out uniformly, so that any lateral pressure exerted on the building foundation is made effectively greater. This assessment identifies the likelihood of soil conditions being prone to ground movement given these other factors.

1d Flood Vulnerability

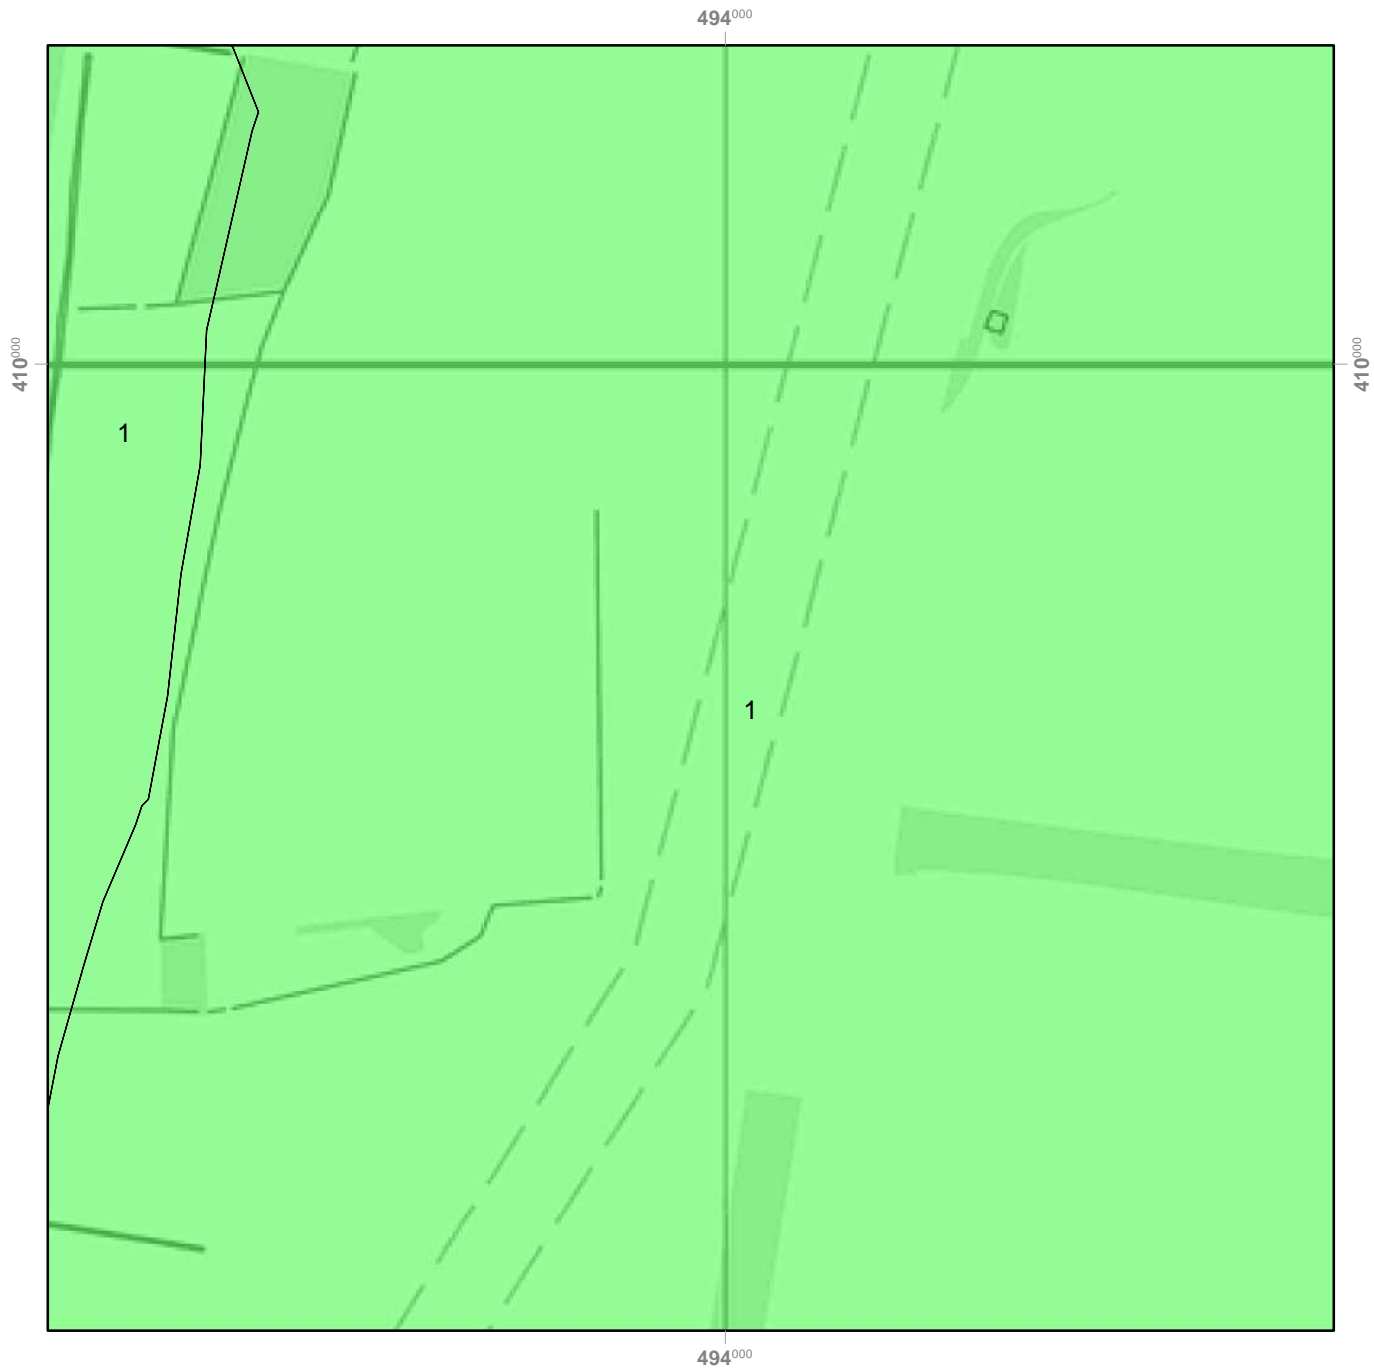

Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

Contains OS data © Crown Copyright and database right 2017

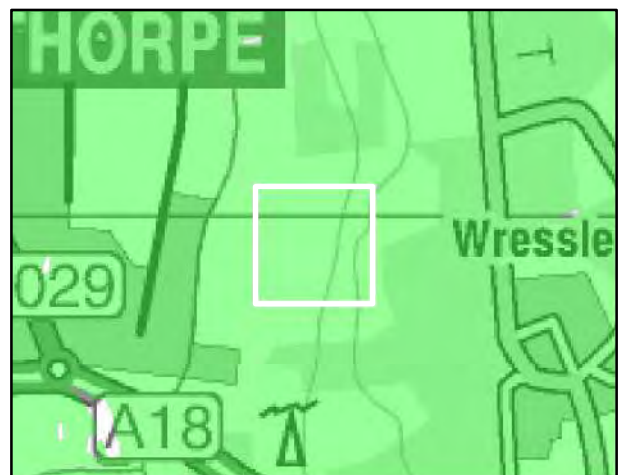

Flood Vulnerability Key



1 Minor risk

FLOOD VULNERABILITY DESCRIPTION

The inundation of properties by flood water can occur in a number of circumstances. Surface run-off can collect on low-lying land from upslope following heavy rainfall. More commonly rivers, lakes and/or the sea extend beyond their normal limits as a result of prolonged or intense rainfall, unusually high tides and/or extreme wind events. Water damage to properties and their contents is compounded by the deposition of sediment suspended in the flood waters. The spatial distribution of such waterborne sediment (or alluvium as defined in soil science) is one basis upon which land that has been subject to historical flooding can be mapped, and this forms a basis for present-day flooding risk assessment.


Both riverine and marine alluvium are identified as distinct soil parent materials within the British soil classifications. Combining soil map units that are dominated by soil series developed in alluvium across Great Britain identifies most of the land that is vulnerable to flooding. This assessment does not account for man-made flood defence measures, showing instead the areas where once water has stood.

1e Risk of Corrosion to Ferrous Iron



Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

Contains OS data © Crown Copyright and database right 2017

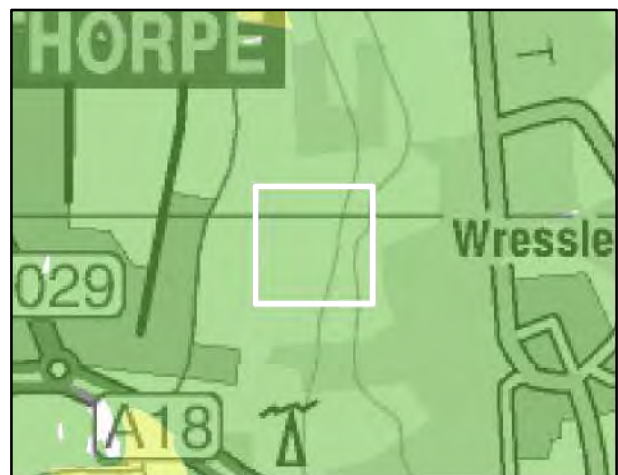

Risk of Corrosion to Ferrous Iron Key



1 Non-aggressive

* If a class is starred, it is assumed that there are moderate amounts of sulphate in the soil. If there is abundant sulphate present, the soil may be one class more aggressive. Conversely, if there is very little sulphate, the soil may be one class less aggressive to buried ferrous iron.

RISK OF CORROSION TO FERROUS IRON DESCRIPTION


Buried iron pipes and other infrastructure corrode at rates that are influenced by soil conditions (Jarvis and Hedges, 1994). Soil acidity, sulphide content, aeration and wetness all influence the corrosivity of the soil. These factors are used to map 5 major classes of relative corrosivity.

1f Pesticide Leaching Risk



Soils Data © Cranfield University (NSRI)
and for the Controller of HMSO 2017

Contains OS data © Crown Copyright
and database right 2017

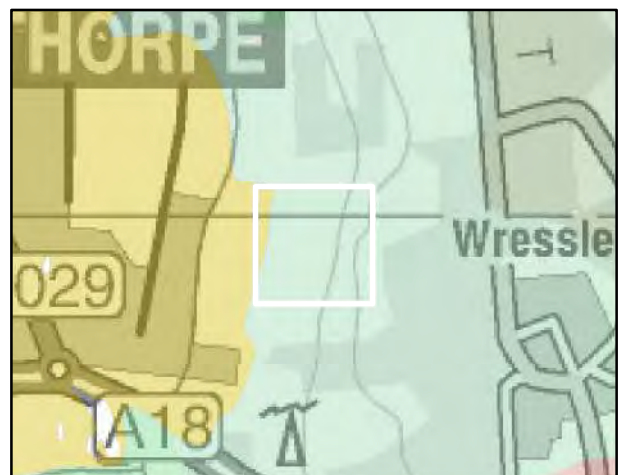

Pesticide Leaching Risk Key



H2mo Sandy soil with low organic matter; groundwater at moderate depth



I1dl Deep loamy soil over soft limestone with deep groundwater

PESTICIDE LEACHING CLASS DESCRIPTION

The natural permeability and water regime of soils are influential in determining the fate and behaviour of pesticides applied to the crop and soil surface (Hollis et al, 1995). A system of vulnerability assessment was devised as part of the national system for Policy and Practice for the Protection of Groundwater. This divided soils into three primary vulnerability classes.

H - Soils of high leaching capacity with little ability to attenuate non-adsorbed pesticide leaching which leave underlying groundwater vulnerable to pesticide contamination.

I - Soils of intermediate leaching capacity with a moderate ability to attenuate pesticide leaching.

L - Soils of low leaching capacity through which pesticides are unlikely to leach.


The primary classes have been further subdivided into nearly forty subclasses. These subclasses, with their descriptions, are mapped above. These classes do not account for differences in land cultivation, which can also have a significant impact on pesticide behaviour.

1g Pesticide Runoff Risk




Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

Contains OS data © Crown Copyright and database right 2017

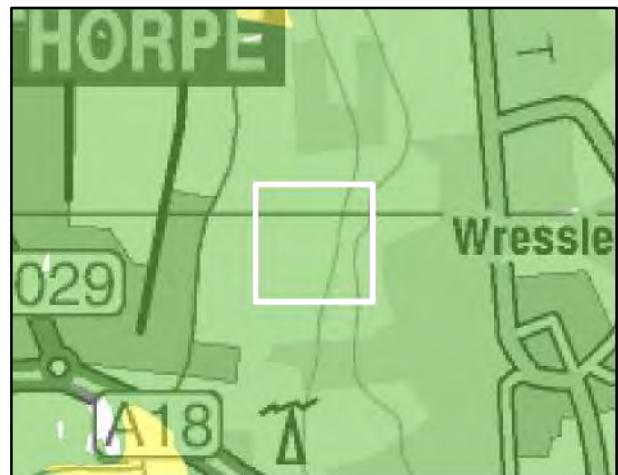

Pesticide Runoff Risk Key

 S5 Very low run-off potential.

PESTICIDE RUNOFF RISK DESCRIPTION


The physical properties and natural water regime of soils influence the speed and extent of lateral water movement over and through the soil at different depths (Hollis et al, 1995). As a result, soils can be classed according to the potential for pesticide run-off. Five runoff potential classes are identified for mineral soils and a further two for peat soils.

1h Potential for Pesticide Adsorption





Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

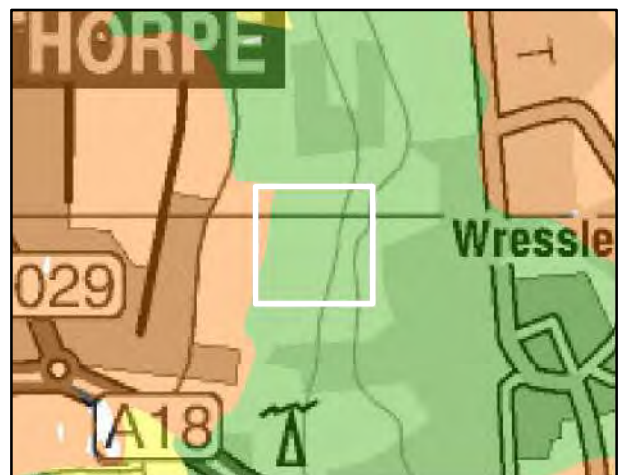Contains OS data © Crown Copyright and database right 2017



Potential for Pesticide Adsorption Key

 m Moderate adsorption potential.

 v Very low adsorption potential.

POTENTIAL FOR PESTICIDE ADSORPTION DESCRIPTION


The physical properties and natural water regime of soils influence the speed and extent of lateral water movement over and through the soil at different depths (Hollis et al, 1995). The mineral soil classes are further subdivided according to their potential for pesticide adsorption.

1i Hydrogeological Rock Type




Soils Data © Cranfield University (NSRI)
and for the Controller of HMSO 2017

Contains OS data © Crown Copyright
and database right 2017

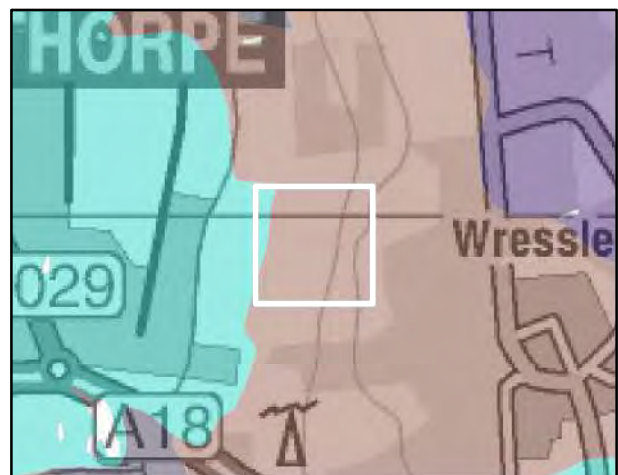

Hydrogeological Rock Type Key

 4 soft Magnesian, brashy or Oolitic limestone and ironstone

 34 sand

HYDROGEOLOGICAL ROCK TYPE DESCRIPTION


The hydrogeological classification of the soil parent materials provides a framework for distinguishing between soil substrates according to their general permeability and whether they are likely to overlie an aquifer. Every soil series has been assigned one of the 32 substrate classes and each of these is characterised according to its permeability (being characterised as permeable, slowly permeable or impermeable). For further information, see Boorman et al (1995).

1j Ground Water Protection Policy (GWPP)





Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

Contains OS data © Crown Copyright and database right 2017

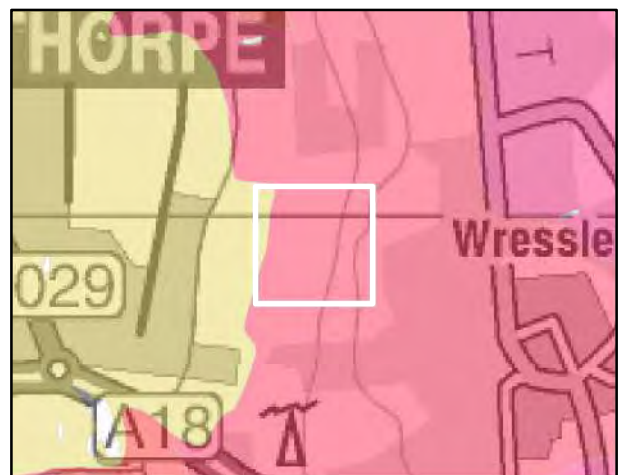

Ground Water Protection Policy (GWPP) Key

-  H2 Deep, permeable coarse textured soils of high leaching potential, which readily transmit a wide range of pollutants because of their rapid drainage and low attenuation potential

-  I1 Soils of intermediate leaching potential which have a moderate ability to attenuate a wide range of diffuse source pollutants but in which it is possible that some non-adsorbed diffuse source pollutants and liquid discharges could penetrate the soil layer

GWPP LEACHING CLASS DESCRIPTION


The Ground Water Protection Policy classes describe the leaching potential of pollutants through the soil (Hollis, 1991; Palmer et al, 1995). The likelihood of pollutants reaching ground water is described. Different classes of pollutants are described, including liquid discharges adsorbed and non-adsorbed pollutants.

1k Soil Parent Material



Soils Data © Cranfield University (NSRI)
and for the Controller of HMSO 2017

Contains OS data © Crown Copyright
and database right 2017

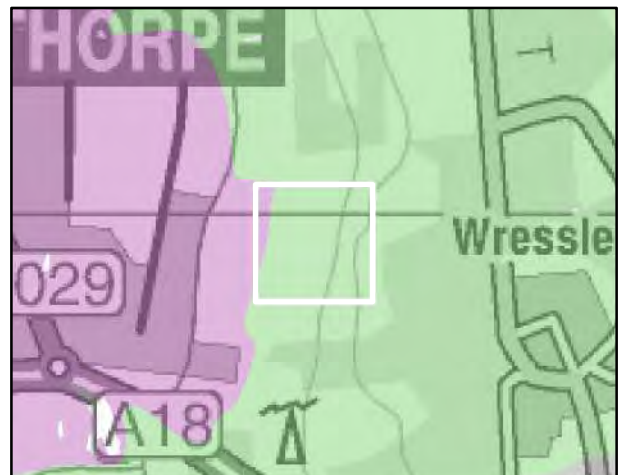

Soil Parent Material Key



85 Glaciofluvial drift




106 Jurassic and Cretaceous ironstone

SOIL PARENT MATERIAL DESCRIPTION


Along with the effects of climate, relief, organisms and time, the underlying geology or 'parent material' has a very strong influence on the development of the soils of England and Wales. Through weathering, rocks contribute inorganic mineral grains to the soils and thus exhibit control on the soil texture. During the course of the creation of the national soil map, soil surveyors noted the parent material underlying each soil in England and Wales. It is these general descriptions of the regional geology which is provided in this map.

11 Expected Crops and Land Use

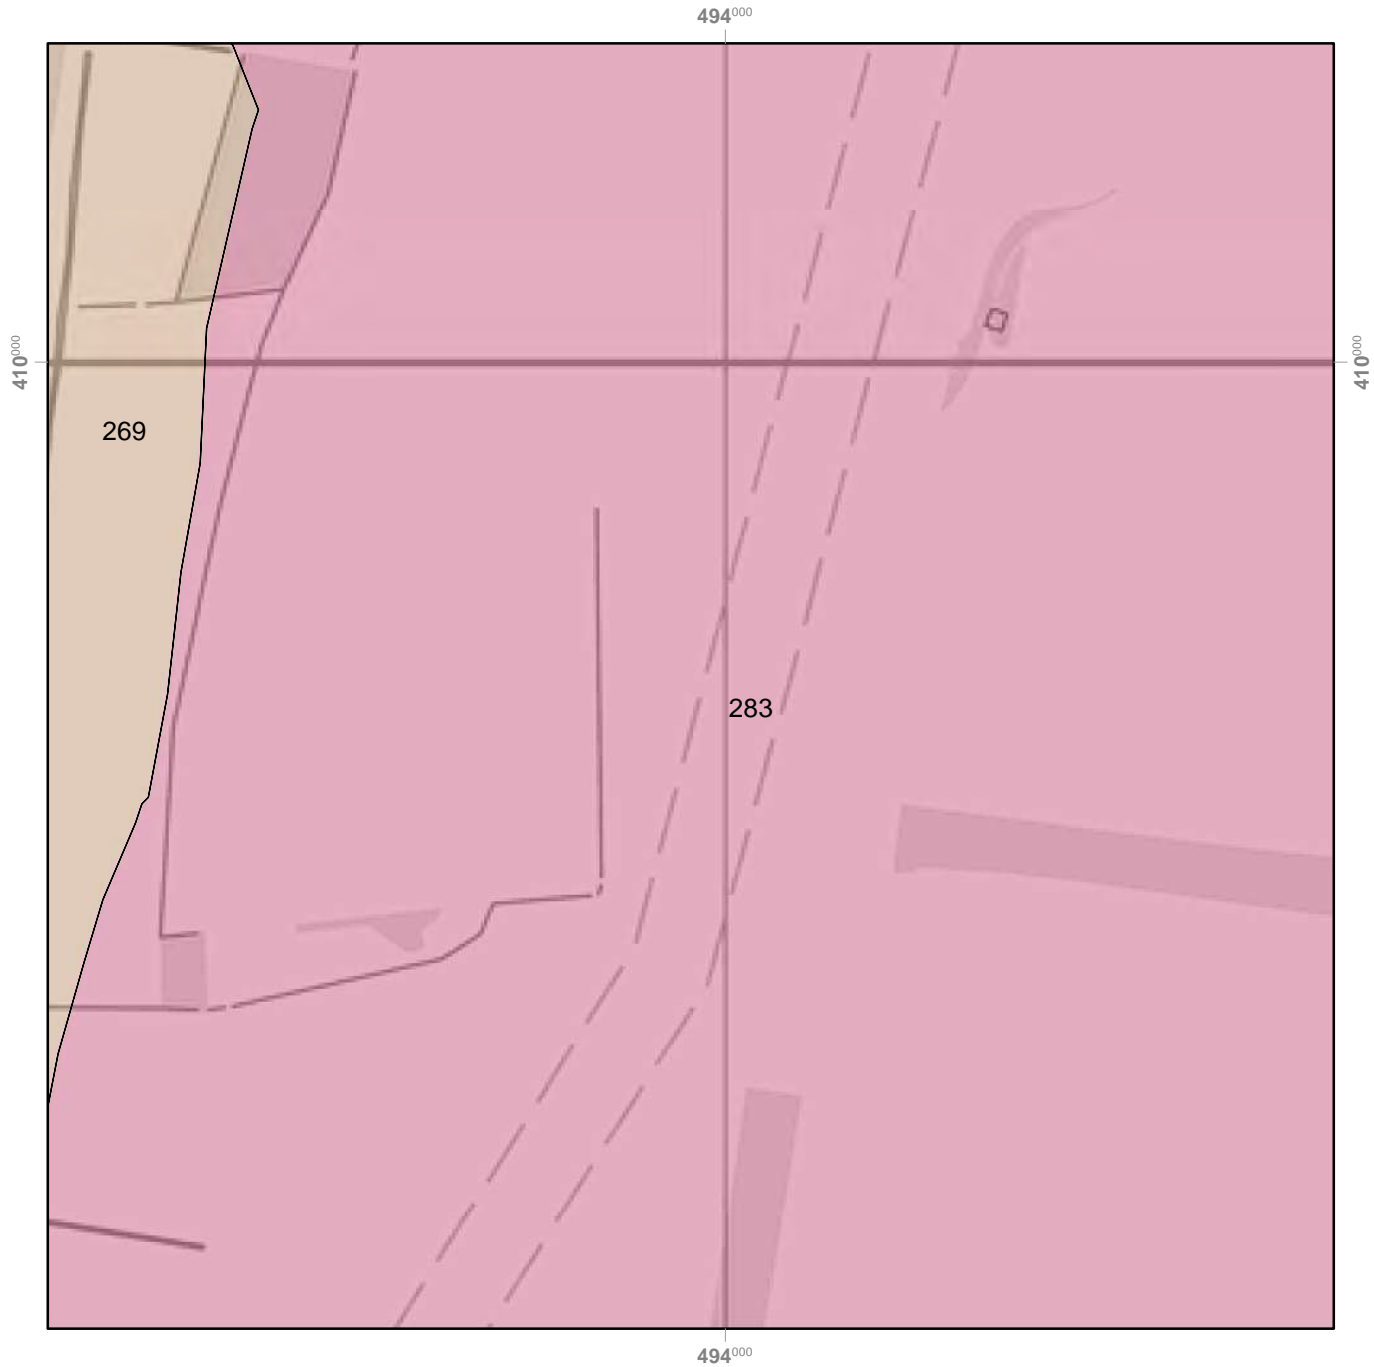



Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

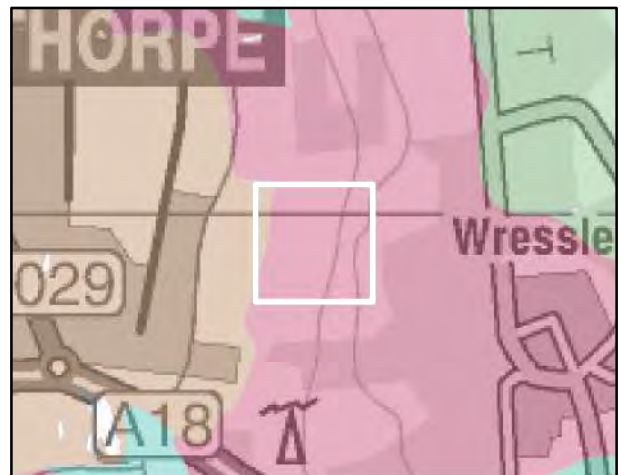Contains OS data © Crown Copyright and database right 2017



Expected Crops and Land Use Key

 269 Winter cereals with short term grassland, some potatoes; permanent grassland on valley slopes; some sugar beet In Eastern Region.

 283 cereals, sugar beet and potatoes; dairying on short term grassland in Cheshire and Wales.

EXPECTED CROPS AND LAND USE DESCRIPTION


Individual soils are commonly associated with particular forms of land cover and land use. Whilst the soil surveyors were mapping the whole of England and Wales, they took careful note of the range of use to which the land was being put. This map shows the most common forms of land use found on each soil unit.

1m Natural Soil Fertility



Soils Data © Cranfield University (NSRI)
and for the Controller of HMSO 2017

Contains OS data © Crown Copyright
and database right 2017

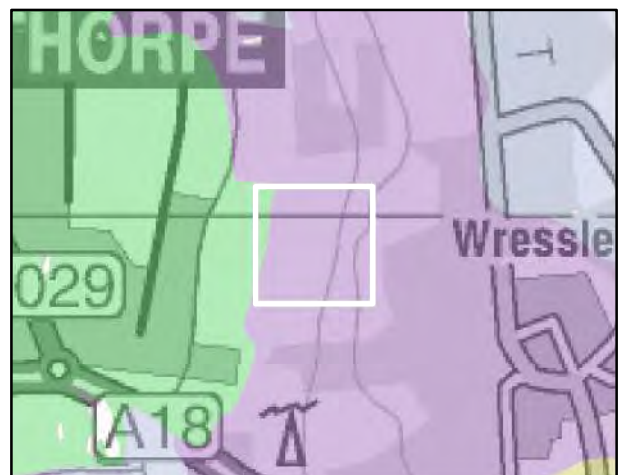

Natural Soil Fertility Key



1 High



5 Low

NATURAL SOIL FERTILITY DESCRIPTION


Soil fertility can be greatly altered by land management especially through the application of manures, lime and mineral fertilisers. What is shown in this map, however, is the likely natural fertility of each soil type. Soils that are very acid have low numbers of soil-living organisms and support heathland and acid woodland habitats. These are shown as of very low natural fertility. Soils identified as of low natural fertility are usually acid in reaction and are associated with a wide range of habitat types. The moderate class contains neutral to slightly acid soils, again with a wide range of potential habitats. Soil of high natural fertility are both naturally productive and able to support the base-rich pastures and woodlands that are now rarely encountered. Lime-rich soils contain chalk and limestone in excess, and are associated with downland, herb-rich pastures and chalk and limestone woodlands.

1n Simple Topsoil Texture





Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

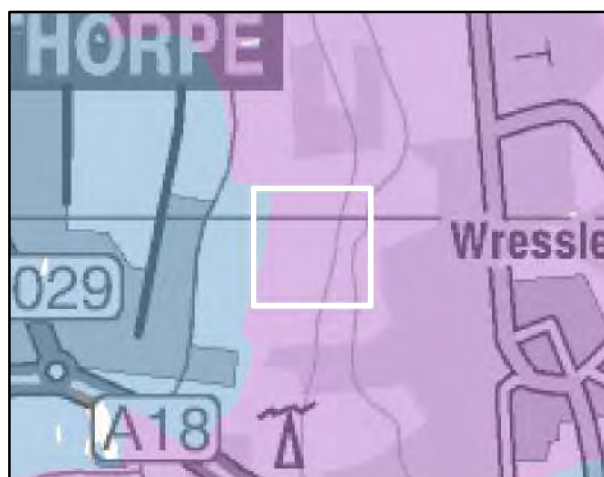Contains OS data © Crown Copyright and database right 2017



Simple Topsoil Texture Key

 2 Loamy

 4 Sandy

SIMPLE TOPSOIL TEXTURE DESCRIPTION

Soil texture is a term used in soil science to describe the physical composition of the soil in terms of the size of mineral particles in the soil. Specifically, we are concerned with the relative proportions of sand, silt and clay. Soil texture can vary between each soil layer or horizon as one moves down the profile. This map indicates the soil texture group of the upper 30 cm of the soil. `Light? soils have more sand grains and are described as sandy, while `heavy? soils have few sand grains but a lot of extremely small particles and are described as clayey. Loamy soils have a mix of sand, silt and clay-sized particles and are intermediate in character. Soils with a surface layer that is dominantly organic are described as Peaty. A good understanding of soil texture can enable better land management.

1o Typical Habitats





Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017

Contains OS data © Crown Copyright and database right 2017



Typical Habitats Key

-  1 Acid dry pastures; acid deciduous and coniferous woodland; potential for lowland heath



-  3 Base-rich pastures and deciduous woodlands

TYPICAL HABITATS DESCRIPTION

There is a close relationship between vegetation and the underlying soil. Information about the types of broad habitat associated with each soil type is provided in this map. Soil fertility, pH, drainage and texture are important factors in determining the types of habitats which can be established. Elevation above sea level and sometimes even the aspect, the orientation of a hillslope, can affect the species present. This map does not take into account the recent land management, but provides the likely natural habitats assuming good management has been carried out.

2. Soil Association Descriptions

The following pages describe the following soil map units, (soil associations), in more detail.

-  **BANBURY 544**
Well drained brashy fine and coarse loamy ferruginous soils over ironstone.
-  **NEWPORT 1 551d**
Deep well drained sandy and coarse loamy soils.

The soil associations are described in terms of their texture and drainage properties and potential risks may be identified. The distribution of the soils across England and Wales are provided. Further to this, properties of each association's component soil series are described in relation to each other. Lastly, schematic diagrams of each component series are provided for greater understanding and in-field verification purposes.

BANBURY (544)

Well drained brashy fine and coarse loamy ferruginous soils over ironstone.

a. General Description

Well drained brashy fine and coarse loamy ferruginous soils over ironstone. Some deep fine loamy over clayey soils with slowly permeable subsoils and slight seasonal waterlogging.

The major landuse on this association is defined as Winter cereals with short term grassland, some potatoes; permanent grassland on valley slopes; some sugar beet in Eastern Region.

b. Distribution (England and Wales)

The BANBURY association covers 712 km² of England and Wales which accounts for 0.47% of the landmass. The distribution of this association is shown in figure 2. Note that the yellow shading represents a buffer to highlight the location of very small areas of the association.

c. Comprising Soil Series

Multiple soil series comprise a soil association. The soil series of the BANBURY association are outlined in Table 1 below. In some cases other minor soil series are present at a particular site, and these have been grouped together under the heading 'OTHER'. We have endeavoured to present the likelihood of a minor, unnamed soil series occurring in your site in Table 1.

Schematic diagrams of the vertical soil profile of the major constituent soil series are provided in Section D to allow easier identification of the particular soil series at your site.

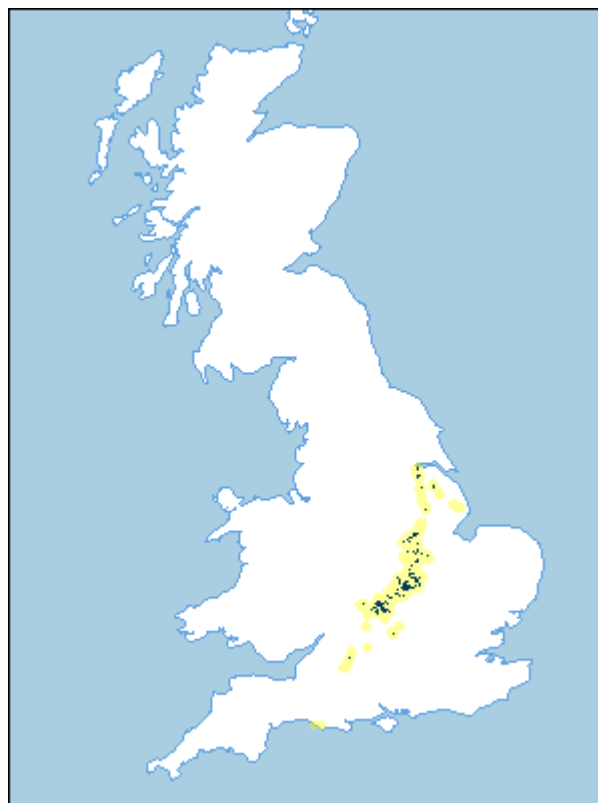


Figure 2: Association Distribution




Table 1: The component soil series of the BANBURY soil association. Because absolute proportions of the comprising series in this association vary from location to location, the national proportions are provided.

Soil Series	Description	Area %
BANBURY (Bp)	ferruginous medium loamy material over lithoskeletal ironstone	50%
TADMARTON (tM)	ferruginous light loamy material over lithoskeletal ironstone	25%
IRONDOWN (Ir)	ferruginous medium loamy or medium silty drift over clayey material passing to clay or soft mudstone	15%
OTHER	other minor soils	10%

BANBURY (544)

Well drained brashy fine and coarse loamy ferruginous soils over ironstone.

d. BANBURY Component Series Profiles

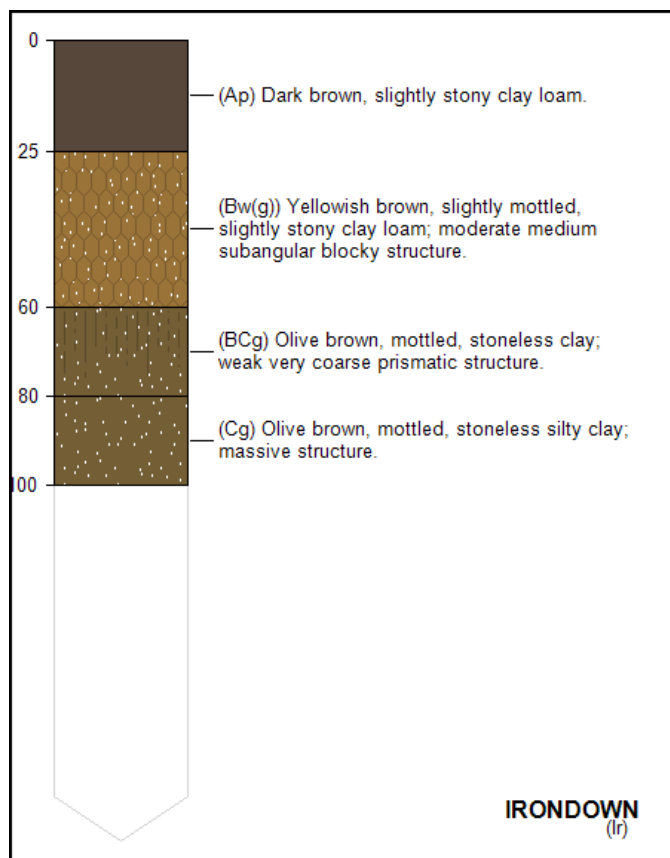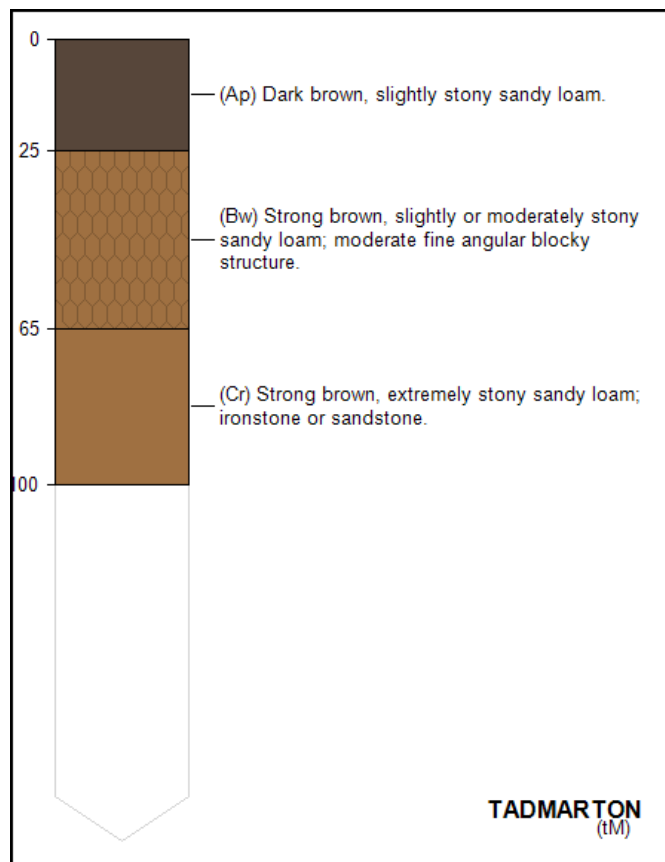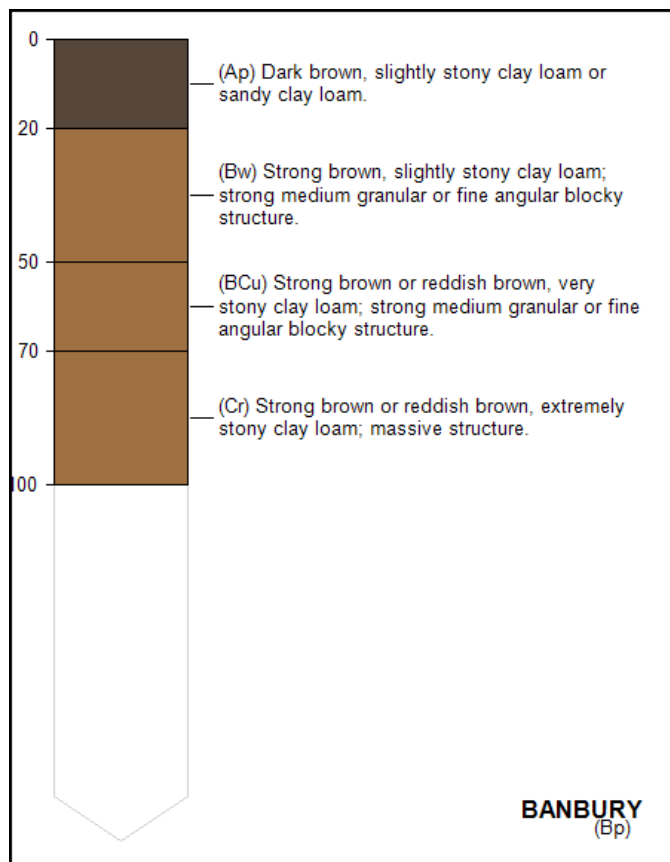

NEWPORT 1 (551d)

Deep well drained sandy and coarse loamy soils.

a. General Description

Deep well drained sandy and coarse loamy soils. Some sandy soils affected by groundwater. The major landuse on this association is defined as cereals, sugar beet and potatoes; dairying on short term grassland in Cheshire and Wales.

b. Distribution (England and Wales)

The NEWPORT 1 association covers 1191 km² of England and Wales which accounts for 0.79% of the landmass. The distribution of this association is shown in figure 3. Note that the yellow shading represents a buffer to highlight the location of very small areas of the association.

c. Comprising Soil Series

Multiple soil series comprise a soil association. The soil series of the NEWPORT 1 association are outlined in Table 1 below. In some cases other minor soil series are present at a particular site, and these have been grouped together under the heading 'OTHER'. We have endeavoured to present the likelihood of a minor, unnamed soil series occurring in your site in Table 2.

Schematic diagrams of the vertical soil profile of the major constituent soil series are provided in Section D to allow easier identification of the particular soil series at your site.

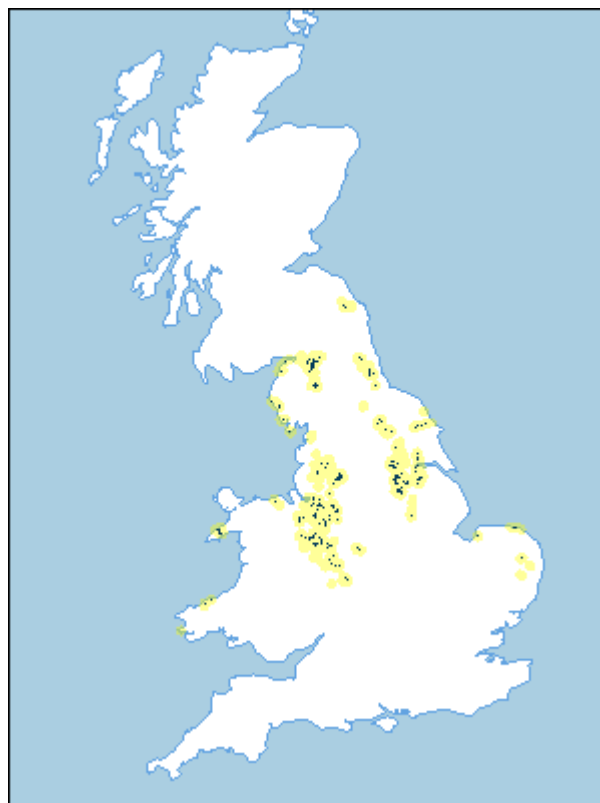


Figure 3: Association Distribution





Table 2: The component soil series of the NEWPORT 1 soil association. Because absolute proportions of the comprising series in this association vary from location to location, the national proportions are provided.

Soil Series	Description	Area %
NEWPORT (Na)	sandy drift with siliceous stones	40%
WICK (wQ)	light loamy drift with siliceous stones	20%
BLACKWOOD (bK)	sandy drift with siliceous stones	10%
RUDGE (rJ)	sandy drift with siliceous stones	10%
OTHER	other minor soils	20%

NEWPORT 1 (551d)

Deep well drained sandy and coarse loamy soils.

d. NEWPORT 1 Component Series Profiles

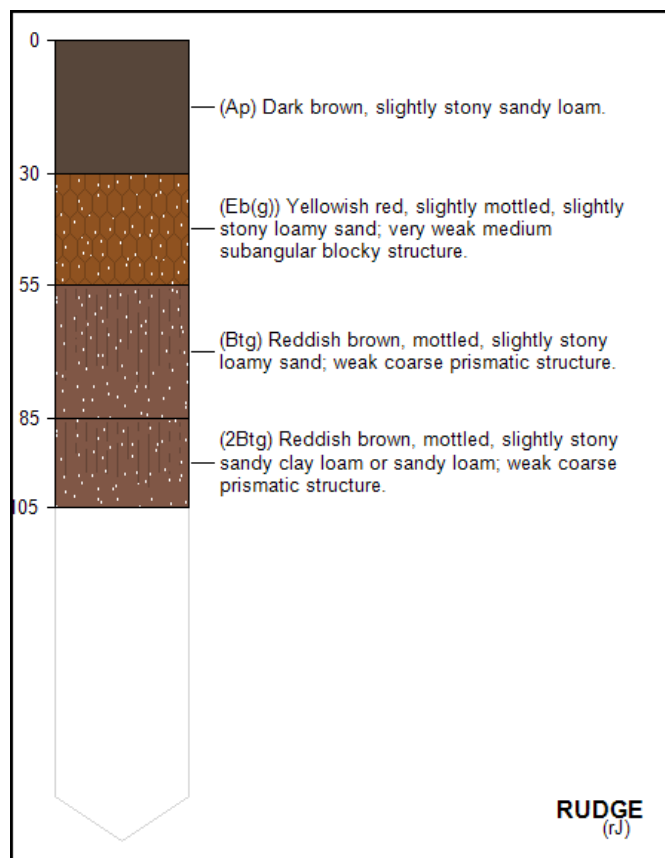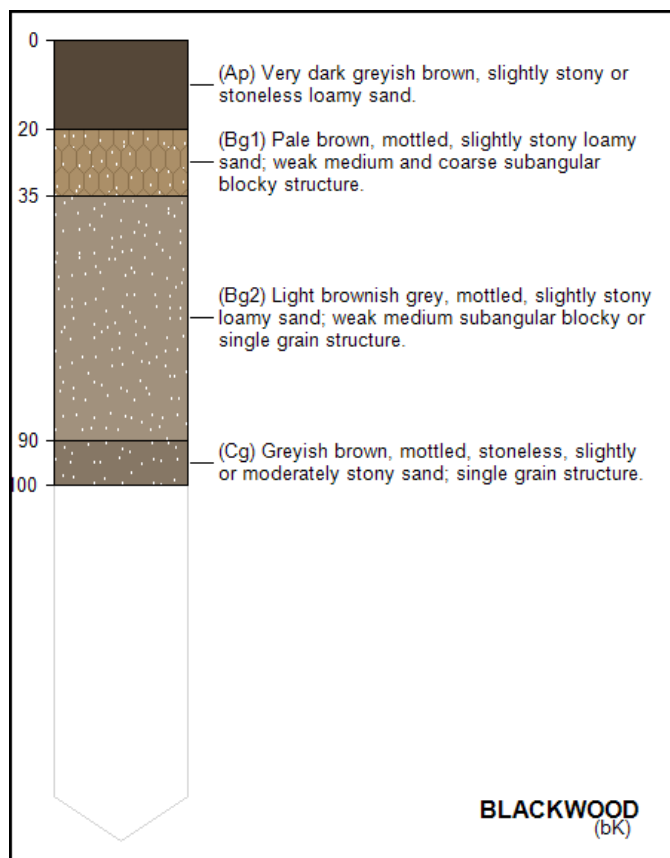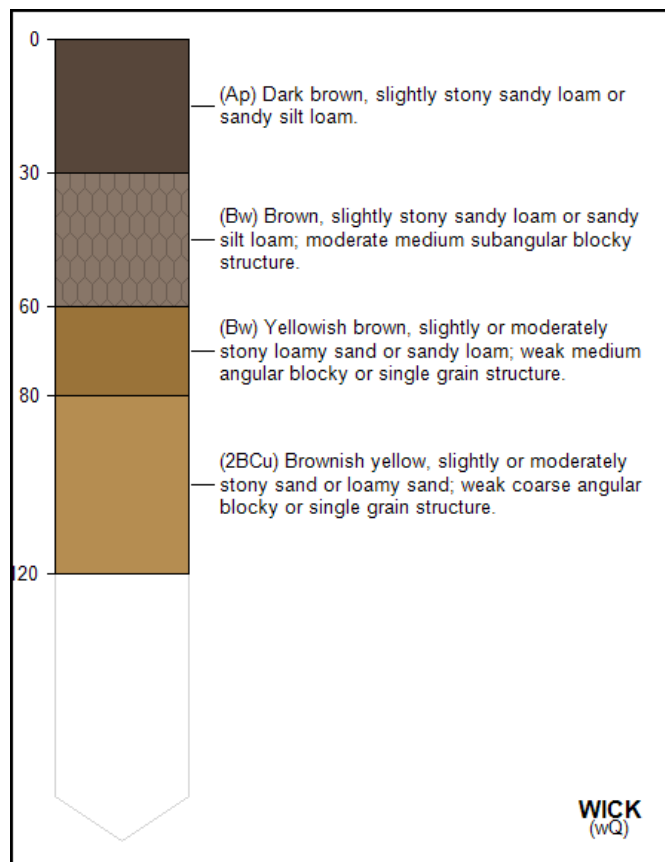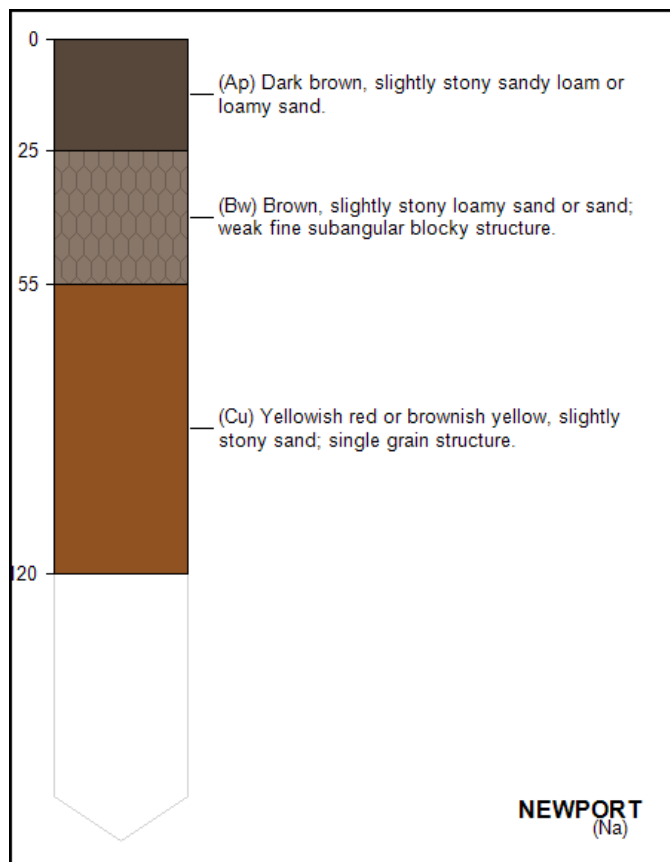

3. Soil Series Properties

The following pages describe the following soil series in more detail:

BANBURY (Bp)	ferruginous medium loamy material over lithoskeletal ironstone
BLACKWOOD (bK)	sandy drift with siliceous stones
IRONDOWN (Ir)	ferruginous medium loamy or medium silty drift over clayey material passing to clay or soft mudstone
NEWPORT (Na)	sandy drift with siliceous stones
RUDGE (rJ)	sandy drift with siliceous stones
TADMARTON (tM)	ferruginous light loamy material over lithoskeletal ironstone
WICK (wQ)	light loamy drift with siliceous stones

SOIL PROPERTY DEFINITIONS

The following terms are used in the report.

DROCK (Depth to rock (cm))

Depth (cm) to rock. 999 implies no rock

DGLEY (Depth to gleying (cm))

Depth to gleyed horizon (cm). 999 implies NO gleyed horizon present.

DIMP_DP (Depth to slowly permeable layer (downward percolation) (cm))

Depth (cm) to slowly permeable layer, i.e. in which effectively there is no downward percolation of water - 999 implies NO slowly permeable layer

DIMP_UD (Depth to slowly permeable layer (upward diffusion) (cm))

Depth (cm) to slowly permeable layer - upward diffusion, i.e. in which effectively there is no upward movement of water - 999 implies NO slowly permeable layer

IAC_DP (Integrated air capacity (IAC) (mm))

Integrated air capacity (downward percolation), a measurement of the volume of air in moist soils (0.05 bar suction) integrated from the surface to either an impermeable horizon, bedrock or 1m whichever is the shallowest, used for estimating the water storage potential of a soil

SPR (Standard percentage runoff (SPR) (%))

Standard Percentage Run-off. Dimensionless variable (range 0 to 100 %) that represents the percentage of rainfall that causes the short-term increase in flow at the catchment outlet seen after the storm event

BFI (Base flow index (BFI) (0 to 1))

Baseflow index. Dimensionless variable (range 0 to 1) that expresses the fraction of the average flow volume (in a river), represented by the contribution from groundwater storage

AWC (Available water (AWC) (mm))

Available water to 1m for a specific soil type, water available between suctions 5 and 1500kPa

AP_GRASS (Available water for grass (mm))

Available water (AP) in the profile for grass (mm); water available between suctions 5 and 1500 kPa

AP_CEREAL (Available water for cereal (mm))

Available water (AP) in the profile for cereals (mm); water available between suctions 5 and 1500 kPa

AP_SB (Available water for sugar (mm))

Available water (AP) in the profile for sugar beet (mm); water available between suctions 5 and 1500 kPa


AP_POT (Available water for potatoes (mm))

Available water (AP) in the profile for potatoes (mm); water available between suctions 5 and 1500 kPa

5.44 BANBURY (Bp) (101)

Major soil group:	05 brown soils	With dominantly brownish or reddish subsoils and no prominent mottling or greyish colours (gleying) above 40 cm depth. They are developed mainly on permeable materials at elevations below about 300 m.O.D. Most are in agricultural use.
Soil group:	4 brown earths	Non-alluvial, with non-calcareous loamy or clayey subsoils without significant clay enrichment.
Soil Subgroup:	4 ferritic brown earths	(unmottled with bright ochreous iron-rich subsoil)
Soil Series:	Banbury series	ferruginous medium loamy material over lithoskeletal ironstone

Property	Value
Depth to rock (cm)	70
Depth to gleying (cm)	n/a*
Depth to slowly permeable layer (downward percolation) (cm)	n/a*
Depth to slowly permeable layer (upward diffusion) (cm)	n/a*
Integrated air capacity (IAC) (mm)	157
Standard percentage runoff (SPR) (%)	2
Base flow index (BFI) (0 to 1)	0.98
Available water (AWC) (mm)	120
Available water for grass (mm)	120
Available water for cereal (mm)	115
Available water for sugar (mm)	120
Available water for potatoes (mm)	120

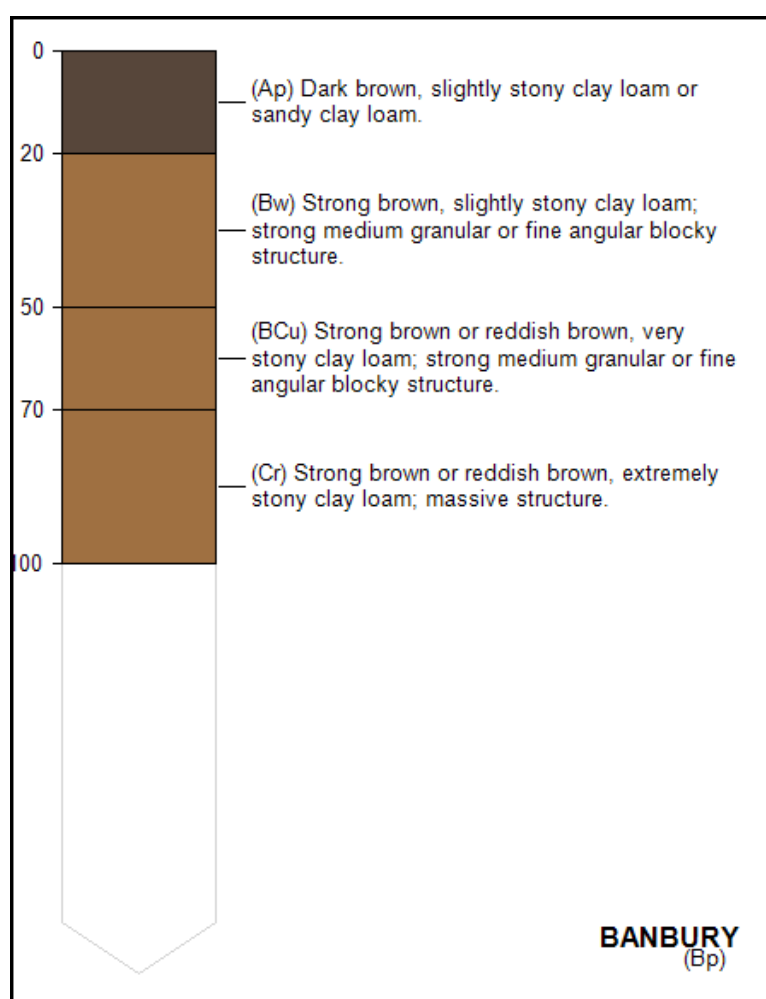


* not present within 150cm

8.21 BLACKWOOD (bK) (124)

Major soil group:	08 ground-water gley soils	Seasonally waterlogged soils affected by a shallow fluctuating groundwater-table. They are developed mainly within or over permeable material and have prominently mottled or greyish coloured horizons within 40 cm depth. Most occupy low-lying or depressional sites.
Soil group:	2 sandy gley soils	Sandy, with distinct topsoil and no clay-enriched subsoil.
Soil Subgroup:	1 typical sandy gley soils	(with non calcareous subsoil)
Soil Series:	Blackwood series	sandy drift with siliceous stones

Property	Value
Depth to rock (cm)	n/a*
Depth to gleying (cm)	30
Depth to slowly permeable layer (downward percolation) (cm)	n/a*
Depth to slowly permeable layer (upward diffusion) (cm)	n/a*
Integrated air capacity (IAC) (mm)	208
Standard percentage runoff (SPR) (%)	35
Base flow index (BFI) (0 to 1)	0.52
Available water (AWC) (mm)	130
Available water for grass (mm)	125
Available water for cereal (mm)	125
Available water for sugar (mm)	145
Available water for potatoes (mm)	105

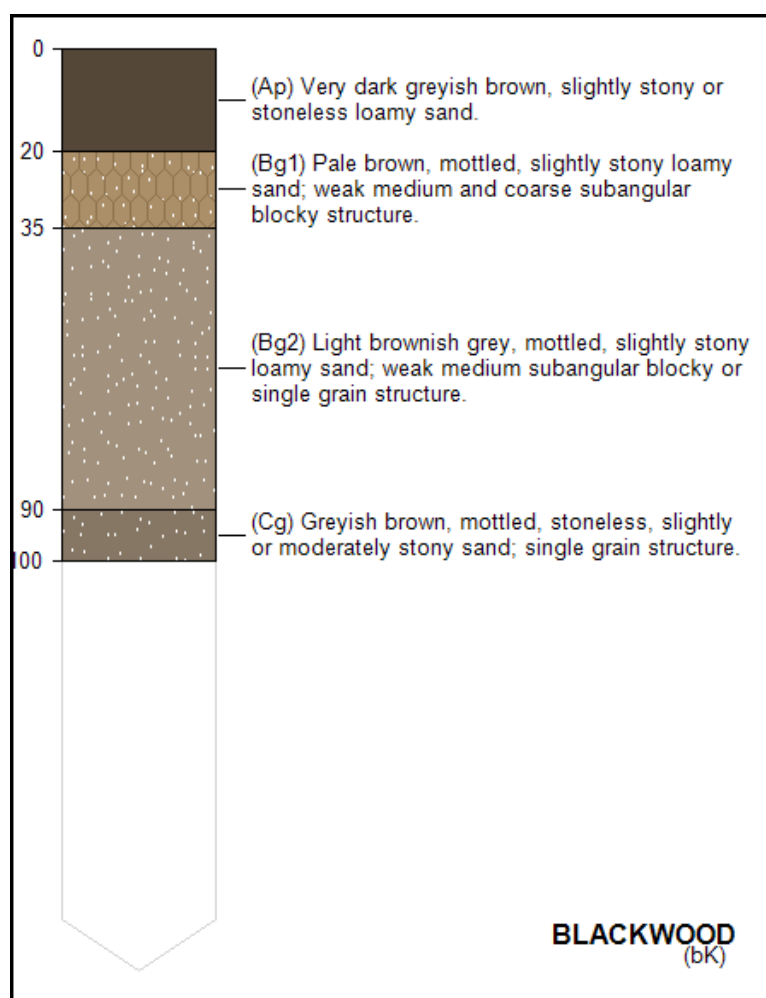


* not present within 150cm

5.45 IRONDOWN (Ir) (802)

Major soil group:	05 brown soils	With dominantly brownish or reddish subsoils and no prominent mottling or greyish colours (gleying) above 40 cm depth. They are developed mainly on permeable materials at elevations below about 300 m.O.D. Most are in agricultural use.
Soil group:	4 brown earths	Non-alluvial, with non-calcareous loamy or clayey subsoils without significant clay enrichment.
Soil Subgroup:	5 stagnogleyic ferritic brown earths	(faintly mottled with bright ochreous iron-rich slowly permeable subsoil)
Soil Series:	Irondown series	ferruginous medium loamy or medium silty drift over clayey material passing to clay or soft mudstone


Property	Value
Depth to rock (cm)	100
Depth to gleying (cm)	57
Depth to slowly permeable layer (downward percolation) (cm)	57
Depth to slowly permeable layer (upward diffusion) (cm)	57
Integrated air capacity (IAC) (mm)	78
Standard percentage runoff (SPR) (%)	47
Base flow index (BFI) (0 to 1)	0.52
Available water (AWC) (mm)	145
Available water for grass (mm)	125
Available water for cereal (mm)	125
Available water for sugar (mm)	160
Available water for potatoes (mm)	105

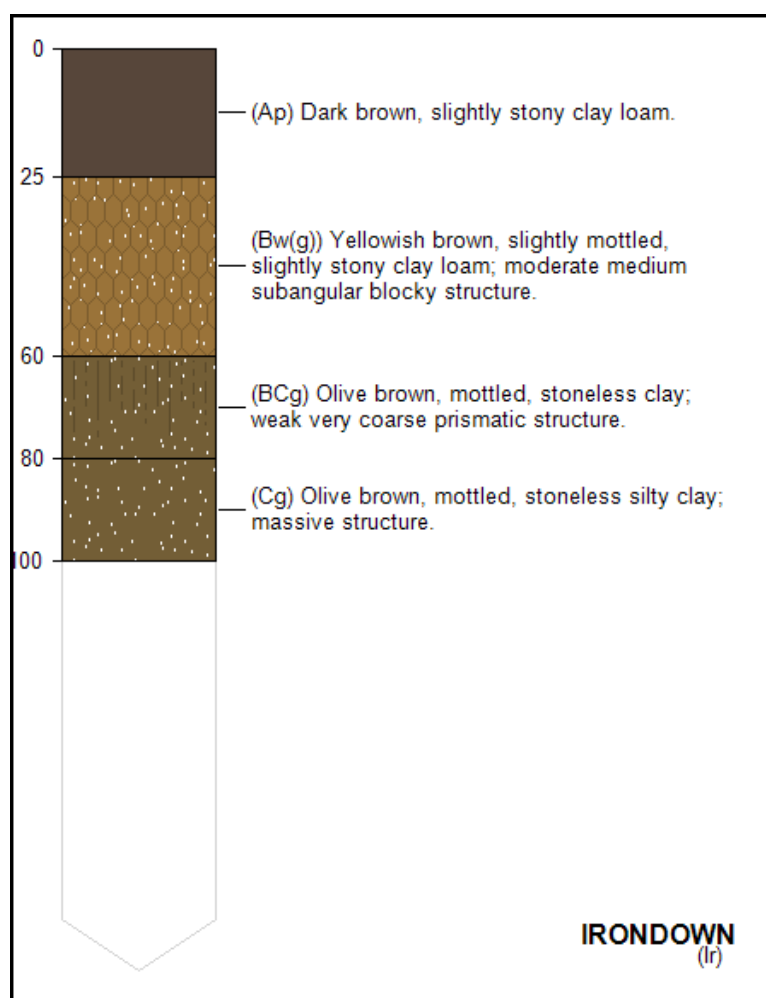

5.51 NEWPORT (Na) (1310)

Major soil group:	05 brown soils	With dominantly brownish or reddish subsoils and no prominent mottling or greyish colours (gleying) above 40 cm depth. They are developed mainly on permeable materials at elevations below about 300 m.O.D. Most are in agricultural use.
Soil group:	5 brown sands	Non-calcareous sandy or sandy gravelly.
Soil Subgroup:	1 typical brown sands	(unmottled with no clay-enriched subsoil)
Soil Series:	Newport series	sandy drift with siliceous stones

Property	Value
Depth to rock (cm)	n/a*
Depth to gleying (cm)	n/a*
Depth to slowly permeable layer (downward percolation) (cm)	n/a*
Depth to slowly permeable layer (upward diffusion) (cm)	n/a*
Integrated air capacity (IAC) (mm)	256
Standard percentage runoff (SPR) (%)	12
Base flow index (BFI) (0 to 1)	0.88
Available water (AWC) (mm)	95
Available water for grass (mm)	85
Available water for cereal (mm)	95
Available water for sugar (mm)	110
Available water for potatoes (mm)	70

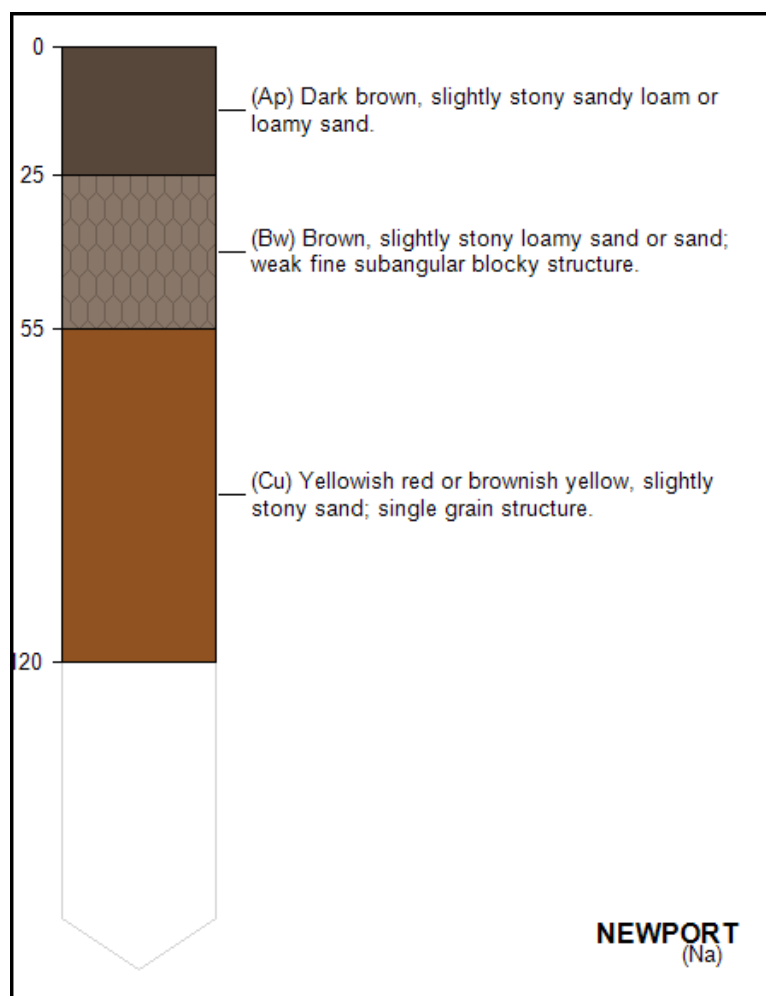


* not present within 150cm

5.53 RUDGE (rJ) (1743)

Major soil group:	05 brown soils	With dominantly brownish or reddish subsoils and no prominent mottling or greyish colours (gleying) above 40 cm depth. They are developed mainly on permeable materials at elevations below about 300 m.O.D. Most are in agricultural use.
Soil group:	5 brown sands	Non-calcareous sandy or sandy gravelly.
Soil Subgroup:	3 stagnogleyic brown sands	(faintly mottled with slowly permeable subsoil)
Soil Series:	Rudge series	sandy drift with siliceous stones

Property	Value
Depth to rock (cm)	n/a*
Depth to gleying (cm)	70
Depth to slowly permeable layer (downward percolation) (cm)	80
Depth to slowly permeable layer (upward diffusion) (cm)	80
Integrated air capacity (IAC) (mm)	176
Standard percentage runoff (SPR) (%)	47
Base flow index (BFI) (0 to 1)	0.52
Available water (AWC) (mm)	120
Available water for grass (mm)	110
Available water for cereal (mm)	115
Available water for sugar (mm)	135
Available water for potatoes (mm)	95

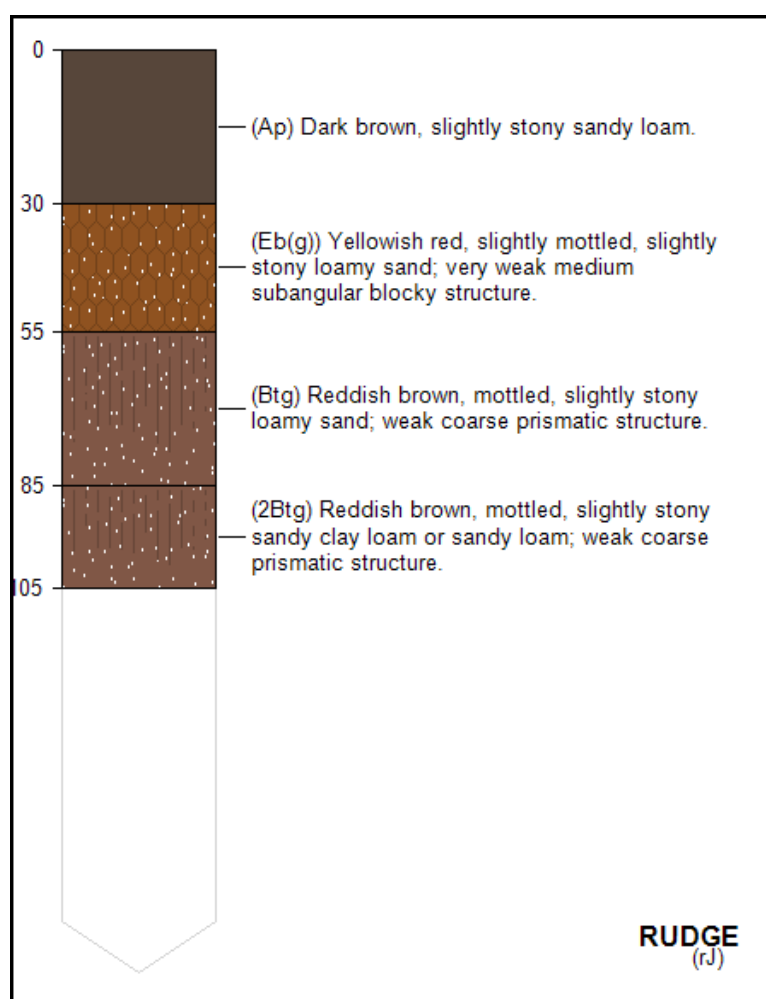


* not present within 150cm

5.44 TADMARTON (tM) (1900)

Major soil group:	05 brown soils	With dominantly brownish or reddish subsoils and no prominent mottling or greyish colours (gleying) above 40 cm depth. They are developed mainly on permeable materials at elevations below about 300 m.O.D. Most are in agricultural use.
Soil group:	4 brown earths	Non-alluvial, with non-calcareous loamy or clayey subsoils without significant clay enrichment.
Soil Subgroup:	4 ferritic brown earths	(unmottled with bright ochreous iron-rich subsoil)
Soil Series:	Tadmarton series	ferruginous light loamy material over lithoskeletal ironstone

Property	Value
Depth to rock (cm)	70
Depth to gleying (cm)	n/a*
Depth to slowly permeable layer (downward percolation) (cm)	n/a*
Depth to slowly permeable layer (upward diffusion) (cm)	n/a*
Integrated air capacity (IAC) (mm)	174
Standard percentage runoff (SPR) (%)	2
Base flow index (BFI) (0 to 1)	0.98
Available water (AWC) (mm)	115
Available water for grass (mm)	115
Available water for cereal (mm)	110
Available water for sugar (mm)	115
Available water for potatoes (mm)	100

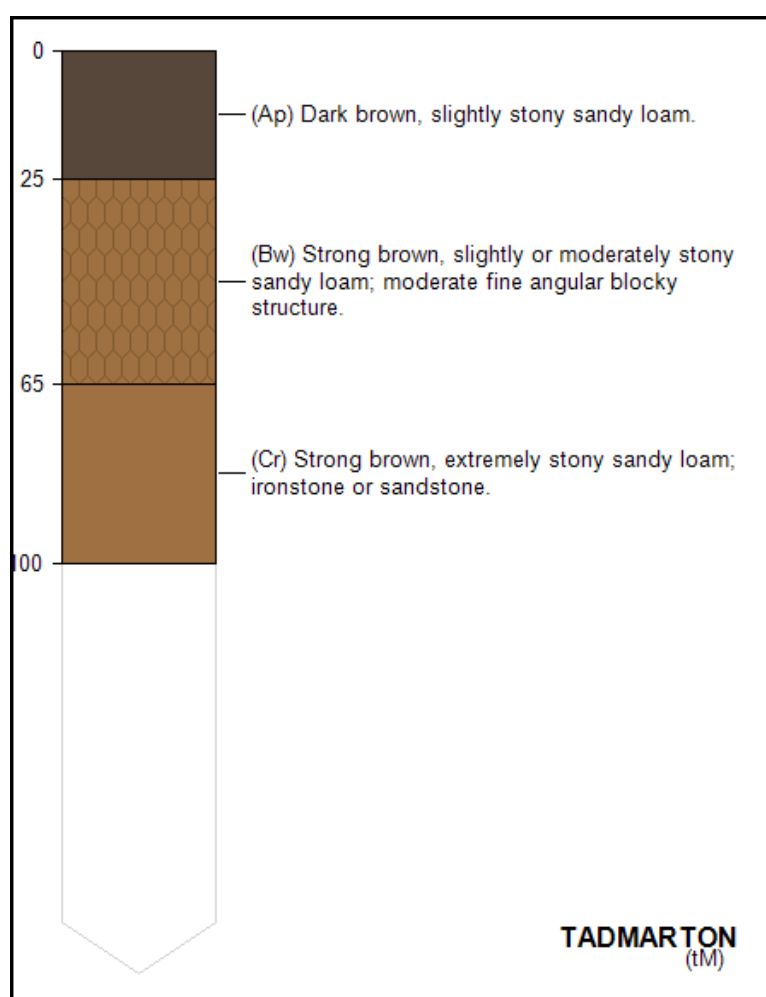


* not present within 150cm

5.41 WICK (wQ) (2225)


Major soil group:	05 brown soils	With dominantly brownish or reddish subsoils and no prominent mottling or greyish colours (gleying) above 40 cm depth. They are developed mainly on permeable materials at elevations below about 300 m.O.D. Most are in agricultural use.
Soil group:	4 brown earths	Non-alluvial, with non-calcareous loamy or clayey subsoils without significant clay enrichment.
Soil Subgroup:	1 typical brown earths	(unmottled)
Soil Series:	Wick series	light loamy drift with siliceous stones

Property	Value
Depth to rock (cm)	n/a*
Depth to gleying (cm)	n/a*
Depth to slowly permeable layer (downward percolation) (cm)	n/a*
Depth to slowly permeable layer (upward diffusion) (cm)	n/a*
Integrated air capacity (IAC) (mm)	206
Standard percentage runoff (SPR) (%)	12
Base flow index (BFI) (0 to 1)	0.88
Available water (AWC) (mm)	140
Available water for grass (mm)	130
Available water for cereal (mm)	140
Available water for sugar (mm)	165
Available water for potatoes (mm)	100

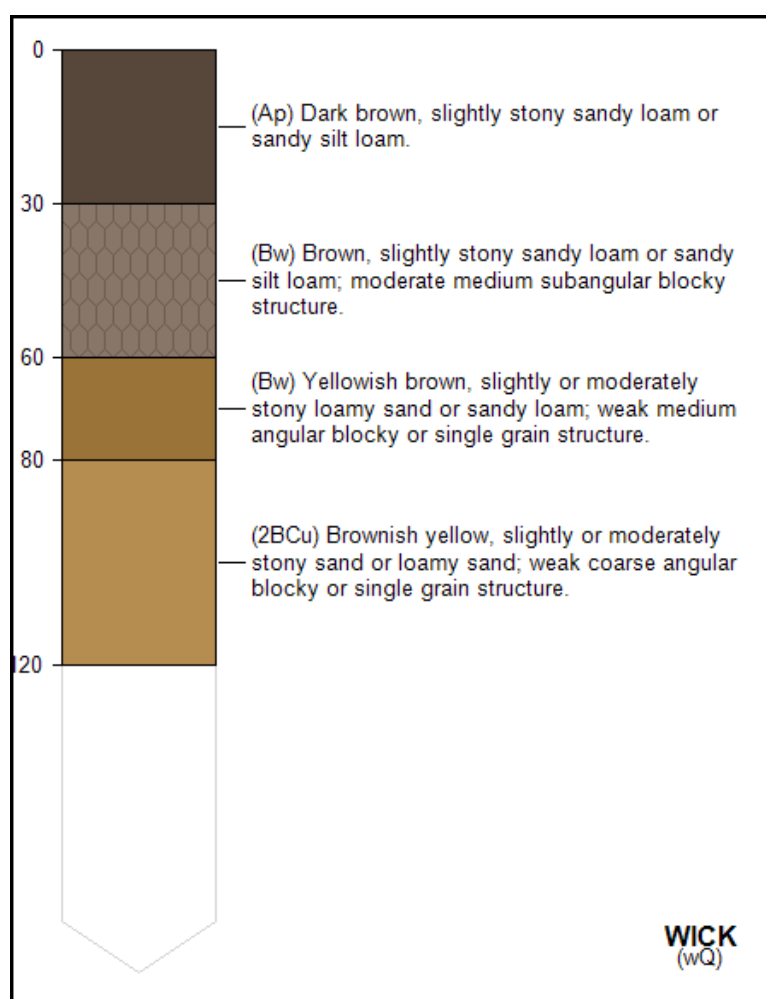

* not present within 150cm

4. Topsoil Element Background Levels

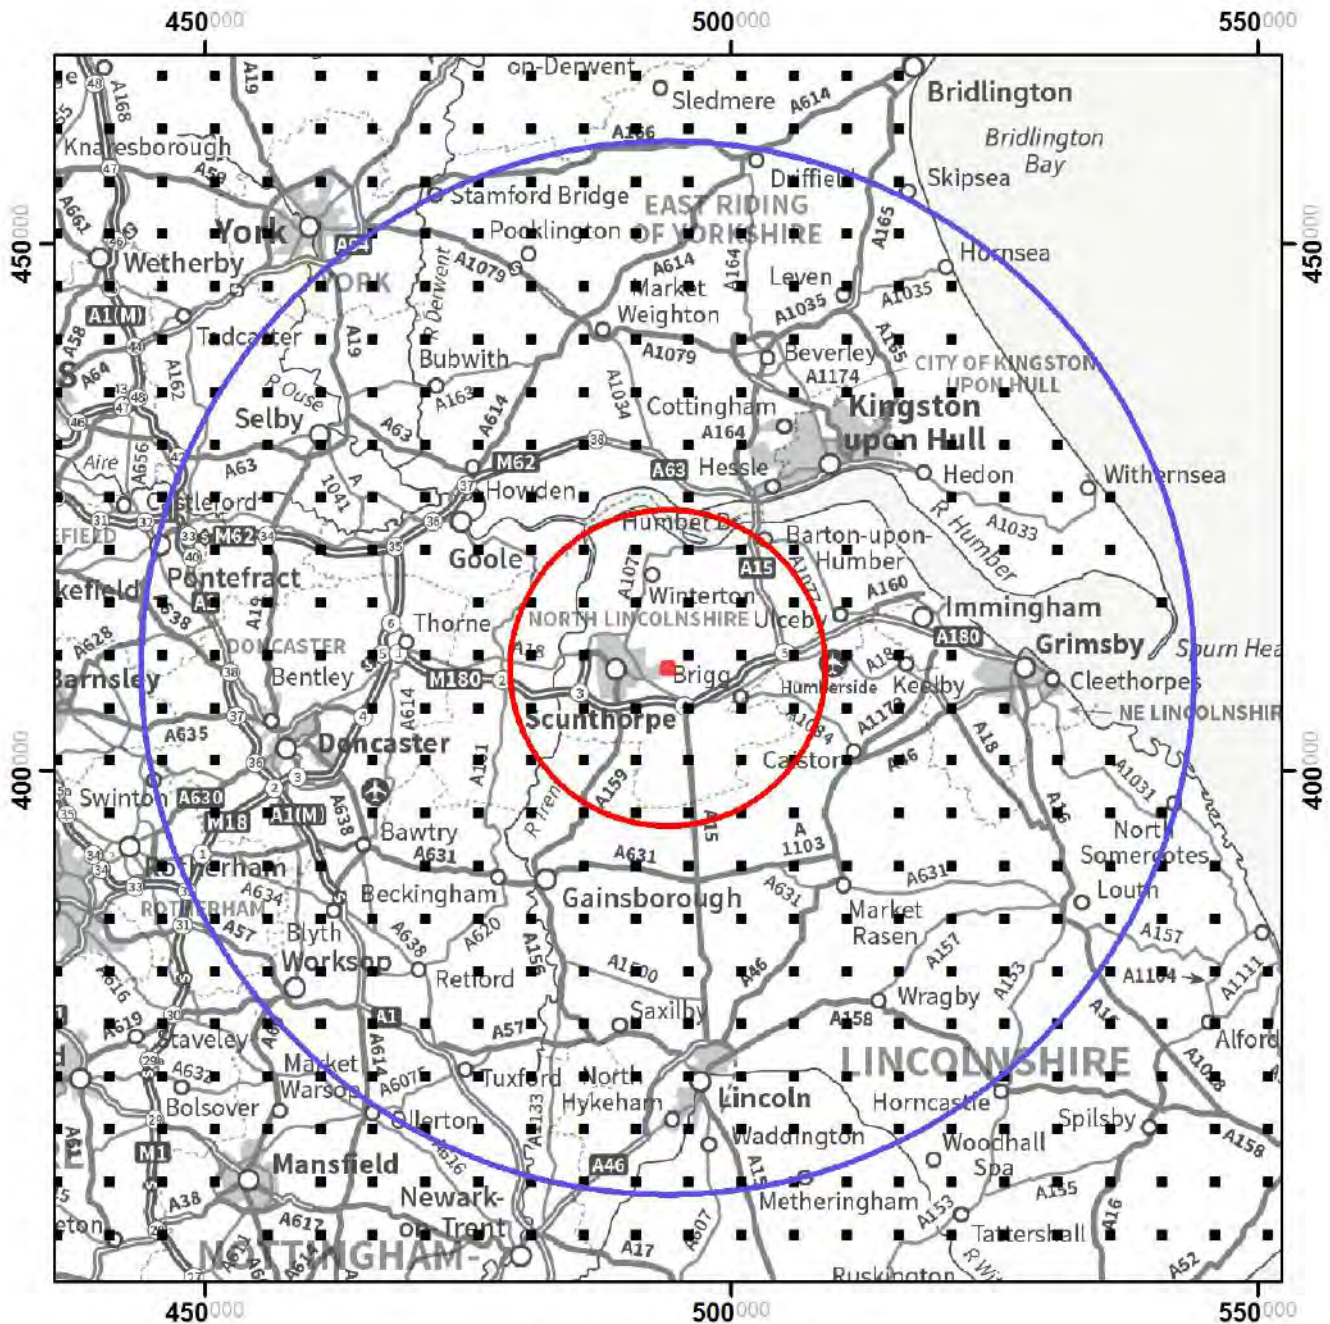

Soils Data © Cranfield University (NSRI) and for the Controller of HMSO 2017
 Contains OS data © Crown Copyright and database right 2017

Topsoil Element Background Levels Key

- Report area
- 15 km radius - local area
- 50 km radius - regional area
- NSI sample points

TOPSOIL ELEMENT BACKGROUND LEVELS DESCRIPTION

The National Soil Inventory (NSI) covers England and Wales on a 5 km grid and provides detailed information for each intersect of the grid. Collectively NSI data are statistically representative of England and Wales soils. The original sampling was undertaken around 1980 and there were partial resamplings in the mid-1990s. The most up-to-date data is presented here.

Analysis of the NSI samples provides detailed measurements of over 20 elements from the soils, in addition to pH. This data is summarised over three areas to provide you with an understanding of how your site, and your data for it, sits within the local, regional and national context.

Where available, the soil element levels are compared with the Soil Guideline Values and where a soil sample we have analysed has been found in excess of the SGV guidelines for "residential with plant uptake" land, this is displayed in red in the tables which follow.

SGV levels are provided for the following elements: lead, selenium, nickel, mercury, chromium, cadmium and arsenic.

In the following pages, a number of analyses of the topsoil are provided. The majority of analyses have been performed on the full compliment of sample points, however, in some areas, for some elements, only a few samples were analysed as part of subsequent programmes. In order to present the full suite of possible datasets, and accurately convey the validity of the data, the number of actual measured samples is stated for each analysis. Care should be taken where the number of samples is disproportionately low.

a. Analysis Within a 15km Radius (28 Sample Points)

ANALYSES	SAMPLES	MEAN	MIN	MAX	ST.DEV
pH (PH)	28	7.2	4.8	8.3	0.9
Carbon (CARBON)	28	2.8	0.7	12.6	2.3
Aluminium (AL_ACID)	28	26493.0	3935.0	56855.0	13742.5
Arsenic (AS_ACID)	23	7.4	0.0	35.2	9.2
Barium (BA_ACID)	28	139.7	27.0	391.0	94.8
Calcium (CA_ACID)	28	13982.2	1412.0	61625.0	15388.1
Cadmium (CD_ACID)	28	0.6	0.0	1.5	0.5
Cadmium (Extractable) (CD_EDTA)	28	0.3	0.1	0.6	0.1
Cobalt (CO_ACID)	28	11.7	2.6	29.7	5.9
Cobalt (Extractable) (CO_EDTA)	28	1.4	0.1	7.2	1.5
Chromium (CR_ACID)	28	34.5	4.3	78.9	19.9
Copper (CU_ACID)	28	17.7	4.9	34.4	7.0
Copper (Extractable) (CU_EDTA)	28	6.1	2.8	12.0	2.4
Fluoride (F_ACID)	20	87.3	0.0	185.8	39.7
Iron (FE_ACID)	28	31167.9	8909.0	90620.0	15853.3
Mercury (HG_ACID)	19	0.1	0.0	0.3	0.1
Potassium (K_ACID)	28	4955.0	755.0	11384.0	3222.3
Potassium (Extractable) (K_NITRATE)	28	261.0	71.0	824.0	176.3
Magnesium (MG_ACID)	28	4602.7	452.0	11610.0	3908.3
Magnesium (Extractable) (MG_NITRATE)	28	128.9	5.0	412.0	104.0
Manganese (MN_ACID)	28	838.4	230.0	3915.0	698.0
Manganese (Extractable) (MN_EDTA)	28	252.2	53.0	1666.0	303.5
Molybdenum (MO_ACID)	23	0.8	0.0	5.7	1.1
Sodium (NA_ACID)	28	315.5	104.0	783.0	209.3
Nickel (NI_ACID)	28	28.4	6.6	58.1	15.3
Nickel (Extractable) (NI_EDTA)	28	2.5	0.5	6.1	1.9
Phosphorus (P_ACID)	28	755.2	387.0	1585.0	246.2
Phosphorus (Extractable) (P_OLSEN)	28	37.5	11.0	82.0	18.1
Lead (PB_ACID)	28	41.4	15.0	111.0	25.6
Lead (Extractable) (PB_EDTA)	28	17.0	6.4	43.7	9.3
Selenium (SE_ACID)	23	0.3	0.0	0.8	0.2
Strontium (SR_ACID)	28	45.0	12.0	115.0	29.1
Vanadium (V_ACID)	23	51.2	9.2	172.0	37.1
Zinc (ZN_ACID)	28	86.0	33.0	161.0	33.8
Zinc (Extractable) (ZN_EDTA)	28	7.2	2.8	26.1	4.8

for units, see Analyses Denitions (p52)

b. Analysis Within a 50km Radius (271 Sample Points)

ANALYSES	SAMPLES	MEAN	MIN	MAX	ST.DEV
pH (PH)	270	7.1	3.5	8.6	0.9
Carbon (CARBON)	269	3.3	0.1	48.8	4.8
Aluminium (AL_ACID)	270	26629.6	2974.0	66580.0	12042.5
Arsenic (AS_ACID)	145	4.6	0.0	35.2	5.6
Barium (BA_ACID)	270	149.3	16.0	847.0	105.5
Calcium (CA_ACID)	270	16783.6	91.0	277260.0	31281.7
Cadmium (CD_ACID)	270	0.6	0.0	10.4	0.9
Cadmium (Extractable) (CD_EDTA)	270	0.3	0.0	7.3	0.6
Cobalt (CO_ACID)	270	9.9	0.3	42.6	5.3
Cobalt (Extractable) (CO_EDTA)	270	1.0	0.0	7.2	1.0
Chromium (CR_ACID)	270	33.7	0.0	165.6	20.1
Copper (CU_ACID)	270	21.0	4.1	322.6	21.8
Copper (Extractable) (CU_EDTA)	270	7.5	0.7	196.9	12.6
Fluoride (F_ACID)	162	70.9	0.0	452.8	64.0
Iron (FE_ACID)	270	25555.2	3032.0	104642.0	12432.5
Mercury (HG_ACID)	124	0.1	0.0	0.6	0.1
Potassium (K_ACID)	270	4614.5	643.0	12048.0	2575.9
Potassium (Extractable) (K_NITRATE)	270	221.0	16.0	1294.0	156.8
Magnesium (MG_ACID)	270	4629.3	286.0	55895.0	5623.3
Magnesium (Extractable) (MG_NITRATE)	270	213.5	5.0	1128.0	214.0
Manganese (MN_ACID)	270	641.1	24.0	3915.0	496.9
Manganese (Extractable) (MN_EDTA)	270	154.1	3.0	1666.0	157.2
Molybdenum (MO_ACID)	224	0.8	0.0	7.4	1.0
Sodium (NA_ACID)	270	279.8	46.0	2397.0	196.8
Nickel (NI_ACID)	270	24.9	0.0	104.0	13.4
Nickel (Extractable) (NI_EDTA)	270	1.9	0.2	19.0	1.9
Phosphorus (P_ACID)	270	688.5	164.0	3240.0	339.2
Phosphorus (Extractable) (P_OLSEN)	269	36.6	2.0	337.0	29.2
Lead (PB_ACID)	270	41.3	7.0	556.0	44.2
Lead (Extractable) (PB_EDTA)	270	17.3	1.8	259.3	19.9
Selenium (SE_ACID)	145	0.4	0.0	2.4	0.4
Strontium (SR_ACID)	270	45.4	0.0	441.0	47.1
Vanadium (V_ACID)	224	38.4	0.0	235.3	27.6
Zinc (ZN_ACID)	270	84.1	6.0	993.0	74.3
Zinc (Extractable) (ZN_EDTA)	270	9.6	1.1	320.4	25.6

for units, see Analyses Denitions (p52)

c. National Analysis (5686 Sample Points)

ANALYSES	SAMPLES	MEAN	MIN	MAX	ST.DEV
pH (PH)	5630	6.0	3.1	9.2	1.3
Carbon (CARBON)	5672	6.1	0.1	61.5	8.9
Aluminium (AL_ACID)	5677	26775.3	491.0	79355.0	12772.2
Arsenic (AS_ACID)	2729	4.6	0.0	110.0	5.7
Barium (BA_ACID)	5677	150.0	7.0	3840.0	159.5
Calcium (CA_ACID)	5677	13768.7	0.0	339630.0	37785.0
Cadmium (CD_ACID)	5677	0.7	0.0	40.9	1.0
Cadmium (Extractable) (CD_EDTA)	5655	0.5	0.0	85.0	3.0
Cobalt (CO_ACID)	5677	10.6	0.0	567.0	13.7
Cobalt (Extractable) (CO_EDTA)	5655	1.1	0.0	26.5	1.2
Chromium (CR_ACID)	5677	38.9	0.0	2339.8	43.7
Copper (CU_ACID)	5677	22.6	0.0	1507.7	36.8
Copper (Extractable) (CU_EDTA)	5655	6.4	0.3	431.4	11.1
Fluoride (F_ACID)	3320	58.5	0.0	6307.9	186.2
Iron (FE_ACID)	5677	28147.8	395.0	264405.0	16510.5
Mercury (HG_ACID)	2159	0.1	0.0	2.4	0.2
Potassium (K_ACID)	5677	4727.7	60.0	23905.0	2700.2
Potassium (Extractable) (K_NITRATE)	5609	182.0	6.0	2776.0	151.6
Magnesium (MG_ACID)	5677	3648.1	0.0	62690.0	3284.1
Magnesium (Extractable) (MG_NITRATE)	5609	146.0	1.0	1601.0	147.5
Manganese (MN_ACID)	5677	777.0	3.0	42603.0	1068.8
Manganese (Extractable) (MN_EDTA)	5654	159.4	0.0	3108.0	188.6
Molybdenum (MO_ACID)	4417	0.9	0.0	56.3	2.0
Sodium (NA_ACID)	5677	323.3	17.0	25152.0	572.3
Nickel (NI_ACID)	5677	25.4	0.0	1350.2	29.2
Nickel (Extractable) (NI_EDTA)	5655	1.6	0.1	73.2	2.0
Phosphorus (P_ACID)	5677	792.1	41.0	6273.0	433.9
Phosphorus (Extractable) (P_OLSEN)	5604	27.4	0.0	534.0	25.5
Lead (PB_ACID)	5677	73.3	0.0	17365.0	280.6
Lead (Extractable) (PB_EDTA)	5655	27.8	1.2	6056.5	119.7
Selenium (SE_ACID)	2729	0.6	0.0	22.8	0.8
Strontium (SR_ACID)	5677	42.3	0.0	1445.0	67.8
Vanadium (V_ACID)	4428	41.0	0.0	854.4	33.9
Zinc (ZN_ACID)	5677	90.2	0.0	3648.0	104.4
Zinc (Extractable) (ZN_EDTA)	5655	9.6	0.5	712.0	24.6

for units, see Analyses Denitions (p52)

SOIL GUIDELINE VALUES (SGV)

Defra and the Environment Agency have produced soil guideline values (SGVs) as an aid to preliminary assessment of potential risk to human health from land that may be contaminated. SGVs represent 'intervention values', which, if exceeded, act as indicators of potential unacceptable risk to humans, so that more detailed risk assessment is needed.

The SGVs were derived using the Contaminated Land Exposure Assessment (CLEA) model for four land uses:

1. residential (with plant uptake / vegetable growing)
2. residential (without vegetable growing)
3. allotments
4. commercial / industrial

SGVs are only designed to indicate whether further site-specific investigation is needed. Where a soil guideline value is exceeded, it does not mean that there is necessarily a chronic or acute risk to human health.

The values presented in this report represent those from a number of sample points (given in the "Samples" column in each table) providing local, regional and national background levels. Figures which appear in red indicate that a bulked sample from 20m surrounding a sample point, has at a past date, exceeded the SGV for the 'residential with plant uptake' land use.

It is always advisable to perform site specific investigations.

More details on all the SGVs can be found on the Environment Agency Website.

All units are mg/kg which is equivalent to parts per million (ppm)

SUBSTANCE	RESIDENTIAL WITH PLANT UPTAKE	RESIDENTIAL WITHOUT PLANT UPTAKE	ALLOTMENTS	COMMERCIAL /INDUSTRIAL
LEAD	450	450	450	750
SELENIUM	35	260	35	8000
NICKEL	50	75	50	5000
MERCURY	8	15	8	450
CHROMIUM	130	200	130	5000
CADMIUM (pH 6)	1	30	1	1400
CADMIUM (pH 7)	2	30	2	1400
CADMIUM (pH 8)	8	30	8	1400
ARSENIC	20	20	20	500

ANALYSES DEFINITIONS

PH (pH)

pH of soil measure after shaking 10ml of soil for 15 minutes with 25ml of water

CARBON (Carbon)

Organic Carbon (% by wt) measured either by loss-on-ignition for soils estimated to contain more than about 20% organic carbon or by dichromate digestion.

AL_ACID (Aluminium)

Total Aluminium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

AS_ACID (Arsenic)

Total Arsenic concentration (mg/kg) determined by Hydride Atomic Absorption Spectrometry (AAS), extracted into hydrochloric acid after digestion with nitric acid and ashing with magnesium nitrate

BA_ACID (Barium)

Total Barium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

CA_ACID (Calcium)

Total Calcium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

CD_ACID (Cadmium)

Total Cadmium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

CD_EDTA (Cadmium Extractable)

Extractable Cadmium concentration (mg/l) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) after shaking 10ml of soil with 50ml of 0.05M EDTA at pH 7.0 for 1h at 20 deg. C and then filtering

CO_ACID (Cobalt)

Total Cobalt concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

CO_EDTA (Cobalt Extractable)

Extractable Cobalt concentration (mg/l) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) after shaking 10ml of soil with 50ml of 0.05M EDTA at pH 7.0 for 1h at 20 deg. C and then filtering

CR_ACID (Chromium)

Total Chromium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

CU_ACID (Copper)

Total Copper concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

CU_EDTA (Copper Extractable)

Extractable Copper concentration (mg/l) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) after shaking 10ml of soil with 50ml of 0.05M EDTA at pH 7.0 for 1h at 20 deg. C and then filtering

ANALYSES DEFINITIONS continued

F_ACID (Flouride)

Flouride extracted with 1 mol / l sulphuric acid and determined by Ion Selective Electrode (ISE)

FE_ACID (Iron)

Total Iron concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

HG_ACID (Mercury)

Total Mercury concentration (mg/kg) determined by Hydride Atomic Absorption Spectrometry (AAS), digested in a nitric/sulphuric acid mixture

K_ACID (Potassium)

Total Potassium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

K_NITRATE (Potassium Extractable)

Extractable Potassium concentration (mg/l) determined by shaking 10ml of air dry soil with 50ml of 1.0M ammonium nitrate for 30mins, filtering and then measuring the concentration by flame photometry

MG_ACID (Magnesium)

Total Magnesium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

MG_NITRATE (Magnesium Extractable)

Extractable Magnesium concentration (mg/l) determined by shaking 10ml of air dry soil with 50ml of 1.0M ammonium nitrate for 30mins, filtering and then measuring the concentration by flame photometry

MN_ACID (Manganese)

Total Manganese concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

MN_EDTA (Manganese Extractable)

Extractable Manganese concentration (mg/l) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) after shaking 10ml of soil with 50ml of 0.05M EDTA at pH 7.0 for 1h at 20 deg. C and then filtering

MO_ACID (Molybdenum)

Total Molybdenum concentration (mg/kg) determined by Atomic Adsorption Spectrometry (AAS) in an aqua regia digest

MO_EDTA (Molybdenum Extractable)

Extractable Molybdenum concentration (mg/l) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) after shaking 10ml of soil with 50ml of 0.05M EDTA at pH 7.0 for 1h at 20 deg. C and then filtering

NA_ACID (Sodium)

Total Sodium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

NI_ACID (Nickel)

Total Nickel concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

ANALYSES DEFINITIONS continued

NI_EDTA (Nickel Extractable)

Extractable Nickel concentration (mg/l) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) after shaking 10ml of soil with 50ml of 0.05M EDTA at pH 7.0 for 1h at 20 deg. C and then filtering

P_ACID (Phosphorus)

Total Phosphorus concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

P_OLSON (Phosphorous Extractable)

Extractable Phosphorus concentration (mg/l) determined by shaking 5ml of air dry soil with 100ml of 0.5M sodium bicarbonate for 30mins at 20 deg.C, filtering and then measuring the absorbance at 880 nm colorimetrically with acid ammonium molybdate solution

PB_ACID (Lead)

Total Lead concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

PB_EDTA (Lead Extractable)

Extractable Lead concentration (mg/l) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) after shaking 10ml of soil with 50ml of 0.05M EDTA at pH 7.0 for 1h at 20 deg. C and then filtering

SE_ACID (Selenium)

Total Selenium concentration (mg/kg) determined by Hydride Atomic Absorption Spectrometry (AAS), extracted into hydrochloric acid after digestion with nitric acid and ashing with magnesium nitrate

SR_ACID (Strontium)

Total Strontium concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

V_ACID (Vanadium)

Total Vanadium concentration (mg/kg) determined by Atomic Adsorption Spectrometry (AAS) in an aqua regia digest

ZN_ACID (Zinc)

Total Zinc concentration (mg/kg) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) in an aqua regia digest

ZN_EDTA (Zinc Extractable)

Extractable Zinc concentration (mg/l) determined by Inductively Coupled Plasma Emission Spectrometry (ICP) after shaking 10ml of soil with 50ml of 0.05M EDTA at pH 7.0 for 1h at 20 deg. C and then filtering

REFERENCES

AVERY, B.W. (1973). Soil classification in the Soil Survey of England and Wales. *Journal of Soil Science*, 24, 324-338.

AVERY, B.W., (1980). Soil classification for England and Wales. Soil Survey Technical Monograph No.14, Harpenden, UK.

BOORMAN, D.B, HOLLIS, J.M. and LILLEY, A. (1995). Hydrology of Soil Types: a hydrologically-based classification of the soils of the UK. Institute of Hydrology Report No.126, Wallingford, UK.

CLAYDEN, B and HOLLIS, J.M. (1984). Criteria for Differentiating Soil Series. Soil Survey Technical Monograph No.17, pp159. Harpenden, UK.

HALLETT, S.H., KEAY, C.A., JARVIS, M.G. and JONES, R.J.A. (1994). INSURE: Subsidence risk assessment from soil and climate data. Proceedings of the Association for Geographic Information (AGI). National Conference Markets for Geographic Information. Birmingham. 16.2.1 - 16.2.7.

HOLLIS, J.M. (1991). Mapping the vulnerability of aquifers and surface waters to pesticide contamination at the national and regional scale. In: Pesticides in Soils and Water, BCPC Monograph No.47, 165-174.

HOLLIS, J.M., KEAY, C.A., HALLETT, S. H., GIBBONS, J.W. and COURT, A.C. (1995). Using CatchIS to assess the risk to water resources from diffusely applied pesticides. In: British Crop Protection Council monograph No. 62: Pesticide movement to water, 345-350

JARVIS, M.G and HEDGES, M.R. (1994). Use of soil maps to predict the incidence of corrosion and the need for iron mains renewal. *Journal of the Institution of Water and Environmental Management* 8, (1) 68-75.

PALMER, R.C., HOLMAN, I.P., ROBINS, N.S. and LEWIS, M.A. (1995). Guide to groundwater vulnerability mapping in England and Wales. National Rivers Authority R and D Note 578/1/ST.

To view a glossary visit: www.landis.org.uk/sitereporter/glossary.pdf

For a list of further reading visit: www.landis.org.uk/sitereporter/FURTHER_READING.pdf

GIS Datasets:

The GIS data used in the creation of this report is available to lease for use in projects. To learn more about, or acquire the GIS datasets used in the creation of this report, please contact the National Soil Resources Institute:

nsridata@cranfield.ac.uk

+44 (0) 1234 75 2992

National Soil resources Institute

Cranfield University

Bedfordshire

MK43 0AL

United Kingdom

www.landis.org.uk


hallow gro dwa er
table poten ial in
western area below
30mAOD, within
superficial deposits.
Likely draining
westwards

I area above
60mAOD
groundwater likely to
be lower than 5m
BEGl and draining
eastwards, within
bedrock

Potential
discontinuous
springline at
40-43mAOD, draining
westwards


**ANNOTATED PLAN SHOWING
POTENTIAL GROUNDWATER
CONDITIONS, SPRINGLINE AND
DRAINAGE DIRECTIONS**

NOTE:
Shallow soils throughout
complete site area classified on
soils maps as well drained or
free draining

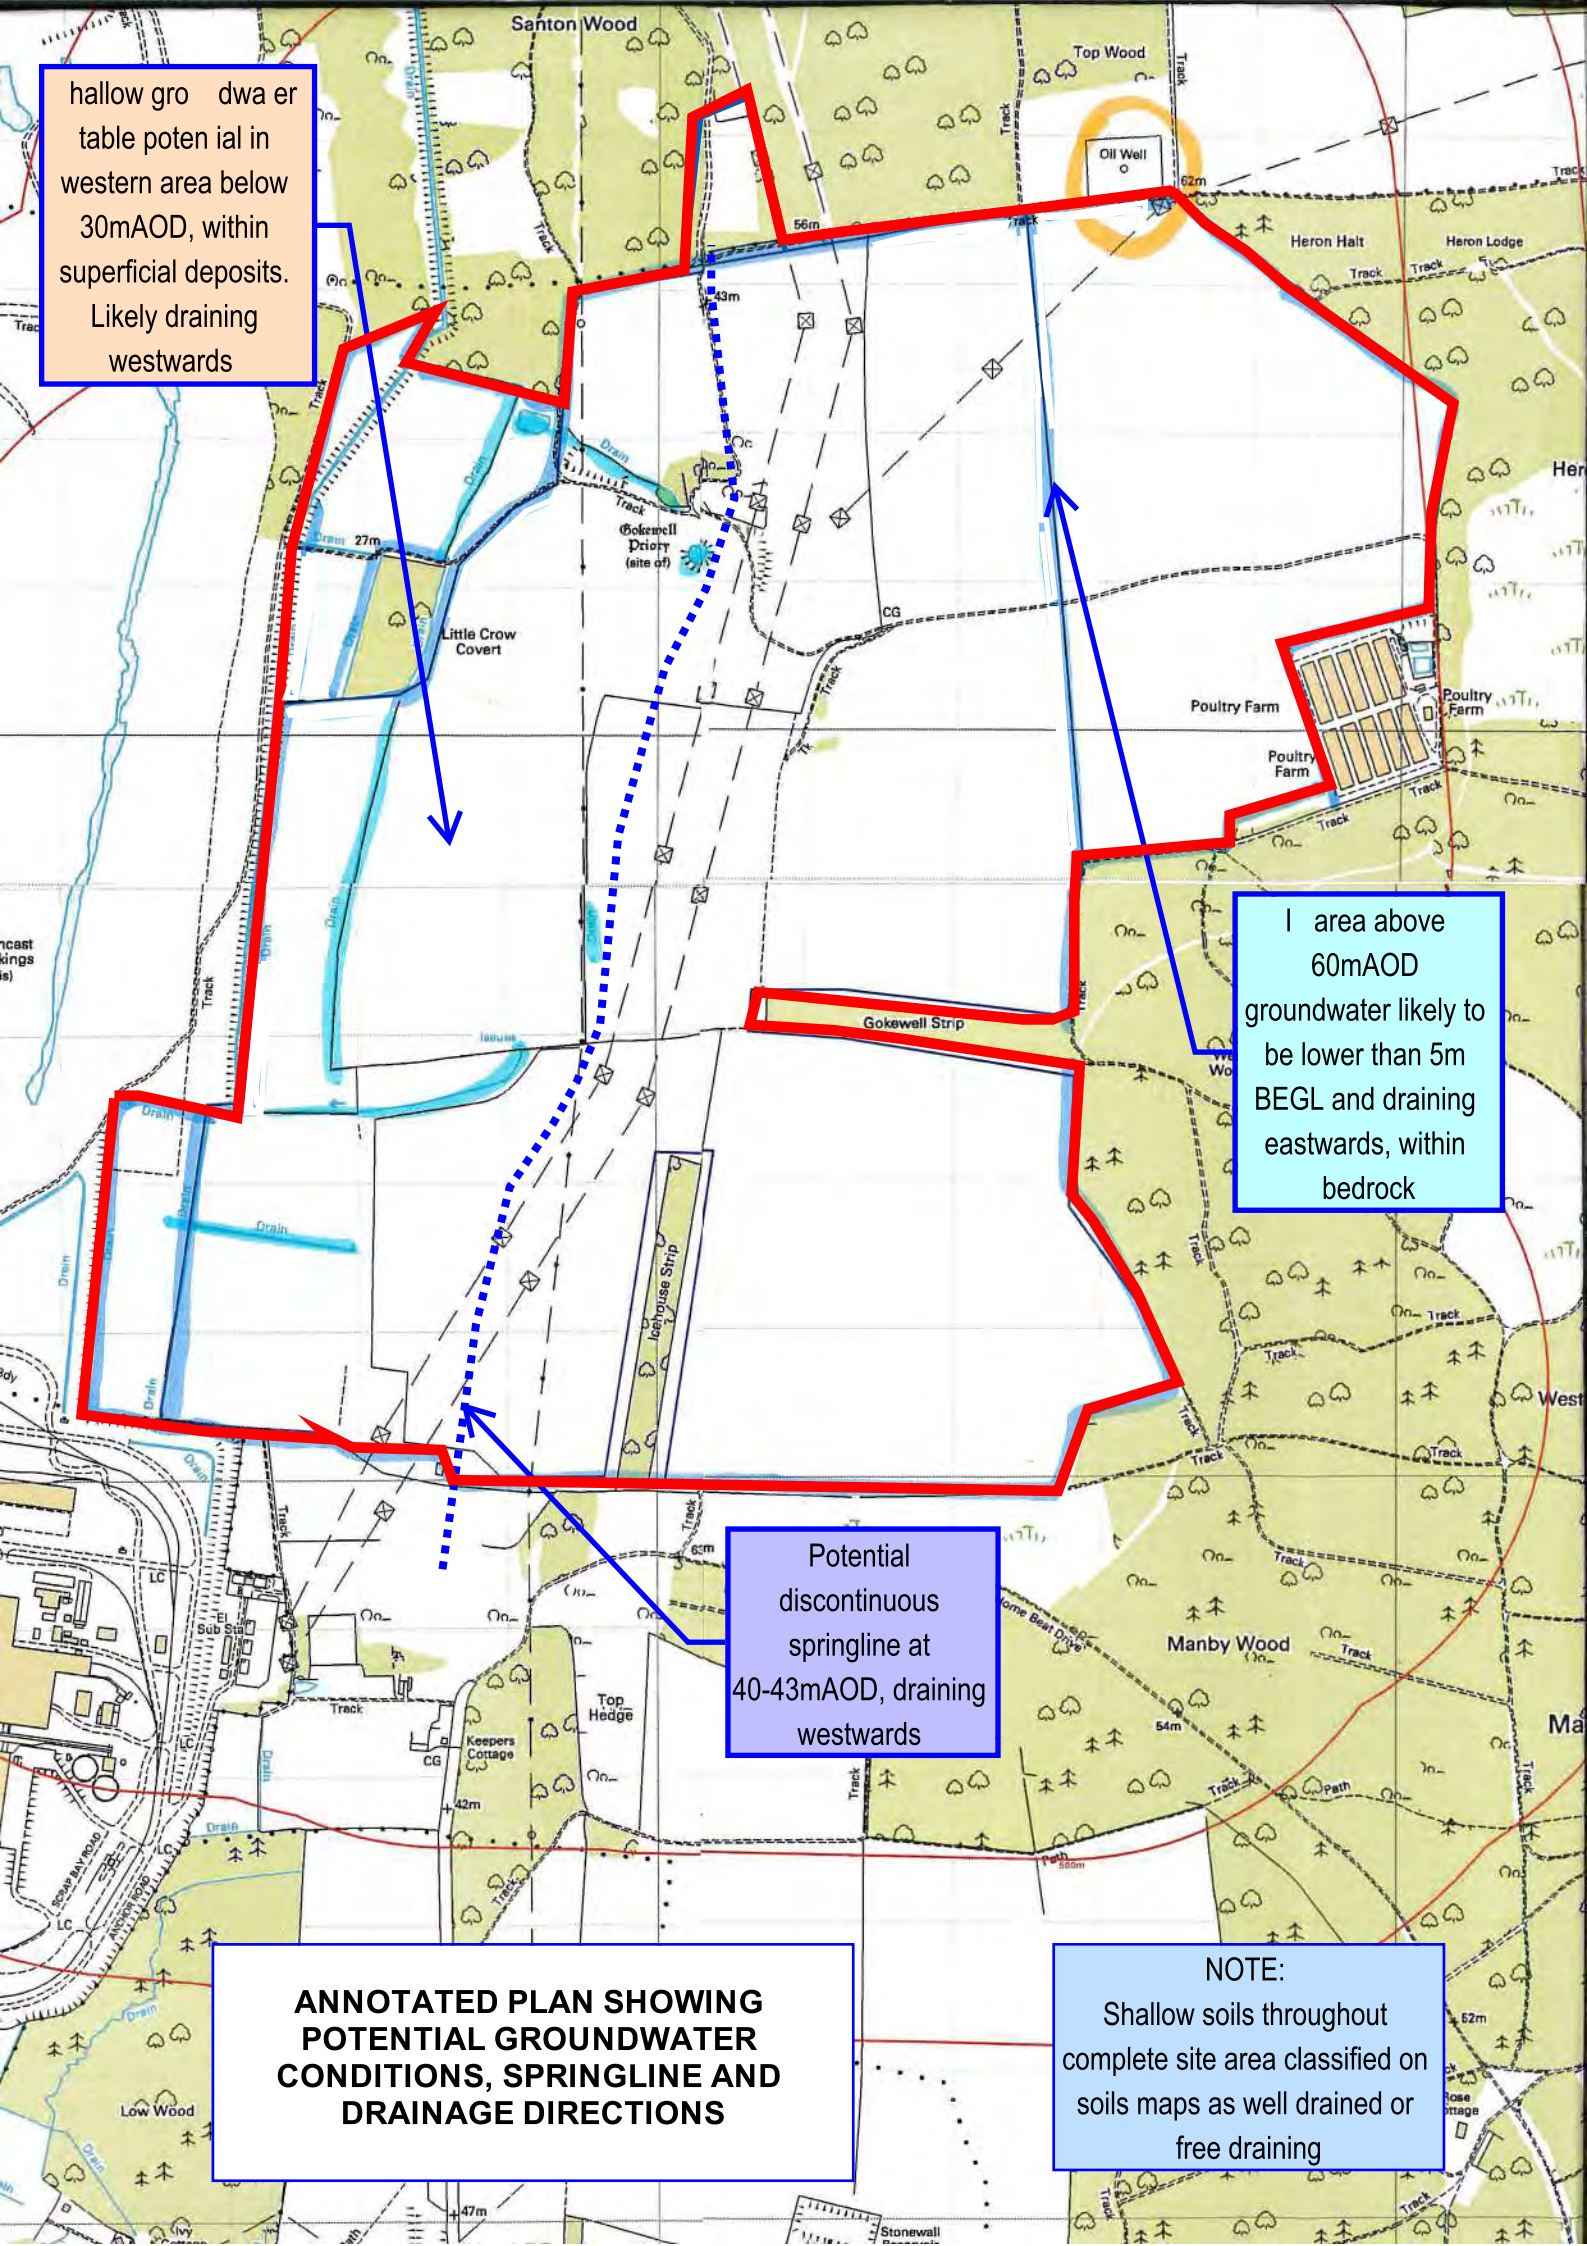

EXTRACT:
HILLSIDE
MINERAL
RESOURCES
1: 100,000
ORIGINAL
(2006)

SITE
AREA

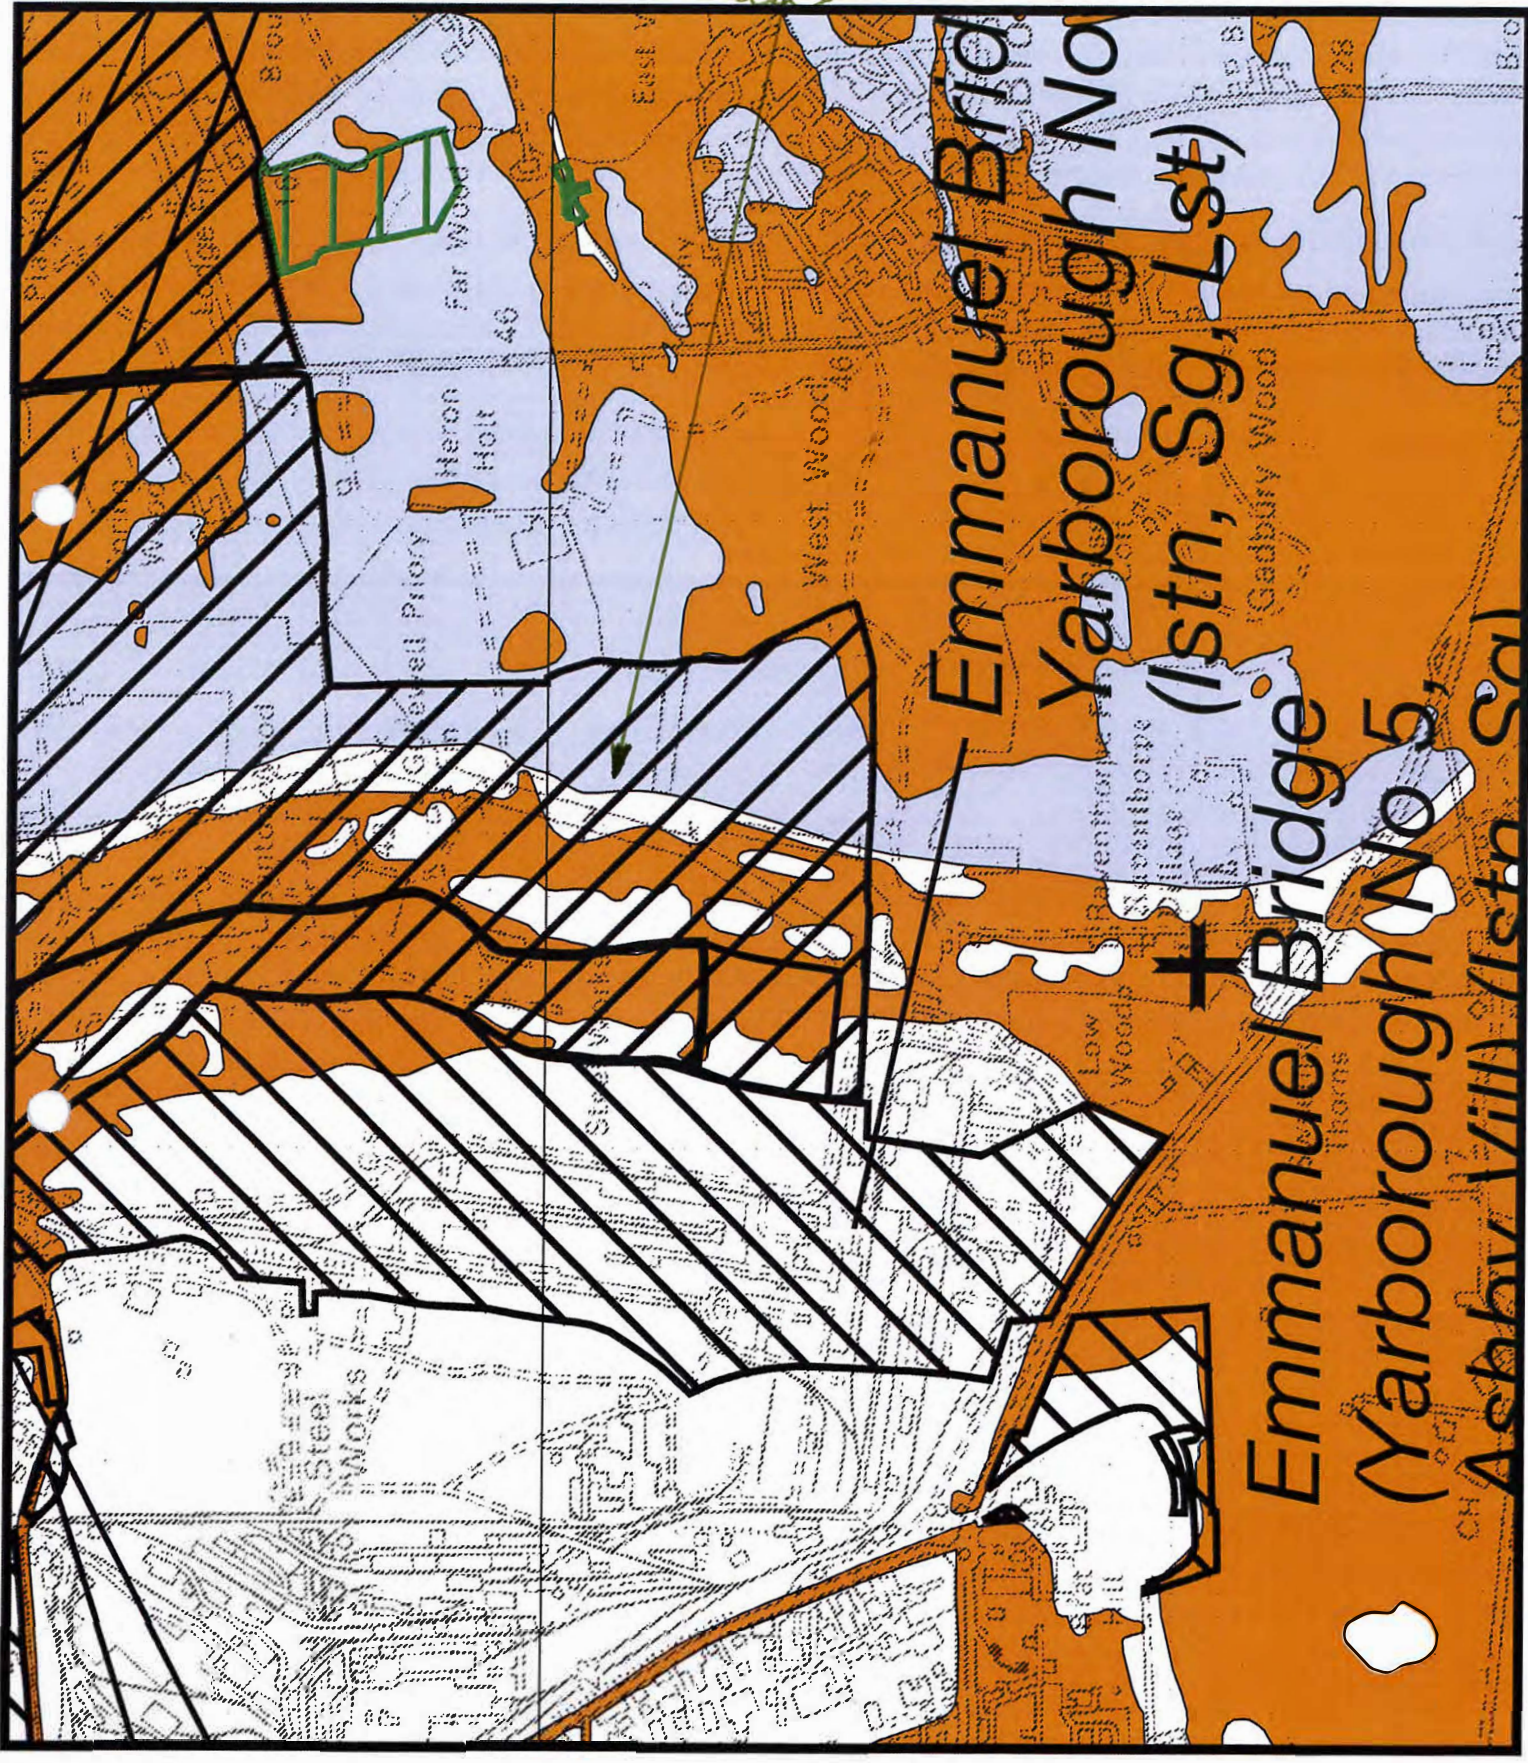

EVAPORITES

Potash



Approximate western limit of Boulby Potash

Salt



Approximate western limit of Boulby Halite

} Permian

MINERAL PLANNING PERMISSION (as at 01.08.05)

Source: Mineral Planning Authorities




Surface planning permission (valid and expired)



Underground planning permission (valid and expired)

MINERAL WORKINGS



Melton Ross Active site




Burstwick Inactive (including yet to be worked), worked-out and/or restored site

Mineral commodity

Ch	Chalk	Istn	Ironstone	Peat	Peat
Cl	Clay & Shale	Lst	Limestone	San	Sand
CR	Crushed Rock	Oil	Oil	Sg	Sand & Gravel
Fi	Flint	Min	Unspecified mineral	SiS	Silica Sand
Gas	Natural Gas	MSg	Marine sand and gravel		

■ Active rail aggregate depot ◆ Active marine wharf

ENVIRONMENTAL DESIGNATIONS (as at 03/11/04)



National nature conservation designations (SSSIs and NNRs)

PLA

The ex
current
by East
from N
and a
author
unwor

Planni
has be
been
underl

Conta

East P
88770

North
01472

North
6XP, T

Kingst
61222

Topog
Statio
All rig

Digital
Centr

K Onsho Geophysical Library

A charitable body providing a substantial open-access resource of commercial data on the deep geology beneath our feet – promoting education, research and development

INTERACTIVE MAP FULL SCREEN 

V 3.8.0



UK Onshore Geophysical Library (<https://ukoglib.org.uk>)

Well name: BROUGHTON B1

Show Legend
Main

Depths

Directional

Images

Contents

<input type="checkbox"/> Wells ▼	Datum (ft)	RT 224
	Datum (m)	RT 68.2
	GL (ft)	207
<input type="checkbox"/> Seismic ▼	GL (m)	63.1
	TD (ft)	6300
<input type="checkbox"/> UKOGL Interpretations ▼	TD (m)	1920
	TVD SS (ft)	6076
<input type="checkbox"/> Licences ▼	TVD SS (m)	1851.8
	TD Period	Carboniferous
<input type="checkbox"/> Contexts ▼	TD Detail	Dinantian

 Add to Selection

 Zoom To

Additional Borehole Coverage

As a supplement to our primary Exploration wells coverage we now serve an additional wells layer of selected additional deep boreholes compiled over areas of limited existing coverage and control.

Providing access to an expanded Formation Tops database this resource has been compiled from a number of open access sources and sub surface memoirs, primarily derived from information held within the British Geological Survey's Borehole Scans archive. For further information and access to extensive source records please visit the [BGS site](#).

This compilation is an ongoing project and is still in its early stages, with the initial focus being across the south of England. New data will be added on a regular basis and this layer, shown as blue ringed well

Broughton B1

BP PETROLEUM DEVELOPMENT LIMITED



BROUGHTON B-1

LICENCE: PL185

46/13-3

BROUGHTON B-1


WELL RECORD CENTRE

DRILLED DEPTH

29 MAY 1985

NATIONAL GRID REFERENCE:
 SURFACE LOCATION SE494627410760 *03413493W 533804694*
 TOP RESERVOIR LOCATION _____
 BOTTOM HOLE LOCATION _____
 R.T.E. 68.2 m A.O.D. 5.1 m A.G.L. G.L.E. 63.1 m A.O.D.
 RIG KENTING-36 SPUNDED 18th JULY, 1984 COMPLETED DRILLING 17th AUG, '84
 TOTAL DEPTH DRILLED 1920.0 m B.R.T. TOTAL DEPTH (T.V.D.) _____ m B.R.T. _____ m S.S.
 AVERAGE ANGLE OF DEVIATION THROUGH RESERVOIR 1.25° MAXIMUM DEVIATION 2°
 WELL STATUS SUSPENDED OIL WELL

CASING



LOCATION MAP
SCALE 1:50,000



LITHOLOGICAL

- Limestone
- Dolomite
- Misc. Carbonate
- Dolomitic Limestone
- Calcareous Dolomite
- Clay, Mudstone, Shale
- Siltstone
- Sandstone, Sand
- Conglomerate, Gravel
- Siliceous Rock
- Coal, Lignite & other Carbonaceous Rock

- Anhydrite, Gypsum
- Halite
- Miscellaneous Chlorides and Sulphates
- Iron, Manganese, Phosphate and other Misc. Mins.
- Chert
- Extrusive Igneous
- Tuff
- Intrusive Igneous
- Metamorphic
- Gement (G.F. 10)
- No Samples

LITHOLOGICAL QUALIFIERS

- Clayey
- Sandy
- Silty
- Gravelly
- Calcareous
- Dolomitic
- Significant Glauconite
- Significant Carb. Frags.
- Phosphatic, Ferruginous, Manganiferous
- Bituminous
- Tuffaceous

GRAIN TYPE FOSSILIFEROUS: SKELETAL

- Benthonic Macrofossils
- Planktonic Macrofossils
- Benthonic Microfossils
- Planktonic Microfossils
- Plant remains

WELL SYMBOLS

- Water Flow
- Loss to Formation
- Gas Trace
- Gas Show
- Oil Show
- Gas & Condensate Show
- Oil and Gas Show
- Hydrocarbon Fluorescence
- Cored Interval
- Sidewall Core
- No Recovery
- Formation Interval Test
- Drill Stem Test
- Perforated Interval
- Casing Shoe
- Line Hanger

Appendix D

Terrafirma Mining Report

TERRASEARCH® ASSESS

NON-RESIDENTIAL

PASSED

COAL

NEGLIGIBLE RISK 

STONE (Incl. Limestone, Clay, Bath Stone & Chalk)

MODERATE RISK 

EVAPORITES (Incl. Gypsum)

NEGLIGIBLE RISK 

METALLIFEROUS (Incl. Tin, Lead and Iron)

LOW RISK 

HYDROCARBONS (Incl. Fracking)

MODERATE RISK 

CHESHIRE BRINE

NEGLIGIBLE RISK 

DEVELOPMENT POTENTIAL

HIGH RISK 

PLANNED/FUTURE MINERAL EXTRACTION

MODERATE RISK 

Professional Opinion

Within the scope of this assessment, the Site is not considered to be at a significant risk from past, present or future mineral extraction. Mining hazards are unlikely to have an adverse effect on the security of the Site for normal lending purposes. However, your attention is drawn to the prudent enquiries suggested in the report recommendations.

Contact the report author directly by telephone on: 0330 900 7500

Report on:

**LARGE SITE AT SANTON,
SCUNTHORPE**

Date:

14/08/2017

Our Ref:

TFC201708081425-SITE

Client Ref:

LARGE SITE

TerraSearch® Assess is a site-specific evaluation of all mining and mineral extraction hazards. The report reviews available records, allowing us to expertly conclude the risk to the site from past, present and planned mining hazards, before providing practical next steps, based on the level of risk identified.

TerraSearch's terms & conditions provide liability cover of £10m per report. All TerraSearch® Assess reports adhere to The Search Code and are regulated by the Council of Property Search Organisations.



TERRAFIRMA

©2017 TerraFirma Mine Searches LTD



REGULATED COMBINED MINING SEARCH

Conclusions and Expert Interpretation of Risk

Considering the ongoing current use of the Site:

MODERATE RISK

TerraFirma have reviewed all available site investigation, local geological, historical and land use records and consider that, in this instance and considering its ongoing current use, the Site is at **moderate risk** from ground instability associated with historical **ironstone** extraction.

The Site is located in an area that has been extensively exploited for ironstone resources. Within the Site a number of suspected extraction features have been identified (highlighted by dashed lines - see hazard map) and these are considered likely to be associated with ironstone mining. Furthermore, northeast of the Site a historic hydrocarbon well, operated by BP for oil extraction, has also been located. The hydrocarbon field associated with this well extends within the Site boundary. Due to the nature of mineral extraction in the area and suitable geological conditions on Site, it is considered possible that both ironstone and oil extraction occurred within the Site boundary. Therefore, associated extraction features, including underground workings and shafts could be present and have the potential to impact ground stability in the area.

Considering the future development of the Site:

HIGH RISK

The presence of unrecorded surface and/or shallow mineral workings beneath the Site cannot be discounted and therefore prior to any site works or future development activity, it is considered prudent to commission a full Site Survey by a qualified mining geologist/engineer. Please contact TerraFirma directly if you require further information.



Professional Recommendations












































Based on the Site's current use, no further assessment of mineral extraction is required. However, due to suspected historic extraction on Site, it is strongly recommended that should the Site be developed, a full site investigation is undertaken prior to development. It is further recommended that close attention is also paid to the suspected features highlighted in the included hazard map (page 5.) during any future Site works.




Mining Hazards:

NOT DETECTED WITHIN 1000 METRES 

DETECTED WITHIN 1000 METRES 

Alabaster		Alum Shale		Anhydrite		Antimony	
Arsenic		Ball Clay		Barite		Bath Stone	
Bideford Black		Brick Clay		Brine Solution		Celestine	
Chalk		Chert		China Clay		Clay and Shale	
Coal		Copper		Coprolite		Delphstone	
Diatomite		Dolerite/Basalt		Dolomite		Flagstone	
Fireclay		Fluorspar/Calcite		Free Stone		Fuller's Earth	
Gas		Granite		Gold		Gypsum	
Iron Ore/Hematite		Iron Ochre		Ironstone		Jet	
Kentish Ragstone		Lead/Zinc		Lignite		Limestone	
Manganese		Metamorphic Rock		Non-Ferrous Metals		Oil	
Oil Shale		Peat		Platinum		Potash	
Rock Salt/Halite		Sand and Gravel		Sandstone		Sec. Aggregate	
Shale Gas		Silica Sand		Siltstone		Silver	
Slate		Soapstone		Tin		Tufa	
Tungsten		Witherite		Whinstone		Whetstone	

Mining Hazard Map

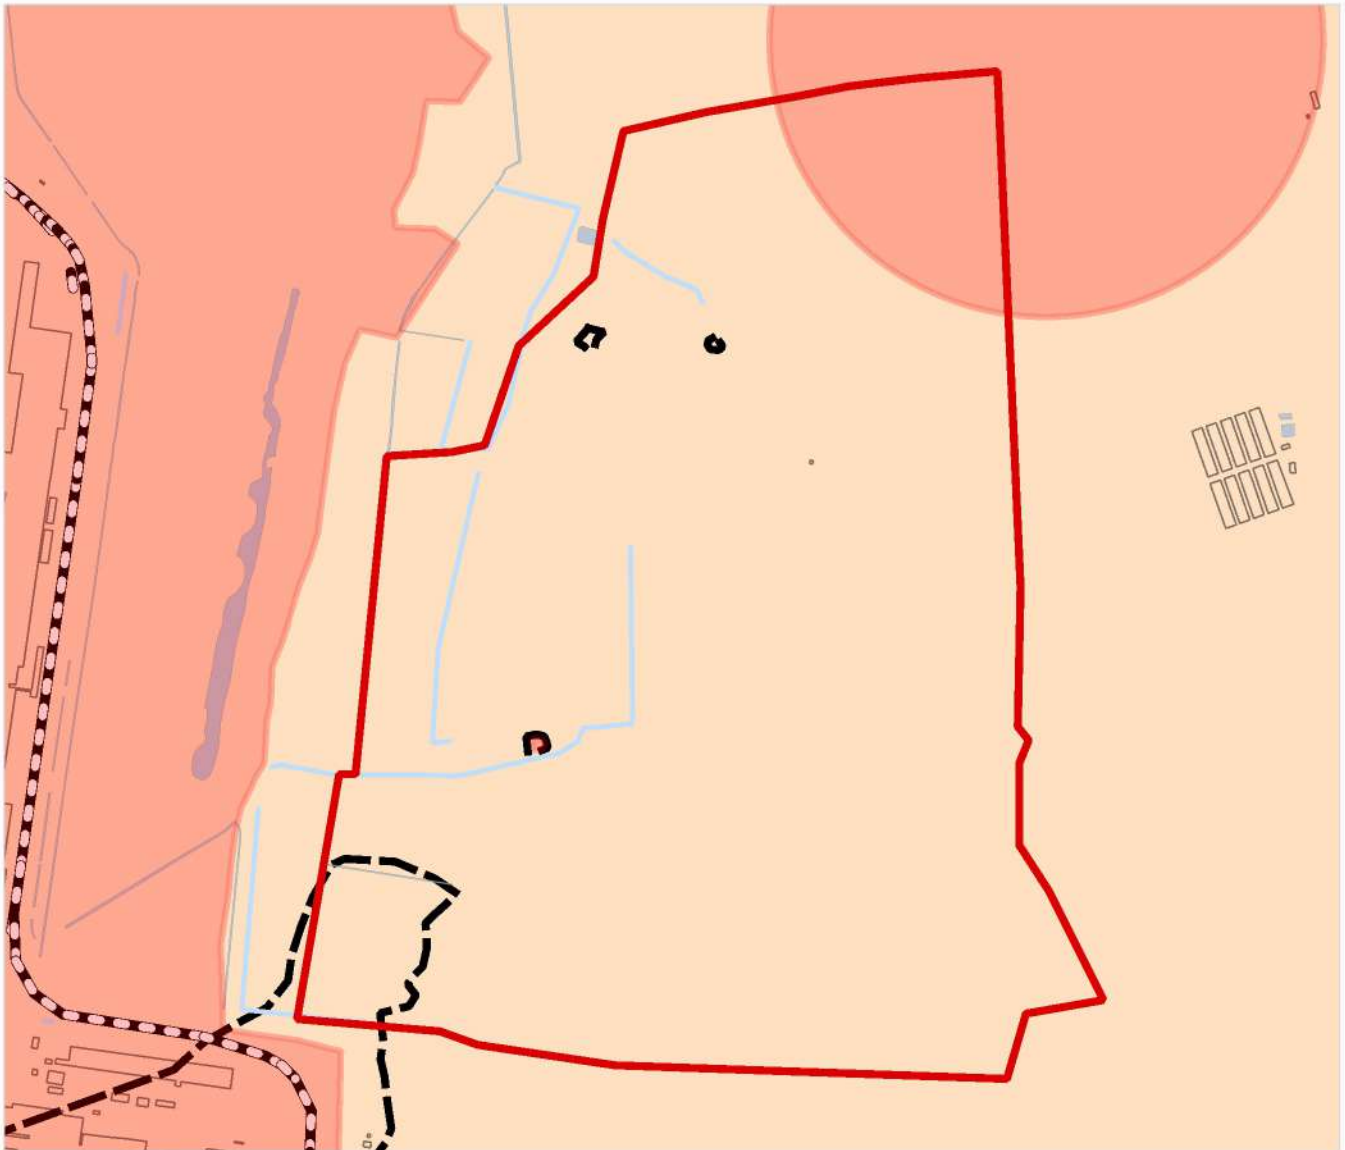

Site Address

LARGE SITE AT SANTON, SCUNTHORPE





Hazard Map Key

Coal Authority Data



Mine Entries

-  Adit
-  Shaft

Subsidence Claims

-  01 - Awaiting D
-  02 - Rejected
-  05 - Settled
-  06 - Withdrawn

Hazard Zones

-  High Risk Zone
-  Moderate Risk Zone

-  Site Boundary
-  Suspected Extraction Features

Mapping Sourced from the Ordnance Survey © Crown copyright and database rights 2017 OS100058210



Geological Conditions

Bedrock Geology	Jurassic Age Charmouth Mudstone Formation, Pecten Ironstone, Marlstone Rock Formation (Limestone And Sandstone), Whitby Mudstone Formation, Grantham Formation, Northampton Sand Formation, Kirton Cementstone Beds and Hibaldstow Limestone
Superficial Geology	Quaternary Age Sutton Sand Formation - Sand
Geological Faults	None Recorded
Artificial Deposits	Artificially infilled ground is present in the South West region of the site
Mineralised Deposits	Iron mineralisation is known to be present within the local bedrock
Wells	None Recorded

Detailed Findings of Past Non-Coal Mineral Extraction (Within 500 Metres of Site)

Ironstone	Overall Risk: MODERATE						
Background Information: The Site is located within an area that has been historically exploited for Ironstone by surface and underground mining.	<table border="1"> <tr> <td>Mining Hazards Within:</td> <td>Beneath Site</td> </tr> <tr> <td>Nearest Mining Hazard:</td> <td>See hazard Map</td> </tr> <tr> <td>Type of Mining Hazard:</td> <td>Suspected Extraction Features</td> </tr> </table>	Mining Hazards Within:	Beneath Site	Nearest Mining Hazard:	See hazard Map	Type of Mining Hazard:	Suspected Extraction Features
Mining Hazards Within:	Beneath Site						
Nearest Mining Hazard:	See hazard Map						
Type of Mining Hazard:	Suspected Extraction Features						
Expert Interpretation of Risk: The Site is considered to be at moderate risk from ground instability associated with historical Ironstone extraction. The local geological conditions are considered to be suitable for small, unrecorded extraction features to be present within/beneath the Site boundary.							

Present Non-Coal Mineral Extraction

Overall Impact: NEGLIGIBLE	
<p>Expert Interpretation of Mineral Extraction Activity:</p> <p>The Site is considered to be at a low risk from the impact of current non-coal mineral extraction.</p>	No Extraction Sites Within: 1000 metres
	Nearest Extraction Site: N/A
	Type of Extraction Activity: N/A
	Type of Mineral Resource: N/A
<p>Recommendation:</p> <p>None.</p>	

Planned Non-Coal Mineral Extraction

Overall Impact: MODERATE	
<p>Expert Interpretation of Mineral Extraction Activity:</p> <p>The Site is considered to be at a moderate risk from the impact of current non-coal mineral extraction. A dormant mineral planning permission associated with Emmanuel Bridge extends within the western Site boundary. It is considered, due to the underground nature of the licence, that future extraction could occur. This has the potential to impact both ground stability and the quiet enjoyment of the Site.</p>	Extraction Sites Within: Within Site boundary
	Nearest Extraction Site: N/A
	Type of Extraction Activity: Underground and Surface Mining
	Type of Mineral Resource: Ironstone, Limestone, Sand and Gravel
<p>Recommendation:</p> <p>For more information, contact the area's local council.</p>	



Hydrocarbons (Inc. Fracking)

Overall Impact: **MODERATE**

Recommendation:

The Site is within PEDL 180 (south) and 182 (north) operated by Europe Oil & Gas and Egdon Resources U.K. respectively. Records show a well associated with the PEDL 185 block, 165 metres north east of the site, was constructed in 1984 and used for oil extraction. This was operated by BP and was abandoned/released in 1989. Egdon Resources U.K. have now developed a new well up-dip, approximately 1000 metres from the Site. There is no evidence for the depth of the well(s).

License Block Name: PEDL 180 & 182

Type of License Block: Exploration

Hydrocarbon Well Within: 1000 metres

Hydrocarbon Resource: Oil Shale

Expert Interpretation of Hydrocarbon Extraction:

The property is situated within a block awarded for exploration, as defined by the OGA or DECC.

An assessment of Petroleum Exploration and Development Licence areas (PEDL's), has been made by reference to information provided by the Oil and Gas Authority (OGA) and the Department of Energy and Climate Change (DECC). A PEDL offers exclusive rights for the exploration and retrieval of hydrocarbons using conventional oil and gas extraction techniques, coal bed methane extraction, mine gas exploitation or shale gas fracking techniques within set Ordnance Survey (OS) referenced 'blocks'.



TERRASEARCH[®] COAL


Overall Coal Mining Assessment	NEGLIGIBLE RISK	
Within Coal Mining Reporting Area	No	
Within Brine Compensation District	No	
Coal Mining Features*		Assessment**
Past underground	No	NEGLIGIBLE RISK 
Present underground	No	NEGLIGIBLE RISK 
Planned underground	No	NEGLIGIBLE RISK 
Mine shafts and adit entries	No	NEGLIGIBLE RISK 
Geological conditions	No	NEGLIGIBLE RISK 
Past opencast	No	NEGLIGIBLE RISK 
Present opencast	No	NEGLIGIBLE RISK 
Planned opencast	No	NEGLIGIBLE RISK 
Coal subsidence claims	No	NEGLIGIBLE RISK 
Mine gas	No	NEGLIGIBLE RISK 
Hazards	No	NEGLIGIBLE RISK 
Withdrawal of Support	No	NEGLIGIBLE RISK 
Working Facilities Order	No	NEGLIGIBLE RISK 
Payments to Copyhold Land	No	NEGLIGIBLE RISK 
Brine Subsidence	No	NEGLIGIBLE RISK 


*Coal Mining Features are identified solely from The Coal Authority licensed data.


**Assessment is the risk of subsidence or impact to the Site based on Terrafirma's interpretation of Coal Authority licensed data and third party data.




Detailed Findings of Coal Mining Hazards:


Past underground	NEGLIGIBLE RISK 
<p>The Site is not within a surface area that could be affected by historical deep underground mining.</p> <p>The Site is not within a surface area that could be affected by historical recorded shallow underground mining.</p> <p>The Site is not within a surface area that could be affected by historical unrecorded shallow underground mining.</p>	


Present underground	NEGLIGIBLE RISK 
<p>The Site is not situated within an area which could be affected by currently active underground coal mining.</p>	

Planned underground	NEGLIGIBLE RISK 
<p>The Site is not situated within an area which could be affected by any future underground coal mining.</p> <p>The Site is not situated within 50 metres of a Section 46 Notice.</p>	





Mine shafts and adit entries	NEGLIGIBLE RISK 
<p>There are no recorded mine entries within 20 metres of the Site.</p>	


Geological conditions	NEGLIGIBLE RISK 
<p>There are no recorded faults, fissures or breaklines beneath or within the vicinity of the Site.</p>	

Past opencast	NEGLIGIBLE RISK 
<p>The Site is not situated within or proximal to any past licence areas for the opencast extraction of coal.</p> <p>There are no unlicensed opencast pits or extraction sites within 200 metres of the Site.</p>	









Present opencast	NEGLIGIBLE RISK 
<p>The Site is not situated within an area which could be affected by currently active opencast coal mining.</p>	

Planned opencast	NEGLIGIBLE RISK 
<p>There are no plans by the Coal Authority to grant a licence to extract coal using opencast methods within 800 metres surrounding the Site.</p>	

Coal subsidence claims	NEGLIGIBLE RISK 
<p>There is no record of any coal mining-related damage notices or subsidence claims for the Site or for any Site within 50 metres of the Site, since 1994.</p> <p>There is no record of a request that has been made to carry out preventive works before coal is worked under section 33 of the Coal Mining Subsidence Act 1991.</p>	



Mine gas	NEGLIGIBLE RISK 
<p>There are no records of any mine gas wells within 25 metres of the Site and there is no record of a mine gas emission requiring action.</p>	
Hazards	NEGLIGIBLE RISK 
<p>The Site is not situated within 25 metres of a coal mining-related hazard. There have been no remedial works undertaken by or on behalf of the Coal Authority, under its Emergency Surface Hazard Call Out procedures.</p>	
Withdrawal of Support	NEGLIGIBLE RISK 
<p>The property is not within an area where notices to withdraw support were given in 1946.</p> <p>The property is not in an area where a notice has been given under section 41 of the Coal Industry Act 1994, cancelling the entitlement to withdraw support.</p>	
Working Facilities Order	NEGLIGIBLE RISK 
<p>The property is not in an area for which the Sherwood Area Order dated 1938 has been made under the provisions of the Mines (Working Facilities and Support) Acts 1923 and 1966 or any statutory modification or amendment thereof.</p>	
Payments to former owners of Copyhold Land	NEGLIGIBLE RISK 
<p>The property is not in an area where a relevant notice has been published under the Coal Industry Act 1975/Coal Industry Act 1994.</p>	
Brine subsidence	NEGLIGIBLE RISK 
<p>Site is not situated within 25 metres of a coal mining-related hazard. There have been no remedial works undertaken by or on behalf of the Coal Authority, under its Emergency Surface Hazard Call Out procedures.</p>	



Notice of Statutory Cover

In the unlikely event of any future damage, the terms of the Coal Mining Subsidence Act 1991 (as amended by the Coal Industry Act 1994) apply, and the Coal Authority / Licensee has a duty to take remedial action in respect of subsidence caused by the withdrawal of support from land and/or property in connection with lawful coal-mining operations. Typically, these actions will not need to involve either your insurance company or mortgage lender and therefore the end user(s) should not incur any costs or liability.

In addition to the above, it should also be noted that the Coal Authority offer a Public Safety and Subsidence Department that provides a 24 hour 7 day a week call out service (Tel: 01623 646 333) to take remedial action in respect of hazards associated with the movement or collapse of any coal mineshaft or entrances to coal mines and from other coal mining related surface hazards. Further information can be found on their website: www.groundstability.com.



Report Limitations

This TerraSearch® Report has been carried out with reference to TerraFirma's bespoke GIS, an extensive collection of abandoned mine plans, maps, records and archives in our possession. **The report does not consider natural ground stability hazards, such as subsidence, landslip or coastal erosion.**

From this material, we have endeavoured to provide as accurate a report as possible. It should be realised that totally unrecorded or unindicated workings can exist between known workings and therefore TerraFirma cannot be held responsible for any settlement or subsidence problems as a result of a Site being affected by unrecorded mining features or natural ground cavities. The assessment of the 'risk' of ground instability arising from existing or planned mineral exploration or extraction is based on extant mineral planning or safeguarding areas as defined by the relevant Mineral Planning Authority (MPA) policies at the time of writing. TerraFirma cannot be held liable for any updates or changes in existing mineral operations or policies.

It is a 'remote' investigation and reviews only information provided by the client and from the databases of publicly available information that have been chosen to enable a desk based environmental assessment of the Site. The Certificate does not include a Site Investigation, nor does TerraFirma make specific information requests of the regulatory authorities for any relevant information they may hold.

This report is concerned solely with the Site searched and should not be used in connection with adjacent properties as only relevant known mining features have been mentioned and any known features that could potentially have a direct influence upon the target Site. Other features which may be present in the general area may have been omitted for clarity.

The report is based upon the Site boundaries as shown on the supplied location plan. This report is confidential to the client, the client's legal advisor and the client's Mortgage lender, as defined in the TerraSearch® terms & conditions, and as such may be used by them for conveyancing or related purposes. We have no liability toward any person or organisation not party to commissioning this report. This report or any part of it is not permitted to be reproduced, copied, altered or in any other way distributed by any other person or organisation.

Terms and Conditions

This report is provided under the TerraFirma Terms and Conditions (v2.1) for TerraSearch Reports (v1.0), a copy of which is available on our website (www.minesearches.co.uk/about/terms). They provide a limit of liability per report of £10 million, backed by Professional Indemnity Insurance; details available on request.



Report Licensing

This report contains Data provided by the Coal Authority. Any and all analysis and interpretation of Coal Authority Data in this report is made by Terrafirma Mine Searches Ltd and is in no way supported, endorsed or authorised by the Coal Authority. The use of the data is restricted to the terms and provisions contained in this report. Data reproduced in this report may be the copyright of the Coal Authority and permission should be sought from Terrafirma Mine Searches Ltd prior to any re-use.

© Crown Copyright (2016) Ordnance Survey License Number 0100020315. May contain British Geological Society materials © NERC (2016).

This report may contain public sector information licensed under the Open Government Licence v3.0.

This report may contain plans and records held by the Coal Authority and made publicly available at the time of inspection which may include British Geological Survey and Ordnance Survey data.

Where mining reports and ground stability reports sourced from the Coal Authority are incorporated into this report, the integrity of the text is preserved and has not been disassembled, modified or paraphrased in any way and no deletions, omissions or reorganisation have been made to the text. The relevant text is identified as originating with the Coal Authority who are acknowledged as the author.

Important Consumer Information

This search has been produced by **TERRAFIRMA MINE SEARCHES LTD** – Address: 2440 The Quadrant, Aztec West Business Park, Almondsbury, Bristol, BS32 4AQ; Email: info@terrafirmasearch.co.uk; Telephone: 01934806515) which is registered with the Site Codes Compliance Board (PCCB) as a subscriber to the Search Code. The PCCB independently monitors how registered search firms maintain compliance with the Code.

This report meets the principles and requirements of the Property Codes Compliance Board Compliance Note CN02J in respect of Coal Mining Searches.



The Search Code

- provides protection for homebuyers, sellers, estate agents, conveyancers and mortgage lenders who rely on the information included in Site search reports undertaken by subscribers on residential and commercial Site within the United Kingdom
- sets out minimum standards which firms compiling and selling search reports have to meet
- promotes the best practice and quality standards within the industry for the benefit of consumers and Site professionals
- enables consumers and Site professionals to have confidence in firms which subscribe to the code, their products and services.

By giving you this information, the search firm is confirming that they keep to the principles of the Code. This provides important protection for you.

The Code's core principles (Firms which subscribe to the Search Code will):

- display the Search Code logo prominently on their search reports
- act with integrity and carry out work with due skill, care and diligence
- at all times maintain adequate and appropriate insurance to protect consumers
- conduct business in an honest, fair and professional manner
- handle complaints speedily and fairly
- ensure that products and services comply with industry registration rules and standards and relevant laws
- monitor their compliance with the Code

CONTACT TERRAFIRMA IF YOU WOULD LIKE A COPY OF THE SEARCH CODE

Complaints

If you have a query or complaint about your search, you should raise it directly with the search firm, and if appropriate ask for any complaint to be considered under their formal internal complaints procedure. If you remain dissatisfied with the firm's final response, after your complaint has been formally considered, or if the firm has exceeded the response timescales, you may refer your complaint for consideration under The Site Ombudsman scheme (TPOs). The Ombudsman can award compensation of up to £5,000 to you if he finds that you have suffered actual loss as a result of your search provider failing to keep to the Code.

Please note that all queries or complaints regarding your search should be directed to your search provider in the first instance, not to TPOs or to the PCCB.



TPOs Contact Details:

The Site Ombudsman scheme, Milford House, 43-55 Milford Street, Salisbury, Wiltshire SP1 2BP, Tel: 01722 333306, Fax: 01722 332296, Email: admin@tpos.co.uk

You can get more information about the PCCB from www.Sitecodes.org.uk or from our website at www.minesearches.co.uk.

Complaints Procedure

If you want to make a complaint directly to Terrafirma, we will:

- Acknowledge it within 5 working days of receipt.
- Normally deal with it fully and provide a final response, in writing, within 20 working days of receipt.
- Keep you informed by letter, telephone or e-mail, as you prefer, if we need more time.
- Provide a final response, in writing, at the latest within 40 working days of receipt.
- Liaise, at your request, with anyone acting formally on your behalf.

Complaints should be sent to: Tom Backhouse, Managing Director & Senior Executive, Terrafirma Mine Searches Ltd - Address: 2440 The Quadrant, Aztec West Business Park, Almondsbury, Bristol, BS32 4AQ; Email: info@terrafirmaminesearches.co.uk; Telephone: 0330 900 7500.

If you are not satisfied with our final response, or if we exceed the response timescales, you may refer the complaint to The Property Ombudsman scheme (TPOs): Tel: 01722 333306, E-mail: admin@tpos.co.uk. We will co-operate fully with the Ombudsman during an investigation and comply with his final decision.

WE TRUST THIS REPORT PROVIDES THE INFORMATION YOU REQUIRE. PLEASE CONTACT US IF YOU HAVE ANY QUERIES OR IF WE CAN BE OF ANY FURTHER ASSISTANCE.



Appendix E
Groundsure Data Report



CENTREMAPS

Open Space, Upper Interfields,
Worcester, WR14 1UT

Groundsure Reference: CMAPS-CM-643992-13238-310717EDR

Your Reference: 13238

Report Date 31 Jul 2017

Report Delivery Method: Email - pdf

Enviro Insight

Address: Santon, Scunthorpe, DN16 1XP

Dear Sir/ Madam,

Thank you for placing your order with Groundsure. Please find enclosed the **Groundsure Enviro Insight** as requested.


If you need any further assistance, please do not hesitate to contact our helpline on 01886 832972 quoting the above CENTREMAPS reference number.

Yours faithfully,

CENTREMAPS

Enc.
Groundsure Enviroinsight

Address: Santon, Scunthorpe, DN16 1XP
Date: 31 Jul 2017
Reference: CMAPS-CM-643992-13238-310717EDR
Client: CENTREMAPS

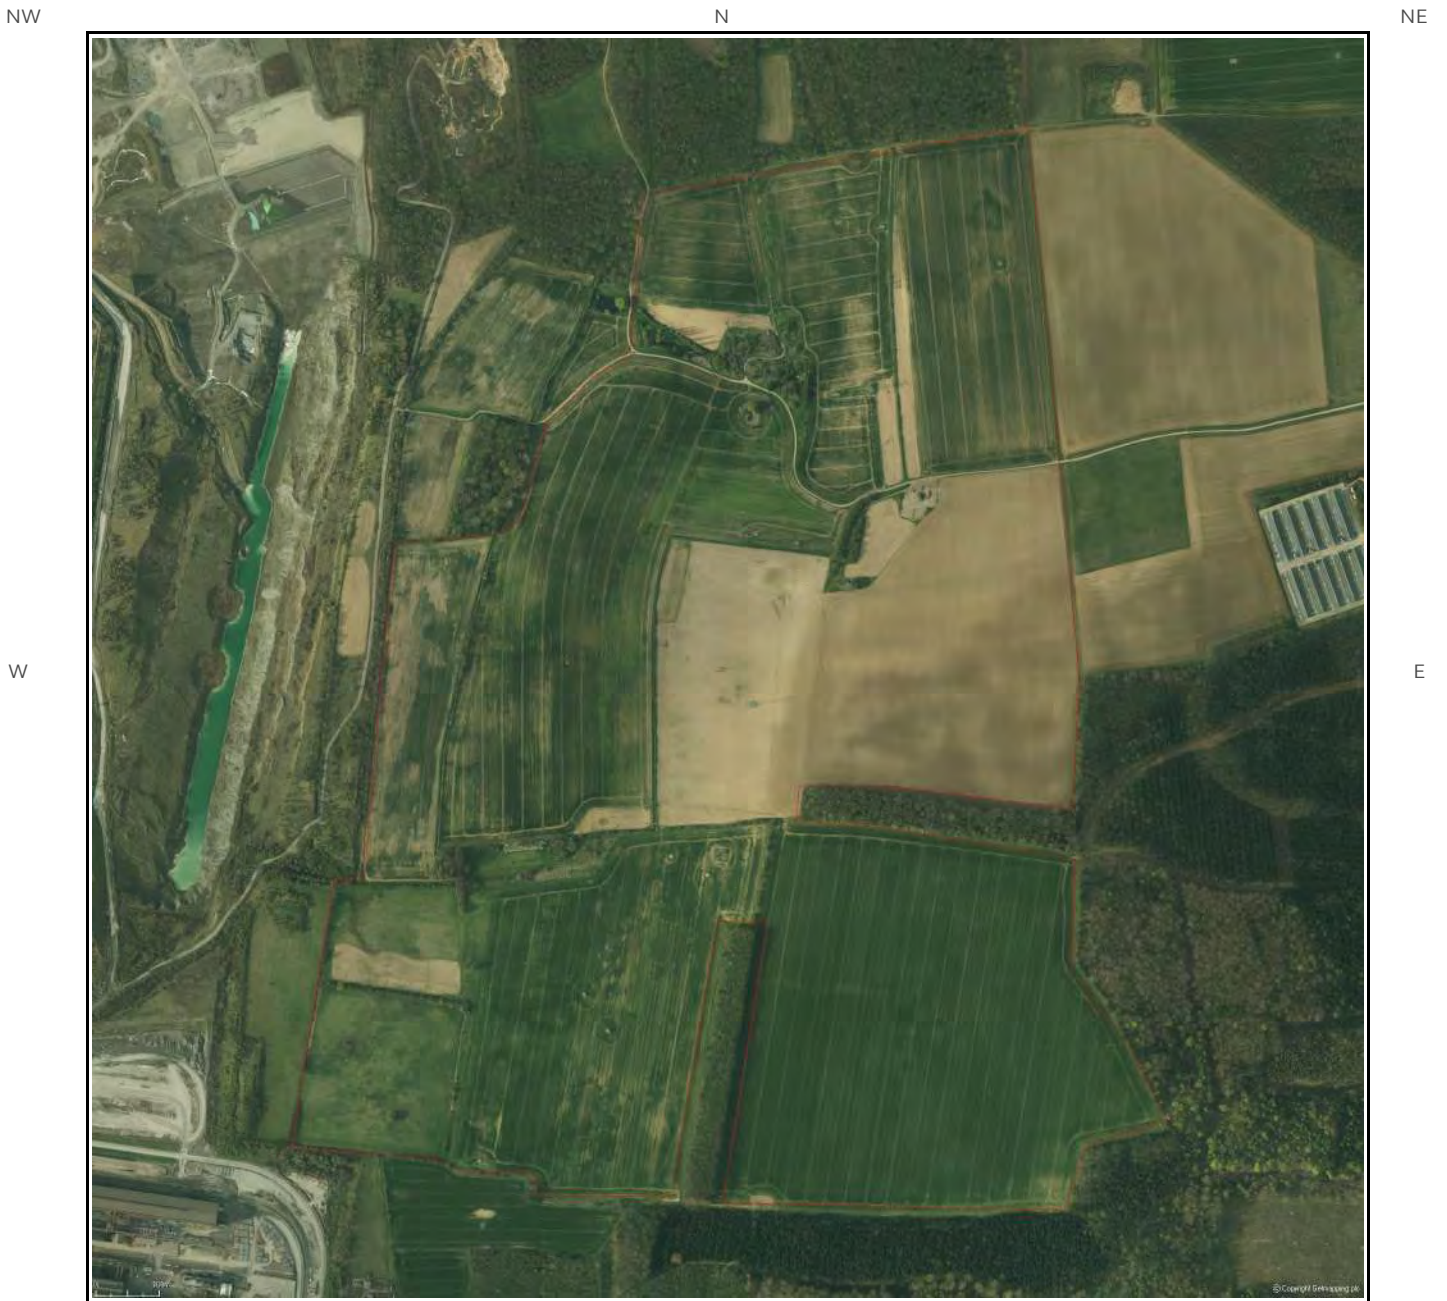

Aerial Photograph Capture date: 16-Aug-2015
Grid Reference: 494018,409842
Site Size: 156.74ha

Report Reference: CMAPS-CM-643992-13238-310717EDR
Client Reference: 13238

Contents Page

Contents Page	3
Overview of Findings	6
Using this report	10
1. Historical Land Use	11
1. Historical Industrial Sites	12
1.1 Potentially Contaminative Uses identified from 1:10,000 scale Mapping	12
1.2 Additional Information – Historical Tank Database	13
1.3 Additional Information – Historical Energy Features Database	14
1.4 Additional Information – Historical Petrol and Fuel Site Database	14
1.5 Additional Information – Historical Garage and Motor Vehicle Repair Database	14
1.6 Potentially Infilled Land	15
2. Environmental Permits, Incidents and Registers Map	17
2. Environmental Permits, Incidents and Registers	18
2.1 Industrial Sites Holding Licences and/or Authorisations	18
2.1.1 Records of historic IPC Authorisations within 500m of the study site	18
2.1.2 Records of Part A(1) and IPPC Authorised Activities within 500m of the study site	18
2.1.3 Records of Red List Discharge Consents (potentially harmful discharges to controlled waters) within 500m of the study site	20
2.1.4 Records of List 1 Dangerous Substances Inventory Sites within 500m of the study site	20
2.1.5 Records of List 2 Dangerous Substance Inventory Sites within 500m of the study site	20
2.1.6 Records of Part A(2) and Part B Activities and Enforcements within 500m of the study site	20
2.1.7 Records of Category 3 or 4 Radioactive Substances Authorisations	20
2.1.8 Records of Licensed Discharge Consents within 500m of the study site	20
2.1.9 Records of Water Industry Referrals (potentially harmful discharges to the public sewer) within 500m of the study site	21
2.1.10 Records of Planning Hazardous Substance Consents and Enforcements within 500m of the study site	21
2.2 Dangerous or Hazardous Sites	21
2.3 Environment Agency/Natural Resources Wales Recorded Pollution Incidents	21
2.3.1 Records of National Incidents Recording System, List 2 within 500m of the study site	21
2.3.2 Records of National Incidents Recording System, List 1 within 500m of the study site	22
2.4 Sites Determined as Contaminated Land under Part 2A EPA 1990	22
3. Landfill and Other Waste Sites Map	23
3. Landfill and Other Waste Sites	24
3.1 Landfill Sites	24
3.1.1 Records from Environment Agency/Natural Resources Wales landfill data within 1000m of the study site	24
3.1.2 Records of Environment Agency/Natural Resources Wales historic landfill sites within 1500m of the study site	24
3.1.3 Records of BGS/DoE non-operational landfill sites within 1500m of the study site	25
3.1.4 Records of Landfills from Local Authority and Historical Mapping Records within 1500m of the study site	25
3.2 Other Waste Sites	25
3.2.1 Records of waste treatment, transfer or disposal sites within 500m of the study site	25
3.2.2 Records of Environment Agency/Natural Resources Wales licensed waste sites within 1500m of the study site	26
4. Current Land Use Map	27
4. Current Land Uses	28
4.1 Current Industrial Data	28
4.2 Petrol and Fuel Sites	29
4.3 National Grid High Voltage Underground Electricity Transmission Cables	29
4.4 National Grid High Pressure Gas Transmission Pipelines	29

5. Geology	30
5.1 Artificial Ground and Made Ground.....	30
5.2 Superficial Ground and Drift Geology	30
5.3 Bedrock and Solid Geology	30
6 Hydrogeology and Hydrology	32
6a. Aquifer Within Superficial Geology	32
6b. Aquifer Within Bedrock Geology and Abstraction Licences	33
6c. Hydrogeology – Source Protection Zones and Potable Water Abstraction Licences	34
6d. Hydrogeology – Source Protection Zones within confined aquifer	35
6e. Hydrology – Detailed River Network and River Quality	36
6.Hydrogeology and Hydrology	37
6.1 Aquifer within Superficial Deposits.....	37
6.2 Aquifer within Bedrock Deposits.....	38
6.3 Groundwater Abstraction Licences.....	39
6.4 Surface Water Abstraction Licences.....	39
6.5 Potable Water Abstraction Licences.....	39
6.6 Source Protection Zones.....	39
6.7 Source Protection Zones within Confined Aquifer.....	40
6.8 Groundwater Vulnerability and Soil Leaching Potential.....	40
6.9 River Quality.....	41
6.9.1 Biological Quality:.....	41
6.9.2 Chemical Quality:.....	41
6.10 Detailed River Network.....	41
6.11 Surface Water Features.....	43
7a. Environment Agency/Natural Resources Wales Flood Map for Planning (from rivers and the sea)	44
7b. Environment Agency/Natural Resources Wales Risk of Flooding from Rivers and the Sea (RoFRaS) Map	45
7 Flooding	46
7.1 River and Coastal Zone 2 Flooding.....	46
7.2 River and Coastal Zone 3 Flooding.....	46
7.3 Risk of Flooding from Rivers and the Sea (RoFRaS) Flood Rating.....	46
7.4 Flood Defences.....	46
7.5 Areas benefiting from Flood Defences.....	46
7.6 Areas benefiting from Flood Storage.....	47
7.7 Groundwater Flooding Susceptibility Areas.....	47
7.7.1 Are there any British Geological Survey groundwater flooding susceptibility areas within 50m of the boundary of the study site? Yes.....	47
7.7.2 What is the highest susceptibility to groundwater flooding in the search area based on the underlying geological conditions?.....	47
7.8 Groundwater Flooding Confidence Areas.....	47
8. Designated Environmentally Sensitive Sites Map	48
8. Designated Environmentally Sensitive Sites	49
8.1 Records of Sites of Special Scientific Interest (SSSI) within 2000m of the study site:.....	49
8.2 Records of National Nature Reserves (NNR) within 2000m of the study site:.....	49
8.3 Records of Special Areas of Conservation (SAC) within 2000m of the study site:.....	49
8.4 Records of Special Protection Areas (SPA) within 2000m of the study site:.....	49
8.5 Records of Ramsar sites within 2000m of the study site:.....	50
8.6 Records of Ancient Woodland within 2000m of the study site:	50
8.7 Records of Local Nature Reserves (LNR) within 2000m of the study site:.....	50
8.8 Records of World Heritage Sites within 2000m of the study site:.....	50
8.9 Records of Environmentally Sensitive Areas within 2000m of the study site:	50



- 8.10 Records of Areas of Outstanding Natural Beauty (AONB) within 2000m of the study site:51
- 8.11 Records of National Parks (NP) within 2000m of the study site: 51
- 8.12 Records of Nitrate Sensitive Areas within 2000m of the study site:..... 51
- 8.13 Records of Nitrate Vulnerable Zones within 2000m of the study site:..... 51
- 8.14 Records of Green Belt land within 2000m of the study site:..... 51
- 9. Natural Hazards Findings 52
 - 9.1 Detailed BGS GeoSure Data..... 52
 - 9.1.1 Shrink Swell.....52
 - 9.1.2 Landslides.....52
 - 9.1.3 Soluble Rocks.....52
 - 9.1.4 Compressible Ground.....53
 - 9.1.5 Collapsible Rocks.....53
 - 9.1.6 Running Sand.....53
 - 9.2 Radon..... 53
 - 9.2.1 Radon Affected Areas.....53
 - 9.2.2 Radon Protection.....54
- 10. Mining 55
 - 10.1 Coal Mining..... 55
 - 10.2 Non-Coal Mining..... 55
 - 10.3 Brine Affected Areas 55
- Contact Details 56
- Standard Terms and Conditions 58

Overview of Findings

For further details on each dataset, please refer to each individual section in the main report as listed. Where the database has been searched a numerical result will be recorded. Where the database has not been searched '-' will be recorded.

Section 1: Historical Industrial Sites	On-site	0-50	51-250	251-500
1.1 Potentially Contaminative Uses identified from 1:10,000 scale mapping	19	0	18	12
1.2 Additional Information – Historical Tank Database	0	0	4	19
1.3 Additional Information – Historical Energy Features Database	0	0	3	2
1.4 Additional Information – Historical Petrol and Fuel Site Database	0	0	0	0
1.5 Additional Information – Historical Garage and Motor Vehicle Repair Database	0	0	0	0
1.6 Potentially Infilled Land	17	0	25	24
Section 2: Environmental Permits, Incidents and Registers	On-site	0-50m	51-250	251-500
2.1 Industrial Sites Holding Environmental Permits and/or Authorisations				
2.1.1 Records of historic IPC Authorisations	0	0	0	0
2.1.2 Records of Part A(1) and IPPC Authorised Activities	0	0	0	9
2.1.3 Records of Red List Discharge Consents	0	0	0	0
2.1.4 Records of List 1 Dangerous Substances Inventory sites	0	0	0	0
2.1.5 Records of List 2 Dangerous Substances Inventory sites	0	0	0	0
2.1.6 Records of Part A(2) and Part B Activities and Enforcements	0	0	0	0
2.1.7 Records of Category 3 or 4 Radioactive Substances Authorisations	0	0	0	0
2.1.8 Records of Licensed Discharge Consents	0	0	1	0
2.1.9 Records of Water Industry Referrals	0	0	0	0
2.1.10 Records of Planning Hazardous Substance Consents and Enforcements within 500m of the study site	0	0	0	0
2.2 Records of COMAH and NIHHS sites	1	0	0	0
2.3 Environment Agency/Natural Resources Wales Recorded Pollution Incidents				
2.3.1 National Incidents Recording System, List 2	0	0	0	1
2.3.2 National Incidents Recording System, List 1	0	0	0	0
2.4 Sites Determined as Contaminated Land under Part 2A EPA 1990	0	0	0	0

Section 3: Landfill and Other Waste Sites	On-site	0-50m	51-250	251-500	501-1000	1000-1500
3.1 Landfill Sites						
3.1.1 Environment Agency/Natural Resources Wales Registered Landfill Sites	0	0	1	0	0	Not searched
3.1.2 Environment Agency/Natural Resources Wales Historic Landfill Sites	0	0	1	0	0	2
3.1.3 BGS/DoE Landfill Site Survey	0	0	0	0	0	0
3.1.4 Records of Landfills in Local Authority and Historical Mapping Records	0	0	0	0	0	0
3.2 Landfill and Other Waste Sites Findings						
3.2.1 Operational and Non-Operational Waste Treatment, Transfer and Disposal Sites	0	0	0	0	Not searched	Not searched
3.2.2 Environment Agency/Natural Resources Wales Licensed Waste Sites	0	0	0	0	0	3

Section 4: Current Land Use	On-site	0-50m	51-250	251-500
4.1 Current Industrial Sites Data	15	0	8	Not searched
4.2 Records of Petrol and Fuel Sites	0	0	0	0
4.3 National Grid Underground Electricity Cables	0	0	0	0
4.4 National Grid Gas Transmission Pipelines	0	0	0	0

Section 5: Geology	
5.1 Are there any records of Artificial Ground and Made Ground present beneath the study site?	Yes
5.2 Are there any records of Superficial Ground and Drift Geology present beneath the study site?	Yes
5.3 For records of Bedrock and Solid Geology beneath the study site see the detailed findings section.	

Section 6: Hydrogeology and Hydrology	0-500m					
6.1 Are there any records of Strata Classification in the Superficial Geology within 500m of the study site?	Yes					
6.2 Are there any records of Strata Classification in the Bedrock Geology within 500m of the study site?	Yes					
	On-site	0-50m	51-250	251-500	501-1000	1000-2000
6.3 Groundwater Abstraction Licences (within 2000m of the study site)	0	0	0	0	0	1
6.4 Surface Water Abstraction Licences (within 2000m of the study site)	0	0	0	0	0	0
6.5 Potable Water Abstraction Licences (within 2000m of the study site)	0	0	0	0	0	0
6.6 Source Protection Zones (within 500m of the study site)	0	0	0	0	Not searched	Not searched
6.7 Source Protection Zones within Confined Aquifer	0	0	0	0	Not searched	Not searched
6.8 Groundwater Vulnerability and Soil Leaching Potential (within 500m of the study site)	6	0	0	0	Not searched	Not searched

Section 6: Hydrogeology and Hydrology

0-500m

	On-site	0-50m	51-250	251-500	501-1000	1000-1500
6.9 Is there any Environment Agency/Natural Resources Wales information on river quality within 1500m of the study site?	No	No	No	No	No	Yes
6.10 Detailed River Network entries within 500m of the site	11	1	6	3	Not searched	Not searched
6.11 Surface water features within 250m of the study site	Yes	Yes	Yes	Not searched	Not searched	Not searched

Section 7: Flooding

7.1 Are there any Environment Agency Zone 2 floodplains within 250m of the study site?	No					
7.2 Are there any Environment Agency/Natural Resources Wales Zone 3 floodplains within 250m of the study site	No					
7.3 What is the Risk of flooding from Rivers and the Sea (RoFRaS) rating for the study site?	Very Low					
7.4 Are there any Flood Defences within 250m of the study site?	No					
7.5 Are there any areas benefiting from Flood Defences within 250m of the study site?	No					
7.6 Are there any areas used for Flood Storage within 250m of the study site?	No					
7.7 What is the maximum BGS Groundwater Flooding susceptibility within 50m of the study site?	Potential at Surface					
7.8 What is the BGS confidence rating for the Groundwater Flooding susceptibility areas?	High					

Section 8: Designated Environmentally Sensitive Sites

	On-site	0-50m	51-250	251-500	501-1000	1000-2000
8.1 Records of Sites of Special Scientific Interest (SSSI)	0	0	0	0	0	4
8.2 Records of National Nature Reserves (NNR)	0	0	0	0	0	0
8.3 Records of Special Areas of Conservation (SAC)	0	0	0	0	0	0
8.4 Records of Special Protection Areas (SPA)	0	0	0	0	0	0
8.5 Records of Ramsar sites	0	0	0	0	0	0
8.6 Records of Ancient Woodlands	0	1	0	0	4	1
8.7 Records of Local Nature Reserves (LNR)	0	0	0	0	0	0
8.8 Records of World Heritage Sites	0	0	0	0	0	0
8.9 Records of Environmentally Sensitive Areas	0	0	0	0	0	0

Section 8: Designated Environmentally Sensitive Sites	On-site	0-50m	51-250	251-500	501-1000	1000-2000
8.10 Records of Areas of Outstanding Natural Beauty (AONB)	0	0	0	0	0	0
8.11 Records of National Parks	0	0	0	0	0	0
8.12 Records of Nitrate Sensitive Areas	0	0	0	0	0	0
8.13 Records of Nitrate Vulnerable Zones	6	0	0	0	0	0
8.14 Records of Green Belt land	0	0	0	0	0	0

Section 9: Natural Hazards

9.1 What is the maximum risk of natural ground subsidence?	Moderate
9.1.1 What is the maximum Shrink-Swell hazard rating identified on the study site?	Low
9.1.2 What is the maximum Landslides hazard rating identified on the study site?	Moderate
9.1.3 What is the maximum Soluble Rocks hazard rating identified on the study site?	Very Low
9.1.4 What is the maximum Compressible Ground hazard rating identified on the study site?	Moderate
9.1.5 What is the maximum Collapsible Rocks hazard rating identified on the study site?	Very Low
9.1.6 What is the maximum Running Sand hazard rating identified on the study site?	Low
9.2 Radon	
9.2.1 Is the property in a Radon Affected Area as defined by the Health Protection Agency (HPA) and if so what percentage of homes are above the Action Level?	The property is in a Radon Affected Area, as between 10 and 30% of properties are above the Action Level.
9.2.2 Is the property in an area where Radon Protection are required for new properties or extensions to existing ones as described in publication BR211 by the Building Research Establishment?	Full radon protective measures are necessary.

Section 10: Mining

10.1 Are there any coal mining areas within 75m of the study site?	No
10.2 Are there any Non-Coal Mining areas within 50m of the study site boundary?	Yes
10.3 Are there any brine affected areas within 75m of the study site?	No

Using this report

The following report is designed by Environmental Consultants for Environmental Professionals bringing together the most up-to-date market leading environmental data. This report is provided under and subject to the Terms & Conditions agreed between Groundsure and the Client. The document contains the following sections:

1. Historical Industrial Sites

Provides information on past land uses that may pose a risk to the study site in terms of potential contamination from activities or processes. Potentially Infilled Land features are also included. This search is conducted using radii of up to 500m.

2. Environmental Permits, Incidents and Registers

Provides information on Regulated Industrial Activities and Pollution Incidents as recorded by Regulatory Authorities, and sites determined as Contaminated Land. This search is conducted using radii up to 500m.

3. Landfills and Other Waste Sites

Provides information on landfills and other waste sites that may pose a risk to the study site. This search is conducted using radii up to 1500m.

4. Current Land Uses

Provides information on current land uses that may pose a risk to the study site in terms of potential contamination from activities or processes. These searches are conducted using radii of up to 500m. This includes information on potentially contaminative industrial sites, petrol stations and fuel sites as well as high pressure gas pipelines and underground electricity transmission lines.

5. Geology

Provides information on artificial and superficial deposits and bedrock beneath the study site.

6. Hydrogeology and Hydrology

Provides information on productive strata within the bedrock and superficial geological layers, abstraction licenses, Source Protection Zones (SPZs) and river quality. These searches are conducted using radii of up to 2000m.

7. Flooding

Provides information on river and coastal flooding, flood defences, flood storage areas and groundwater flood areas. This search is conducted using radii of up to 250m.

8. Designated Environmentally Sensitive Sites

Provides information on the Sites of Special Scientific Interest (SSSI), National Nature Reserves (NNR), Special Areas of Conservation (SAC), Special Protection Areas (SPA), Ramsar sites, Local Nature Reserves (LNR), Areas of Outstanding Natural Beauty (AONB), National Parks (NP), Environmentally Sensitive Areas, Nitrate Sensitive Areas, Nitrate Vulnerable Zones and World Heritage Sites and Scheduled Ancient Woodland. These searches are conducted using radii of up to 2000m.

9. Natural Hazards

Provides information on a range of natural hazards that may pose a risk to the study site. These factors include natural ground subsidence and radon..

10. Mining

Provides information on areas of coal and non-coal mining and brine affected areas.

11. Contacts

This section of the report provides contact points for statutory bodies and data providers that may be able to provide further information on issues raised within this report. Alternatively, Groundsure provide a free Technical Helpline (08444 159000) for further information and guidance.


Note: Maps

Only certain features are placed on the maps within the report. All features represented on maps found within this search are given an identification number. This number identifies the feature on the mapping and correlates it to the additional information provided below. This identification number precedes all other information and takes the following format -Id: 1, Id: 2, etc. Where numerous features on the same map are in such close proximity that the numbers would obscure each other a letter identifier is used instead to represent the features. (e.g. Three features which overlap may be given the identifier "A" on the map and would be identified separately as features 1A, 3A, 10A on the data tables provided).

Where a feature is reported in the data tables to a distance greater than the map area, it is noted in the data table as "Not Shown".

All distances given in this report are in Metres (m). Directions are given as compass headings such as N: North, E: East, NE: North East from the nearest point of the study site boundary.

1. Historical Land Use

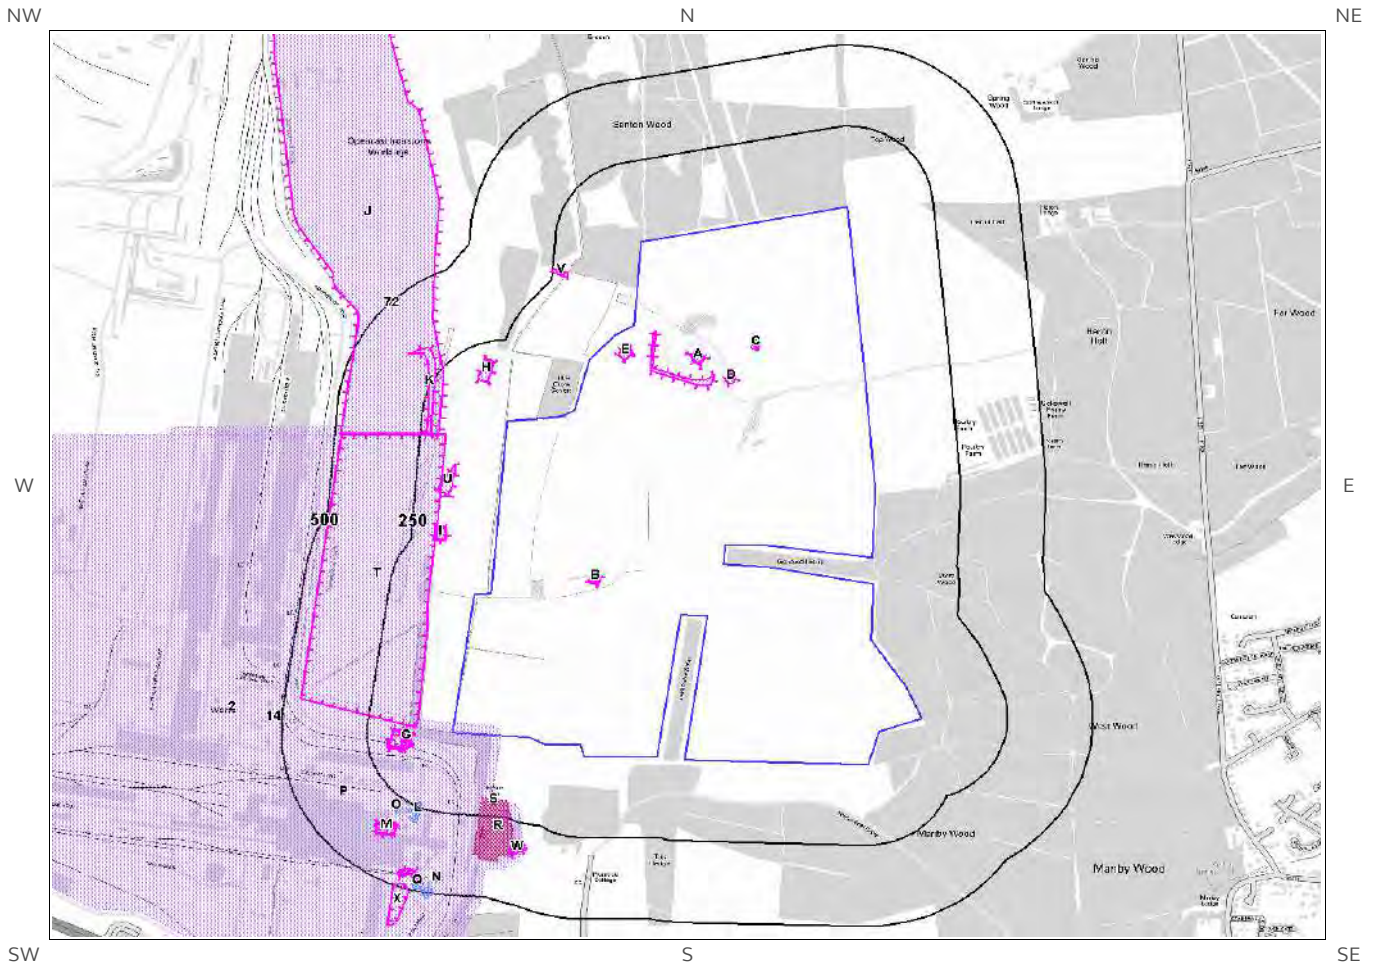

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



1. Historical Industrial Sites

1.1 Potentially Contaminative Uses identified from 1:10,000 scale Mapping

The systematic analysis of data extracted from standard 1:10,560 and 1:10,000 scale historical maps provides the following information:

Records of sites with a potentially contaminative past land use within 500m of the search boundary: 49

ID	Distance [m]	Direction	Use	Date
1B	0	On Site	Unspecified Pit	1948
2	0	On Site	Railway Sidings	1979
3C	0	On Site	Unspecified Ground Workings	1977
4A	0	On Site	Unspecified Pit	1977
5D	0	On Site	Unspecified Pit	1977
6A	0	On Site	Unspecified Pit	1886
7E	0	On Site	Unspecified Pit	1886
8B	0	On Site	Unspecified Pit	1906
9B	0	On Site	Unspecified Pit	1955
10C	0	On Site	Unspecified Ground Workings	1994
11D	0	On Site	Unspecified Pit	1994
12A	0	On Site	Unspecified Pit	1994
13F	0	On Site	Unspecified Ground Workings	1977
14	0	On Site	Unspecified Works	1979
15B	0	On Site	Unspecified Pit	1906
16B	0	On Site	Unspecified Pit	1886
17E	0	On Site	Unspecified Pit	1886
18F	0	On Site	Unspecified Ground Workings	1994
19B	0	On Site	Unspecified Pit	1906
20T	105	W	Opencast Ironstone Workings	1979
21G	123	W	Unspecified Pit	1885
22G	123	W	Unspecified Pit	1885
23G	123	W	Unspecified Ground Workings	1905
24G	123	W	Unspecified Ground Workings	1905
25G	123	W	Unspecified Ground Workings	1886
26G	126	W	Unspecified Pit	1968
27H	134	NW	Unspecified Pit	1886
28H	135	NW	Unspecified Pit	1886
29U	139	W	Unspecified Pit	1886

30I	147	W	Unspecified Pit	1886
31I	147	W	Unspecified Pit	1886
32J	195	W	Opencast Ironstone Workings	1977
33J	195	W	Opencast Ironstone Workings	1994
34K	217	W	Unspecified Ground Workings	1977
35K	217	W	Unspecified Ground Workings	1994
36R	228	S	Electric Substation	1979
37L	232	SW	Unspecified Tanks	1979
38L	266	SW	Unspecified Tanks	1979
39M	326	SW	Sand Pit	1885
40M	328	SW	Unspecified Pit	1905
41M	328	SW	Unspecified Pit	1905
42M	328	SW	Unspecified Pit	1886
43M	330	SW	Unspecified Pit	1955
44M	330	SW	Unspecified Heap	1968
45M	332	SW	Unspecified Pit	1948
46M	332	SW	Unspecified Pit	1938
47N	456	S	Unspecified Tanks	1979
48N	458	S	Unspecified Tanks	1979
49X	489	S	Unspecified Pit	1979

1.2 Additional Information – Historical Tank Database

The systematic analysis of data extracted from High Detailed 1:1,250 and 1:2,500 scale historical maps provides the following information.

Records of historical tanks within 500m of the search boundary:

23

ID	Distance (m)	Direction	Use	Date
50L	235	SW	Unspecified Tank	1975
51L	236	SW	Unspecified Tank	1997
52L	237	SW	Unspecified Tank	1975
53L	239	SW	Unspecified Tank	1997
54L	266	SW	Tanks	1975
55L	266	SW	Unspecified Tank	1997
56O	274	SW	Tanks	1975
57O	275	SW	Tanks	1997
58L	286	SW	Unspecified Tank	1975
59L	287	SW	Unspecified Tank	1997
60L	292	S	Unspecified Tank	1975
61L	293	S	Unspecified Tank	1997

62P	370	SW	Unspecified Tank	1975
63P	372	SW	Unspecified Tank	1997
64N	454	S	Unspecified Tank	1997
65N	454	S	Unspecified Tank	1975
66N	458	S	Unspecified Tank	1997
67N	458	S	Unspecified Tank	1975
68Q	461	S	Unspecified Tank	1997
69Q	461	S	Unspecified Tank	1975
70N	483	S	Unspecified Tank	1975
71N	483	S	Unspecified Tank	1997
72	485	NW	Unspecified Tank	1964

1.3 Additional Information – Historical Energy Features Database

The systematic analysis of data extracted from High Detailed 1:1,250 and 1:2,500 scale historical maps provides the following information.

Records of historical energy features within 500m of the search boundary: 5

ID	Distance (m)	Direction	Use	Date
73R	194	S	Electricity Transformer Station	1997
74S	203	S	Electricity Substation	1975
75S	204	S	Electricity Substation	1997
76R	282	S	Electricity Substation	1975
77R	283	S	Electricity Substation	1997

1.4 Additional Information – Historical Petrol and Fuel Site Database

The systematic analysis of data extracted from High Detailed 1:1,250 and 1:2,500 scale historical maps provides the following information.

Records of historical petrol stations and fuel sites within 500m of the search boundary: 0

Database searched and no data found.

1.5 Additional Information – Historical Garage and Motor Vehicle Repair Database

The systematic analysis of data extracted from High Detailed 1:1,250 and 1:2,500 scale historical maps provides the following information.

Records of historical garage and motor vehicle repair sites within 500m of the search boundary: 0

Database searched and no data found.

1.6 Potentially Infilled Land

Records of Potentially Infilled Features from 1:10,000 scale mapping within 500m of the study site: 66

The following Historical Potentially Infilled Features derived from the Historical Mapping information is provided by Groundsure:












ID	Distance(m)	Direction	Use	Date
78B	0	On Site	Unspecified Pit	1955
79B	0	On Site	Unspecified Pit	1886
80F	0	On Site	Unspecified Ground Workings	1977
81F	0	On Site	Unspecified Ground Workings	1994
82A	0	On Site	Unspecified Pit	1977
83A	0	On Site	Unspecified Pit	1994
84A	0	On Site	Unspecified Pit	1886
85E	0	On Site	Unspecified Pit	1886
86C	0	On Site	Unspecified Ground Workings	1994
87C	0	On Site	Unspecified Ground Workings	1977
88B	0	On Site	Unspecified Pit	1906
89B	0	On Site	Unspecified Pit	1906
90B	0	On Site	Unspecified Pit	1906
91B	0	On Site	Unspecified Pit	1948
92D	0	On Site	Unspecified Pit	1994
93D	0	On Site	Unspecified Pit	1977
94E	0	On Site	Unspecified Pit	1886
95T	105	W	Opencast Ironstone Workings	1979
96G	123	W	Unspecified Pit	1885
97G	123	W	Unspecified Pit	1885
98G	123	W	Unspecified Ground Workings	1886
99G	123	W	Unspecified Ground Workings	1905
100G	123	W	Unspecified Ground Workings	1905
101G	124	W	Ponds	1948
102G	124	W	Ponds	1938
103G	126	W	Ponds	1955
104G	126	W	Unspecified Pit	1968
105H	134	NW	Unspecified Pit	1886
106H	135	NW	Unspecified Pit	1886
107U	139	W	Unspecified Pit	1886
108G	145	W	Ponds	1885
109G	147	W	Pond	1905

110G	147	W	Pond	1905
111G	147	W	Pond	1886
112I	147	W	Unspecified Pit	1886
113I	147	W	Unspecified Pit	1886
114J	195	W	Opencast Ironstone Workings	1977
115J	195	W	Opencast Ironstone Workings	1994
116V	205	W	Pond	1977
117V	205	W	Pond	1994
118K	217	W	Unspecified Ground Workings	1977
119K	217	W	Unspecified Ground Workings	1994
120W	323	S	Pond	1885
121W	323	S	Pond	1938
122W	323	S	Pond	1948
123W	323	S	Pond	1886
124W	323	S	Pond	1905
125W	323	S	Pond	1905
126W	325	S	Pond	1955
127M	326	SW	Sand Pit	1885
128M	328	SW	Unspecified Pit	1905
129M	328	SW	Unspecified Pit	1886
130M	328	SW	Unspecified Pit	1905
131M	330	SW	Unspecified Pit	1955
132M	330	SW	Unspecified Heap	1968
133M	332	SW	Unspecified Pit	1948
134M	332	SW	Unspecified Pit	1938
135Q	440	S	Pond	1886
136Q	440	S	Pond	1905
137Q	440	S	Pond	1905
138Q	440	S	Pond	1885
139Q	441	S	Pond	1955
140Q	441	S	Pond	1968
141Q	441	S	Pond	1938
142Q	441	S	Pond	1948
143X	489	S	Unspecified Pit	1979

2. Environmental Permits, Incidents and Registers Map



© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

- | | | |
|---|--|--|
|  Site Outline |  Recorded Pollution Incident |  RAS 3 & 4 Authorisations |
|  Dangerous Substances (List 1) |  Part A(1) Authorised Processes and Historic IPC Authorisations | |
|  Dangerous Substances (List 2) |  Part A(2) and Part B Authorised Processes | |
|  Water Industry Referrals |  COMAH / NIHHS Sites | |
|  Licenced Discharge Consents |  Sites Determined as Contaminated Land | |
|  Red List Discharge Consents |  Hazardous Substance Consents and Enforcements | |

2. Environmental Permits, Incidents and Registers

2.1 Industrial Sites Holding Licences and/or Authorisations

Searches of information provided by the Environment Agency/Natural Resources Wales and Local Authorities reveal the following information:

2.1.1 Records of historic IPC Authorisations within 500m of the study site:

0

Database searched and no data found.

2.1.2 Records of Part A(1) and IPPC Authorised Activities within 500m of the study site:

9

The following Part A(1) and IPPC Authorised Activities are represented as points on the Environmental Permits, Incidents and Registers Map:

ID	Distance (m)	Direction	NGR	Details	
13A	469	E	495020 410050	Operator: Hook2sisters Ltd Installation Name: Gokewell Farm Process: ASSOCIATED PROCESS	Permit Number: HP3633UU Original Permit Number: HP3633UU EPR Reference: - Issue Date: 26/10/2007 Effective Date: 26/10/2007 Last date noted as effective: 2017-04-01 Status: Superseded
14A	469	E	495020 410050	Operator: Hook2sisters Ltd Installation Name: Gokewell Farm Process: ASSOCIATED PROCESS	Permit Number: TP3139TA Original Permit Number: HP3633UU EPR Reference: - Issue Date: 25/3/2010 Effective Date: 25/3/2010 Last date noted as effective: 2017-04-01 Status: Effective
15A	469	E	495020 410050	Operator: Hook2sisters Ltd Installation Name: Gokewell Farm Process: INTENSIVE FARMING; > 40,000 POULTRY	Permit Number: HP3633UU Original Permit Number: HP3633UU EPR Reference: - Issue Date: 26/10/2007 Effective Date: 26/10/2007 Last date noted as effective: 2017-04-01 Status: Superseded

ID	Distance (m)	Direction	NGR	Details	
16A	469	E	495020 410050	Operator: Hook2sisters Ltd Installation Name: Gokewell Farm Process: INTENSIVE FARMING; > 40,000 POULTRY	Permit Number: TP3139TA Original Permit Number: HP3633UU EPR Reference: - Issue Date: 25/3/2010 Effective Date: 25/3/2010 Last date noted as effective: 2017-04-01 Status: Effective
17B	496	NW	493300 410500	Operator: Tata Steel Uk Limited Installation Name: Yarborough Quarry Epr/qp3334sk Process: WASTE LANDFILLING; >10 T/D WITH CAPACITY >25,000T EXCLUDING INERT WASTE	Permit Number: NP3631FV Original Permit Number: QP3334SK EPR Reference: - Issue Date: 12/1/2012 Effective Date: 12/1/2012 Last date noted as effective: 2017-04-01 Status: Superseded
18B	496	NW	493300 410500	Operator: Tata Steel Uk Limited Installation Name: Yarborough Quarry Epr/qp3334sk Process: WASTE LANDFILLING; >10 T/D WITH CAPACITY >25,000T EXCLUDING INERT WASTE	Permit Number: QP3334SK Original Permit Number: QP3334SK EPR Reference: - Issue Date: 13/6/2006 Effective Date: 13/6/2006 Last date noted as effective: 2017-04-01 Status: Superseded
19B	496	NW	493300 410500	Operator: Longs Steel Uk Limited Installation Name: Yarborough Quarry Epr/fp3136al Process: WASTE LANDFILLING; >10 T/D WITH CAPACITY >25,000T EXCLUDING INERT WASTE	Permit Number: FP3136AL Original Permit Number: FP3136AL EPR Reference: - Issue Date: 21/8/2015 Effective Date: 21/8/2015 Last date noted as effective: 2017-04-01 Status: Superseded
20B	496	NW	493300 410500	Operator: British Steel Ltd Installation Name: Yarborough Quarry Landfill Process: WASTE LANDFILLING; >10 T/D WITH CAPACITY >25,000T EXCLUDING INERT WASTE	Permit Number: TP3639DC Original Permit Number: FP3136AL EPR Reference: - Issue Date: 8/6/2016 Effective Date: 8/6/2016 Last date noted as effective: 2017-04-01 Status: Effective
21B	496	NW	493300 410500	Operator: Longs Steel Uk Limited Installation Name: Yarborough Quarry Epr/fp3136al Process: WASTE LANDFILLING; >10 T/D WITH CAPACITY >25,000T EXCLUDING INERT WASTE	Permit Number: NP3036RS Original Permit Number: FP3136AL EPR Reference: - Issue Date: 24/2/2016 Effective Date: 24/2/2016 Last date noted as effective: 2017-04-01 Status: Superseded

2.1.3 Records of Red List Discharge Consents (potentially harmful discharges to controlled waters) within 500m of the study site:

0

Database searched and no data found.

2.1.4 Records of List 1 Dangerous Substances Inventory Sites within 500m of the study site:

0

Database searched and no data found.

2.1.5 Records of List 2 Dangerous Substance Inventory Sites within 500m of the study site:

0

Database searched and no data found.

2.1.6 Records of Part A(2) and Part B Activities and Enforcements within 500m of the study site:

0

Database searched and no data found.

2.1.7 Records of Category 3 or 4 Radioactive Substances Authorisations:

0

Database searched and no data found.

2.1.8 Records of Licensed Discharge Consents within 500m of the study site:

1

The following Licensed Discharge Consents records are represented as points on the Environmental Permits, Incidents and Registers Map:

ID	Distance (m)	Direction	NGR	Details	
2	245	E	494800 410000	Address: SITE 49 GOKEWELL PRIORY, HERON HOLT, BROUGHTON, BRIGG, SOUTH HUMBERSIDE, DN20 0BQ Effluent Type: UNSPECIFIED Permit Number: PR3LF520 Permit Version: 1	Receiving Water: Into Land Status: PRE NRA LEGISLATION WHERE ISSUE DATE < 01-SEP-89 (HISTORIC ONLY) Issue date: 24/11/1987 Effective Date: 24-Nov-1987 Revocation Date: 09/05/1997

2.1.9 Records of Water Industry Referrals (potentially harmful discharges to the public sewer) within 500m of the study site:

0

Database searched and no data found.

2.1.10 Records of Planning Hazardous Substance Consents and Enforcements within 500m of the study site:

0

Database searched and no data found.

2.2 Dangerous or Hazardous Sites

Records of COMAH & NIHHS sites within 500m of the study site:

1

The following COMAH & NIHHS Authorisation records provided by the Health and Safety Executive are represented as polygons or buffered points on the Environmental Permits, Incidents and Registers Map:

ID	Distance (m)	Direction	Company	Address	Operational Status	Tier
12	0	On Site	Tata Steel UK Limited	Tata Steel UK Limited, Scunthorpe, Po Box 1, Brigg Road, Scunthorpe, North Lincolnshire, DN16 1BP	Current COMAH Site	COMAH Upper Tier Operator

2.3 Environment Agency/Natural Resources Wales Recorded Pollution Incidents

2.3.1 Records of National Incidents Recording System, List 2 within 500m of the study site:

1

The following NIRS List 2 records are represented as points on the Environmental Permits, Incidents and Registers Map:

ID	Distance (m)	Direction	NGR	Details
1	461	SW	493000 408760	<p>Incident Date: 13-Jul-2002 Incident Identification: 91233 Pollutant: Atmospheric Pollutants and Effects Pollutant Description: Fumes</p> <p>Water Impact: Category 4 (No Impact) Land Impact: Category 4 (No Impact) Air Impact: Category 3 (Minor)</p>

2.3.2 Records of National Incidents Recording System, List 1 within 500m of the study site:

0

Database searched and no data found.


2.4 Sites Determined as Contaminated Land under Part 2A EPA 1990

How many records of sites determined as contaminated land under Section 78R of the Environmental Protection Act 1990 are there within 500m of the study site?







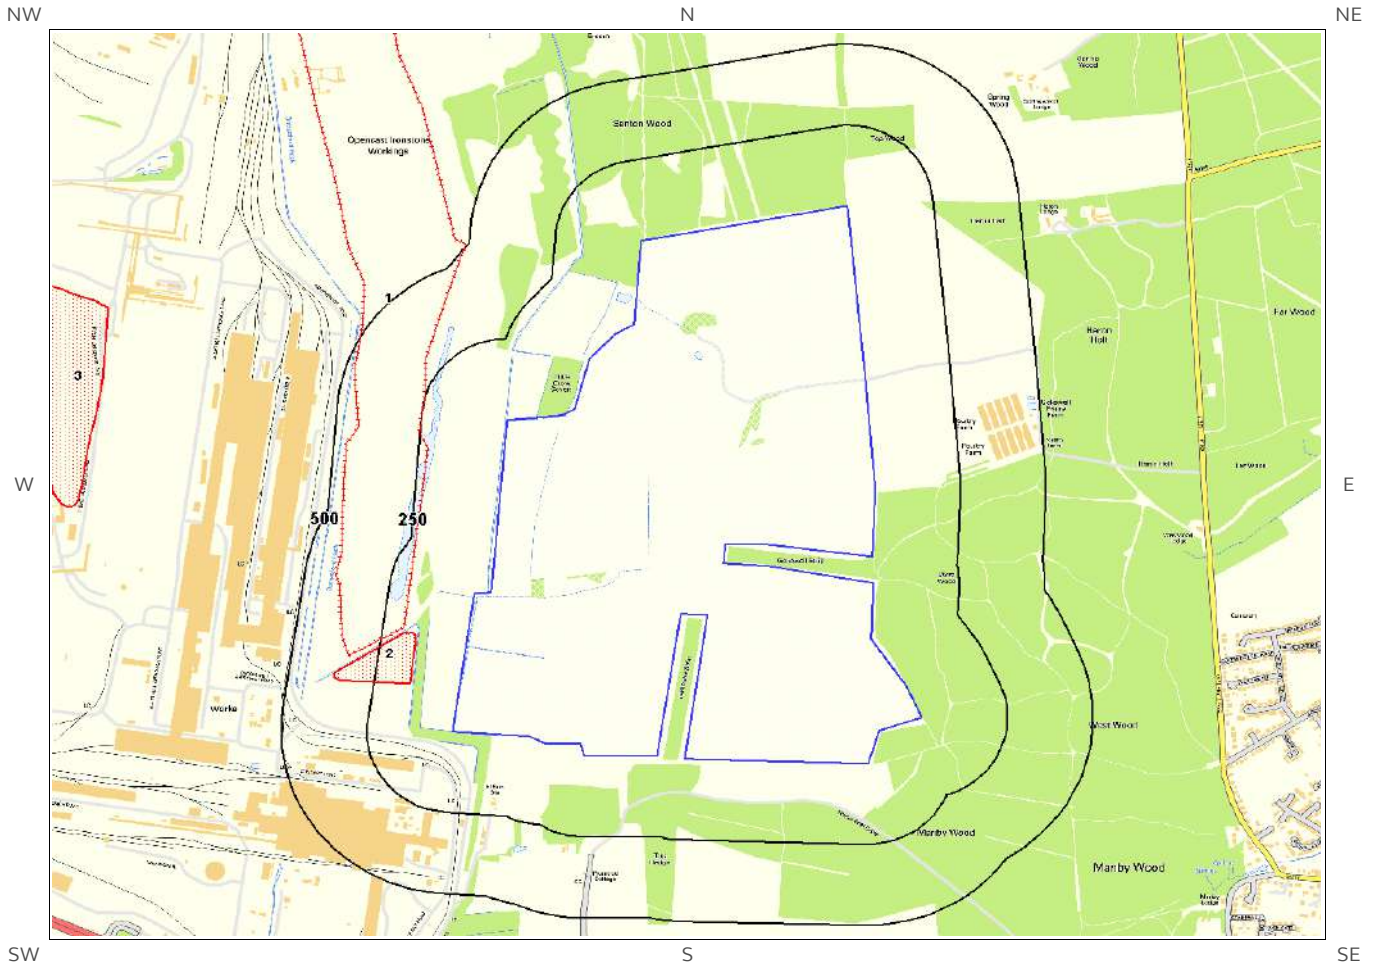


0

Database searched and no data found.

3. Landfill and Other Waste Sites Map



© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

- | | | |
|--|---|---|
|  Site Outline |  EA/NRW Active Landfill |  Historic and Planned Waste Sites |
|  250 Search Buffers (m) |  EA/NRW Historic Landfill |  EA/NRW Licensed Waste Site |
|  500 Search Buffers (m) |  BGS / DoE Survey Landfill |  Local Authority/Historical Mapping Landfill Records |

3. Landfill and Other Waste Sites

3.1 Landfill Sites

3.1.1 Records from Environment Agency/Natural Resources Wales landfill data within 1000m of the study site:

1

The following Environment Agency/Natural Resources Wales landfill records are represented as polygons on the Landfill and Other Waste Sites map:

ID	Distance (m)	Direction	NGR	Details
1	190	W	493300 410500	Address: Crosby North Landfill, Brigg Road, South Humberside, DN16 1BP Landfill Reference: -9999.0 Operator: British Steel Ltd Environmental Permitting Regulations (Waste) Reference: - Status: Effective Landfill Type: WASTE LANDFILLING; >10 T/D WITH CAPACITY >25,000T EXCLUDING INERT WASTE IPPC Reference: EPR Reference:

3.1.2 Records of Environment Agency/Natural Resources Wales historic landfill sites within 1500m of the study site:

3

The following landfill records are represented as either points or polygons on the Landfill and Other Waste Sites map:

ID	Distance (m)	Direction	NGR	Details
2	144	W	493100 409200	Site Address: Scunthorpe Concast, Scunthorpe, Lincolnshire Waste Licence: Yes Licence Issue: 24-Sep-1981 Site Reference: 55/19/0702, A702 Licence Surrendered: 23-Sep-1992 Waste Type: Industrial, Liquid, sludge Licence Holder Address: - Environmental Permitting Regulations (Waste) Reference: - Operator: British Steel Corporation Licence Holder: British Steel Corporation First Recorded: 31-Dec-1981 Last Recorded: 31-Dec-1992
3	1190	W	492100 410200	Site Address: Slag Pit, Scunthorpe, Lincolnshire Waste Licence: Yes Licence Issue: 01-Jan-1986 Site Reference: 55/19/0716, A716 Licence Surrendered: 23-Sep-1992 Waste Type: Inert, Industrial Licence Holder Address: - Environmental Permitting Regulations (Waste) Reference: - Operator: - Licence Holder: British Steel Corporation First Recorded: 31-Dec-1986 Last Recorded: 23-Sep-1992

ID	Distance (m)	Direction	NGR	Details	
Not shown	1446	SW	491900 408500	Site Address: Ashby Village, Scunthorpe, Lincolnshire Waste Licence: Yes Site Reference: 55/19/0843 Waste Type: Inert Environmental Permitting Regulations (Waste) Reference: -	Licence Issue: 06-Apr-1992 Licence Surrendered: 25-Apr-1993 Licence Holder Address: - Operator: - Licence Holder: Anchor Village Developments First Recorded: 31-Dec-1992 Last Recorded: 25-Apr-1993

3.1.3 Records of BGS/DoE non-operational landfill sites within 1500m of the study site:

0

Database searched and no data found.

3.1.4 Records of Landfills from Local Authority and Historical Mapping Records within 1500m of the study site:

0

Database searched and no data found.

3.2 Other Waste Sites

3.2.1 Records of waste treatment, transfer or disposal sites within 500m of the study site:

0

Database searched and no data found.


3.2.2 Records of Environment Agency/Natural Resources Wales licensed waste sites within 1500m of the study site:

3

The following waste treatment, transfer or disposal sites records are represented as points on the Landfill and Other Waste Sites map:

ID	Distance (m)	Direction	NGR	Details
Not shown	1257	NW	492947 411434	<p>Site Address: Yarborough Landfill Site, P O Box 1, Brigg Road, Scunthorpe, Lincolnshire, DN16 1BP</p> <p>Type: Industrial Waste Landfill (Factory curtilage)</p> <p>Size: >= 75000 tonnes</p> <p>Environmental Permitting Regulations (Waste) Licence Number: COR003</p> <p>EPR reference: -</p> <p>Operator: Corus Uk Ltd</p> <p>Waste Management licence No: 43126</p> <p>Annual Tonnage: 0.0</p> <p>Issue Date: 10/05/1978</p> <p>Effective Date: -</p> <p>Modified: 05/08/2004</p> <p>Surrendered Date: -</p> <p>Expiry Date: -</p> <p>Cancelled Date: -</p> <p>Status: Modified</p> <p>Site Name: Yarborough Landfill Site</p> <p>Correspondence Address: P O Box 1, Brigg Road, Scunthorpe, Lincolnshire, DN16 1BP</p>
Not shown	1257	NW	492947 411434	<p>Site Address: Yarborough Landfill Site, P O Box 1, Brigg Road, Scunthorpe, N Lincolnshire, DN16 1BP</p> <p>Type: Industrial Waste Landfill (Factory curtilage)</p> <p>Size: >= 75000 tonnes</p> <p>Environmental Permitting Regulations (Waste) Licence Number: COR003</p> <p>EPR reference: -</p> <p>Operator: Corus U K Ltd</p> <p>Waste Management licence No: 43126</p> <p>Annual Tonnage: 637500.0</p> <p>Issue Date: 10/05/1978</p> <p>Effective Date: -</p> <p>Modified: 05/08/2004</p> <p>Surrendered Date: -</p> <p>Expiry Date: -</p> <p>Cancelled Date: -</p> <p>Status: Modified</p> <p>Site Name: Yarborough Landfill Site</p> <p>Correspondence Address: P O Box 1, Brigg Road, Scunthorpe, N Lincolnshire, DN16 1BP</p>
Not shown	1257	NW	492946 411433	<p>Site Address: Yarborough Landfill Site, P O Box 1, Brigg Road, Scunthorpe, Lincolnshire, DN16 1BP</p> <p>Type: Industrial Waste Landfill (Factory curtilage)</p> <p>Size: >= 75000 tonnes</p> <p>Environmental Permitting Regulations (Waste) Licence Number: COR003</p> <p>EPR reference: -</p> <p>Operator: Corus</p> <p>Waste Management licence No: 43126</p> <p>Annual Tonnage: 0.0</p> <p>Issue Date: 10/05/1978</p> <p>Effective Date: -</p> <p>Modified: 06/02/2001</p> <p>Surrendered Date: -</p> <p>Expiry Date: -</p> <p>Cancelled Date: -</p> <p>Status: Modified</p> <p>Site Name: Yarborough Landfill Site</p> <p>Correspondence Address: Scunthorpe Works, P O Box 1, Brigg Road, Scunthorpe, North Lincs, DN16 1BP</p>

4. Current Land Use Map

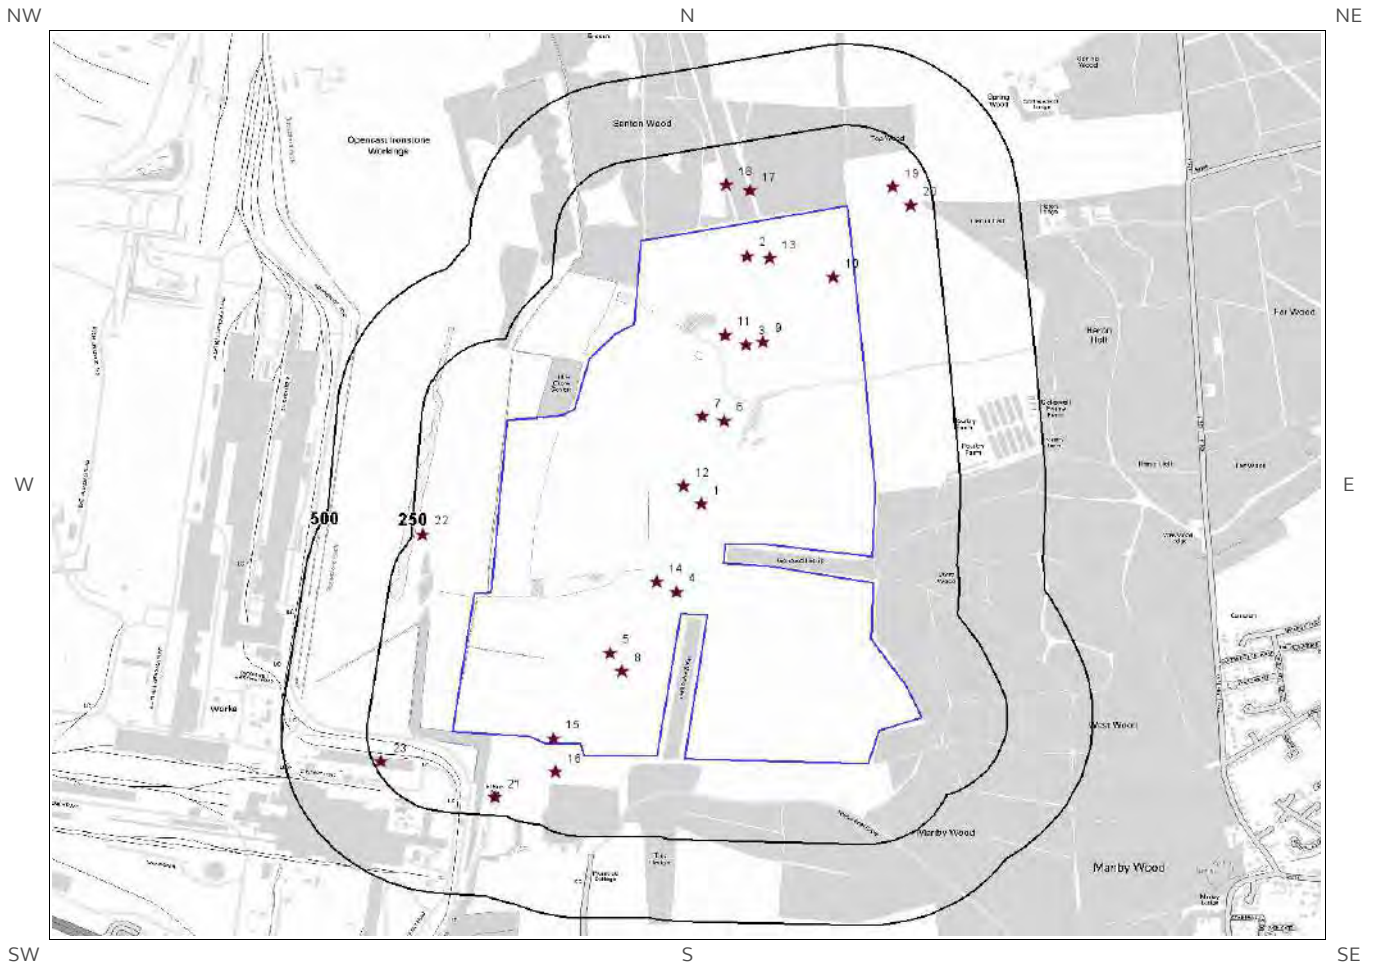

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

-  Site Outline
-  Current Industrial Sites
-  Electricity Transmission Cables
-  Search Buffers (m)
-  Petrol & Fuel Sites
-  Gas Transmission Pipelines
-  250
-  500

4. Current Land Uses

4.1 Current Industrial Data

Records of potentially contaminative industrial sites within 250m of the study site:

23

The following records are represented as points on the Current Land Uses map.

ID	Distance (m)	Direction	Company	NGR	Address	Activity	Category
1	0	On Site	Pylon	494059 409785	Pylon, DN16	Electrical Features	Infrastructure and Facilities
2	0	On Site	Pylon	494193 410550	Pylon, DN20	Electrical Features	Infrastructure and Facilities
3	0	On Site	Pylon	494188 410277	Pylon, DN20	Electrical Features	Infrastructure and Facilities
4	0	On Site	Pylon	493986 409514	Pylon, DN16	Electrical Features	Infrastructure and Facilities
5	0	On Site	Pylon	493792 409325	Pylon, DN16	Electrical Features	Infrastructure and Facilities
6	0	On Site	Pylon	494126 410042	Pylon, DN20	Electrical Features	Infrastructure and Facilities
7	0	On Site	Pylon	494062 410055	Pylon, DN16	Electrical Features	Infrastructure and Facilities
8	0	On Site	Pylon	493828 409268	Pylon, DN16	Electrical Features	Infrastructure and Facilities
9	0	On Site	Pylon	494240 410285	Pylon, DN20	Electrical Features	Infrastructure and Facilities
10	0	On Site	Pylon	494445 410485	Pylon, DN20	Electrical Features	Infrastructure and Facilities
11	0	On Site	Pylon	494129 410306	Pylon, DN20	Electrical Features	Infrastructure and Facilities
12	0	On Site	Pylon	494007 409840	Pylon, DN16	Electrical Features	Infrastructure and Facilities
13	0	On Site	Pylon	494258 410543	Pylon, DN20	Electrical Features	Infrastructure and Facilities
14	0	On Site	Pylon	493929 409544	Pylon, DN16	Electrical Features	Infrastructure and Facilities
15	0	On Site	Pylon	493627 409061	Pylon, DN16	Electrical Features	Infrastructure and Facilities
16	84	S	Pylon	493632 408958	Pylon, DN16	Electrical Features	Infrastructure and Facilities
17	99	N	Pylon	494202 410751	Pylon, DN15	Electrical Features	Infrastructure and Facilities
18	130	N	Pylon	494131 410769	Pylon, DN15	Electrical Features	Infrastructure and Facilities
19	146	NE	Oil Well	494620 410763	Oil Well, DN15	Oil and Gas Extraction, Refinery and Product Manufacture	Extractive Industries

ID	Distance (m)	Direction	Company	NGR	Address	Activity	Category
20	183	E	Pylon	494671 410706	Pylon, DN20	Electrical Features	Infrastructure and Facilities
21	193	S	Electricity Sub Station	493454 408879	Electricity Sub Station, DN16	Electrical Features	Infrastructure and Facilities
22	217	W	Opencast Workings (Disused)	493243 409690	Opencast Workings (Disused), DN16	Unspecified Quarries Or Mines	Extractive Industries
23	228	SW	Works	493122 408989	Works, DN16	Unspecified Works Or Factories	Industrial Features

4.2 Petrol and Fuel Sites

Records of petrol or fuel sites within 500m of the study site: 0

Database searched and no data found.

4.3 National Grid High Voltage Underground Electricity Transmission Cables

This dataset identifies the high voltage electricity transmission lines running between generating power plants and electricity substations. The dataset does not include the electricity distribution network (smaller, lower voltage cables distributing power from substations to the local user network). This information has been extracted from databases held by National Grid and is provided for information only with no guarantee as to its completeness or accuracy. National Grid do not offer any warranty as to the accuracy of the available data and are excluded from any liability for any such inaccuracies or errors.

Records of National Grid high voltage underground electricity transmission cables within 500m of the study site: 0

Database searched and no data found.

4.4 National Grid High Pressure Gas Transmission Pipelines

This dataset identifies high-pressure, large diameter pipelines which carry gas between gas terminals, power stations, compressors and storage facilities. The dataset does not include the Local Transmission System (LTS) which supplies gas directly into homes and businesses. This information has been extracted from databases held by National Grid and is provided for information only with no guarantee as to its completeness or accuracy. National Grid do not offer any warranty as to the accuracy of the available data and are excluded from any liability for any such inaccuracies or errors.

Records of National Grid high pressure gas transmission pipelines within 500m of the study site: 0

Database searched and no data found.

5. Geology

5.1 Artificial Ground and Made Ground

The database has been searched on site, including a 50m buffer.

Lex Code	Description	Rock Type
WMGR-ARTDP	INFILLED GROUND	ARTIFICIAL DEPOSIT

5.2 Superficial Ground and Drift Geology

The database has been searched on site, including a 50m buffer.

Lex Code	Description	Rock Type
SUTN-S	SUTTON SAND FORMATION	SAND
SUTN-S	SUTTON SAND FORMATION	SAND

5.3 Bedrock and Solid Geology

The database has been searched on site, including a 50m buffer.


Lex Code	Description	Rock Type
MRB-FGLS	MARLSTONE ROCK FORMATION	FERRUGINOUS LIMESTONE AND FERRUGINOUS SANDSTONE
GRF-SDSM	GRANTHAM FORMATION	SANDSTONE, SILTSTONE AND MUDSTONE
WHM-MDST	WHITBY MUDSTONE FORMATION	MUDSTONE
NS-FGSST	NORTHAMPTON SAND FORMATION	SANDSTONE, FERRUGINOUS
HIL-LMOOL	HIBALDSTOW LIMESTONE	LIMESTONE, OOIDAL
KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF)	LIMESTONE
KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF)	LIMESTONE
KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF)	LIMESTONE
KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF)	LIMESTONE
KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF)	LIMESTONE

Lex Code	Description	Rock Type
SYL-LMAR	SCAWBY LIMESTONE	LIMESTONE AND [SUBEQUAL/SUBORDINATE] ARGILLACEOUS ROCKS, INTERBEDDED
LLL-LMST	LOWER LINCOLNSHIRE LIMESTONE MEMBER	LIMESTONE
KCM-MDLM	KIRTON CEMENTSTONE BEDS	MUDSTONE AND LIMESTONE, INTERBEDDED
RVB-LMAR	RAVENTHORPE BEDS	LIMESTONE AND [SUBEQUAL/SUBORDINATE] ARGILLACEOUS ROCKS, INTERBEDDED
KCM-LMST	KIRTON CEMENTSTONE BEDS	LIMESTONE
KCM-LMST	KIRTON CEMENTSTONE BEDS	LIMESTONE
KCM-MDLM	KIRTON CEMENTSTONE BEDS	MUDSTONE AND LIMESTONE, INTERBEDDED
CHAM-MDST	CHARMOUTH MUDSTONE FORMATION	MUDSTONE
PTNI-FEST	PECTEN IRONSTONE (BED)	IRONSTONE
CHAM-MDST	CHARMOUTH MUDSTONE FORMATION	MUDSTONE


(Derived from the BGS 1:50,000 Digital Geological Map of Great Britain)

6 Hydrogeology and Hydrology


6a. Aquifer Within Superficial Geology

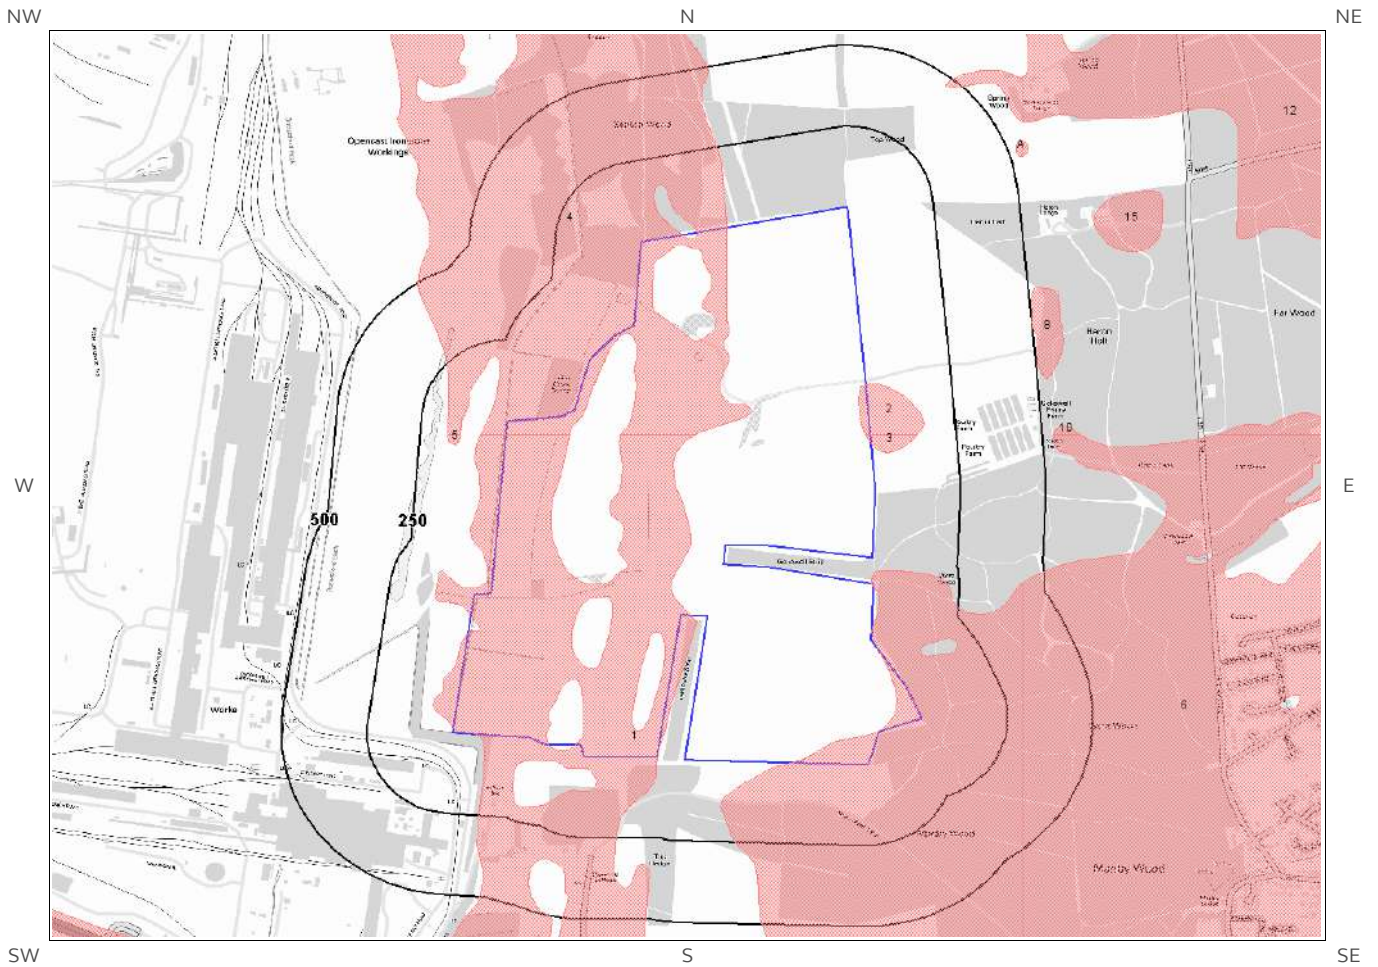


© Crown copyright and database rights 2017
Ordnance Survey license 100035207.

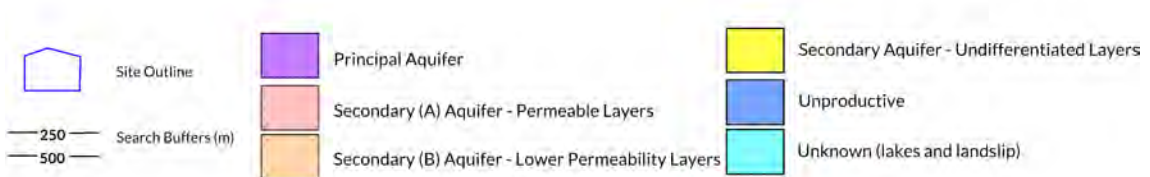

6b. Aquifer Within Bedrock Geology and Abstraction Licenses

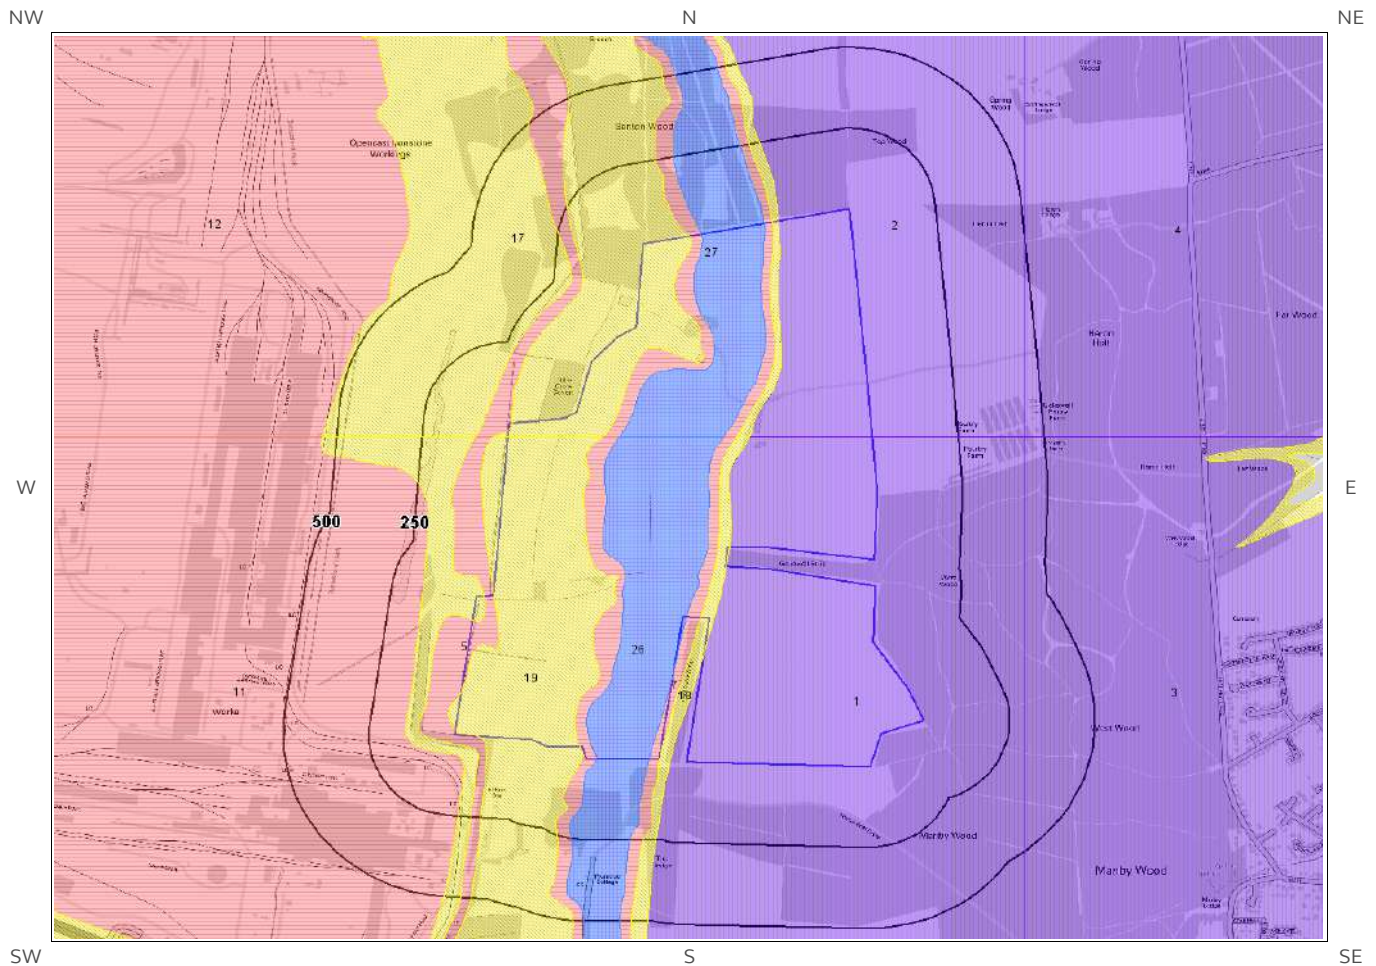


© Crown copyright and database rights 2017
Ordnance Survey license 100035207.

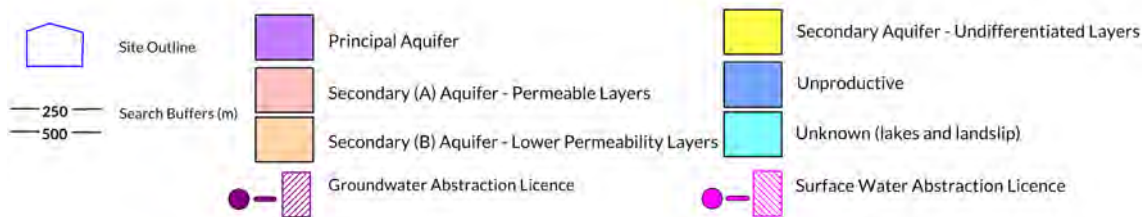




6c. Hydrogeology – Source Protection Zones and Potable Water Abstraction Licenses

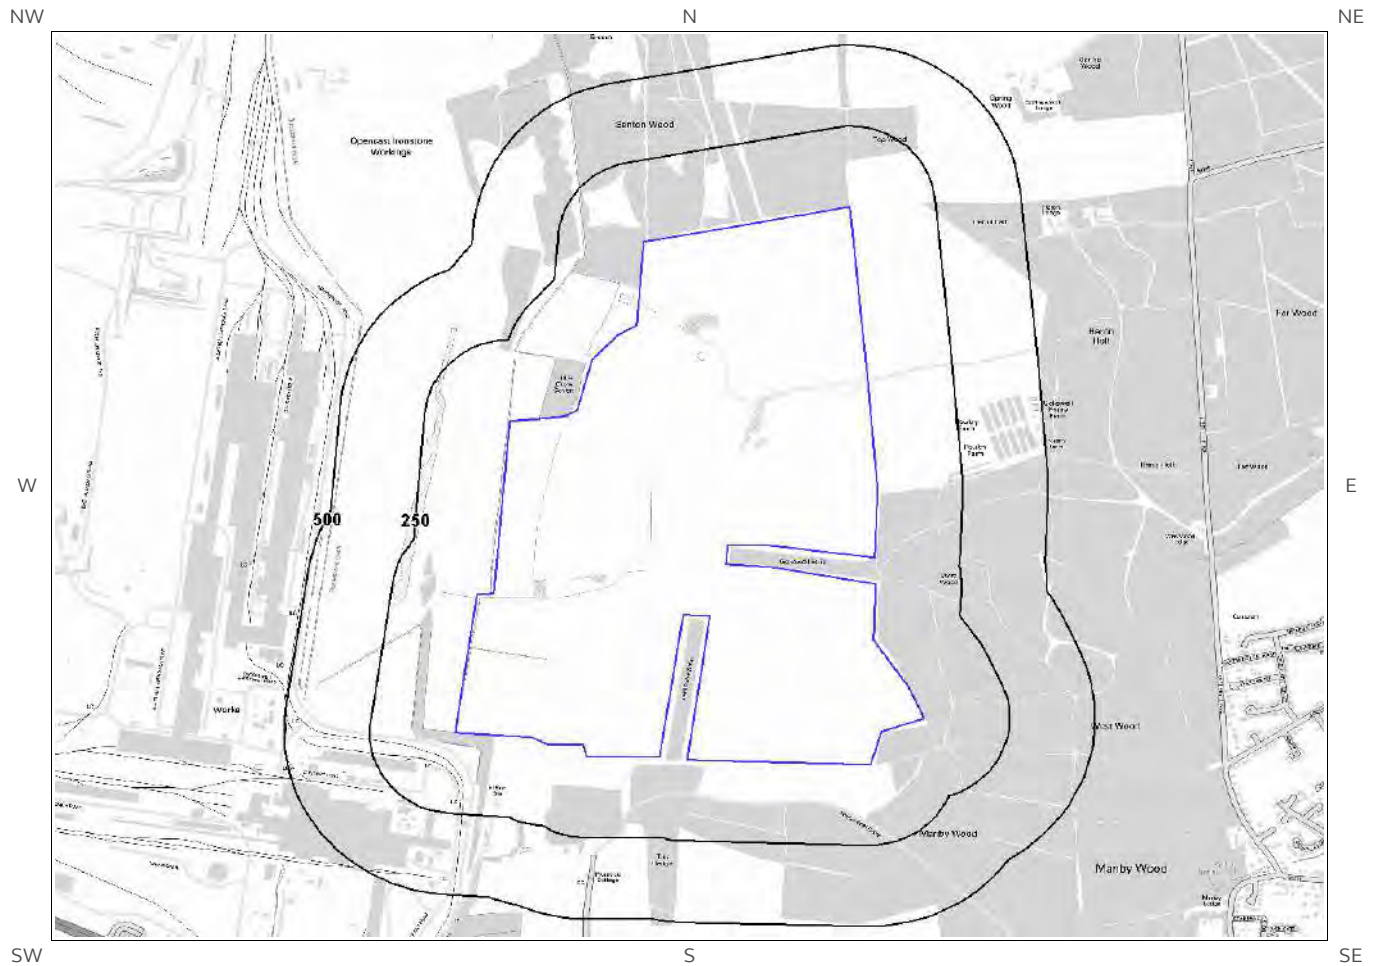


© Crown copyright and database rights 2017
Ordnance Survey license 100035207.

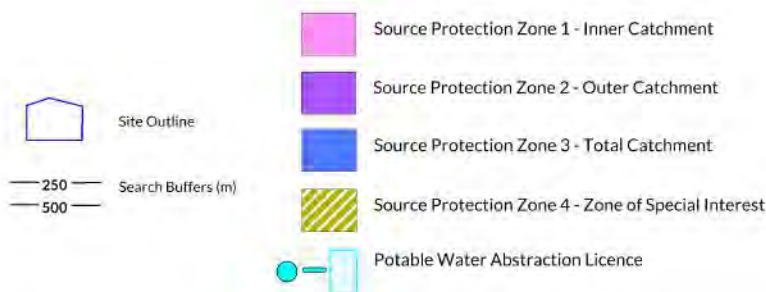





6d. Hydrogeology – Source Protection Zones within confined aquifer

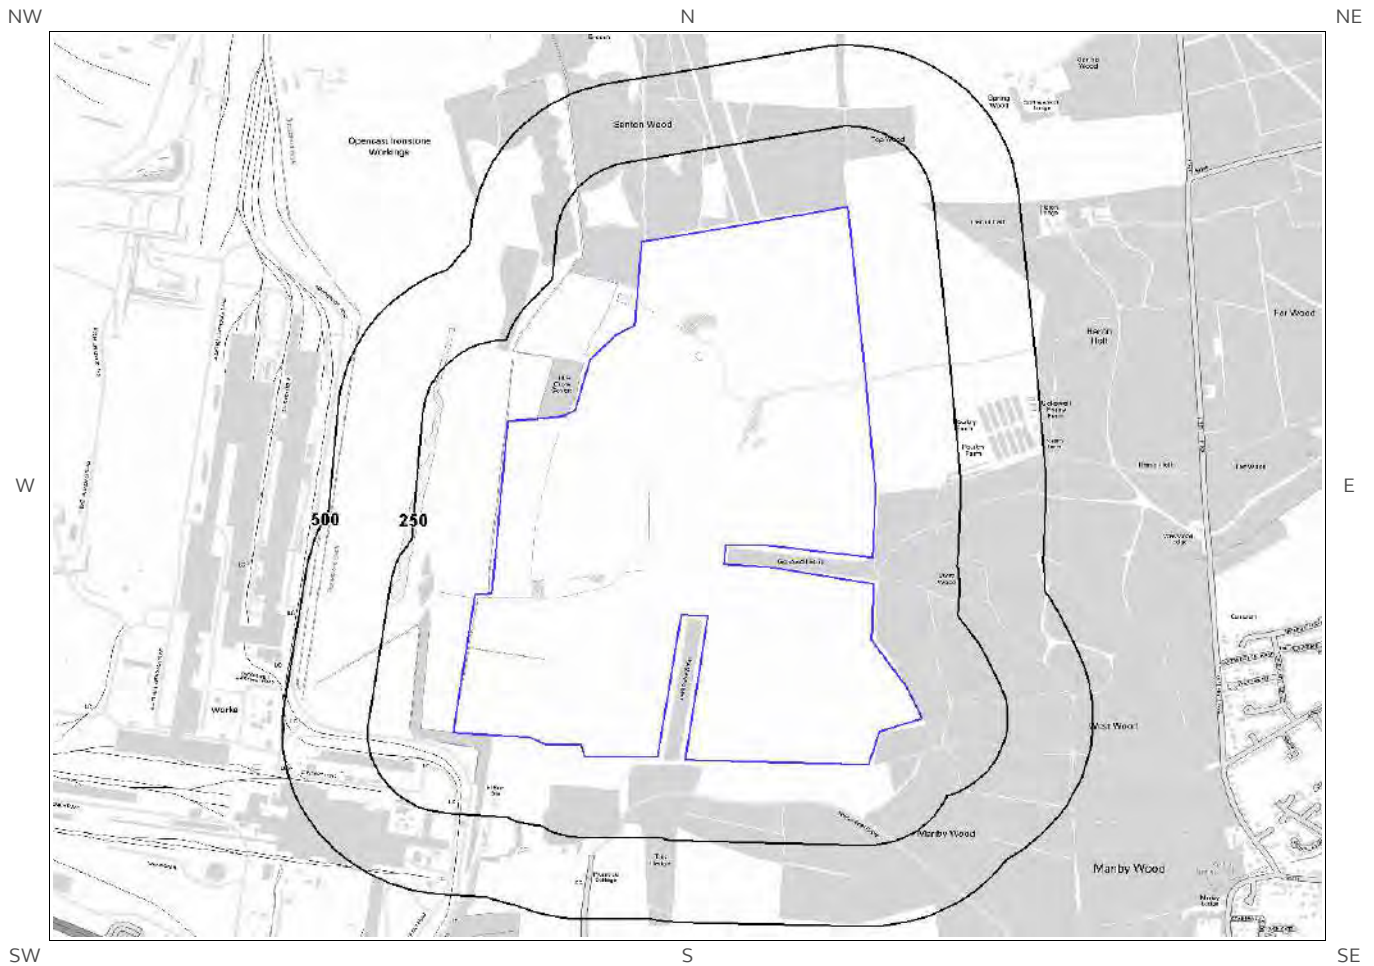

© Crown copyright and database rights 2017
Ordnance Survey license 100035207.

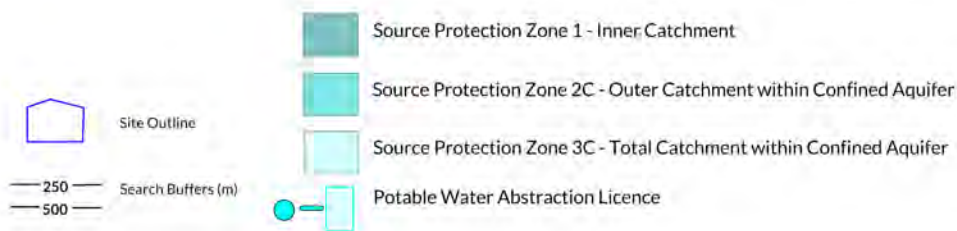

6e. Hydrology – Detailed River Network and River Quality

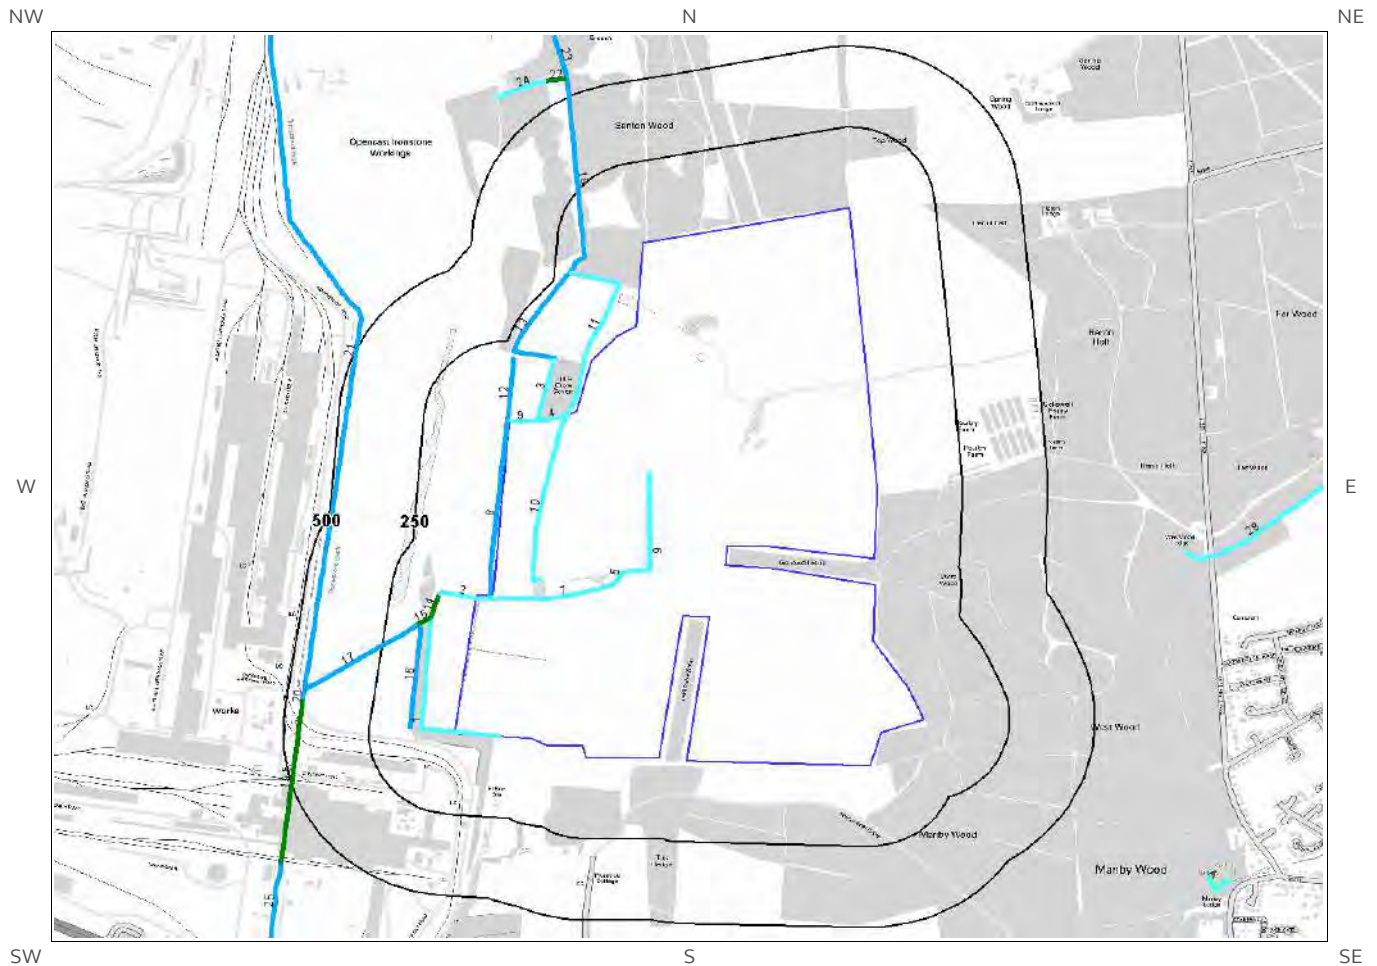

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



6. Hydrogeology and Hydrology

6.1 Aquifer within Superficial Deposits

Are there records of strata classification within the superficial geology at or in proximity to the property?
Yes

From 1 April 2010, the Environment Agency/Natural Resources Wales's Groundwater Protection Policy has been using aquifer designations consistent with the Water Framework Directive. For further details on the designation and interpretation of this information, please refer to the Groundsure Enviro Insight User Guide.

The following aquifer records are shown on the Aquifer within Superficial Geology Map (6a):

ID	Distance (m)	Direction	Designation	Description
1	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
2	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
3	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
4	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
5	132	W	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
6	295	E	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
7	472	NE	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
8	499	E	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers

6.2 Aquifer within Bedrock Deposits

Are there records of strata classification within the bedrock geology at or in proximity to the property? Yes

From 1 April 2010, the Environment Agency/Natural Resources Wales's Groundwater Protection Policy has been using aquifer designations consistent with the Water Framework Directive. For further details on the designation and interpretation of this information, please refer to the Groundsure Enviro Insight User Guide.

The following aquifer records are shown on the Aquifer within Bedrock Geology Map (6b):

ID	Distance (m)	Direction	Designation	Description
1	0	On Site	Principal	Geology of high intergranular and/or fracture permeability, usually providing a high level of water storage and may support water supply/river base flow on a strategic scale. Generally principal aquifers were previously major aquifers
2	0	On Site	Principal	Geology of high intergranular and/or fracture permeability, usually providing a high level of water storage and may support water supply/river base flow on a strategic scale. Generally principal aquifers were previously major aquifers
5	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
6	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
7	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
8	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
9	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
10	0	On Site	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers
16	0	On Site	Secondary (undifferentiated)	Assigned where it is not possible to attribute either category A or B to a rock type. In general these layers have previously been designated as both minor and non-aquifer in different locations due to the variable characteristics of the rock type
17	0	On Site	Secondary (undifferentiated)	Assigned where it is not possible to attribute either category A or B to a rock type. In general these layers have previously been designated as both minor and non-aquifer in different locations due to the variable characteristics of the rock type
18	0	On Site	Secondary (undifferentiated)	Assigned where it is not possible to attribute either category A or B to a rock type. In general these layers have previously been designated as both minor and non-aquifer in different locations due to the variable characteristics of the rock type
19	0	On Site	Secondary (undifferentiated)	Assigned where it is not possible to attribute either category A or B to a rock type. In general these layers have previously been designated as both minor and non-aquifer in different locations due to the variable characteristics of the rock type
20	0	On Site	Secondary (undifferentiated)	Assigned where it is not possible to attribute either category A or B to a rock type. In general these layers have previously been designated as both minor and non-aquifer in different locations due to the variable characteristics of the rock type
26	0	On Site	Unproductive	These are rock layers or drift deposits with low permeability that have negligible significance for water supply or river base flow
27	0	On Site	Unproductive	These are rock layers or drift deposits with low permeability that have negligible significance for water supply or river base flow
11	61	S	Secondary A	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers

ID	Distance (m)	Direction	Designation	Description
3	295	E	Principal	Geology of high intergranular and/or fracture permeability, usually providing a high level of water storage and may support water supply/river base flow on a strategic scale. Generally principal aquifers were previously major aquifers
4	444	E	Principal	Geology of high intergranular and/or fracture permeability, usually providing a high level of water storage and may support water supply/river base flow on a strategic scale. Generally principal aquifers were previously major aquifers

6.3 Groundwater Abstraction Licences

Are there any Groundwater Abstraction Licences within 2000m of the study site? Yes

The following Abstraction Licences records are represented as points, lines and regions on the Aquifer within Bedrock Geology Map (6b):

ID	Distance (m)	Direction	NGR	Details
Not shown	1803	S	493550 407210	Status: Historical Licence No: 03/28/81/0036 Details: Spray Irrigation - Direct Direct Source: Groundwater Midlands Region Point: Holme - Lagoon Data Type: Point Name: C P MARSHALL (FARMS) LIMITED Annual Volume (m ³): 13000 Max Daily Volume (m ³): 2600 Original Application No: - Original Start Date: 3/9/1996 Expiry Date: - Issue No: 100 Version Start Date: 1/4/2010 Version End Date:

6.4 Surface Water Abstraction Licences

Are there any Surface Water Abstraction Licences within 2000m of the study site? No

Database searched and no data found.

6.5 Potable Water Abstraction Licences

Are there any Potable Water Abstraction Licences within 2000m of the study site? No

Database searched and no data found.

6.6 Source Protection Zones

Are there any Source Protection Zones within 500m of the study site? No

Database searched and no data found.

6.7 Source Protection Zones within Confined Aquifer

Are there any Source Protection Zones within the Confined Aquifer within 500m of the study site? No

Historically, Source Protection Zone maps have been focused on regulation of activities which occur at or near the ground surface, such as prevention of point source pollution and bacterial contamination of water supplies. Sources in confined aquifers were often considered to be protected from these surface pressures due to the presence of a low permeability confining layer (e.g. glacial till, clay). The increased interest in subsurface activities such as onshore oil and gas exploration, ground source heating and cooling requires protection zones for confined sources to be marked on SPZ maps where this has not already been done.

Database searched and no data found.

6.8 Groundwater Vulnerability and Soil Leaching Potential

Is there any Environment Agency/Natural Resources Wales information on groundwater vulnerability and soil leaching potential within 500m of the study site? Yes

Distance (m)	Direction	Classification	Soil Vulnerability Category	Description
0	On Site	Minor Aquifer/High Leaching Potential	HU	Soil information for urban areas and restored mineral workings. These soils are therefore assumed to be highly permeable in the absence of site-specific information.
0	On Site	Minor Aquifer/High Leaching Potential	HU	Soil information for urban areas and restored mineral workings. These soils are therefore assumed to be highly permeable in the absence of site-specific information.
0	On Site	Minor Aquifer/High Leaching Potential	H2	Deep, permeable, coarse textured soils which readily transmit a wide range of pollutants because of their rapid drainage and low attenuation potential.
0	On Site	Minor Aquifer/High Leaching Potential	H2	Deep, permeable, coarse textured soils which readily transmit a wide range of pollutants because of their rapid drainage and low attenuation potential.
0	On Site	Major Aquifer/High Leaching Potential	H2	Deep, permeable, coarse textured soils which readily transmit a wide range of pollutants because of their rapid drainage and low attenuation potential.
0	On Site	Major Aquifer/High Leaching Potential	H2	Deep, permeable, coarse textured soils which readily transmit a wide range of pollutants because of their rapid drainage and low attenuation potential.

Is there any Environment Agency/Natural Resources Wales information on river quality within 1500m of the study site? Yes

6.9.1 Biological Quality:

Database searched and no data found.

6.9.2 Chemical Quality:

Chemical quality data is based on the General Quality Assessment Headline Indicators scheme (GQAHI). In England, each chemical sample is measured for ammonia and dissolved oxygen. In Wales, the samples are measured for biological oxygen demand (BOD), ammonia and dissolved oxygen. The results are graded from A ('Very Good') to F ('Bad').

The following Chemical Quality records are shown on the Hydrology Map (6e):

ID	Distance (m)	Direction	NGR	River Quality Grade	Chemical Quality Grade				
					2005	2006	2007	2008	2009
Not shown	1104	SW	492470 408390	River Name: Brumby Beck Reach: B Steel Outlet To Bottesford Beck End/Start of Stretch: Sample Point NGR	E	E	E	E	E
Not shown	1127	SW	492480 408341	River Name: Bottesford Beck Reach: Br Culvert Exit To Black Head Ponds Bk End/Start of Stretch: Sample Point NGR	E	E	E	E	D
Not shown	1153	SW	492400 408400	River Name: Brumby Beck Reach: B Steel Outlet To Bottesford Beck End/Start of Stretch: End of Stretch NGR	E	E	E	E	E

6.10 Detailed River Network


Are there any Detailed River Network entries within 500m of the study site? Yes

The following Detailed River Network records are represented on the Hydrology Map (6e):

ID	Distance (m)	Direction	Details
1	0	On Site	River Name: Drain Welsh River Name: - Alternative Name: - River Type: Tertiary River Main River Status: Currently Undefined
2	0	On Site	River Name: Drain Welsh River Name: - Alternative Name: - River Type: Tertiary River Main River Status: Currently Undefined

ID	Distance (m)	Direction	Details	
3	0	On Site	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Tertiary River Main River Status: Currently Undefined
4	0	On Site	River Name: - Welsh River Name: - Alternative Name: -	River Type: Tertiary River Main River Status: Currently Undefined
5	0	On Site	River Name: - Welsh River Name: - Alternative Name: -	River Type: Tertiary River Main River Status: Currently Undefined
6	0	On Site	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Tertiary River Main River Status: Currently Undefined
7	0	On Site	River Name: - Welsh River Name: - Alternative Name: -	River Type: Tertiary River Main River Status: Currently Undefined
8	0	On Site	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Secondary River Main River Status: Currently Undefined
9	0	On Site	River Name: - Welsh River Name: - Alternative Name: -	River Type: Tertiary River Main River Status: Currently Undefined
10	0	On Site	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Tertiary River Main River Status: Currently Undefined
11	0	On Site	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Tertiary River Main River Status: Currently Undefined
12	7	W	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Secondary River Main River Status: Currently Undefined
13	104	W	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Secondary River Main River Status: Currently Undefined
14	110	W	River Name: - Welsh River Name: - Alternative Name: -	River Type: Culvert Main River Status: Currently Undefined
15	122	W	River Name: - Welsh River Name: - Alternative Name: -	River Type: Culvert Main River Status: Currently Undefined
16	129	W	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Secondary River Main River Status: Currently Undefined
17	159	W	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Secondary River Main River Status: Currently Undefined
18	168	W	River Name: Drain Welsh River Name: - Alternative Name: -	River Type: Secondary River Main River Status: Currently Undefined
19	452	W	River Name: Bottesford Beck Welsh River Name: - Alternative Name: -	River Type: Culvert Main River Status: Currently Undefined
20	453	W	River Name: Bottesford Beck Welsh River Name: - Alternative Name: -	River Type: Secondary River Main River Status: Currently Undefined
21	453	W	River Name: Bottesford Beck Welsh River Name: - Alternative Name: -	River Type: Secondary River Main River Status: Currently Undefined


7a. Environment Agency/Natural Resources Wales Flood Map for Planning (from rivers and the sea)

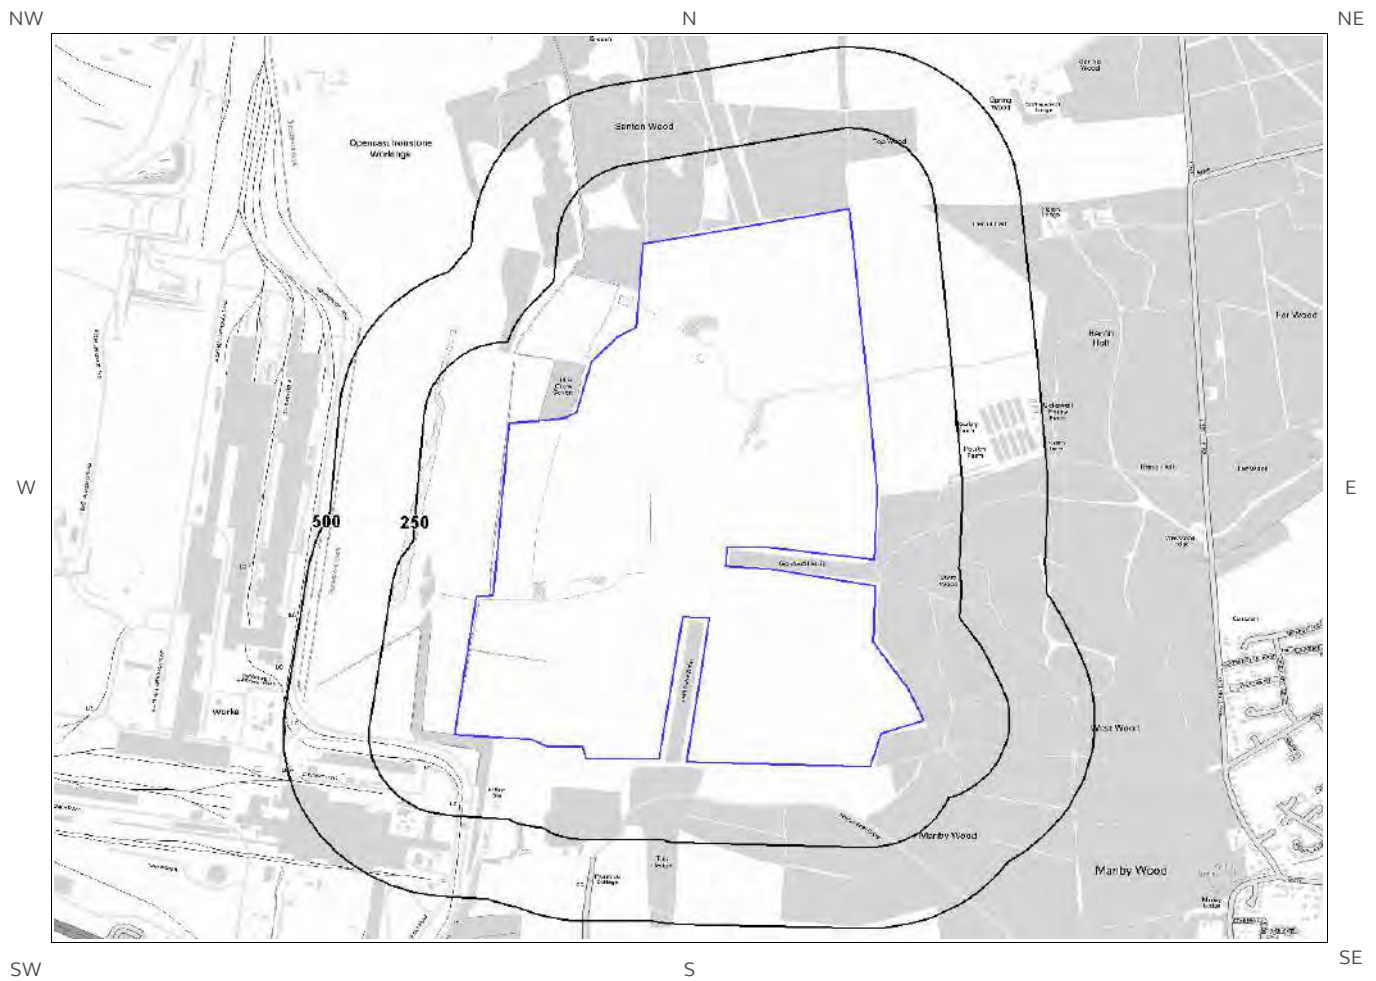


© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



7b. Environment Agency/Natural Resources Wales Risk of Flooding from Rivers and the Sea (RoFRaS) Map

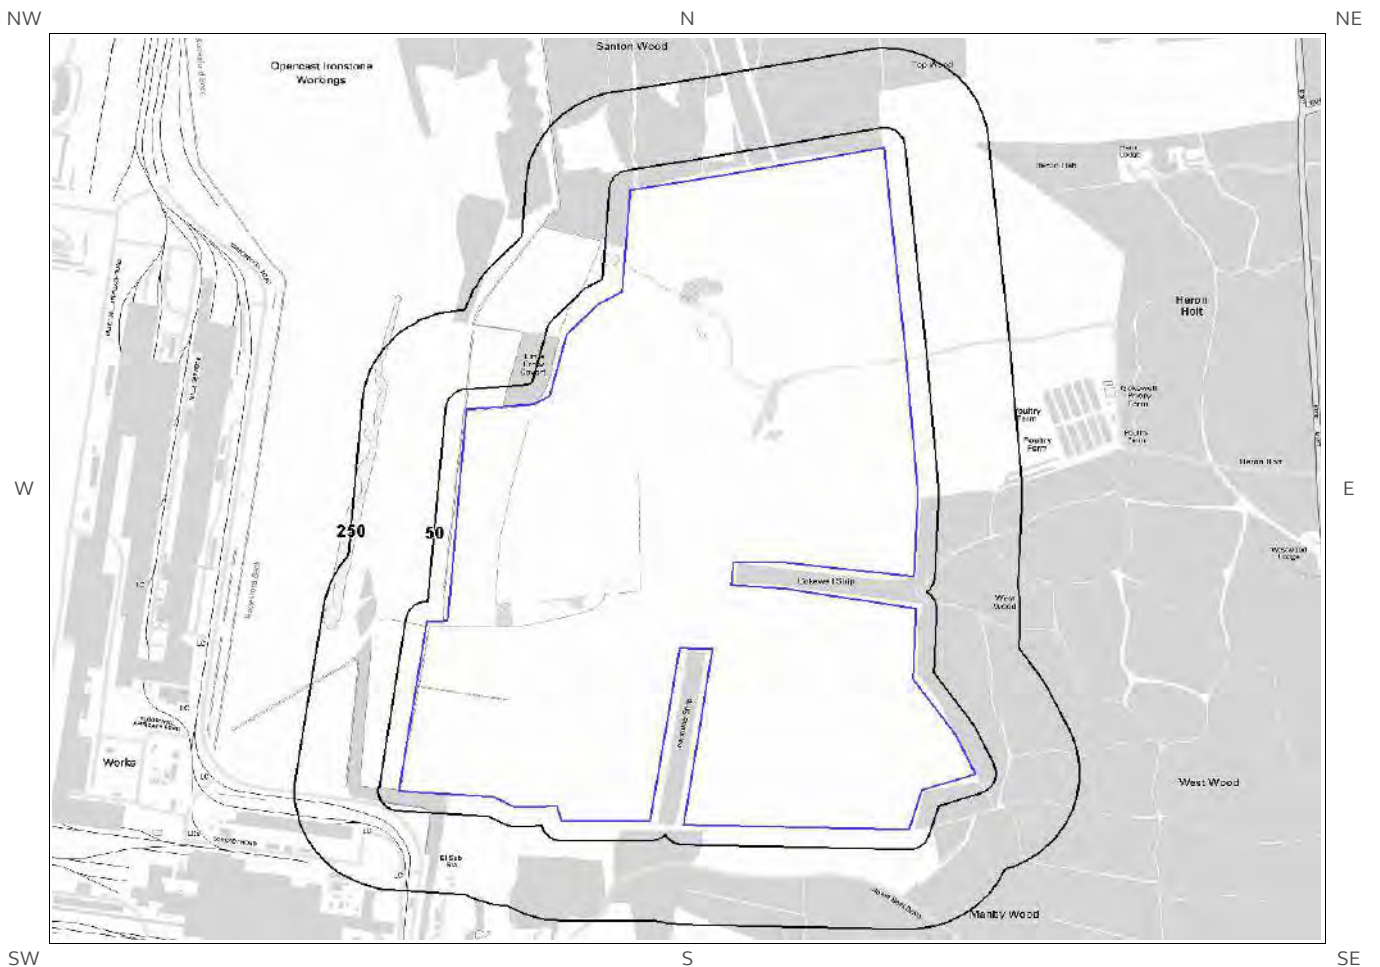

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

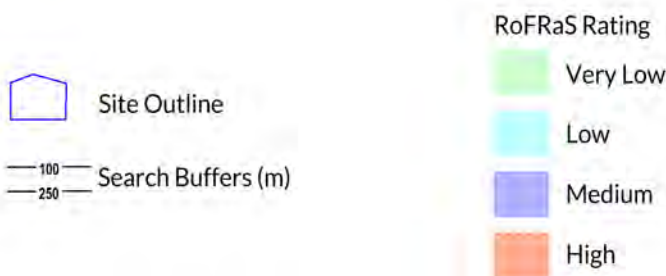

7 Flooding

7.1 River and Coastal Zone 2 Flooding

Is the site within 250m of an Environment Agency/Natural Resources Wales Zone 2 floodplain? No

Environment Agency/Natural Resources Wales Zone 2 floodplains estimate the annual probability of flooding as between 1 in 1000 (0.1%) and 1 in 100 (1%) from rivers and between 1 in 1000 (0.1%) and 1 in 200 (0.5%) from the sea. Any relevant data is represented on Map 7a – Flood Map for Planning:

Database searched and no data found.

7.2 River and Coastal Zone 3 Flooding

Is the site within 250m of an Environment Agency/Natural Resources Wales Zone 3 floodplain? No

Zone 3 shows the extent of a river flood with a 1 in 100 (1%) or greater chance of occurring in any year or a sea flood with a 1 in 200 (0.5%) or greater chance of occurring in any year. Any relevant data is represented on Map 7a – Flood Map for Planning.

Database searched and no data found.

7.3 Risk of Flooding from Rivers and the Sea (RoFRaS) Flood Rating

What is the highest risk of flooding onsite? Very Low

The Environment Agency/Natural Resources Wales RoFRaS database provides an indication of river and coastal flood risk at a national level on a 50m grid with the flood rating at the centre of the grid calculated and given above. The data considers the probability that the flood defences will overtop or breach by considering their location, type, condition and standard of protection.

RoFRaS data for the study site indicates the property is in an area with a Very Low (less than 1 in 1000) chance of flooding in any given year.

7.4 Flood Defences

Are there any Flood Defences within 250m of the study site? No
Database searched and no data found.

7.5 Areas benefiting from Flood Defences

Are there any areas benefiting from Flood Defences within 250m of the study site? No

7.6 Areas benefiting from Flood Storage

Are there any areas used for Flood Storage within 250m of the study site?

No

7.7 Groundwater Flooding Susceptibility Areas

7.7.1 Are there any British Geological Survey groundwater flooding susceptibility areas within 50m of the boundary of the study site? Yes

Does this relate to Clearwater Flooding or Superficial Deposits Flooding? Superficial Deposits Flooding

Notes: Groundwater flooding may either be associated with shallow unconsolidated sedimentary aquifers which overlie unproductive aquifers (Superficial Deposits Flooding), or with unconfined aquifers (Clearwater Flooding).

7.7.2 What is the highest susceptibility to groundwater flooding in the search area based on the underlying geological conditions?

Potential at Surface

Where potential for groundwater flooding to occur at surface is indicated, this means that given the geological conditions in the area groundwater flooding hazard should be considered in all land-use planning decisions. It is recommended that other relevant information e.g. records of previous incidence of groundwater flooding, rainfall, property type, and land drainage information be investigated in order to establish relative, but not absolute, risk of groundwater flooding.

7.8 Groundwater Flooding Confidence Areas


What is the British Geological Survey confidence rating in this result?

High

Notes: Groundwater flooding is defined as the emergence of groundwater at the ground surface or the rising of groundwater into man-made ground under conditions where the normal range of groundwater levels is exceeded.

The confidence rating is on a threefold scale - Low, Moderate and High. This provides a relative indication of the BGS confidence in the accuracy of the susceptibility result for groundwater flooding. This is based on the amount and precision of the information used in the assessment. In areas with a relatively lower level of confidence the susceptibility result should be treated with more caution. In other areas with higher levels of confidence the susceptibility result can be used with more confidence.

8. Designated Environmentally Sensitive Sites Map

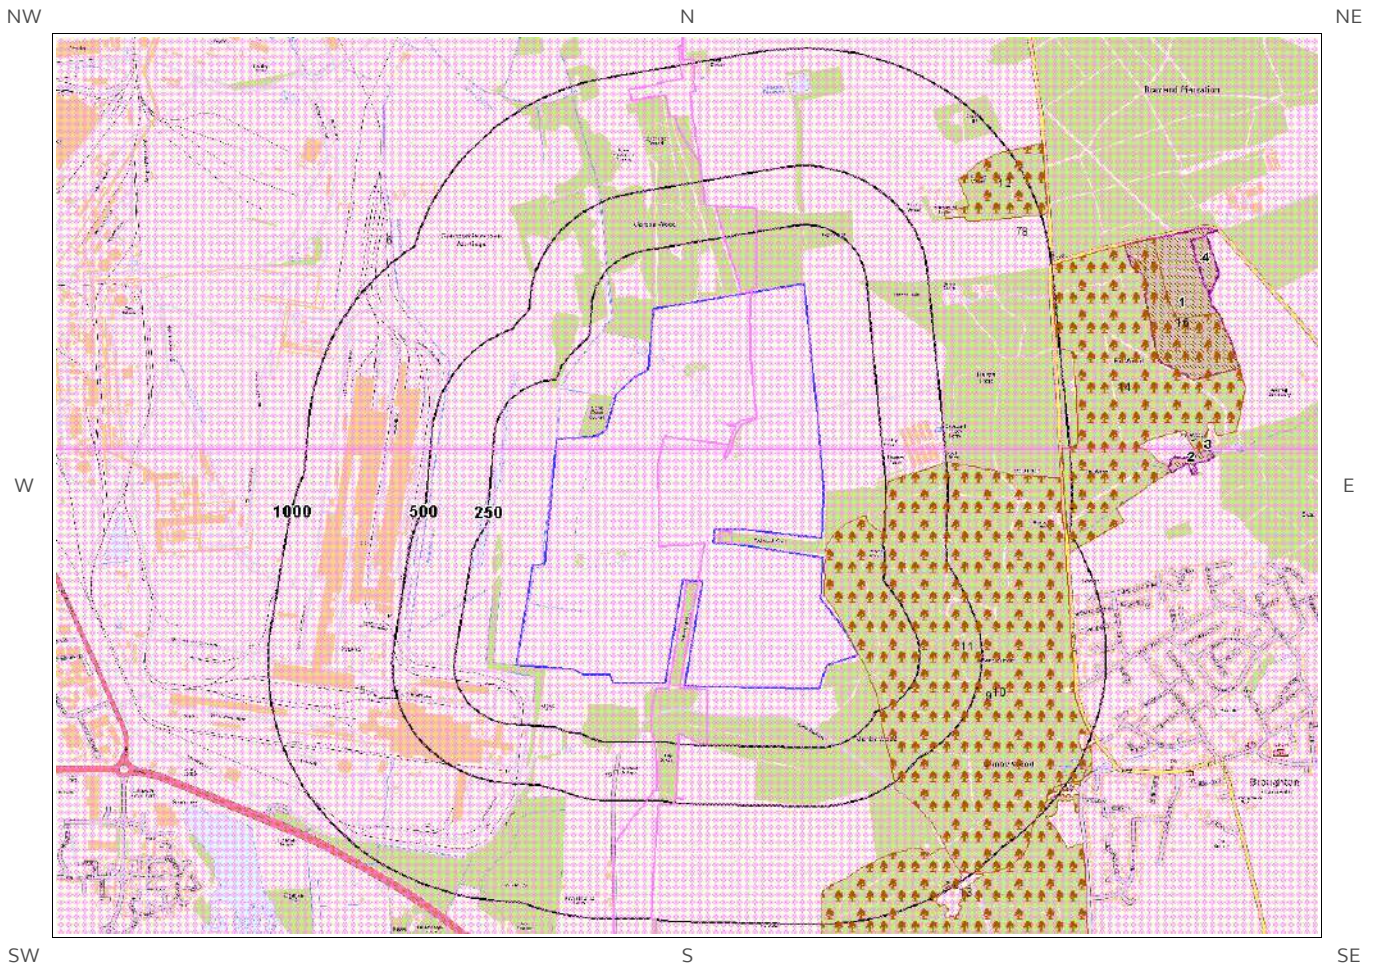

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



8. Designated Environmentally Sensitive Sites

Presence of Designated Environmentally Sensitive Sites within 2000m of the study site? Yes

8.1 Records of Sites of Special Scientific Interest (SSSI) within 2000m of the study site:

4

The following Site of Special Scientific Interest (SSSI) records provided by Natural England/Natural Resources Wales are represented as polygons on the Designated Environmentally Sensitive Sites Map:

ID	Distance (m)	Direction	SSSI Name	Data Source
1	1300	E	Broughton Far Wood	Natural England
2	1387	E	Broughton Alder Wood	Natural England
3	1549	E	Broughton Alder Wood	Natural England
4	1570	E	Broughton Far Wood	Natural England

8.2 Records of National Nature Reserves (NNR) within 2000m of the study site:

0

Database searched and no data found.

8.3 Records of Special Areas of Conservation (SAC) within 2000m of the study site:

0

Database searched and no data found.

8.4 Records of Special Protection Areas (SPA) within 2000m of the study site:

0

Database searched and no data found.

8.5 Records of Ramsar sites within 2000m of the study site:

0

Database searched and no data found.

8.6 Records of Ancient Woodland within 2000m of the study site:

6

The following records of Designated Ancient Woodland provided by Natural England/Natural Resources Wales are represented as polygons on the Designated Environmentally Sensitive Sites Map:

ID	Distance (m)	Direction	Ancient Woodland Name	Data Source
11	1	NE	UNKNOWN	Ancient Replanted Woodland
12	633	NE	UNKNOWN	Ancient Replanted Woodland
13	759	S	UNKNOWN	Ancient Replanted Woodland
14	958	NE	UNKNOWN	Ancient Replanted Woodland
15	967	SE	UNKNOWN	Ancient Replanted Woodland
16	1300	E	UNKNOWN	Ancient and Semi-Natural Woodland

8.7 Records of Local Nature Reserves (LNR) within 2000m of the study site:

0

Database searched and no data found.

8.8 Records of World Heritage Sites within 2000m of the study site:

0

Database searched and no data found.

8.9 Records of Environmentally Sensitive Areas within 2000m of the study site:

0

Database searched and no data found.

8.10 Records of Areas of Outstanding Natural Beauty (AONB) within 2000m of the study site:

0

Database searched and no data found.

8.11 Records of National Parks (NP) within 2000m of the study site:

0

Database searched and no data found.

8.12 Records of Nitrate Sensitive Areas within 2000m of the study site:

0

Database searched and no data found.

8.13 Records of Nitrate Vulnerable Zones within 2000m of the study site:

6

The following Nitrate Vulnerable Zone records produced by DEFRA are represented as polygons on the Designated Environmentally Sensitive Sites Map:

ID	Distance (m)	Direction	NVZ Name	Data Source
5	0	On Site	Existing	DEFRA
6	0	On Site	Existing	DEFRA
7	0	On Site	Existing	DEFRA
8	0	On Site	Existing	DEFRA
9	0	On Site	Existing	DEFRA
10	0	On Site	Existing	DEFRA

8.14 Records of Green Belt land within 2000m of the study site:

0

Database searched and no data found.

9. Natural Hazards Findings

9.1 Detailed BGS GeoSure Data

BGS GeoSure Data has been searched to 50m. The data is included in tabular format. If you require further information on geology and ground stability, please obtain a **Groundsure Geo Insight**, available from our [website](#). The following information has been found:

9.1.1 Shrink Swell

What is the maximum Shrink-Swell* hazard rating identified on the study site? Low

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
Ground conditions predominantly medium plasticity. Do not plant trees with high soil moisture demands near to buildings. For new build, consideration should be given to advice published by the National House Building Council (NHBC) and the Building Research Establishment (BRE). There is a possible increase in construction cost to reduce potential shrink-swell problems. For existing property, there is a possible increase in insurance risk, especially during droughts or where vegetation with high moisture demands is present.

9.1.2 Landslides

What is the maximum Landslide* hazard rating identified on the study site? Moderate

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
Significant potential for slope instability with relatively small changes in ground conditions. Avoid large amounts of water entering the ground through pipe leakage or soak-aways. Do not undercut or place large amounts of material on slopes without technical advice. For new build consider the potential and consequences of ground movement during excavations, or consequence of changes to loading or drainage. For existing property probable increase in insurance risk is likely due to potential natural slope instability after changes to ground conditions such as a very long, excessively wet winter.

9.1.3 Soluble Rocks

What is the maximum Soluble Rocks* hazard rating identified on the study site? Very Low

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard
Significant soluble rocks are present. Problems unlikely except with considerable surface or subsurface water flow. No special actions required to avoid problems due to soluble rocks. No special ground investigation required or increased construction costs are likely. An increase in financial risk due to potential problems with soluble rocks is unlikely.

* This indicates an automatically generated 50m buffer and site.

9.1.4 Compressible Ground

What is the maximum Compressible Ground* hazard rating identified on the study site? Moderate

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard

Significant potential for compressibility problems. Avoid large differential loadings of ground. Do not drain or de-water ground near the property without technical advice. For new build consider possibility of compressible ground in ground investigation, construction and building design. Consider effects of groundwater changes. Extra construction costs are likely. For existing property possible increase in insurance risk from compressibility, especially if water conditions or loading of the ground change significantly.

9.1.5 Collapsible Rocks

What is the maximum Collapsible Rocks* hazard rating identified on the study site? Very Low

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard

Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.

9.1.6 Running Sand

What is the maximum Running Sand** hazard rating identified on the study site? Low

The following natural subsidence information provided by the British Geological Survey is not represented on mapping:

Hazard

Possibility of running sand problems after major changes in ground conditions. Normal maintenance to avoid leakage of water-bearing services or water bodies (ponds, swimming pools) should reduce likelihood of problems due to running sand. For new build consider possibility of running sand into trenches or excavations if water table is high or sandy strata are exposed to water. Avoid concentrated water inputs to site. Unlikely to be an increase in construction costs due to potential for running sand. For existing property no significant increase in insurance risk due to running sand problems is likely.

9.2 Radon

9.2.1 Radon Affected Areas

Is the property in a Radon Affected Area as defined by the Health Protection Agency (HPA) and if so what percentage of homes are above the Action Level? The property is in a Radon Affected Area, as between 10 and 30% of properties are above the Action Level.

* This indicates an automatically generated 50m buffer and site.

Is the property in an area where Radon Protection are required for new properties or extensions to existing ones as described in publication BR211 by the Building Research Establishment? Full radon protective measures are necessary.

10. Mining

10.1 Coal Mining

Are there any coal mining areas within 75m of the study site? No

Database searched and no data found.

10.2 Non-Coal Mining

Are there any Non-Coal Mining areas within 50m of the study site boundary? Yes

The following non-coal mining information is provided by the BGS:

Distance (m)	Direction	Name	Commodity	Assessment of likelihood
0.0	On Site	Not available	Jet	Sporadic underground mining of restricted extent may have occurred. Potential for difficult ground conditions are unlikely and localised and are at a level where they need not be considered
0.0	On Site	Not available	Jet	Sporadic underground mining of restricted extent may have occurred. Potential for difficult ground conditions are unlikely and localised and are at a level where they need not be considered

Past underground mine workings are uncommon, localised and of limited area. The rock types present in this area are such that minor mineral veins may be present within them on which it is possible that there have been attempts to work these by underground methods and/or it is possible that small scale underground extraction of other materials may have occurred. All such occurrences are likely to be restricted in size and infrequent. It should be noted, however, that there is always the possibility of the existence of other sub-surface excavations, such as wells, cess pits, follies, air raid shelters/bunkers and other military structures etc. that could affect surface ground stability but which are outside the scope of this dataset. However, if in a coalfield area you should still consider a Coal Authority mining search for the area of interest.

10.3 Brine Affected Areas

Are there any brine affected areas within 75m of the study site? No

Guidance: No Guidance Required.

Contact Details

CENTREMAPS

Telephone: 01886 832972
Groundsure@centremaps.co.uk
Open Space, Upper Interfields, Malvern, Worcester, WR14 1UT



British Geological Survey Enquiries

Kingsley Dunham Centre
Keyworth, Nottingham NG12 5GG
Tel: 0115 936 3143.
Fax: 0115 936 3276.
Email:

Web: www.bgs.ac.uk

BGS Geological Hazards Reports and general geological enquiries:
enquiries@bgs.ac.uk



Environment Agency
National Customer Contact Centre, PO Box 544
Rotherham, S60 1BY
Tel: 03708 506 506
Web: www.environment-agency.gov.uk
Email: enquiries@environment-agency.gov.uk



Public Health England
Public information access office
Public Health England, Wellington House
133-155 Waterloo Road, London, SE1 8UG
www.gov.uk/phe
Email: enquiries@phe.gov.uk
Main switchboard: 020 7654 8000



The Coal Authority
200 Lichfield Lane
Mansfield
Notts NG18 4RG
Tel: 0345 7626 848
DX 716176 Mansfield 5
www.coal.gov.uk



Ordnance Survey
Adanac Drive, Southampton
SO16 0AS
Tel: 08456 050505



Local Authority
Authority: North Lincolnshire Council
Phone: 01724 296 296
Web: <http://www.northlincs.gov.uk/>
Address: Civic Centre, Ashby Road, Scunthorpe, North Lincolns, DN16

Gemapping PLC
Virginia Villas, High Street, Hartley Witney,
Hampshire RG27 8NW
Tel: 01252 845444





Groundsure

LOCATION INTELLIGENCE



Acknowledgements: Site of Special Scientific Interest, National Nature Reserve, Ramsar Site, Special Protection Area, Special Area of Conservation data is provided by, and used with the permission of, Natural England who retain the Copyright and Intellectual Property Rights for the data.

PointX © Database Right/Copyright, Thomson Directories Limited © Copyright Link Interchange Network Limited © Database Right/Copyright and Ordnance Survey © Crown Copyright and/or Database Right. All Rights Reserved. Licence Number [03421028].

This report has been prepared in accordance with the Groundsure Ltd standard Terms and Conditions of business for work of this nature.

Standard Terms and Conditions

Groundsure's Terms and Conditions can be viewed online at this link:
<https://www.groundsure.com/terms-and-conditions-sept-2016>



CENTREMAPS

Open Space, Upper Interfields,
Worcester, WR14 1UT

Report Reference: CMAPS-CM-643992-13238-
310717GEO

Your Reference: 13238

Report Date 31 Jul 2017

Report Delivery Method: Email - pdf

Geo Insight

Address: Santon, Scunthorpe, DN16 1XP

Dear Sir/ Madam,

Thank you for placing your order with Groundsure. Please find enclosed the **Groundsure Geo Insight** as requested.

If you need any further assistance, please do not hesitate to contact our helpline on 01886 832972 quoting the above CENTREMAPS reference number.

Yours faithfully,


CENTREMAPS

Enc.
Groundsure Geo Insight

Address: Santon, Scunthorpe, DN16 1XP
Date: 31 Jul 2017
Reference: CMAPS-CM-643992-13238-310717GEO
Client: CENTREMAPS

NW N NE

W E

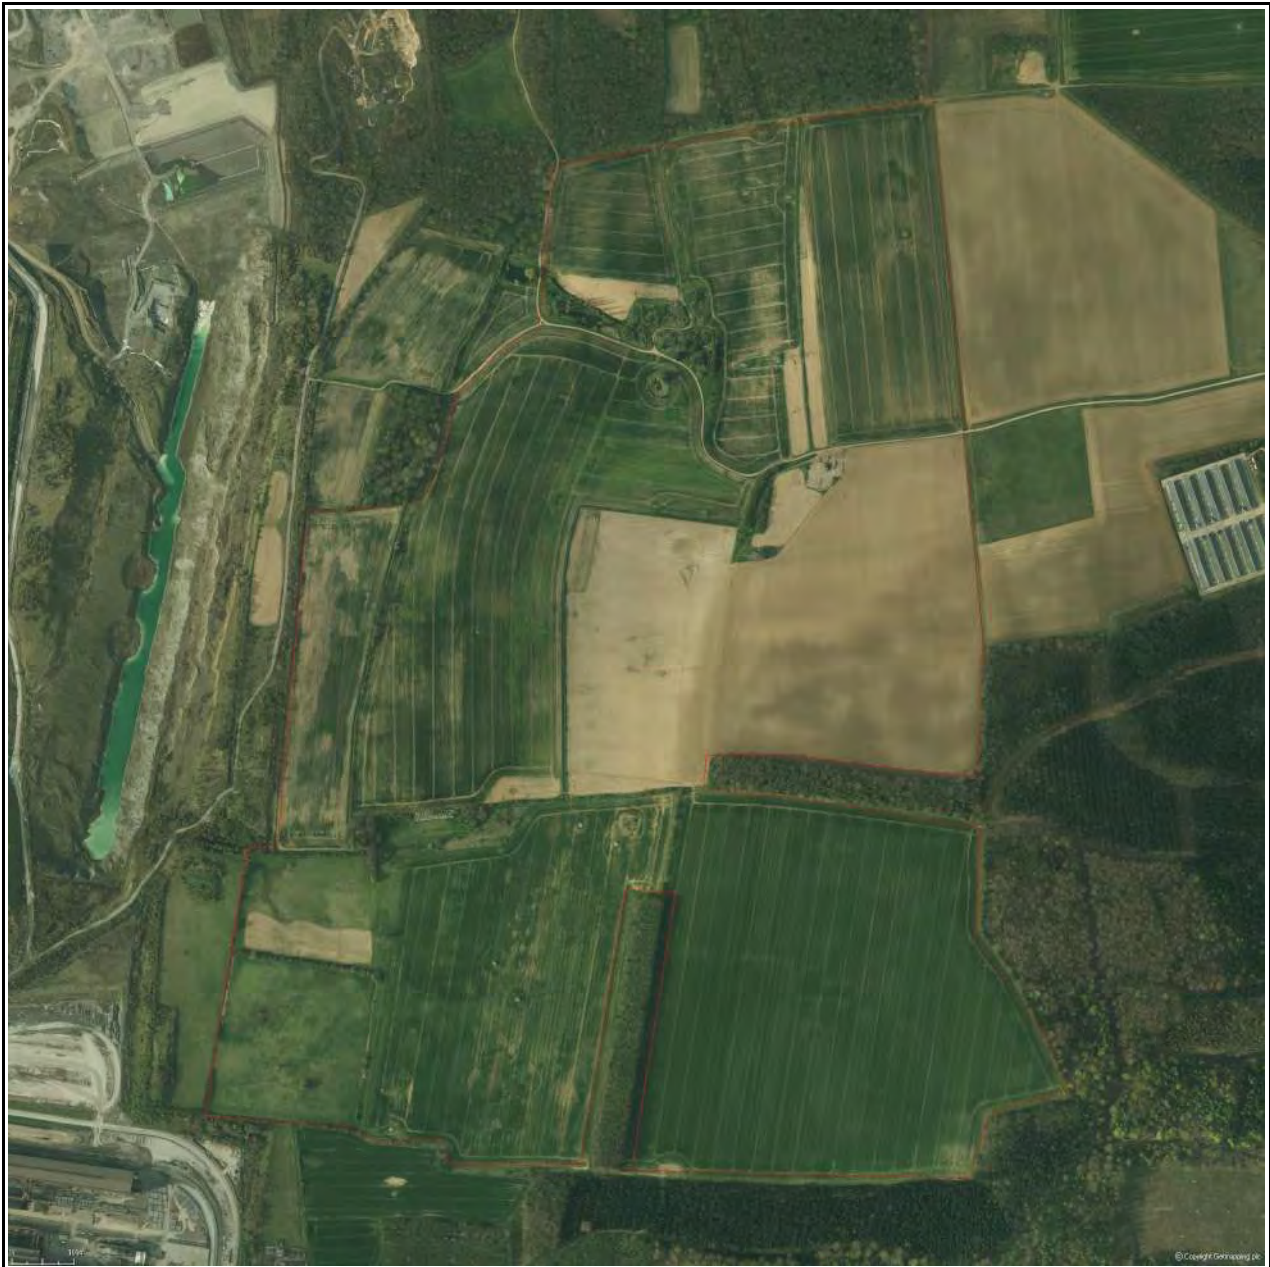

SW S SE

Aerial Photograph Capture date: 16-Aug-2015
Grid Reference: 494018,409842
Site Size: 156.74ha

Contents Page

Contents Page.....	3
Overview of Findings.....	5
1:10,000 Scale Availability.....	8
Availability of 1:10,000 Scale Geology Mapping.....	9
1 Geology (1:10,000 scale).....	10
1.1 Artificial Ground Map (1:10,000 scale).....	10
1. Geology 1:10,000 scale.....	11
1.1 Artificial Ground.....	11
1.2 Superficial Deposits and Landslips Map (1:10,000 scale).....	12
1.2 Superficial Deposits and Landslips.....	13
1.2.1 Superficial Deposits/ Drift Geology.....	13
1.2.2 Landslip.....	13
1.3 Bedrock and Faults Map (1:10,000 scale).....	14
1.3 Bedrock and Faults.....	15
1.3.1 Bedrock/ Solid Geology.....	15
1.3.2 Faults.....	17
2 Geology 1:50,000 Scale.....	18
2.1 Artificial Ground Map.....	18
2. Geology 1:50,000 scale.....	19
2.1 Artificial Ground.....	19
2.1.1 Artificial/ Made Ground.....	19
2.1.2 Permeability of Artificial Ground.....	19
2.2 Superficial Deposits and Landslips Map (1:50,000 scale).....	20
2.2 Superficial Deposits and Landslips.....	21
2.2.1 Superficial Deposits/ Drift Geology.....	21
2.2.2 Permeability of Superficial Ground.....	21
2.2.3 Landslip.....	21
2.2.4 Landslip Permeability.....	21
2.3 Bedrock and Faults Map (1:50,000 scale).....	22
2.3 Bedrock, Solid Geology & Faults.....	23
2.3.1 Bedrock/Solid Geology.....	23
2.3.2 Permeability of Bedrock Ground.....	24
2.3.3 Faults.....	25
3 Radon Data.....	26
3.1 Radon Affected Areas.....	26
3.2 Radon Protection.....	26
4 Ground Workings Map.....	27
4 Ground Workings.....	28
4.1 Historical Surface Ground Working Features derived from Historical Mapping.....	28
4.2 Historical Underground Working Features derived from Historical Mapping.....	29
4.3 Current Ground Workings.....	29
5 Mining, Extraction & Natural Cavities.....	31
5.1 Historical Mining.....	31
5.2 Coal Mining.....	31
5.3 Johnson Poole and Bloomer.....	31
5.4 Non-Coal Mining.....	32
5.5 Non-Coal Mining Cavities.....	32
5.6 Natural Cavities.....	32
5.7 Brine Extraction.....	33
5.8 Gypsum Extraction.....	33
5.9 Tin Mining.....	33
5.10 Clay Mining.....	33
6 Natural Ground Subsidence.....	34
6.1 Shrink-Swell Clay Map.....	34
6.2 Landslides Map.....	35
6.3 Ground Dissolution of Soluble Rocks Map.....	36
6.4 Compressible Deposits Map.....	37
6.5 Collapsible Deposits Map.....	38
6.6 Running Sand Map.....	39

6 Natural Ground Subsidence.....	40
6.1 Shrink-Swell Clays.....	40
6.2 Landslides.....	43
6.3 Ground Dissolution of Soluble Rocks.....	44
6.4 Compressible Deposits.....	45
6.5 Collapsible Deposits.....	45
6.6 Running Sands.....	46
7 Borehole Records.....	50
8 Estimated Background Soil Chemistry.....	53
9 Railways and Tunnels Map.....	58
9 Railways and Tunnels.....	59
9.1 Tunnels	59
9.2 Historical Railway and Tunnel Features	59
9.3 Historical Railways.....	60
9.4 Active Railways.....	60
9.5 Railway Projects.....	60

Overview of Findings

The Groundsure Geo Insight provides high quality geo-environmental information that allows geo-environmental professionals and their clients to make informed decisions and be forewarned of potential ground instability problems that may affect the ground investigation, foundation design and possibly remediation options that could lead to possible additional costs.

The report is based on the BGS 1:50,000 and 1:10,000 Digital Geological Map of Great Britain, BGS Geosure data; BRITPITS database; Non-coal mining data and Borehole Records, Coal Authority data including brine extraction areas, PBA non-coal mining and natural cavities database, Johnson Poole and Bloomer mining data and Groundsure's unique database including historical surface ground and underground workings.

For further details on each dataset, please refer to each individual section in the report as listed. Where the database has been searched a numerical result will be recorded. Where the database has not been searched '-' will be recorded.

Section 1: Geology 1:10,000 Scale

1.1 Artificial Ground	1.1 Is there any Artificial Ground/ Made Ground present beneath the study site at 1:10,000 scale?	Yes
1.2 Superficial Geology and Landslips	1.2.1 Is there any Superficial Ground/Drift Geology present beneath the study site at 1:10,000 scale?*	Yes
	1.2.2 Are there any records of landslip within 500m of the study site boundary at 1:10,000 scale?	No
1.3 Bedrock, Solid Geology and Faults	1.3.1 For records of Bedrock and Solid Geology beneath the study site* see the detailed findings section.	
	1.3.2 Are there any records of faults within 500m of the study site boundary at 1:10,000 scale?	Yes

Section 2: Geology 1:50,000 Scale

2.1 Artificial Ground	2.1.1 Is there any Artificial Ground/ Made Ground present beneath the study site?	Yes
	2.1.2 Are there any records relating to permeability of artificial ground within the study site*boundary?	Yes
2.2 Superficial Geology and Landslips	2.2.1 Is there any Superficial Ground/Drift Geology present beneath the study site?*	Yes
	2.2.2 Are there any records of permeability of superficial ground within 500m of the study site?	Yes
	2.2.3 Are there any records of landslip within 500m of the study site boundary?	No
	2.2.4 Are there any records relating to permeability of landslips within the study site* boundary?	No

Section 2: Geology 1:50,000 Scale

2.3 Bedrock, Solid Geology and Faults

2.3.1 For records of Bedrock and Solid Geology beneath the study site* see the detailed findings section.

2.3.2 Are there any records relating to permeability of bedrock ground within the study site boundary?

Yes

2.3.3 Are there any records of faults within 500m of the study site boundary?

Yes

Section 3: Radon

3. Radon

3.1 Is the property in a Radon Affected Area as defined by the Health Protection Agency (HPA) and if so what percentage of homes are above the Action Level?

The property is in a Radon Affected Area, as between 10 and 30% of properties are above the Action Level.

3.2 Radon Protection

Full radon protective measures are necessary.

Section 4: Ground Workings


	On-site	0-50m	51-250	251-500	501-1000
4.1 Historical Surface Ground Working Features from Small Scale Mapping	13	0	14	Not Searched	Not Searched
4.2 Historical Underground Workings from Small Scale Mapping	0	0	0	0	0
4.3 Current Ground Workings	0	0	0	2	0

Section 5: Mining, Extraction & Natural Cavities

	On-site	0-50m	51-250	251-500	501-1000
5.1 Historical Mining	0	0	3	0	2
5.2 Coal Mining	0	0	0	0	0
5.3 Johnson Poole and Bloomer Mining Area	5	1	0	8	4
5.4 Non-Coal Mining*	2	0	0	0	1
5.5 Non-Coal Mining Cavities	1	0	0	1	0
5.5 Natural Cavities	0	0	0	0	0


Section 5: Mining, Extraction & Natural Cavities	On-site	0-50m	51-250	251-500	501-1000
5.6 Brine Extraction	0	0	0	0	0
5.7 Gypsum Extraction	0	0	0	0	0
5.8 Tin Mining	0	0	0	0	0
5.9 Clay Mining	0	0	0	0	0
Section 6: Natural Ground Subsidence					
6.1 Shrink-Swell Clay	On-site				
6.2 Landslides	Low				
6.3 Ground Dissolution of Soluble Rocks	Moderate				
6.4 Compressible Deposits	Very Low				
6.5 Collapsible Deposits	Moderate				
6.5 Running Sand	Very Low				
Section 7: Borehole Records					
7 BGS Recorded Boreholes	On-site	0-50m	51-250		
	27	8	14		
Section 8: Estimated Background Soil Chemistry					
8 Records of Background Soil Chemistry	On-site	0-50m	51-250		
	164	37	0		
Section 9: Railways and Tunnels					
9.1 Tunnels	On-site	0-50m	51-250	250-500	
	0	0	0	Not Searched	
9.2 Historical Railway and Tunnel Features	1	0	3	Not Searched	
9.3 Historical Railways	0	0	0	Not Searched	
9.4 Active Railways	0	0	16	Not Searched	
9.5 Railway Projects	0	0	0	0	

1:10,000 Scale Availability

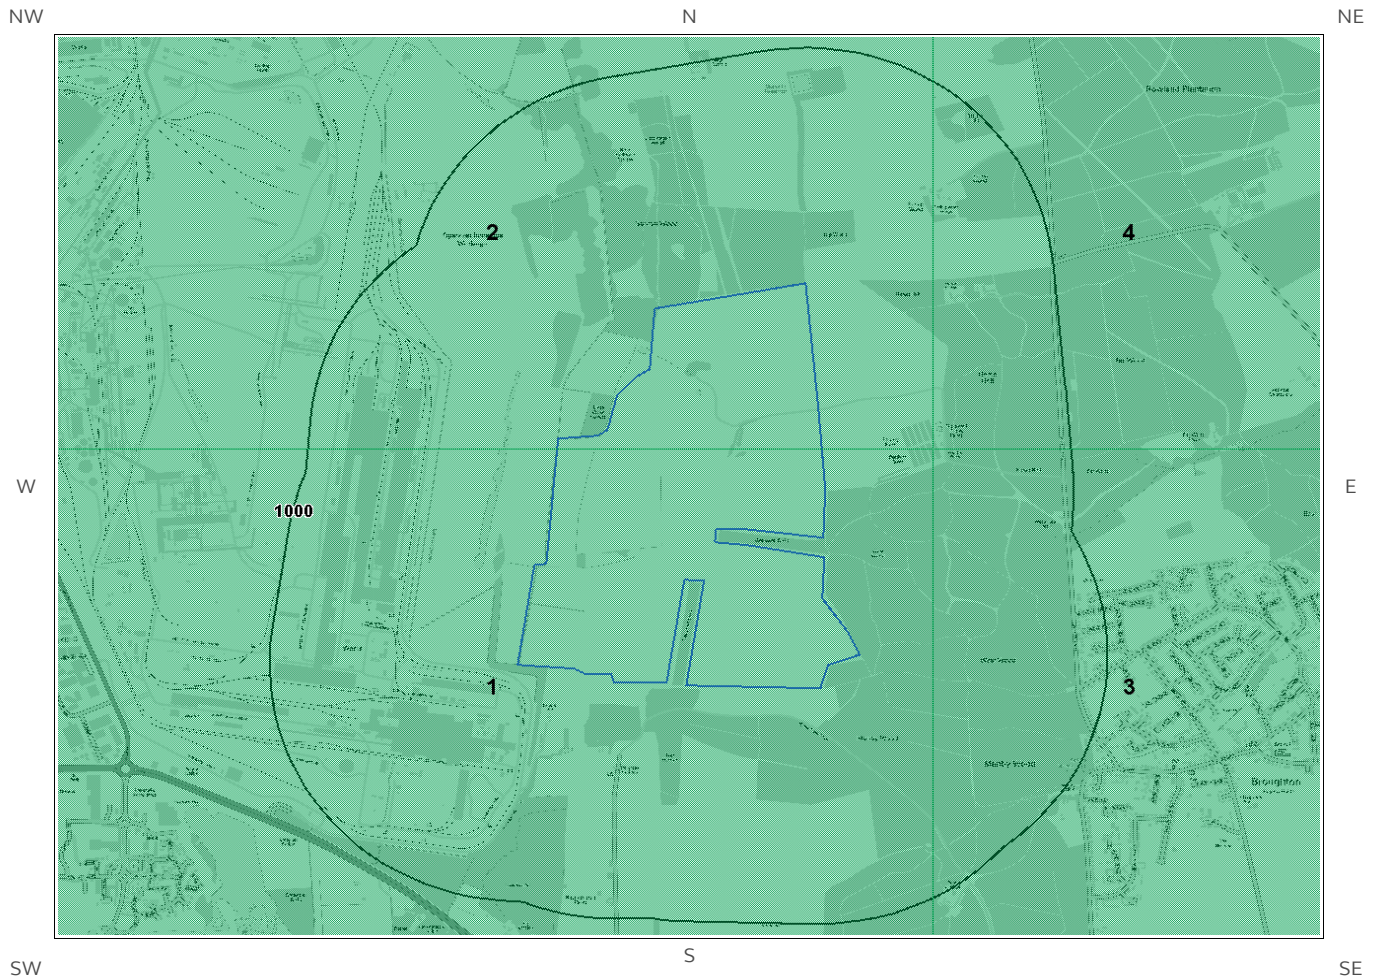

1_10,000 Availability Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

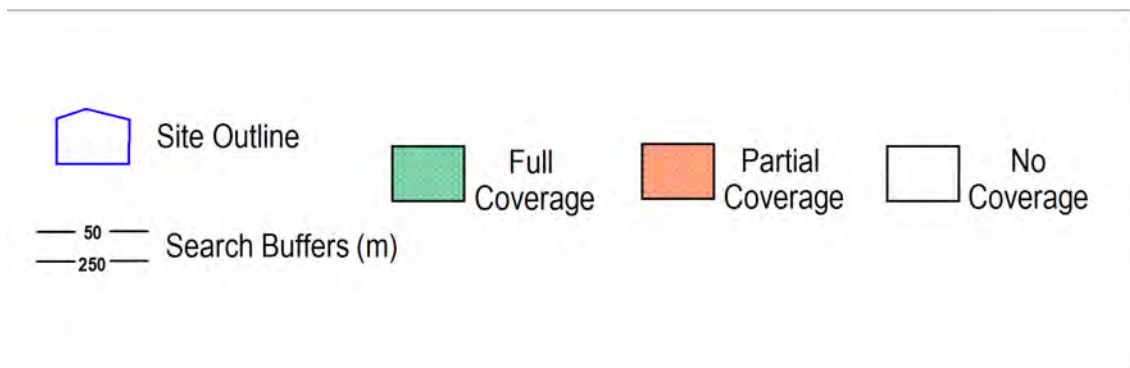

Availability of 1:10,000 Scale Geology Mapping

The following information represents the availability of the key components of the 1:10,000 scale geological data.

ID	Distance	Artificial Coverage	Superficial Coverage	Bedrock Coverage	Mass Movement Coverage
1	0.0	Some deposits are mapped	Full	Full	No coverage
2	0.0	Some deposits are mapped	Full	Full	Some deposits are mapped
3	295.0	Some deposits are mapped	Full	Full	No coverage
4	444.0	Some deposits are mapped	Full	Full	No coverage


Guidance: The 1:10,000 scale geological interpretation is the most detailed generally available from BGS and is the scale at which most geological surveying is carried out in the field. The database is presented as four types of geology (artificial, mass movement, superficial and bedrock), although not all themes are mapped or available on every map sheet. Therefore a coverage layer showing the availability of the four themes is presented above.

The definitions of coverage are as follows:

Geology	Full Coverage	Partial Coverage	No Coverage
Bedrock	The whole tile has been mapped	Some but not all the tile has been mapped	No coverage
Superficial	The whole tile has been mapped	Some but not all of the tile has been mapped	No coverage
Artificial	Some deposits are mapped on this tile	-	No deposits are mapped
Mass Movement	Some deposits are mapped on this tile	-	No coverage


1 Geology (1:10,000 scale).

1.1 Artificial Ground Map (1:10,000 scale)

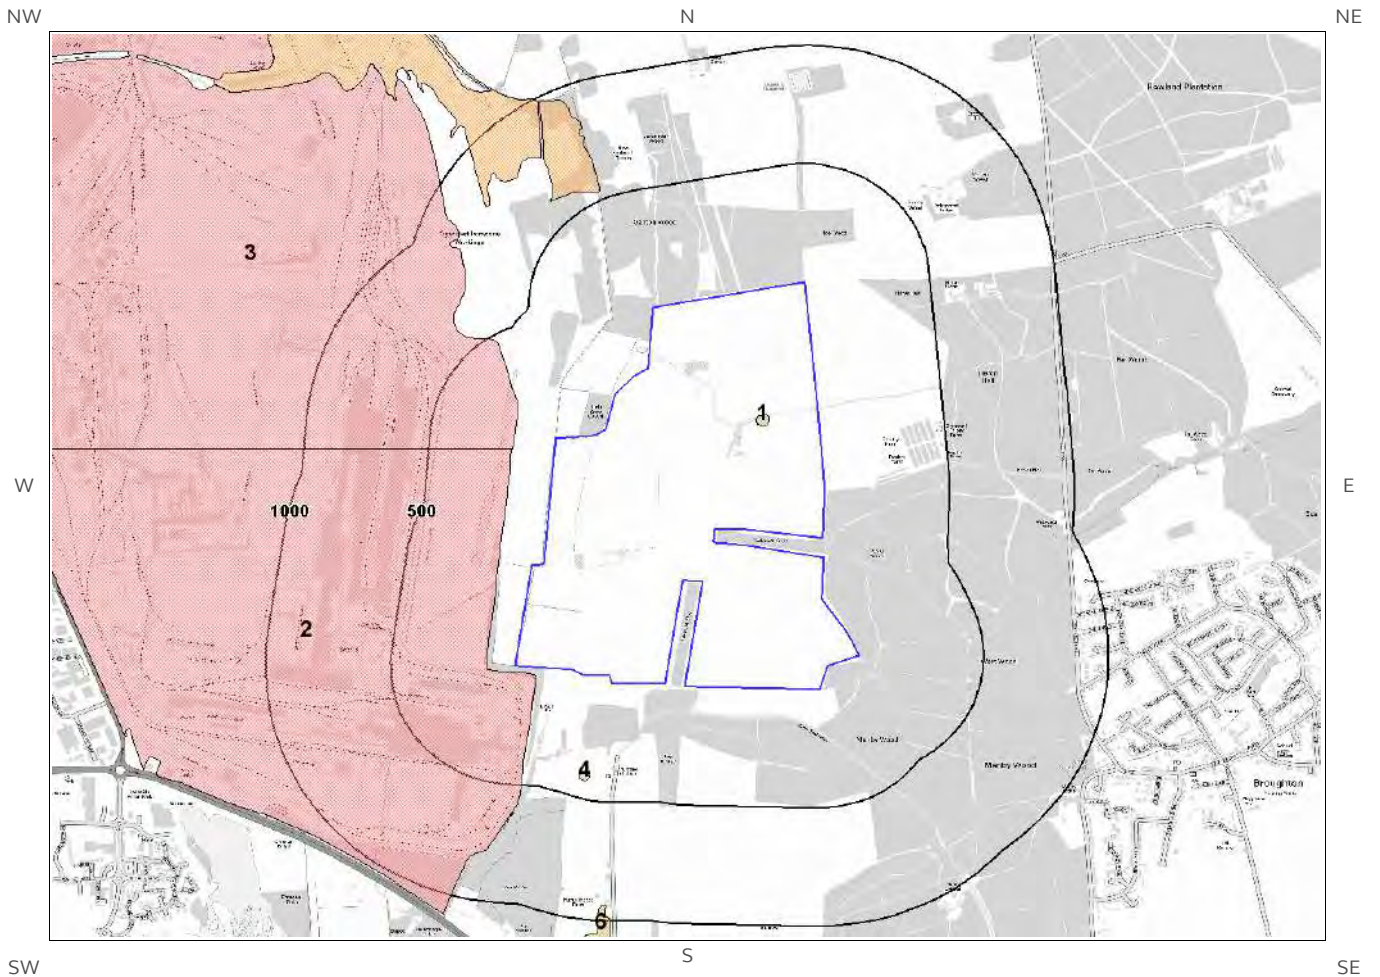

Artificial Ground Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

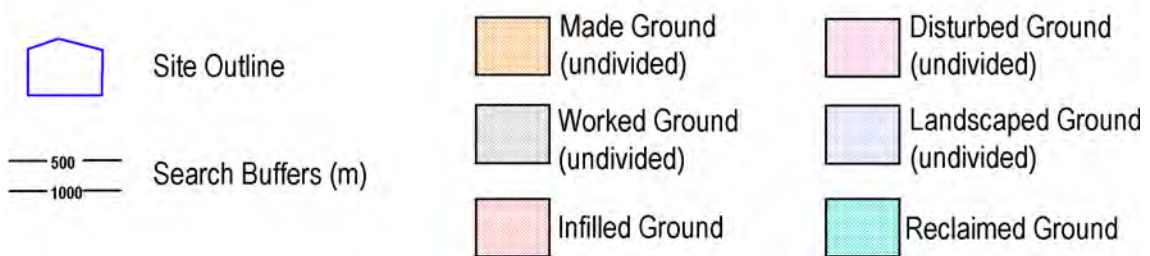

1. Geology 1:10,000 scale


1.1 Artificial Ground

The following geological information represented on the mapping is derived from 1:10,000 scale BGS Geological mapping.

Are there any records of Artificial/ Made Ground within 500m of the study site boundary at 1:10,000 scale? Yes




ID	Distance	Direction	LEX Code	Description	Rock Description
1	0.0	On Site	MGR-ARTDP	Made Ground (Undivided)	Artificial Deposit
2	24.0	S	WMGR-ARTDP	Infilled Ground	Artificial Deposit
3	165.0	W	WMGR-ARTDP	Infilled Ground	Artificial Deposit
4	390.0	S	MGR-ARTDP	Made Ground (Undivided)	Artificial Deposit

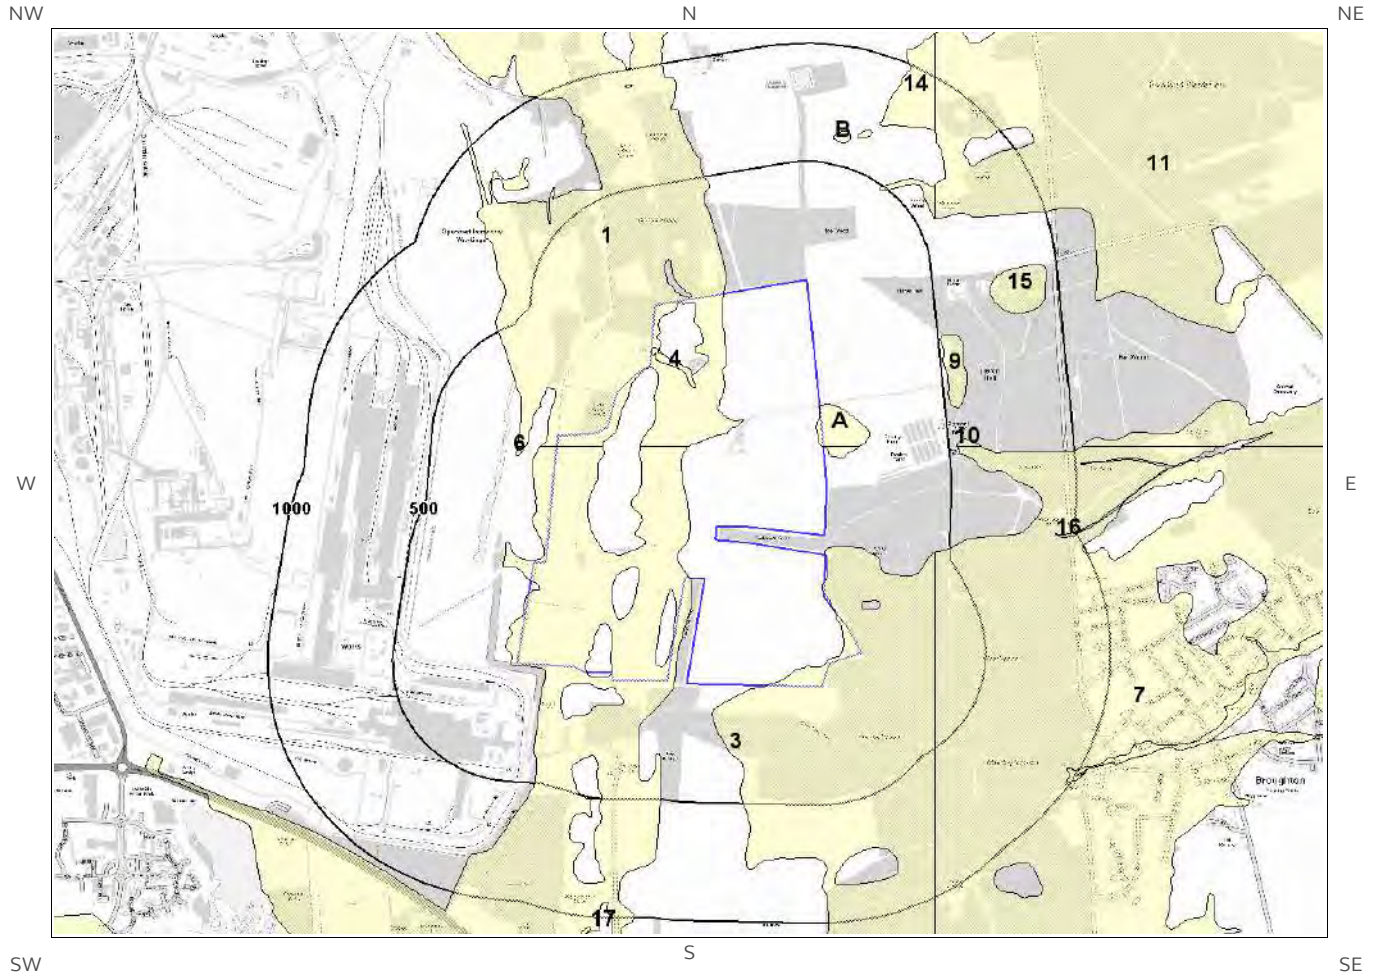1.2 Superficial Deposits and Landslips Map (1:10,000 scale)



Artificial Ground Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

-  Site Outline
-  500
-  1000
- Search Buffers (m)

1.2 Superficial Deposits and Landslips

The following geological information represented on the mapping is derived from 1:10,000 scale BGS Geological mapping

1.2.1 Superficial Deposits/ Drift Geology

Are there any records of Superficial Deposits/ Drift Geology within 500m of the study site boundary at 1:10,000 scale? Yes

ID	Distance (m)	Direction	LEX Code	Description	Rock Description
1	0.0	On Site	BSA1-S	Blown Sand, 1 - Sand	Sand
2A	0.0	On Site	BSA1-S	Blown Sand, 1 - Sand	Sand
3	0.0	On Site	BSA1-S	Blown Sand, 1 - Sand	Sand
4	0.0	On Site	ALV-XCZSV	Alluvium - Clay, Silt, Sand And Gravel	Clay, Silt, Sand And Gravel
5A	0.0	On Site	BSA1-S	Blown Sand, 1 - Sand	Sand
6	128.0	W	BSA1-S	Blown Sand, 1 - Sand	Sand
7	295.0	E	BSA1-S	Blown Sand, 1 - Sand	Sand
8	479.0	NE	BSA1-S	Blown Sand, 1 - Sand	Sand

1.2.2 Landslip


Are there any records of Landslip within 500m of the study site boundary at 1:10,000 scale? No

Database searched and no data found.

The geology map for the site and surrounding area are extracted from the BGS Digital Geological Map of Great Britain at 1:10,000 scale


This Geology shows the main components as discrete layers, these are: Artificial / Made Ground, Superficial / Drift Geology and Landslips. These are all displayed with the BGS Lexicon code for the rock unit and BGS sheet number. Not all of the main geological components have nationwide coverage.

1.3 Bedrock and Faults Map (1:10,000 scale)

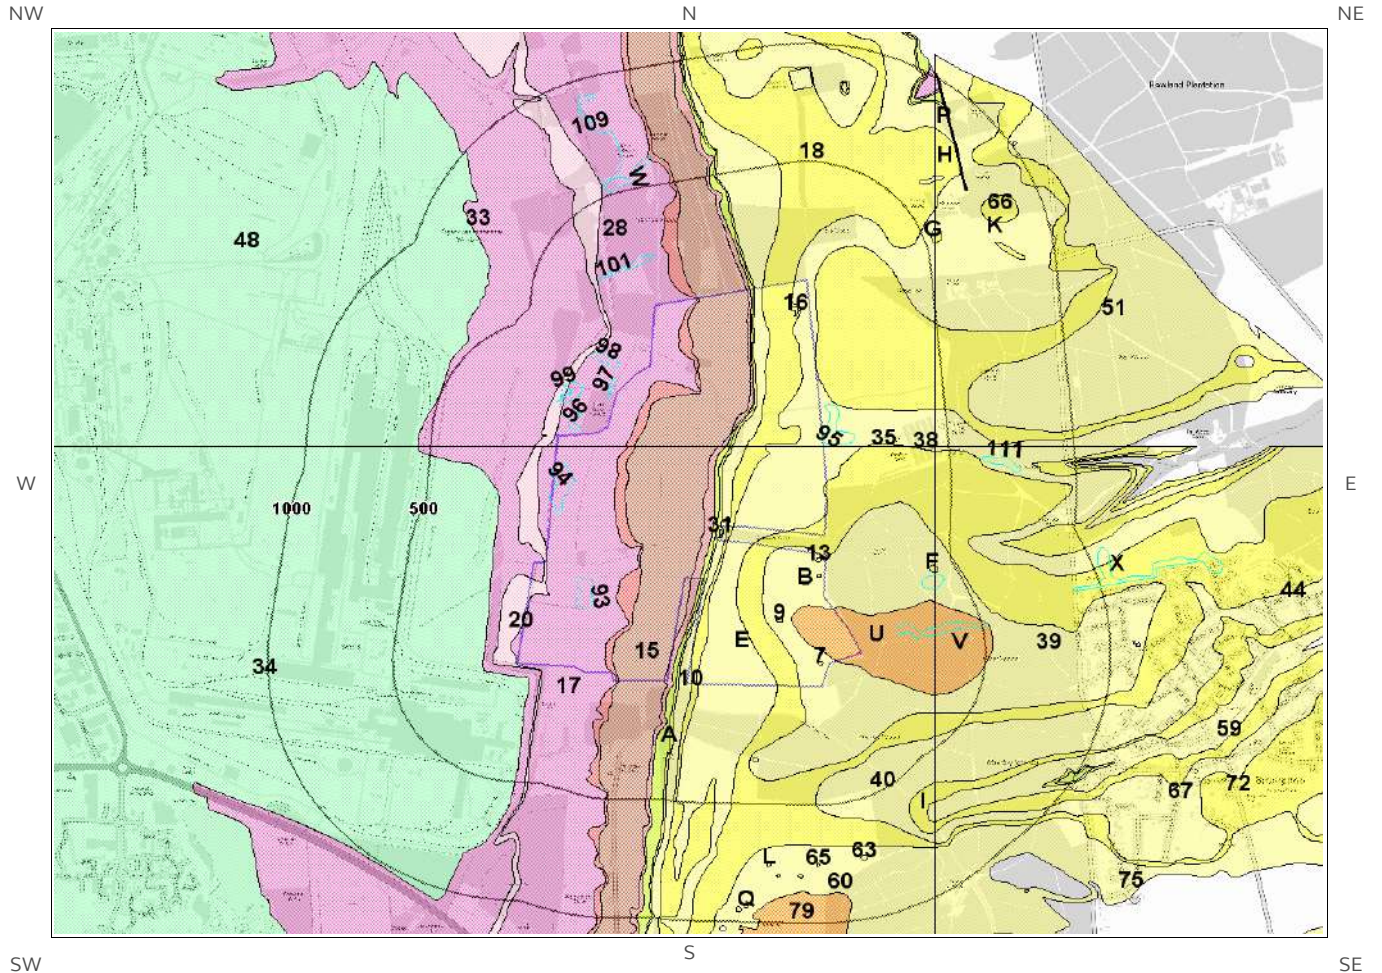

Bedrock and Faults Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



1.3 Bedrock and Faults

The following geological information represented on the mapping is derived from 1:10,000 scale BGS Geological mapping.

1.3.1 Bedrock/ Solid Geology

Records of Bedrock/Solid Geology within 500m of the study site boundary at 1:10,000 scale.

ID	Distance (m)	Direction	LEX Code	Description	Rock Age
1A	0.0	On Site	GRF-SDSM	Grantham Formation - Sandstone, Siltstone And Mudstone	Aalenian Age
2	0.0	On Site	SNO-LMOOL	Santon Oolite - Ooidal Limestone	Bajocian Age
3E	0.0	On Site	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age
4U	0.0	On Site	HIL-LMOOL	Hibaldstow Limestone - Ooidal Limestone	Bajocian Age
5	0.0	On Site	NS-FGSST	Northampton Sand Formation - Ferruginous Sandstone	Aalenian Age
6	0.0	On Site	SYL-LMAR	Scawby Limestone - Interbedded Limestone And [subequal/subordinate] Argillaceous Rocks	Bajocian Age
7	0.0	On Site	KCMK-LMST	Kirton Cementstone Beds (knoll-reef) - Limestone	Bajocian Age
8B	0.0	On Site	KCMK-LMST	Kirton Cementstone Beds (knoll-reef) - Limestone	Bajocian Age
9	0.0	On Site	KCMK-LMST	Kirton Cementstone Beds (knoll-reef) - Limestone	Bajocian Age
10	0.0	On Site	RVB-LMAR	Raventhorpe Beds - Interbedded Limestone And [subequal/subordinate] Argillaceous Rocks	Bajocian Age
11	0.0	On Site	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age
12A	0.0	On Site	CML-LMST	Cleatham Limestone - Limestone	Bajocian Age
13	0.0	On Site	KCMK-LMST	Kirton Cementstone Beds (knoll-reef) - Limestone	Bajocian Age
14B	0.0	On Site	KCMK-LMST	Kirton Cementstone Beds (knoll-reef) - Limestone	Bajocian Age
15	0.0	On Site	WHM-MDST	Whitby Mudstone Formation - Mudstone	Toarcian Age
16	0.0	On Site	RVB-LMAR	Raventhorpe Beds - Interbedded Limestone And [subequal/subordinate] Argillaceous Rocks	Bajocian Age
17	0.0	On Site	CHAM-MDST	Charmouth Mudstone Formation - Mudstone	Pliensbachian Age - Sinemurian Age
18	0.0	On Site	SNO-LMOOL	Santon Oolite - Ooidal Limestone	Bajocian Age
19	0.0	On Site	MRB-FGLS	Marlstone Rock Formation - Ferruginous Limestone And Ferruginous Sandstone	Toarcian Age - Pliensbachian Age
20	0.0	On Site	PTNI-FEST	Pecten Ironstone (bed) - Ironstone	Pliensbachian Age
21	0.0	On Site	CHAM-MDST	Charmouth Mudstone Formation - Mudstone	Pliensbachian Age - Sinemurian Age
22C	0.0	On Site	MRB-FGLS	Marlstone Rock Formation - Ferruginous Limestone And Ferruginous Sandstone	Toarcian Age - Pliensbachian Age

ID	Distance (m)	Direction	LEX Code	Description	Rock Age
23C	0.0	On Site	WHM-MDST	Whitby Mudstone Formation - Mudstone	Toarcian Age
24D	0.0	On Site	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age
25S	0.0	On Site	GRF-SDSM	Grantham Formation - Sandstone, Siltstone And Mudstone	Aalenian Age
26	0.0	On Site	CML-LMST	Cleatham Limestone - Limestone	Bajocian Age
27J	0.0	On Site	RVB-LMAR	Raventhorpe Beds - Interbedded Limestone And [subequal/subordinate] Argillaceous Rocks	Bajocian Age
28	0.0	On Site	CHAM-MDST	Charmouth Mudstone Formation - Mudstone	Pliensbachian Age - Sinemurian Age
29	0.0	On Site	NS-FGSST	Northampton Sand Formation - Ferruginous Sandstone	Aalenian Age
30D	0.0	E	SYL-LMAR	Scawby Limestone - Interbedded Limestone And [subequal/subordinate] Argillaceous Rocks	Bajocian Age
31	9.0	S	GRF-SDSM	Grantham Formation - Sandstone, Siltstone And Mudstone	Aalenian Age
32	11.0	W	PTNI-FEST	Pecten Ironstone (bed) - Ironstone	Pliensbachian Age
33	48.0	W	CHAM-MDST	Charmouth Mudstone Formation - Mudstone	Pliensbachian Age - Sinemurian Age
34	52.0	S	FI-FEST	Frodingham Ironstone Member - Ironstone	Sinemurian Age
35	171.0	E	SYL-LMAR	Scawby Limestone - Interbedded Limestone And [subequal/subordinate] Argillaceous Rocks	Bajocian Age
36V	295.0	E	HIL-LMOOL	Hibaldstow Limestone - Ooidal Limestone	Bajocian Age
37E	302.0	S	KCMK-LMST	Kirton Cementstone Beds (knoll-reef) - Limestone	Bajocian Age
38	338.0	E	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age
39	344.0	SE	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age
40	347.0	SE	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age
41X	388.0	SE	SYL-LMAR	Scawby Limestone - Interbedded Limestone And [subequal/subordinate] Argillaceous Rocks	Bajocian Age
42F	409.0	NE	KCMK-LMST	Kirton Cementstone Beds (knoll-reef) - Limestone	Bajocian Age
43F	420.0	NE	KCMK-LMST	Kirton Cementstone Beds (knoll-reef) - Limestone	Bajocian Age
44	442.0	E	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age
45	444.0	E	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age
46	457.0	E	SYL-LMAR	Scawby Limestone - Interbedded Limestone And [subequal/subordinate] Argillaceous Rocks	Bajocian Age
47K	492.0	E	KCM-MDLM	Kirton Cementstone Beds - Mudstone And Limestone, Interbedded	Bajocian Age

1.3.2 Faults

Are there any records of Faults within 500m of the study site boundary at 1:10,000 scale? Yes


ID	Distance (m)	Direction	Category Description	Feature Description
93	0.0	On Site	LANDFORM	Dune, form-line at base of mound
94	0.0	On Site	LANDFORM	Dune, form-line at base of mound
95	0.0	On Site	LANDFORM	Dune, form-line at base of mound
96	17.0	N	LANDFORM	Dune, form-line at base of mound
97	27.0	W	LANDFORM	Dune, form-line at base of mound
98	73.0	NW	LANDFORM	Dune, form-line at base of mound
99	135.0	W	LANDFORM	Dune, form-line at base of mound
100U	174.0	NE	LANDFORM	Dune, form-line at base of mound
101	181.0	NW	LANDFORM	Dune, form-line at base of mound
102V	263.0	E	LANDFORM	Dune, form-line at base of mound
103V	264.0	E	LANDFORM	Dune, form-line at base of mound
104V	305.0	E	LANDFORM	Dune, form-line at base of mound
105F	346.0	NE	LANDFORM	Dune, form-line at base of mound
106F	350.0	NE	LANDFORM	Dune, form-line at base of mound
107F	382.0	NE	LANDFORM	Dune, form-line at base of mound

The geology map for the site and surrounding area are extracted from the BGS Digital Geological Map of great Britain at 1:10,000 scale.

This Geology shows the main components as discrete layers, these are: Bedrock/ Solid Geology and linear features such as Faults. These are all displayed with the BGS Lexicon code for the rock unit and BGS sheet number. Not all of the main geological components have nationwide coverage.


2 Geology 1:50,000 Scale

2.1 Artificial Ground Map

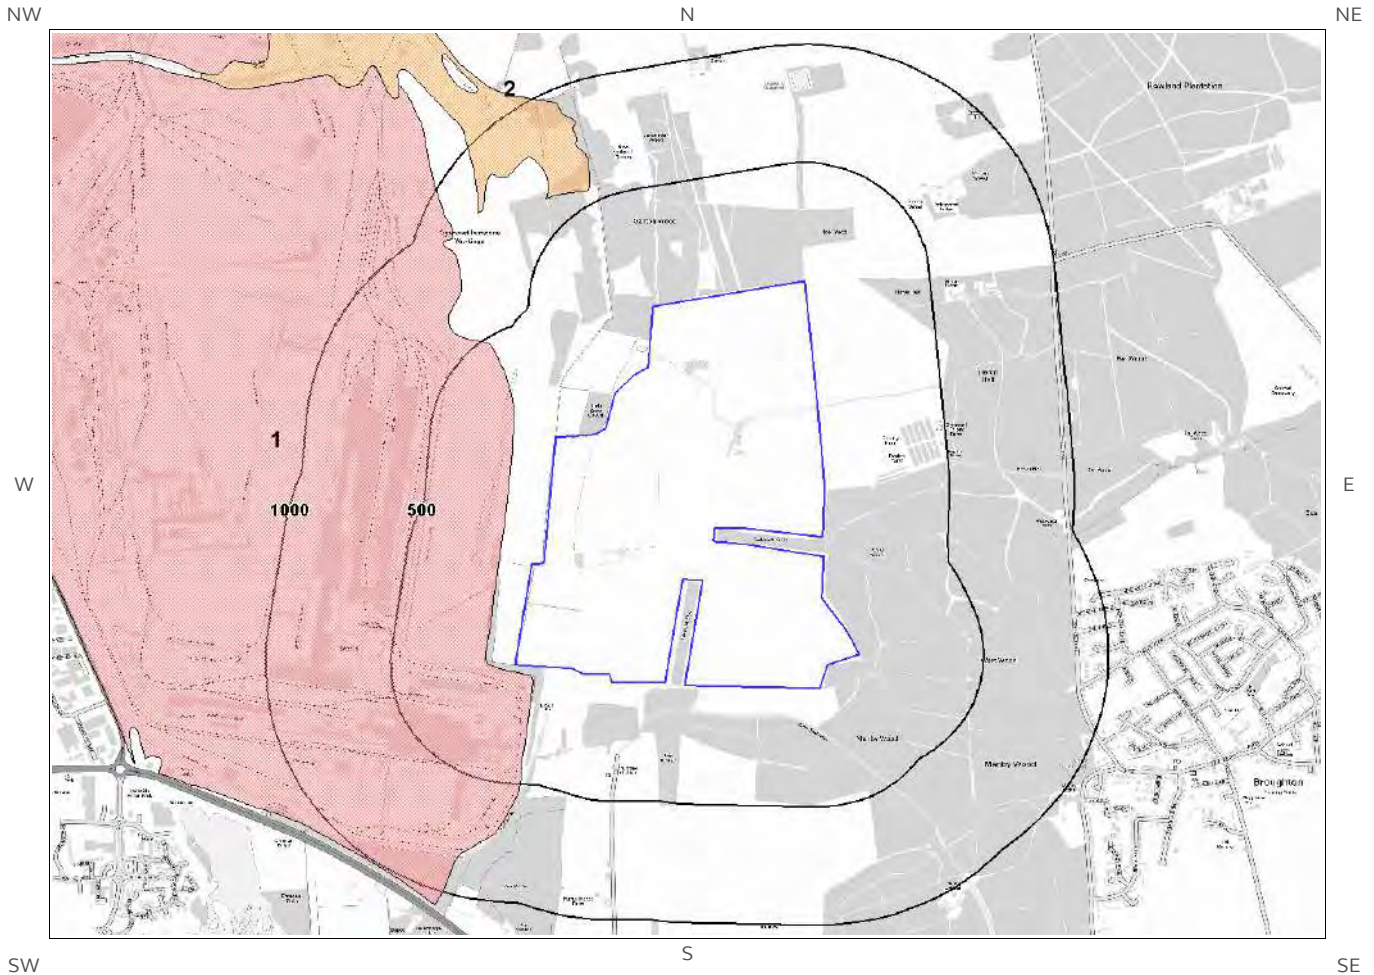

Ground Workings Legend

© Crown copyright and database rights 2017.
 Ordnance Survey license 100035207.

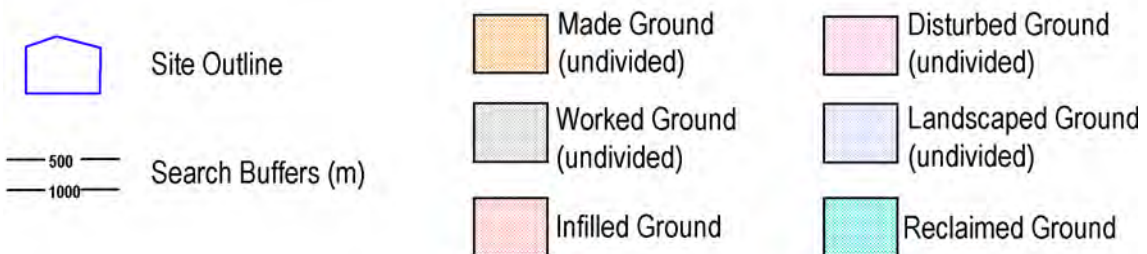

2. Geology 1:50,000 scale

2.1 Artificial Ground

The following geological information represented on the mapping is derived from 1:50,000 scale BGS Geological mapping, Sheet No: 089

2.1.1 Artificial/ Made Ground

Are there any records of Artificial/ Made Ground within 500m of the study site boundary? Yes


ID	Distance (m)	Direction	LEX Code	Description	Rock Description
1	28.0	S	WMGR-ARTDP	INFILLED GROUND	ARTIFICIAL DEPOSIT

2.1.2 Permeability of Artificial Ground

Are there any records relating to permeability of artificial ground within the study site boundary? Yes




Distance (m)	Direction	Flow Type	Maximum Permeability	Minimum Permeability
28.0	S	Mixed	Very High	Low

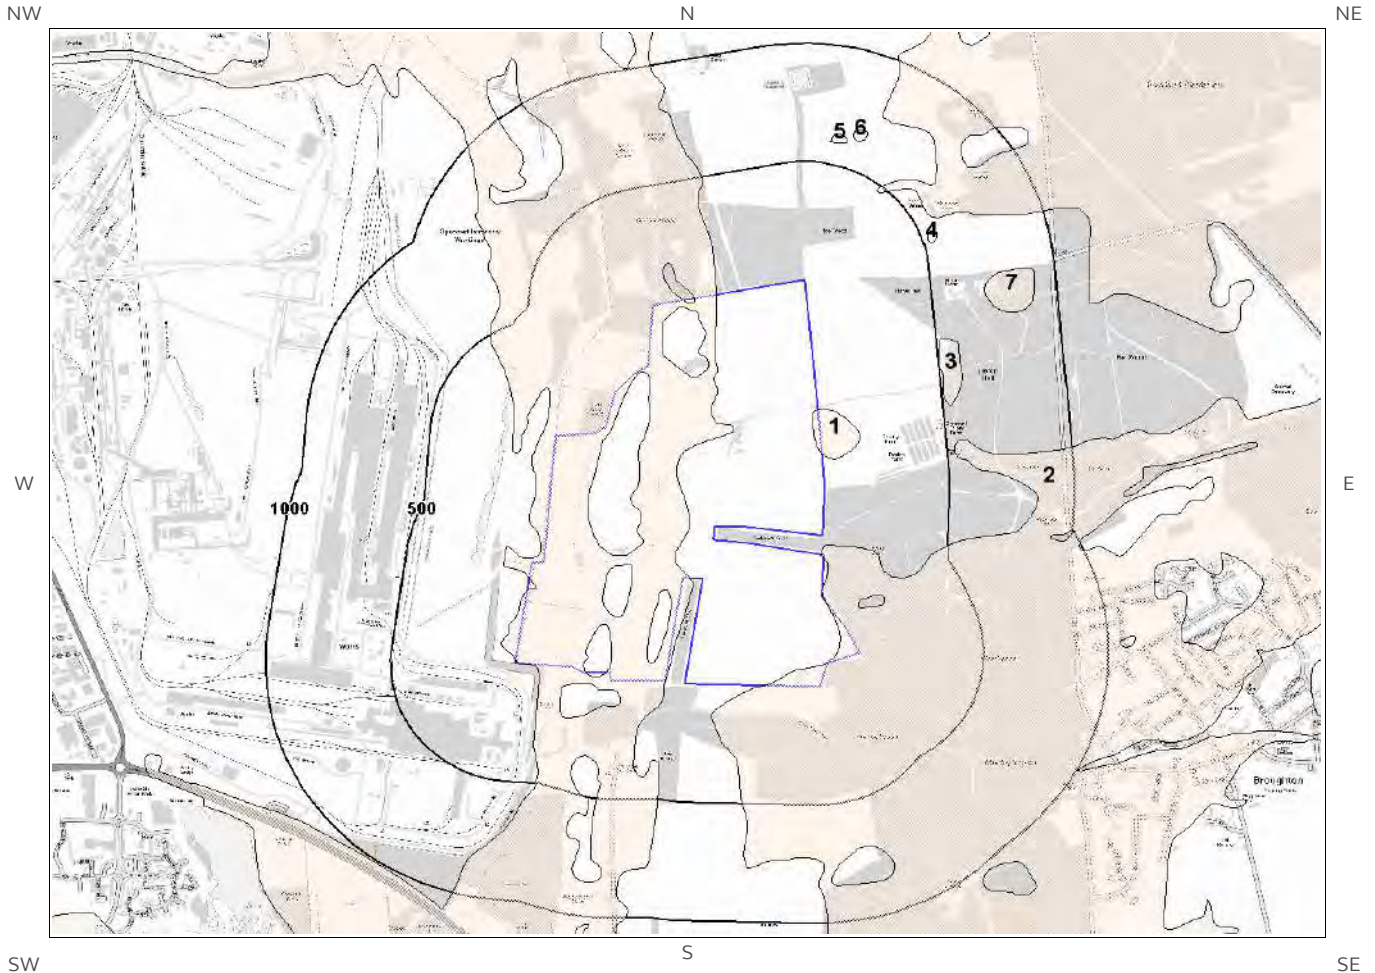2.2 Superficial Deposits and Landslips Map (1:50,000 scale)



Ground Workings Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

-  Site Outline
 -  500
 -  1000
- Search Buffers (m)

2.2 Superficial Deposits and Landslips

2.2.1 Superficial Deposits/ Drift Geology

Are there any records of Superficial Deposits/ Drift Geology within 500m of the study site boundary? Yes

ID	Distance	Direction	LEX Code	Description	Rock Description
1	0.0	On Site	SUTN-S	SUTTON SAND FORMATION	SAND
2	0.0	On Site	SUTN-S	SUTTON SAND FORMATION	SAND
3	499.0	E	SUTN-S	SUTTON SAND FORMATION	SAND

2.2.2 Permeability of Superficial Ground

Are there any records relating to permeability of superficial ground within the study site boundary? Yes

Distance (m)	Direction	Flow Type	Maximum Permeability	Minimum Permeability
0.0	On Site	Intergranular	High	High
0.0	On Site	Intergranular	High	High
0.0	On Site	Intergranular	High	High
0.0	On Site	Intergranular	High	High

2.2.3 Landslip

Are there any records of Landslip within 500m of the study site boundary? No

Database searched and no data found.

The geology map for the site and surrounding area are extracted from the BGS Digital Geological Map of Great Britain at 1:50,000 scale.


This Geology shows the main components as discrete layers, there are: Artificial/ Made Ground, Superficial/ Drift Geology and Landslips. These are all displayed with the BGS Lexicon code for the rock unit and BGS sheet number. Not all of the main geological components have nationwide coverage.

2.2.4 Landslip Permeability

Are there any records relating to permeability of landslips within the study site boundary? No




Database searched and no data found.

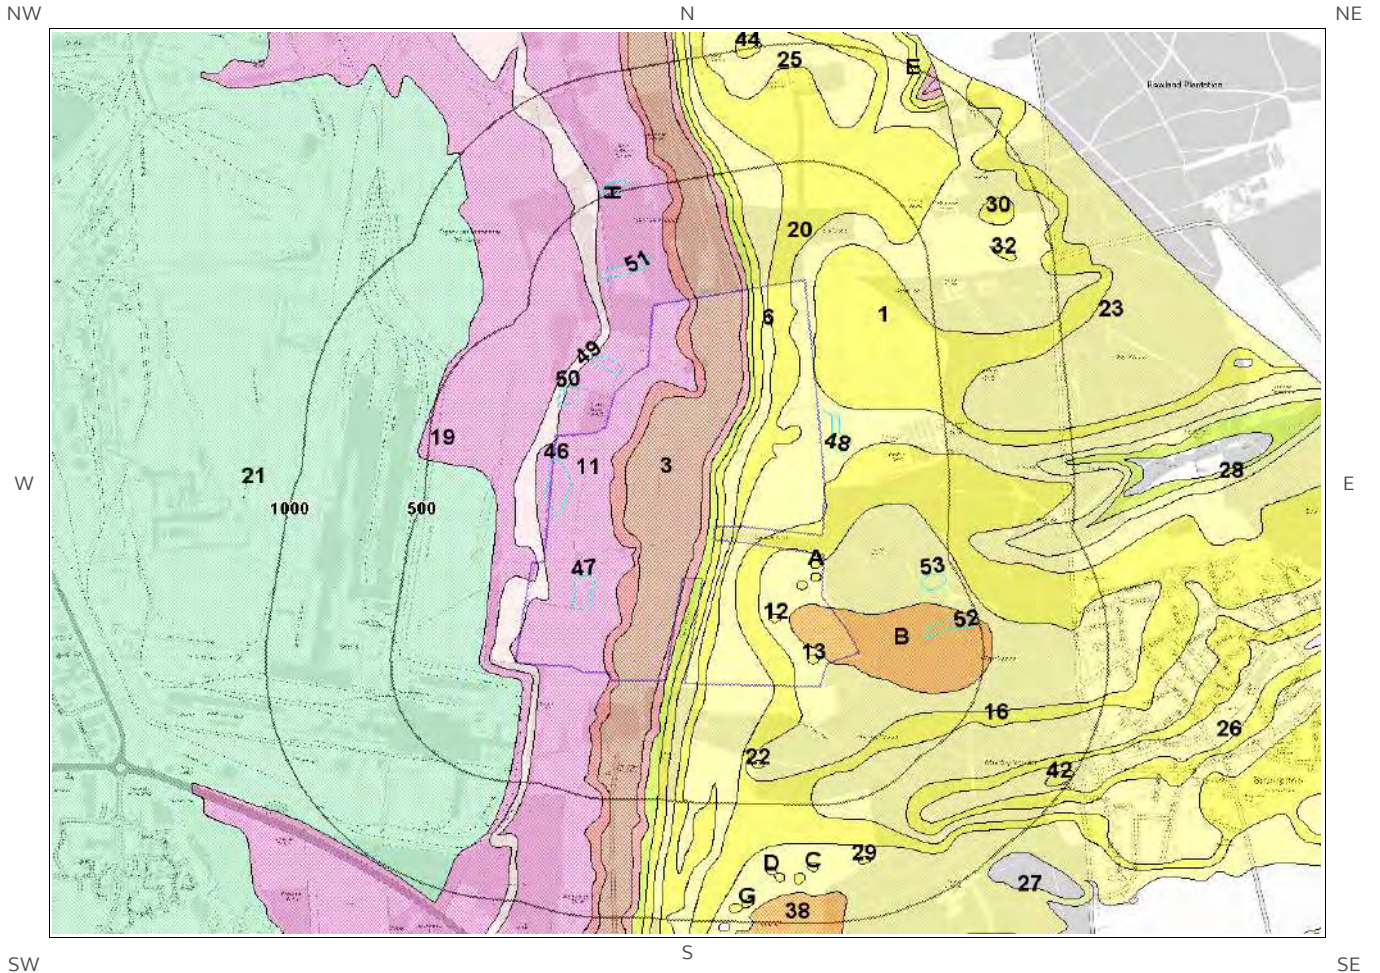2.3 Bedrock and Faults Map (1:50,000 scale)



Ground Workings Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.

-  Site Outline
-  500
-  1000
- Search Buffers (m)

2.3 Bedrock, Solid Geology & Faults

The following geological information represented on the mapping is derived from 1:50,000 scale BGS Geological mapping, Sheet No: 089

2.3.1 Bedrock/Solid Geology

Records of Bedrock/Solid Geology within 500m of the study site boundary:

ID	Distance	Direction	LEX Code	Rock Description	Rock Age
1	0.0	On Site	SYL-LMAR	SCAWBY LIMESTONE - LIMESTONE AND [SUBEQUAL/SUBORDINATE] ARGILLACEOUS ROCKS, INTERBEDDED	BAJOCIAN
2	0.0	On Site	NS-FGSST	NORTHAMPTON SAND FORMATION - SANDSTONE, FERRUGINOUS	AALENIAN
3	0.0	On Site	WHM-MDST	WHITBY MUDSTONE FORMATION - MUDSTONE	TOARCIAN
4	0.0	On Site	LLL-LMST	LOWER LINCOLNSHIRE LIMESTONE MEMBER - LIMESTONE	BAJOCIAN
5	0.0	On Site	GRF-SDSM	GRANTHAM FORMATION - SANDSTONE, SILTSTONE AND MUDSTONE	AALENIAN
6	0.0	On Site	RVB-LMAR	RAVENTHORPE BEDS - LIMESTONE AND [SUBEQUAL/SUBORDINATE] ARGILLACEOUS ROCKS, INTERBEDDED	BAJOCIAN
7	0.0	On Site	MRB-FGLS	MARLSTONE ROCK FORMATION - FERRUGINOUS LIMESTONE AND FERRUGINOUS SANDSTONE	PLIENSBACHIAN
8A	0.0	On Site	KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF) - LIMESTONE	BAJOCIAN
9A	0.0	On Site	KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF) - LIMESTONE	BAJOCIAN
10A	0.0	On Site	KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF) - LIMESTONE	BAJOCIAN
11	0.0	On Site	CHAM-MDST	CHARMOUTH MUDSTONE FORMATION - MUDSTONE	SINEMURIAN
12	0.0	On Site	KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF) - LIMESTONE	BAJOCIAN
13	0.0	On Site	KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF) - LIMESTONE	BAJOCIAN
14B	0.0	On Site	HIL-LMOOL	HIBALDSTOW LIMESTONE - LIMESTONE, OOIDAL	BAJOCIAN
15B	0.0	On Site	KCM-MDLM	KIRTON CEMENTSTONE BEDS - MUDSTONE AND LIMESTONE, INTERBEDDED	BAJOCIAN
16	0.0	On Site	KCM-LMST	KIRTON CEMENTSTONE BEDS - LIMESTONE	BAJOCIAN
17	0.0	On Site	KCM-MDLM	KIRTON CEMENTSTONE BEDS - MUDSTONE AND LIMESTONE, INTERBEDDED	BAJOCIAN
18	0.0	On Site	PTNI-FEST	PECTEN IRONSTONE (BED) - IRONSTONE	PLIENSBACHIAN
19	0.0	On Site	CHAM-MDST	CHARMOUTH MUDSTONE FORMATION - MUDSTONE	SINEMURIAN
20	0.0	On Site	KCM-LMST	KIRTON CEMENTSTONE BEDS - LIMESTONE	BAJOCIAN

ID	Distance	Direction	LEX Code	Rock Description	Rock Age
21	61.0	S	FI-FEST	FRODINGHAM IRONSTONE MEMBER - IRONSTONE	SINEMURIAN
22	313.0	S	KCMK-LMST	KIRTON CEMENTSTONE BEDS (KNOLL-REEF) - LIMESTONE	BAJOCIAN

2.3.2 Permeability of Bedrock Ground

Are there any records relating to permeability of bedrock ground within the study site boundary? Yes

Distance	Direction	Flow Type	Maximum Permeability	Minimum Permeability
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Mixed	High	Moderate
0.0	On Site	Fracture	Low	Low
0.0	On Site	Mixed	Very High	Very High
0.0	On Site	Mixed	High	Moderate
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Fracture	Very High	Low
0.0	On Site	Fracture	High	Low
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Mixed	High	Moderate
0.0	On Site	Mixed	High	Moderate
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Fracture	Very High	Very Low
0.0	On Site	Fracture	Very High	Very Low
0.0	On Site	Fracture	Low	Low
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Fracture	Low	Low
0.0	On Site	Mixed	High	Moderate
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Fracture	High	Low
0.0	On Site	Mixed	Moderate	Low
0.0	On Site	Mixed	Moderate	Low
0.0	On Site	Fracture	Very High	Very Low
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Fracture	Low	Low
0.0	On Site	Mixed	High	Moderate
0.0	On Site	Fracture	Very High	Very High
0.0	On Site	Fracture	Low	Low

2.3.3 Faults

Are there any records of Faults within 500m of the study site boundary?

Yes

ID	Distance	Direction	Category Description	Feature Description
46	0.0	On Site	LANDFORM	Dune, form line at base
47	0.0	On Site	LANDFORM	Dune, form line at base
48	13.0	E	LANDFORM	Dune, form line at base
49	41.0	NW	LANDFORM	Dune, form line at base
50	130.0	N	LANDFORM	Dune, form line at base
51	160.0	NW	LANDFORM	Dune, form line at base
52	275.0	E	LANDFORM	Dune, form line at base
53	352.0	NE	LANDFORM	Dune, form line at base
54H	490.0	N	LANDFORM	Dune, form line at base
55H	492.0	N	LANDFORM	Dune, form line at base

The geology map for the site and surrounding area are extracted from the BGS Digital Geological Map of Great Britain at 1:50,000 scale.

This Geology shows the main components as discrete layers, these are: Bedrock/Solid Geology and linear features such as Faults. These are all displayed with the BGS Lexicon code for the rock unit and BGS sheet number. Not all of the main geological components have nation wide coverage.

3 Radon Data

3.1 Radon Affected Areas

Is the property in a Radon Affected Area as defined by the Health Protection Agency (HPA) and if so what percentage of homes are above the Action Level? The property is in a Radon Affected Area, as between 10 and 30% of properties are above the Action Level.

3.2 Radon Protection

Is the property in an area where Radon Protection are required for new properties or extensions to existing ones as described in publication BR211 by the Building Research Establishment? Full radon protective measures are necessary.

4 Ground Workings

4.1 Historical Surface Ground Working Features derived from Historical Mapping

This dataset is based on Groundsure's unique Historical Land Use Database derived from 1:10,560 and 1:10,000 scale historical mapping

Are there any Historical Surface Ground Working Features within 250m of the study site boundary? Yes

ID	Distance (m)	Direction	NGR	Use	Date
1E	0.0	On Site	493748 409553	Unspecified Pit	1951
2A	0.0	On Site	494217 410278	Unspecified Ground Workings	1994
3A	0.0	On Site	494217 410278	Unspecified Ground Workings	1977
4B	0.0	On Site	494146 410173	Unspecified Pit	1977
5B	0.0	On Site	494146 410173	Unspecified Pit	1994
6C	0.0	On Site	494048 410235	Unspecified Pit	1977
7C	0.0	On Site	494048 410235	Unspecified Pit	1994
8D	0.0	On Site	493917 410234	Unspecified Ground Workings	1977
9D	0.0	On Site	493917 410234	Unspecified Ground Workings	1994
10E	0.0	On Site	493749 409556	Unspecified Pit	1948
11E	0.0	On Site	493749 409556	Unspecified Pit	1906
12C	0.0	On Site	494049 410235	Unspecified Pit	1886
13	0.0	On Site	493837 410252	Unspecified Pit	1886
14	105.0	W	493099 409549	Opencast Ironstone Workings	1979
15F	124.0	W	493174 409059	Ponds	1938
16F	124.0	W	493174 409059	Ponds	1905
17F	126.0	W	493174 409059	Unspecified Pit	1968
18F	126.0	W	493174 409059	Ponds	1951
19	134.0	NW	493429 410197	Unspecified Pit	1886
20	139.0	W	493314 409857	Unspecified Pit	1886
21	147.0	W	493294 409694	Unspecified Pit	1886

ID	Distance (m)	Direction	NGR	Use	Date
22G	195.0	W	493058 410820	Opencast Ironstone Workings	1977
23G	195.0	W	493058 410820	Opencast Ironstone Workings	1994
24H	205.0	W	493644 410496	Pond	1977
25H	205.0	W	493644 410496	Pond	1994
26I	217.0	W	493270 410135	Unspecified Ground Workings	1994
27I	217.0	W	493270 410135	Unspecified Ground Workings	1977

4.2 Historical Underground Working Features derived from Historical Mapping

This data is derived from the Groundsure unique Historical Land Use Database. It contains data derived from 1:10,000 and 1:10,560 historical Ordnance Survey Mapping and includes some natural topographical features (Shake Holes for example) as well as manmade features that may have implications for ground stability. Underground and mining features have been identified from surface features such as shafts. The distance that these extend underground is not shown.

Are there any Historical Underground Working Features within 1000m of the study site boundary? No

Database searched and no data found.

4.3 Current Ground Workings

This dataset is derived from the BGS BRITPITS database covering active; inactive mines; quarries; oil wells; gas wells and mineral wharves; and rail deposits throughout the British Isles.

Are there any BGS Current Ground Workings within 1000m of the study site boundary? Yes

The following Current Ground Workings information is provided by British Geological Survey:

ID	Distance (m)	Direction	NGR	Commodity Produced	Pit Name	Type of working	Status
28	340.0	W	493000 409000	Ironstone	Yarborough	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Ceased
29	462.0	NW	493200 410400	Ironstone	Emanuel Bridge	A surface mineral working. It may be termed Quarry, Sand Pit, Clay Pit or Opencast Coal Site	Inactive

5 Mining, Extraction & Natural Cavities

5.1 Historical Mining

This dataset is derived from Groundsure unique Historical Land-use Database that are indicative of mining or extraction activities.

Are there any Historical Mining areas within 1000m of the study site boundary? Yes

The following Historical Mining information is provided by Groundsure:

ID	Distance (m)	Direction	NGR	Details	Date
6	105.0	W	493099 409549	Opencast Ironstone Workings	1979
7A	195.0	W	493058 410820	Opencast Ironstone Workings	1977
8A	195.0	W	493058 410820	Opencast Ironstone Workings	1994
9	730.0	W	492399 409130	Opencast Ironstone Workings	1968
10	872.0	W	492409 409222	Iron Stone Quarry	1951

5.2 Coal Mining

This dataset provides information as to whether the study site lies within a known coal mining affected area as defined by the coal authority.

Are there any Coal Mining areas within 1000m of the study site boundary? No

Database searched and no data found.

5.3 Johnson Poole and Bloomer

This dataset provides information as to whether the study site lies within an area where JPB hold information relating to mining.

Are there any JPB Mining areas within 1000m of the study site boundary? Yes

The following information provided by JPB is not represented on mapping: Whilst outside of an area where The Coal Authority have information on coal mining activities, Johnson Poole & Bloomer (JPB) have information such as mining plans and maps held within their archive of mining activities that have occurred within 1km of this property. Further details and a quote for services can be obtained by emailing this report to enquiries.gs@jpb.co.uk.

5.4 Non-Coal Mining

This dataset provides information as to whether the study site lies within an area which may have been subject to non-coal historic mining.

Are there any Non-Coal Mining areas within 1000m of the study site boundary? Yes

The following non-coal mining information is provided by the BGS:

ID	Distance (m)	Direction	Name	Commodity	Assessment of likelihood
1	0.0	On Site	Not available	Jet	Sporadic underground mining of restricted extent may have occurred. Potential for difficult ground conditions are unlikely and localised and are at a level where they need not be considered
2	0.0	On Site	Not available	Jet	Sporadic underground mining of restricted extent may have occurred. Potential for difficult ground conditions are unlikely and localised and are at a level where they need not be considered
Not shown	834.0	S	Ashby	Iron Ore (Bedded)	Underground mining is known to have occurred within or very close to the area. Potential for difficult ground conditions should be investigated. Potential for localised subsidence is at a level where it should be considered

5.5 Non-Coal Mining Cavities

This dataset provides information from the Peter Brett Associates (PBA) mining cavities database (compiled for the national study entitled “Review of mining instability in Great Britain, 1990” PBA has also continued adding to this database) on mineral extraction by mining.

Are there any Non-Coal Mining cavities within 1000m of the study site boundary? Yes

The following Non-Coal Mining Cavities information provided by Peter Brett Associates:

ID	Distance (m)	Direction	NGR	Address	Superficial Deposits	Bedrock Deposits	Extracted Mineral
4	0.0	On Site	494000 410000	HIGH SANTON, Humberside	-	-	Magnetite, Marcasite, Siderite, Ironstone
5	486.0	W	493000 410000	EMMANUEL BRIDGE, Humberside	-	-	Magnetite, Marcasite, Siderite, Ironstone

5.6 Natural Cavities

This dataset provides information based on Peter Brett Associates natural cavities database.

Are there any Natural Cavities within 1000m of the study site boundary? No

Database searched and no data found.

5.7 Brine Extraction

This data provides information from the Coal Authority issued on behalf of the Cheshire Brine Subsidence Compensation Board.

Are there any Brine Extraction areas within 1000m of the study site boundary? No

Database searched and no data found.

5.8 Gypsum Extraction

This dataset provides information on Gypsum extraction from British Gypsum records.

Are there any Gypsum Extraction areas within 1000m of the study site boundary? No

Database searched and no data found.

5.9 Tin Mining

This dataset provides information on tin mining areas and is derived from tin mining records. This search is based upon postcode information to a sector level..

Are there any Tin Mining areas within 1000m of the study site boundary? No

Database searched and no data found.

5.10 Clay Mining


This dataset provides information on Kaolin and Ball Clay mining from relevant mining records.

Are there any Clay Mining areas within 1000m of the study site boundary? No

Database searched and no data found.

6 Natural Ground Subsidence

6.1 Shrink-Swell Clay Map

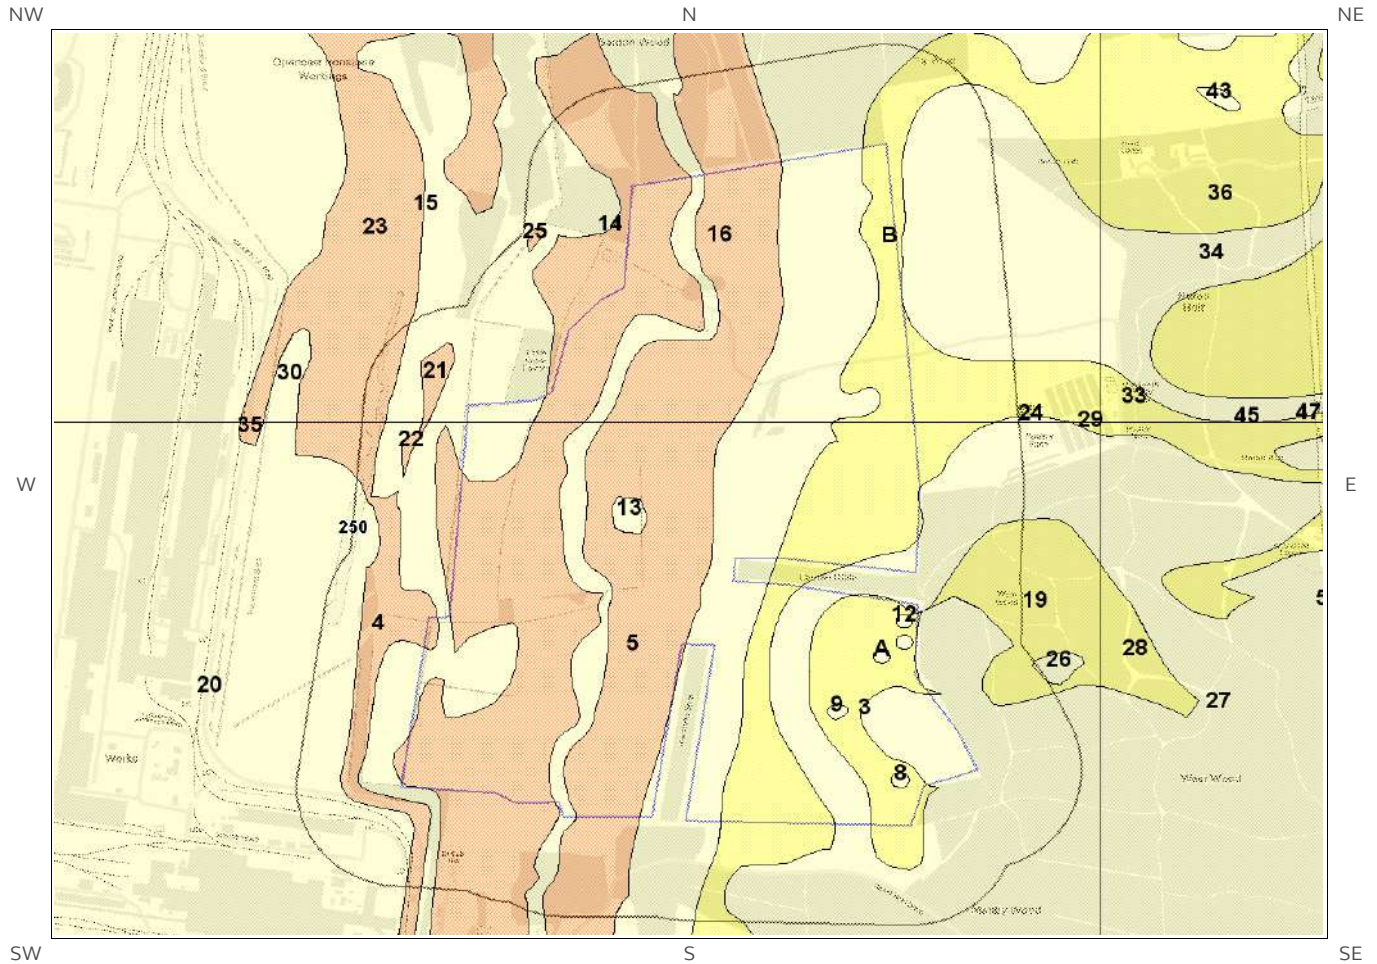


Shrink Swell Clay Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



6.2 Landslides Map

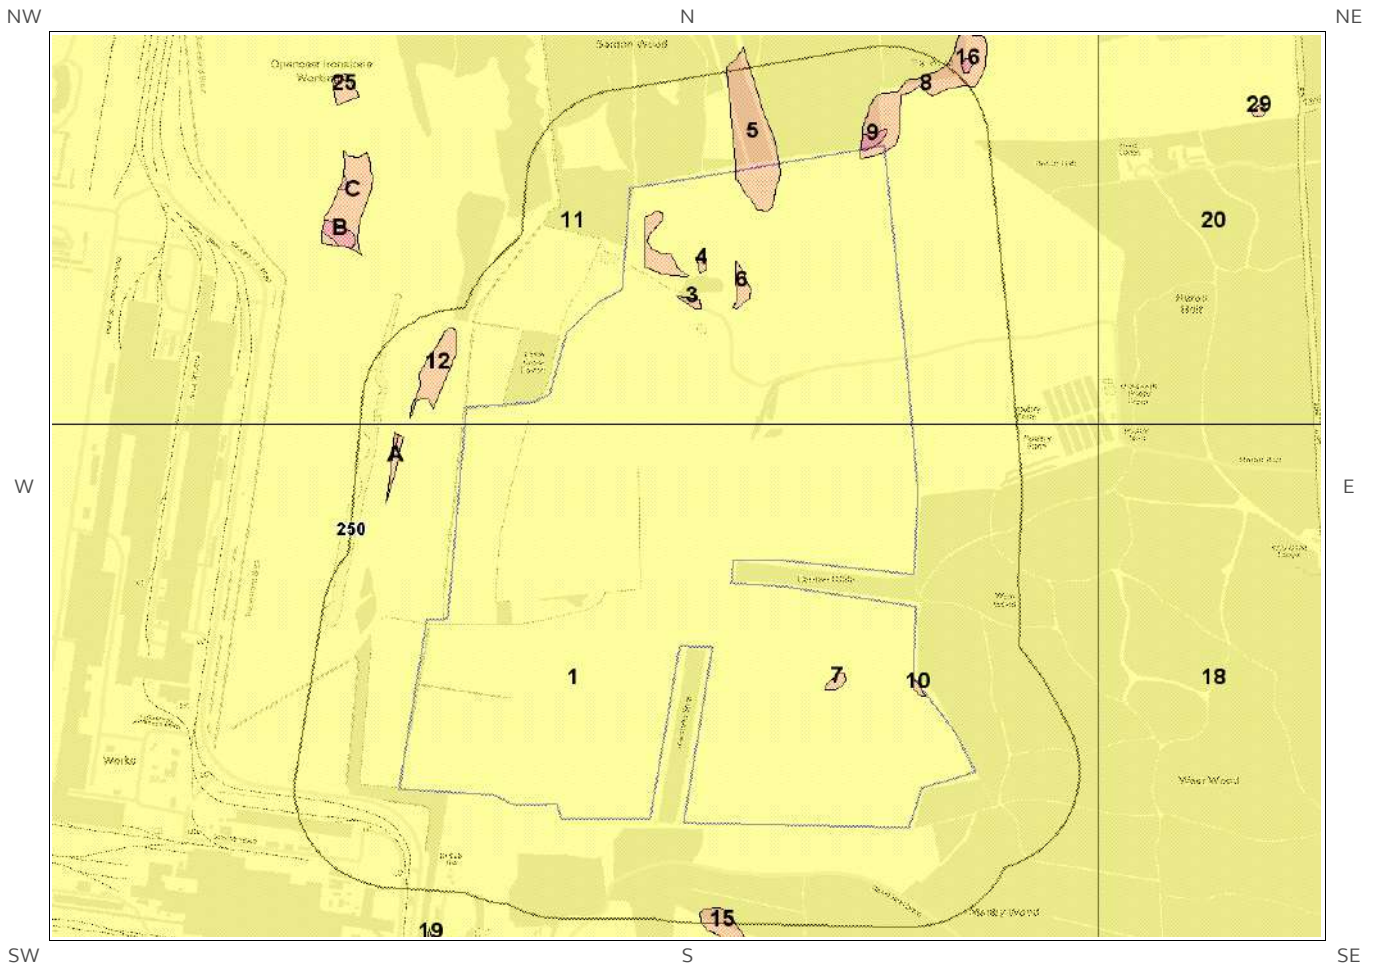


Landslides Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



6.3 Ground Dissolution of Soluble Rocks Map

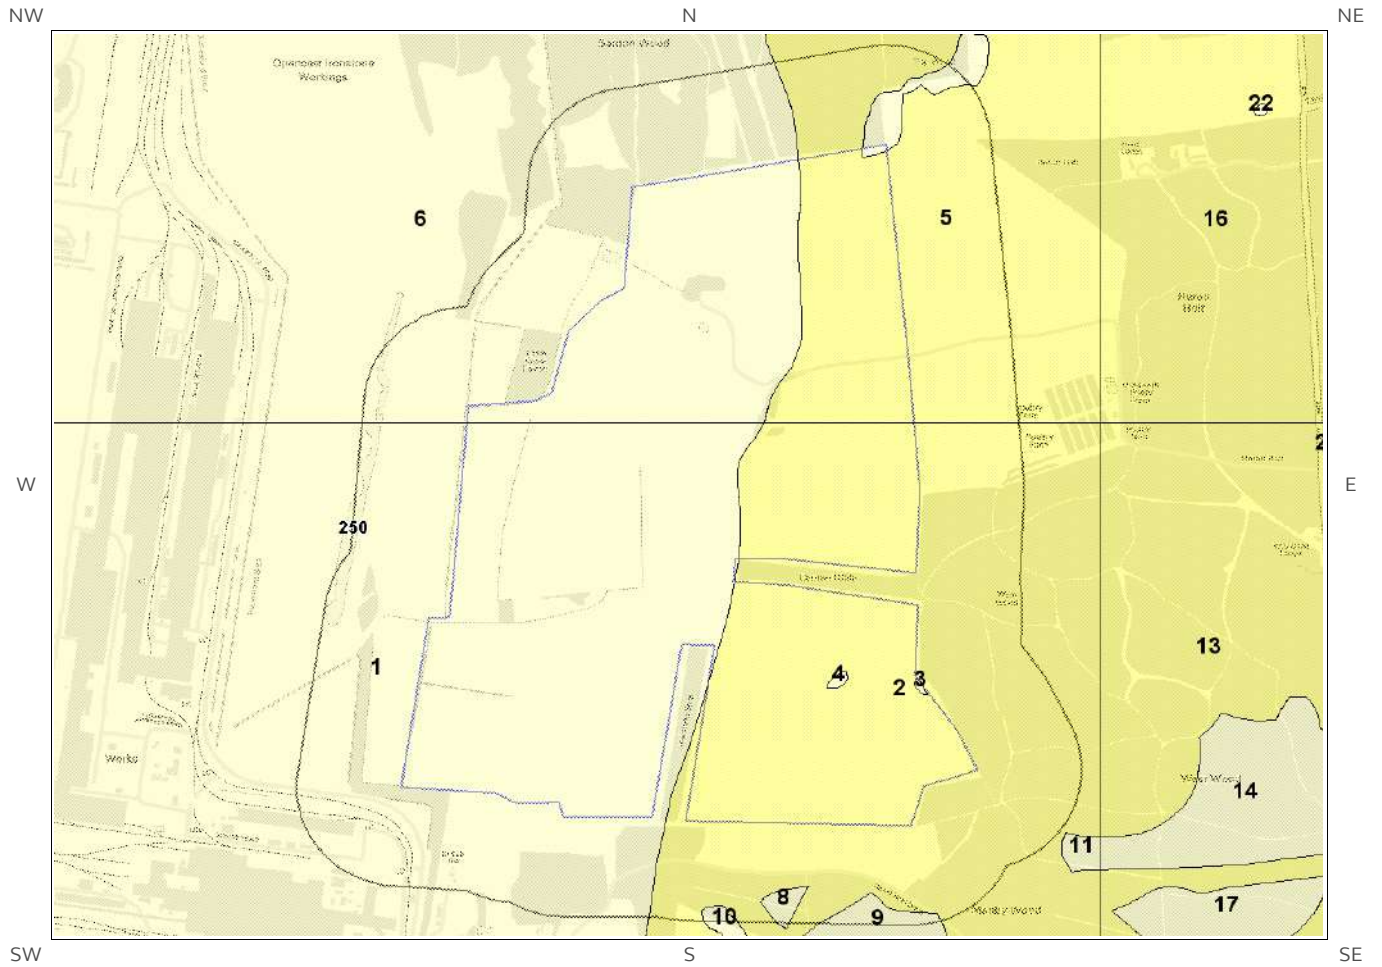


Ground Dissolution Soluble Rocks Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



6.4 Compressible Deposits Map

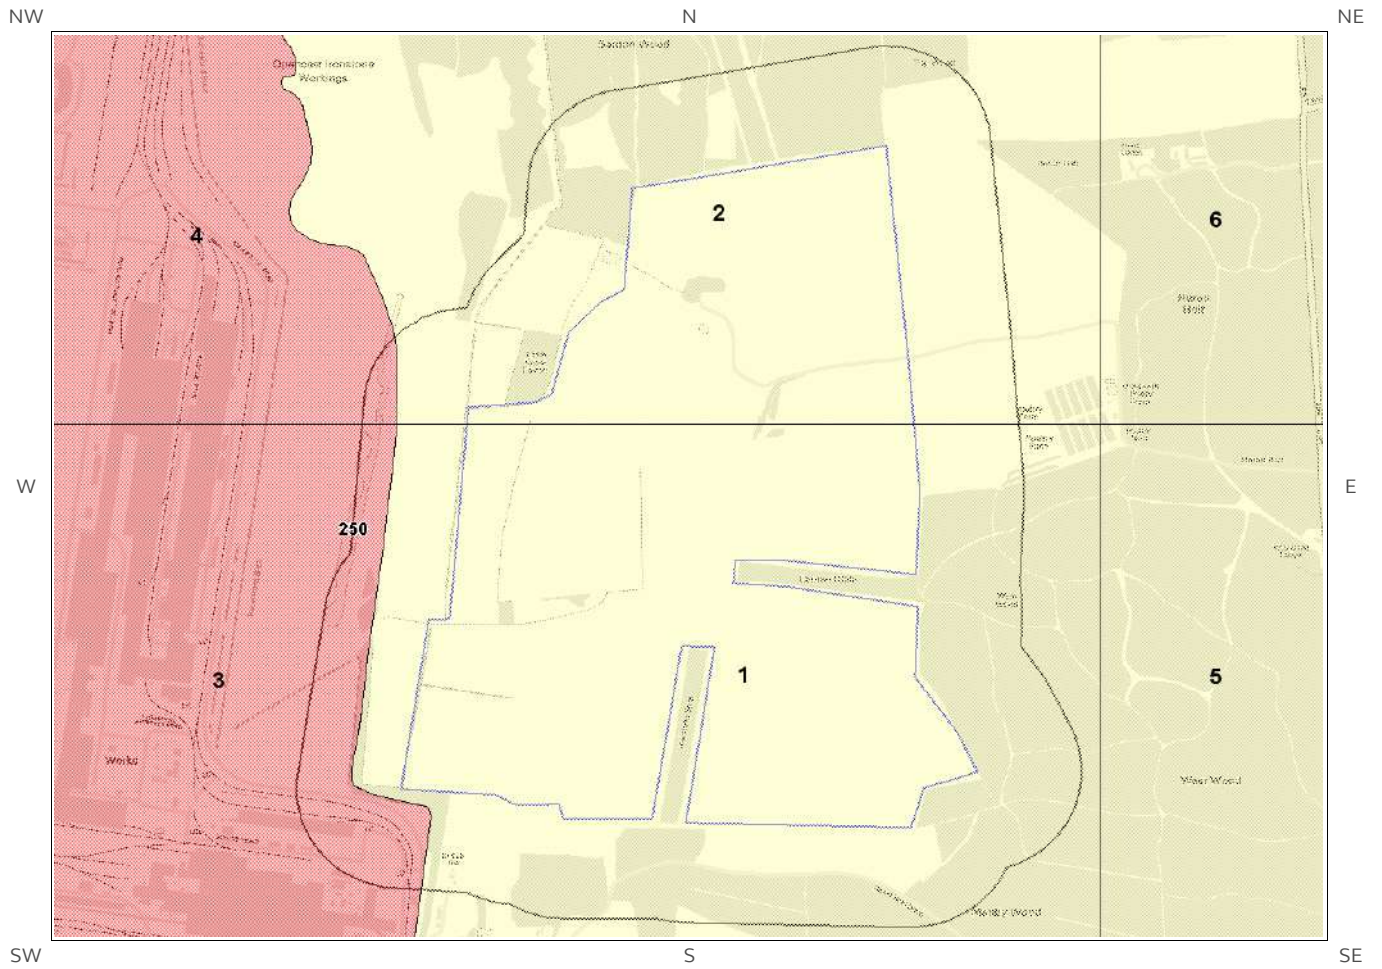


Compressible Deposits Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



6.5 Collapsible Deposits Map

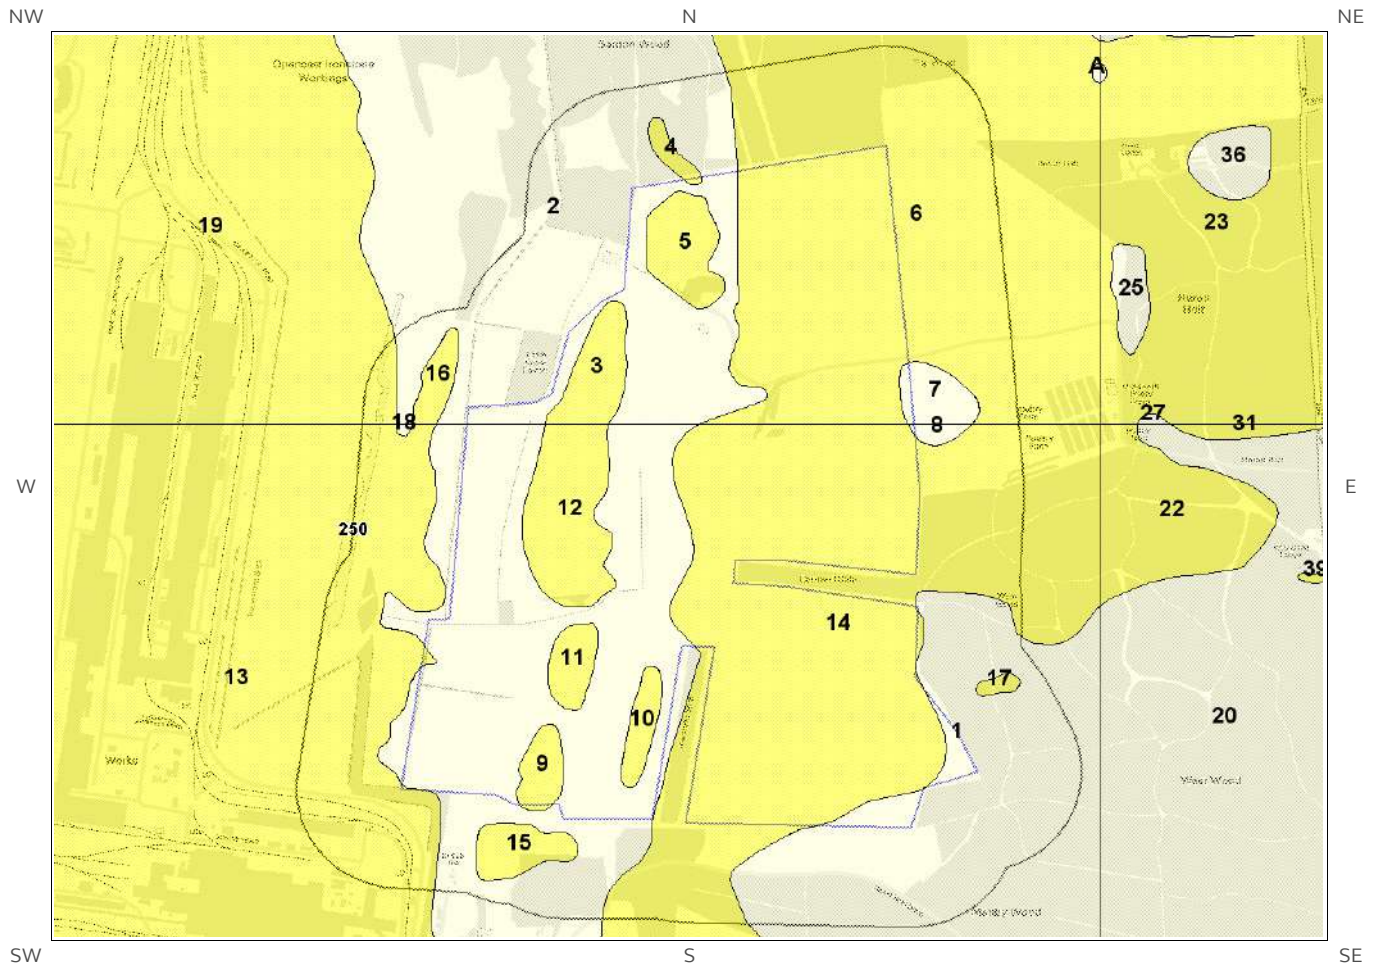


Collapsible Deposits Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



6.6 Running Sand Map

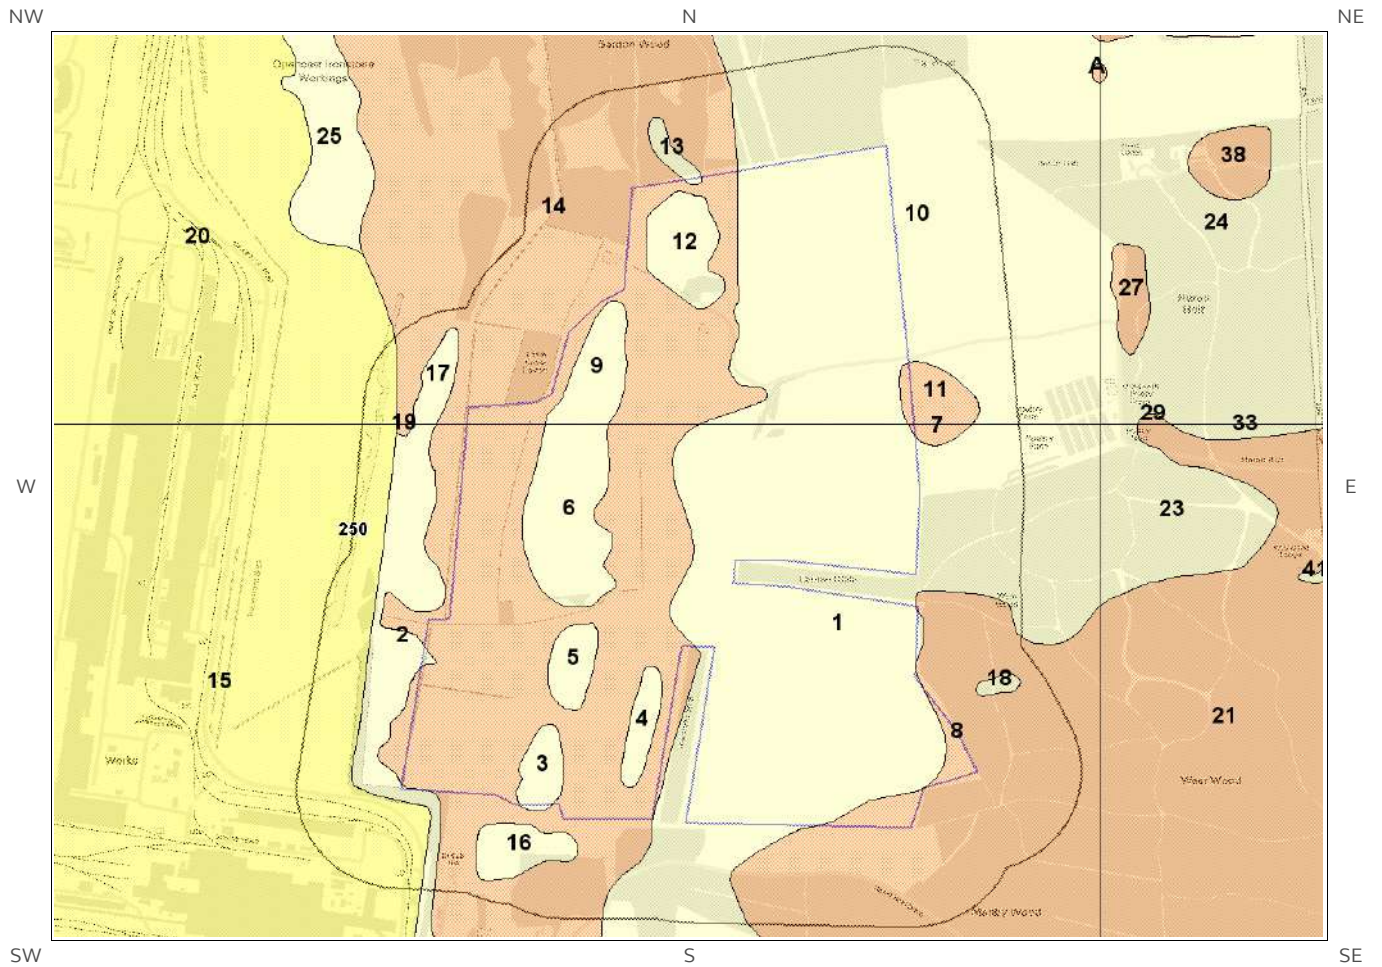

Running Sand Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.



6 Natural Ground Subsidence

The National Ground Subsidence rating is obtained through the 6 natural ground stability hazard datasets, which are supplied by the British Geological Survey (BGS).

The following GeoSure data represented on the mapping is derived from the BGS Digital Geological map of Great Britain at 1:50,000 scale.

What is the maximum hazard rating of natural subsidence within the study site** boundary? Moderate

6.1 Shrink-Swell Clays

The following Shrink Swell information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Low	Ground conditions predominantly medium plasticity. Do not plant trees with high soil moisture demands near to buildings. For new build, consideration should be given to advice published by the National House Building Council (NHBC) and the Building Research Establishment (BRE). There is a possible increase in construction cost to reduce potential shrink-swell problems. For existing property, there is a possible increase in insurance risk, especially during droughts or where vegetation with high moisture demands is present.
2	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
3	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
4	0.0	On Site	Low	Ground conditions predominantly medium plasticity. Do not plant trees with high soil moisture demands near to buildings. For new build, consideration should be given to advice published by the National House Building Council (NHBC) and the Building Research Establishment (BRE). There is a possible increase in construction cost to reduce potential shrink-swell problems. For existing property, there is a possible increase in insurance risk, especially during droughts or where vegetation with high moisture demands is present.

* This includes an automatically generated 50m buffer zone around the site

ID	Distance (m)	Direction	Hazard Rating	Details
5	0.0	On Site	Low	Ground conditions predominantly medium plasticity. Do not plant trees with high soil moisture demands near to buildings. For new build, consideration should be given to advice published by the National House Building Council (NHBC) and the Building Research Establishment (BRE). There is a possible increase in construction cost to reduce potential shrink-swell problems. For existing property, there is a possible increase in insurance risk, especially during droughts or where vegetation with high moisture demands is present.
6	0.0	On Site	Very Low	Ground conditions predominantly low plasticity. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with shrink-swell clays.
7	0.0	On Site	Very Low	Ground conditions predominantly low plasticity. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with shrink-swell clays.
8	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
9	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
10A	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
11A	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
12	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.

ID	Distance (m)	Direction	Hazard Rating	Details
13	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
14	0.0	On Site	Low	Ground conditions predominantly medium plasticity. Do not plant trees with high soil moisture demands near to buildings. For new build, consideration should be given to advice published by the National House Building Council (NHBC) and the Building Research Establishment (BRE). There is a possible increase in construction cost to reduce potential shrink-swell problems. For existing property, there is a possible increase in insurance risk, especially during droughts or where vegetation with high moisture demands is present.
15	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
16	0.0	On Site	Low	Ground conditions predominantly medium plasticity. Do not plant trees with high soil moisture demands near to buildings. For new build, consideration should be given to advice published by the National House Building Council (NHBC) and the Building Research Establishment (BRE). There is a possible increase in construction cost to reduce potential shrink-swell problems. For existing property, there is a possible increase in insurance risk, especially during droughts or where vegetation with high moisture demands is present.
17B	0.0	On Site	Very Low	Ground conditions predominantly low plasticity. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with shrink-swell clays.
18B	0.0	On Site	Negligible	Ground conditions predominantly non-plastic. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely likely due to potential problems with shrink-swell clays.
19	17.0	E	Very Low	Ground conditions predominantly low plasticity. No special actions required to avoid problems due to shrink-swell clays. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with shrink-swell clays.

The following Landslides information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Very Low	Slope instability problems are unlikely to be present. No special actions required to avoid problems due to landslides. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with landslides.
2	0.0	On Site	Low	Possibility of slope instability problems after major changes in ground conditions. Consideration should be given to stability if changes to drainage or excavations take place. Possible increase in construction cost to reduce potential slope stability problems. Existing property - no significant increase in insurance risk due to natural slope instability problems.
3	0.0	On Site	Low	Possibility of slope instability problems after major changes in ground conditions. Consideration should be given to stability if changes to drainage or excavations take place. Possible increase in construction cost to reduce potential slope stability problems. Existing property - no significant increase in insurance risk due to natural slope instability problems.
4	0.0	On Site	Low	Possibility of slope instability problems after major changes in ground conditions. Consideration should be given to stability if changes to drainage or excavations take place. Possible increase in construction cost to reduce potential slope stability problems. Existing property - no significant increase in insurance risk due to natural slope instability problems.
5	0.0	On Site	Low	Possibility of slope instability problems after major changes in ground conditions. Consideration should be given to stability if changes to drainage or excavations take place. Possible increase in construction cost to reduce potential slope stability problems. Existing property - no significant increase in insurance risk due to natural slope instability problems.
6	0.0	On Site	Low	Possibility of slope instability problems after major changes in ground conditions. Consideration should be given to stability if changes to drainage or excavations take place. Possible increase in construction cost to reduce potential slope stability problems. Existing property - no significant increase in insurance risk due to natural slope instability problems.
7	0.0	On Site	Low	Possibility of slope instability problems after major changes in ground conditions. Consideration should be given to stability if changes to drainage or excavations take place. Possible increase in construction cost to reduce potential slope stability problems. Existing property - no significant increase in insurance risk due to natural slope instability problems.

ID	Distance (m)	Direction	Hazard Rating	Details
8	0.0	On Site	Low	<p>Possibility of slope instability problems after major changes in ground conditions. Consideration should be given to stability if changes to drainage or excavations take place. Possible increase in construction cost to reduce potential slope stability problems. Existing property - no significant increase in insurance risk due to natural slope instability problems.</p>
9	0.0	On Site	Moderate	<p>Significant potential for slope instability with relatively small changes in ground conditions. Avoid large amounts of water entering the ground through pipe leakage or soak-aways. Do not undercut or place large amounts of material on slopes without technical advice. For new build - consider the potential and consequences of ground movement during excavations, or consequence of changes to loading or drainage. For existing property - probable increase in insurance risk is likely due to potential natural slope instability after changes to ground conditions such as a very long, excessively wet winter.</p>
10	0.0	On Site	Low	<p>Possibility of slope instability problems after major changes in ground conditions. Consideration should be given to stability if changes to drainage or excavations take place. Possible increase in construction cost to reduce potential slope stability problems. Existing property - no significant increase in insurance risk due to natural slope instability problems.</p>
11	0.0	On Site	Very Low	<p>Slope instability problems are unlikely to be present. No special actions required to avoid problems due to landslides. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with landslides.</p>

6.3 Ground Dissolution of Soluble Rocks

The following Ground Dissolution information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Negligible	<p>Soluble rocks are present, but unlikely to cause problems except under exceptional conditions. No special actions required to avoid problems due to soluble rocks. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with soluble rocks.</p>
2	0.0	On Site	Very Low	<p>Significant soluble rocks are present. Problems unlikely except with considerable surface or subsurface water flow. No special actions required to avoid problems due to soluble rocks. No special ground investigation required or increased construction costs are likely. An increase in financial risk due to potential problems with soluble rocks is unlikely.</p>
3	0.0	On Site	Negligible	<p>Soluble rocks are present, but unlikely to cause problems except under exceptional conditions. No special actions required to avoid problems due to soluble rocks. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with soluble rocks.</p>

ID	Distance (m)	Direction	Hazard Rating	Details
4	0.0	On Site	Negligible	Soluble rocks are present, but unlikely to cause problems except under exceptional conditions. No special actions required to avoid problems due to soluble rocks. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with soluble rocks.
5	0.0	On Site	Very Low	Significant soluble rocks are present. Problems unlikely except with considerable surface or subsurface water flow. No special actions required to avoid problems due to soluble rocks. No special ground investigation required or increased construction costs are likely. An increase in financial risk due to potential problems with soluble rocks is unlikely.
6	0.0	On Site	Negligible	Soluble rocks are present, but unlikely to cause problems except under exceptional conditions. No special actions required to avoid problems due to soluble rocks. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with soluble rocks.
7	0.0	On Site	Negligible	Soluble rocks are present, but unlikely to cause problems except under exceptional conditions. No special actions required to avoid problems due to soluble rocks. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with soluble rocks.

6.4 Compressible Deposits

The following Compressible Deposits information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Negligible	No indicators for compressible deposits identified. No special actions required to avoid problems due to compressible deposits. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with compressible deposits.
2	0.0	On Site	Negligible	No indicators for compressible deposits identified. No special actions required to avoid problems due to compressible deposits. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with compressible deposits.
3	28.0	S	Moderate	Significant potential for compressibility problems. Avoid large differential loadings of ground. Do not drain or de-water ground near the property without technical advice. For new build - consider possibility of compressible ground in ground investigation, construction and building design. Consider effects of groundwater changes. Extra construction costs are likely. For existing property - possible increase in insurance risk from compressibility, especially if water conditions or loading of the ground change significantly.

6.5 Collapsible Deposits

The following Collapsible Rocks information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Negligible	No indicators for collapsible deposits identified. No actions required to avoid problems due to collapsible deposits. No special ground investigation required, or increased construction costs or increased financial risk due to potential problems with collapsible deposits.

ID	Distance (m)	Direction	Hazard Rating	Details
2	0.0	On Site	Negligible	No indicators for collapsible deposits identified. No actions required to avoid problems due to collapsible deposits. No special ground investigation required, or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
3	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
4	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
5	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
6	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
7	0.0	On Site	Negligible	No indicators for collapsible deposits identified. No actions required to avoid problems due to collapsible deposits. No special ground investigation required, or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
8	0.0	On Site	Negligible	No indicators for collapsible deposits identified. No actions required to avoid problems due to collapsible deposits. No special ground investigation required, or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
9	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
10	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
11	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
12	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
13	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
14	0.0	On Site	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.
15	34.0	S	Very Low	Deposits with potential to collapse when loaded and saturated are unlikely to be present. No special ground investigation required or increased construction costs or increased financial risk due to potential problems with collapsible deposits.

6.6 Running Sands

The following Running Sands information provided by the British Geological Survey:

ID	Distance (m)	Direction	Hazard Rating	Details
1	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.

ID	Distance (m)	Direction	Hazard Rating	Details
2	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
3	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
4	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
5	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
6	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
7	0.0	On Site	Low	Possibility of running sand problems after major changes in ground conditions. Normal maintenance to avoid leakage of water-bearing services or water bodies (ponds, swimming pools) should reduce likelihood of problems due to running sand. For new build - consider possibility of running sand into trenches or excavations if water table is high or sandy strata are exposed to water. Avoid concentrated water inputs to site. Unlikely to be an increase in construction costs due to potential for running sand. For existing property - no significant increase in insurance risk due to running sand problems is likely.
8	0.0	On Site	Low	Possibility of running sand problems after major changes in ground conditions. Normal maintenance to avoid leakage of water-bearing services or water bodies (ponds, swimming pools) should reduce likelihood of problems due to running sand. For new build - consider possibility of running sand into trenches or excavations if water table is high or sandy strata are exposed to water. Avoid concentrated water inputs to site. Unlikely to be an increase in construction costs due to potential for running sand. For existing property - no significant increase in insurance risk due to running sand problems is likely.
9	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
10	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
11	0.0	On Site	Low	Possibility of running sand problems after major changes in ground conditions. Normal maintenance to avoid leakage of water-bearing services or water bodies (ponds, swimming pools) should reduce likelihood of problems due to running sand. For new build - consider possibility of running sand into trenches or excavations if water table is high or sandy strata are exposed to water. Avoid concentrated water inputs to site. Unlikely to be an increase in construction costs due to potential for running sand. For existing property - no significant increase in insurance risk due to running sand problems is likely.
12	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
13	0.0	On Site	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.

ID	Distance (m)	Direction	Hazard Rating	Details
14	0.0	On Site	Low	Possibility of running sand problems after major changes in ground conditions. Normal maintenance to avoid leakage of water-bearing services or water bodies (ponds, swimming pools) should reduce likelihood of problems due to running sand. For new build - consider possibility of running sand into trenches or excavations if water table is high or sandy strata are exposed to water. Avoid concentrated water inputs to site. Unlikely to be an increase in construction costs due to potential for running sand. For existing property - no significant increase in insurance risk due to running sand problems is likely.
15	28.0	S	Very Low	Very low potential for running sand problems if water table rises or if sandy strata are exposed to water. No special actions required, to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.
16	34.0	S	Negligible	No indicators for running sand identified. No special actions required to avoid problems due to running sand. No special ground investigation required, and increased construction costs or increased financial risks are unlikely due to potential problems with running sand.

7 Borehole Records

The systematic analysis of data extracted from the BGS Borehole Records database provides the following information.

Records of boreholes within 250m of the study site boundary:

49

ID	Distance (m)	Direction	NGR	BGS Reference	Drilled Length	Borehole Name
1	0.0	On Site	493678 409460	SE90NW14	-1.0	SHOTHOLE RECORDS SCUNTHORPE
2	0.0	On Site	493587 409778	SE90NW135	-1.0	SODWALL PLANTATION EAST NO 1
3	0.0	On Site	493479 409136	SE90NW13	-1.0	SHOTHOLE RECORDS SCUNTHORPE
4	0.0	On Site	493578 409476	SE90NW43	-1.0	GOKEWELL ICEHOUSE WEST
5	0.0	On Site	493454 409404	SE90NW158	-1.0	MANBY HALL SOUTH-EAST
6	0.0	On Site	494460 410510	SE91SW461	-1.0	OVERHEAD LINE TOWERS TP 2
7B	0.0	On Site	494210 410280	SE91SW458	-1.0	OVERHEAD LINE TOWERS PBR7
8	0.0	On Site	494180 409963	SE90NW45	-1.0	GOKEWELL
9	0.0	On Site	494086 410124	SE91SW31	-1.0	SHOTHOLE REORDS RETFORD & SCUNTHORPE
10	0.0	On Site	493848 409381	SE90NW137	-1.0	GOKEWELL STRIP SOUTH 1
11	0.0	On Site	494245 409055	SE90NW142	-1.0	WEST WOOD WEST NO.3
12	0.0	On Site	493793 410059	SE91SW393	64.92	LITTLE CROW COVERT EAST
13	0.0	On Site	494165 409255	SE90NW46	-1.0	ICEHOUSE STRIP EAST
14	0.0	On Site	494148 409426	SE90NW138	-1.0	GOKEWELL STRIP PLANTATION NO.2
15A	0.0	On Site	494468 410687	SE91SW138	102.11	TOP WOOD 1
16A	0.0	On Site	494419 410651	SE91SW33	-1.0	SHOTHOLE REORDS RETFORD & SCUNTHORPE
17	0.0	On Site	494272 410368	SE91SW32	-1.0	SHOTHOLE REORDS RETFORD & SCUNTHORPE
18	0.0	On Site	494270 410320	SE91SW460	-1.0	OVERHEAD LINE TOWERS 1
19B	0.0	On Site	494190 410310	SE91SW459	-1.0	OVERHEAD LINE TOWERS JP PBR7
20	0.0	On Site	494208 410142	SE91SW392	86.56	GOKEWELL SOUTH
21C	0.0	On Site	494087 410523	SE91SW395	76.2	GOKEWELL FARM NORTH

ID	Distance (m)	Direction	NGR	BGS Reference	Drilled Length	Borehole Name
22	0.0	On Site	493867 409046	SE90NW141	-1.0	WEST WOOD WEST NO.2
23	0.0	On Site	494548 409415	SE90NW139	-1.0	GOKEWELL STRIP SOUTH 3
24	0.0	On Site	493959 409210	SE90NW16	-1.0	SHOTHOLE RECORDS SCUNTHORPE
25	0.0	On Site	493833 409774	SE90NW136	-1.0	SODWALL PLANTATION EAST NO 2
26	0.0	On Site	493832 409871	SE90NW15	-1.0	SHOTHOLE RECORDS SCUNTHORPE
27C	0.0	On Site	494052 410512	SE91SW3	12.8	GOKEWELL COTTAGE, HIGH SANTON LANE, LINCS
28	3.0	W	493479 409933	SE90NW44	-1.0	SODWALL PLANTATION
29	7.0	SE	494553 408979	SE90NW49	-1.0	MANBY WOOD
30	8.0	W	493859 410390	SE91SW141	56.39	GOKEWELL PRIORY FARM
31	13.0	E	494583 409056	SE90NW143	-1.0	WEST WOOD WEST NO.4
32	15.0	E	494555 410167	SE91SW391	102.11	GOKEWELL SOUTHEAST
33	20.0	NE	494572 409558	SE90NW42	-1.0	GOKEWELL STRIP
34	33.0	SW	493689 408992	SE90NW48	-1.0	GOKEWELL ICEHOSE NO 2
35	33.0	S	493501 409036	SE90NW140	-1.0	WEST WOOD WEST NO.1
36	51.0	S	494269 408938	SE90NW17	-1.0	SHOTHOLE RECORDS SCUNTHORPE
37	100.0	W	493392 410044	SE91SW394	44.81	LITTLE CROW COVERT WEST
38	105.0	W	493229 409108	SE90NW104	-1.0	YARBOROUGH
39	122.0	E	494630 410500	SE91SW462	-1.0	OVERHEAD LINE TOWERS TP 3
40	125.0	W	493229 409243	SE90NW105	-1.0	YARBOROUGH
41	146.0	W	493226 409358	SE90NW106	-1.0	YARBOROUGH
42	150.0	NE	494624 410766	SE91SW456	-1.0	BROUGHTON B1
43	175.0	S	494537 408808	SE90NW18	-1.0	SHOTHOLE RECORDS SCUNTHORPE
44	182.0	W	493209 409486	SE90NW107	-1.0	YARBOROUGH
45	186.0	E	494680 410650	SE91SW463	-1.0	OVERHEAD LINE TOWERS 3
46	204.0	NW	493224 409617	SE90NW91	-1.0	YARBOROUGH MINES
47	224.0	W	493119 409009	SE90NW47	-1.0	GOKEWELL ICEHOSE NO 2
48	230.0	W	493104 409120	SE90NW110	-1.0	YARBOROUGH
49	240.0	W	493111 409232	SE90NW109	-1.0	YARBOROUGH


The borehole records are available using the hyperlinks below: Please note that if the donor of the borehole record has requested the information be held as commercial-in-confidence, the additional data will be held separately by the BGS and a formal request must be made for its release.

#9: scans.bgs.ac.uk/sobi_scans/boreholes/134113
#12: scans.bgs.ac.uk/sobi_scans/boreholes/134477
#15A: scans.bgs.ac.uk/sobi_scans/boreholes/134222
#16A: scans.bgs.ac.uk/sobi_scans/boreholes/134115
#17: scans.bgs.ac.uk/sobi_scans/boreholes/134114
#20: scans.bgs.ac.uk/sobi_scans/boreholes/134476
#21C: scans.bgs.ac.uk/sobi_scans/boreholes/134479
#27C: scans.bgs.ac.uk/sobi_scans/boreholes/134078
#30: scans.bgs.ac.uk/sobi_scans/boreholes/134225
#32: scans.bgs.ac.uk/sobi_scans/boreholes/134475
#37: scans.bgs.ac.uk/sobi_scans/boreholes/134478

Distance (m)	Direction	Sample Type	Arsenic (As)	Cadmium (Cd)	Chromium (Cr)	Nickel (Ni)	Lead (Pb)
43.0	W	RuralSoil	<15 mg/kg	<1.8 mg/kg	40 - 60 mg/kg	<15 mg/kg	<100 mg/kg
47.0	SW	RuralSoil	15 - 25 mg/kg	<1.8 mg/kg	60 - 90 mg/kg	<15 mg/kg	<100 mg/kg







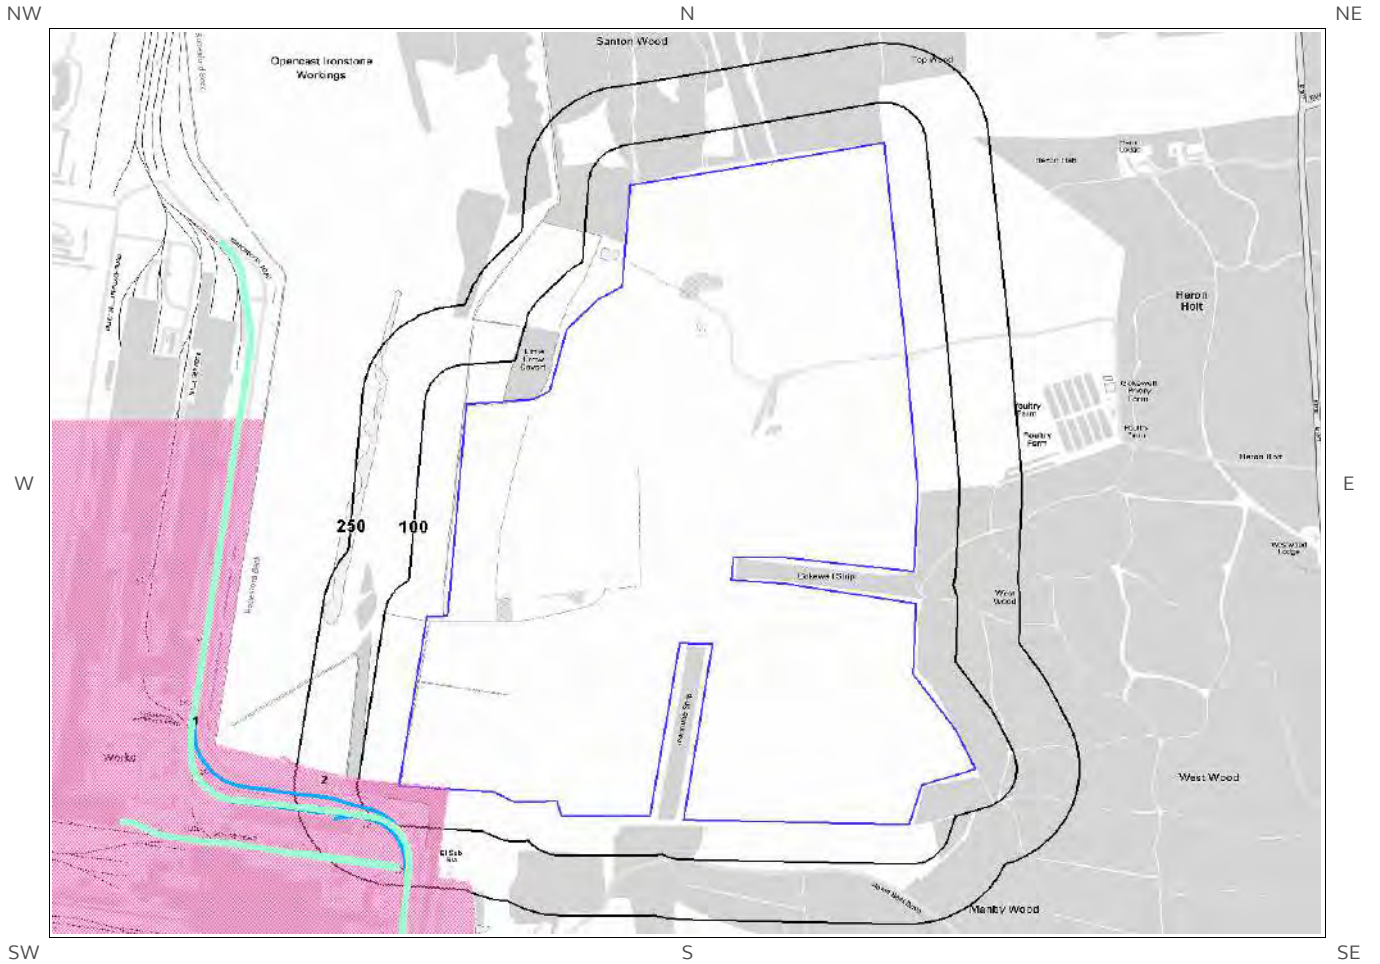




*As this data is based upon underlying 1:50,000 scale geological information, a 50m buffer has been added to the search radius.

9 Railways and Tunnels Map



Railways and Tunnels Legend

© Crown copyright and database rights 2017.
Ordnance Survey license 100035207.
© OpenStreetMapContributors

	Site Outline		Underground or Partially Underground Railway / Subway System		Railway Track (OpenStreetMap)
	Search Buffers (m)		Railway Tunnel (OS Mapping)		High Speed 2
			Abandoned or Dismantled Railway (OpenStreetMap)		High Speed 2 Revised Proposed Route
			Railway Track (OS Mapping)		Crossrail 1
					Railway and/or Tunnel Feature from Historical Mapping

9 Railways and Tunnels

9.1 Tunnels

This data is derived from OpenStreetMap and provides information on the possible locations of underground railway systems in the UK - the London Underground, the Tyne & Wear Metro and the Glasgow Subway.

Have any underground railway lines been identified within the study site boundary? No

Have any underground railway lines been identified within 250m of the study site boundary? No

Database searched and no data found.

Any records that have been identified are represented on the Railways and Tunnels Map.

This data is derived from Ordnance Survey mapping and provides information on the possible locations of railway tunnels forming part of the UK overground railway network.

Have any other railway tunnels been identified within the site boundary? No

Have any other railway tunnels been identified within 250m of the site boundary? No

Database searched and no data found.

Any records that have been identified are represented on the Railways and Tunnels Map.

9.2 Historical Railway and Tunnel Features

This data is derived from Groundsure's unique Historical Land-use Database and contains features relating to tunnels, railway tracks or associated works that have been identified from historical Ordnance Survey mapping.

Have any historical railway or tunnel features been identified within the study site boundary? Yes

Have any historical railway or tunnel features been identified within 250m of the study site boundary? Yes

ID	Distance (m)	Direction	NGR	Details	Date
1	0	On Site	492330 409132	Railway Sidings	1979
2	87	SW	493155 409087	Railway Sidings	1997
3	212	SW	493303 408773	Railway Sidings	1997
4	221	SW	493324 408599	Railway Sidings	1975

Any records that have been identified are represented on the Railways and Tunnels Map.

9.3 Historical Railways

This data is derived from OpenStreetMap and provides information on the possible alignments of abandoned or dismantled railway lines in proximity to the study site.

Have any historical railway lines been identified within the study site boundary? No

Have any historical railway lines been identified within 250m of the study site boundary? No

Database searched and no data found.

Multiple sections of the same track may be listed in the detail above
Any records that have been identified are represented on the Railways and Tunnels Map.

9.4 Active Railways

These datasets are derived from Ordnance Survey mapping and OpenStreetMap and provide information on the possible locations of active railway lines in proximity to the study site.

Have any active railway lines been identified within the study site boundary? No

Have any active railway lines been identified within 250m of the study site boundary? Yes

Distance (m)	Direction	Name	Type
82	SW	Not given	Multi Track
82	SW	Not given	Multi Track
95	S	Not given	Rail
95	S	Not given	Rail
104	SW	Not given	Multi Track
104	SW	Not given	Multi Track
119	SW	Not given	Multi Track
119	SW	Not given	Multi Track
119	SW	Not given	Multi Track
119	SW	Not given	Multi Track
200	S	Not given	Rail
200	S	Not given	Rail
204	S	Not given	Rail
204	S	Not given	Rail
215	SW	Not given	Rail
215	SW	Not given	Rail

Multiple sections of the same track may be listed in the detail above
Any records that have been identified are represented on the Railways and Tunnels Map.

9.5 Railway Projects

These datasets provide information on the location of large scale railway projects High Speed 2 and Crossrail 1 .

Is the study site within 5km of the route of the High Speed 2 rail project? No

Is the study site within 500m of the route of the Crossrail 1 rail project? No

Further information on proximity to these routes, the project construction status and associated works can be obtained through the purchase of a Groundsure HS2 and Crossrail 1 Report.

The route data has been digitised from publicly available maps by Groundsure. The route as provided relates to the Crossrail 1 project only, and does not include any details of the Crossrail 2 project, as final details of the route for Crossrail 2 are still under consultation.

Please note that this assessment takes account of both the original Phase 2b proposed route and the amended route proposed in 2016. As the Phase 2b route is still under consultation, Groundsure are providing information on both options until the final route is formally confirmed. Practitioners should take account of this uncertainty when advising clients.

Contact Details

CENTREMAPS

Telephone: 01886 832972
Groundsure@centremaps.co.uk
Open Space, Upper Interfields, Malvern, Worcester, WR14 1UT



British Geological Survey Enquiries

Kingsley Dunham Centre
Keyworth, Nottingham NG12 5GG
Tel: 0115 936 3143.
Fax: 0115 936 3276.
Email: enquiries@bgs.ac.uk
Web: www.bgs.ac.uk

BGS Geological Hazards Reports and general geological enquiries



British Gypsum

British Gypsum Ltd
East Leake
Loughborough
Leicestershire
LE12 6HX



The Coal Authority

200 Lichfield Lane
Mansfield
Notts NG18 4RG
Tel: 0345 7626 848
DX 716176 Mansfield 5
www.coal.gov.uk



Public Health England

Public information access office
Public Health England, Wellington House
133-155 Waterloo Road, London, SE1 8UG
<https://www.gov.uk/government/organisations/public-health-england>
Email: enquiries@phe.gov.uk
Main switchboard: 020 7654 8000



Johnson Poole & Bloomer Limited

Harris and Pearson Building, Brettell Lane
Brierley Hill, West Midlands
DY5 3LH
Tel: +44 (0) 1384 262 000
Email: enquiries.gs@jpb.co.uk
Website: www.jpb.co.uk



Ordnance Survey

Adanac Drive, Southampton
SO16 0AS
Tel: 08456 050505
Website: <http://www.ordnancesurvey.co.uk/>



Getmapping PLC

Virginia Villas, High Street, Hartley Witney,
Hampshire RG27 8NW
Tel: 01252 845444
Website: <http://www.1.getmapping.com/>






Peter Brett Associates
Caversham Bridge House
Waterman Place
Reading
Berkshire RG1 8DN
Tel: +44 (0)118 950 0761 E-mail: reading@pba.co.uk
Website: <http://www.peterbrett.com/home>



Acknowledgements: Ordnance Survey © Crown Copyright and/or Database Right. All Rights Reserved. Licence Number [03421028]. This report has been prepared in accordance with the Groundsure Ltd standard Terms and Conditions of business for work of this nature.

Standard Terms and Conditions

Groundsure's Terms and Conditions can be viewed online at this link:
<https://www.groundsure.com/terms-and-conditions-sept-2016/>

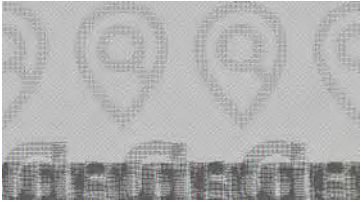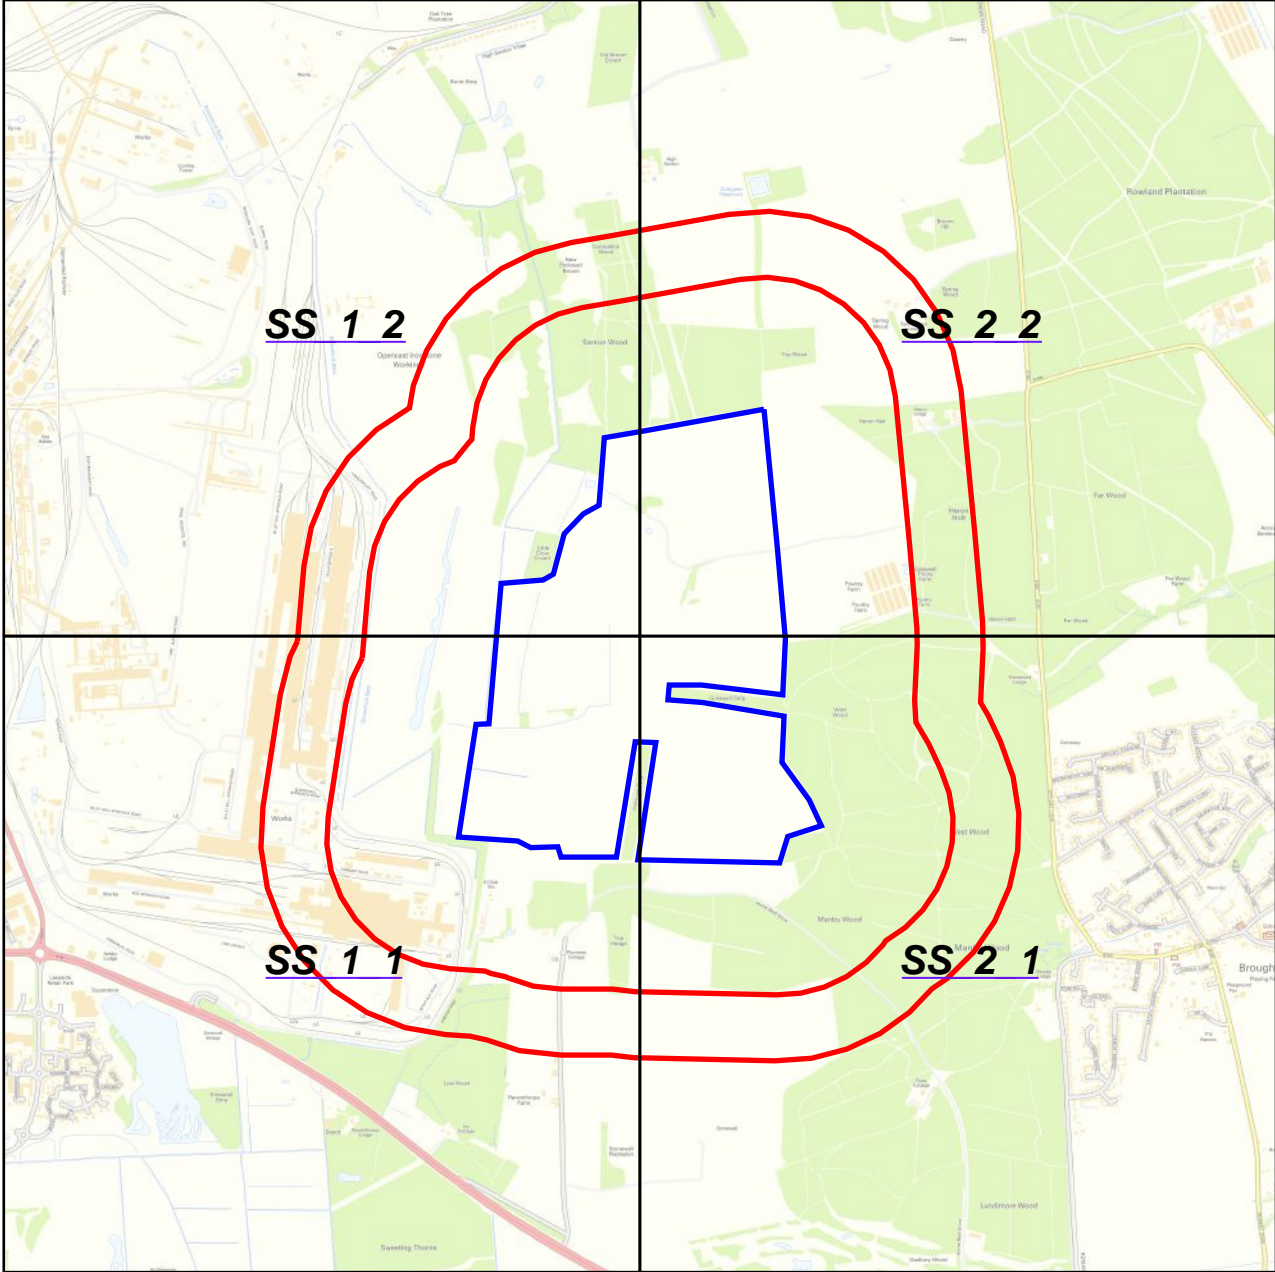

Small Scale Grid Index



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: County Series

Map date: 1885-1886

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1886
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1885
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1885
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

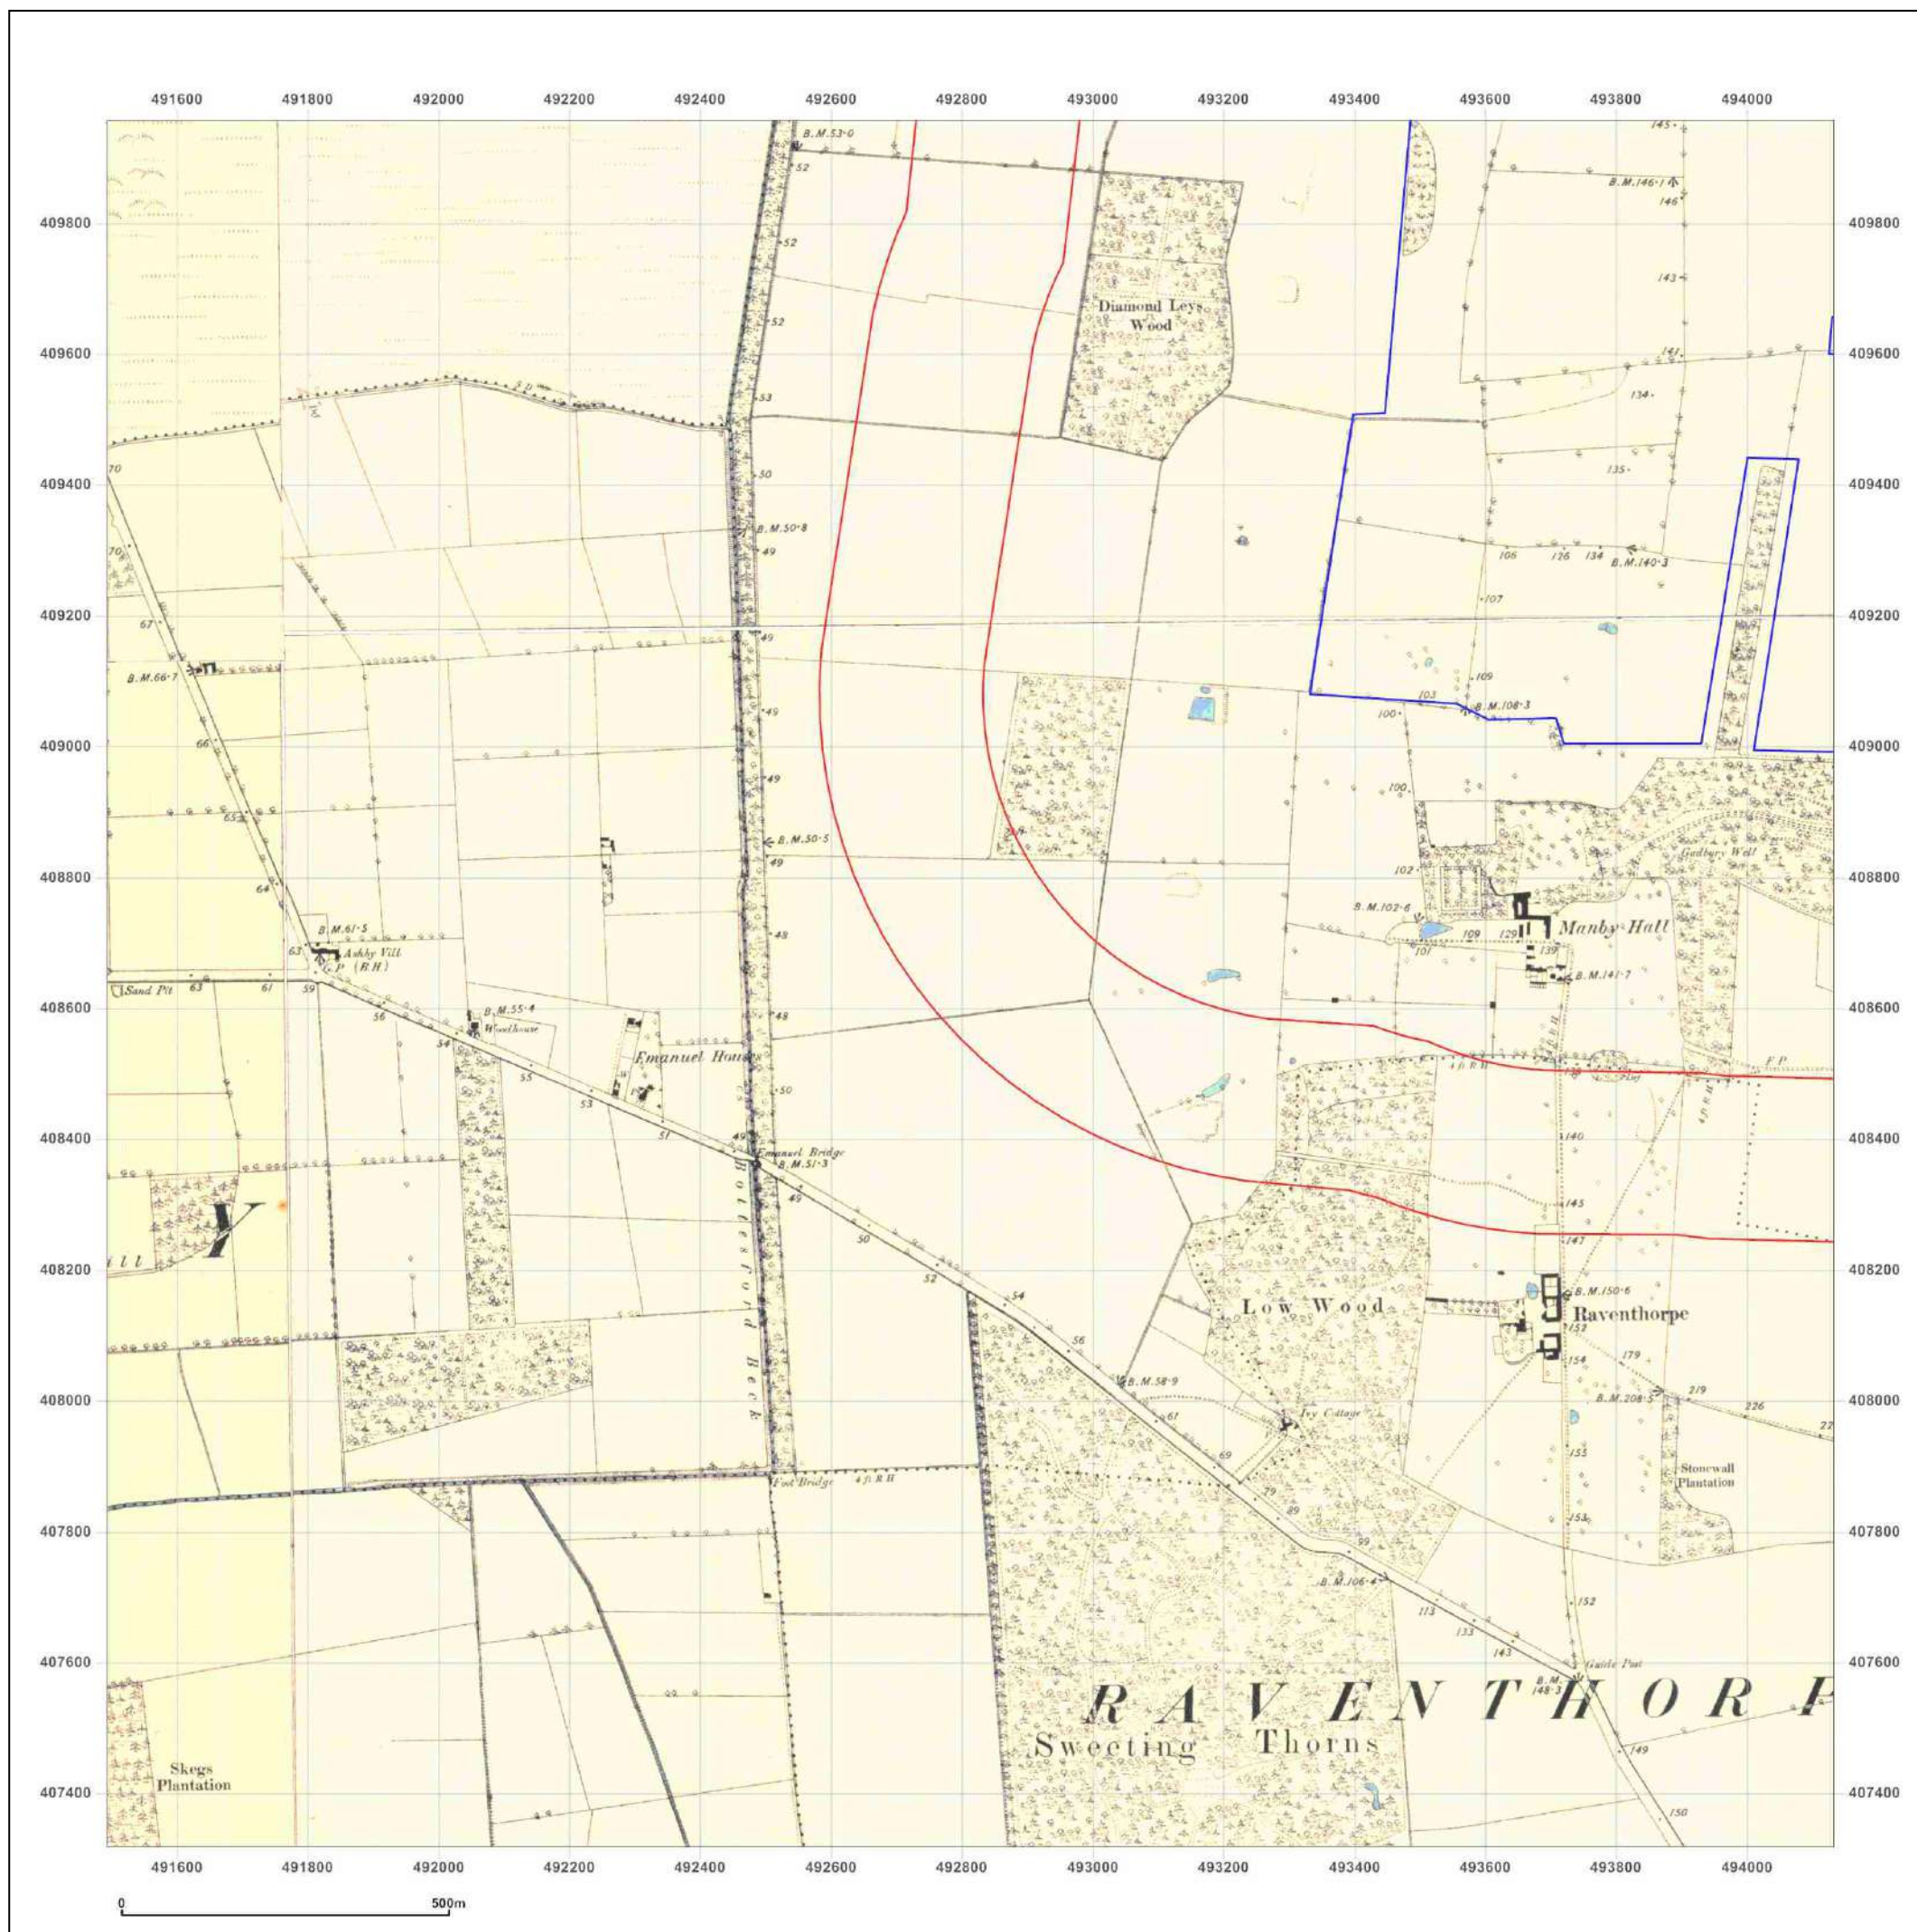



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: County Series

Map date: 1885-1886

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1885
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1886
Revised 1886
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

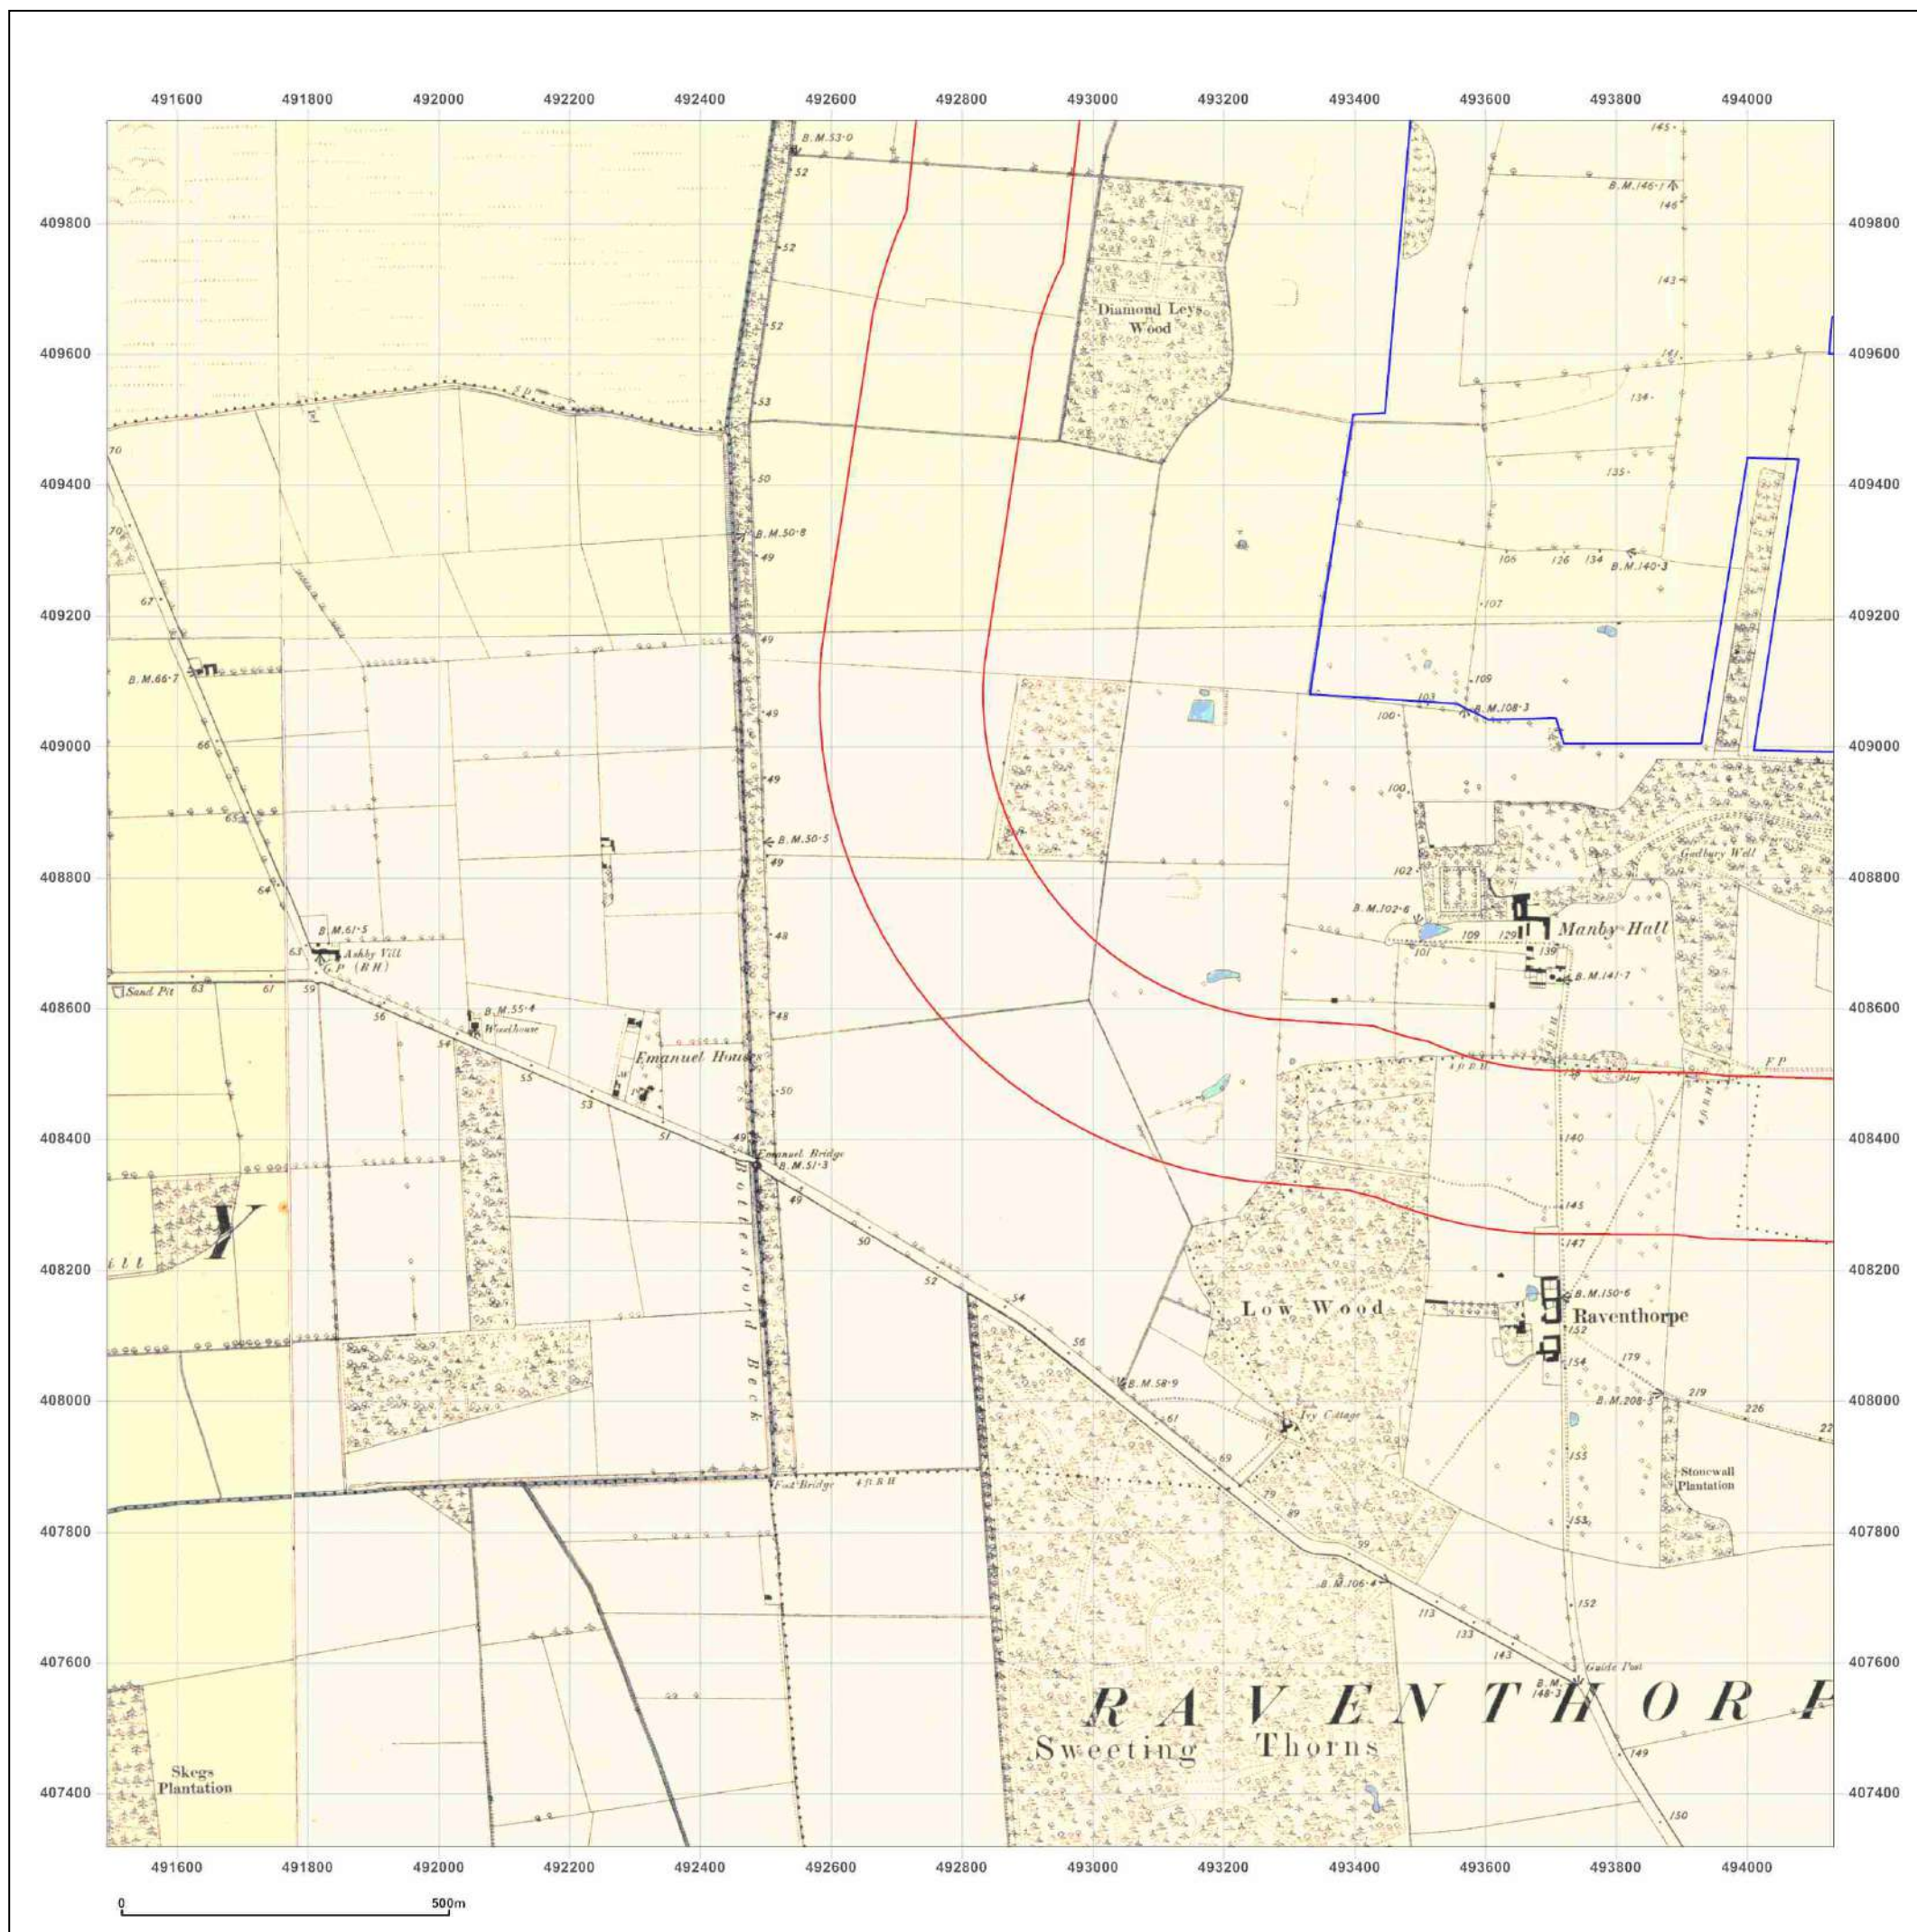



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: County Series

Map date: 1905-1906

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1906
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1905
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

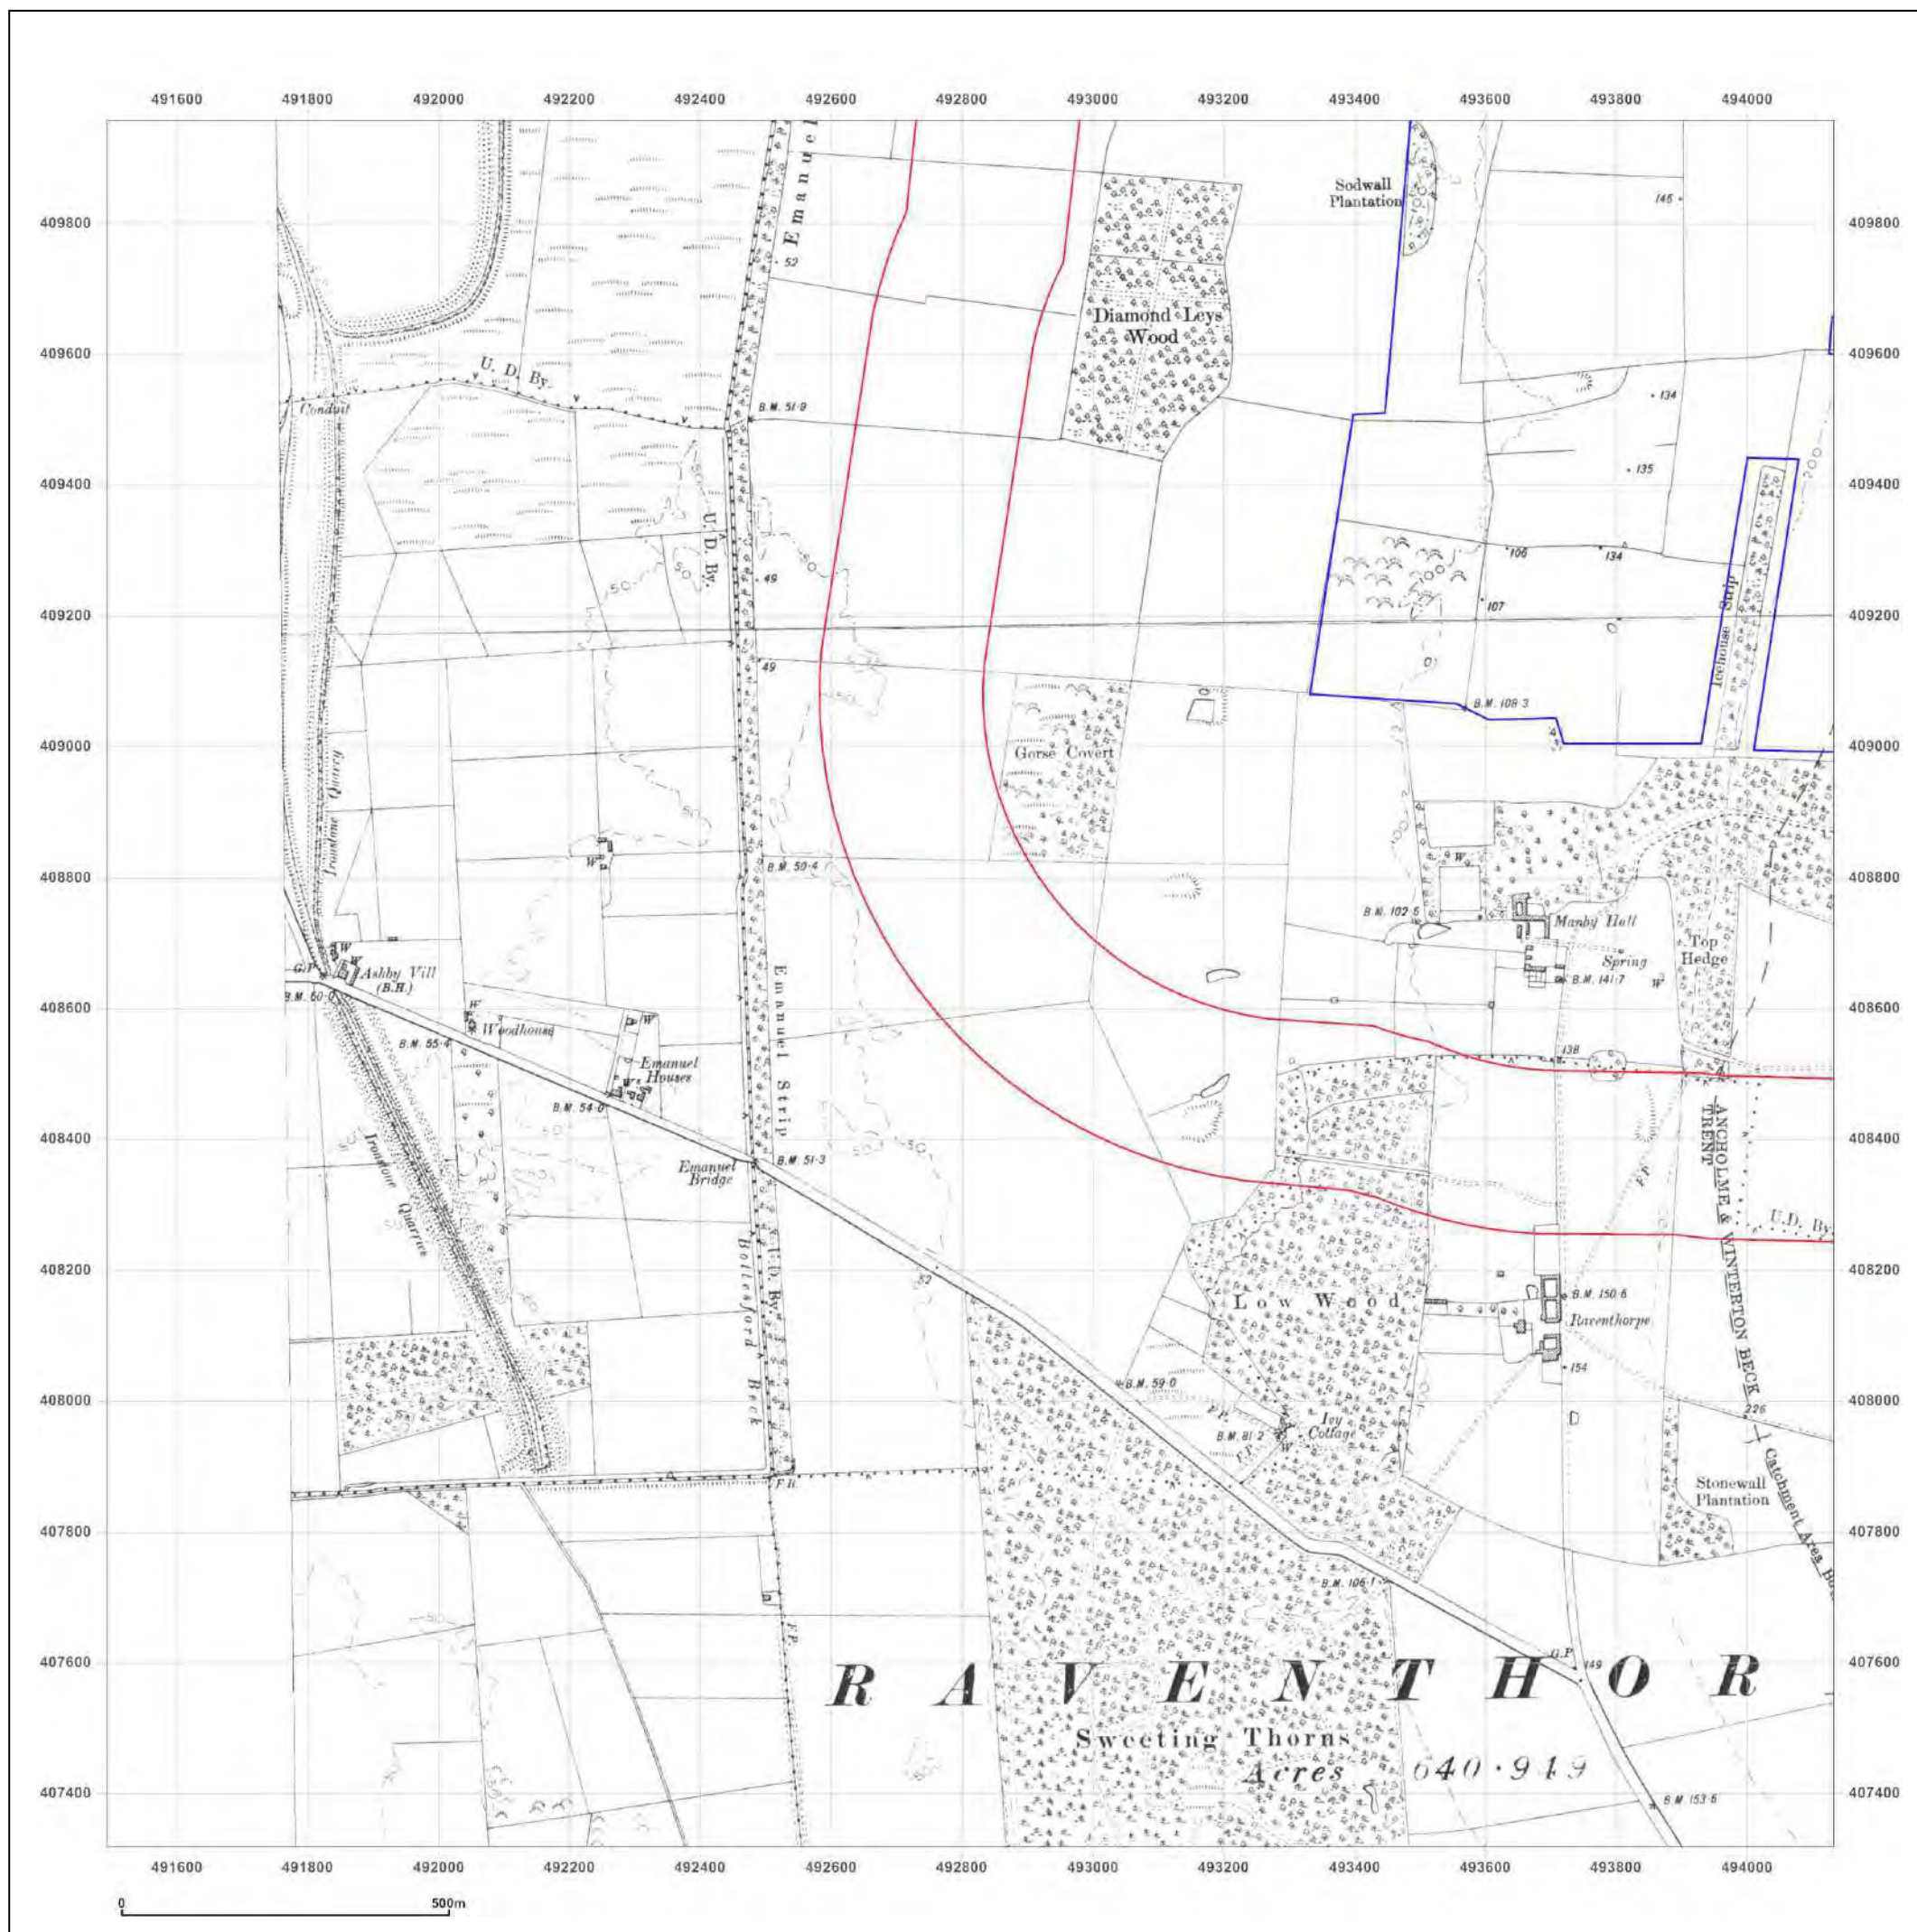



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: County Series


Map date: 1938

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1938
Edition N/A
Copyright N/A
Levelled N/A

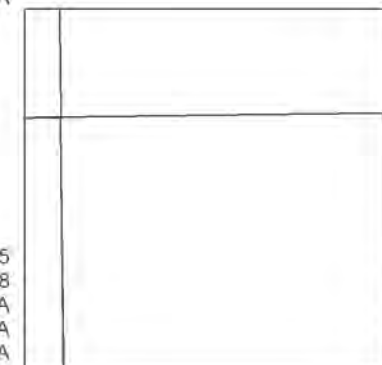

Surveyed 1885
Revised 1938
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1938
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

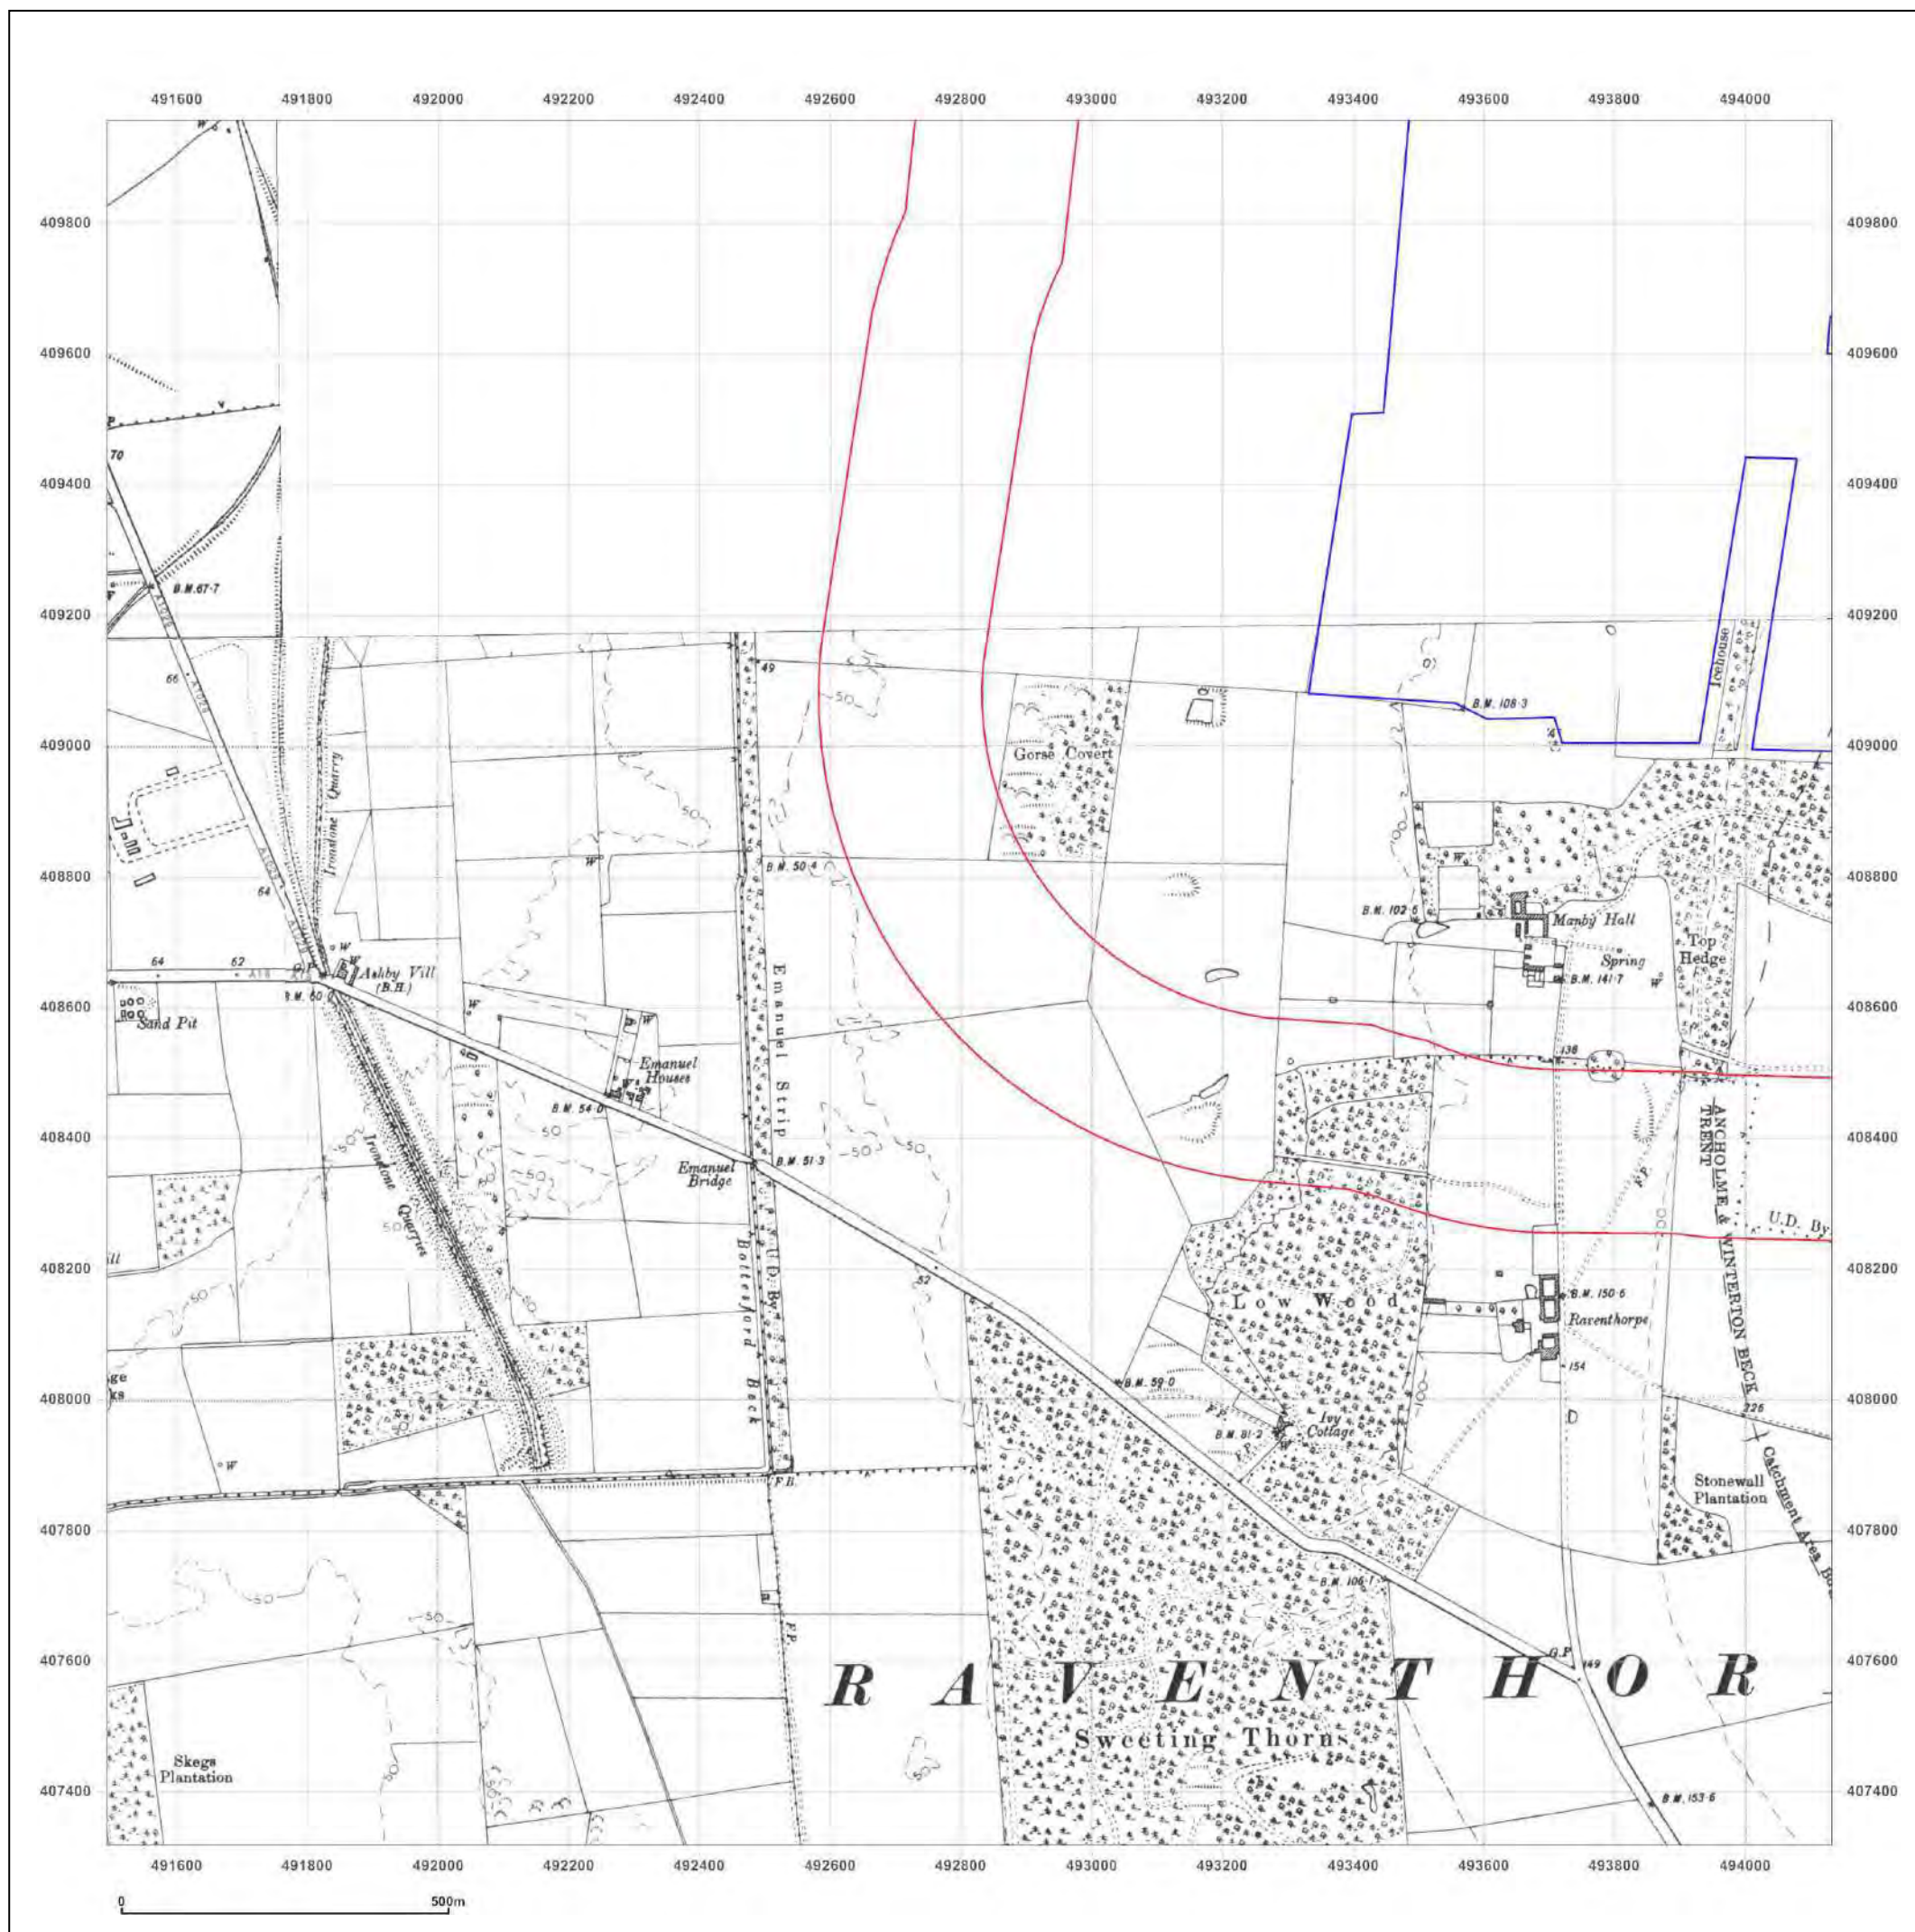



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: County Series

Map date: 1948

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1948
Edition 1948
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1948
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1948
Edition 1948
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1948
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

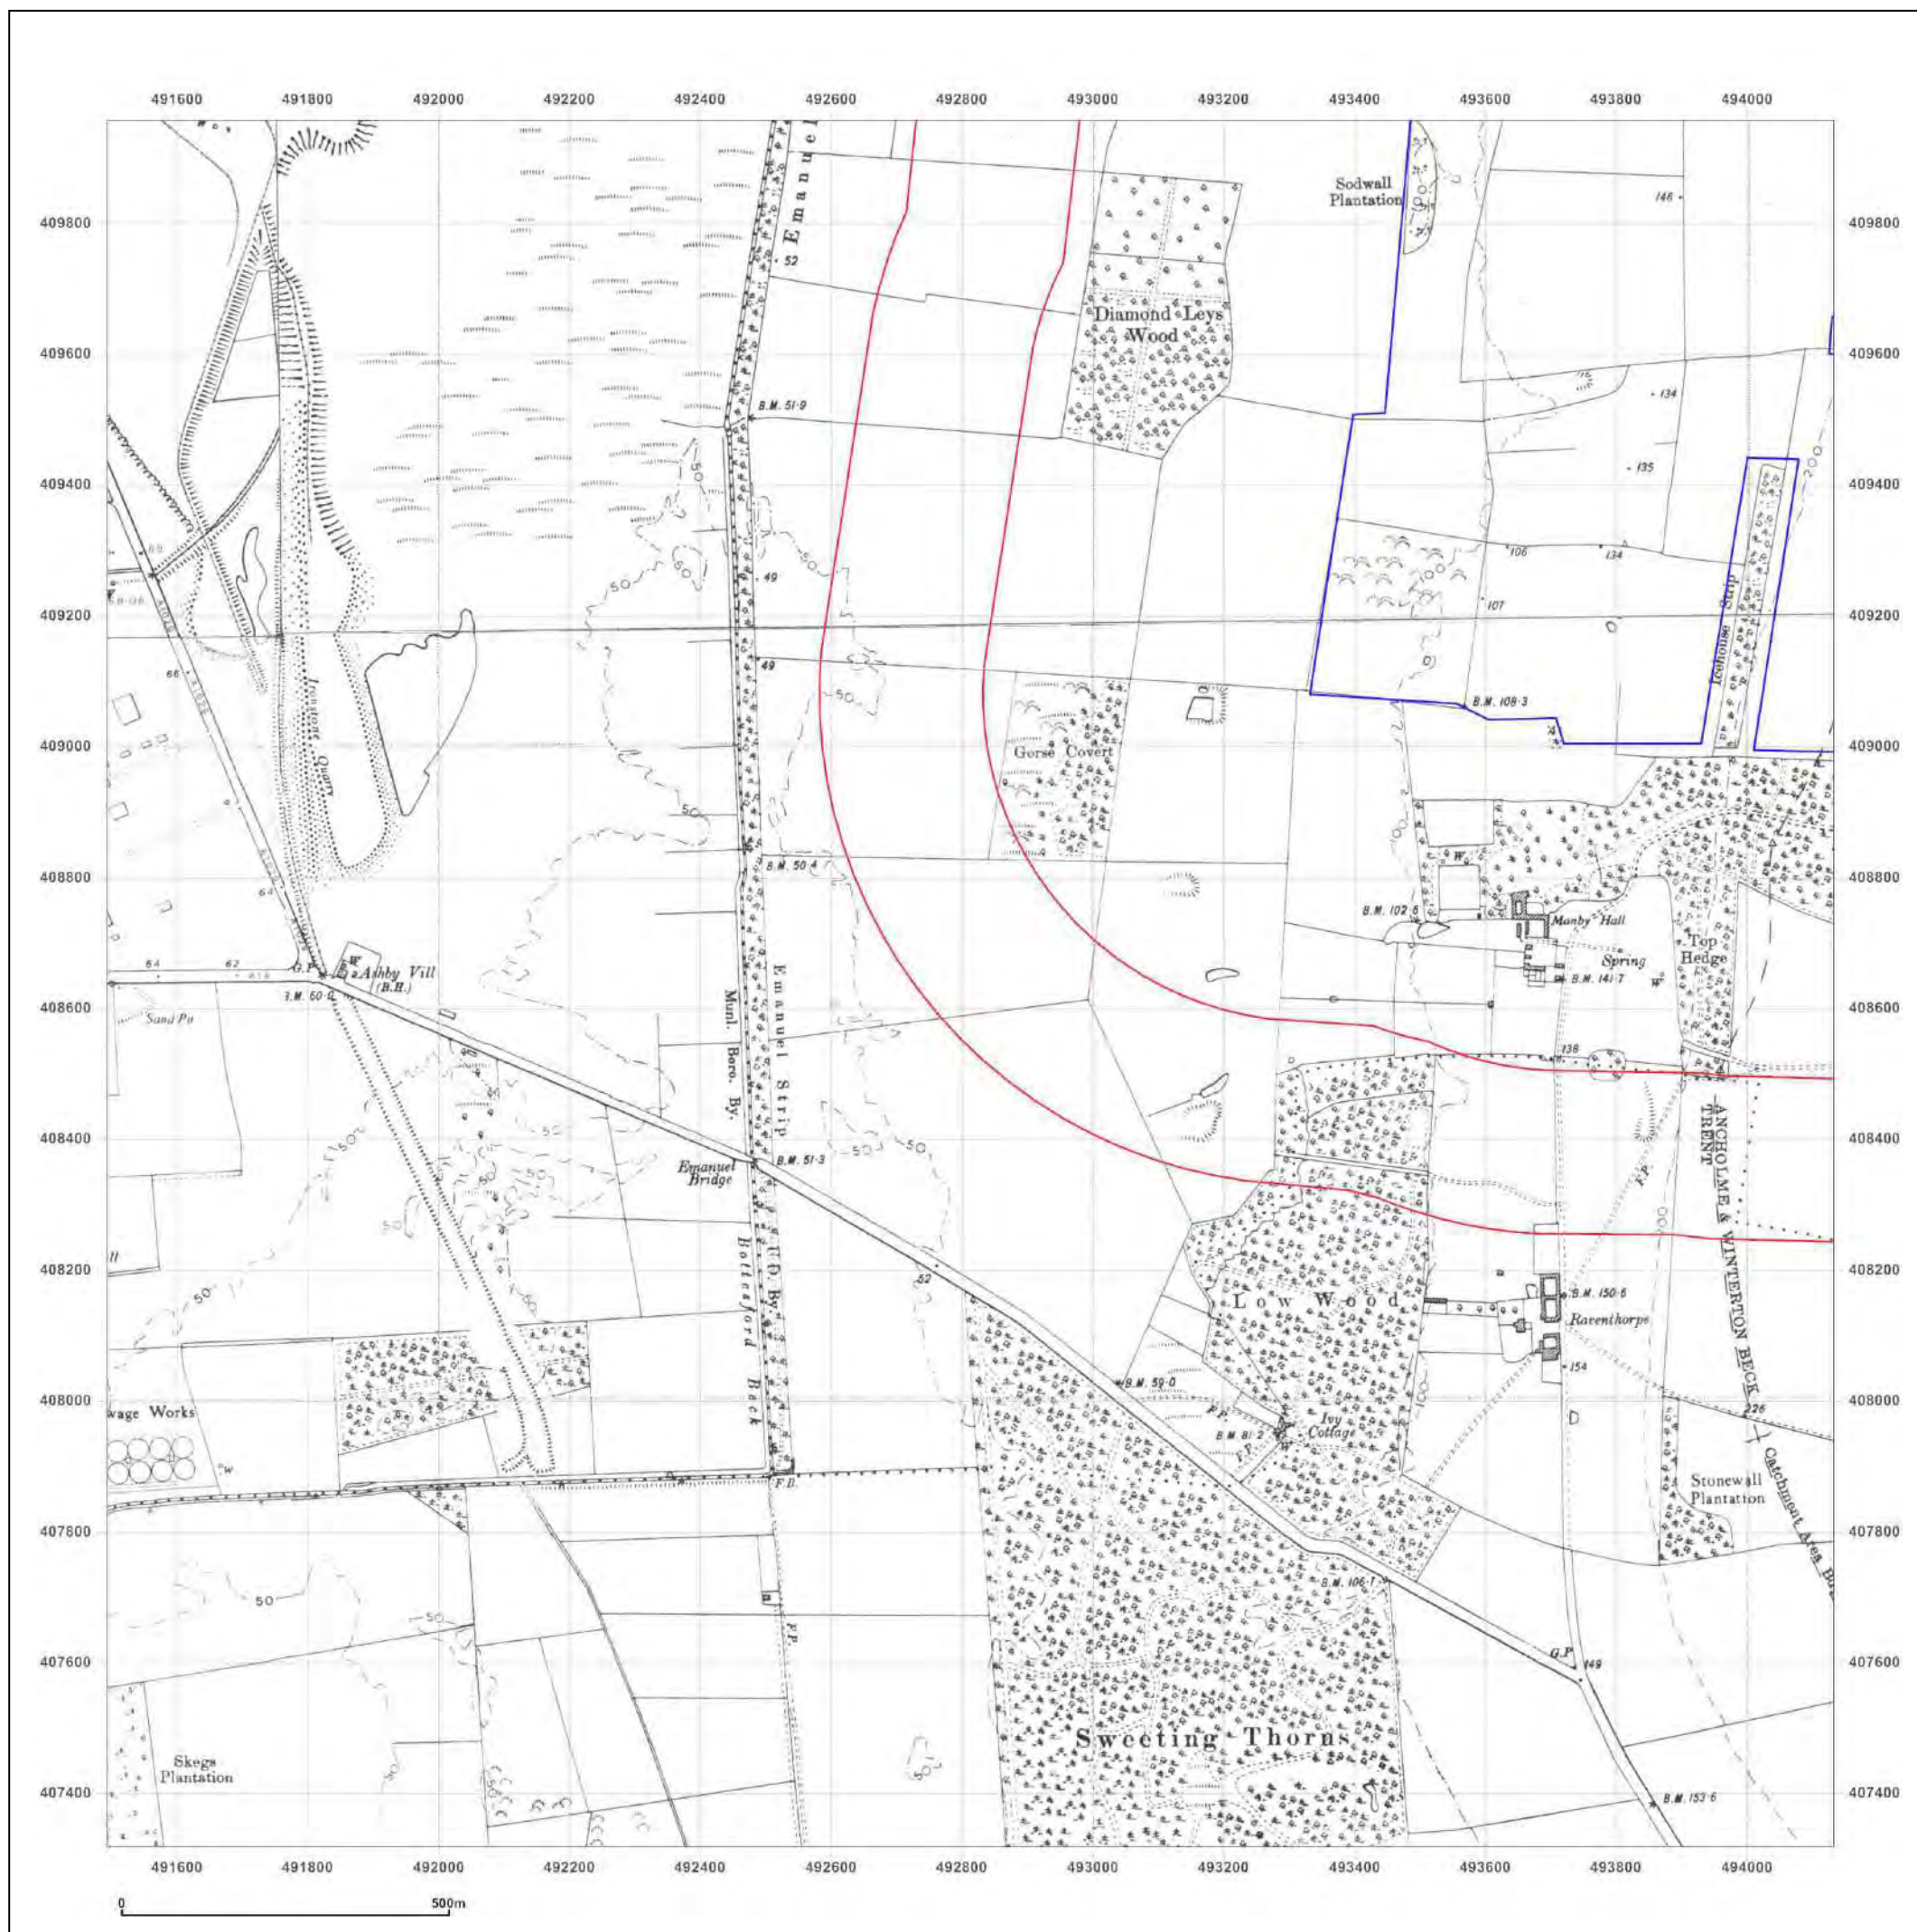



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: Provisional

Map date: 1955

Scale: 1:10,560

Printed at: 1:10,560



Surveyed N/A
Revised 1955
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

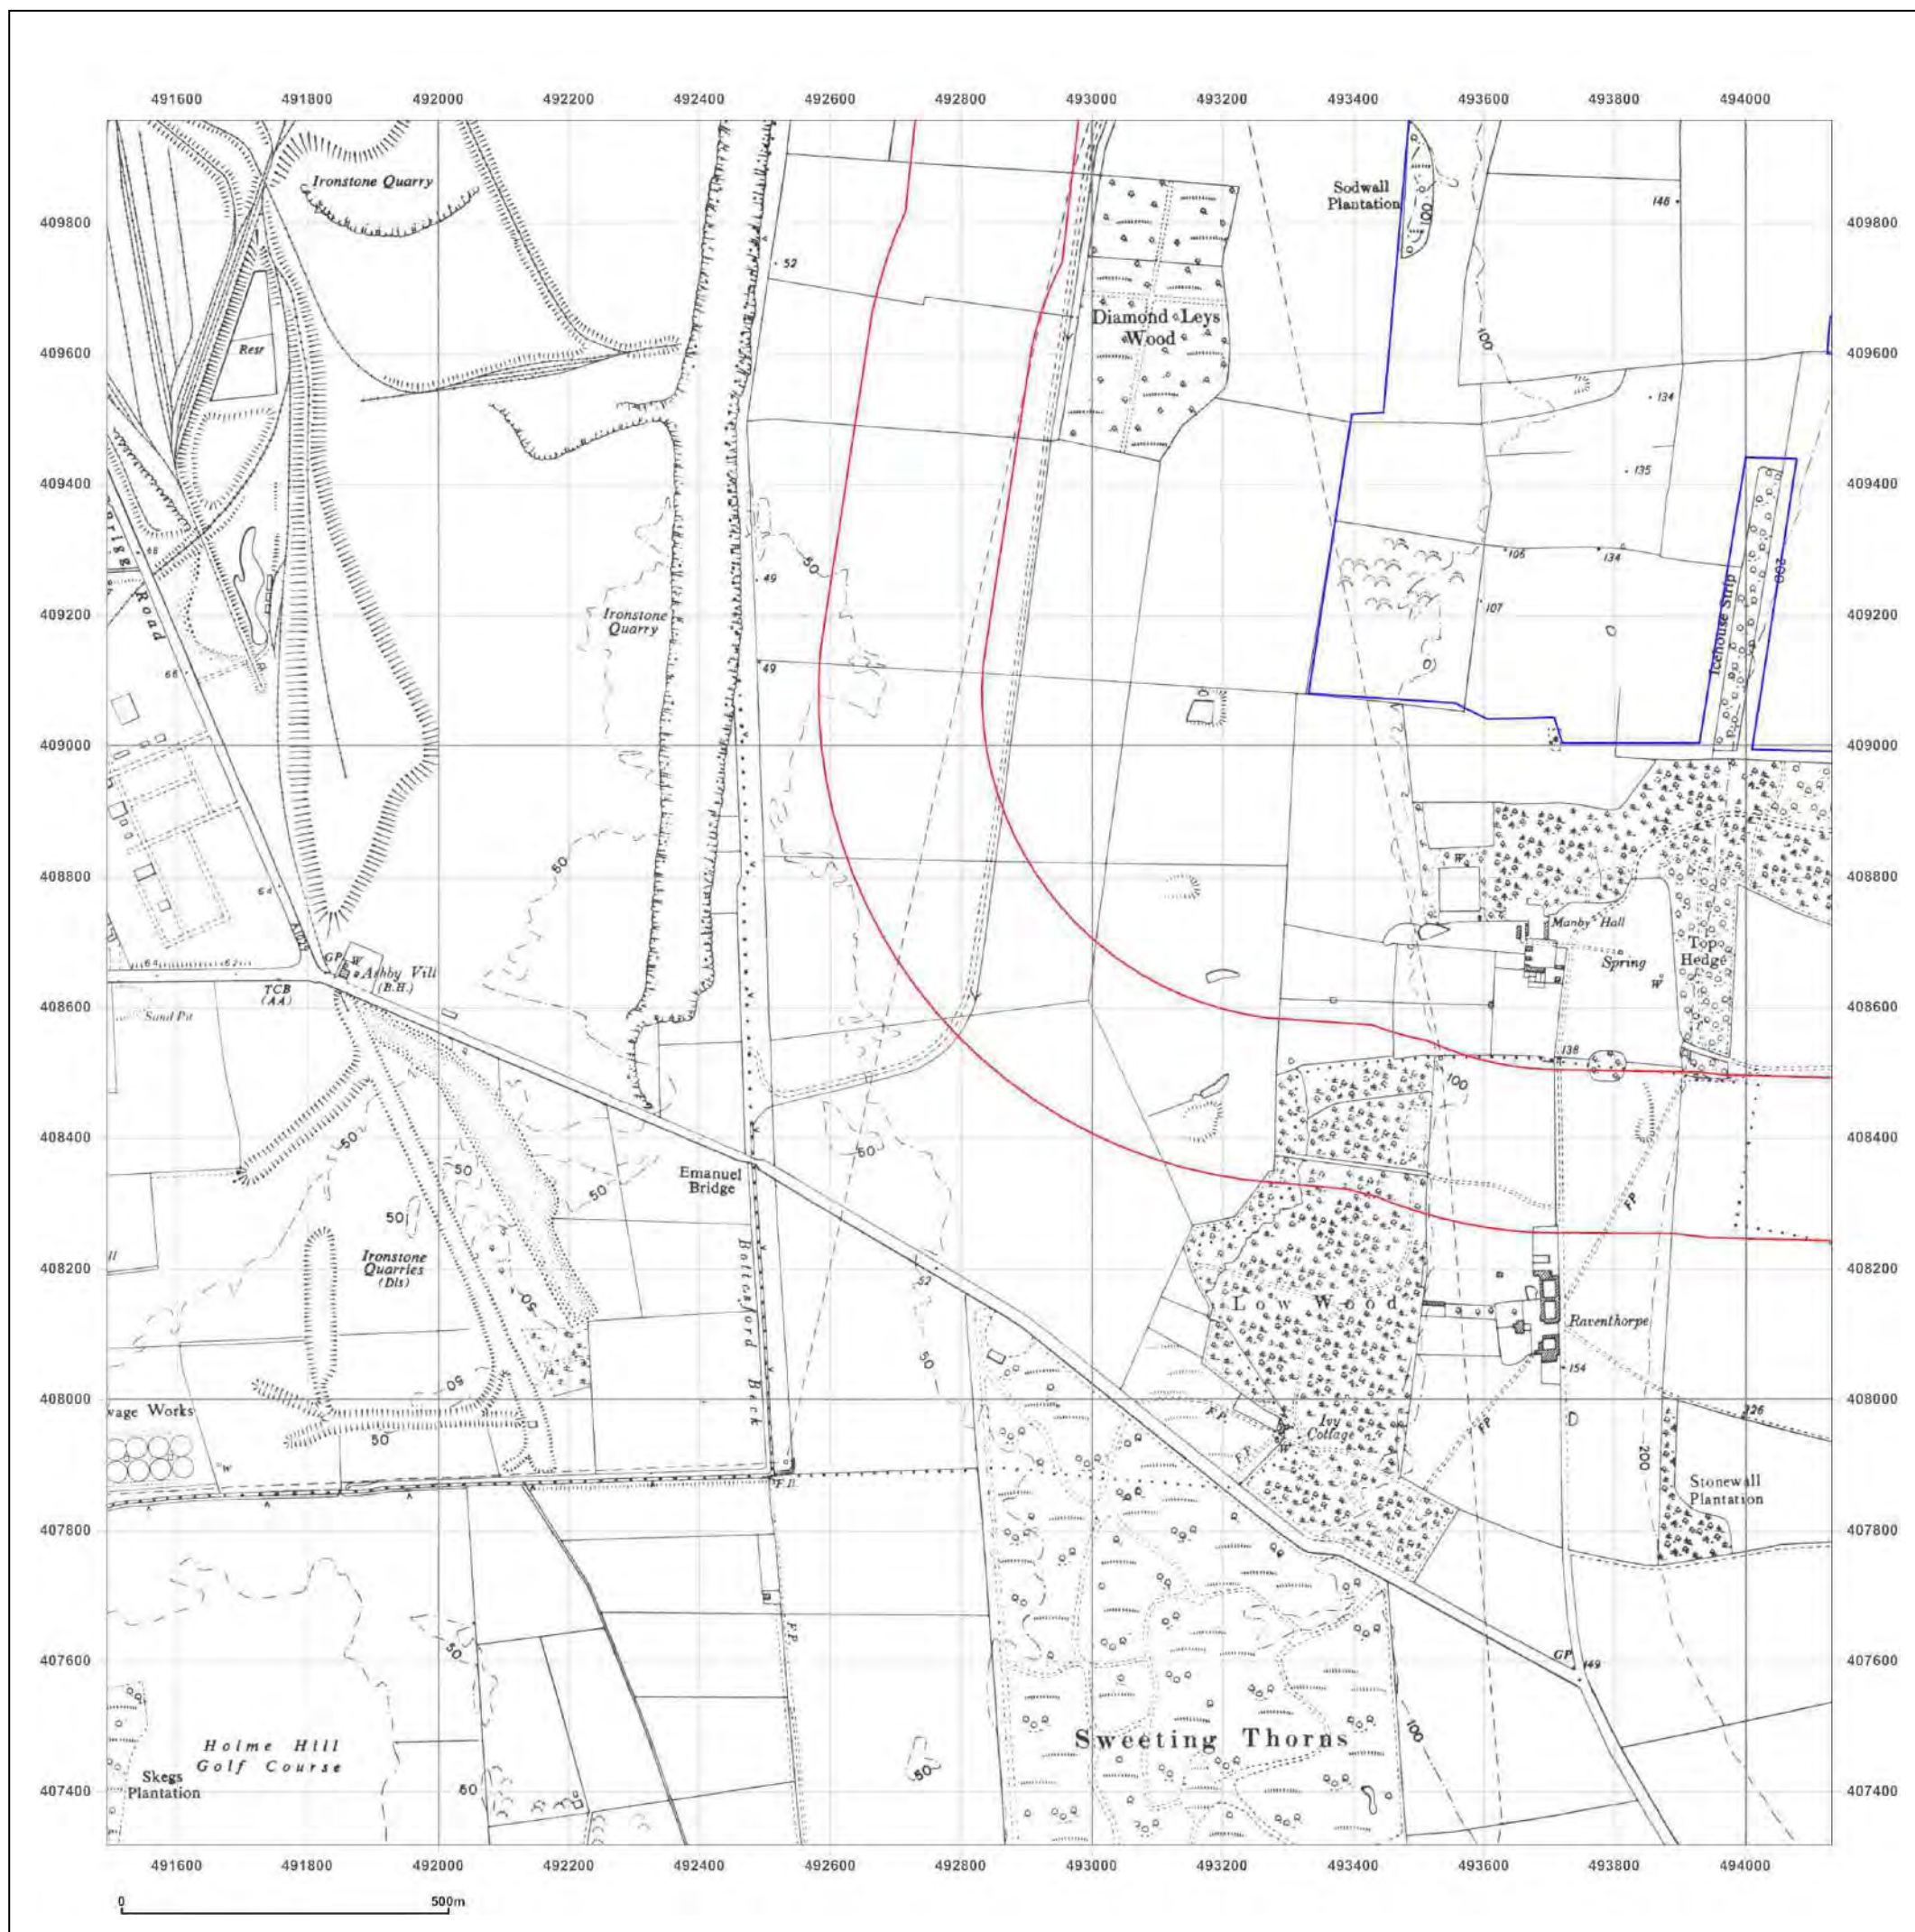



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_
Grid Ref: 492812, 408637

Map Name: Provisional


Map date: 1968

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1968
Revised 1968
Edition N/A
Copyright N/A
Levelled N/A

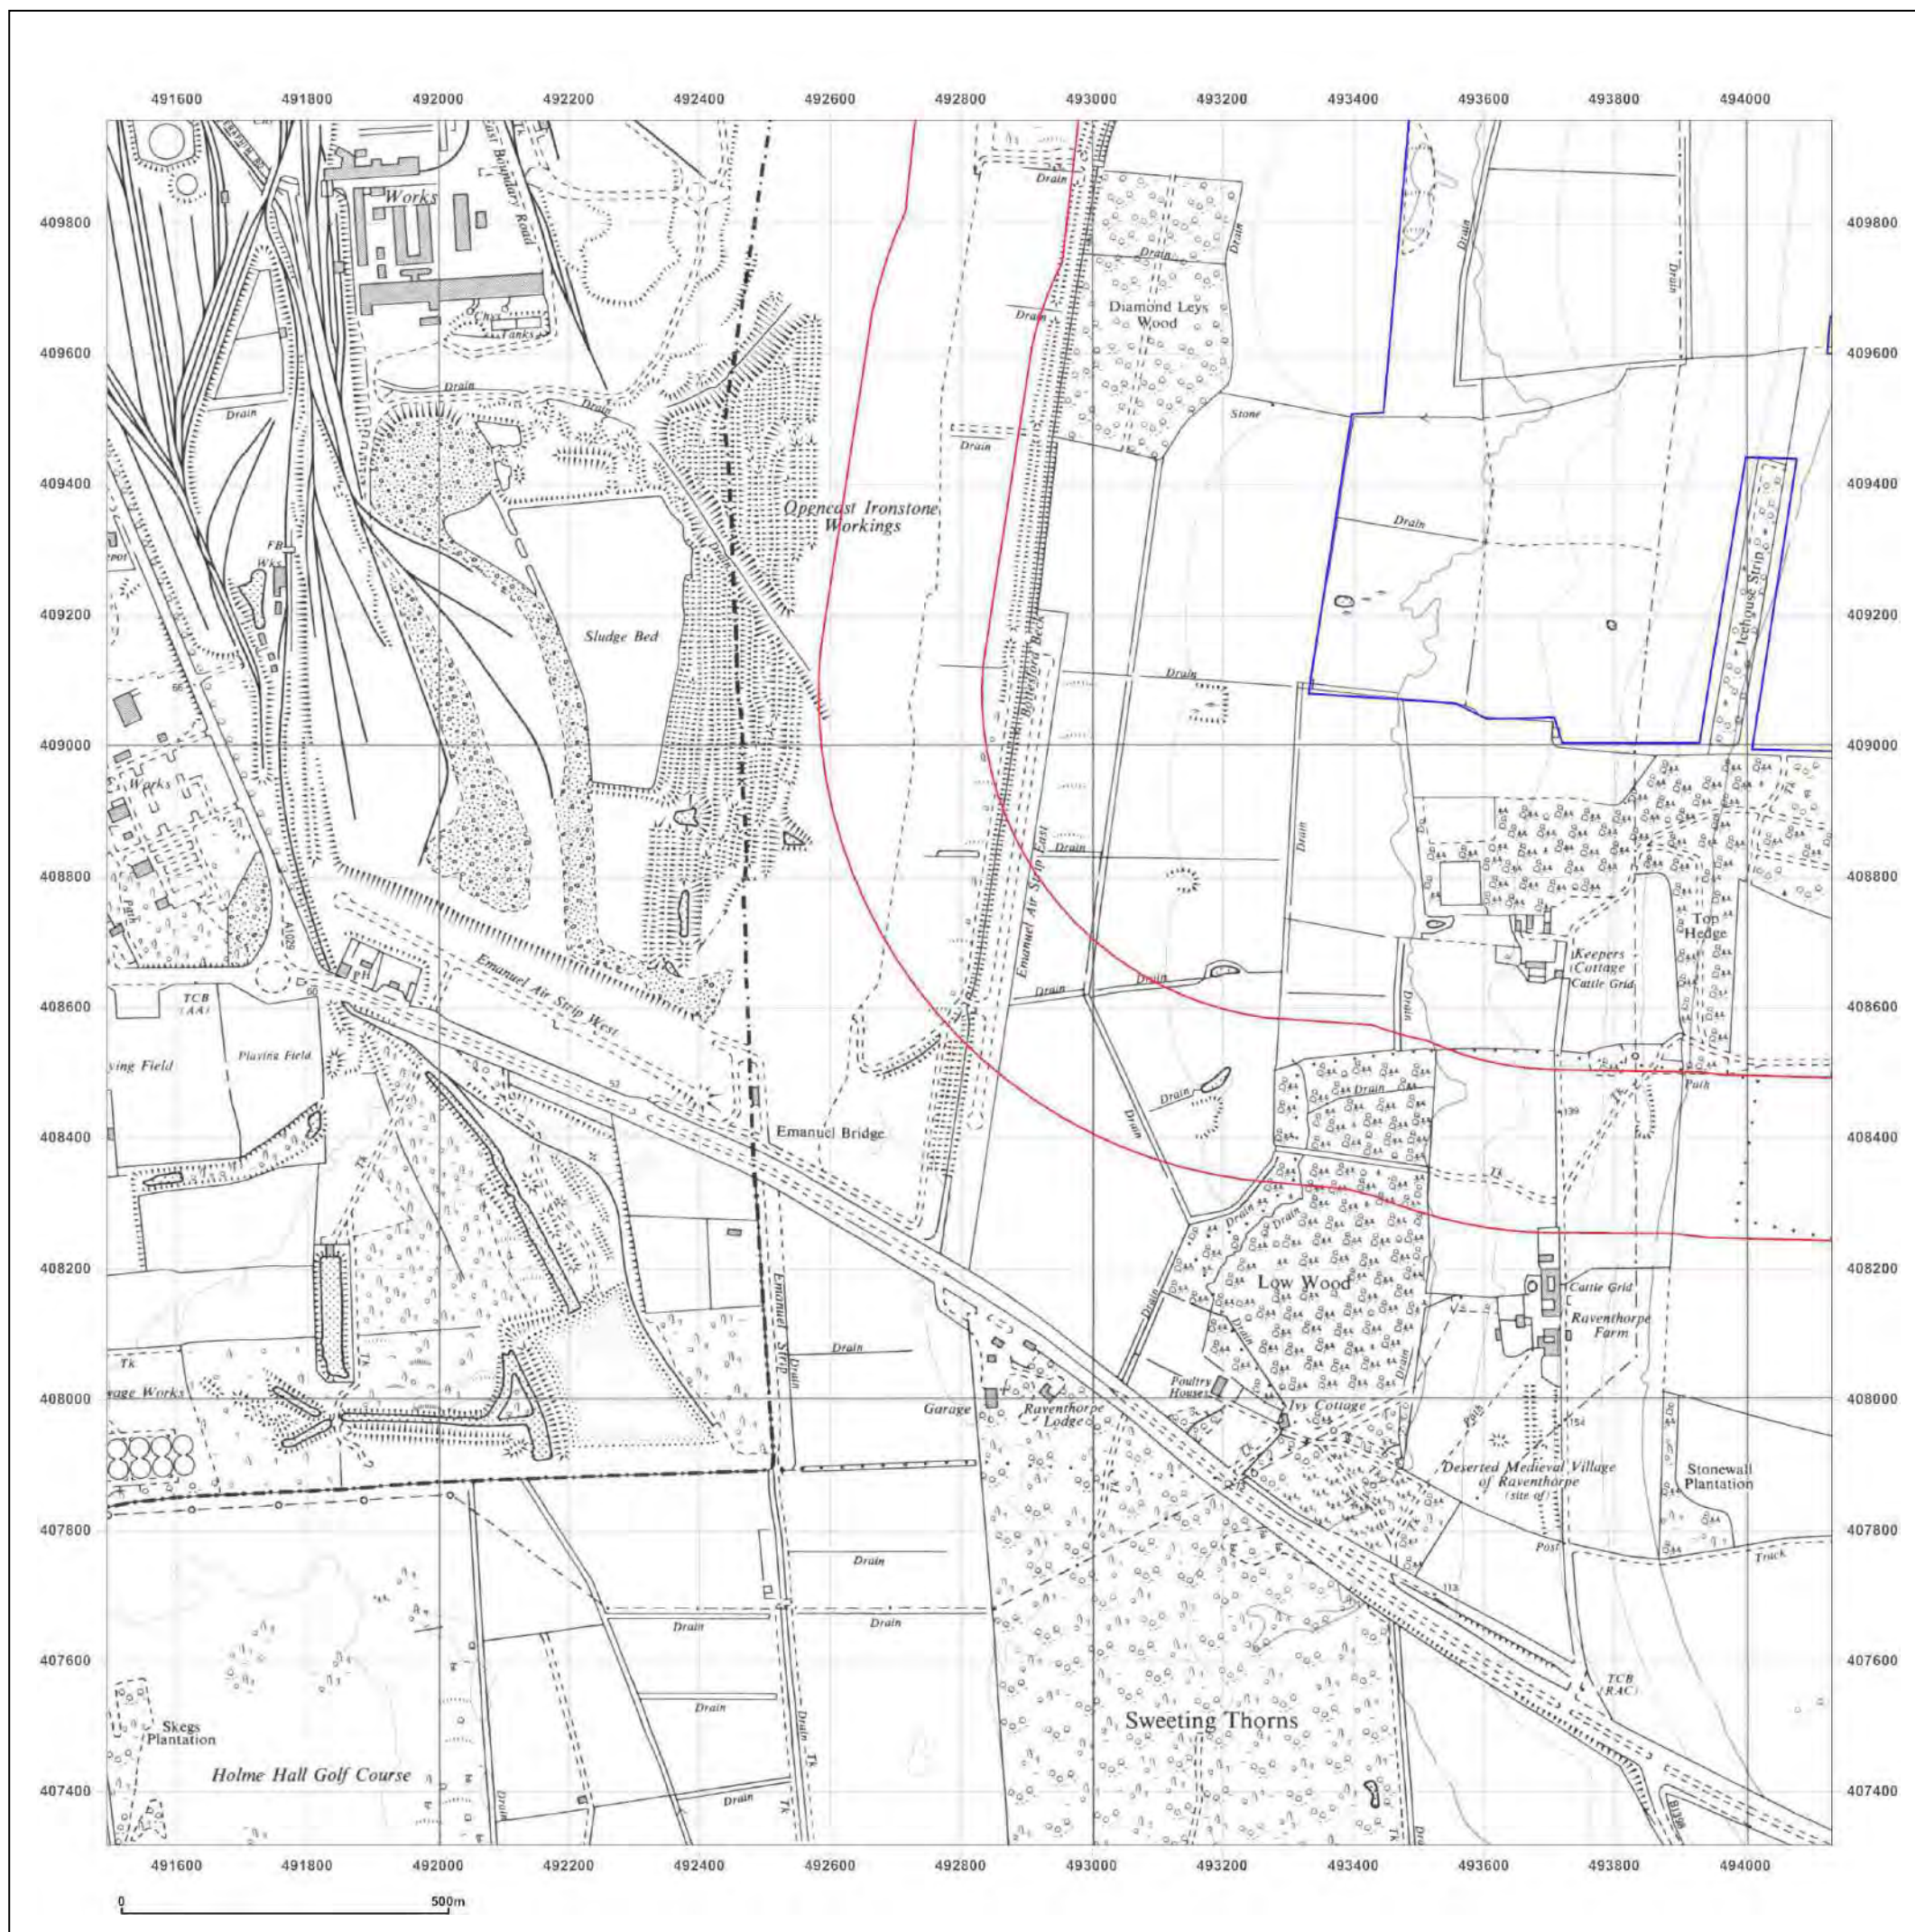

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: National Grid


Map date: 1979

Scale: 1:10,000

Printed at: 1:10,000



Surveyed 1978
Revised 1979
Edition N/A
Copyright N/A
Levelled N/A

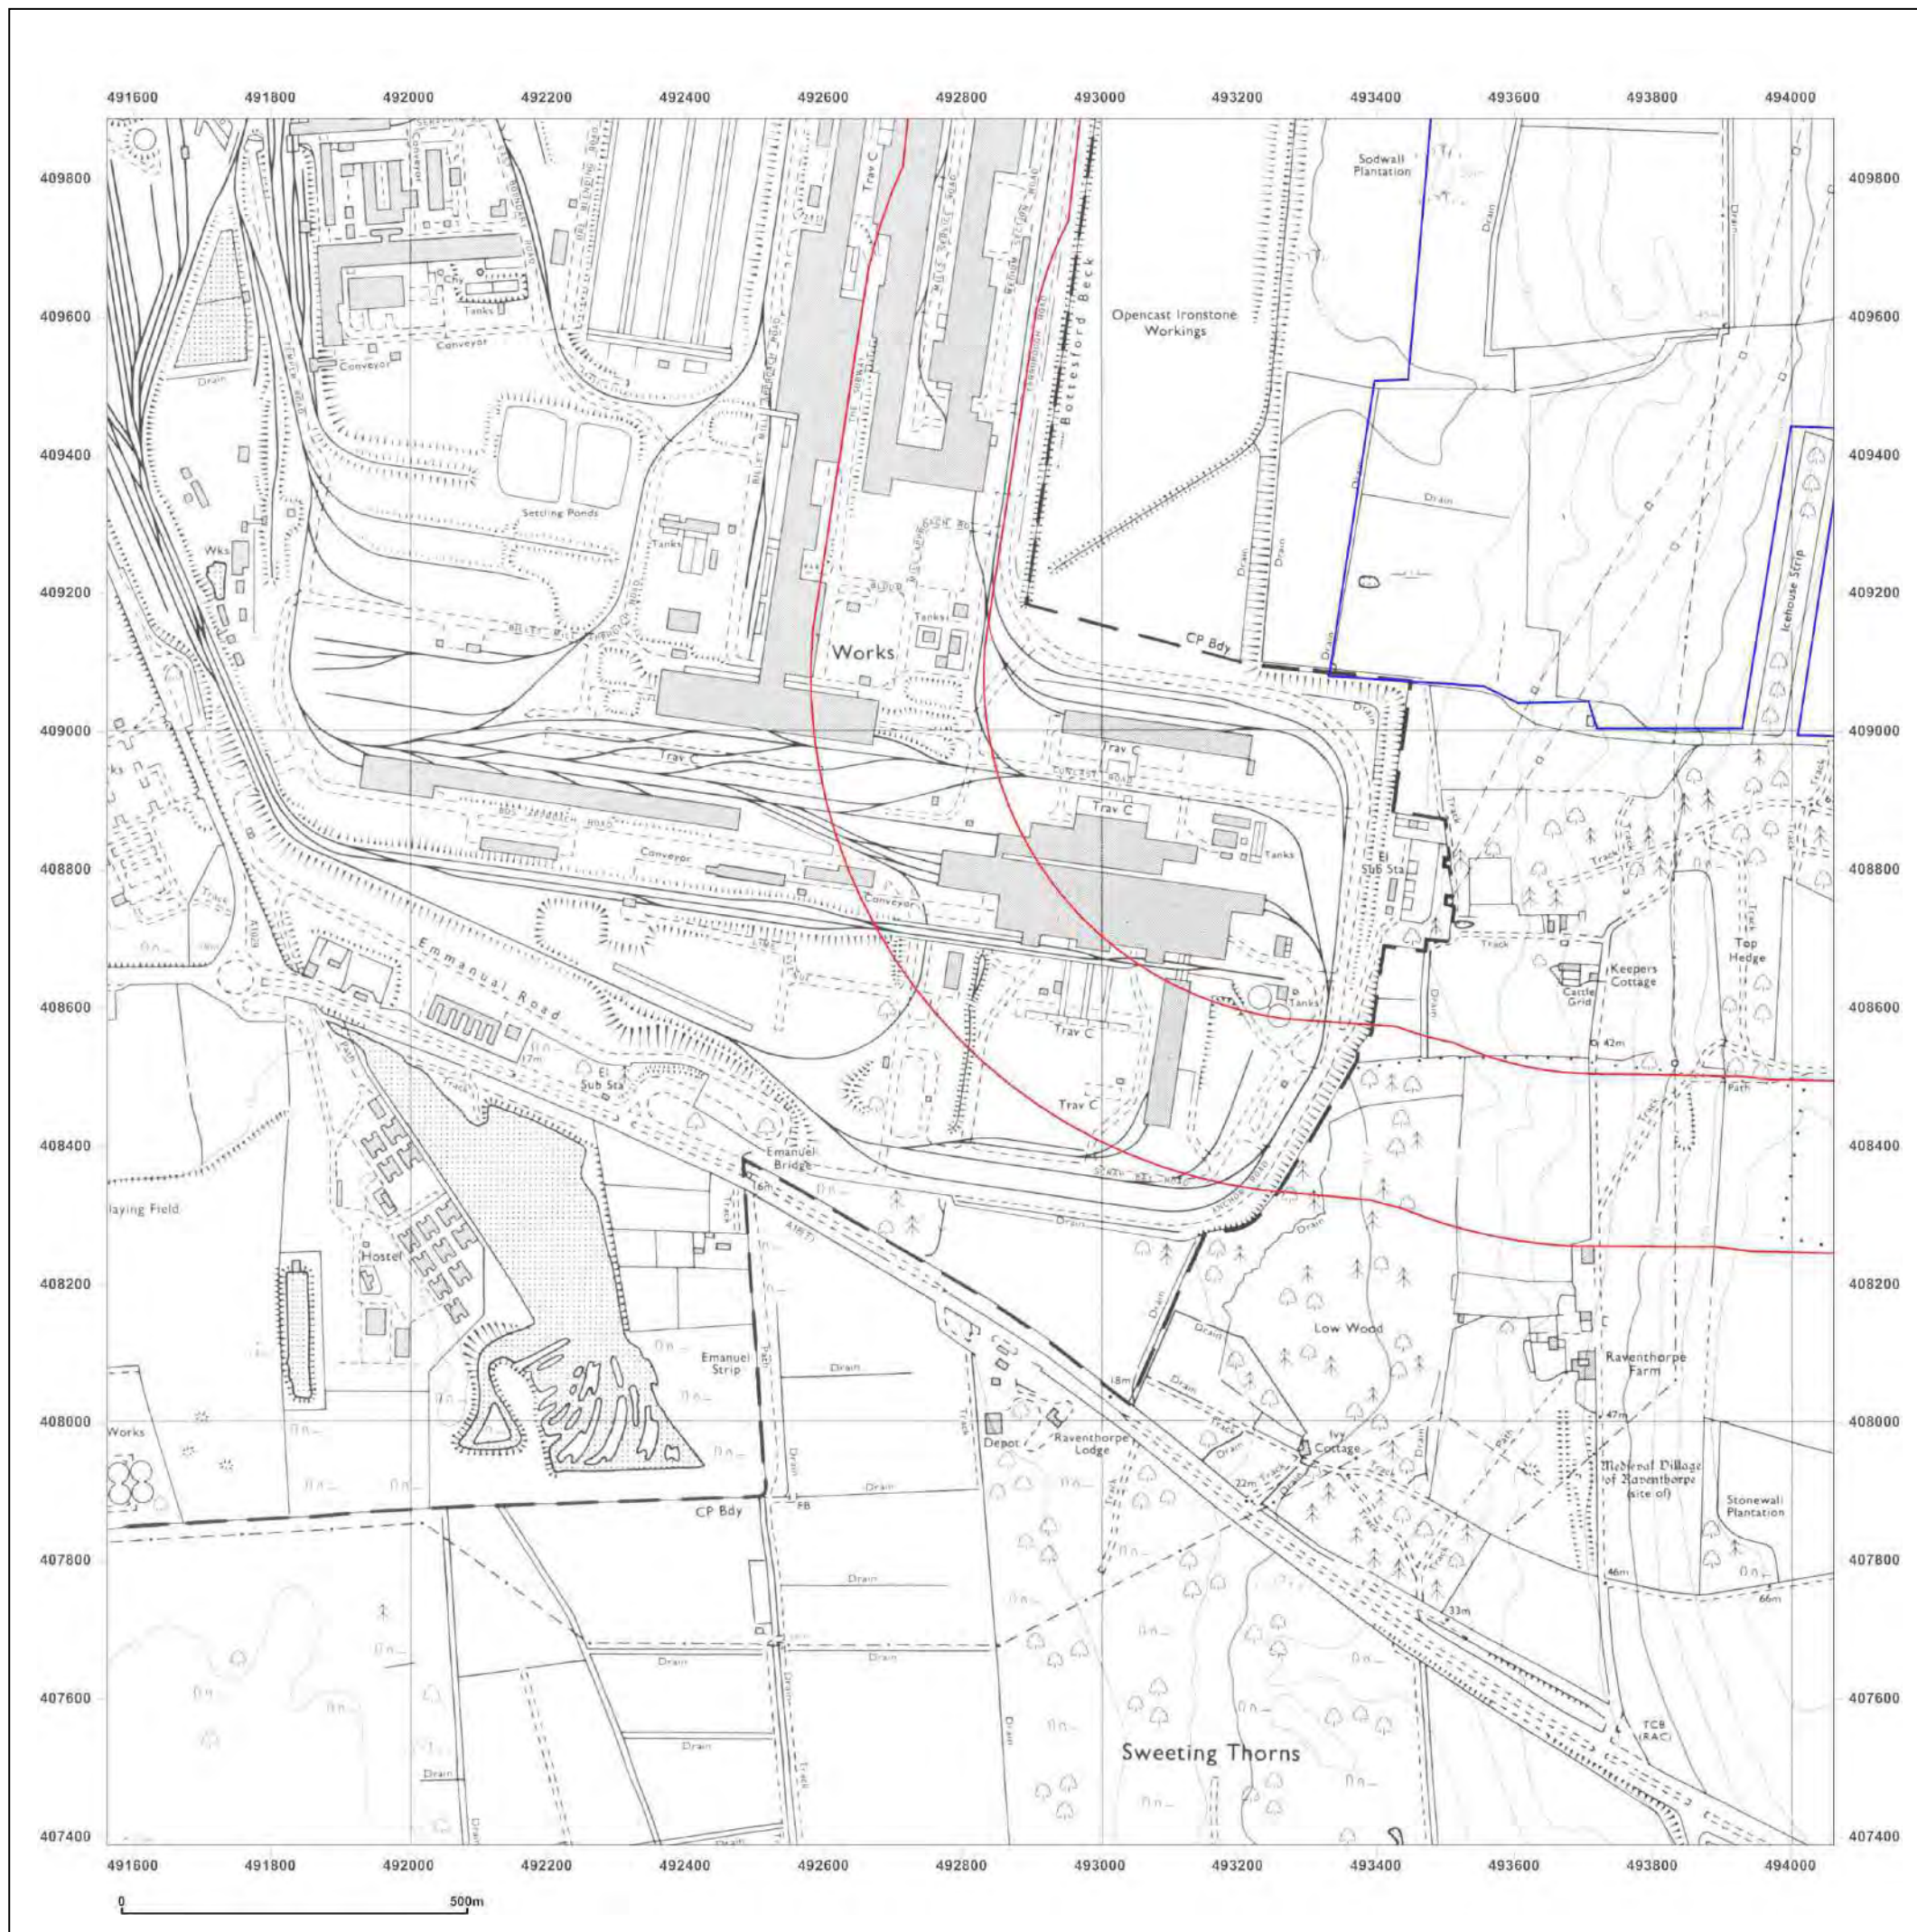

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: 1:10,000 Raster

Map date: 2002

Scale: 1:10,000

Printed at: 1:10,000

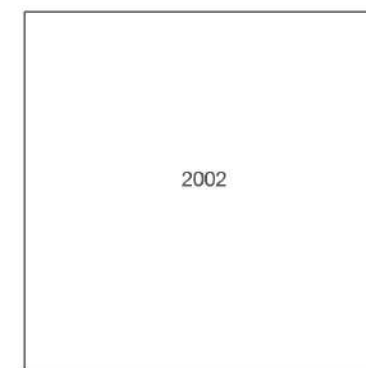

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP



Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: National Grid

Map date: 2010

Scale: 1:10,000

Printed at: 1:10,000

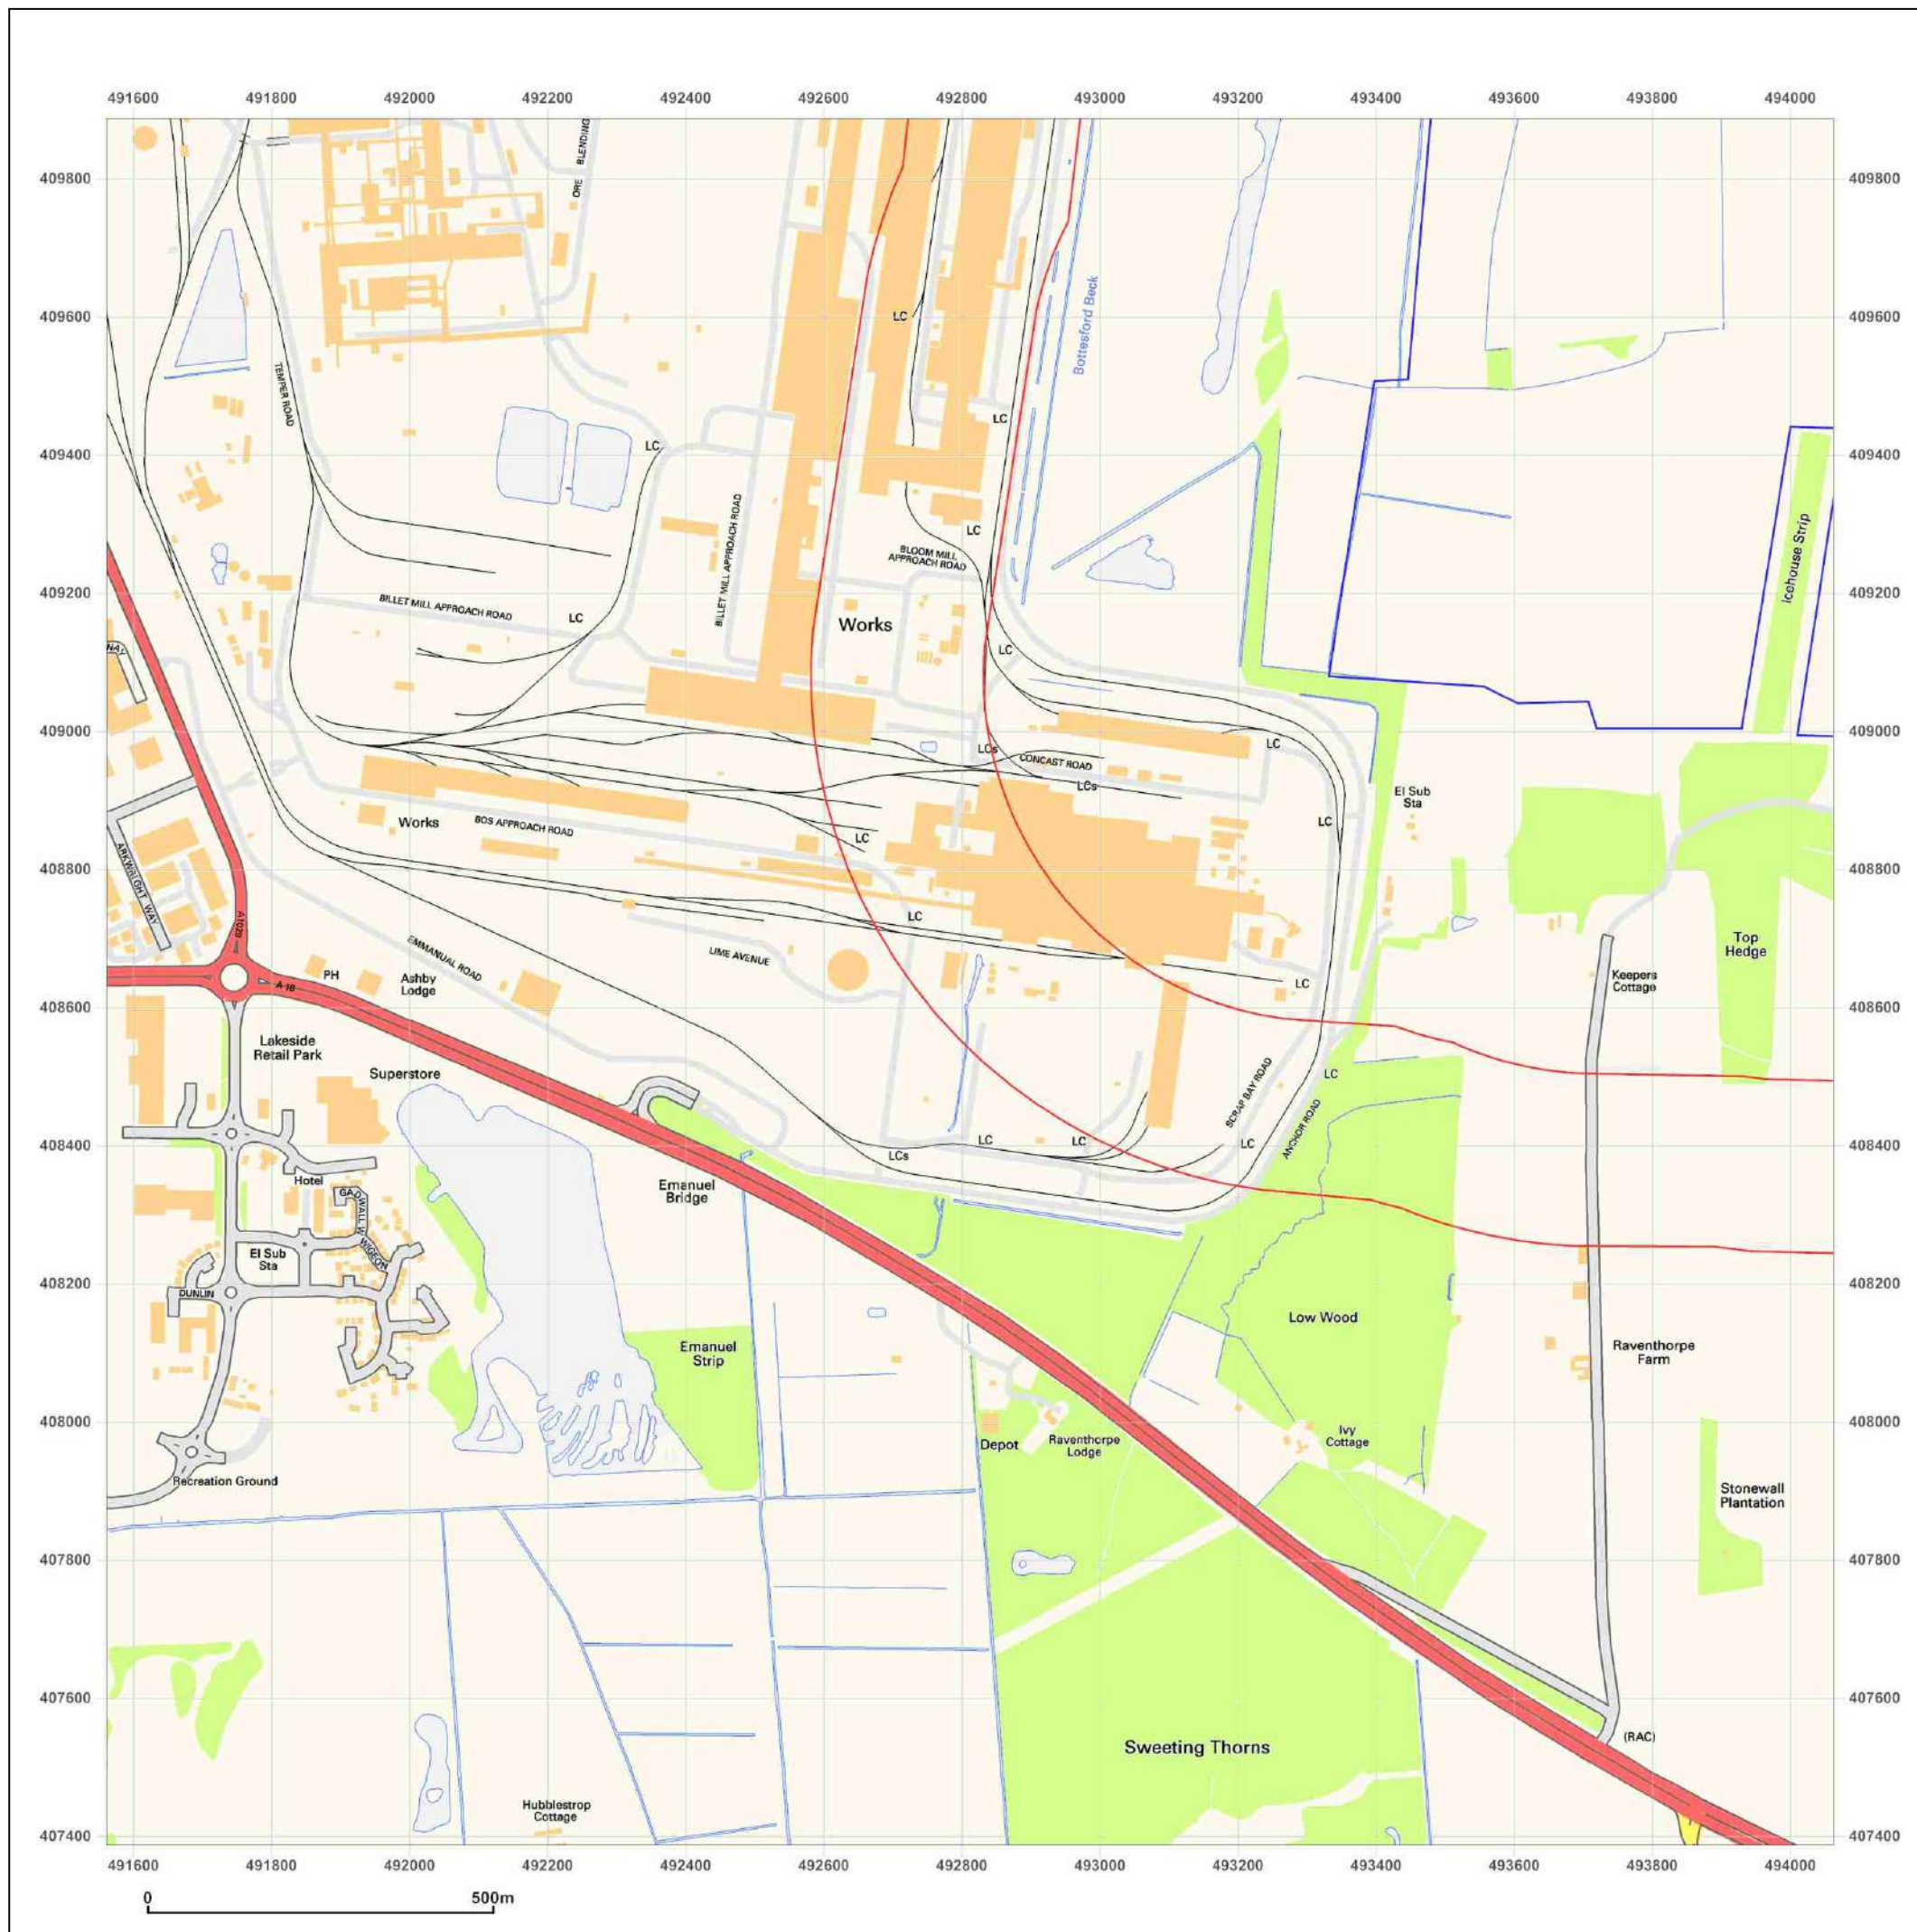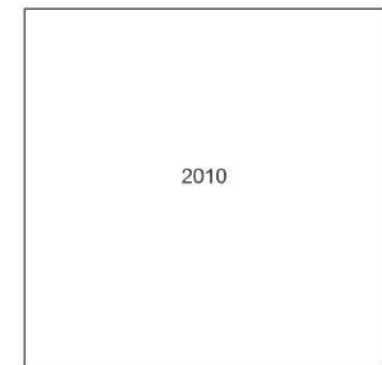

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP



Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_1
Grid Ref: 492812, 408637

Map Name: National Grid

Map date: 2014

Scale: 1:10,000

Printed at: 1:10,000

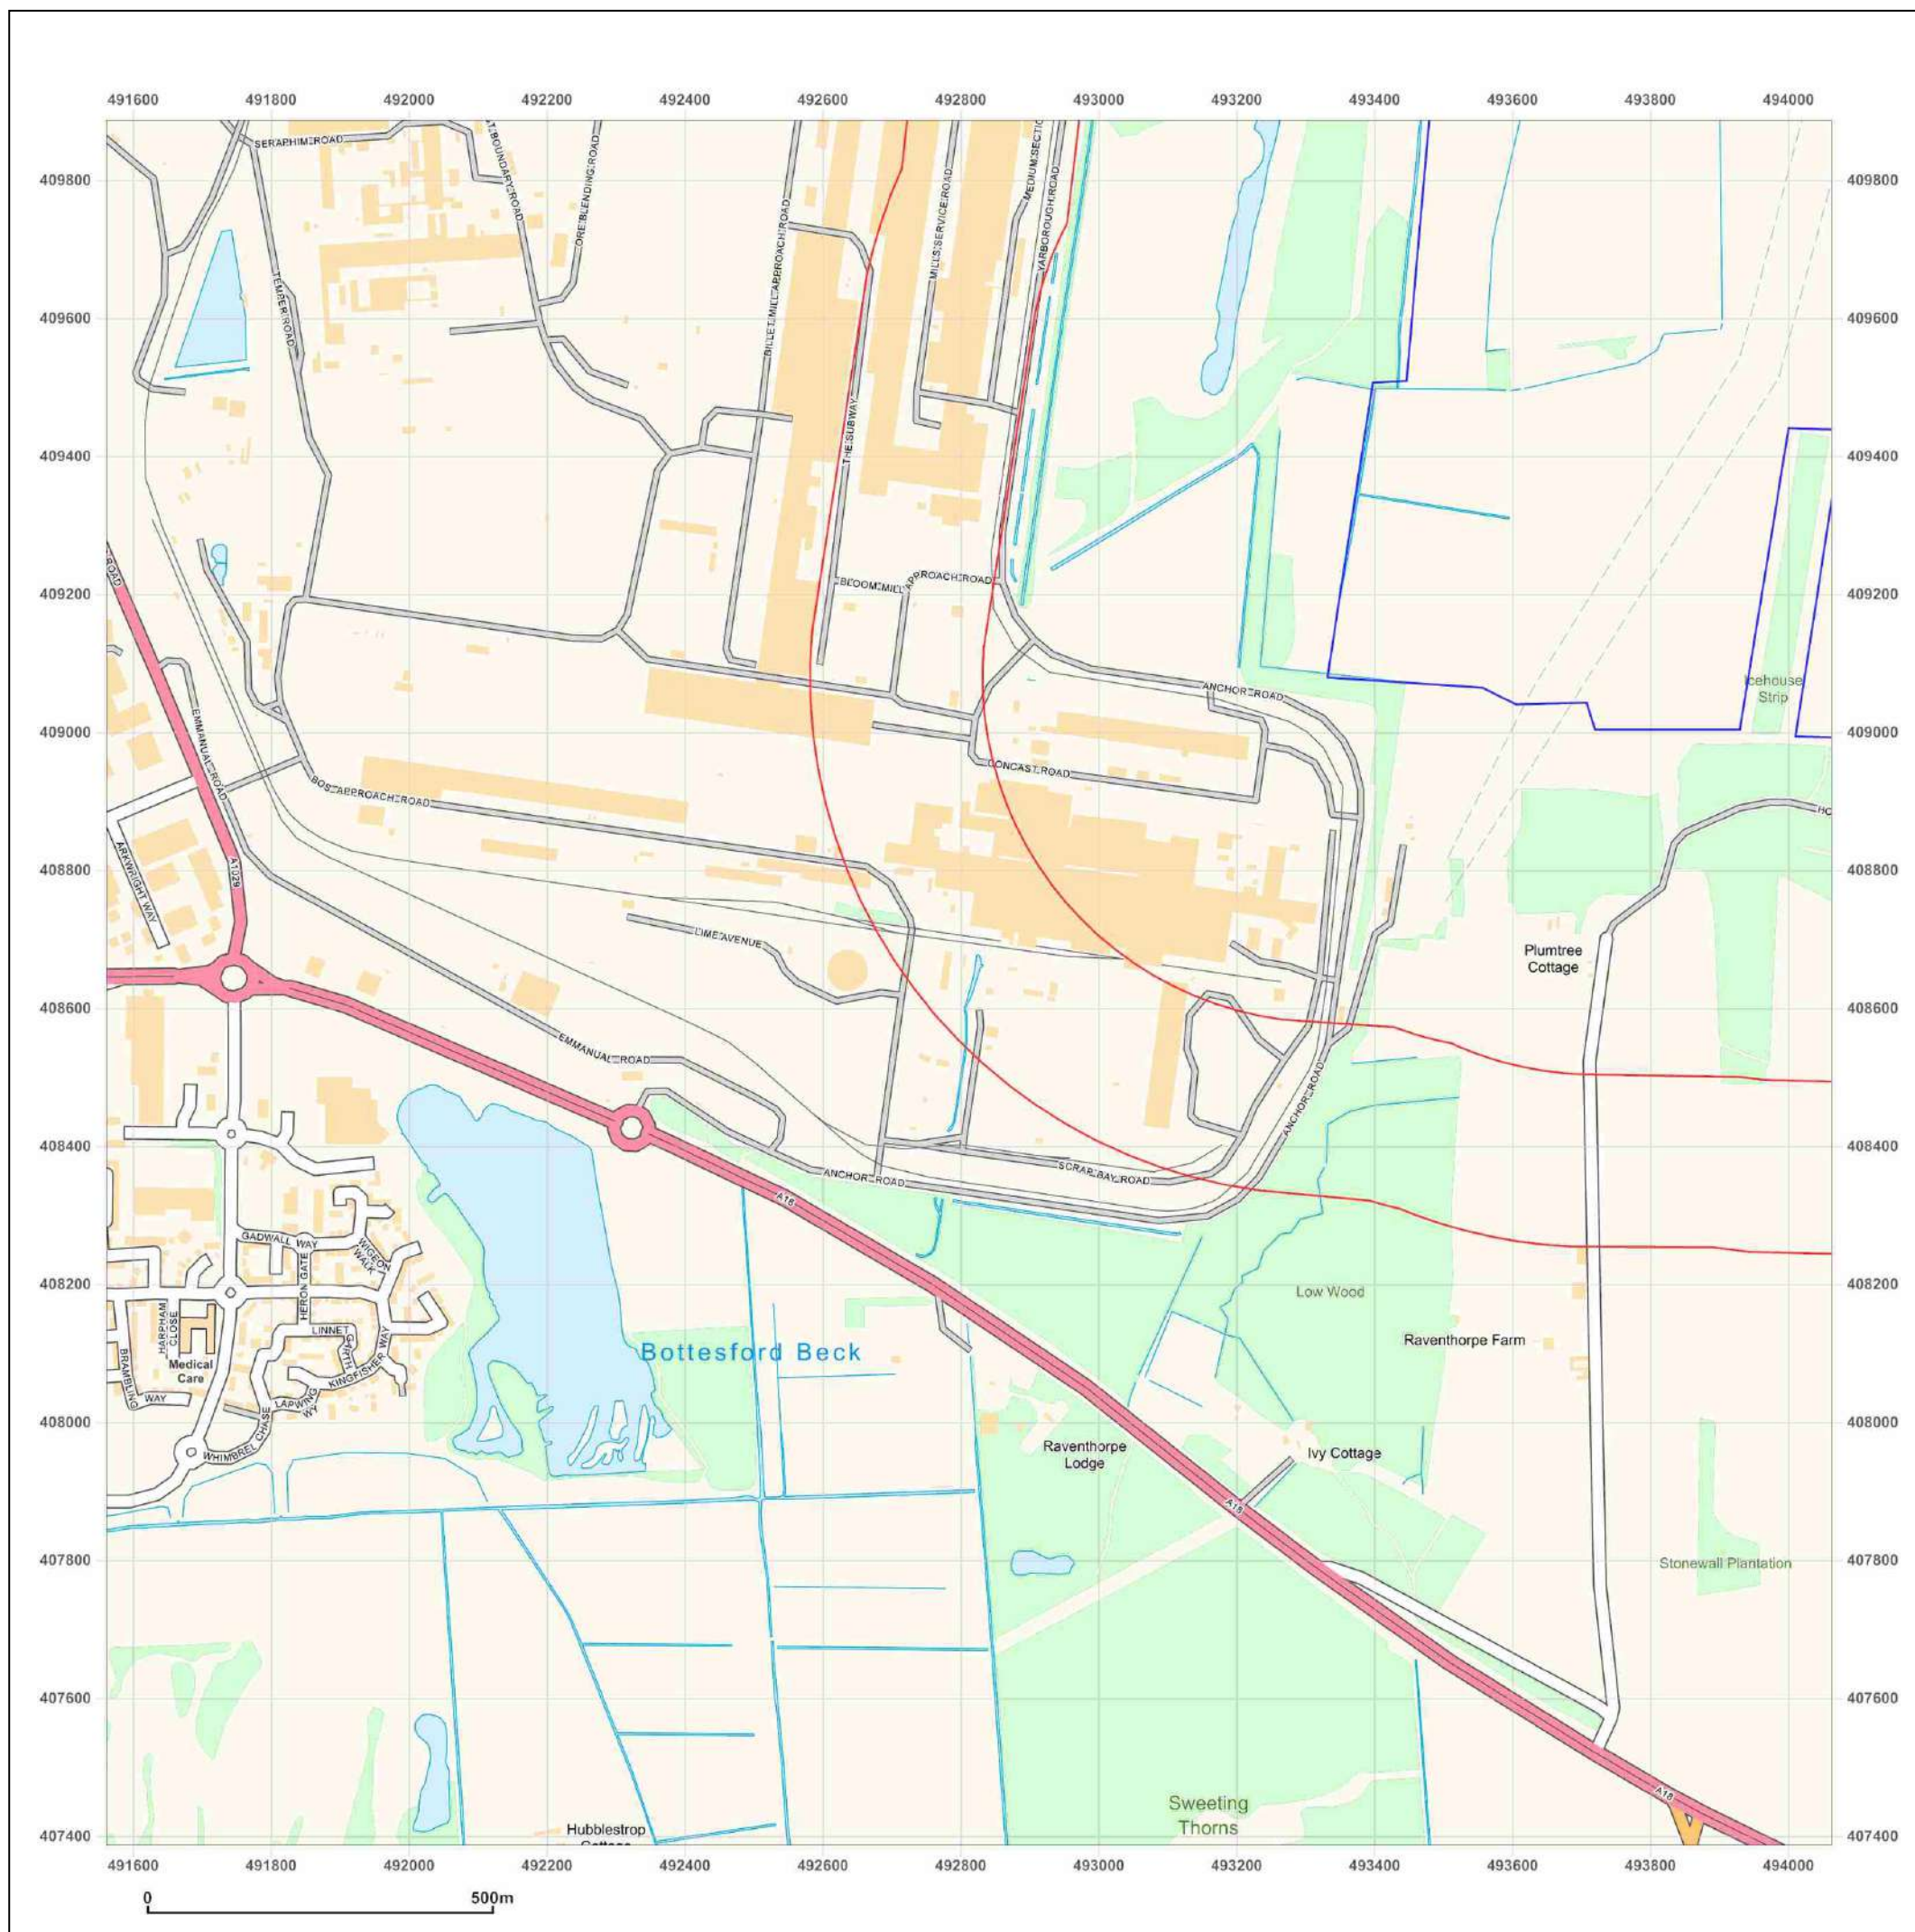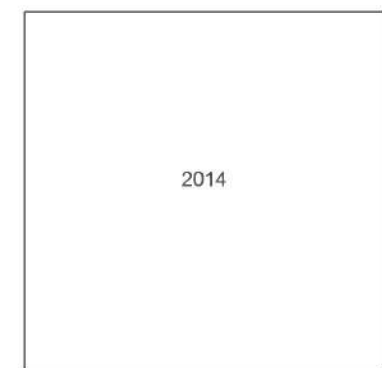

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: County Series

Map date: 1886


Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1886
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A

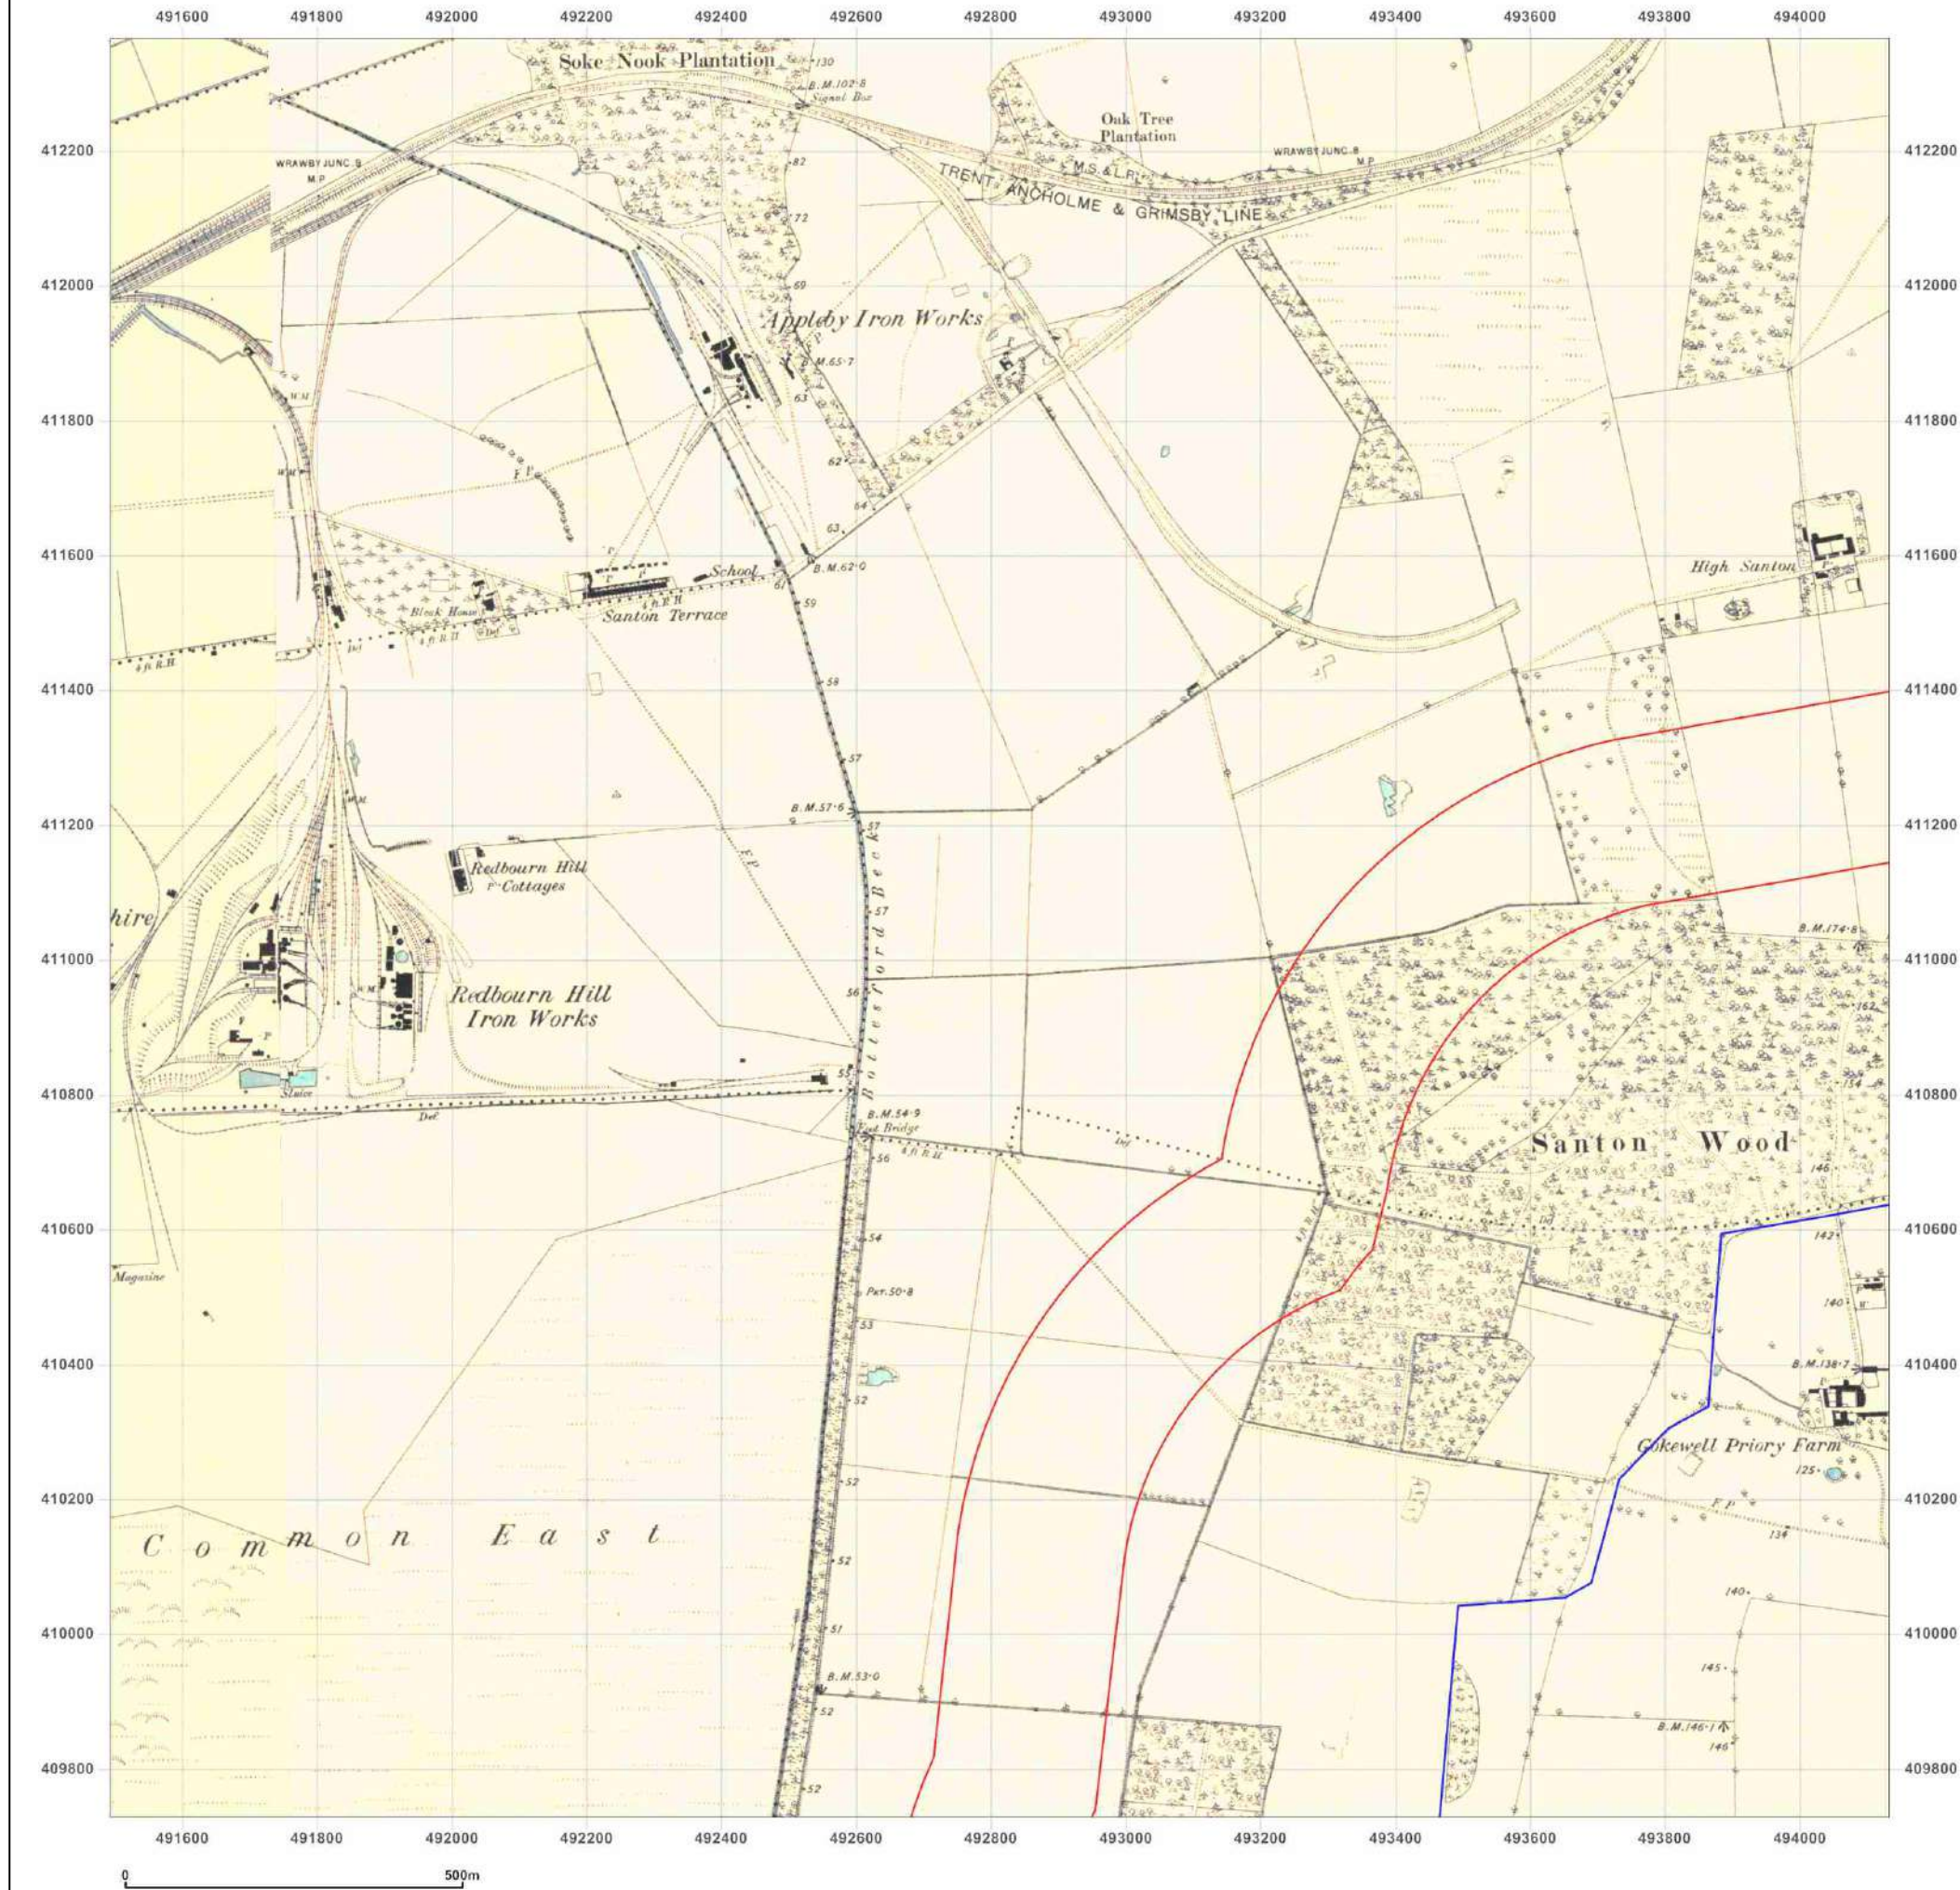

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: County Series

Map date: 1885-1886

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1885
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1886
Revised 1886
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: County Series

Map date: 1906

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1906
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1906
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

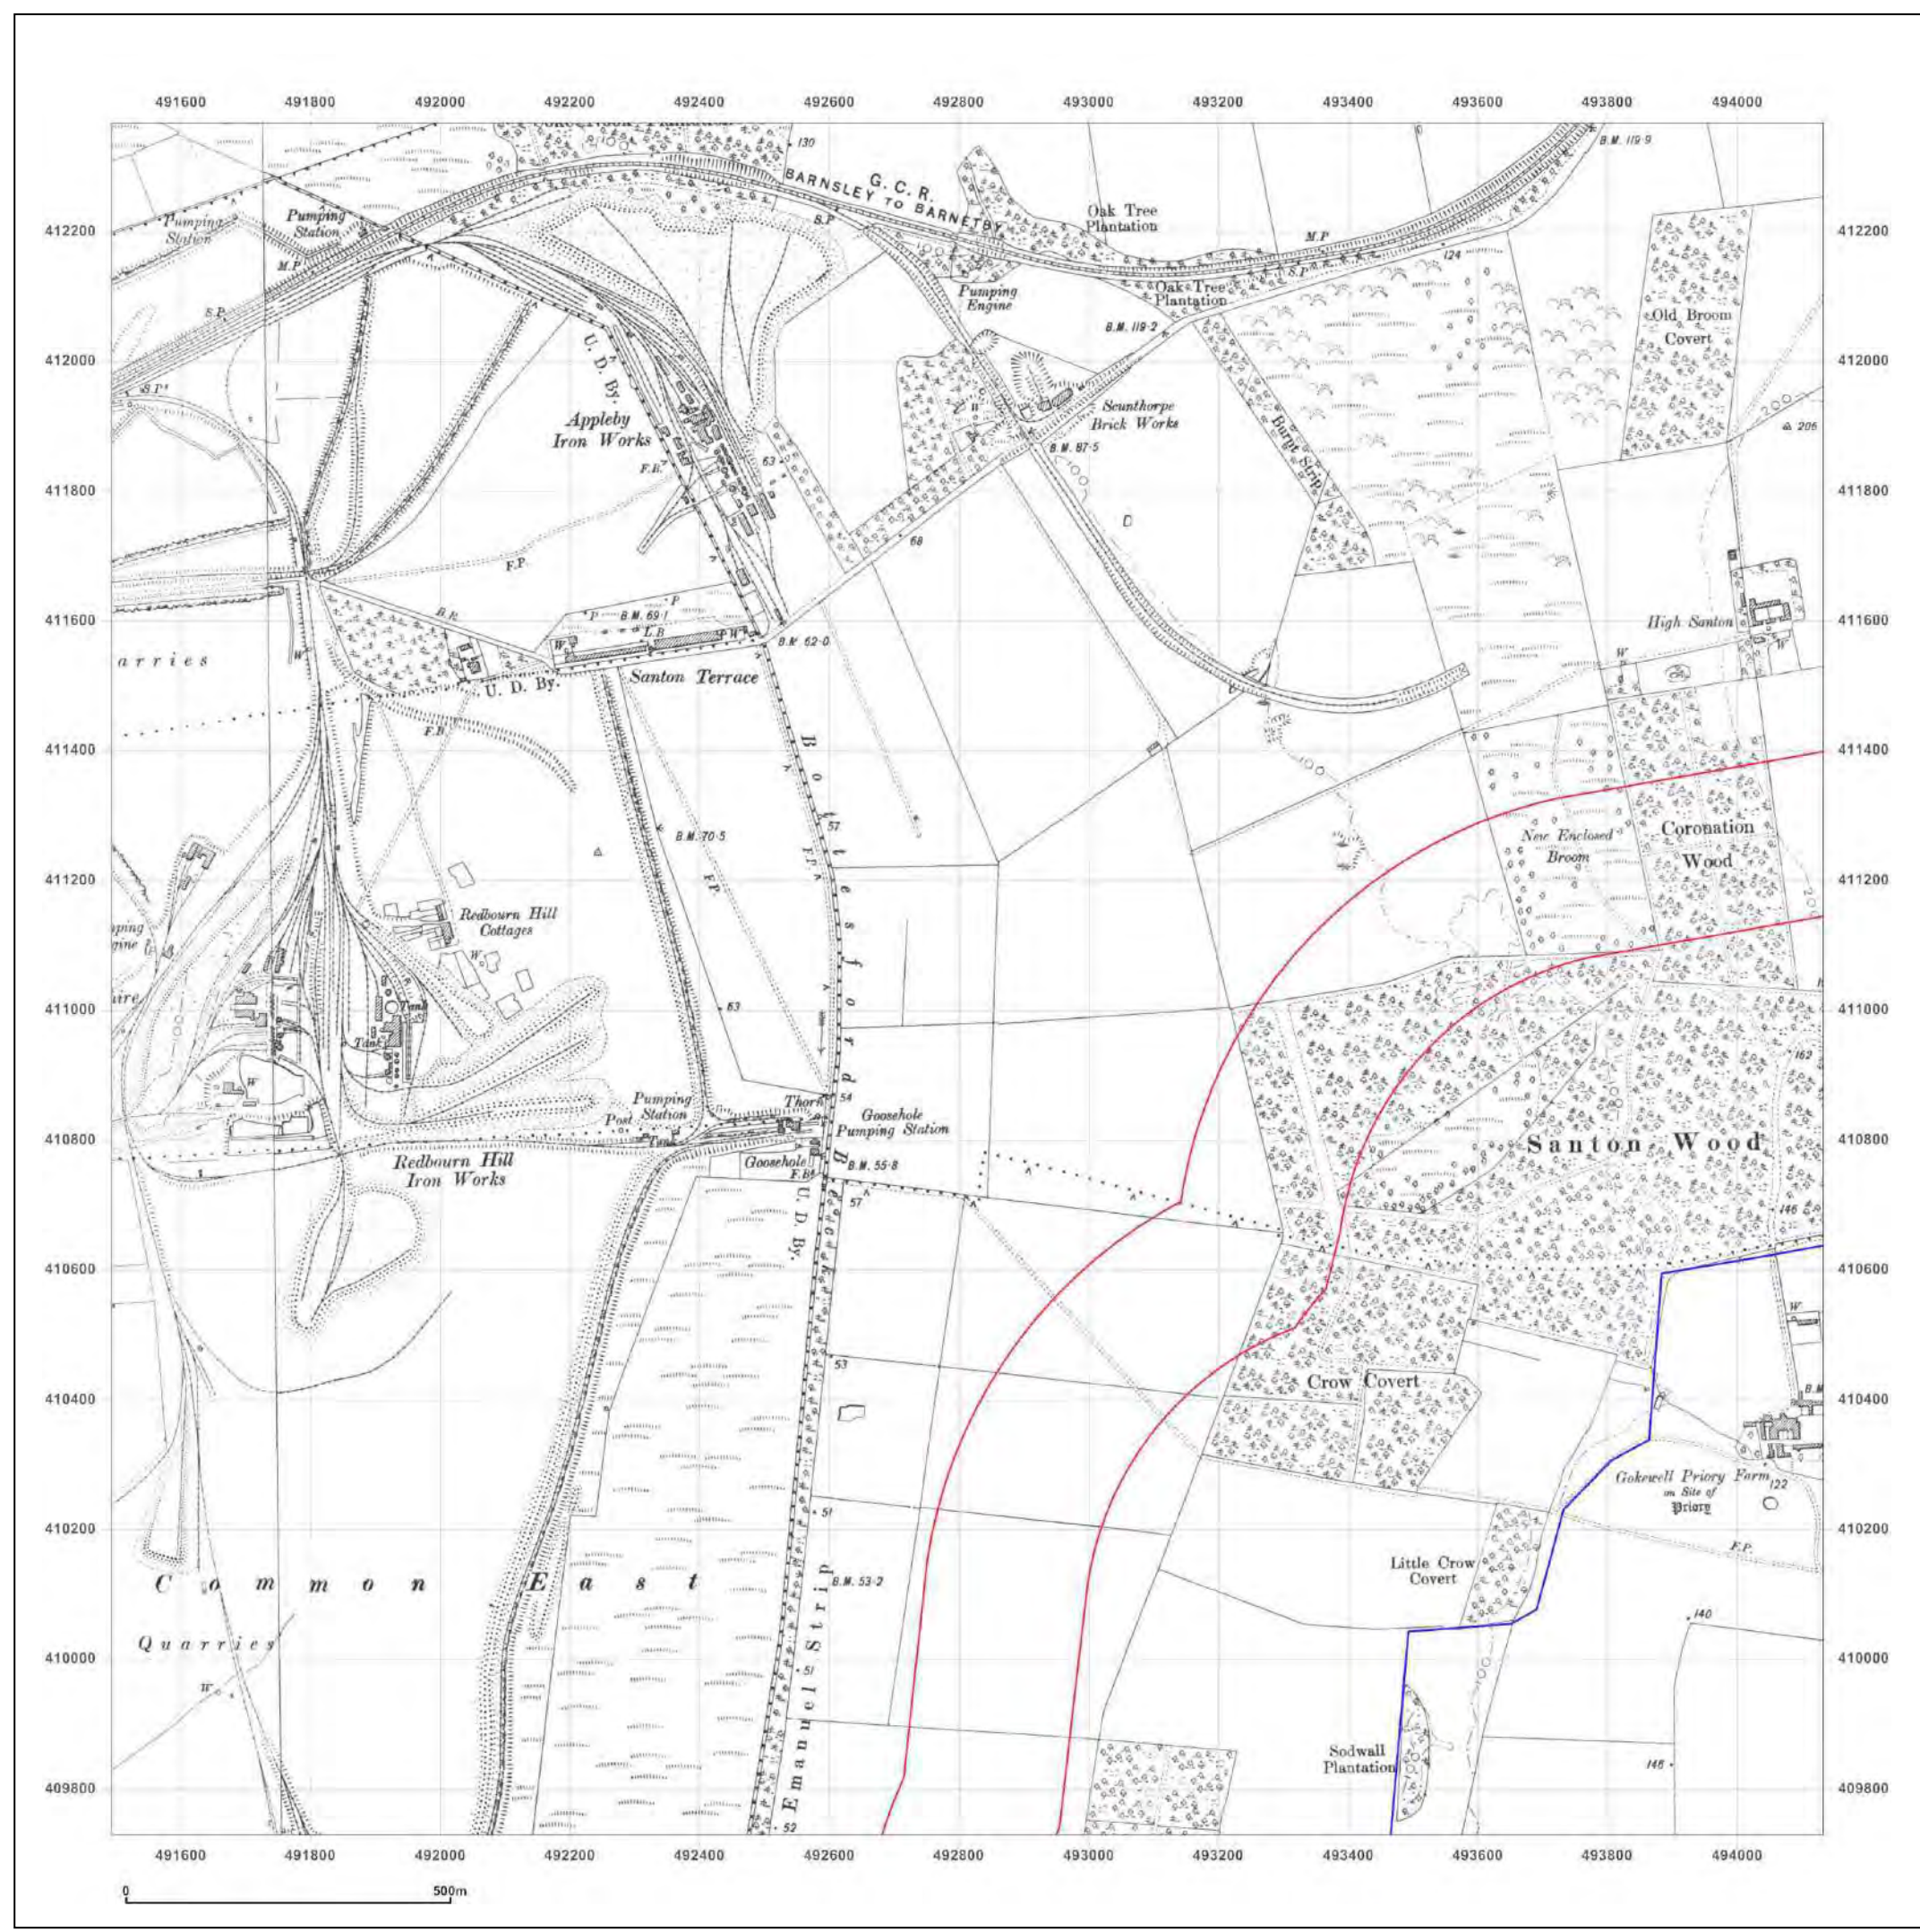



Site Details:

Santon, Scunthorpe, DN16 1XP



Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: County Series

Map date: 1906

Scale: 1:10,560

Printed at: 1:10,560

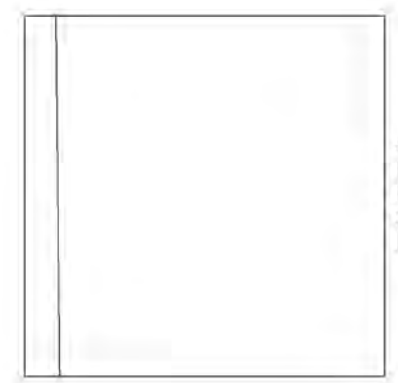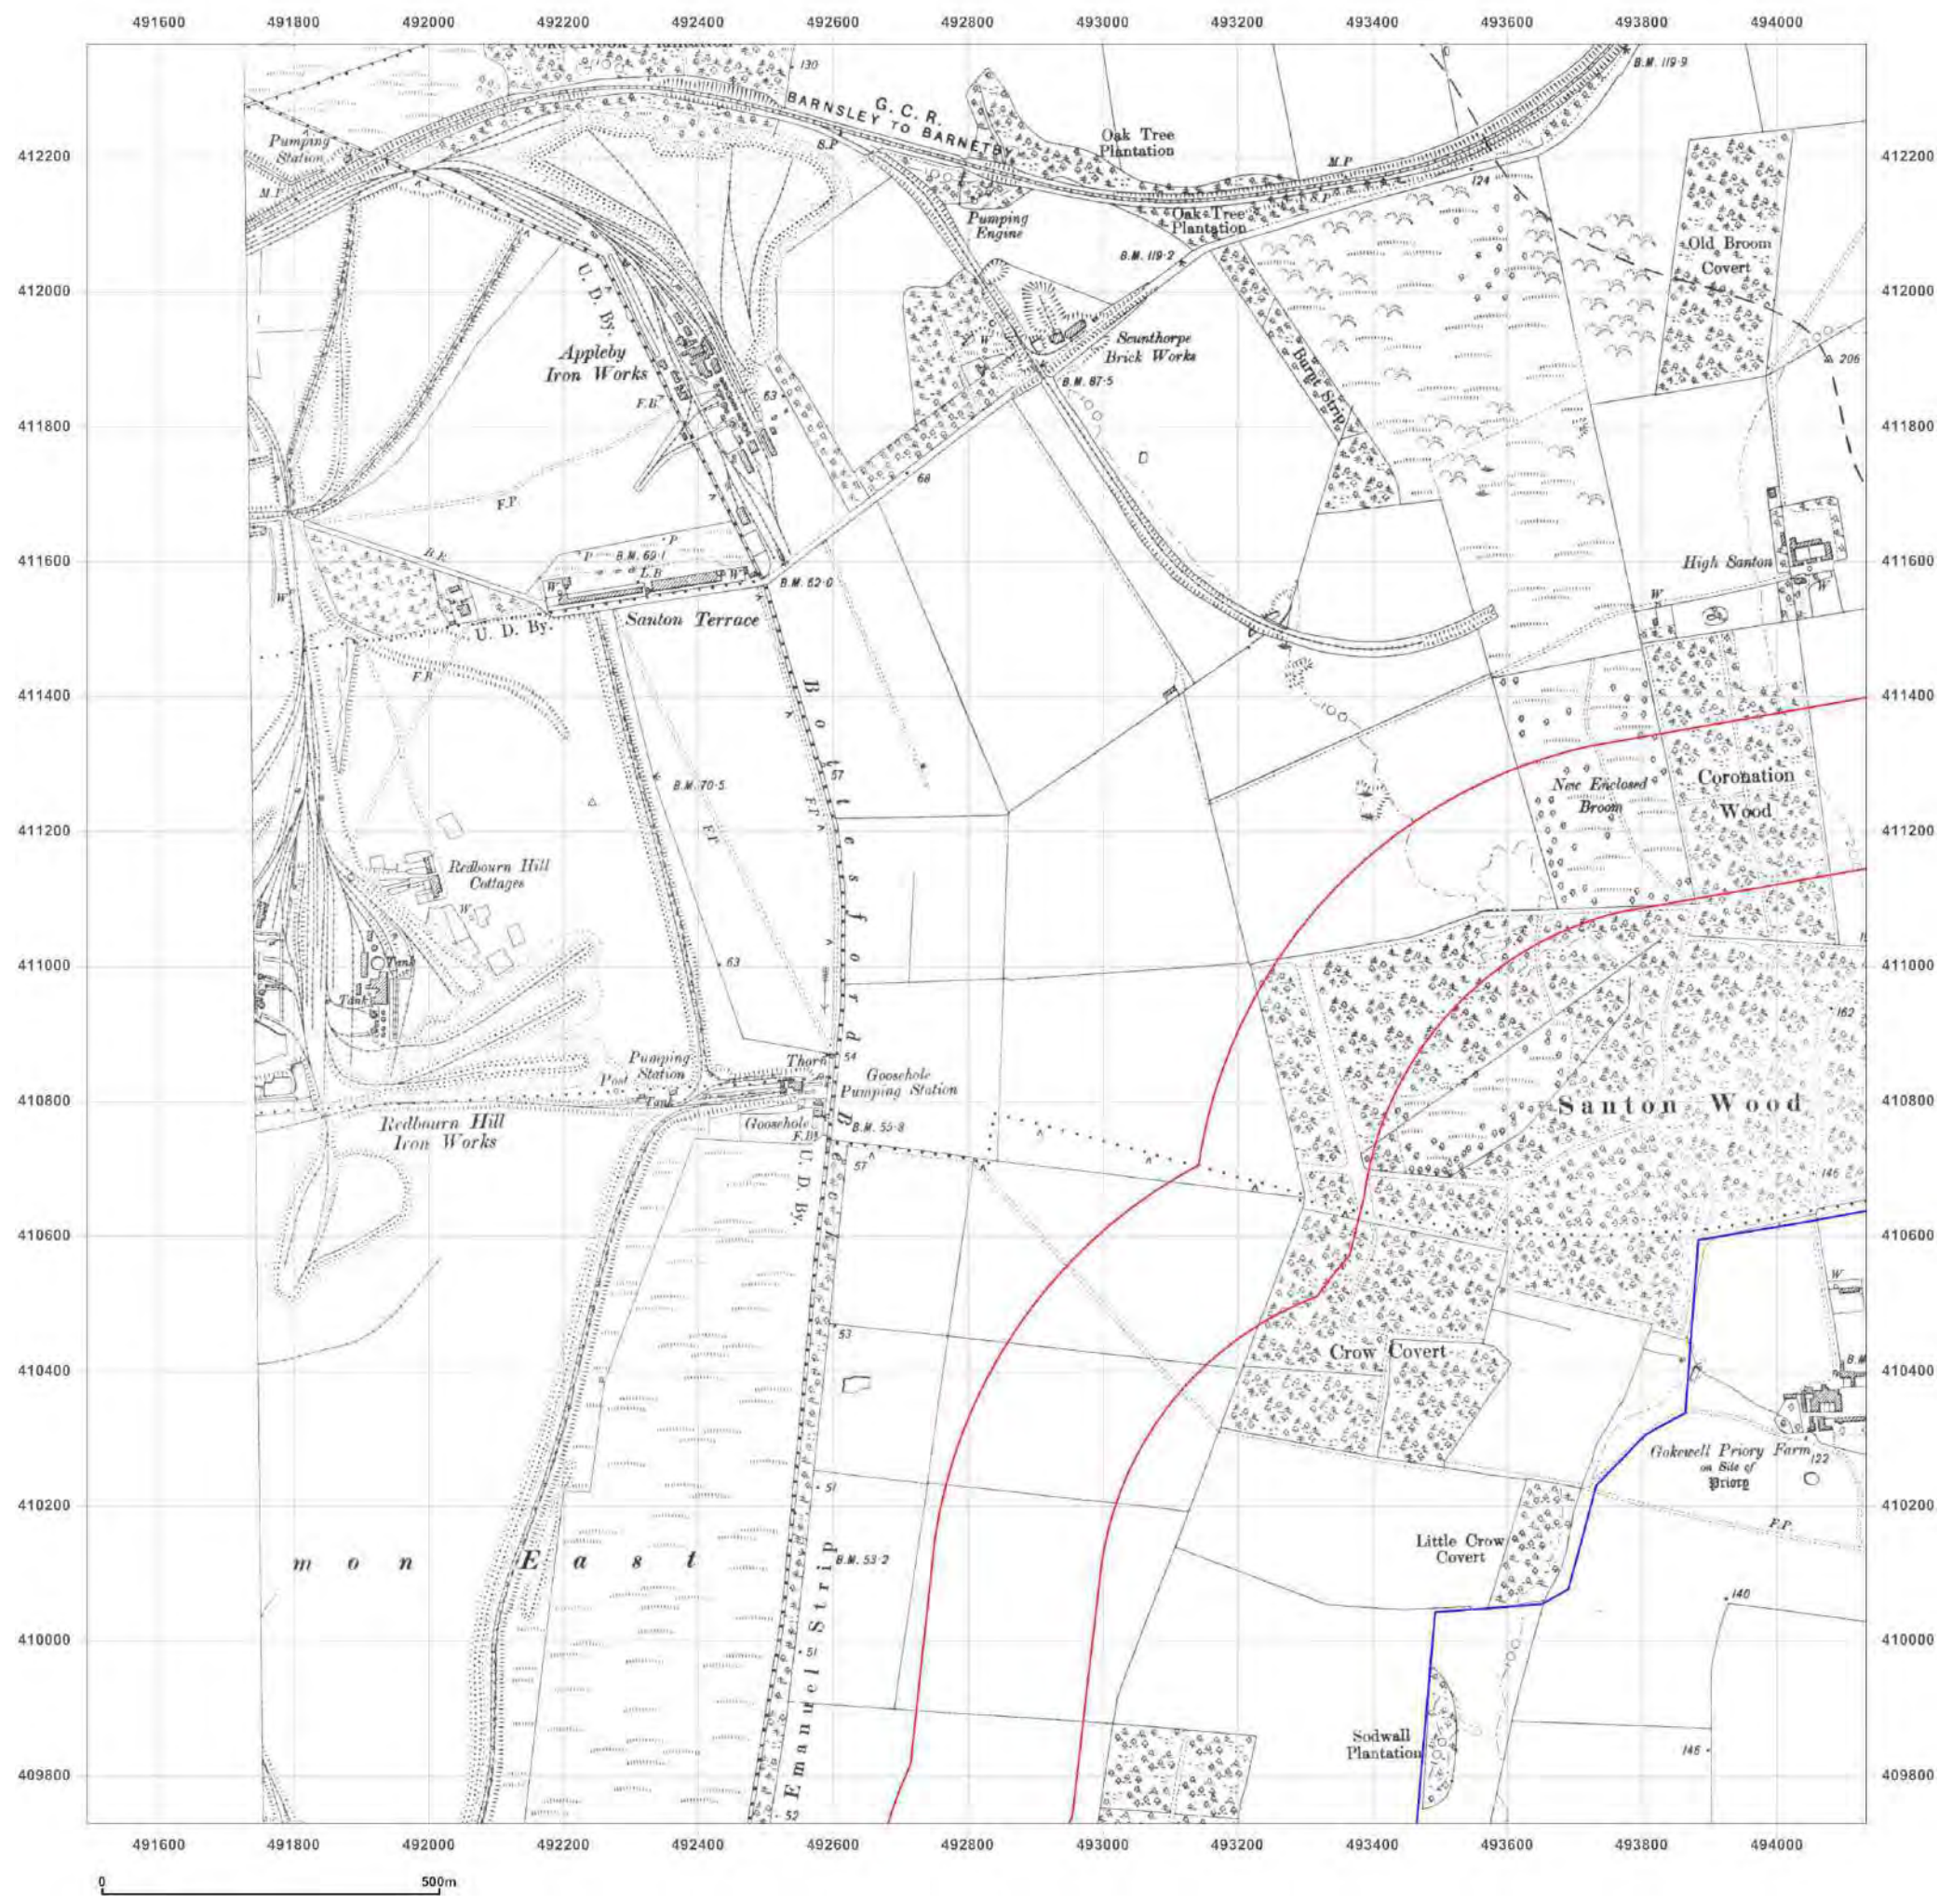

Surveyed 1885
Revised 1906
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

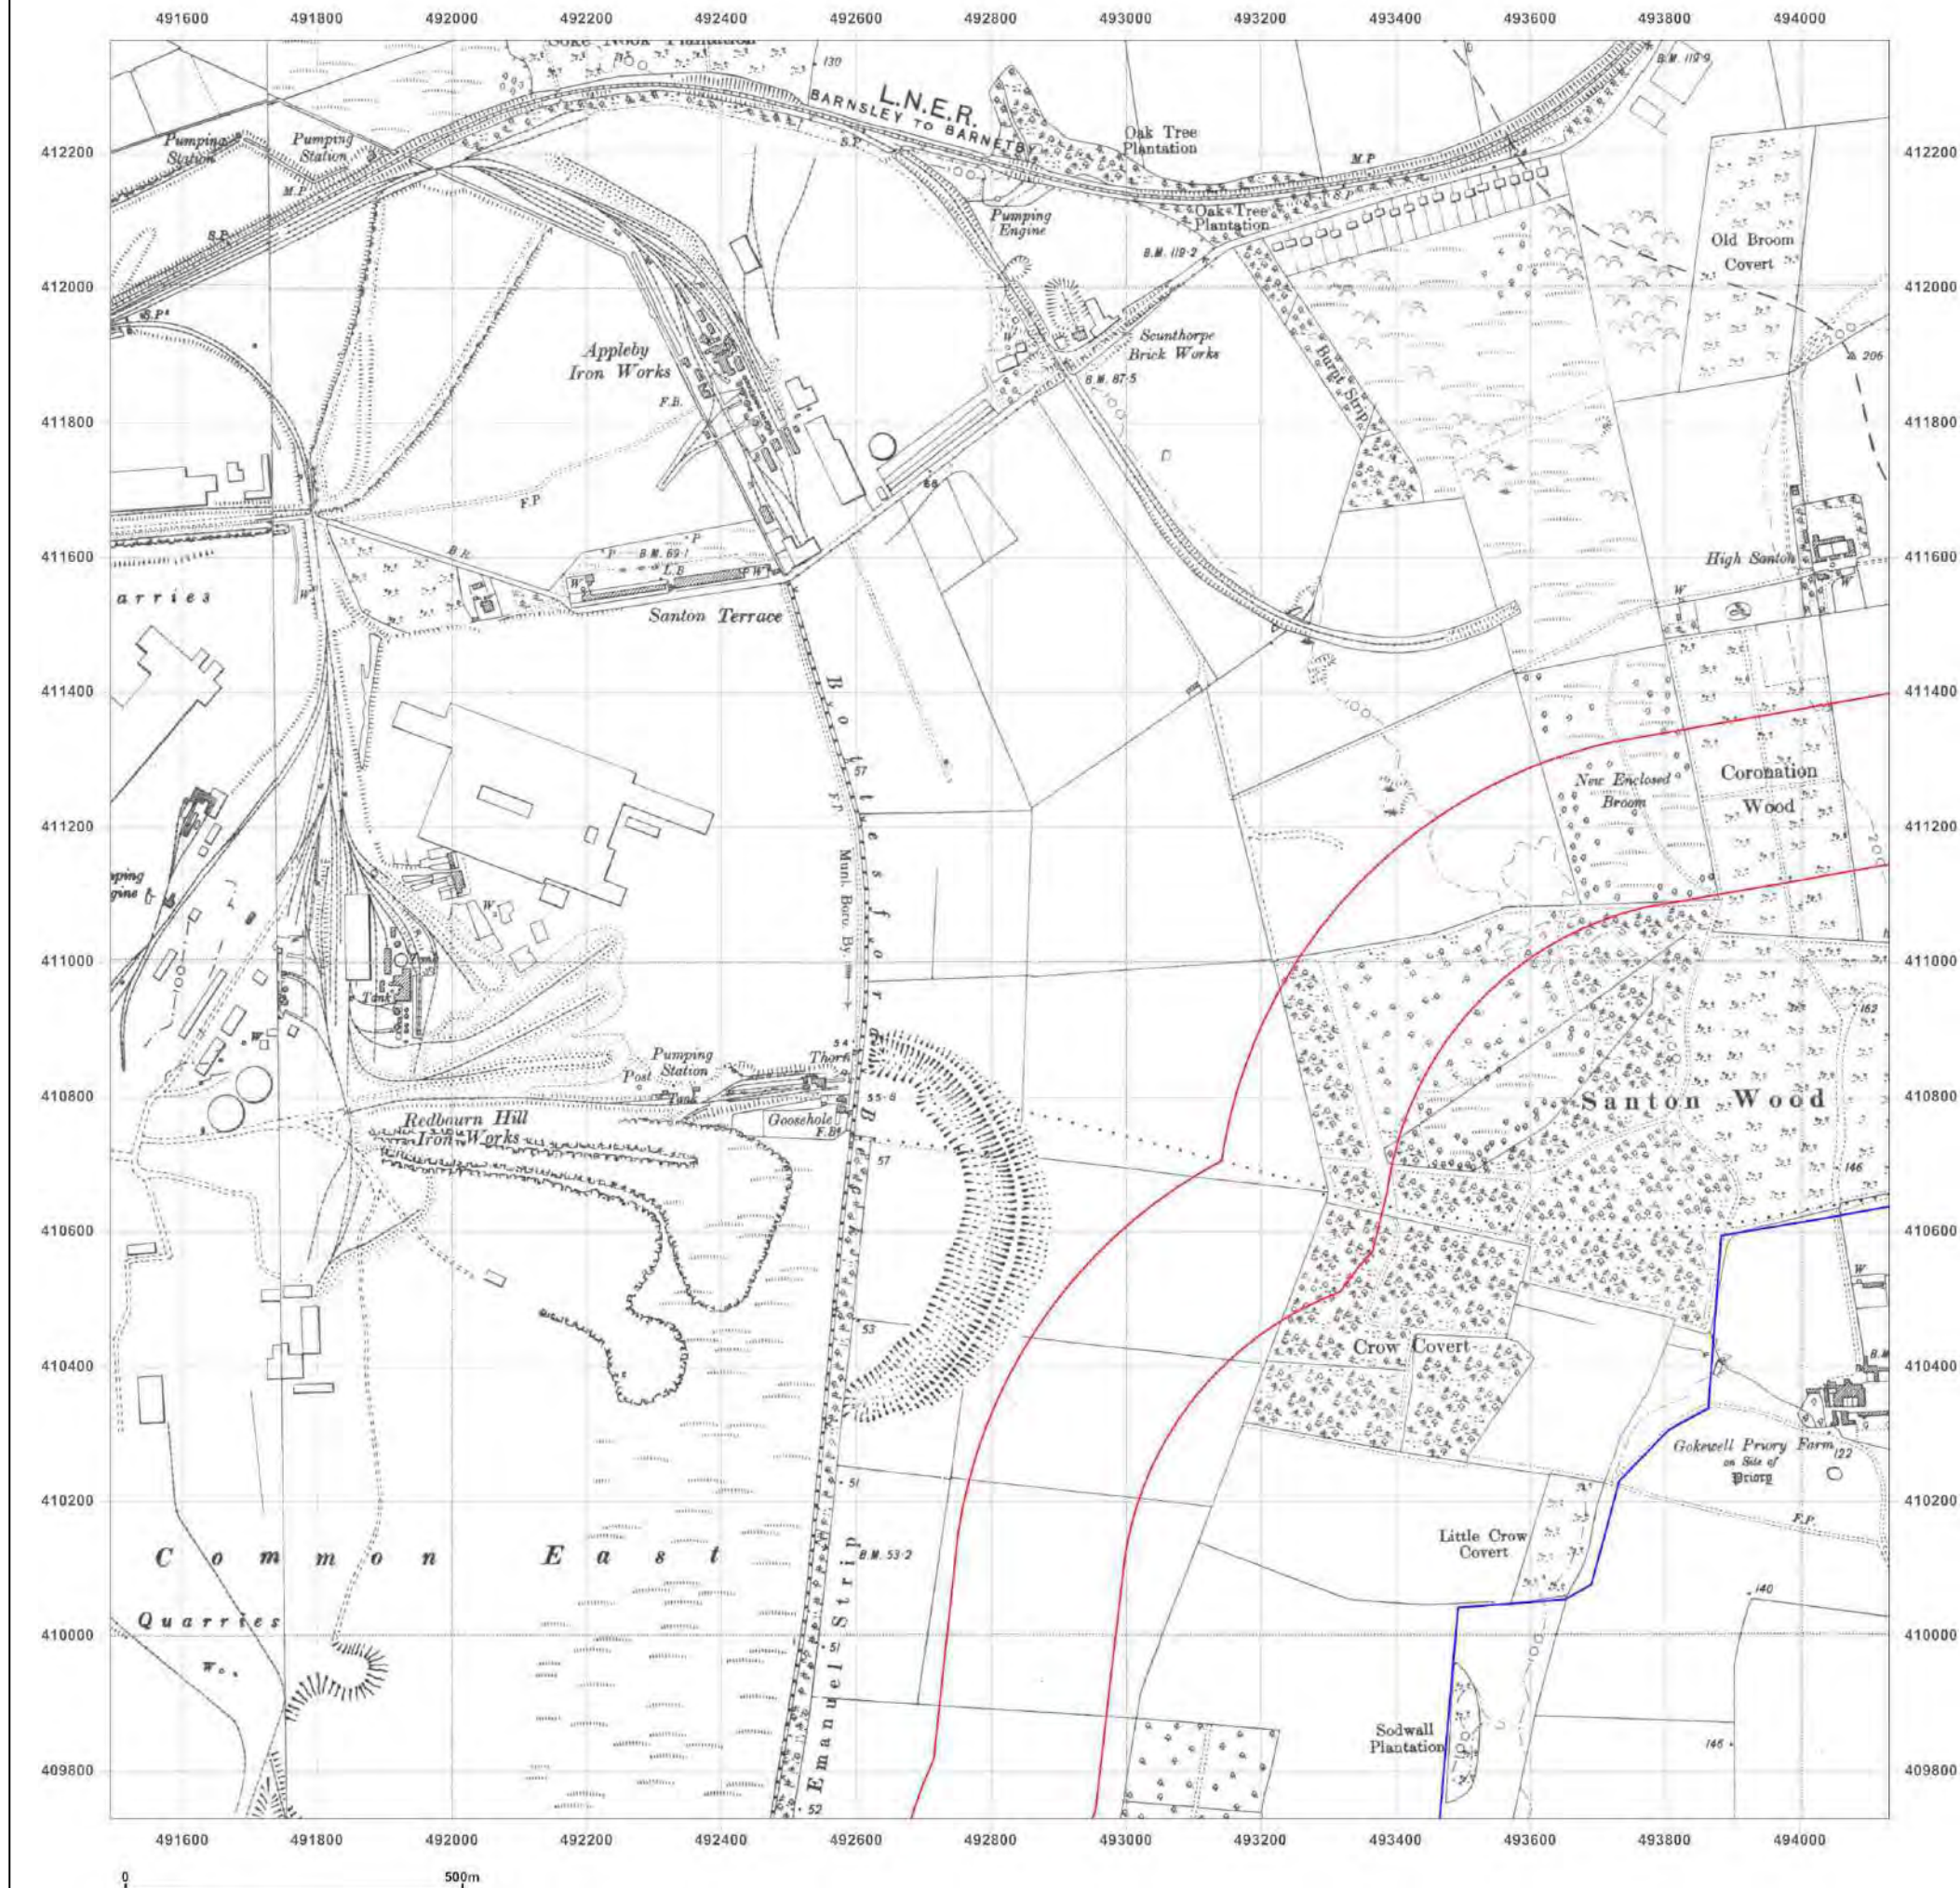

Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: County Series

Map date: 1948

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
 Revised 1948
 Edition 1948
 Copyright N/A
 Levelled N/A

Surveyed 1885
 Revised 1948
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: Provisional

Map date: 1955-1956

Scale: 1:10,560

Printed at: 1:10,560



Surveyed N/A
Revised 1956
Edition N/A
Copyright N/A
Levelled N/A

Surveyed N/A
Revised 1955
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

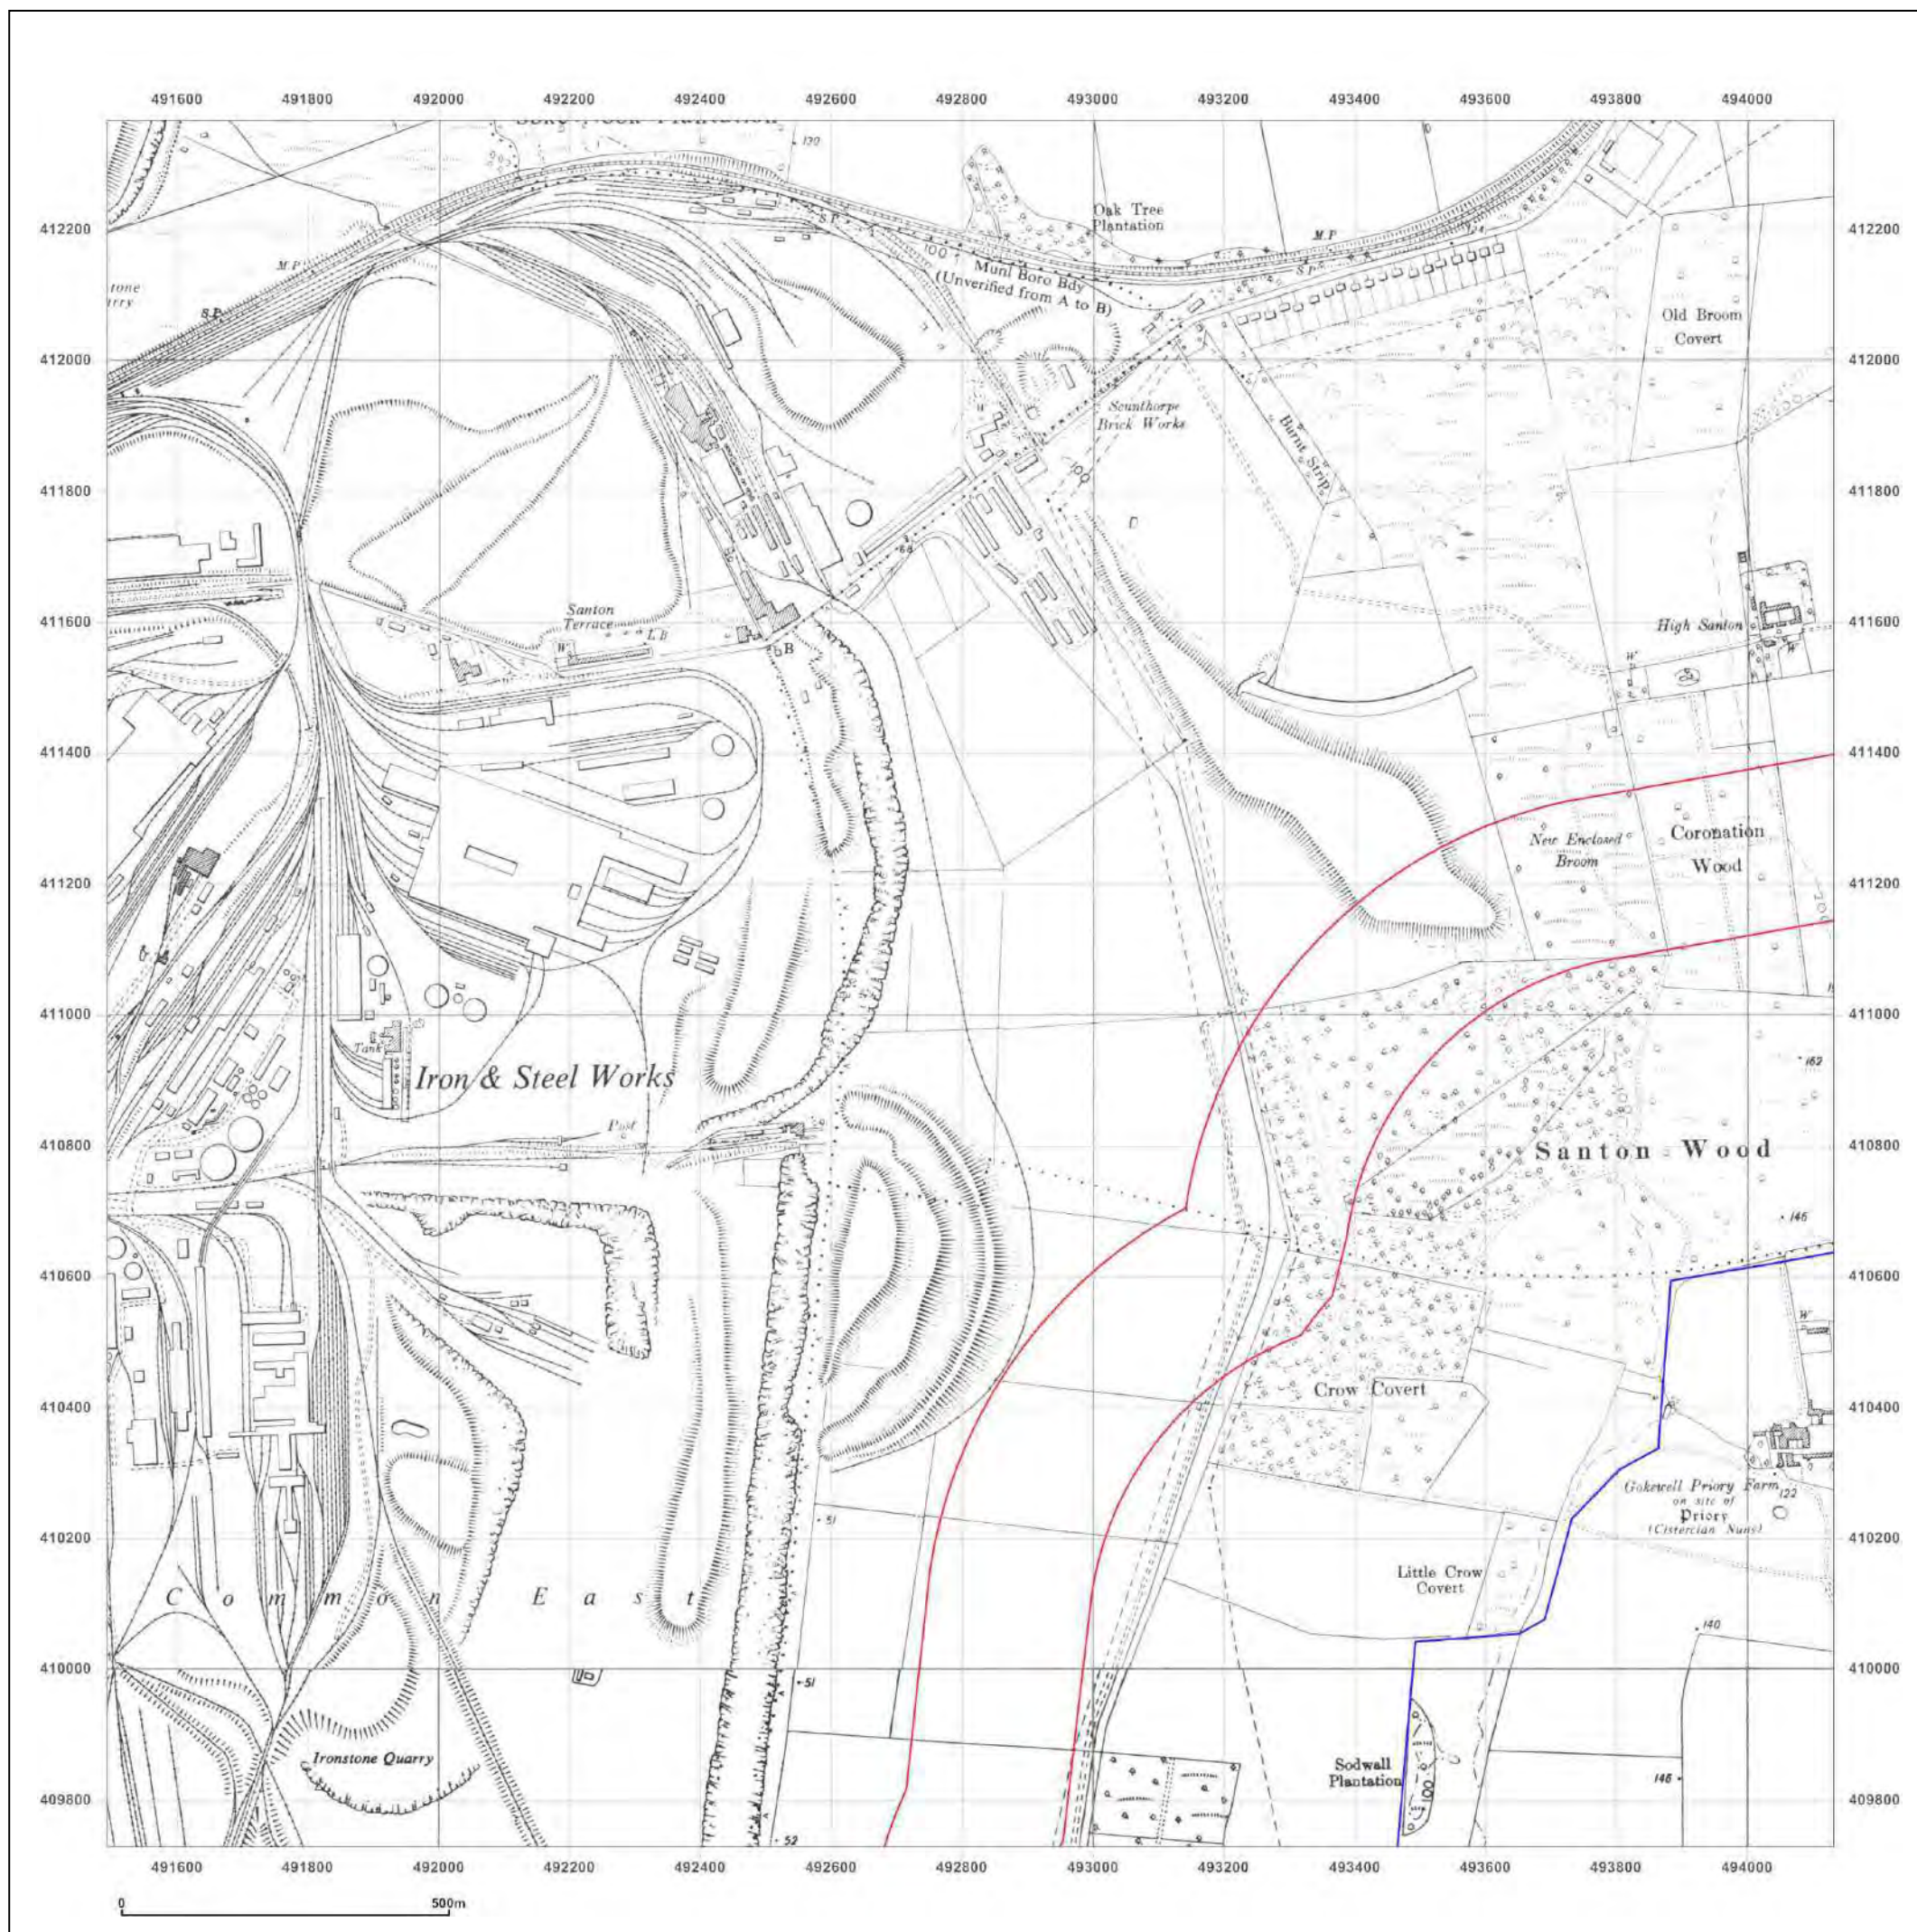



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: National Grid

Map date: 1977-1979

Scale: 1:10,000

Printed at: 1:10,000



Surveyed 1974
Revised 1977
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1978
Revised 1979
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

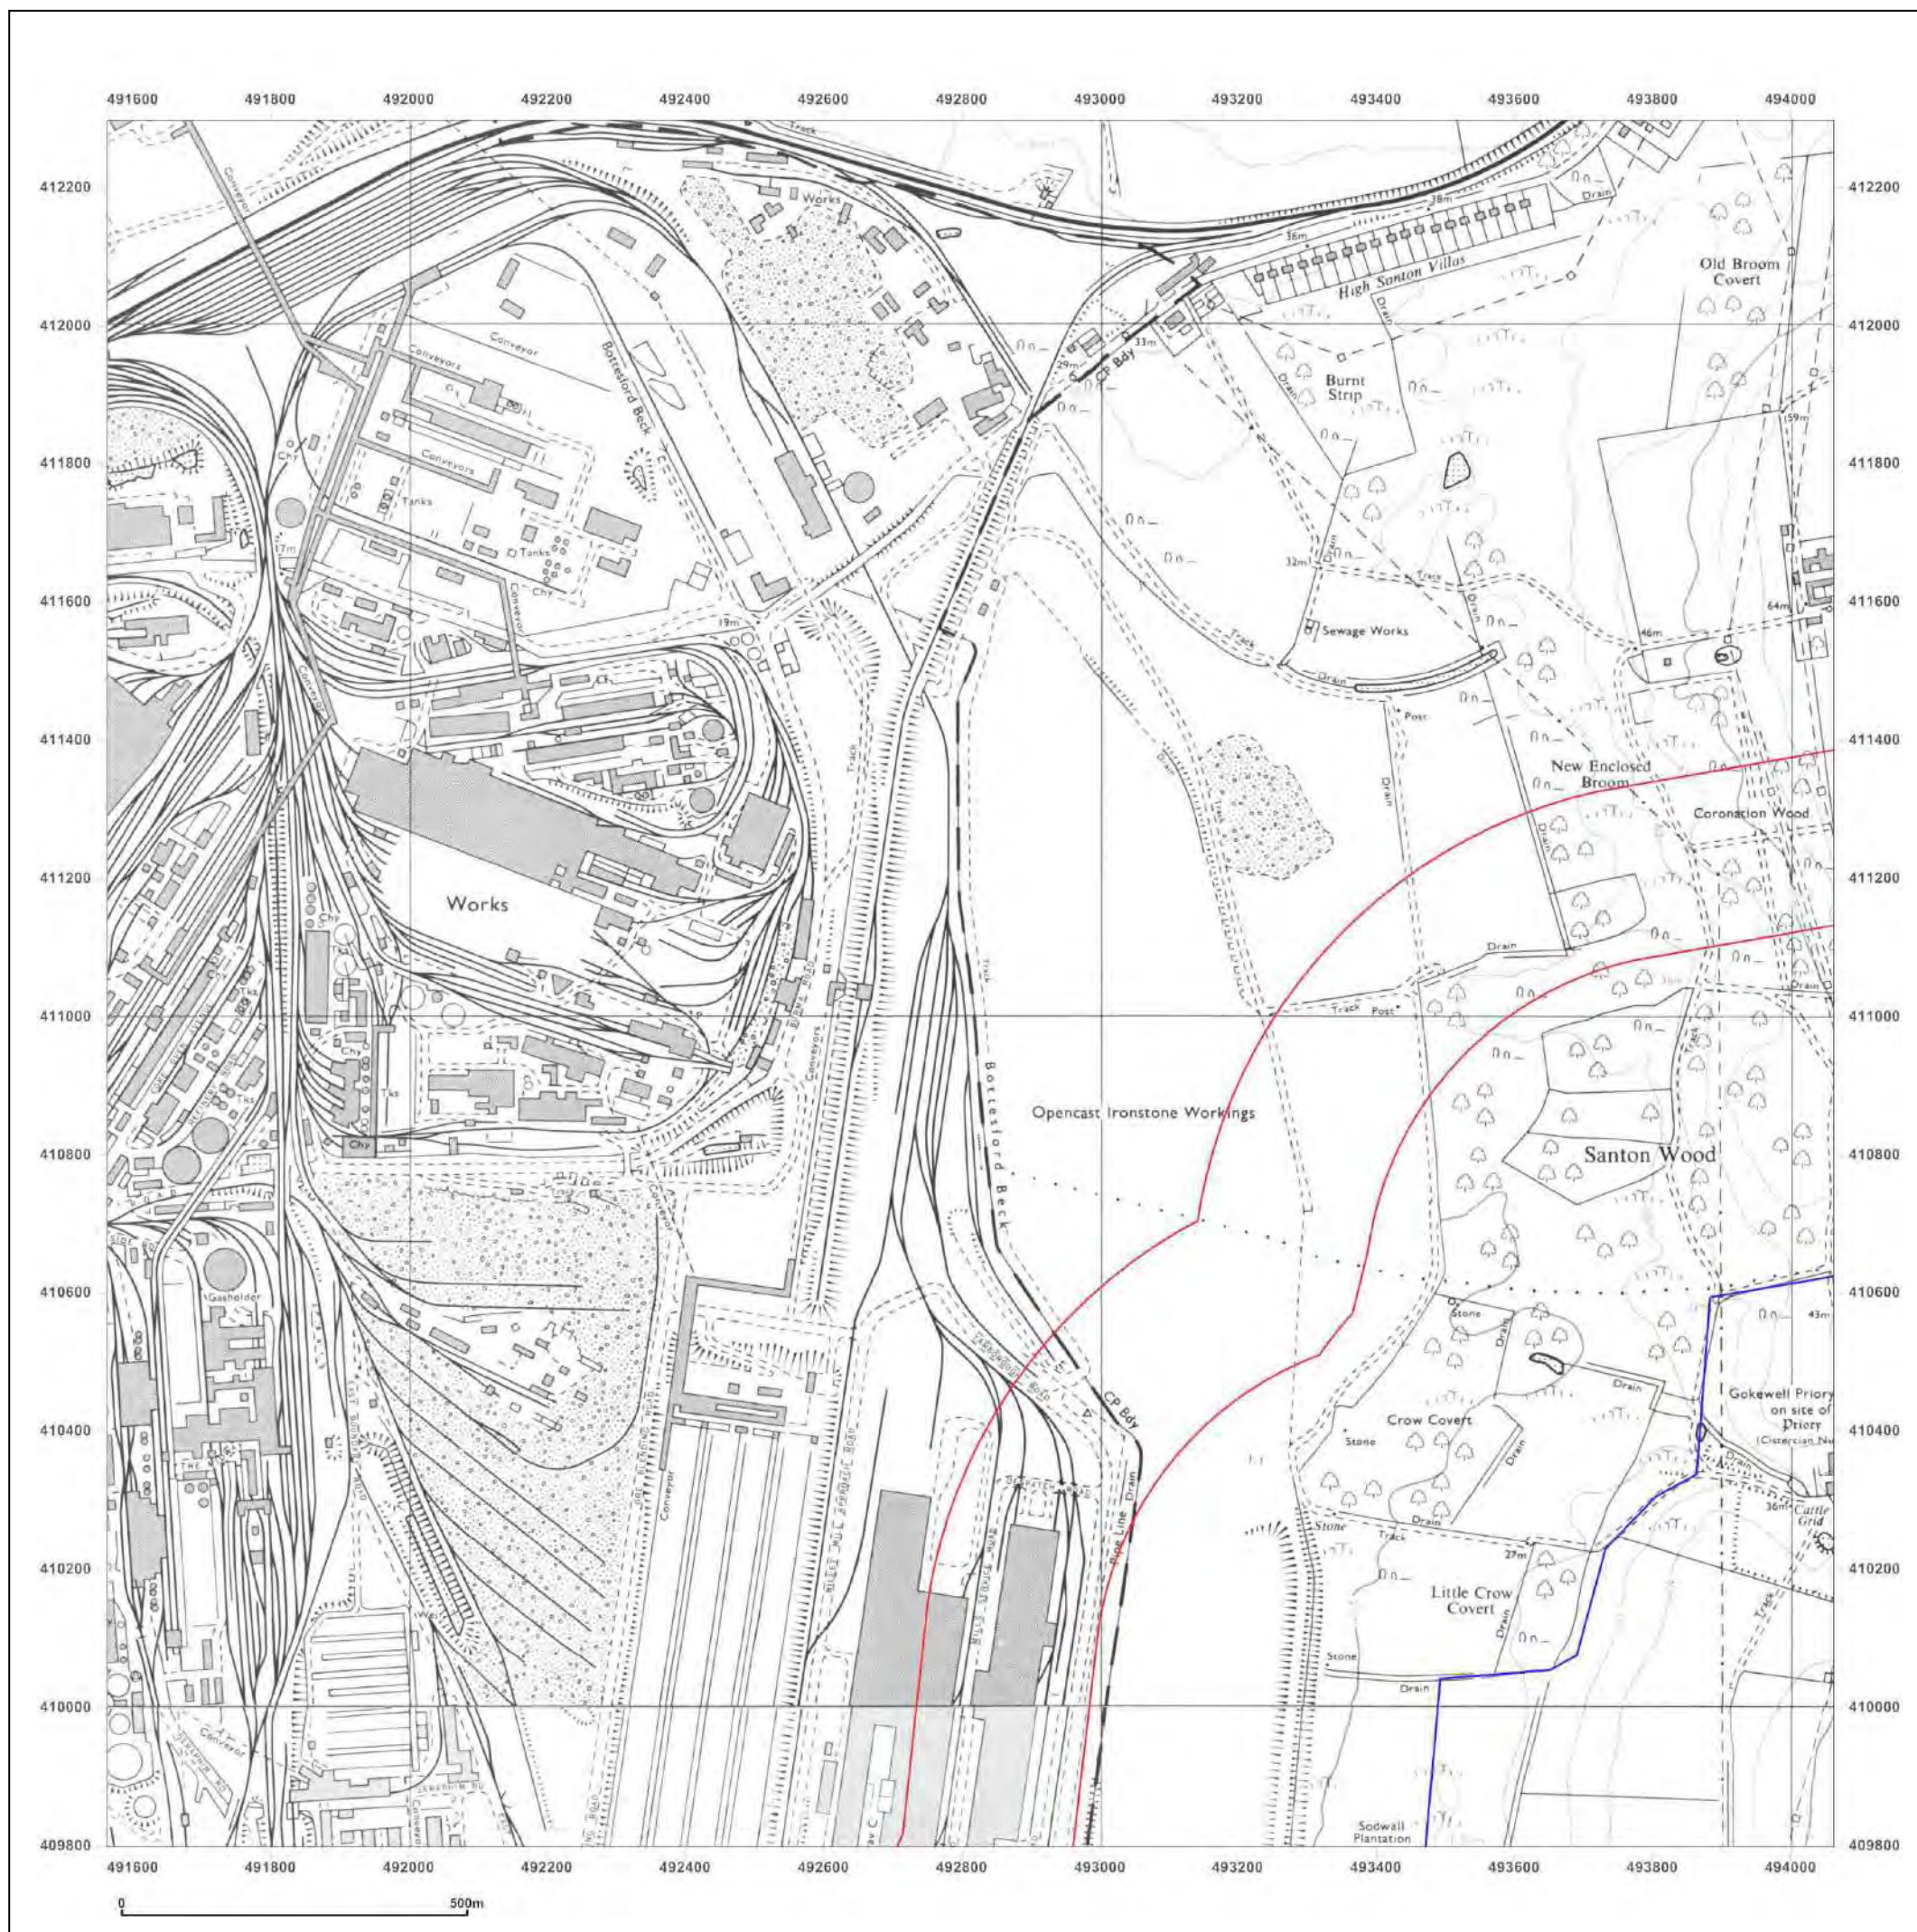



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: National Grid

Map date: 1994

Scale: 1:10,000

Printed at: 1:10,000



Surveyed 1974
Revised 1994
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

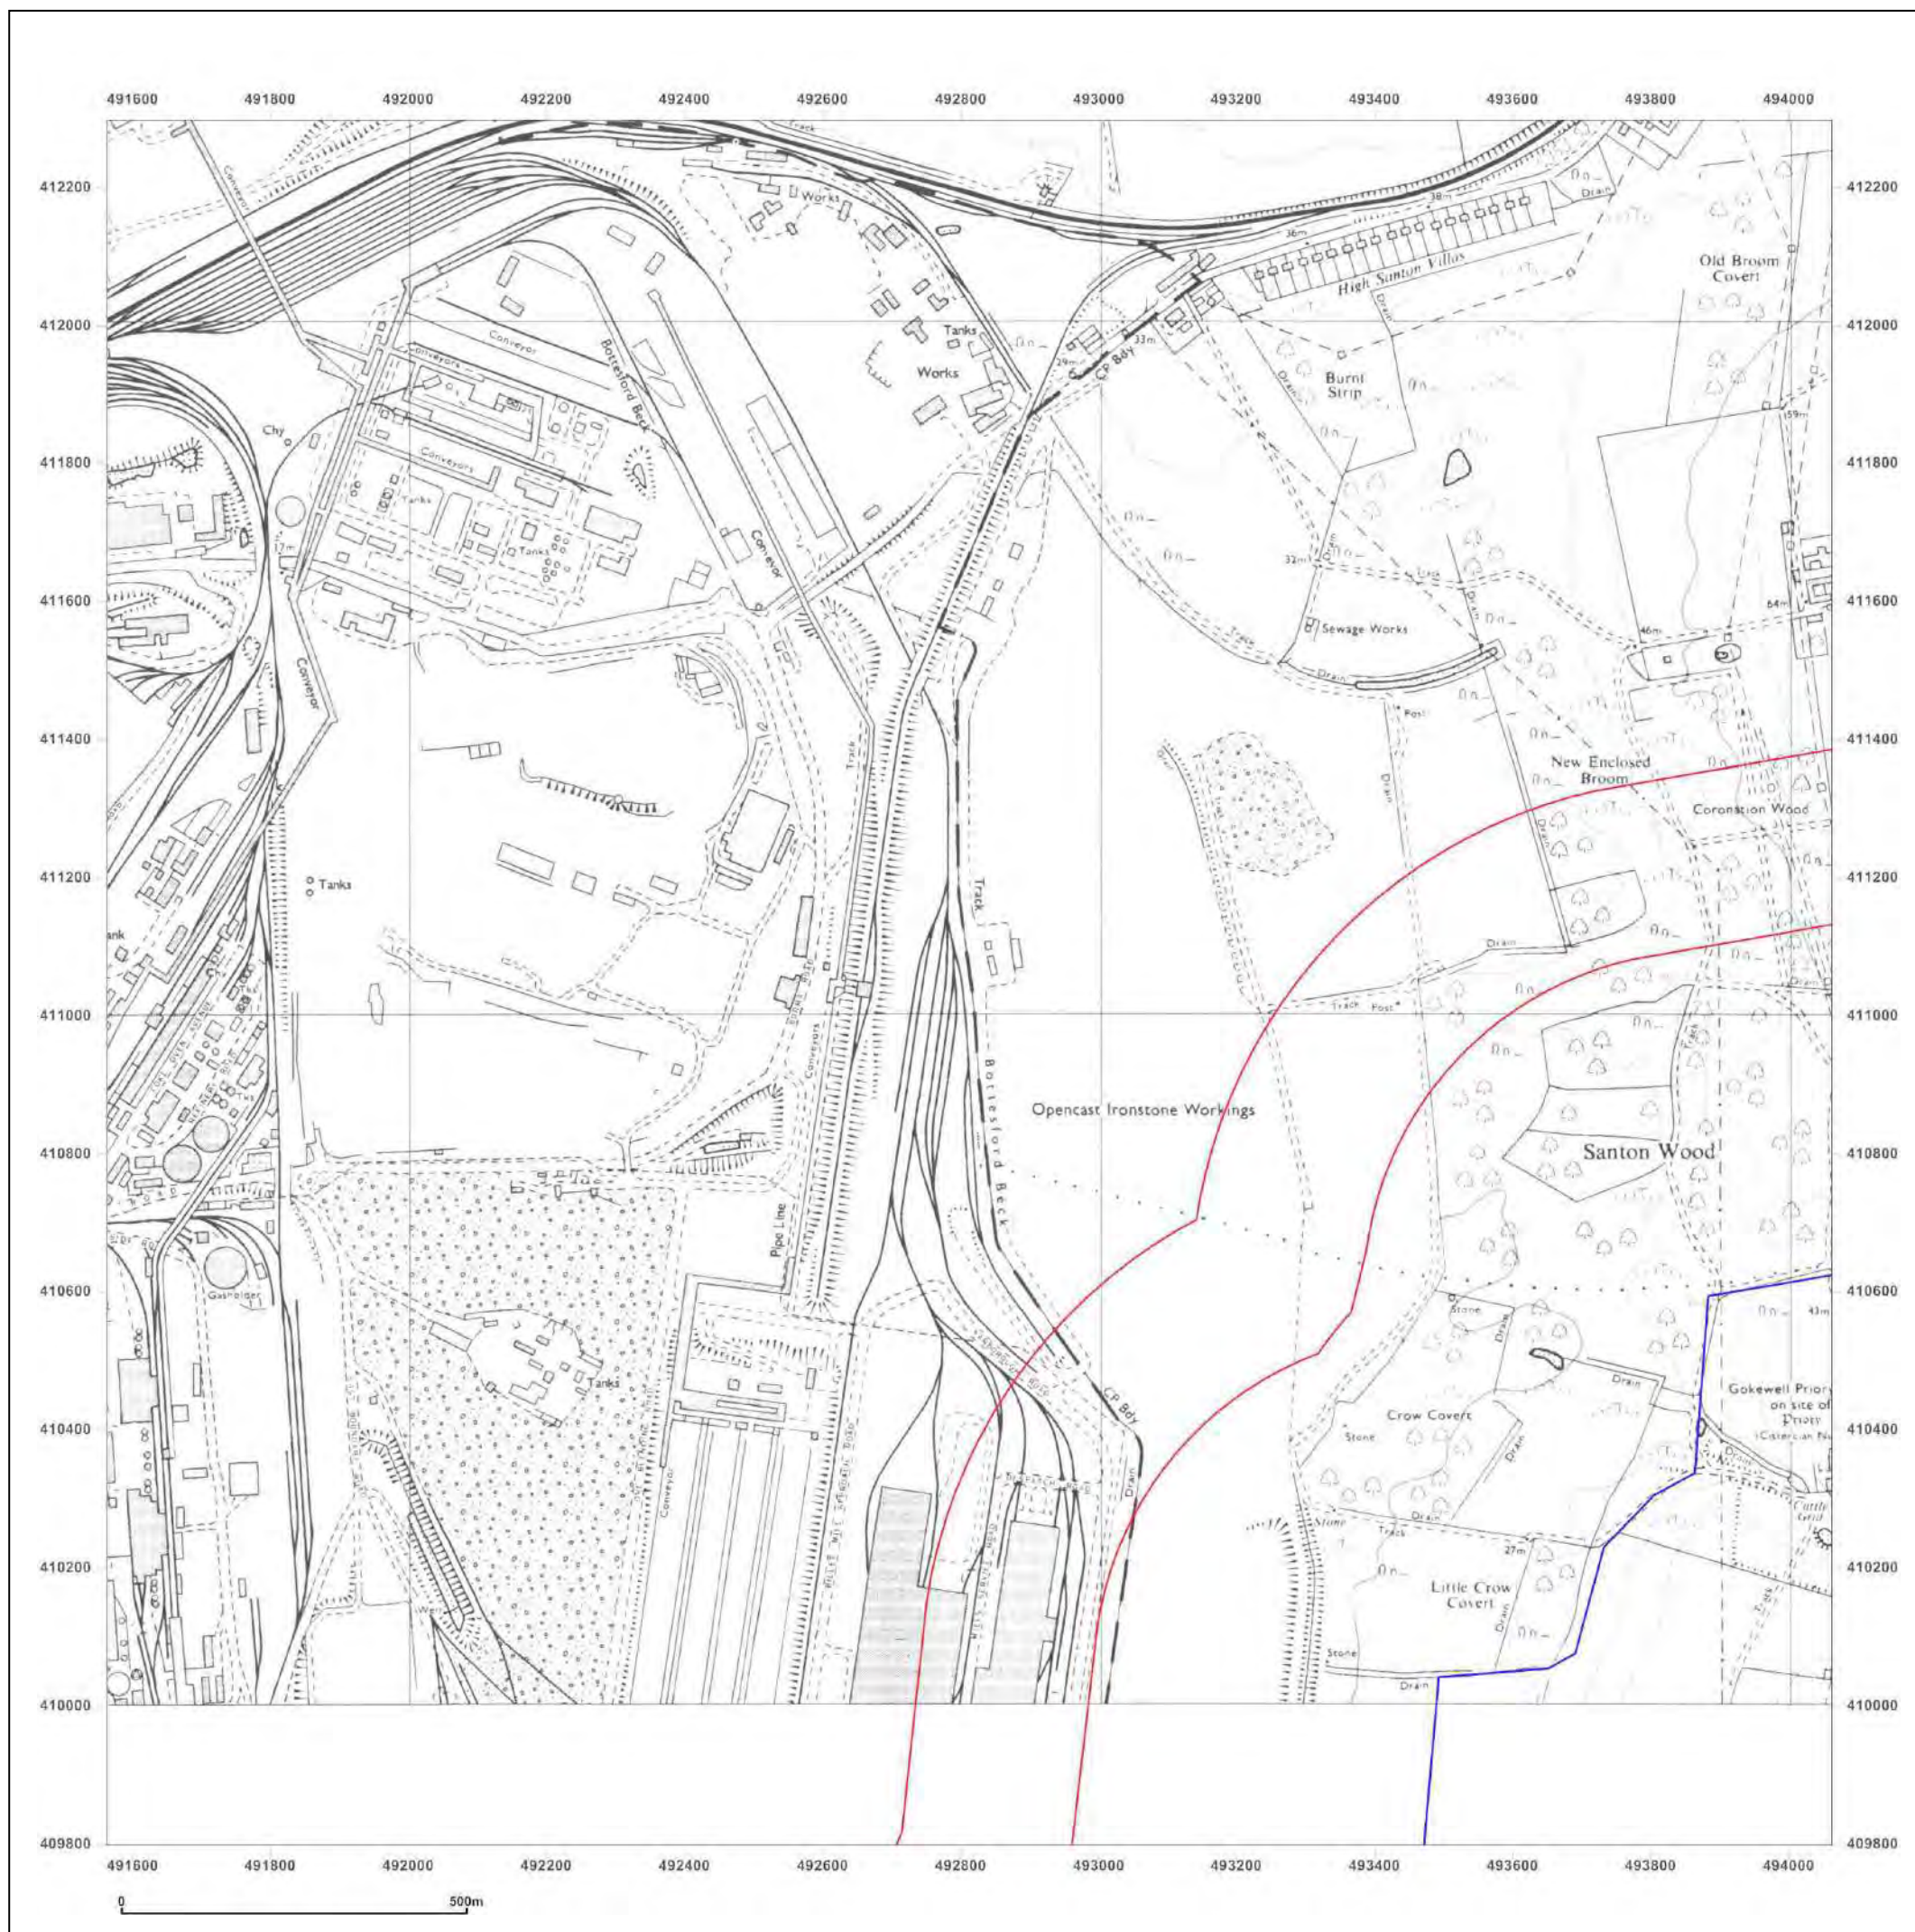



Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: 1:10,000 Raster

Map date: 2002

Scale: 1:10,000

Printed at: 1:10,000

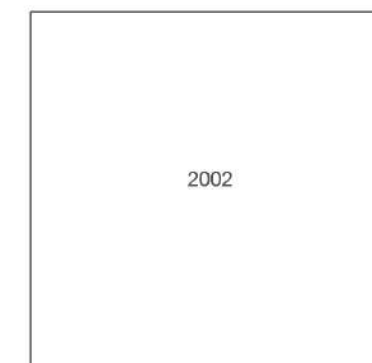

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: National Grid

Map date: 2010

Scale: 1:10,000

Printed at: 1:10,000

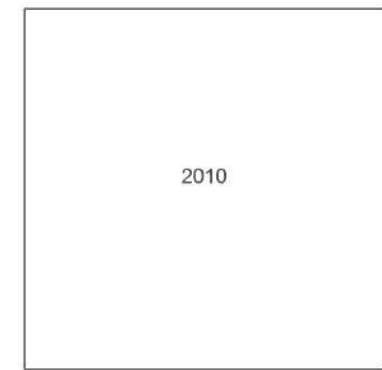

Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



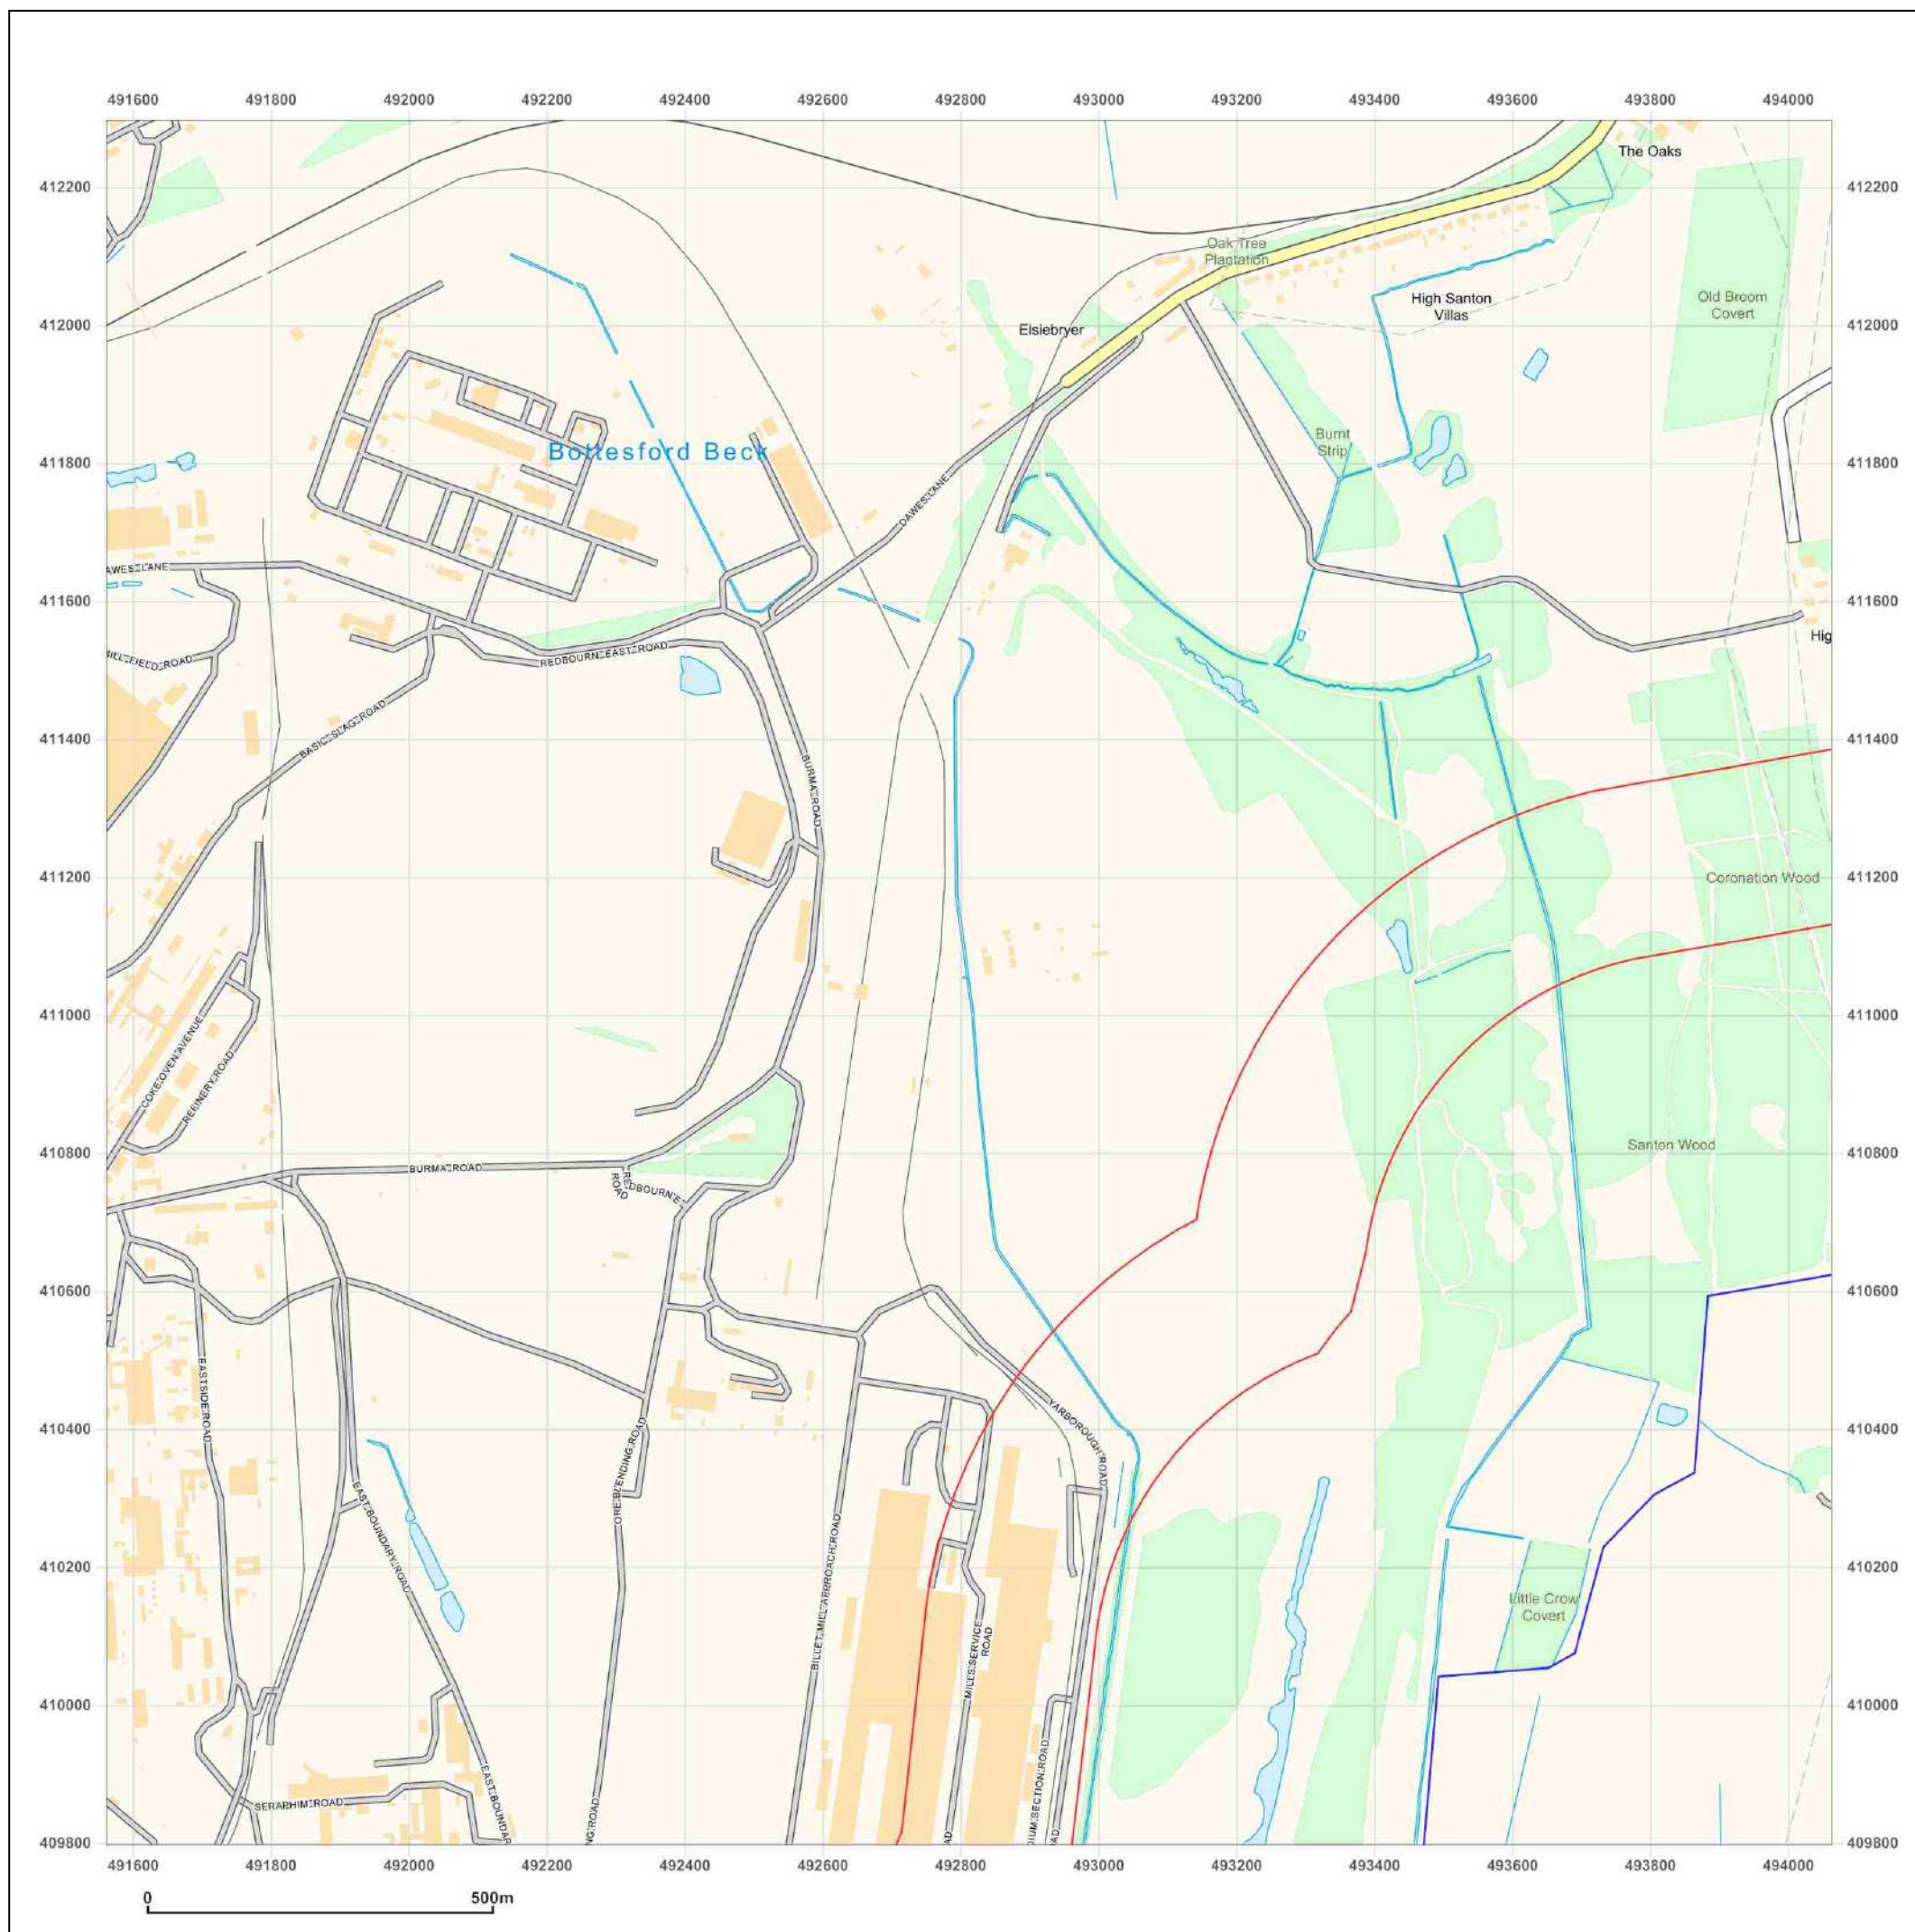

Site Details:

Santon, Scunthorpe, DN16 1XP



Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_1_2
Grid Ref: 492812, 411047

Map Name: National Grid

Map date: 2014

Scale: 1:10,000

Printed at: 1:10,000

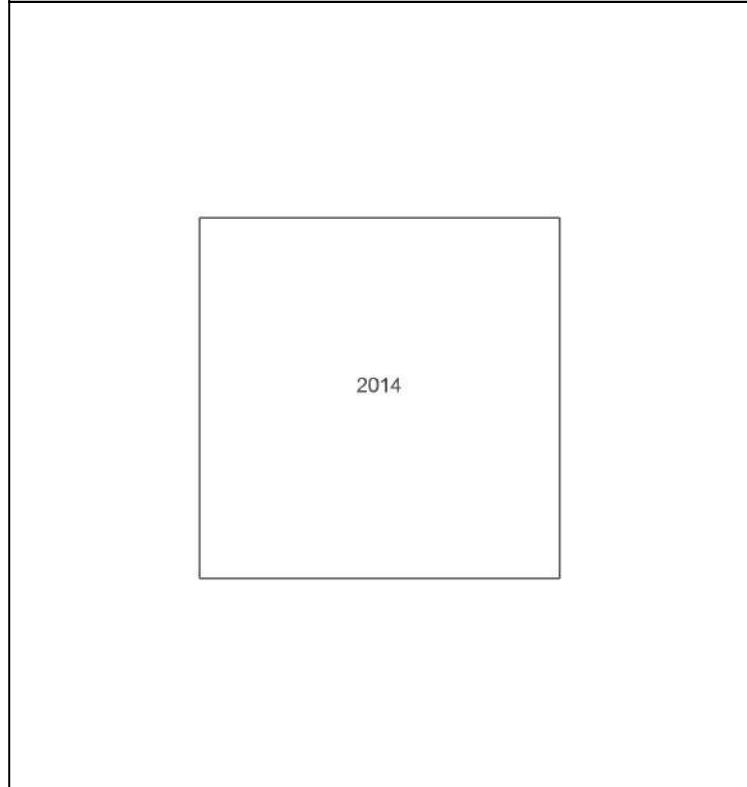

Produced by
 Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: County Series


Map date: 1885-1886

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1886
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A

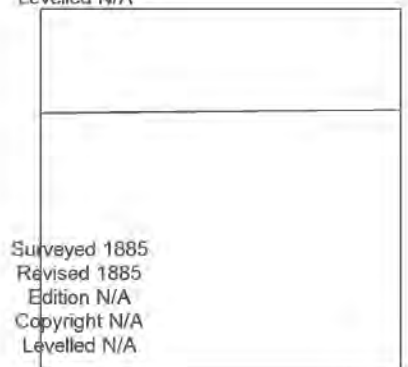

Surveyed 1885
Revised 1885
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

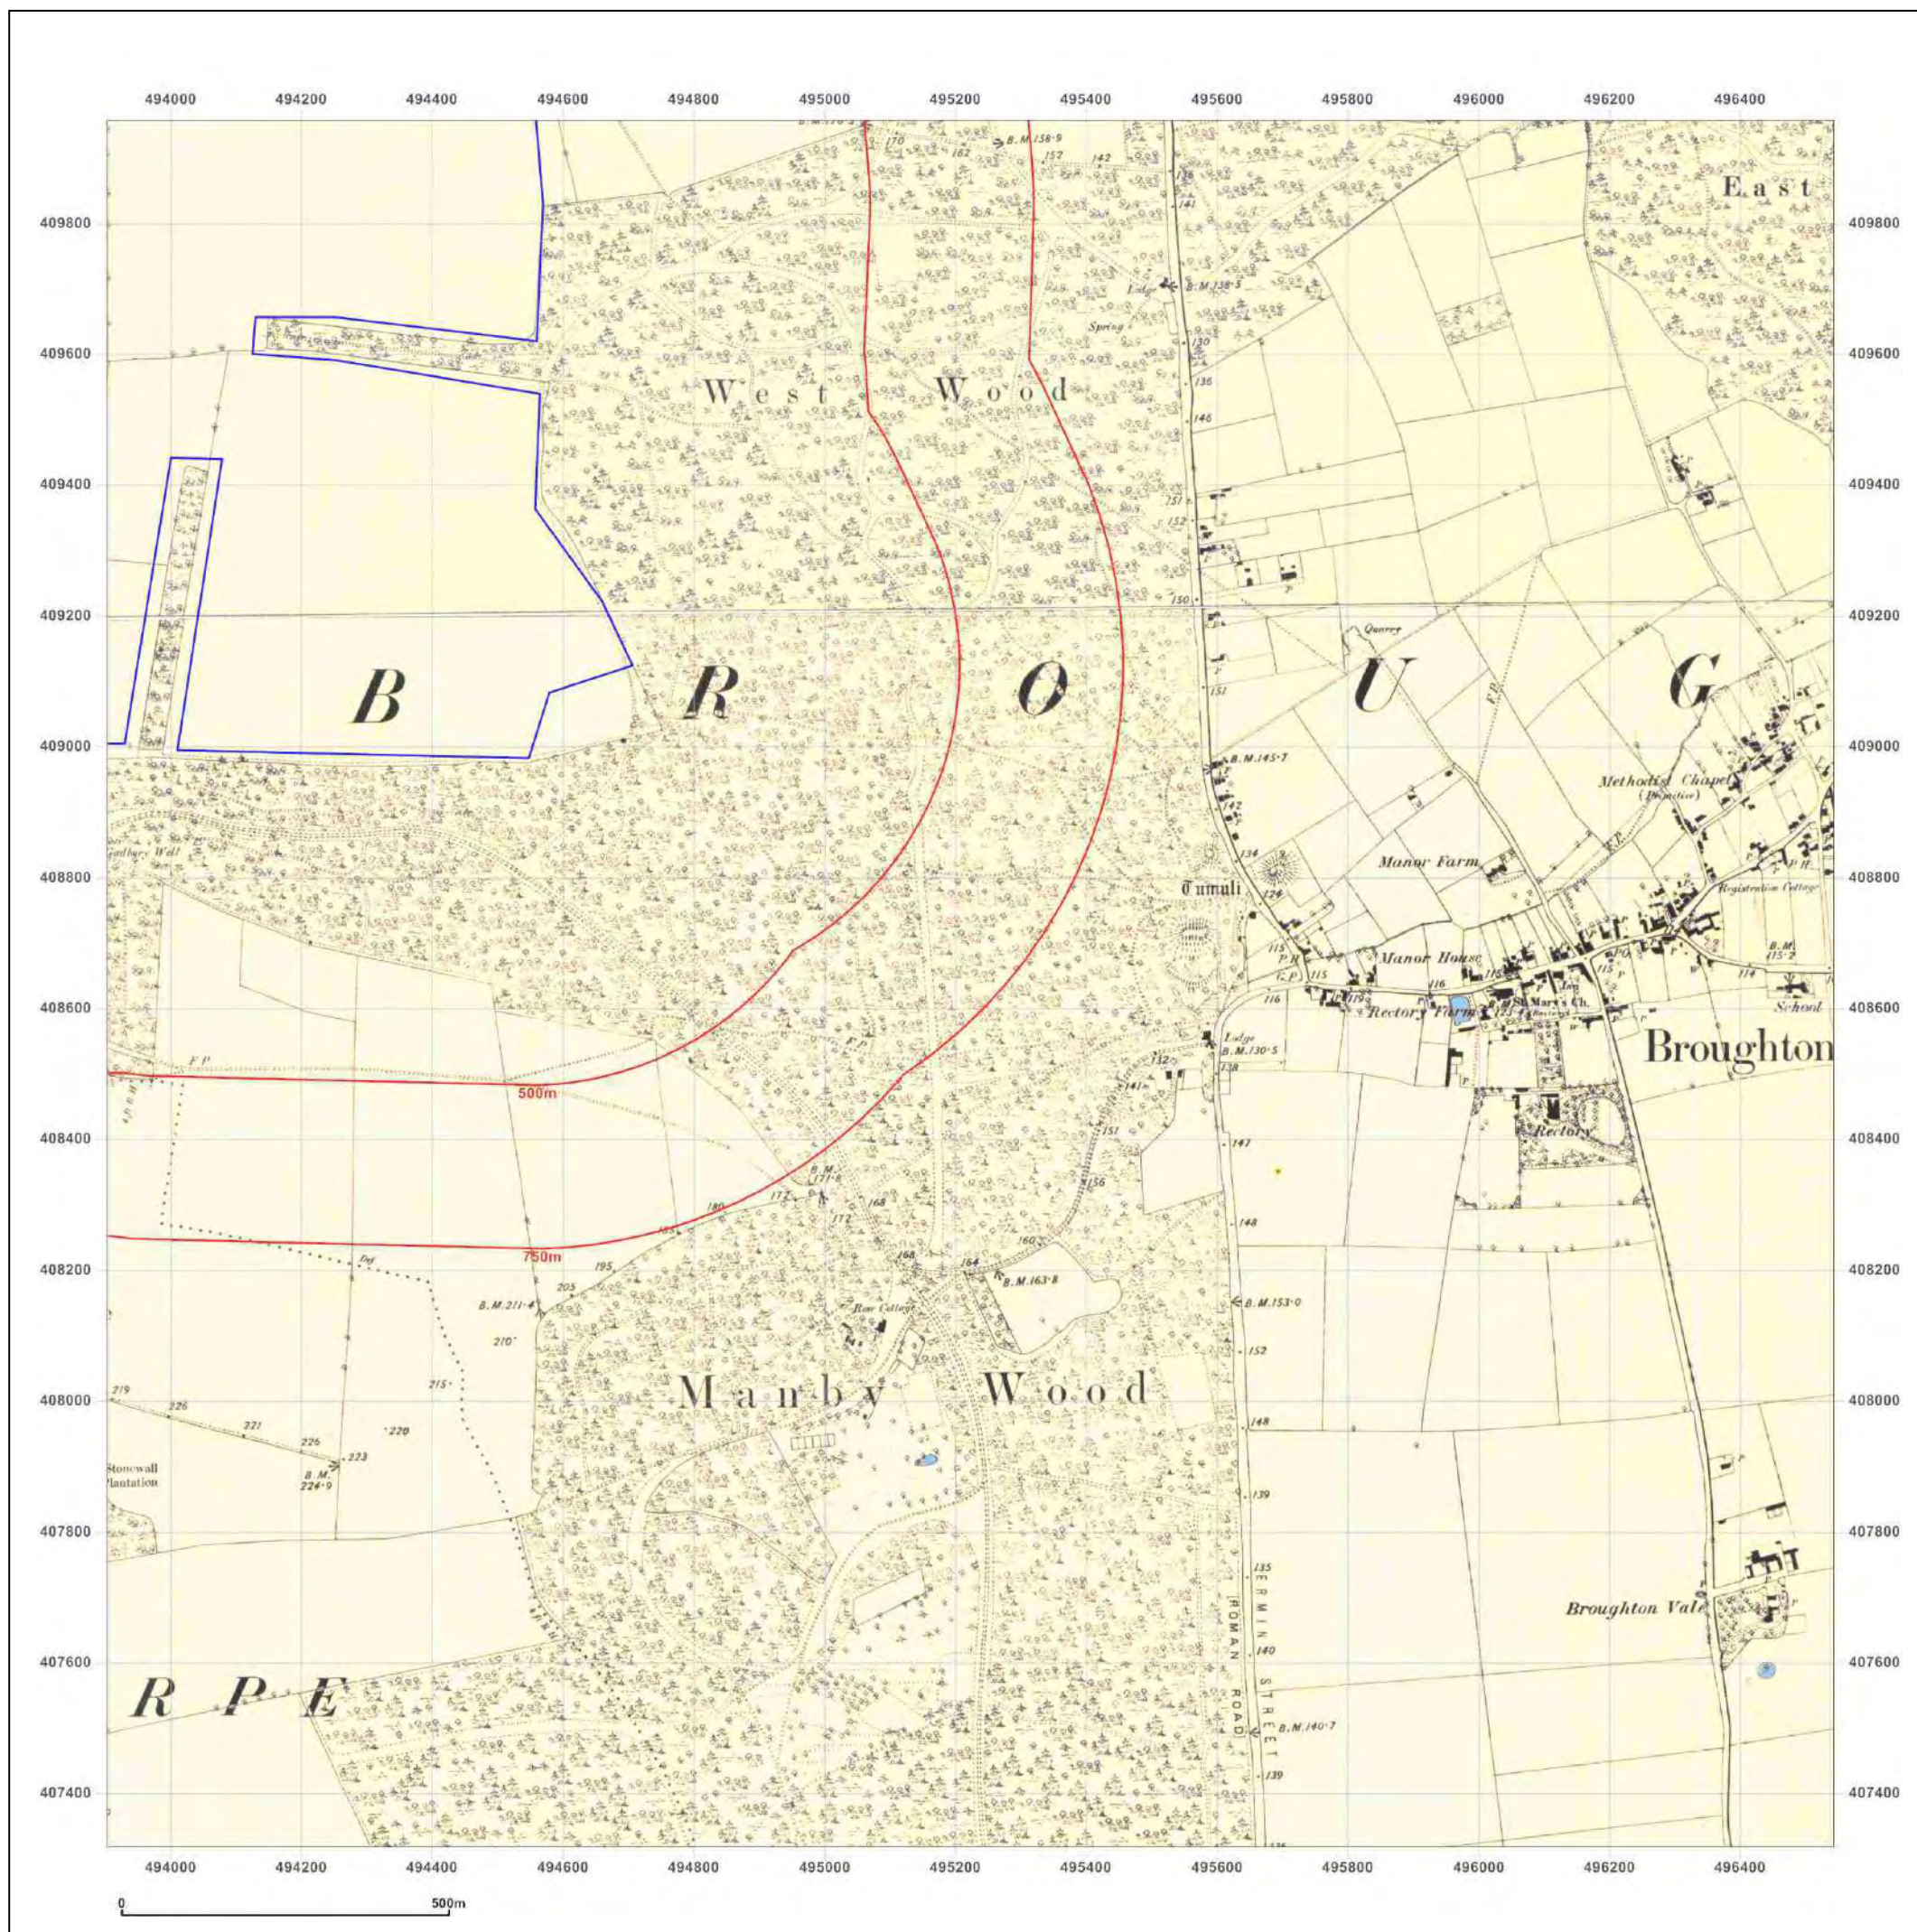



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: County Series

Map date: 1886

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1886
Revised 1886
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

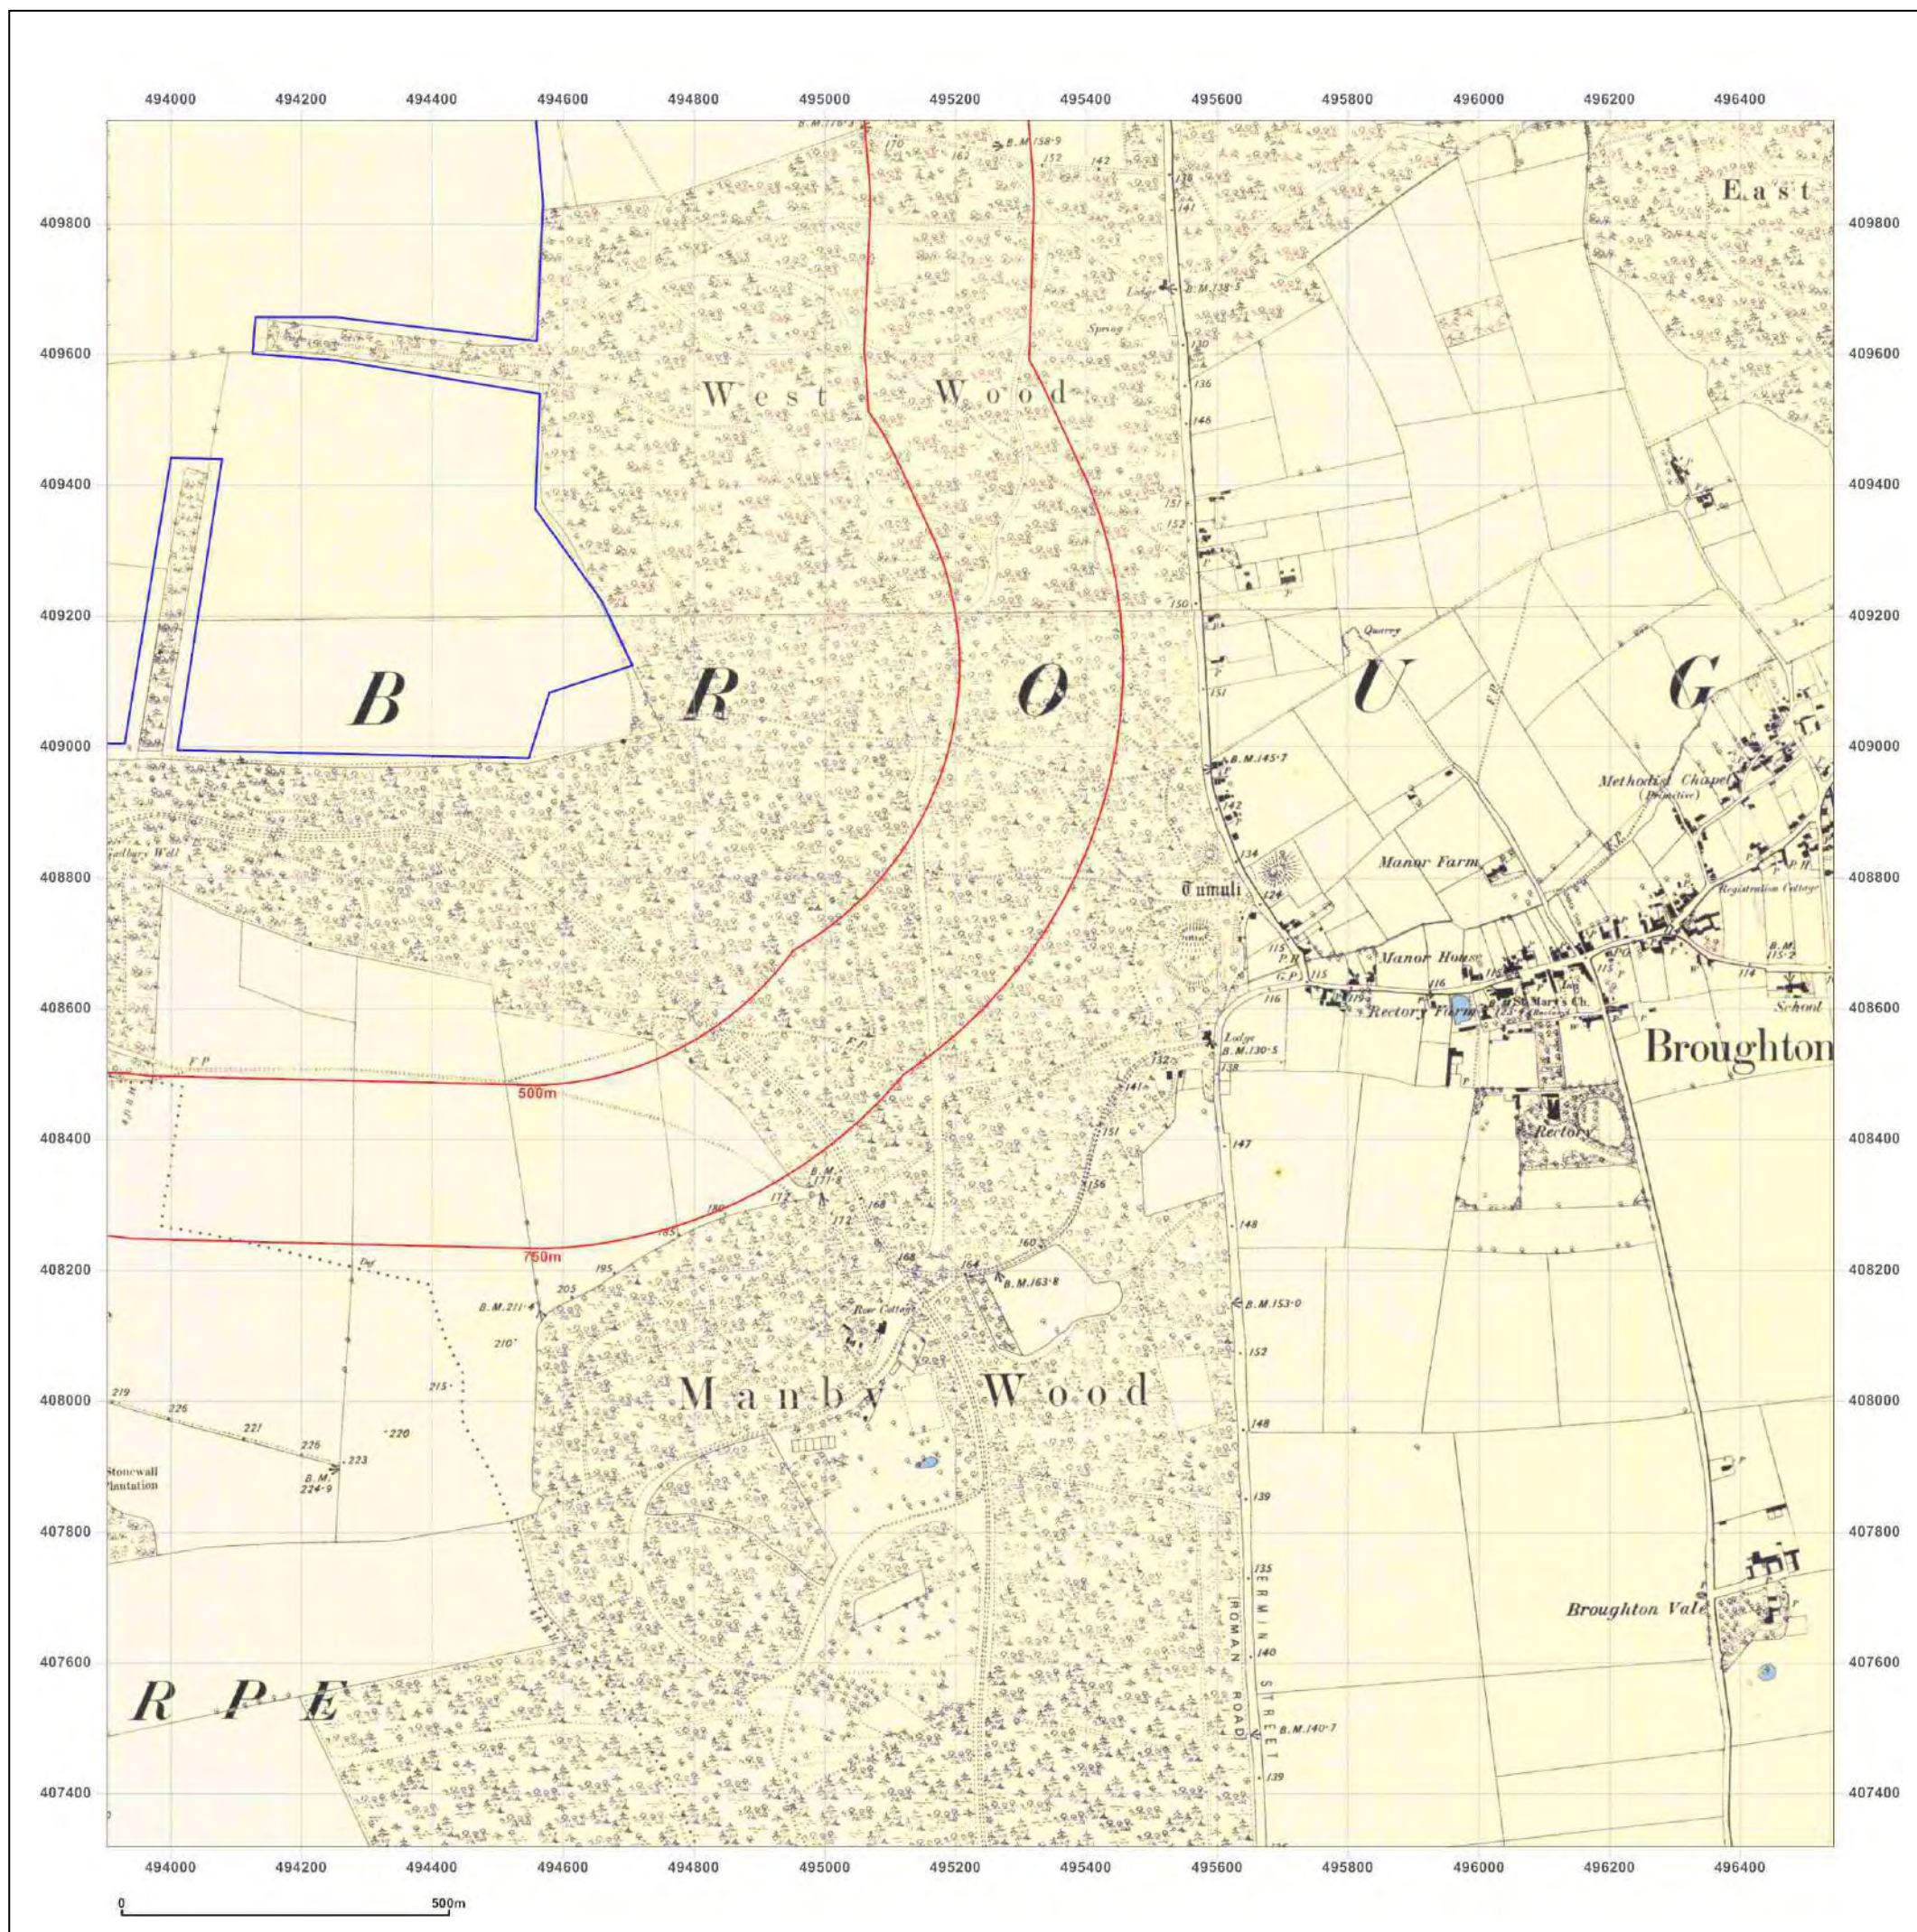



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: County Series

Map date: 1905-1906

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1906
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1885
Revised 1905
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

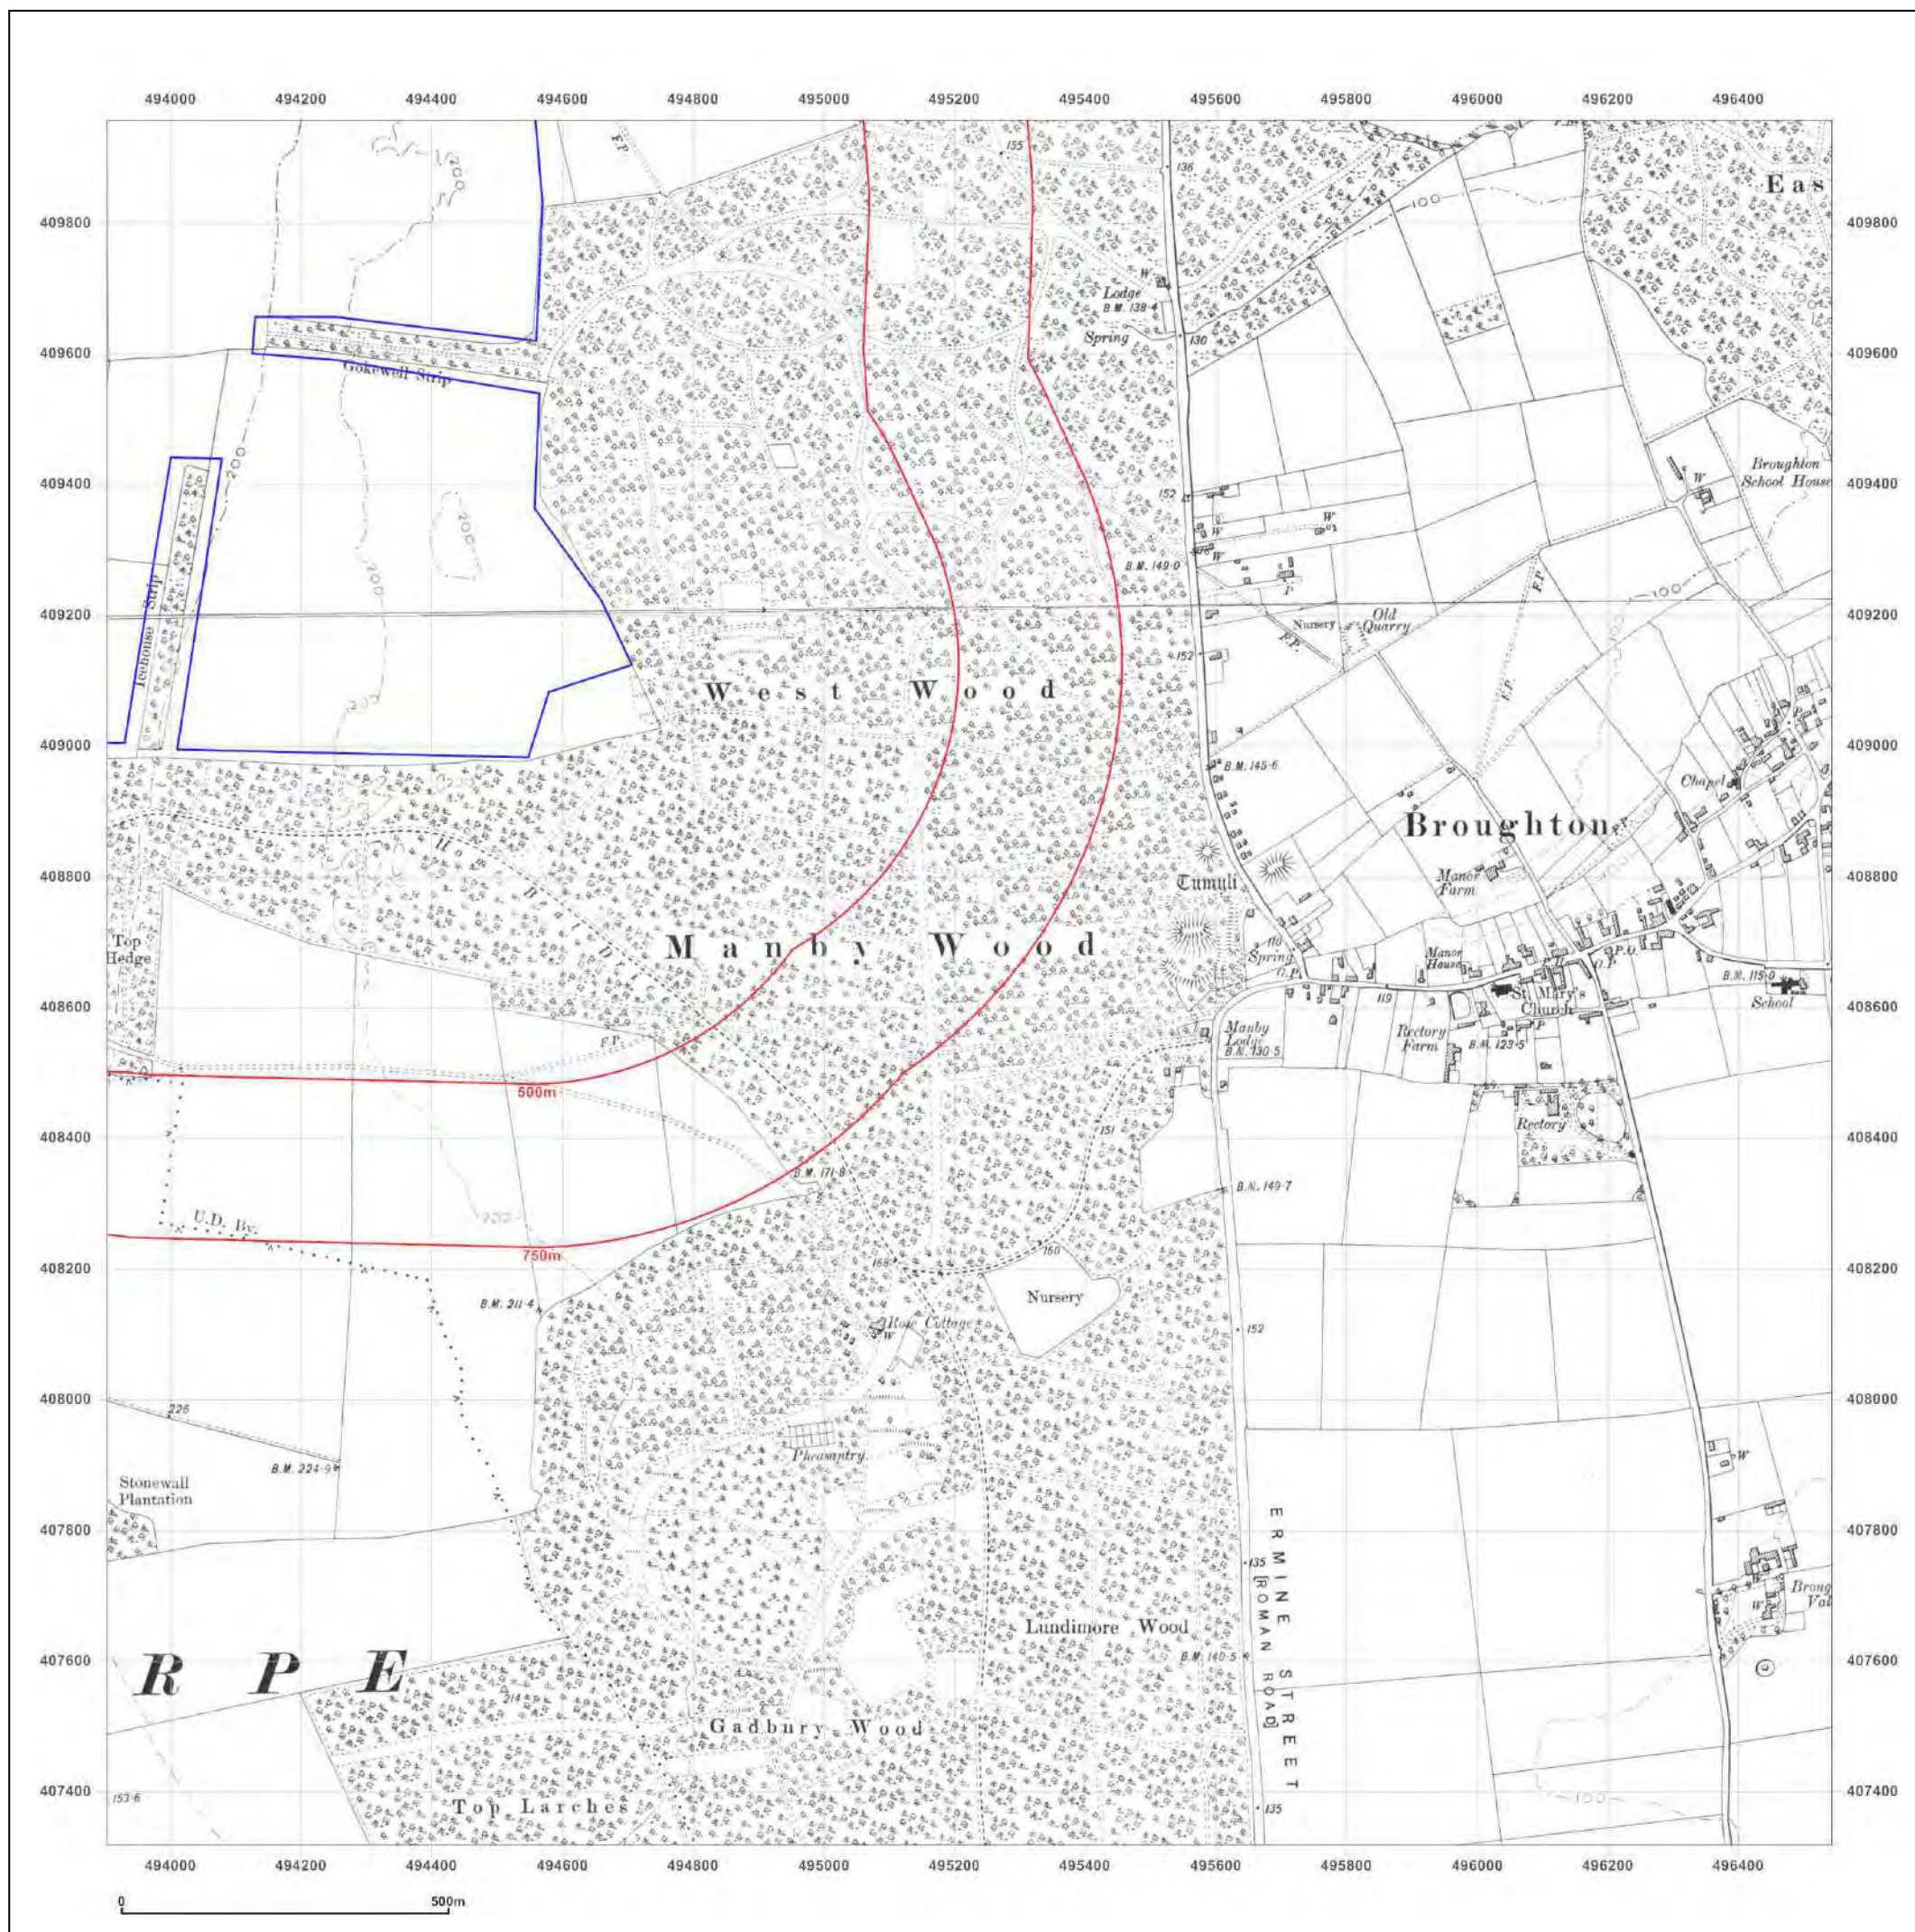

Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: County Series

Map date: 1905-1906

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
 Revised 1906
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1885
 Revised 1905
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

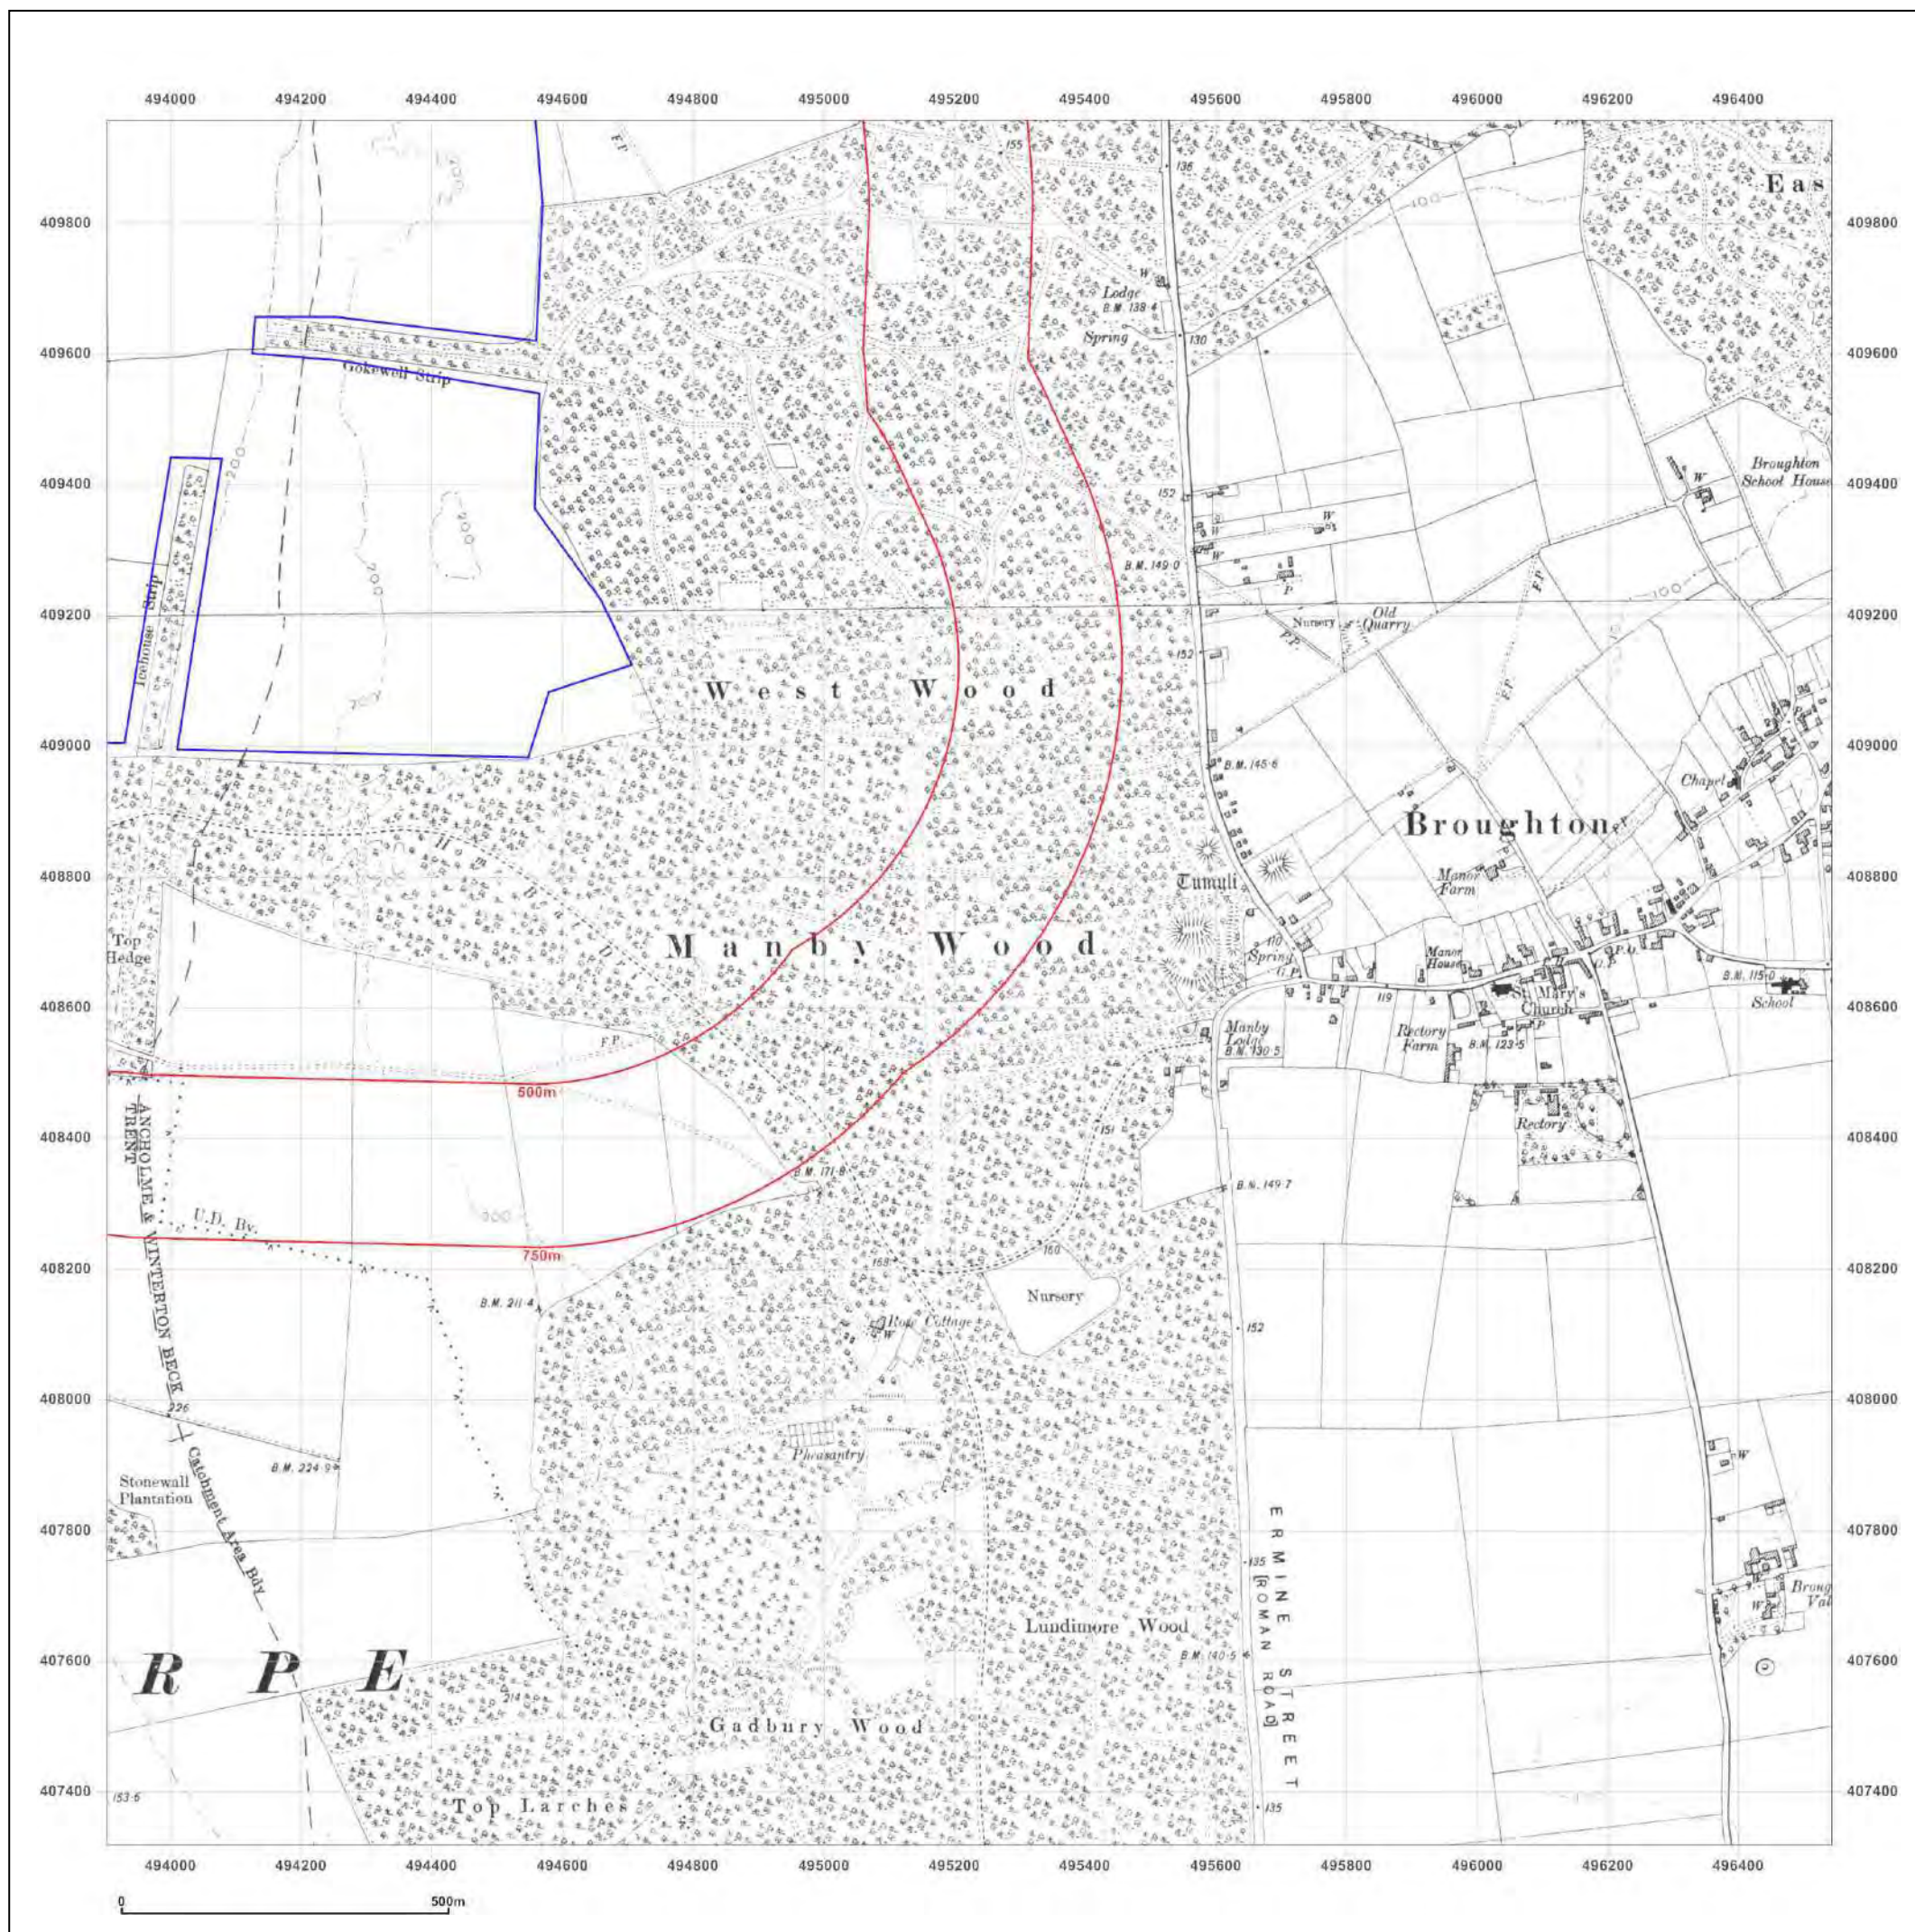



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: County Series

Map date: 1938

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1938
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

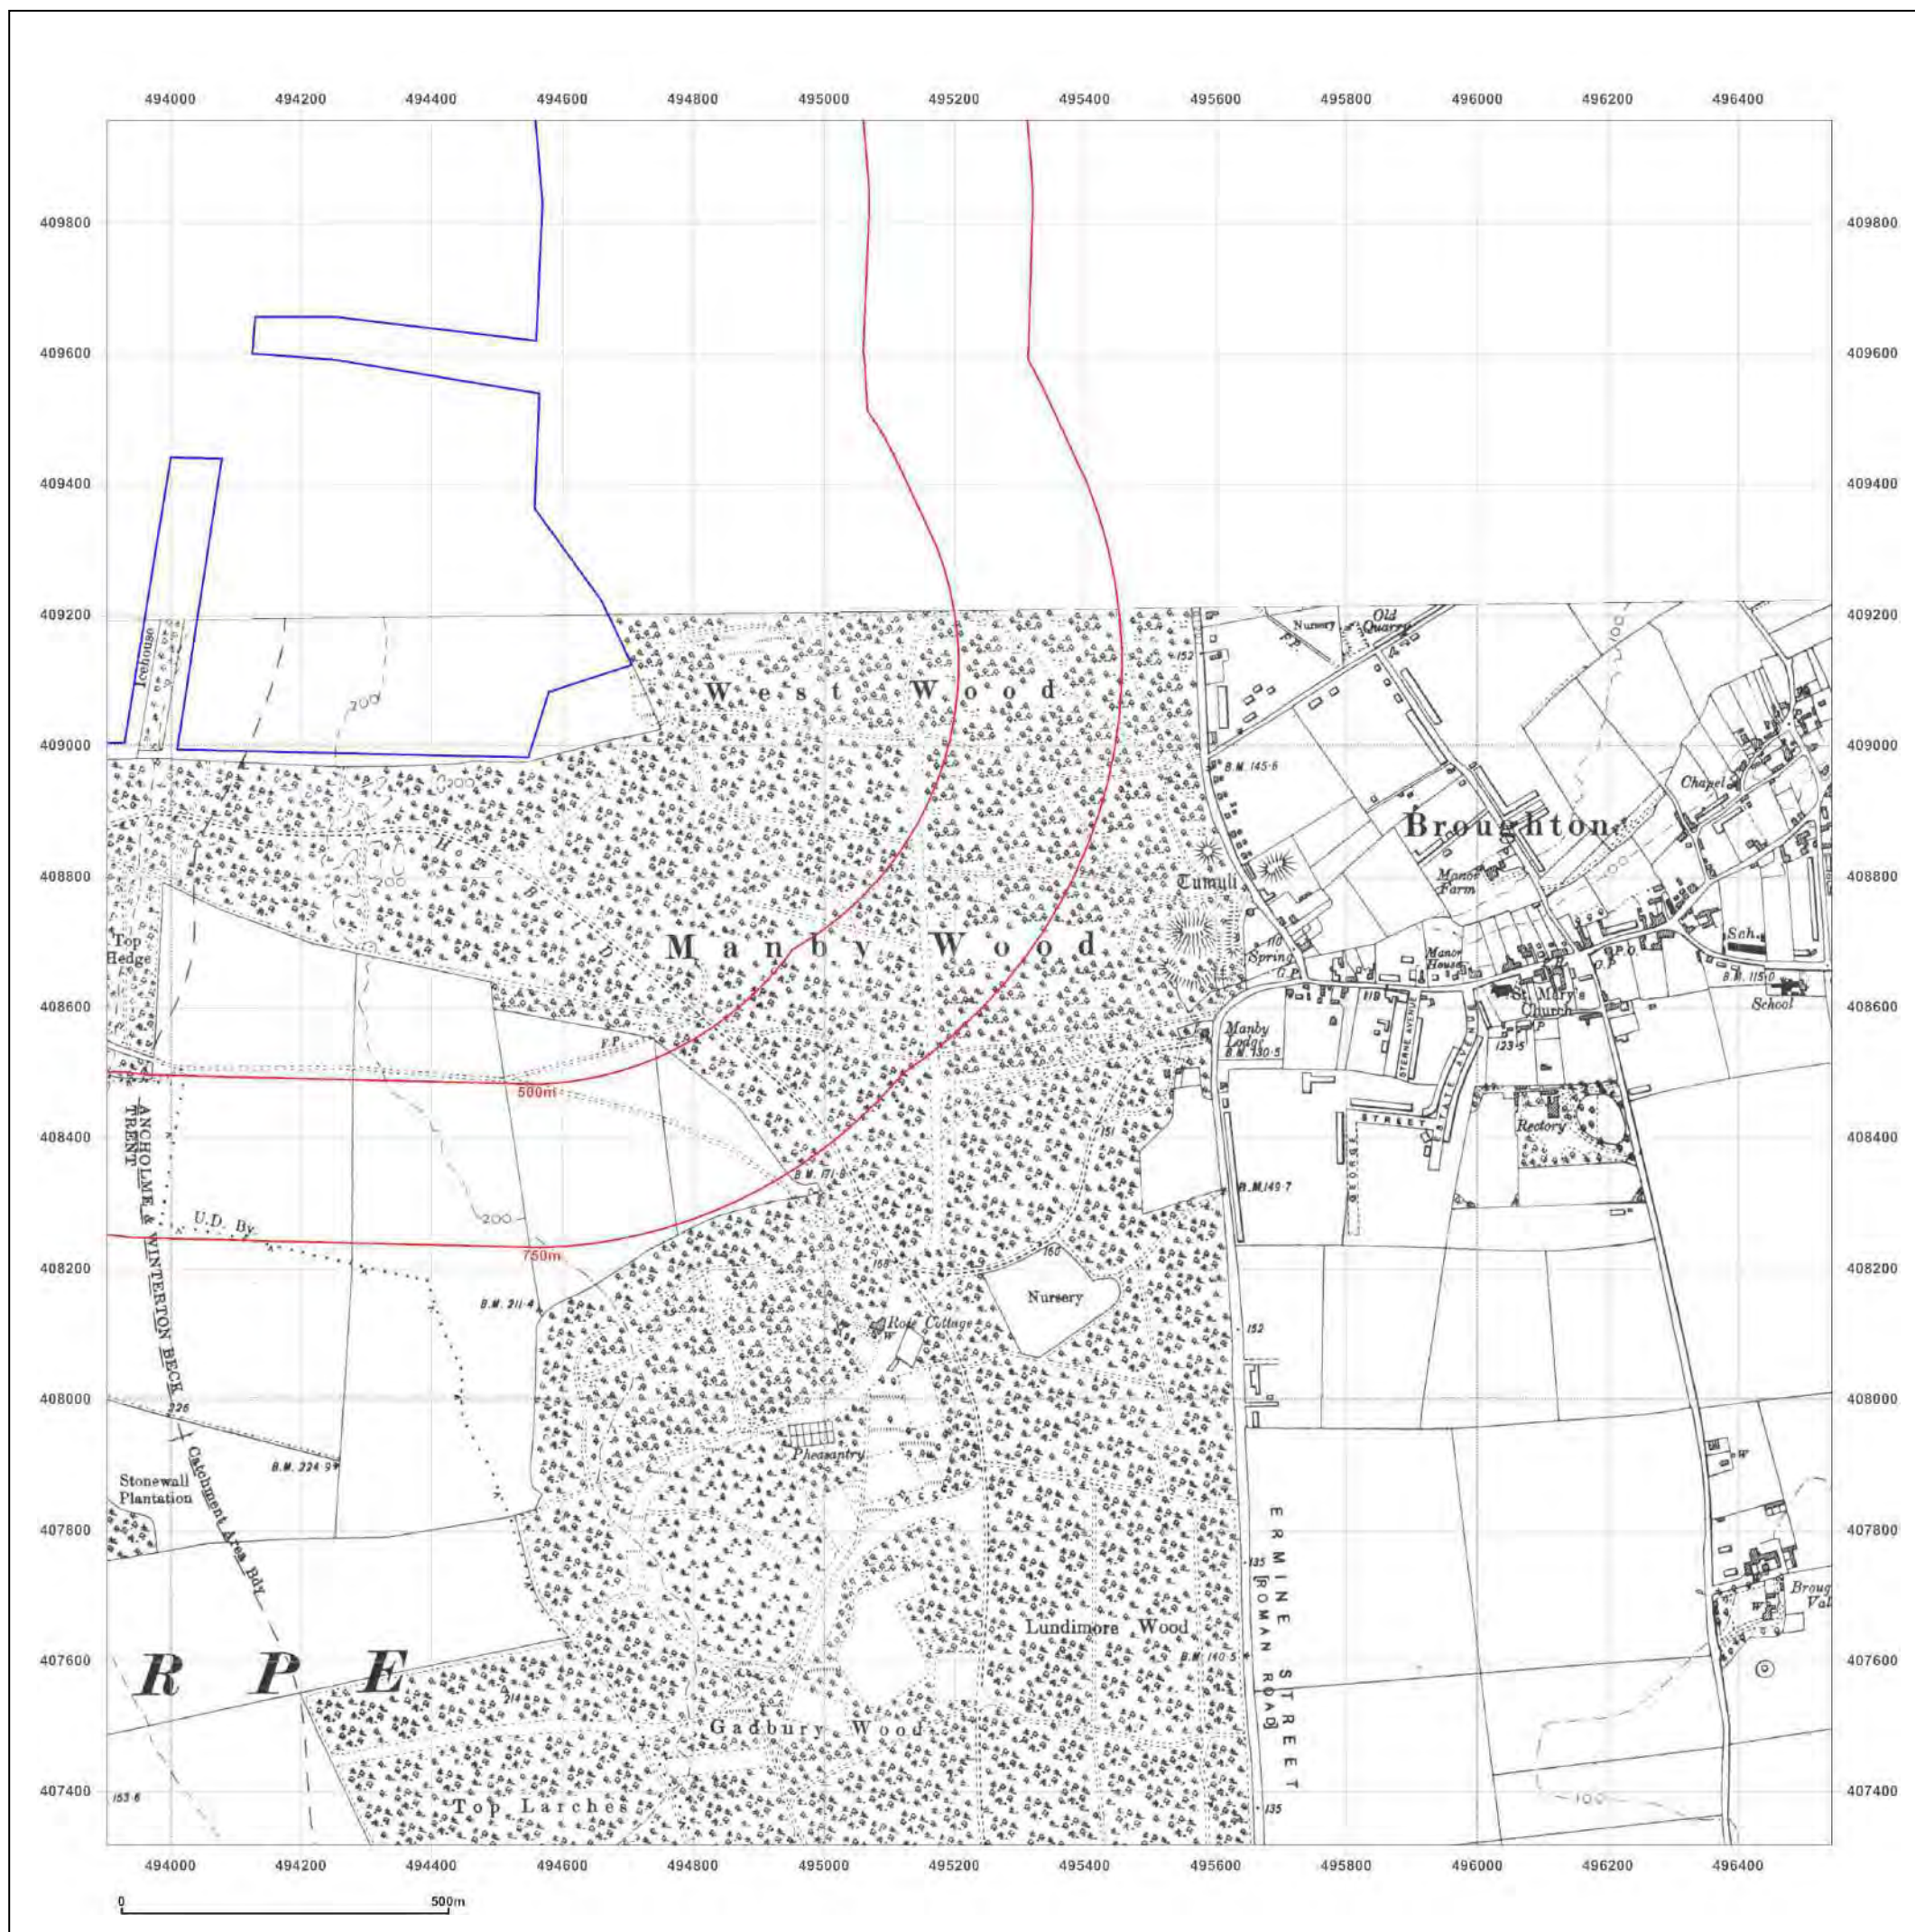

Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: County Series

Map date: 1948

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
 Revised 1948
 Edition N/A
 Copyright N/A
 Levelled N/A

Surveyed 1885
 Revised 1948
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

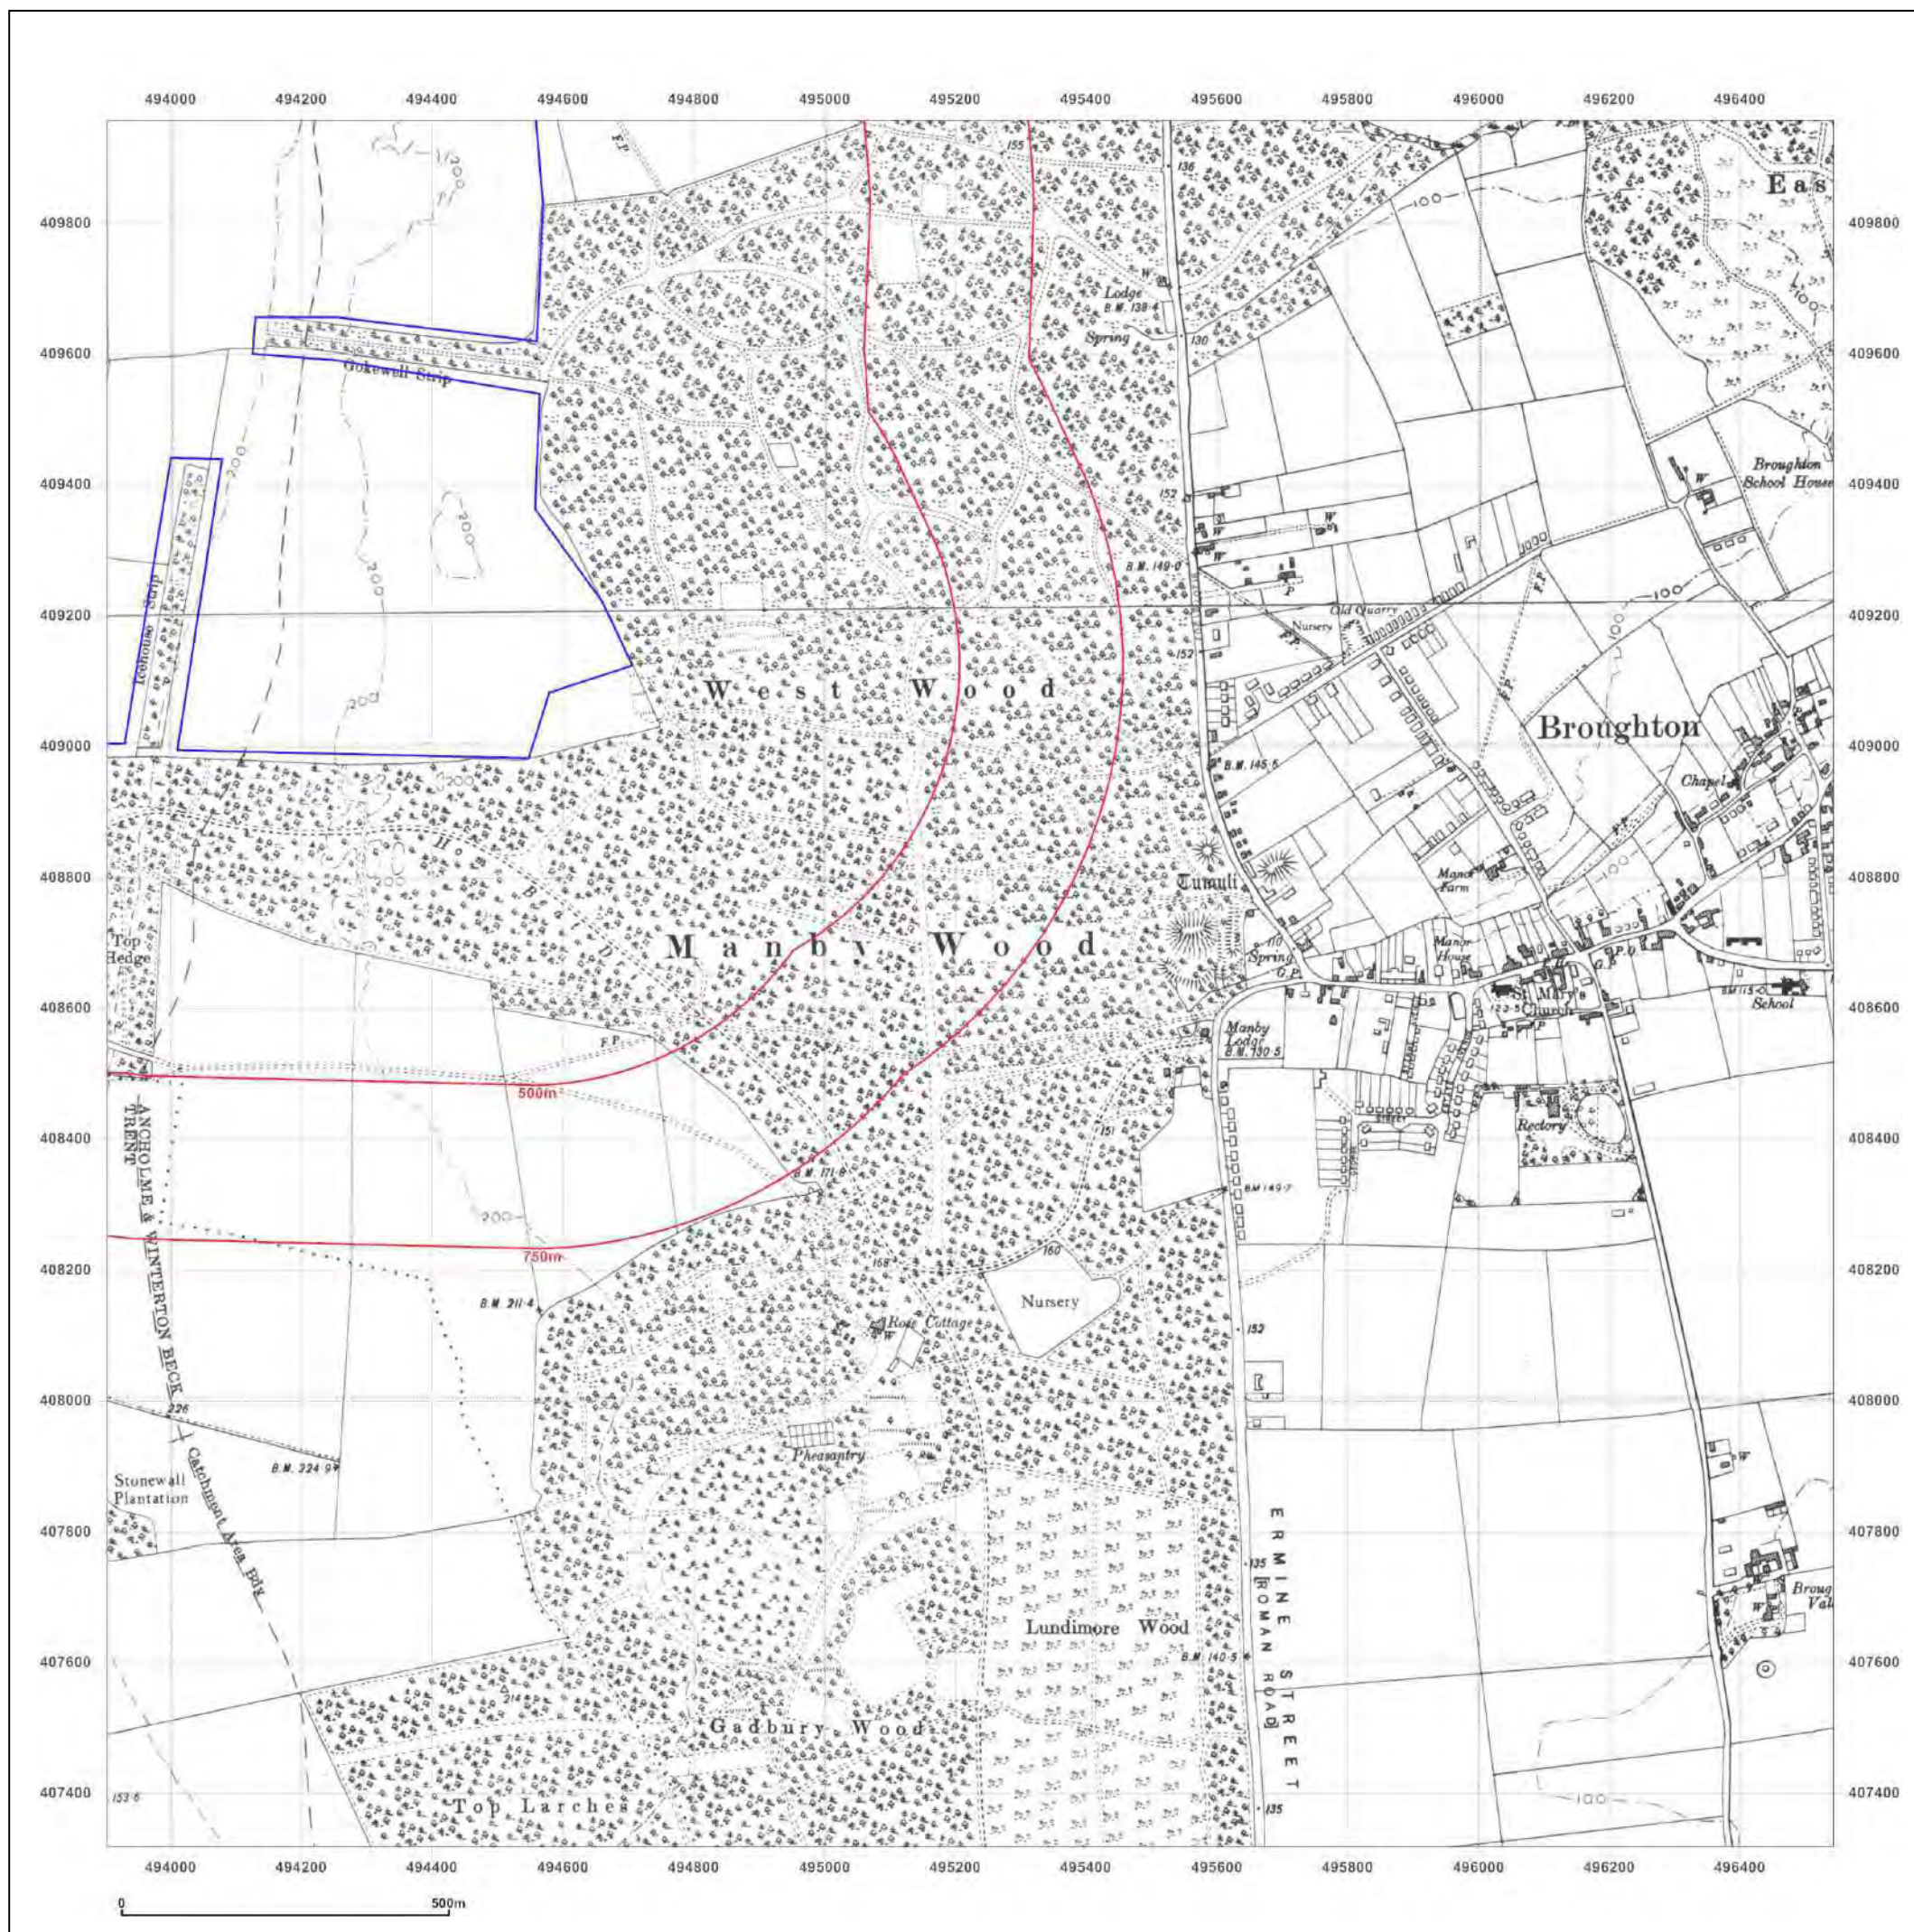



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: Provisional

Map date: 1951-1955

Scale: 1:10,560

Printed at: 1:10,560



Surveyed N/A
Revised 1955
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1951
Revised 1951
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com





Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

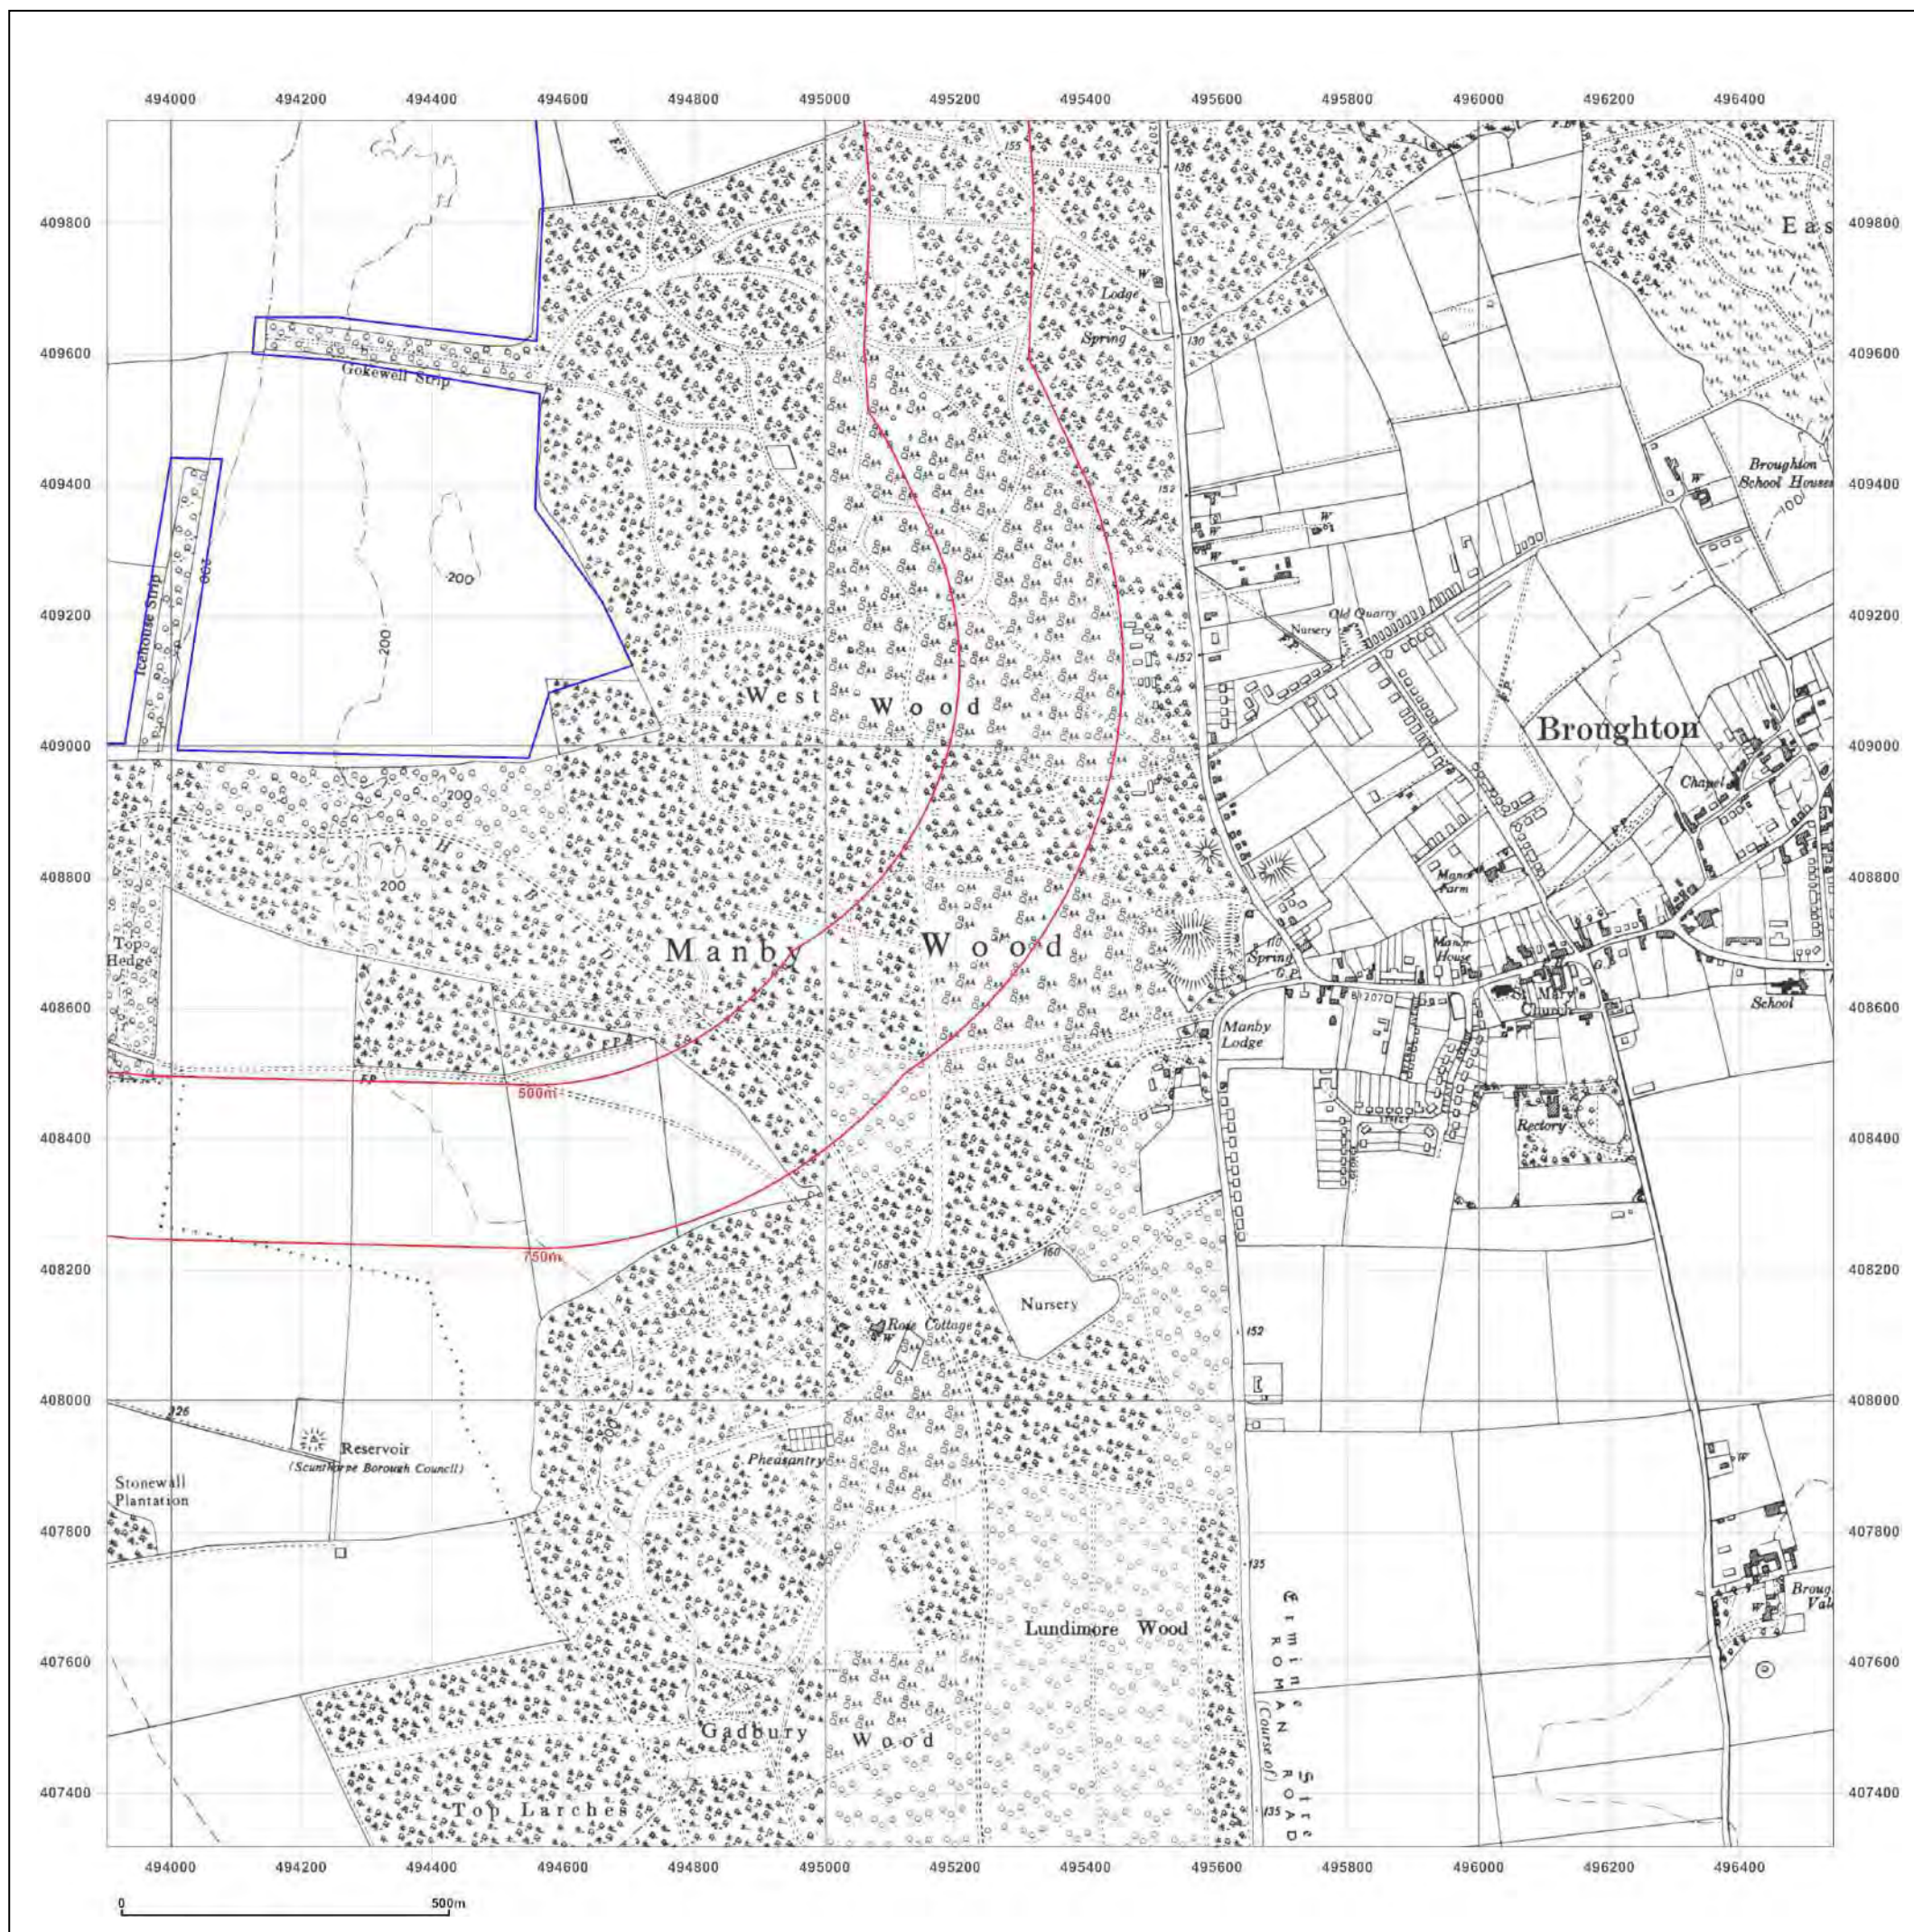

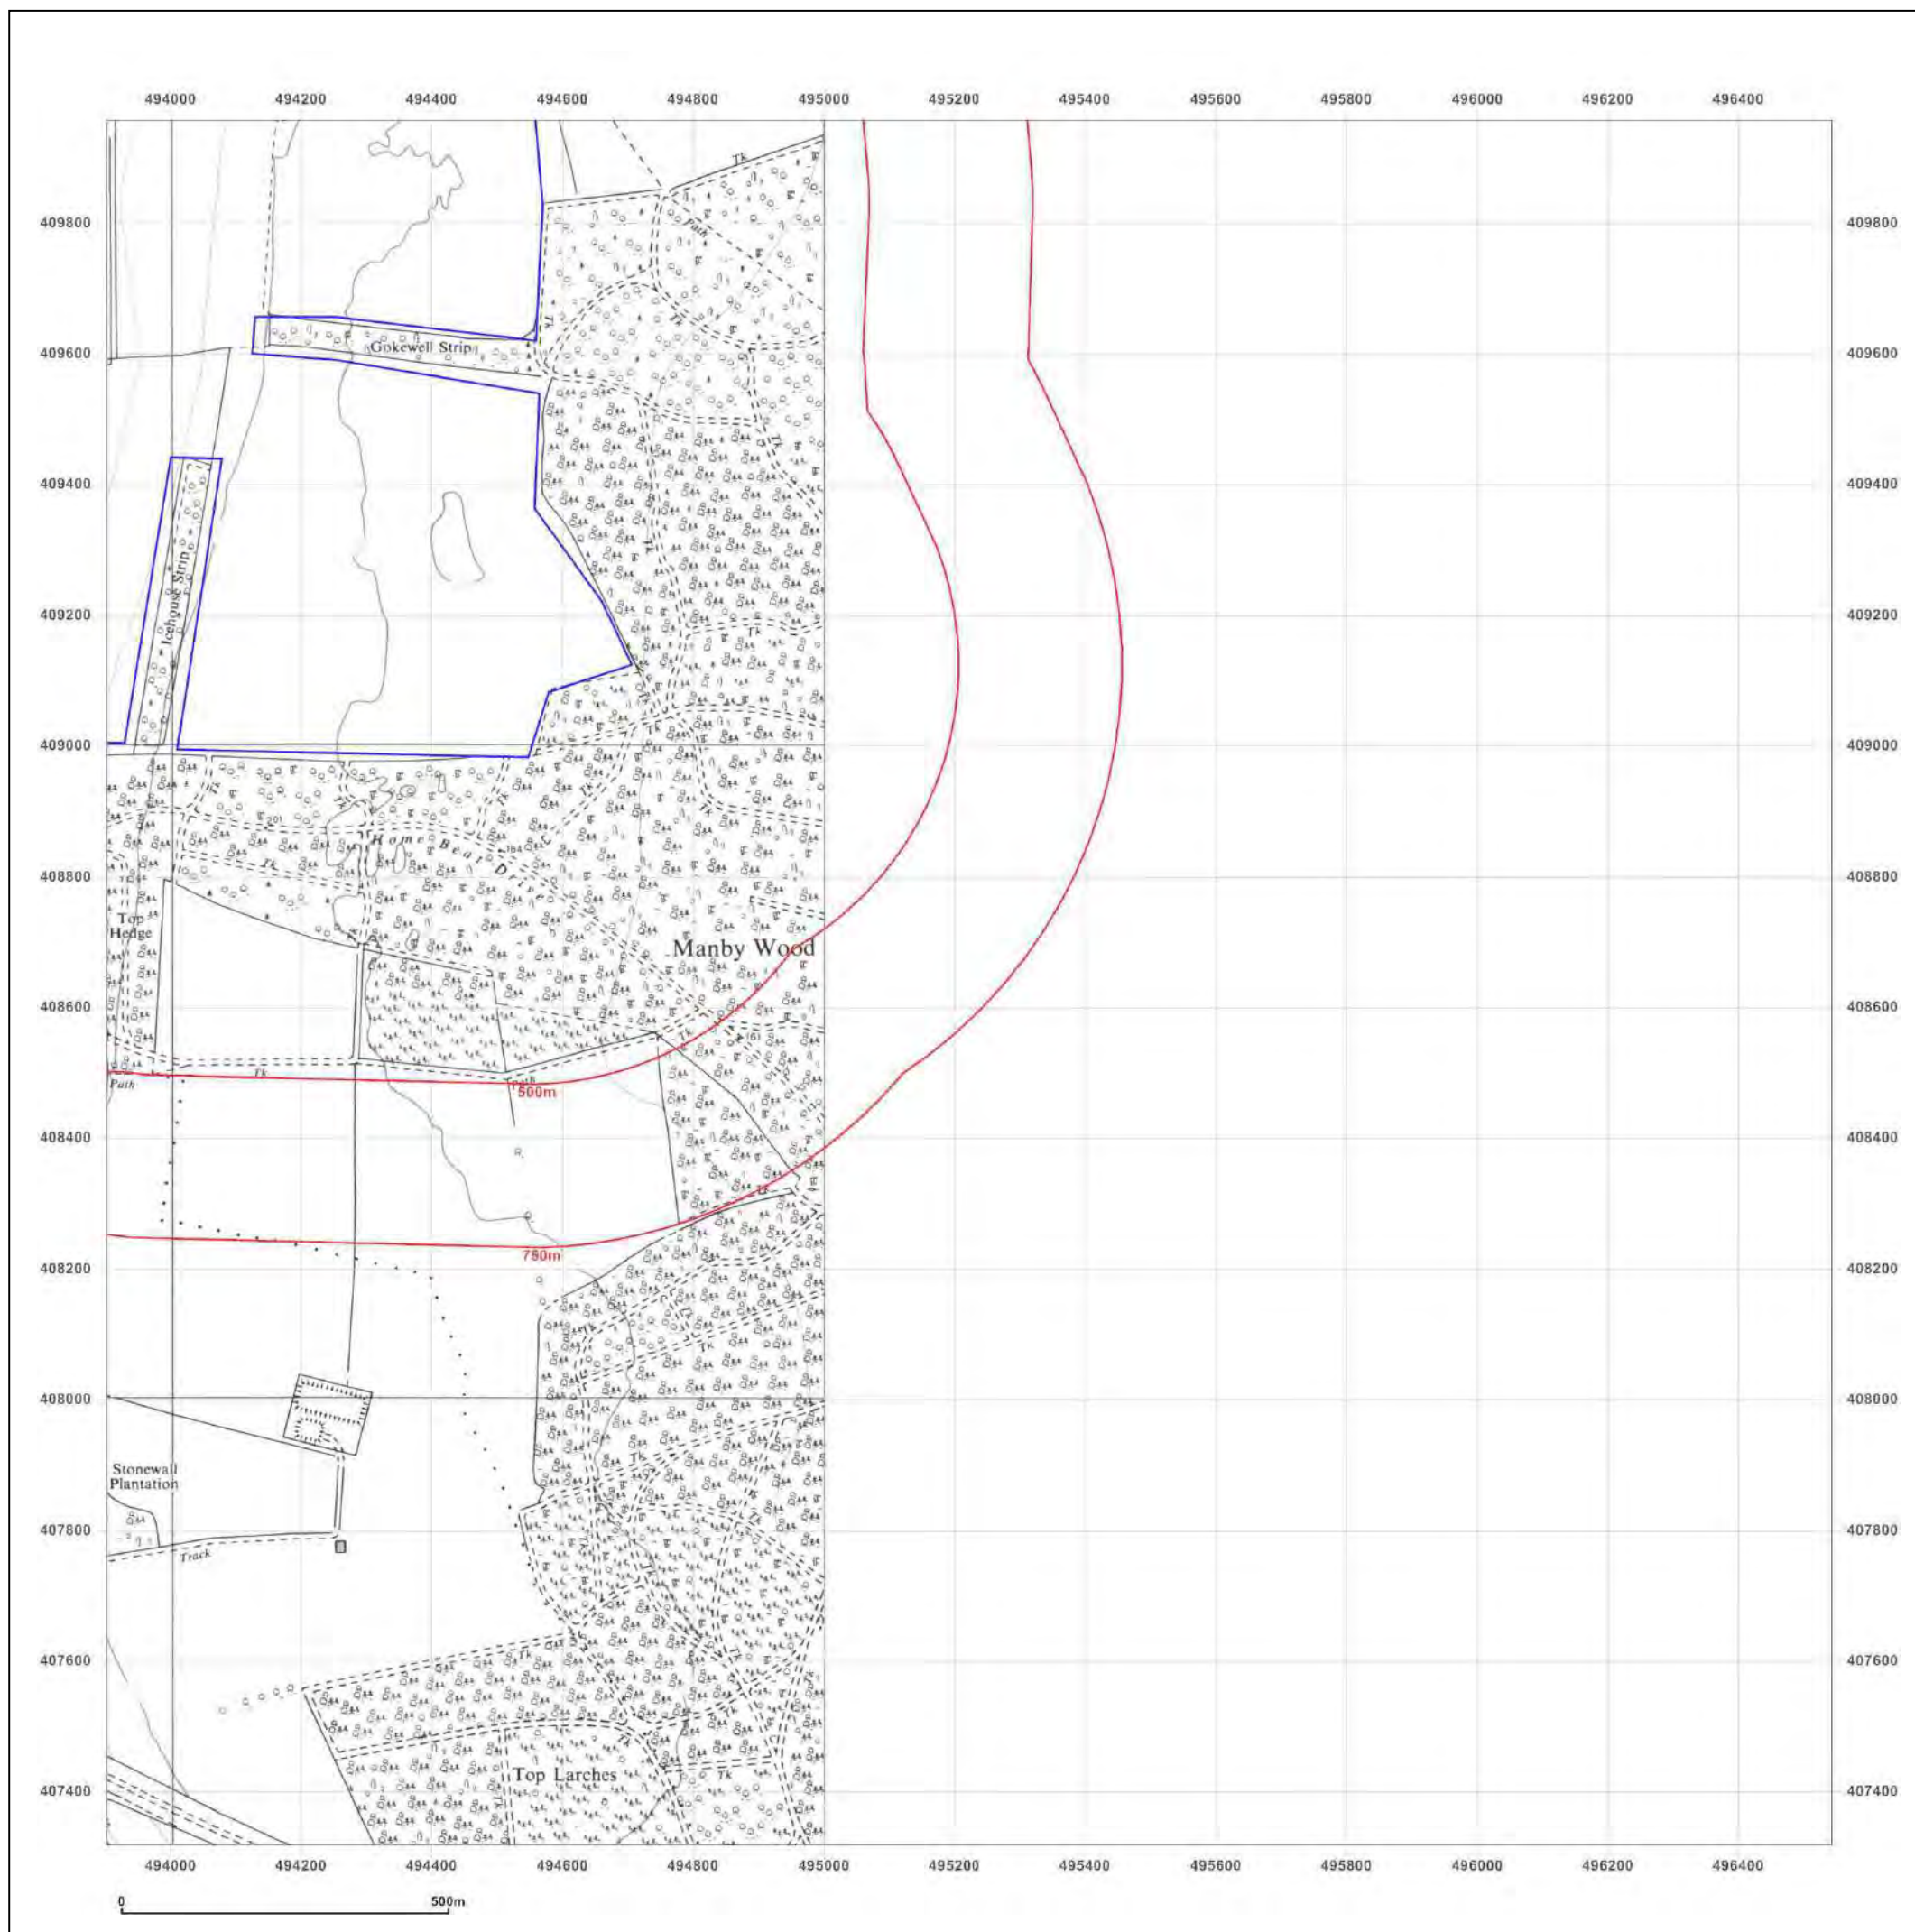

Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: Provisional

Map date: 1968

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1968
 Revised 1968
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

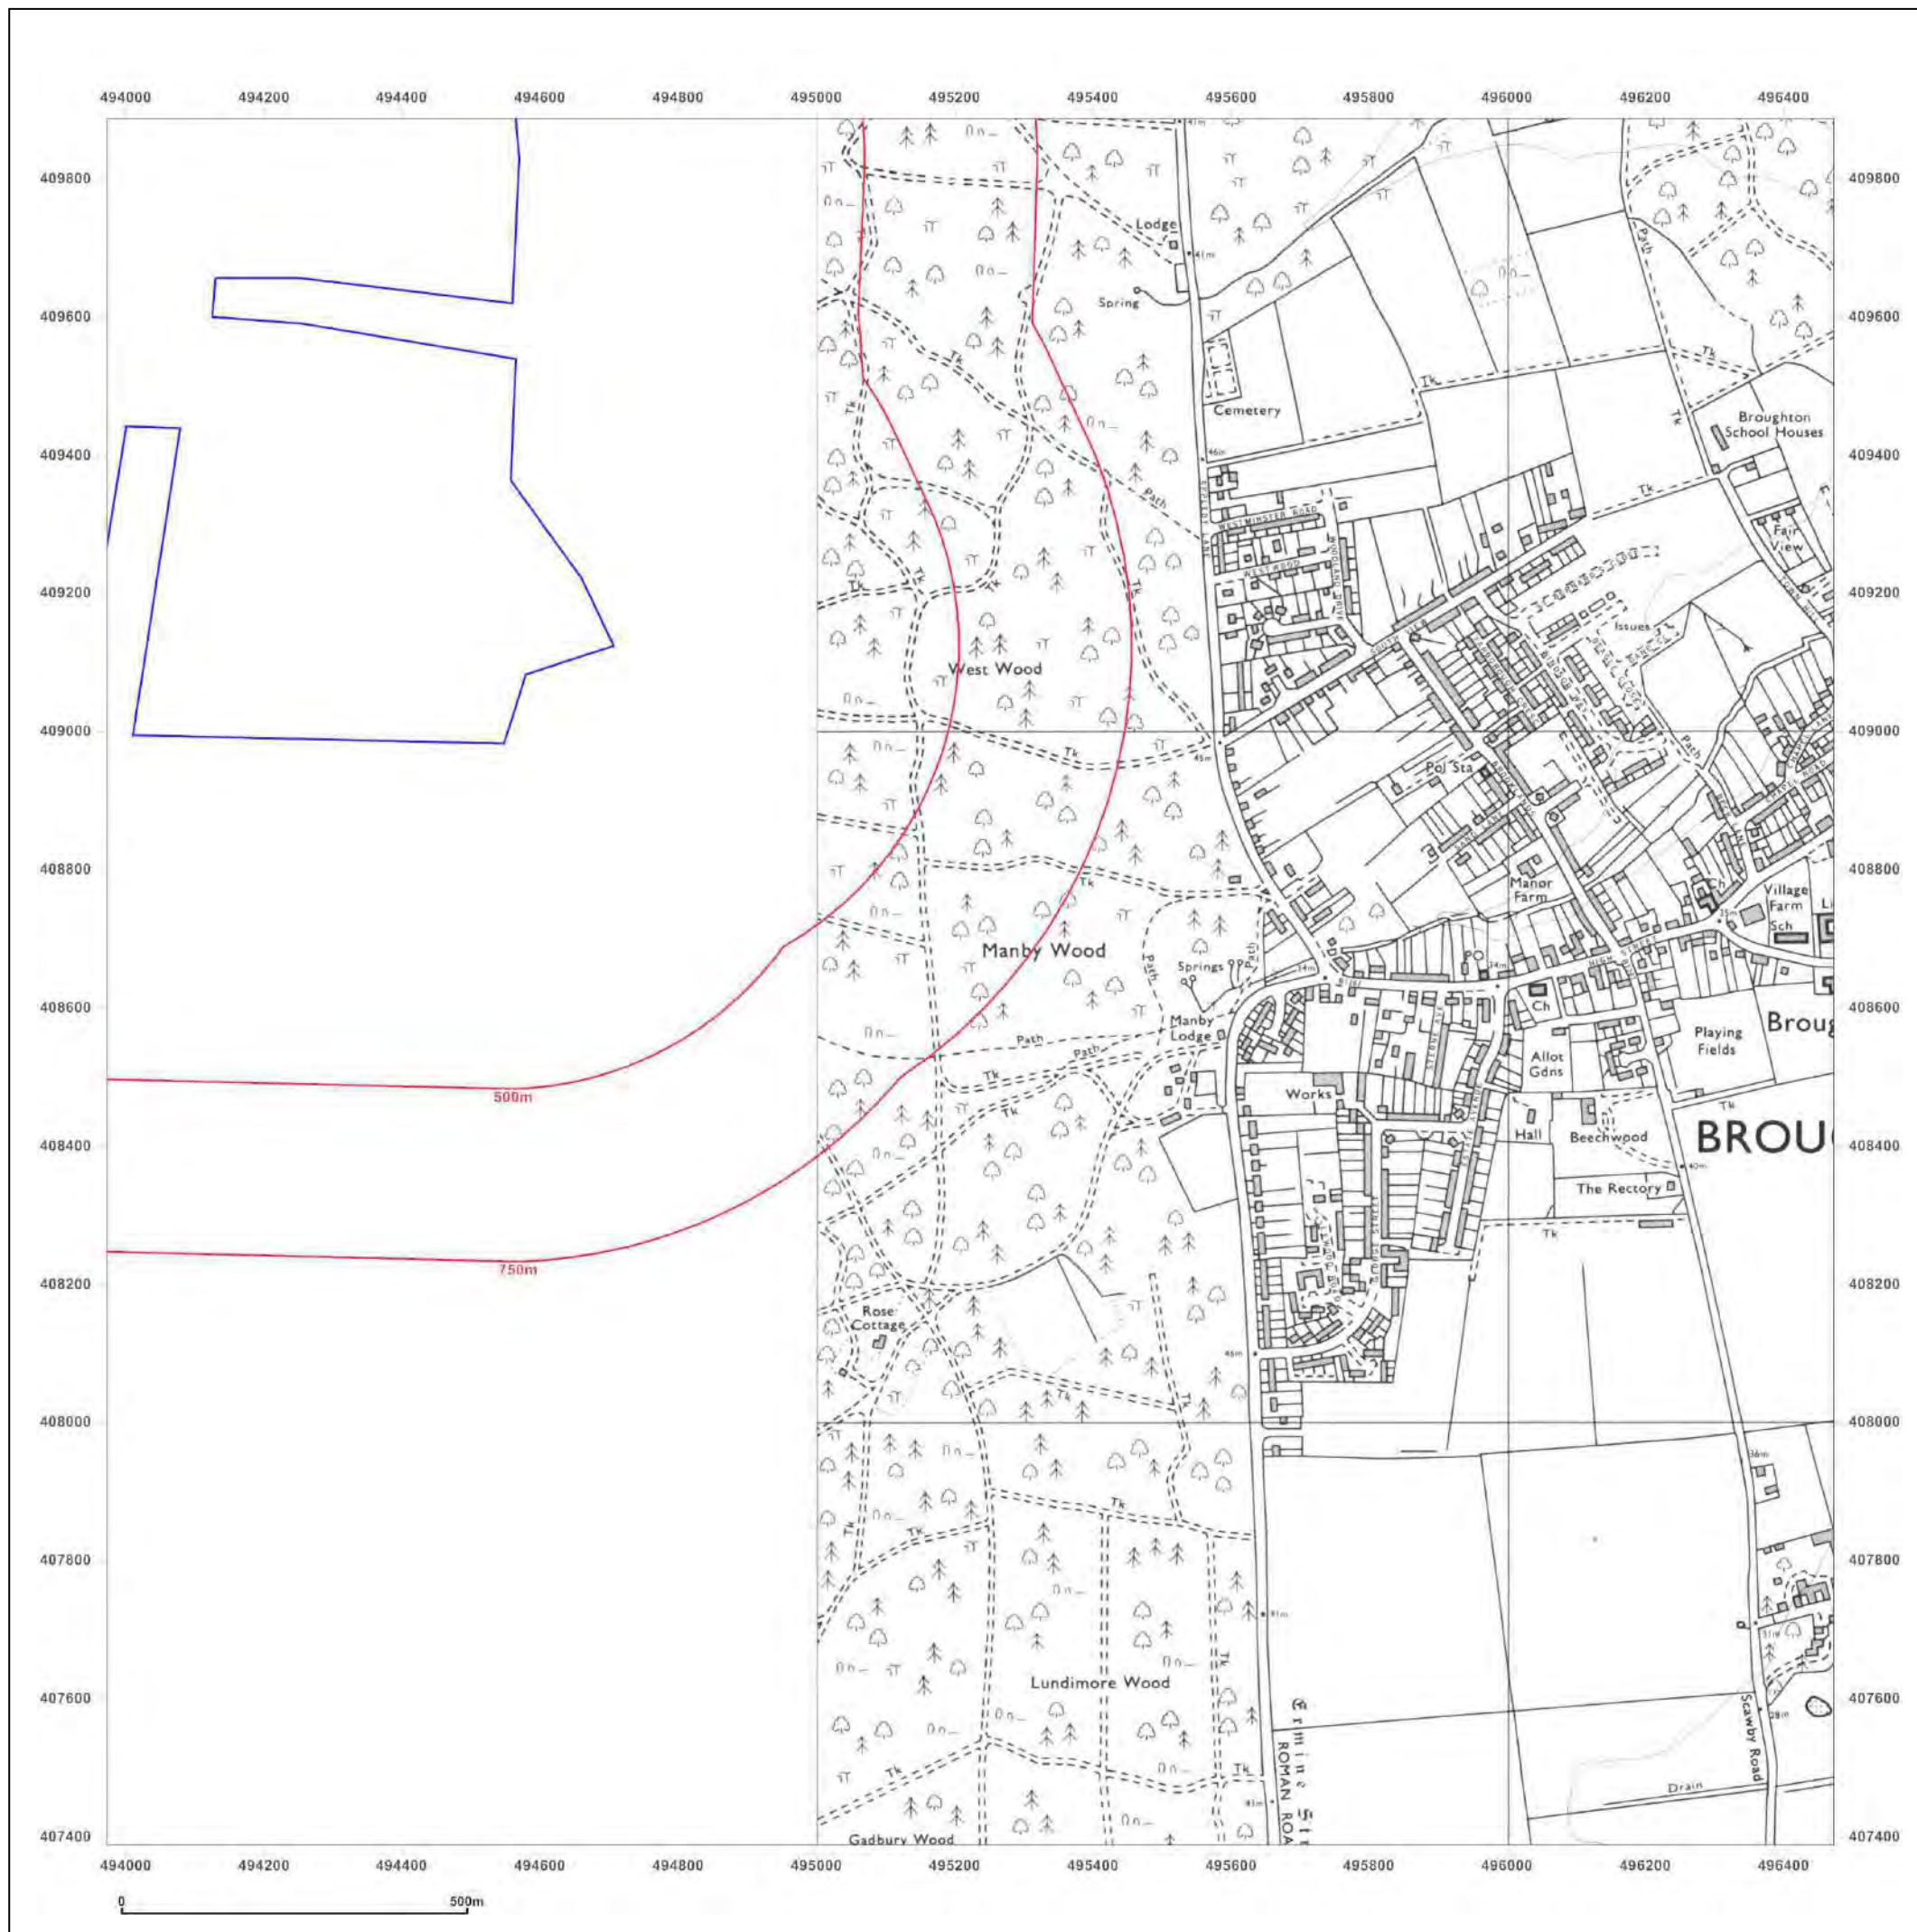

Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: National Grid

Map date: 1971

Scale: 1:10,000

Printed at: 1:10,000

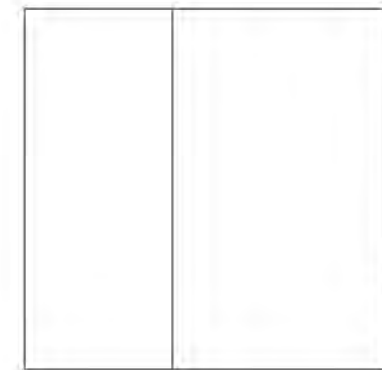

Surveyed 1971
 Revised 1971
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: National Grid

Map date: 1979-1982

Scale: 1:10,000

Printed at: 1:10,000



Surveyed 1978
Revised 1979
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1980
Revised 1982
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

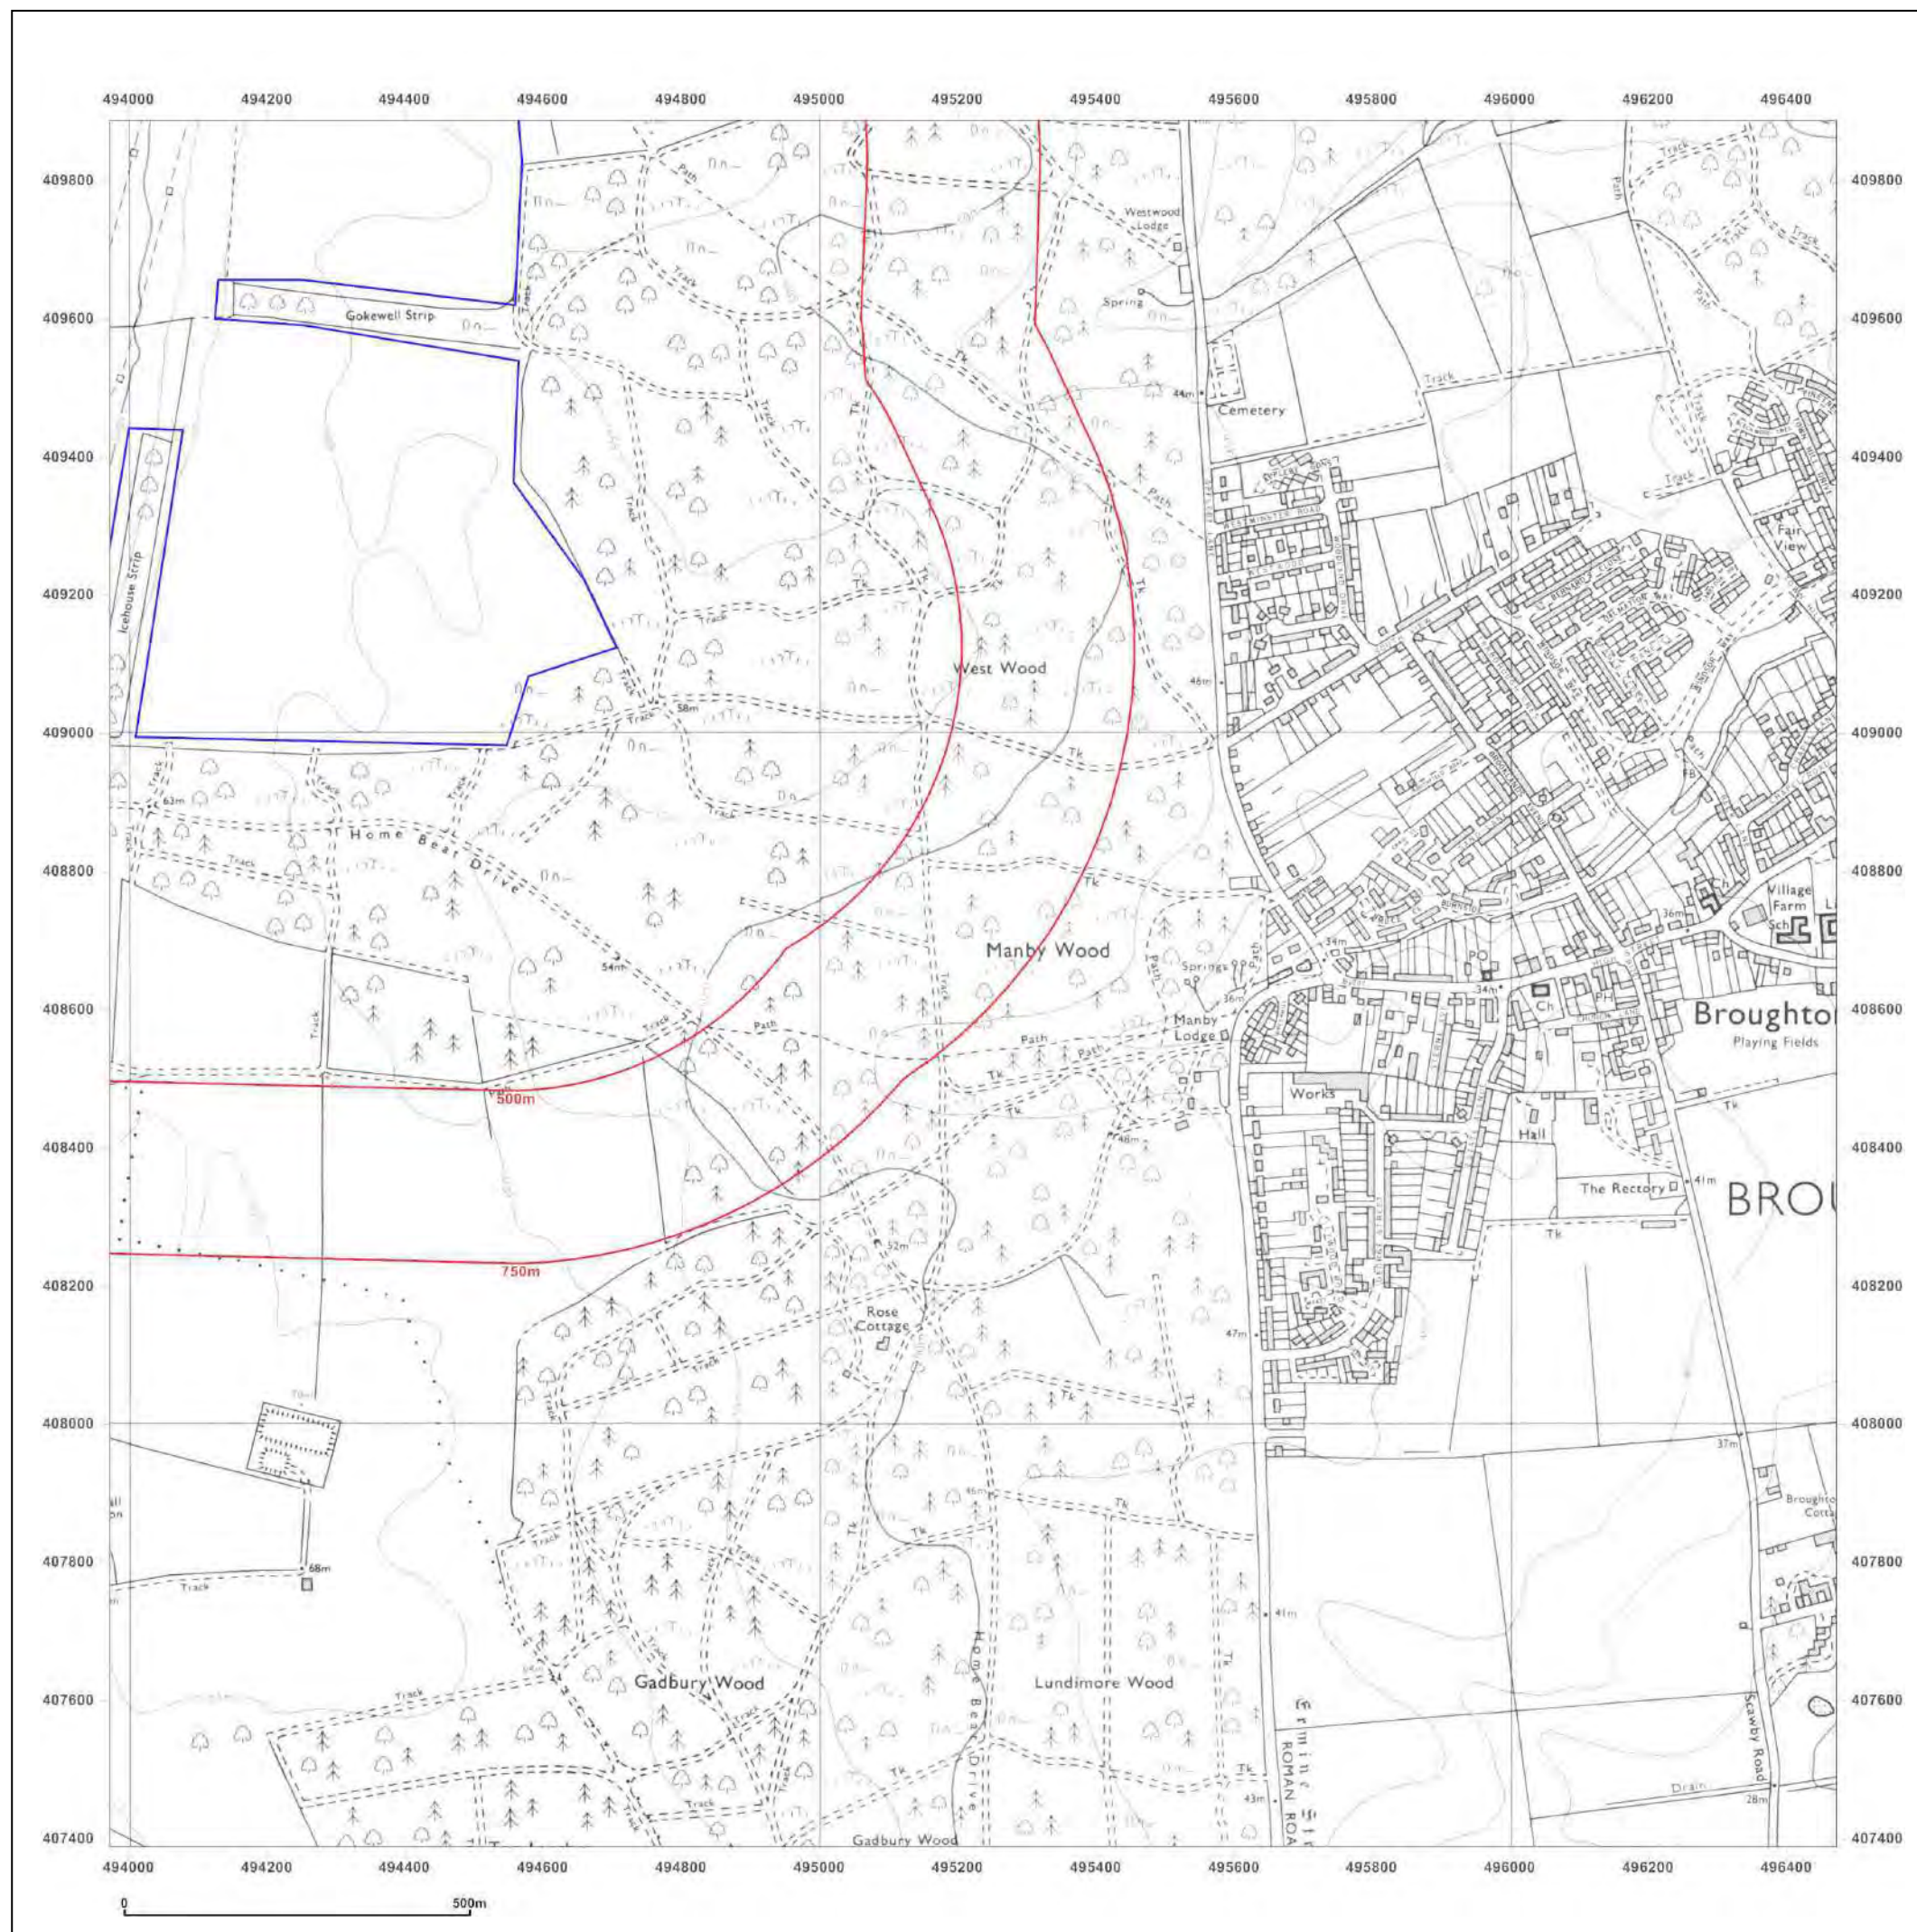



Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: National Grid


Map date: 1994

Scale: 1:10,000

Printed at: 1:10,000

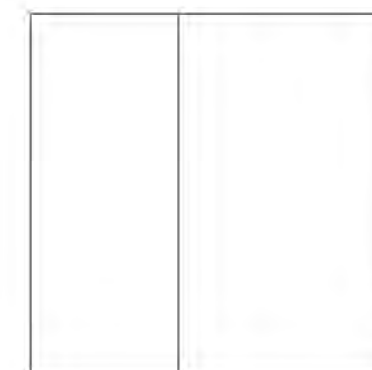

Surveyed 1980
Revised 1994
Edition N/A
Copyright N/A
Levelled N/A

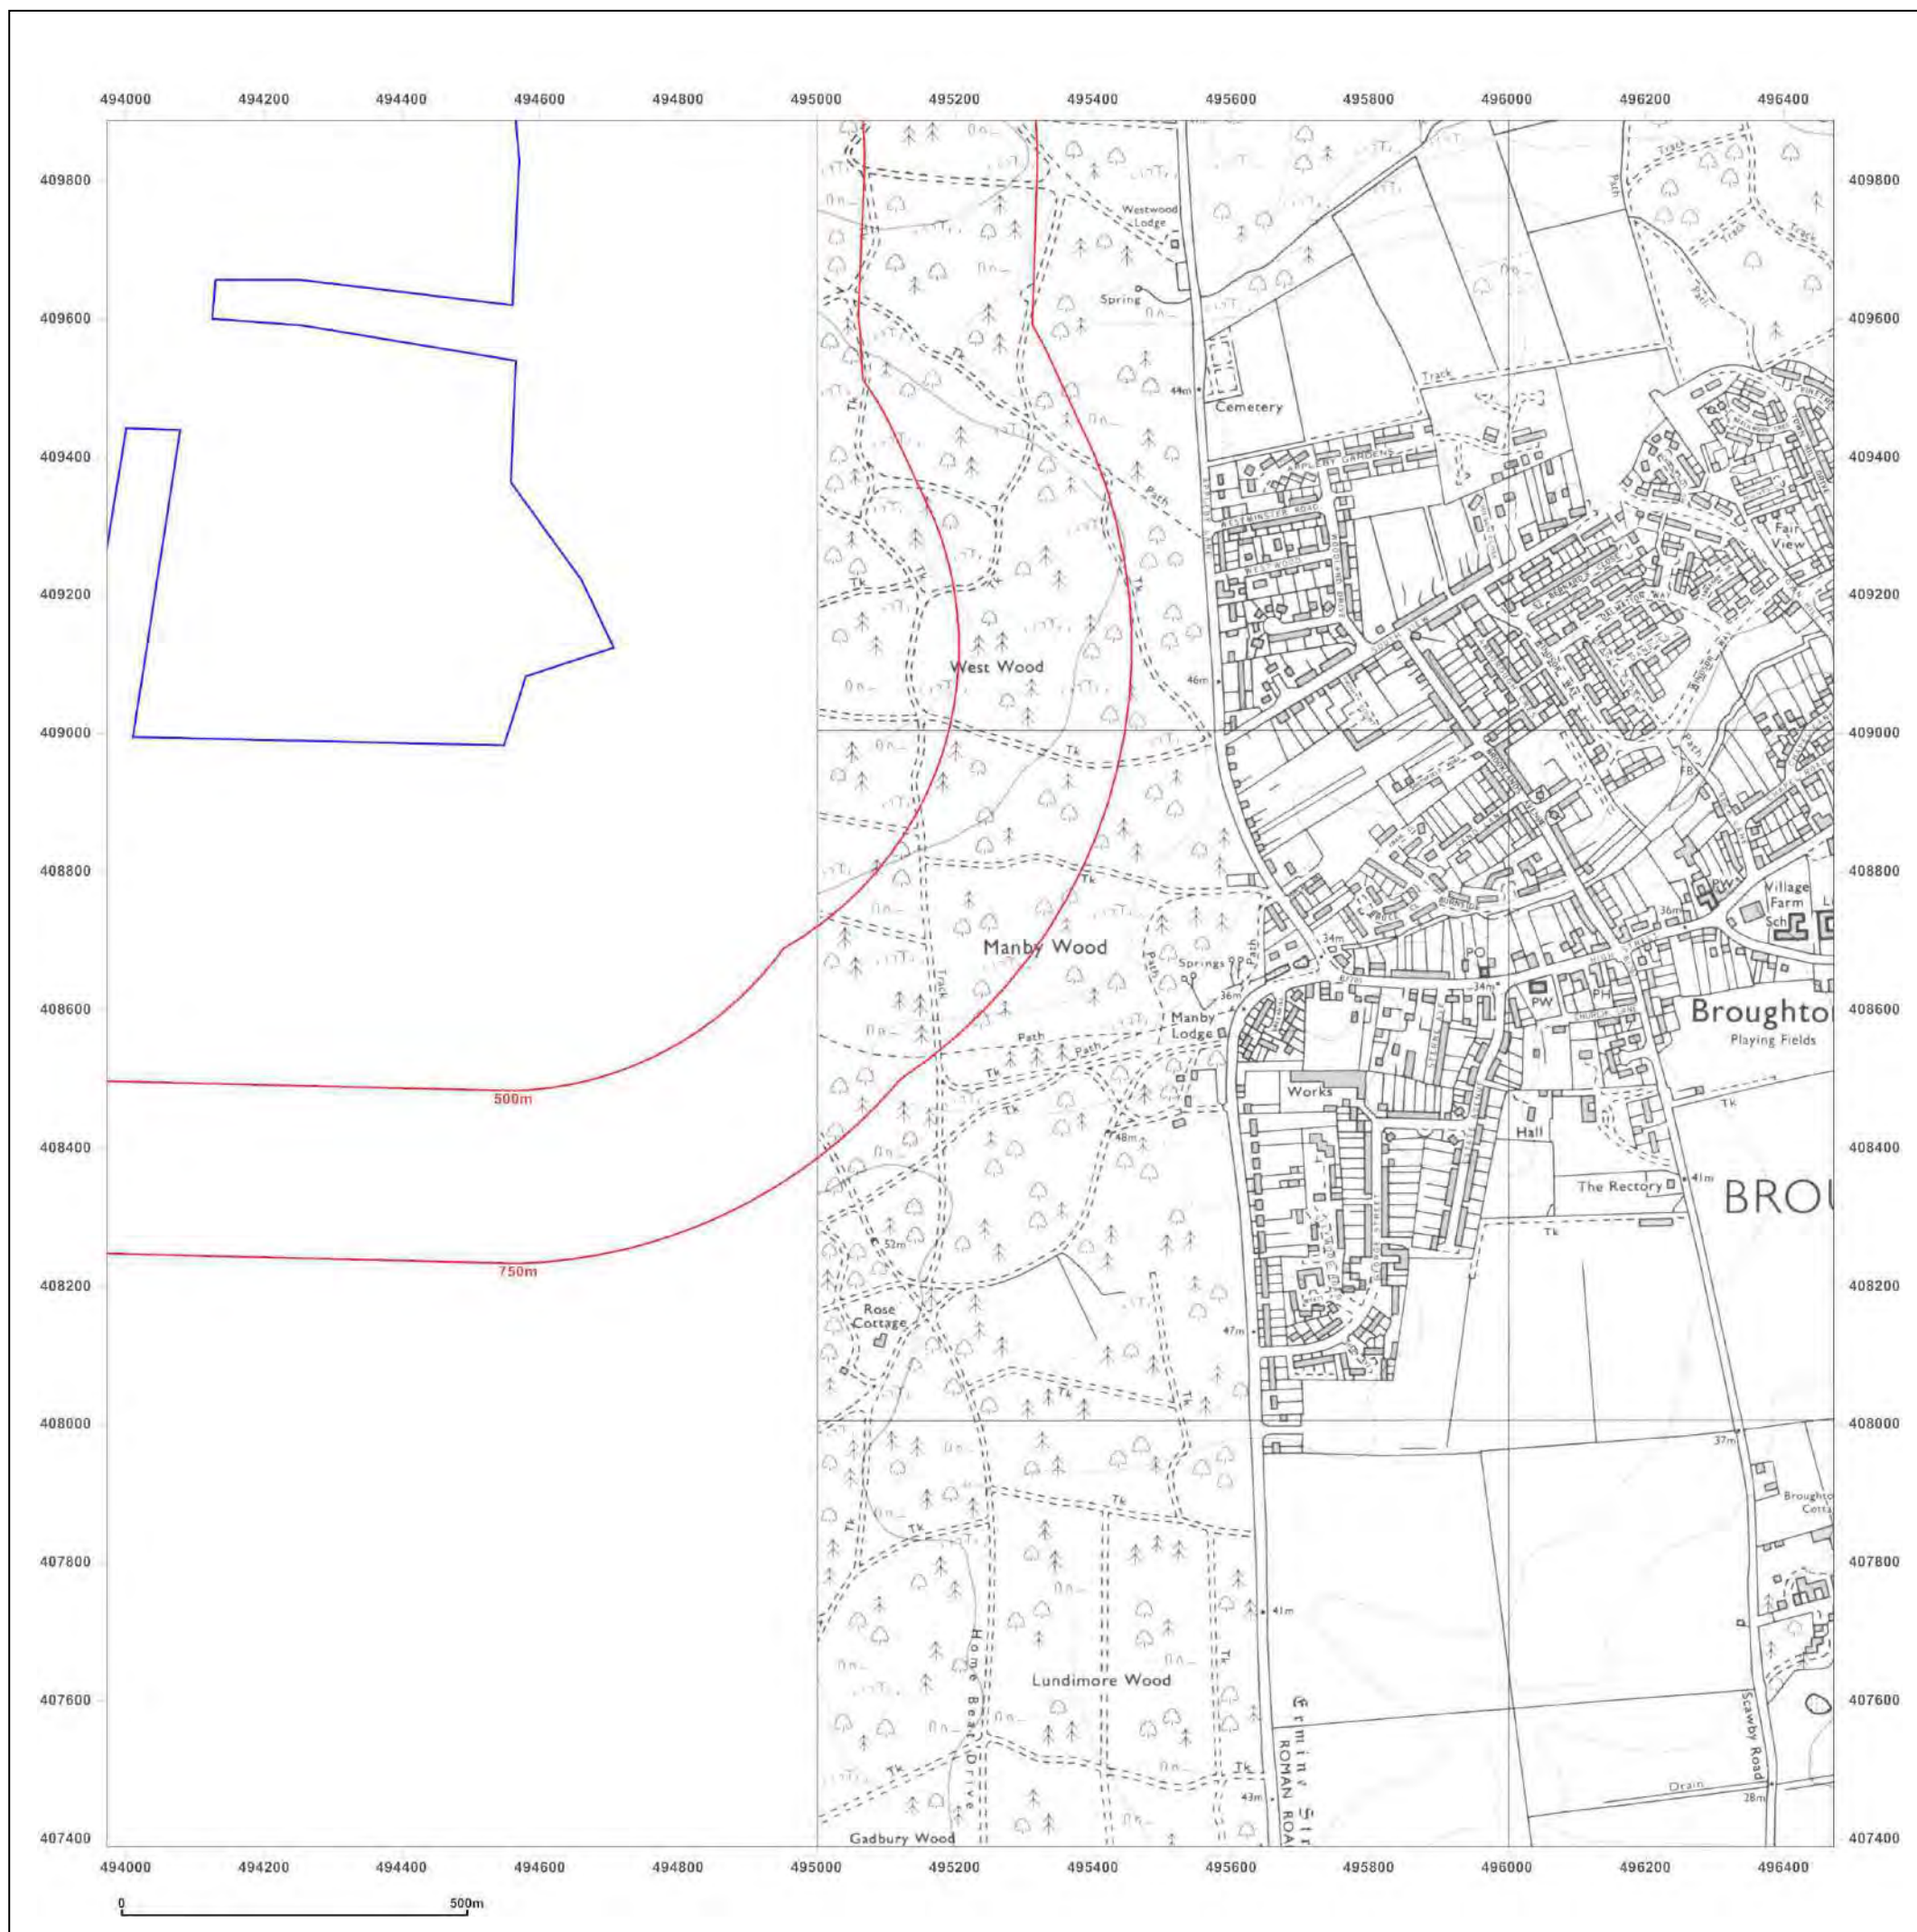

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: 1:10,000 Raster

Map date: 2002

Scale: 1:10,000

Printed at: 1:10,000

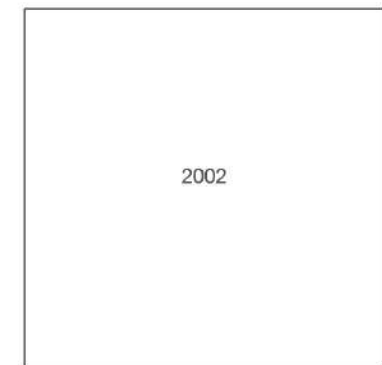

Produced by
Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: National Grid

Map date: 2010

Scale: 1:10,000

Printed at: 1:10,000

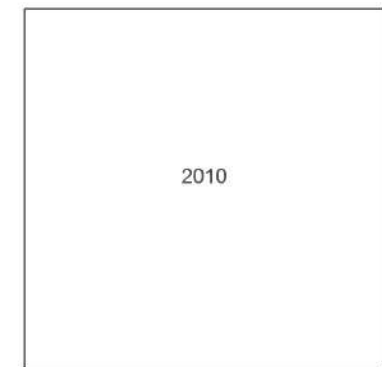

Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017



To view map legend click here [Legend](#)

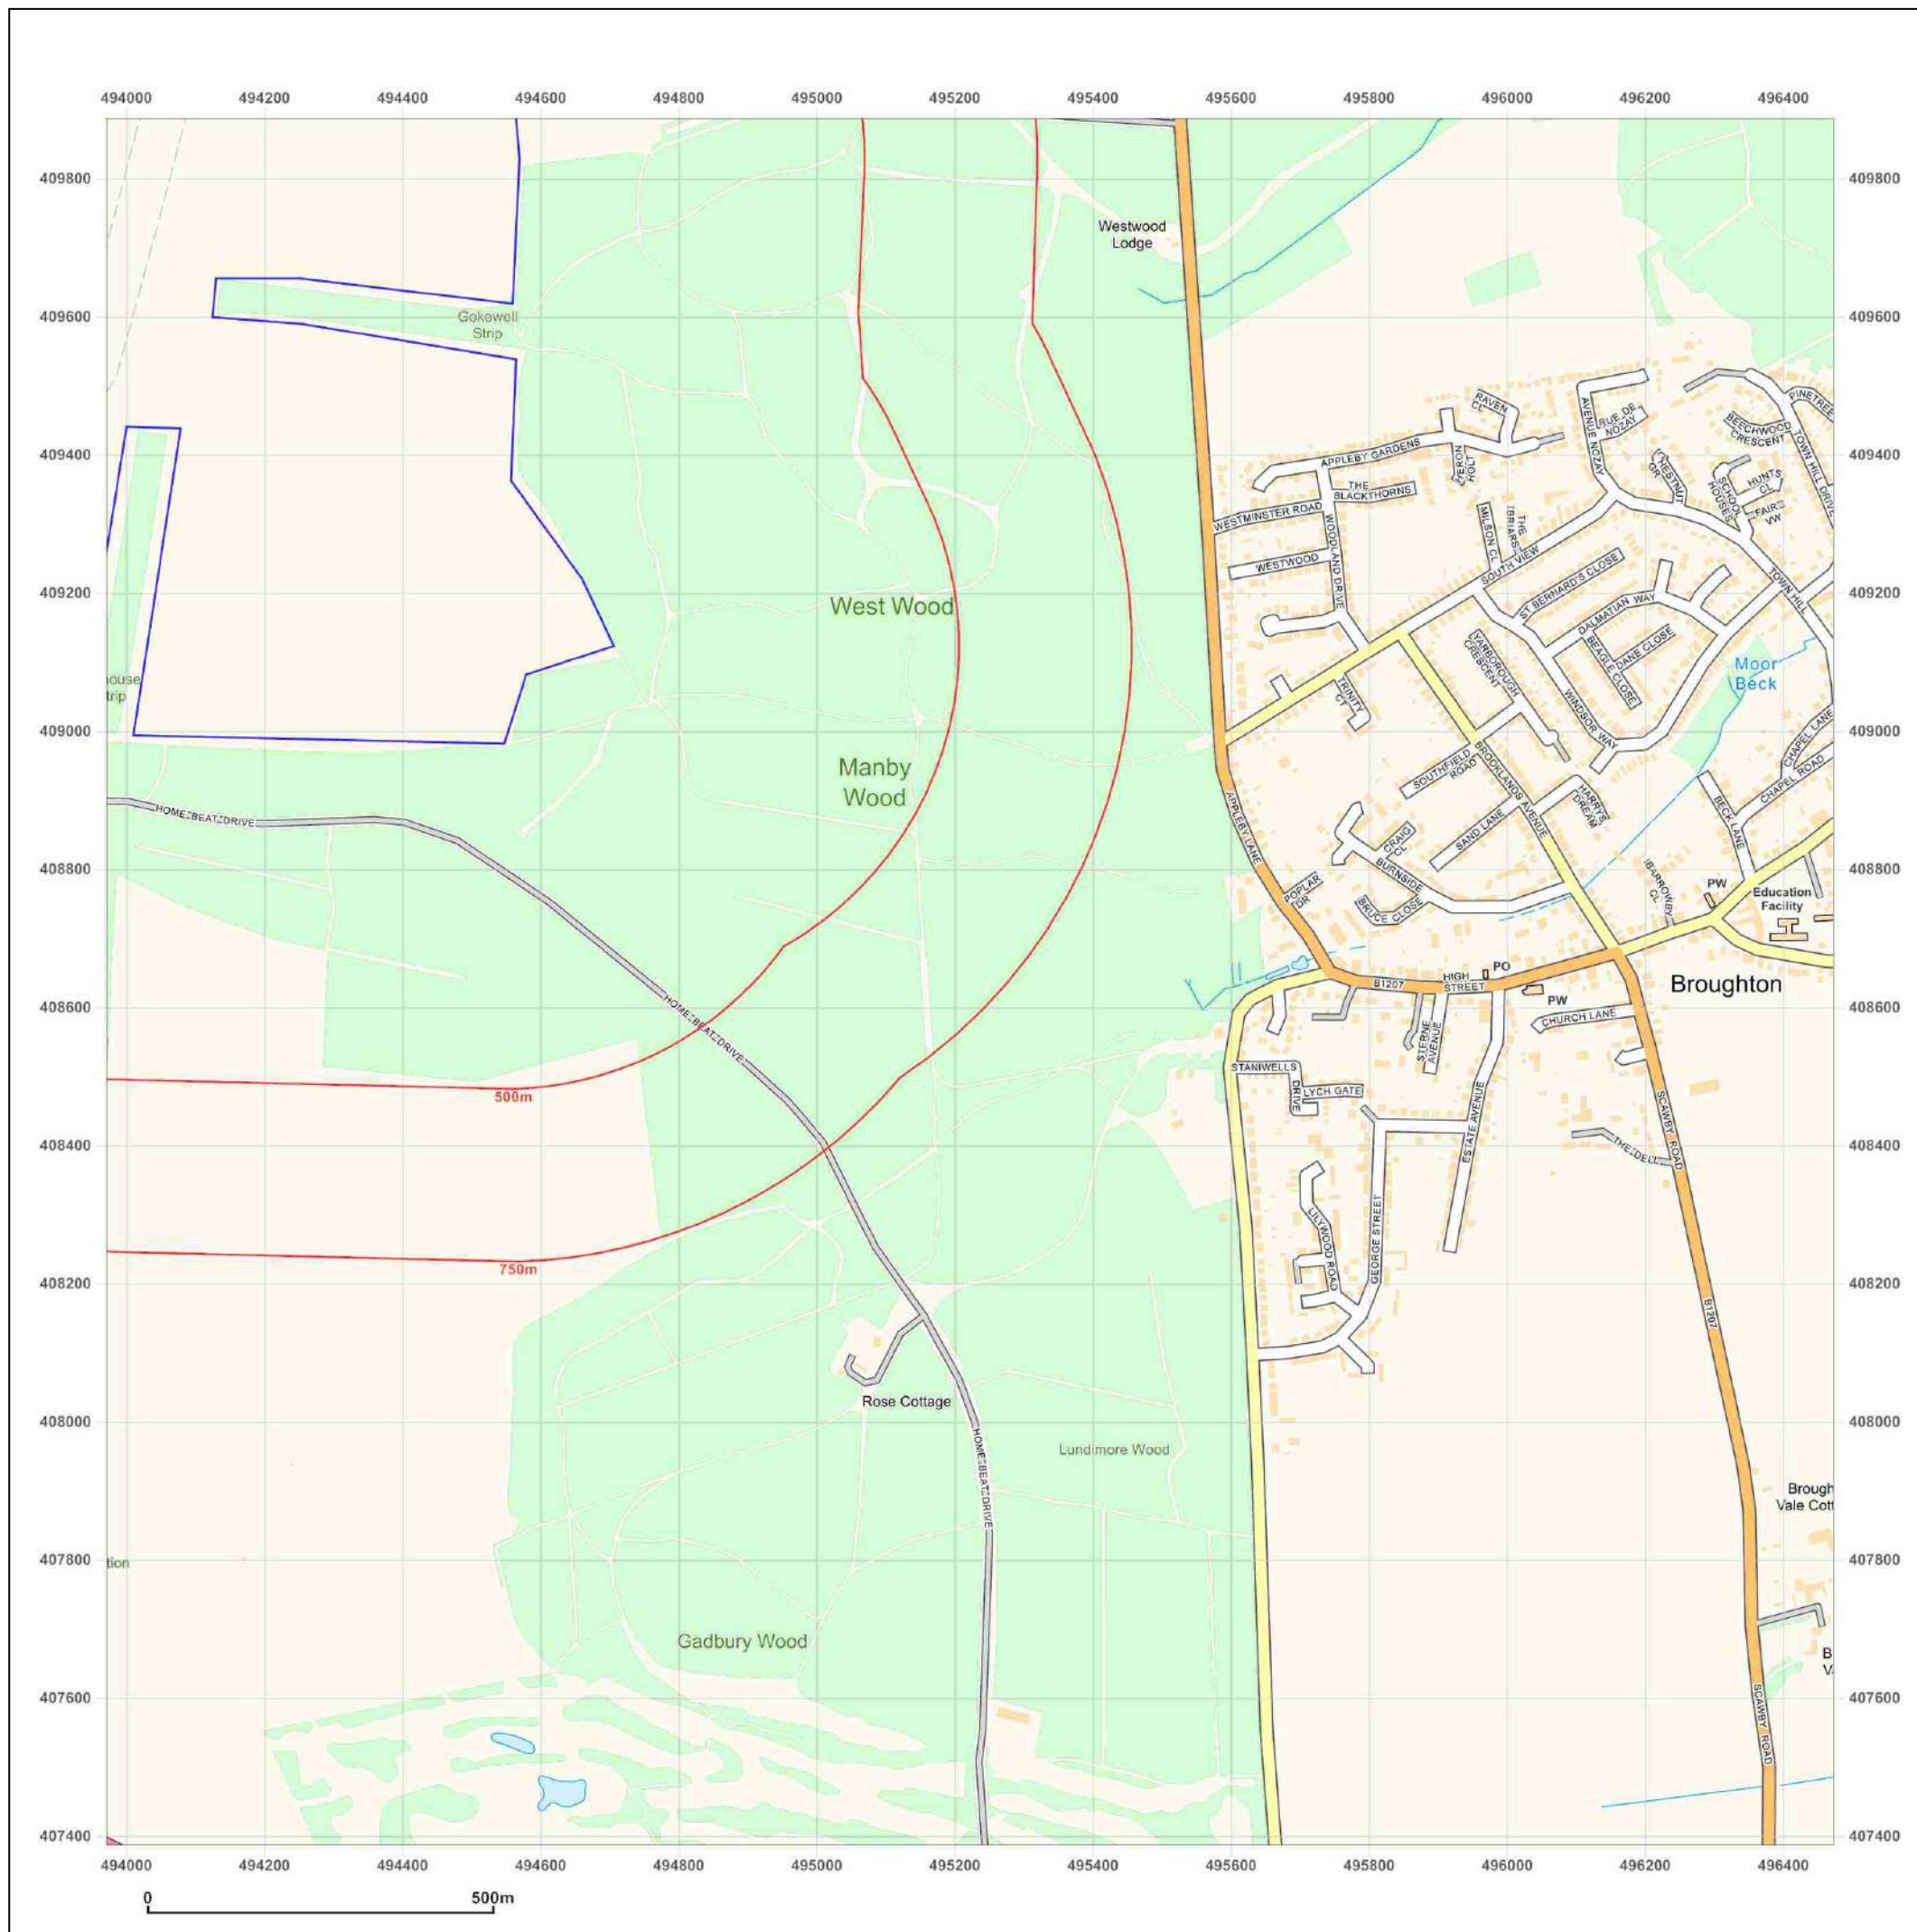

Site Details:
 Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_1
Grid Ref: 495222, 408637

Map Name: National Grid
Map date: 2014
Scale: 1:10,000
Printed at: 1:10,000

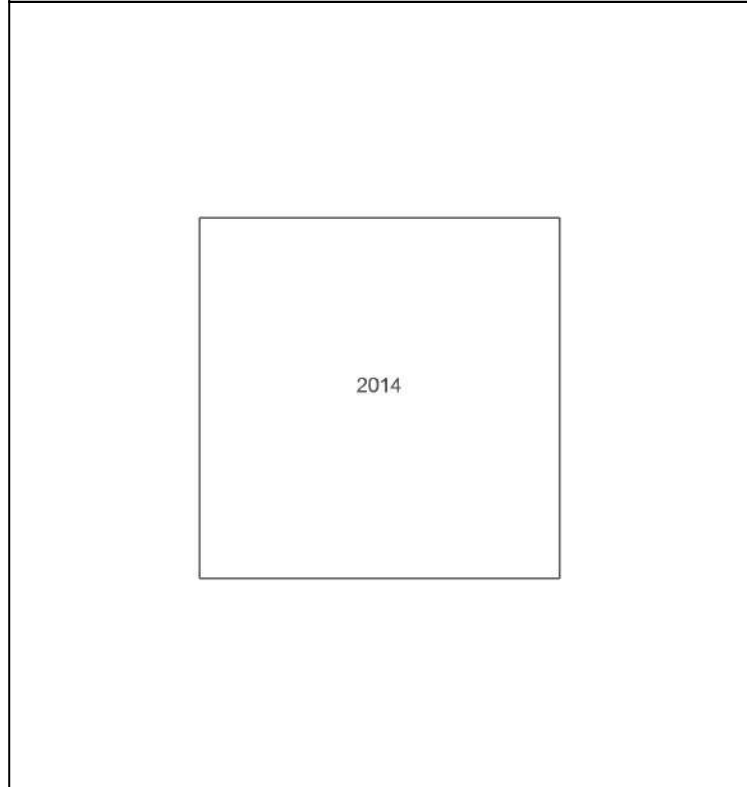

Groundsure INSIGHTS
 Produced by Groundsure Insights
www.groundsure.com

Powered by

 Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: County Series

Map date: 1886

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1886
Revised N/A
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

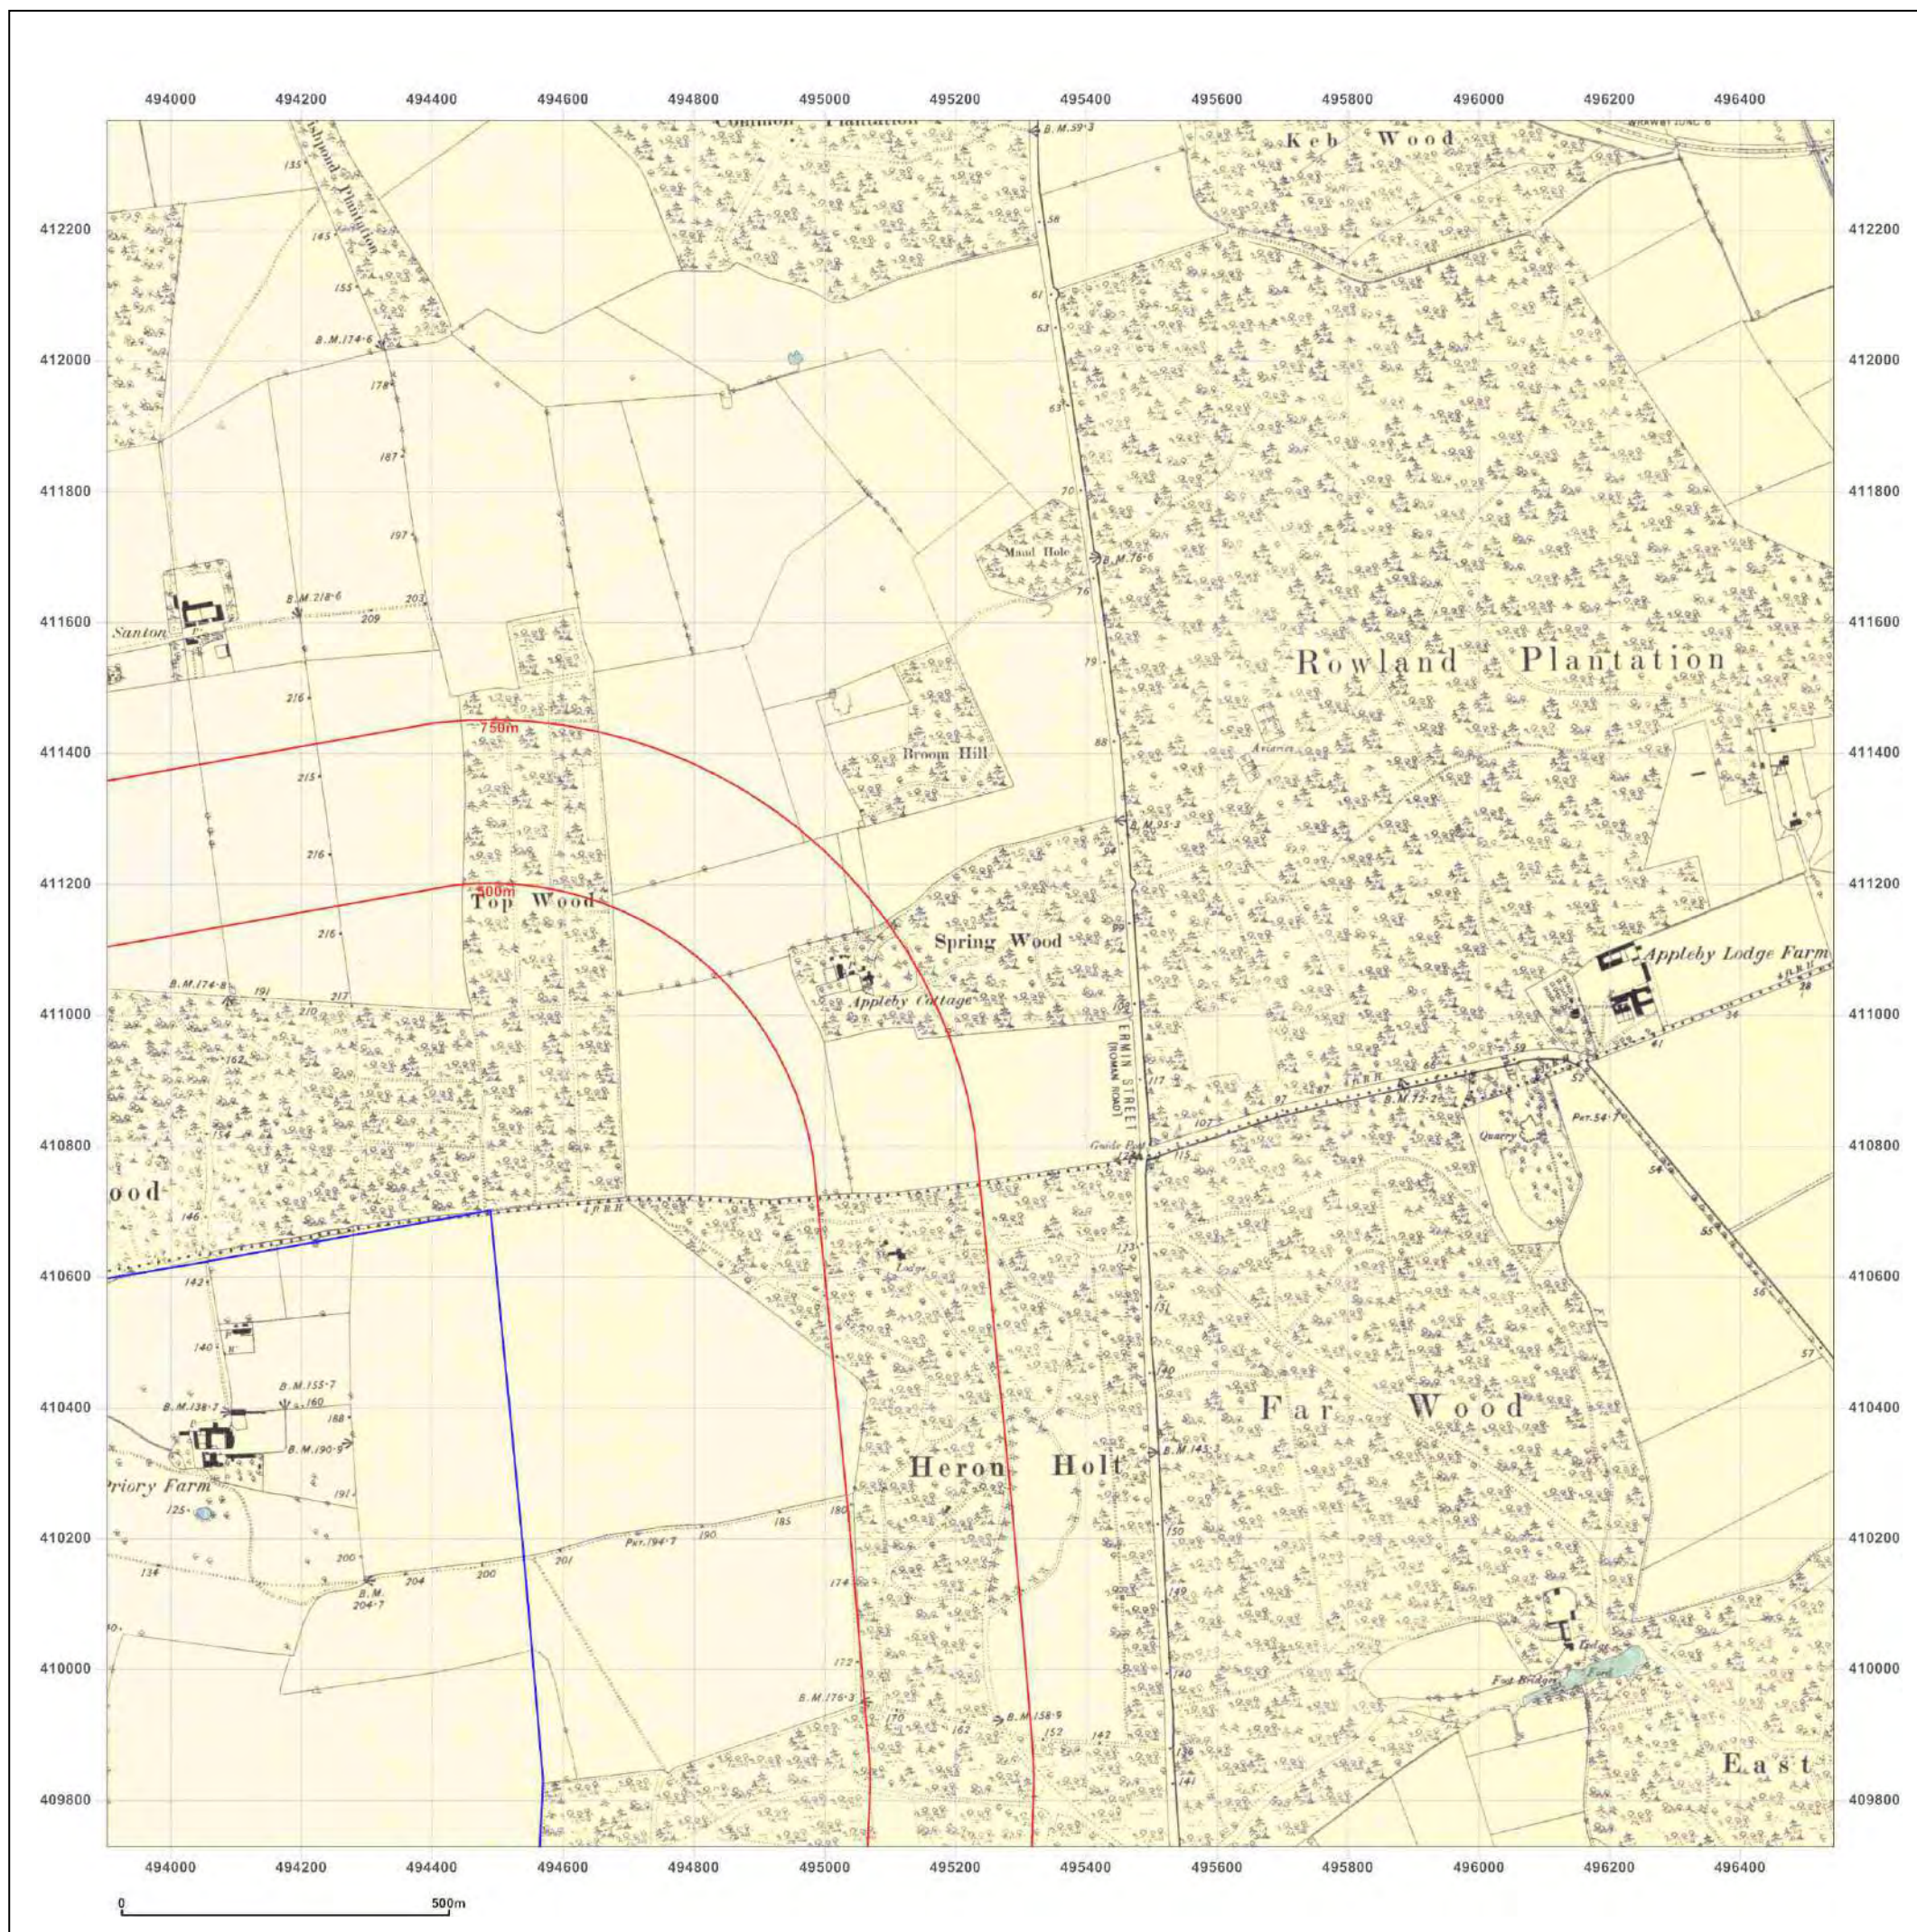



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: County Series

Map date: 1886

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1886
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

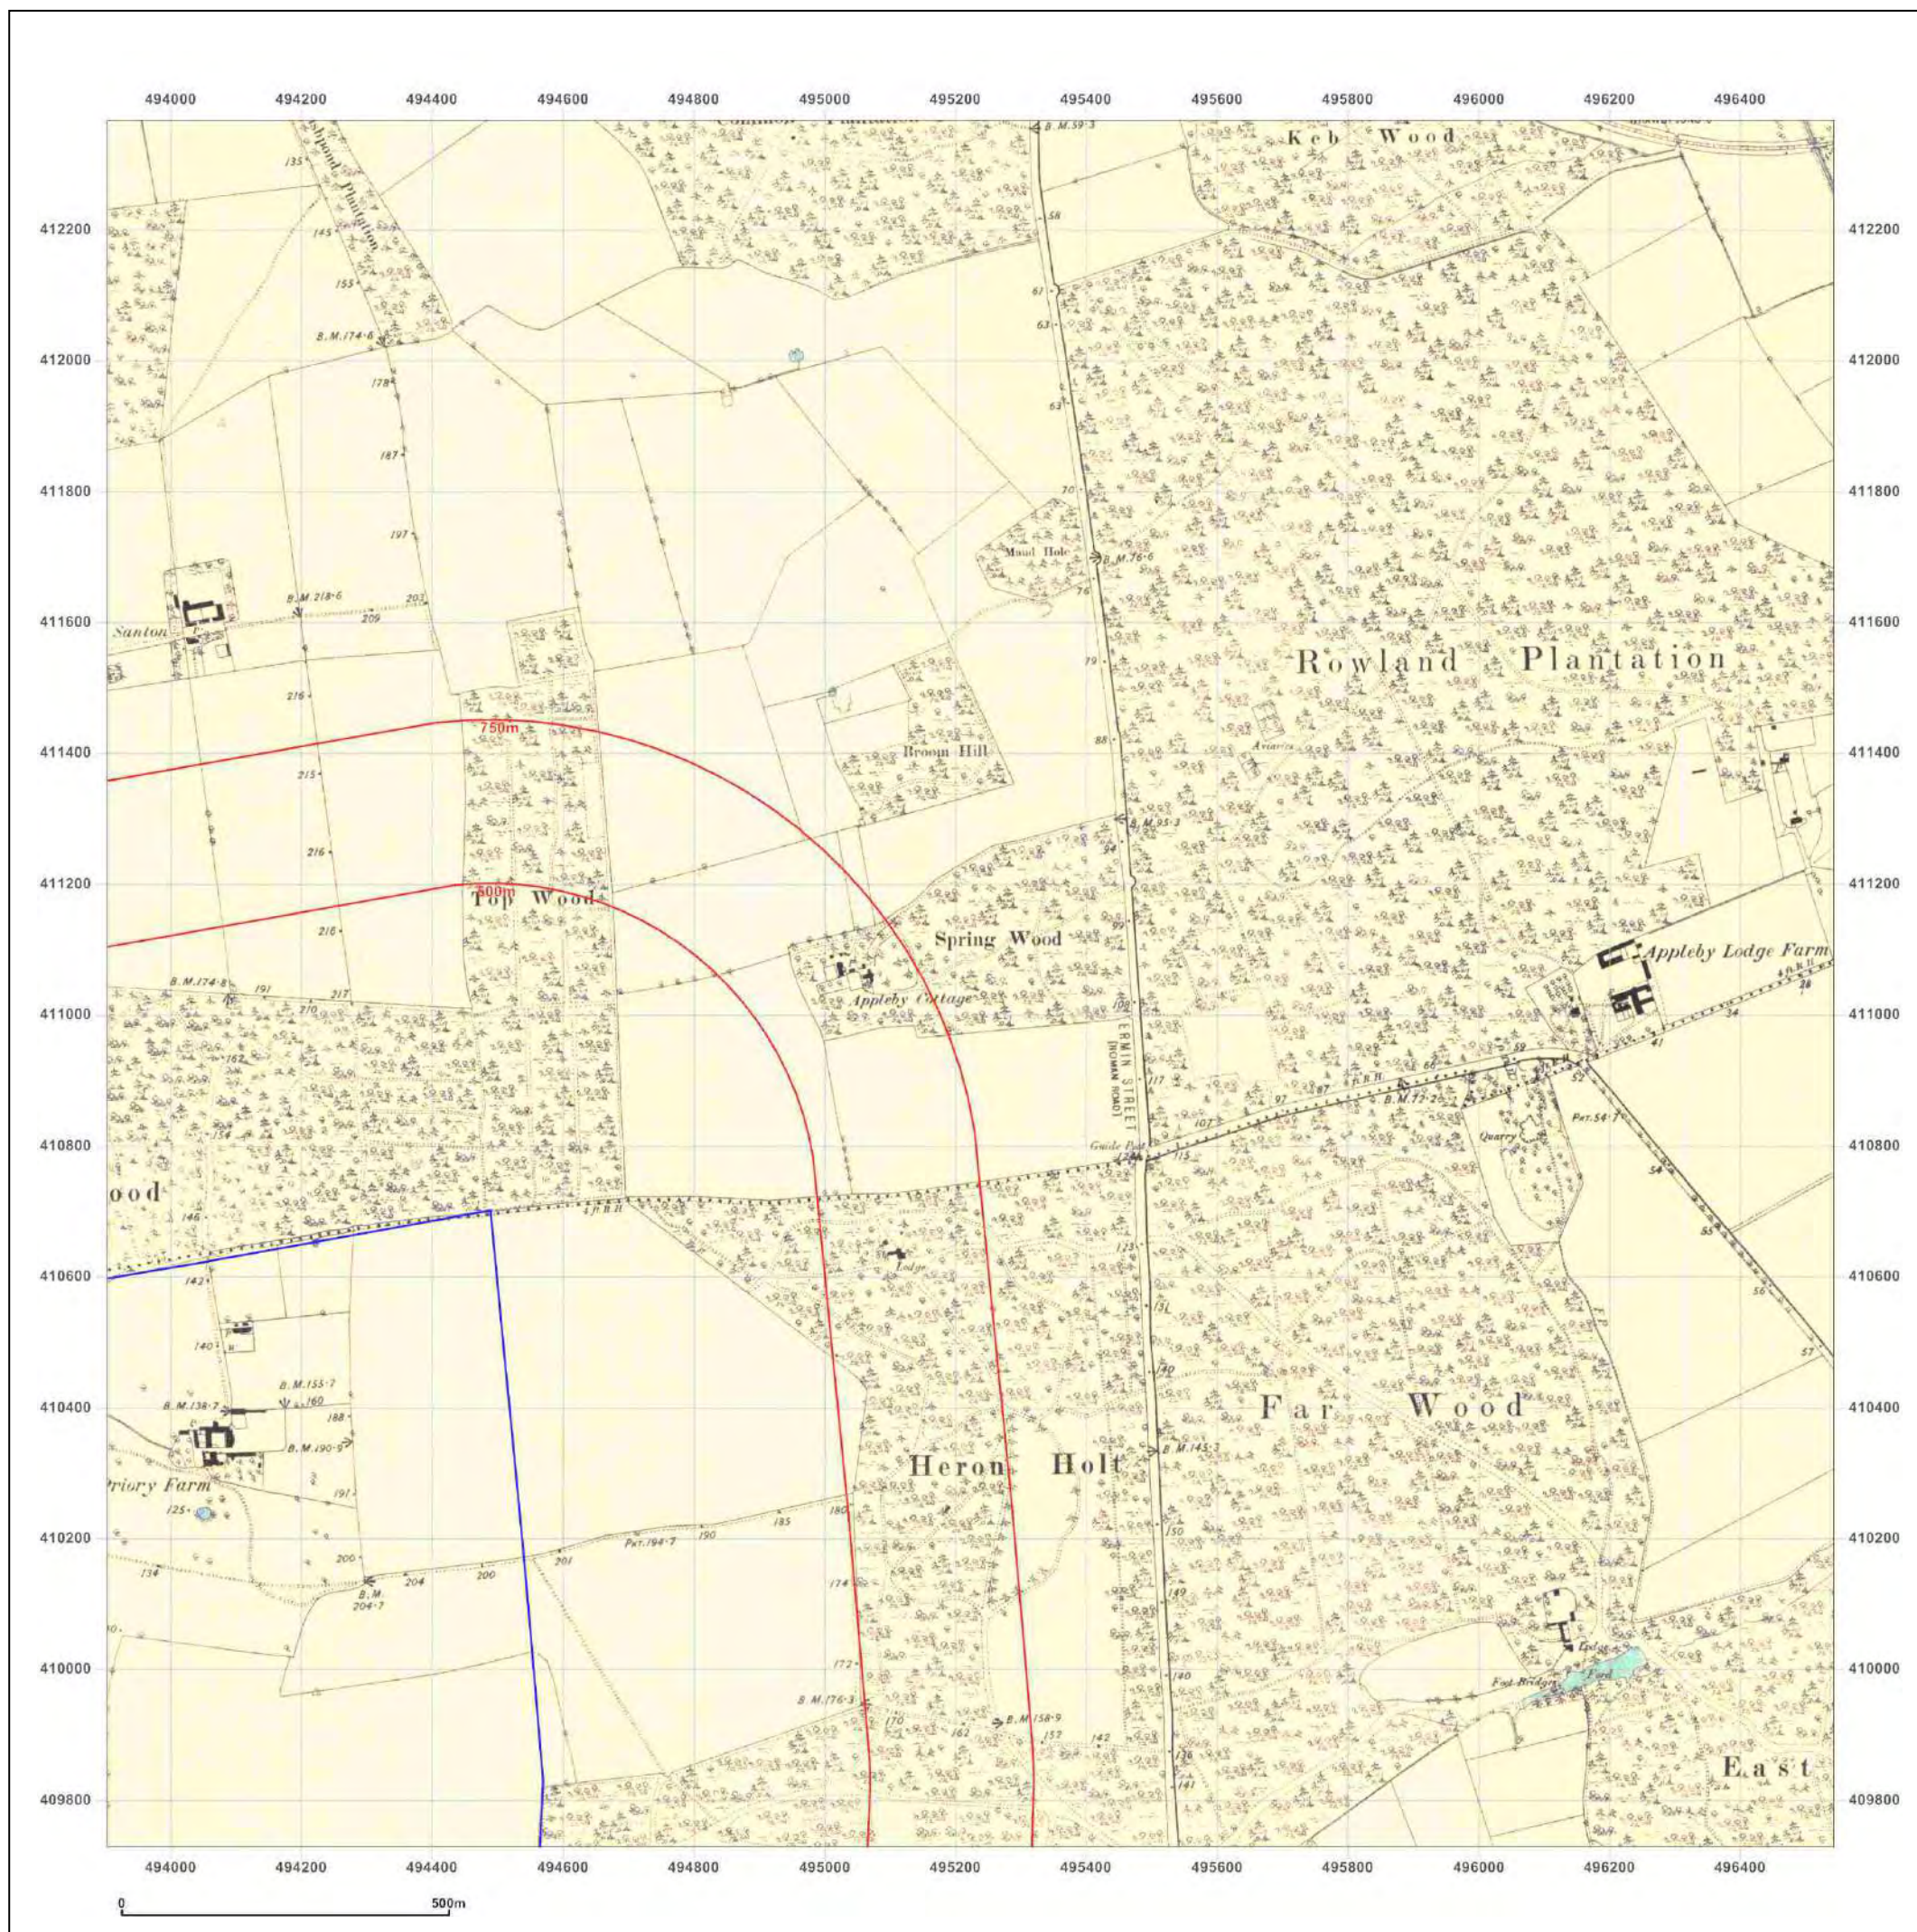



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: County Series

Map date: 1906

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1906
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

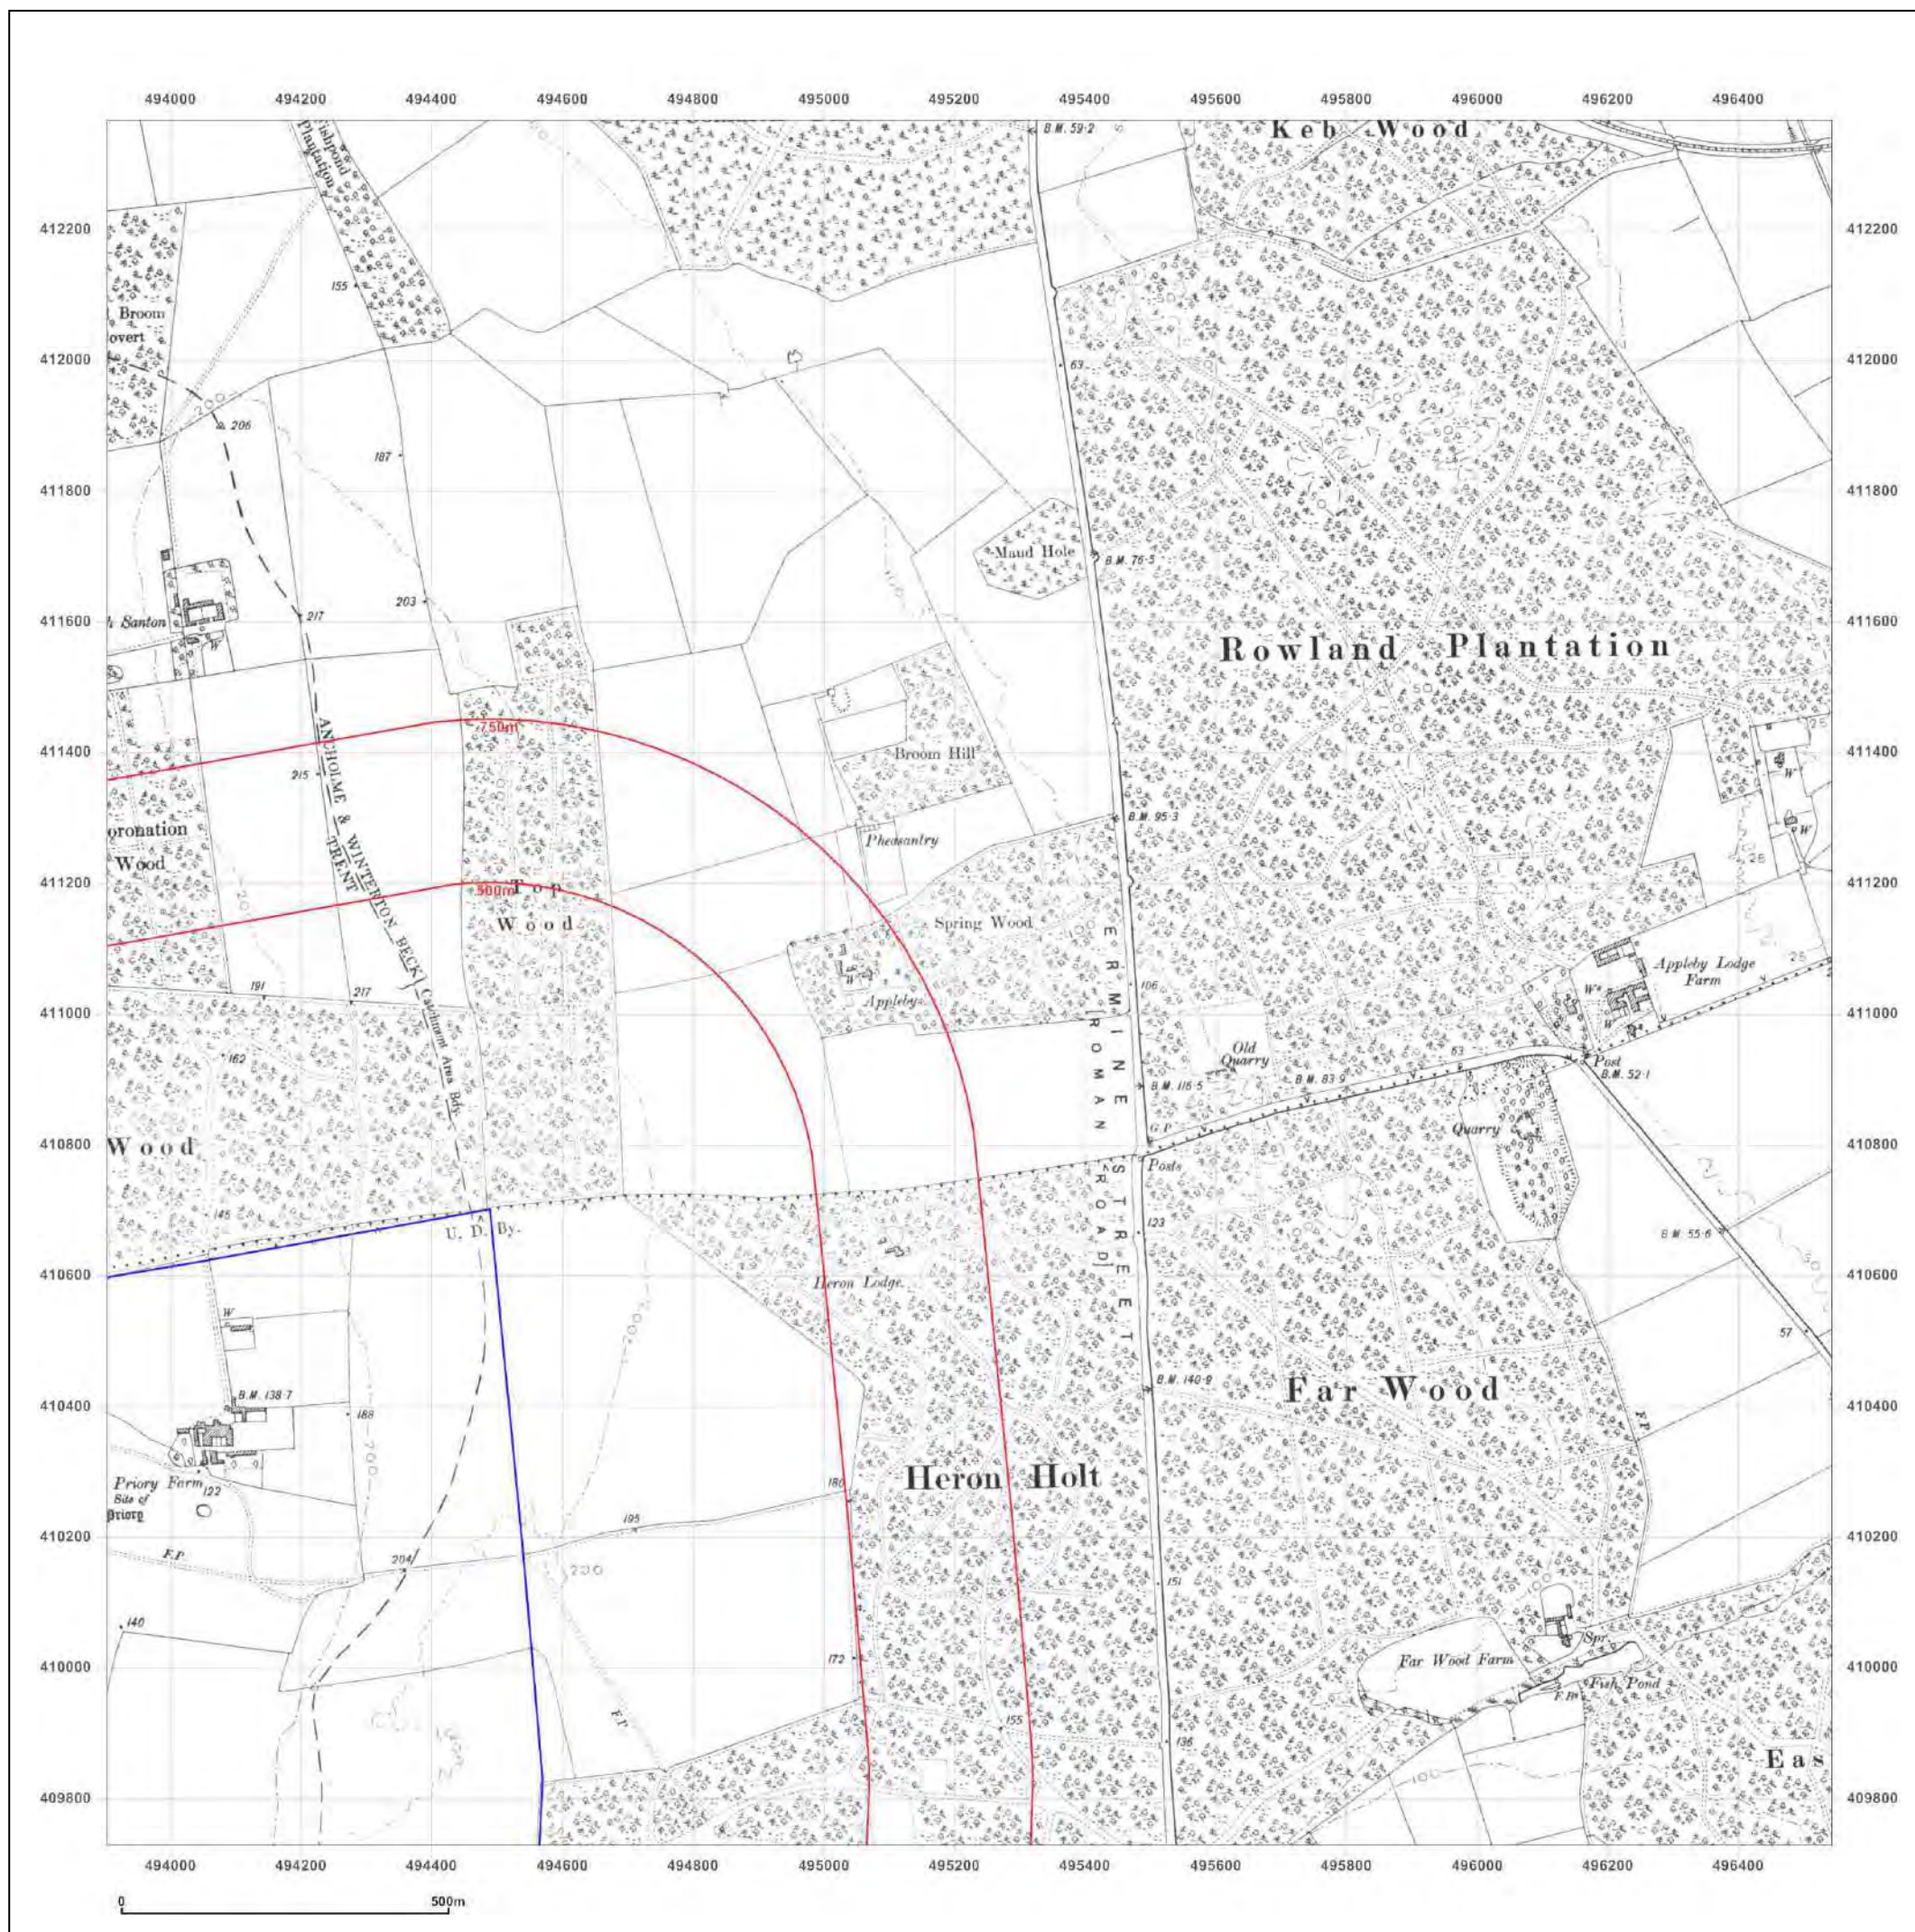



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: County Series

Map date: 1948

Scale: 1:10,560

Printed at: 1:10,560



Surveyed 1885
Revised 1948
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

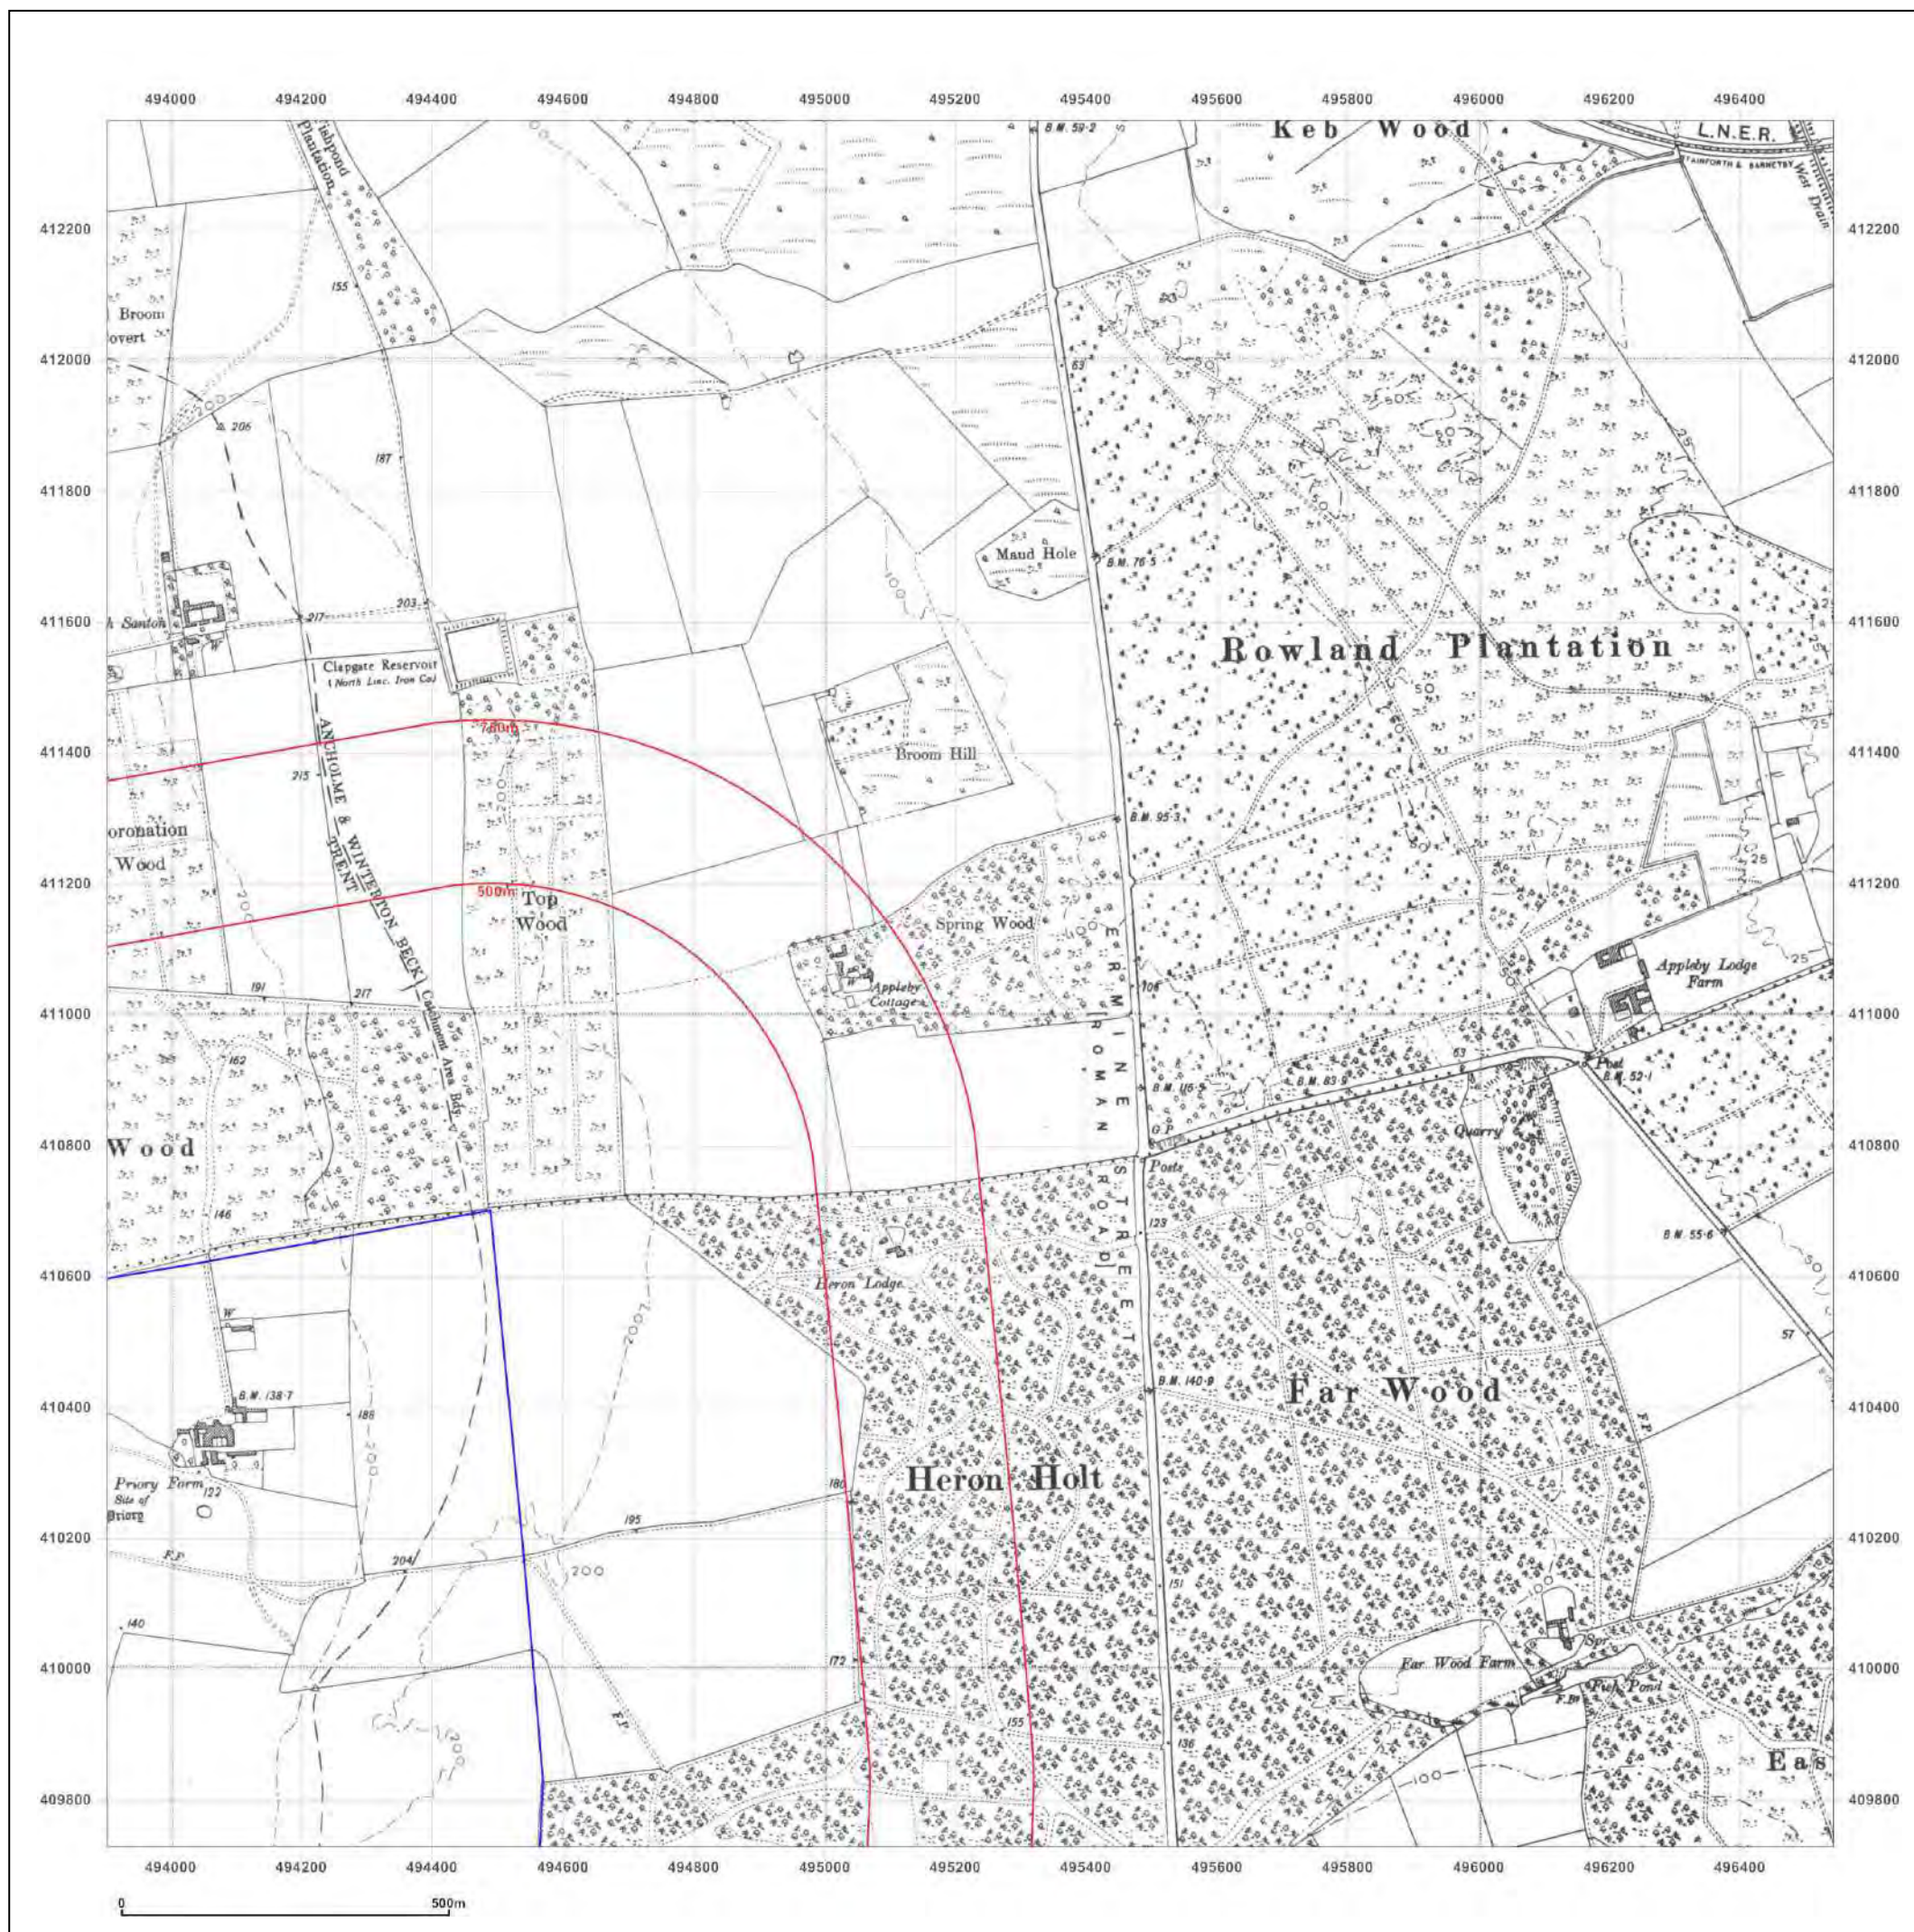



Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: Provisional

Map date: 1951-1956

Scale: 1:10,560

Printed at: 1:10,560



Surveyed N/A
Revised 1956
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1951
Revised 1951
Edition N/A
Copyright N/A
Levelled N/A

Surveyed N/A
Revised 1955
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1951
Revised 1951
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com





Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

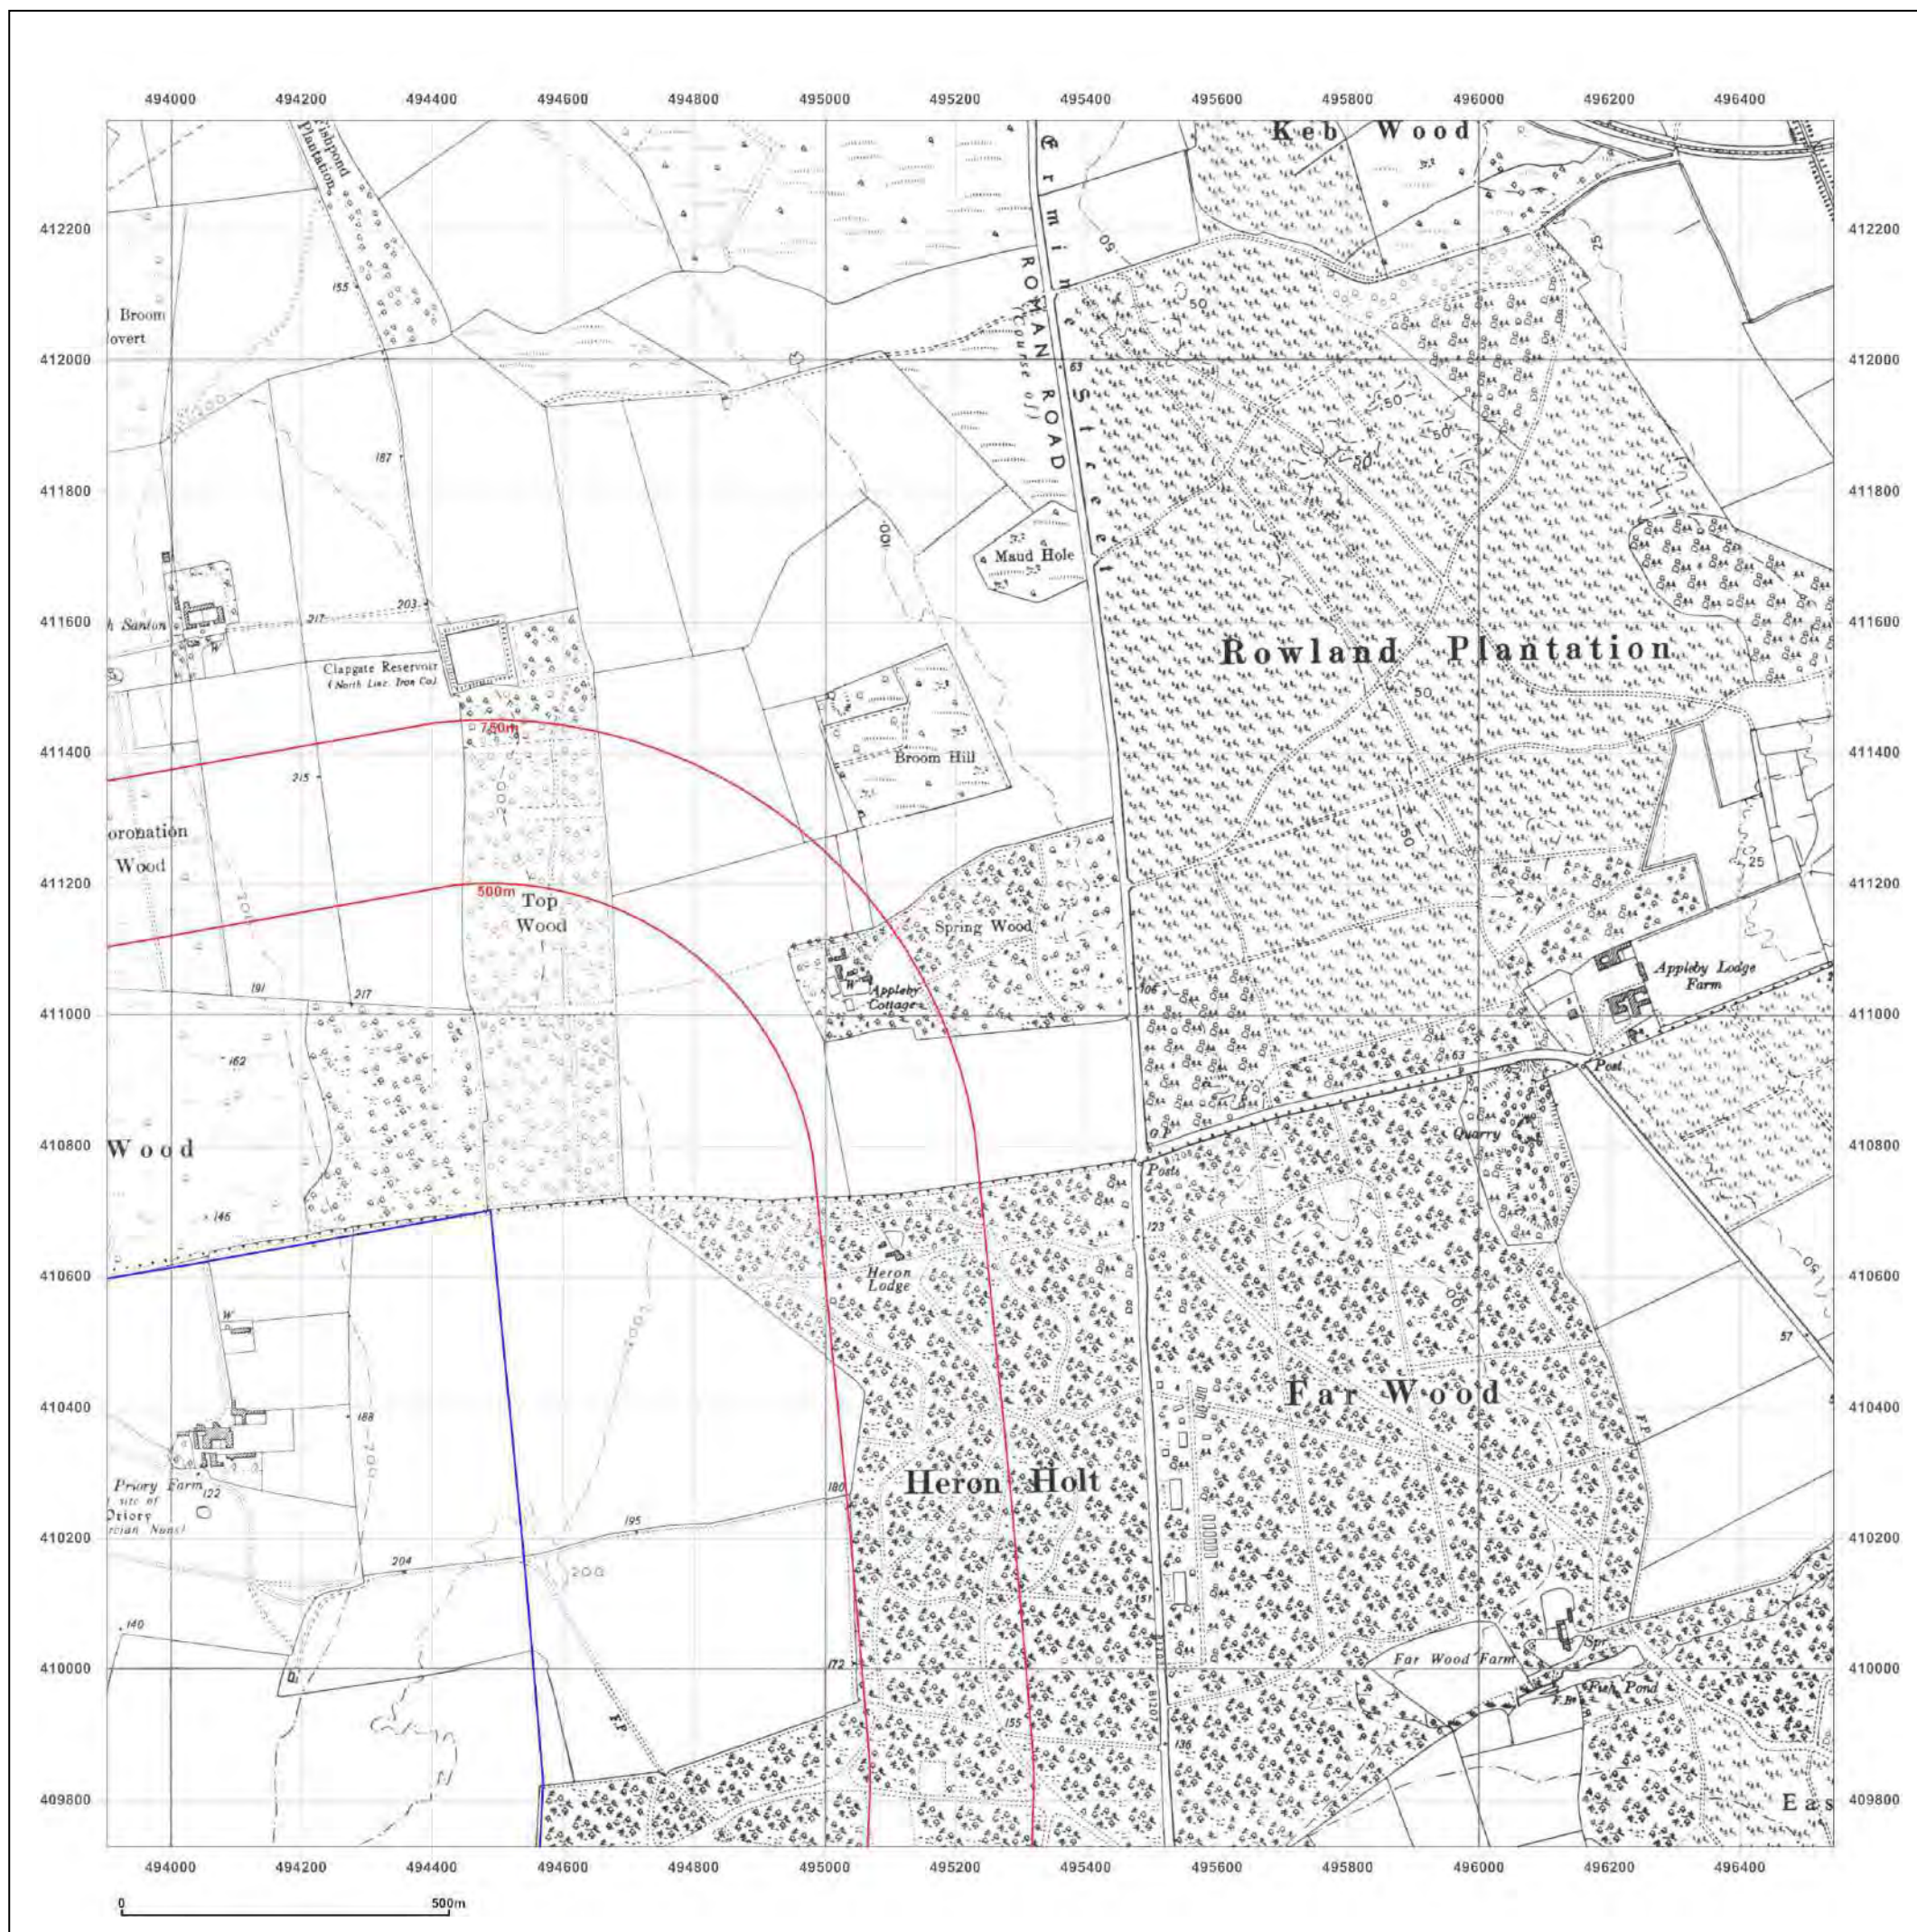

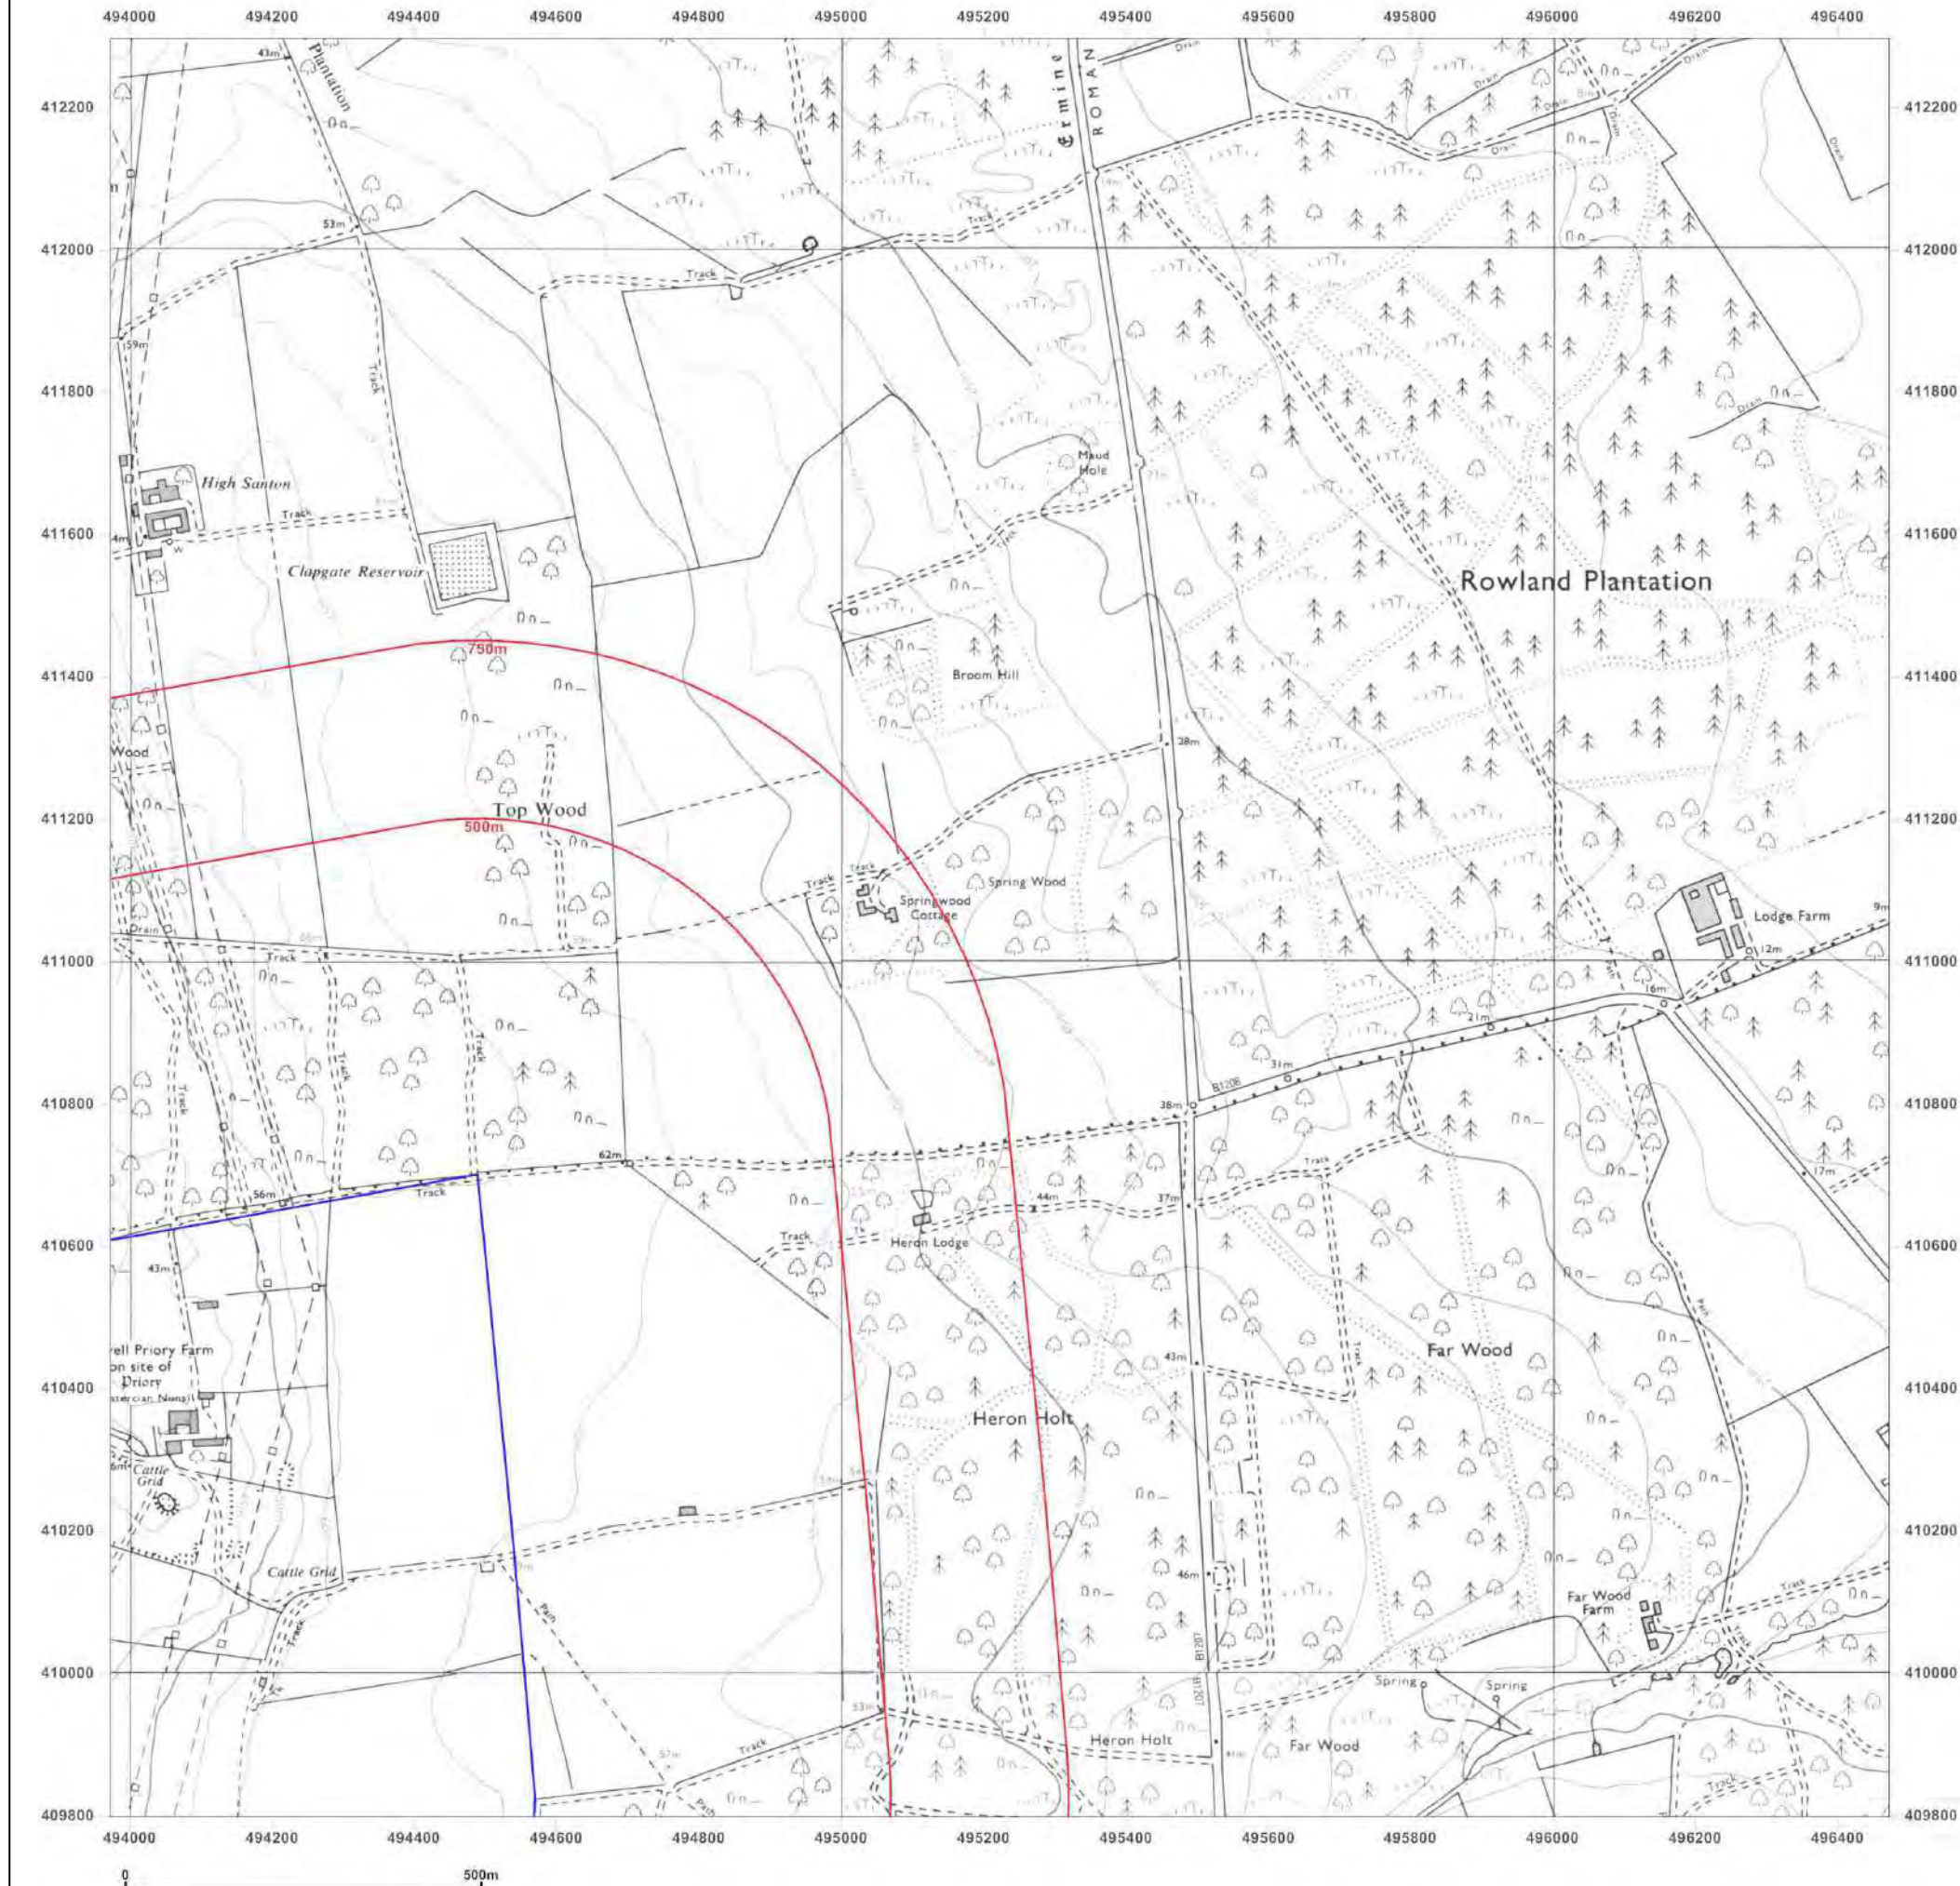

Site Details:

Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: National Grid

Map date: 1977-1982

Scale: 1:10,000

Printed at: 1:10,000



Surveyed 1974
Revised 1977
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1972
Revised 1977
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1978
Revised 1979
Edition N/A
Copyright N/A
Levelled N/A

Surveyed 1980
Revised 1982
Edition N/A
Copyright N/A
Levelled N/A



Produced by
Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

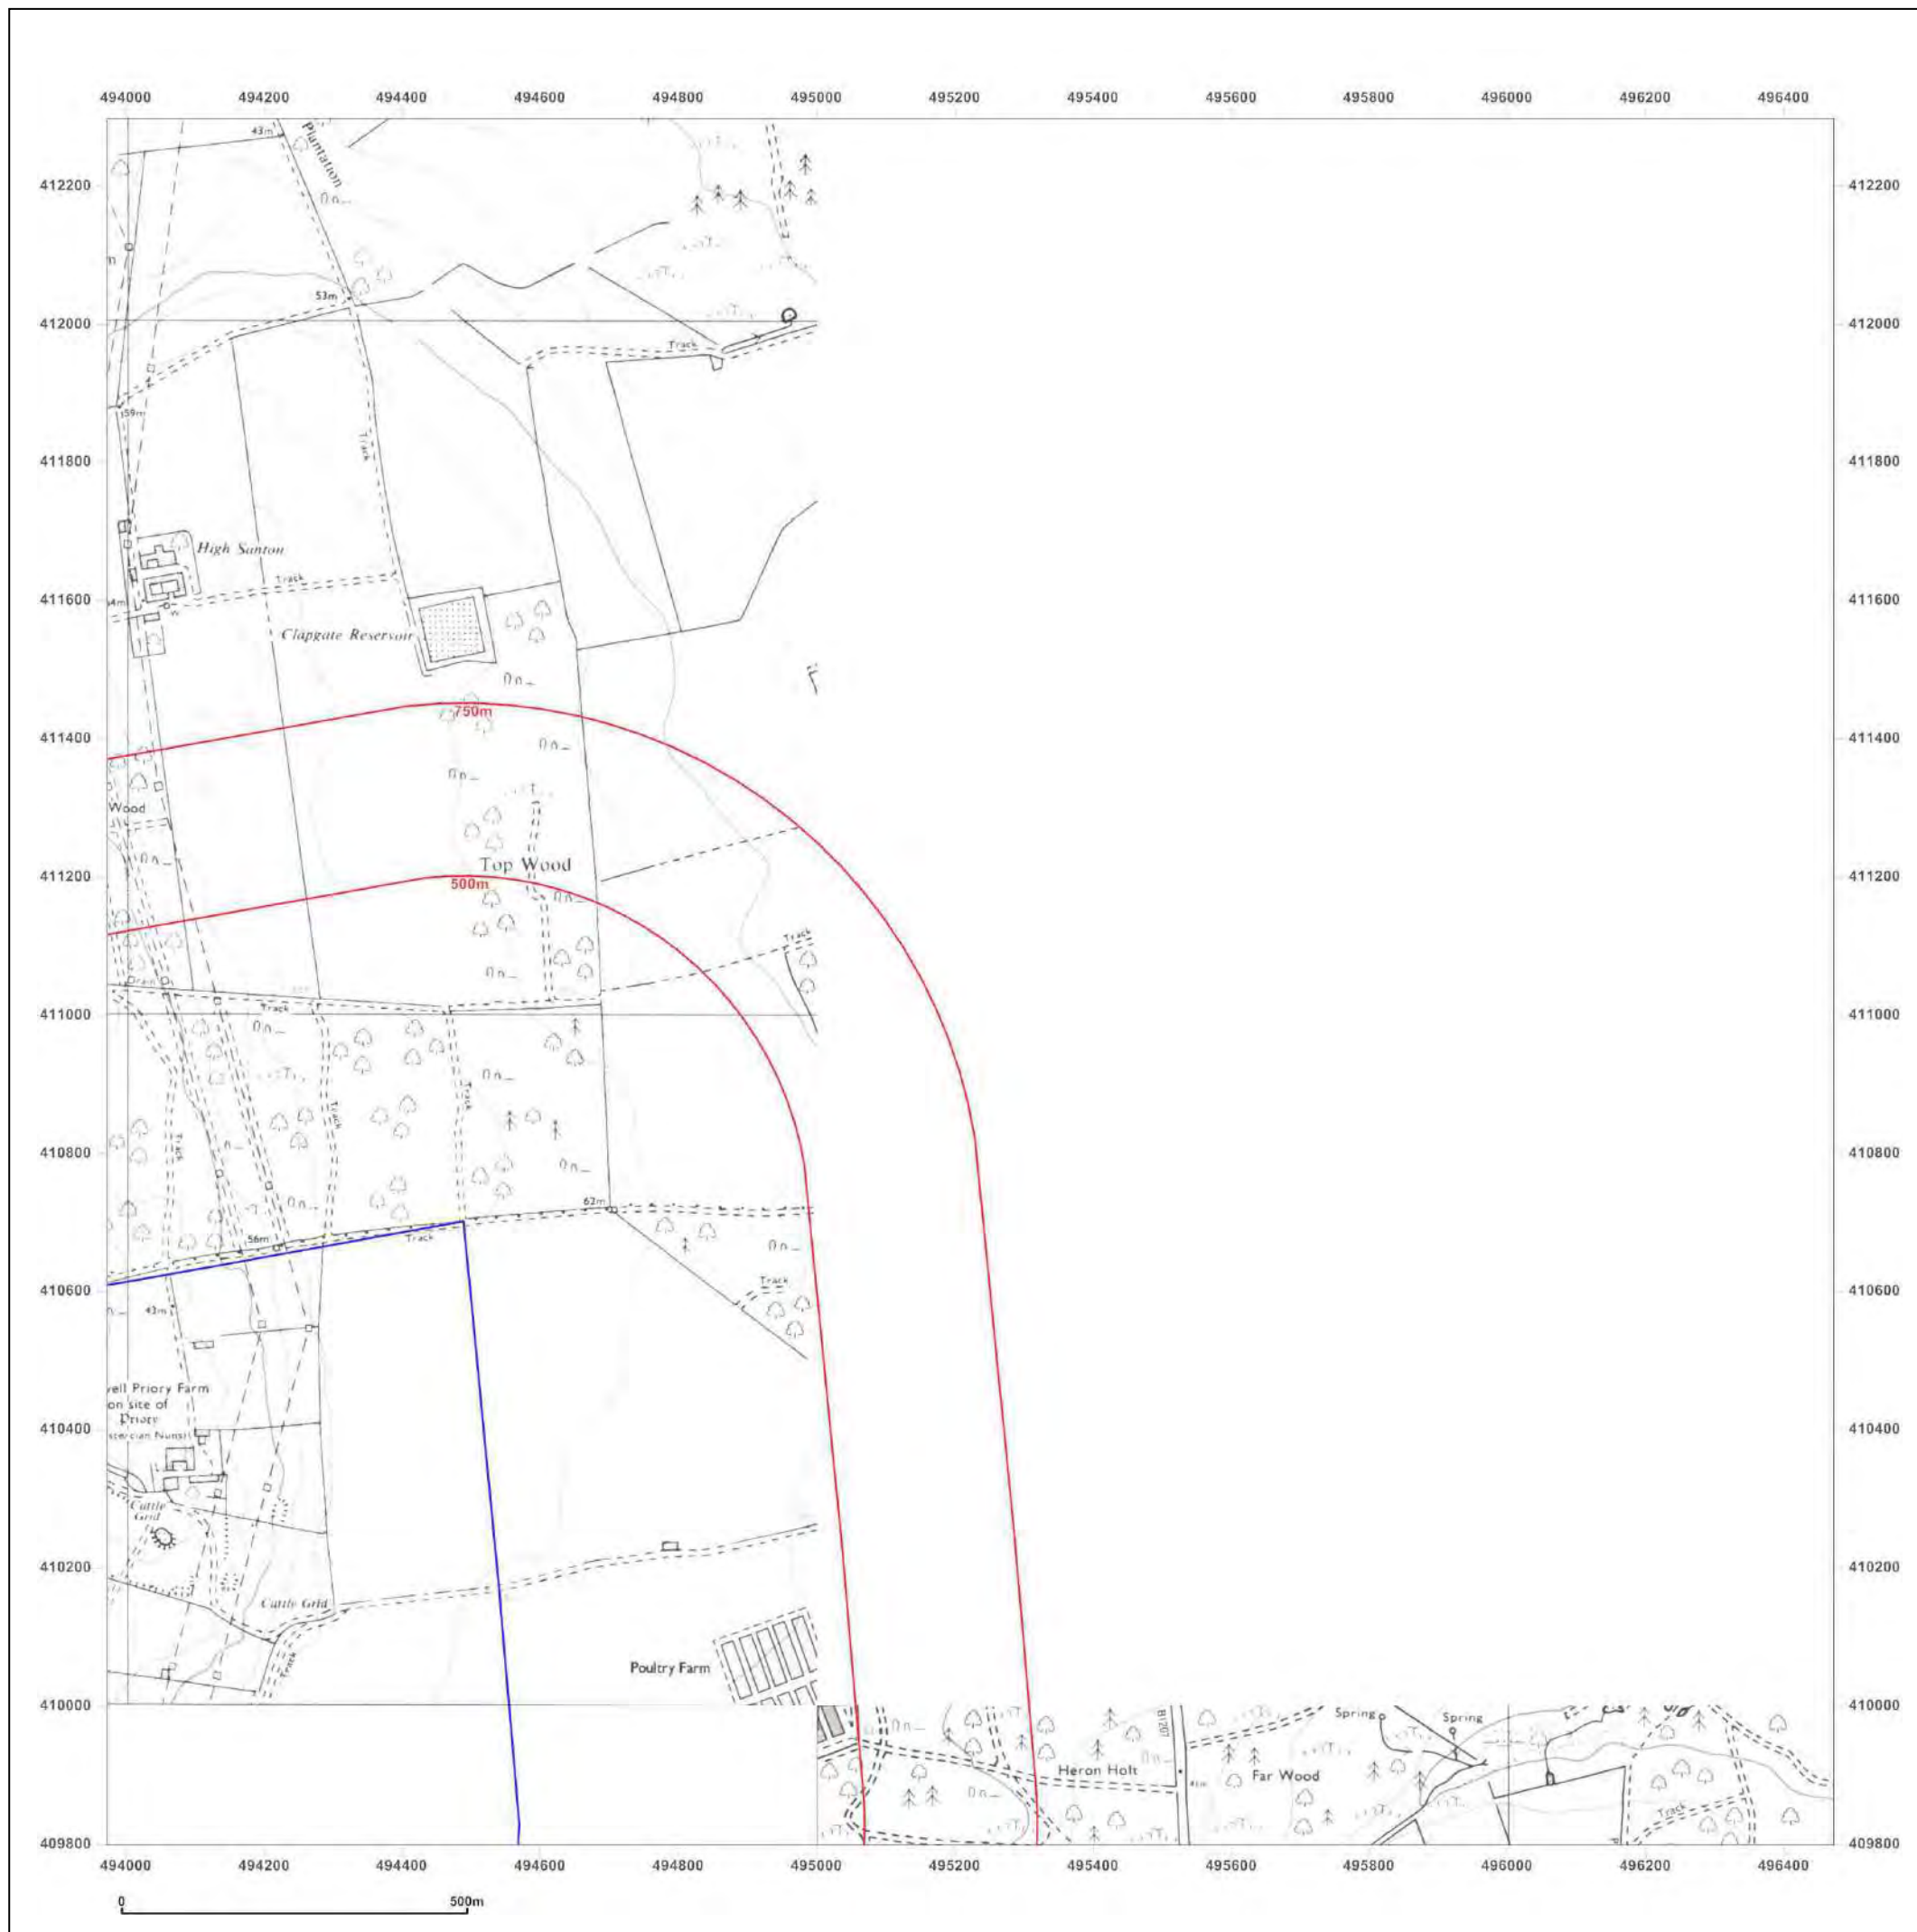

Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: National Grid


Map date: 1994

Scale: 1:10,000

Printed at: 1:10,000



Surveyed 1974
 Revised 1994
 Edition N/A
 Copyright N/A
 Levelled N/A

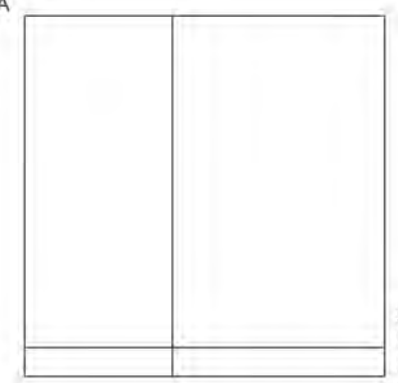

Surveyed 1980
 Revised 1994
 Edition N/A
 Copyright N/A
 Levelled N/A



Produced by
 Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

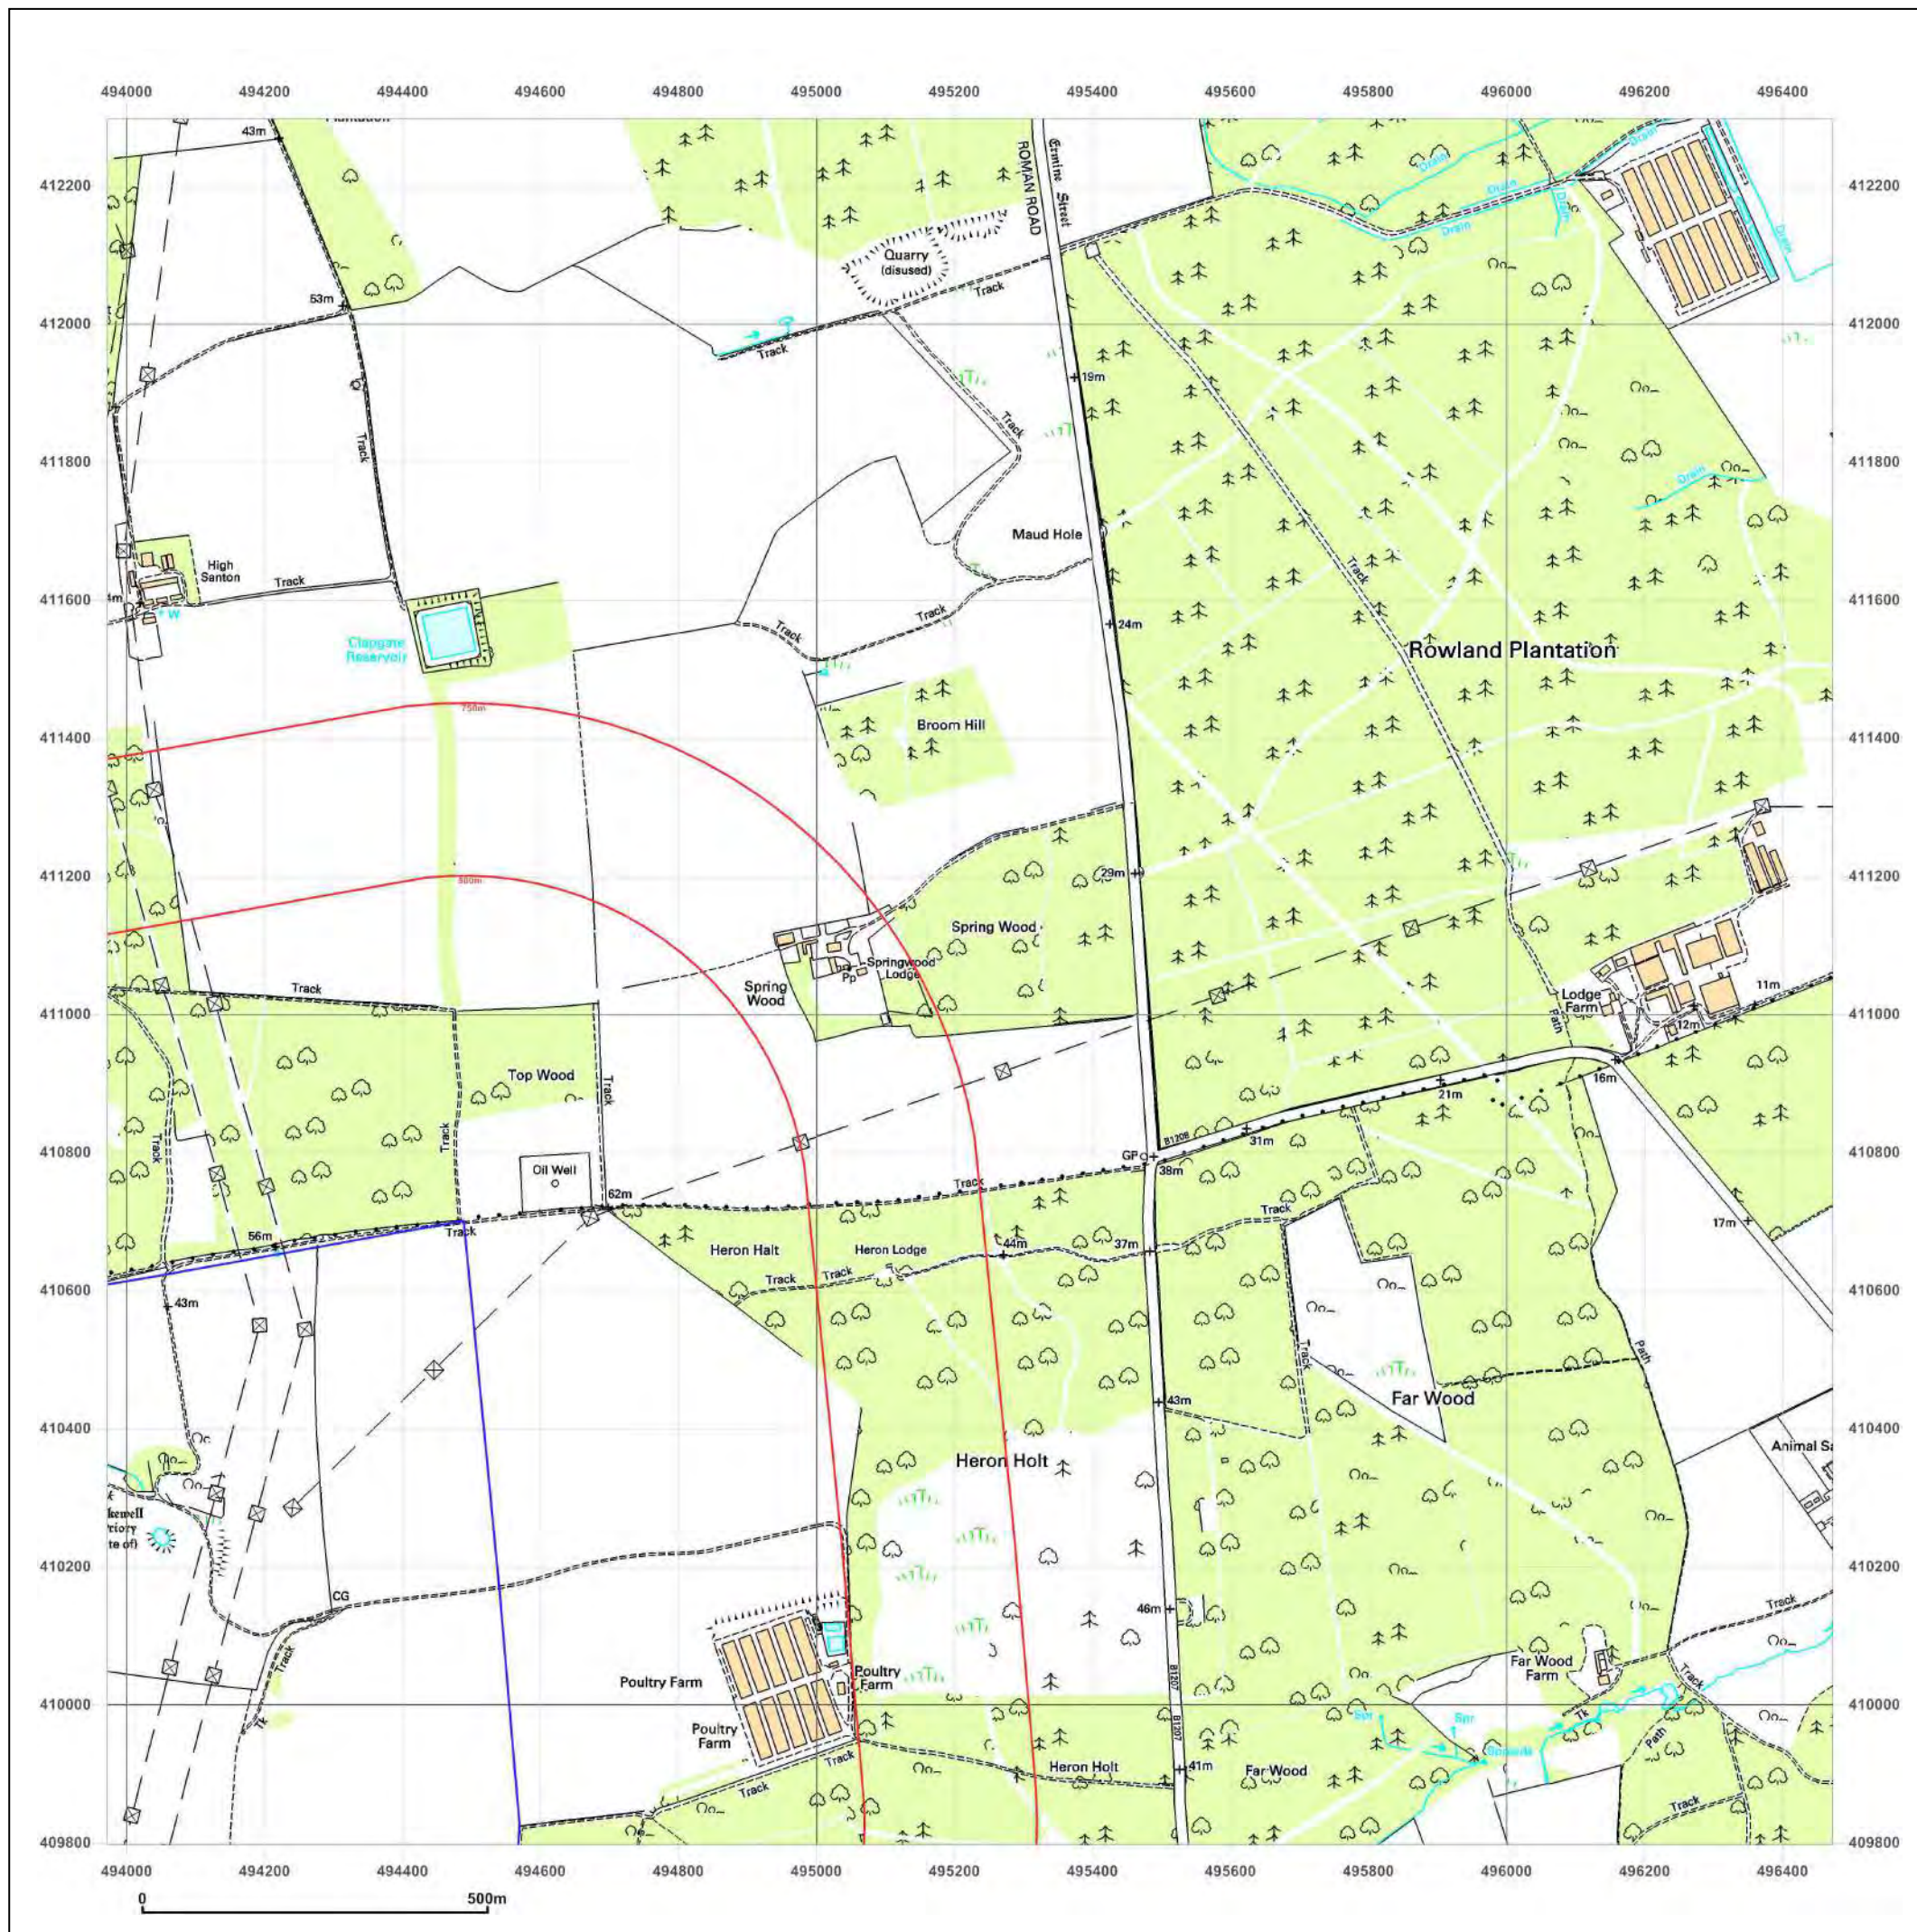

Site Details:

Santon, Scunthorpe, DN16 1XP


Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: 1:10,000 Raster

Map date: 2002

Scale: 1:10,000

Printed at: 1:10,000

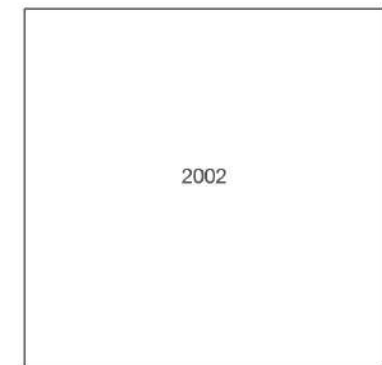

Produced by
 Groundsure Insights
www.groundsure.com



Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017



To view map legend click here [Legend](#)



Site Details:
 Santon, Scunthorpe, DN16 1XP

Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: National Grid
Map date: 2010
Scale: 1:10,000
Printed at: 1:10,000

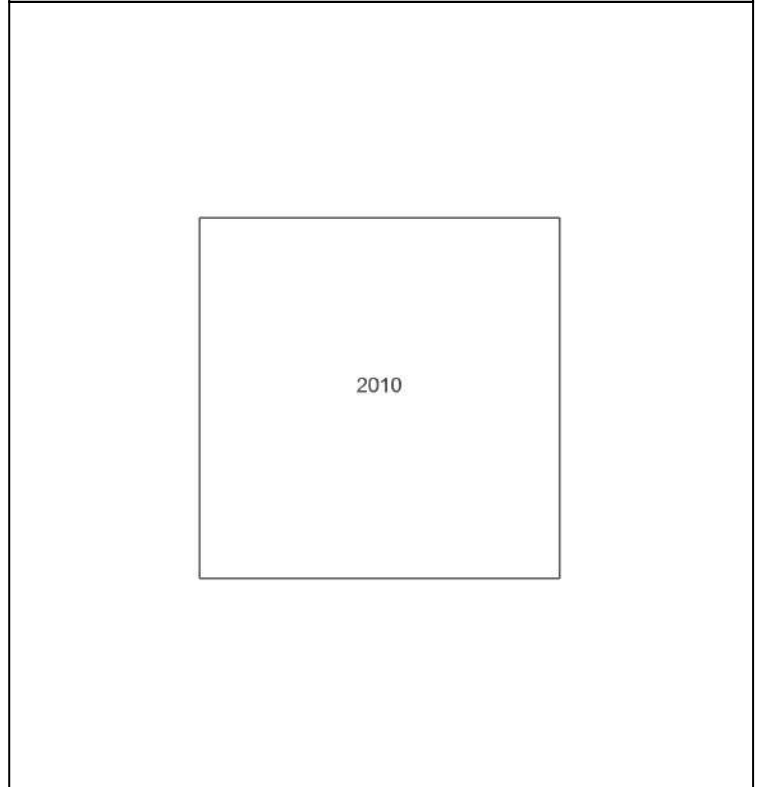


Groundsure INSIGHTS
 Produced by Groundsure Insights
www.groundsure.com

Powered by
 Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

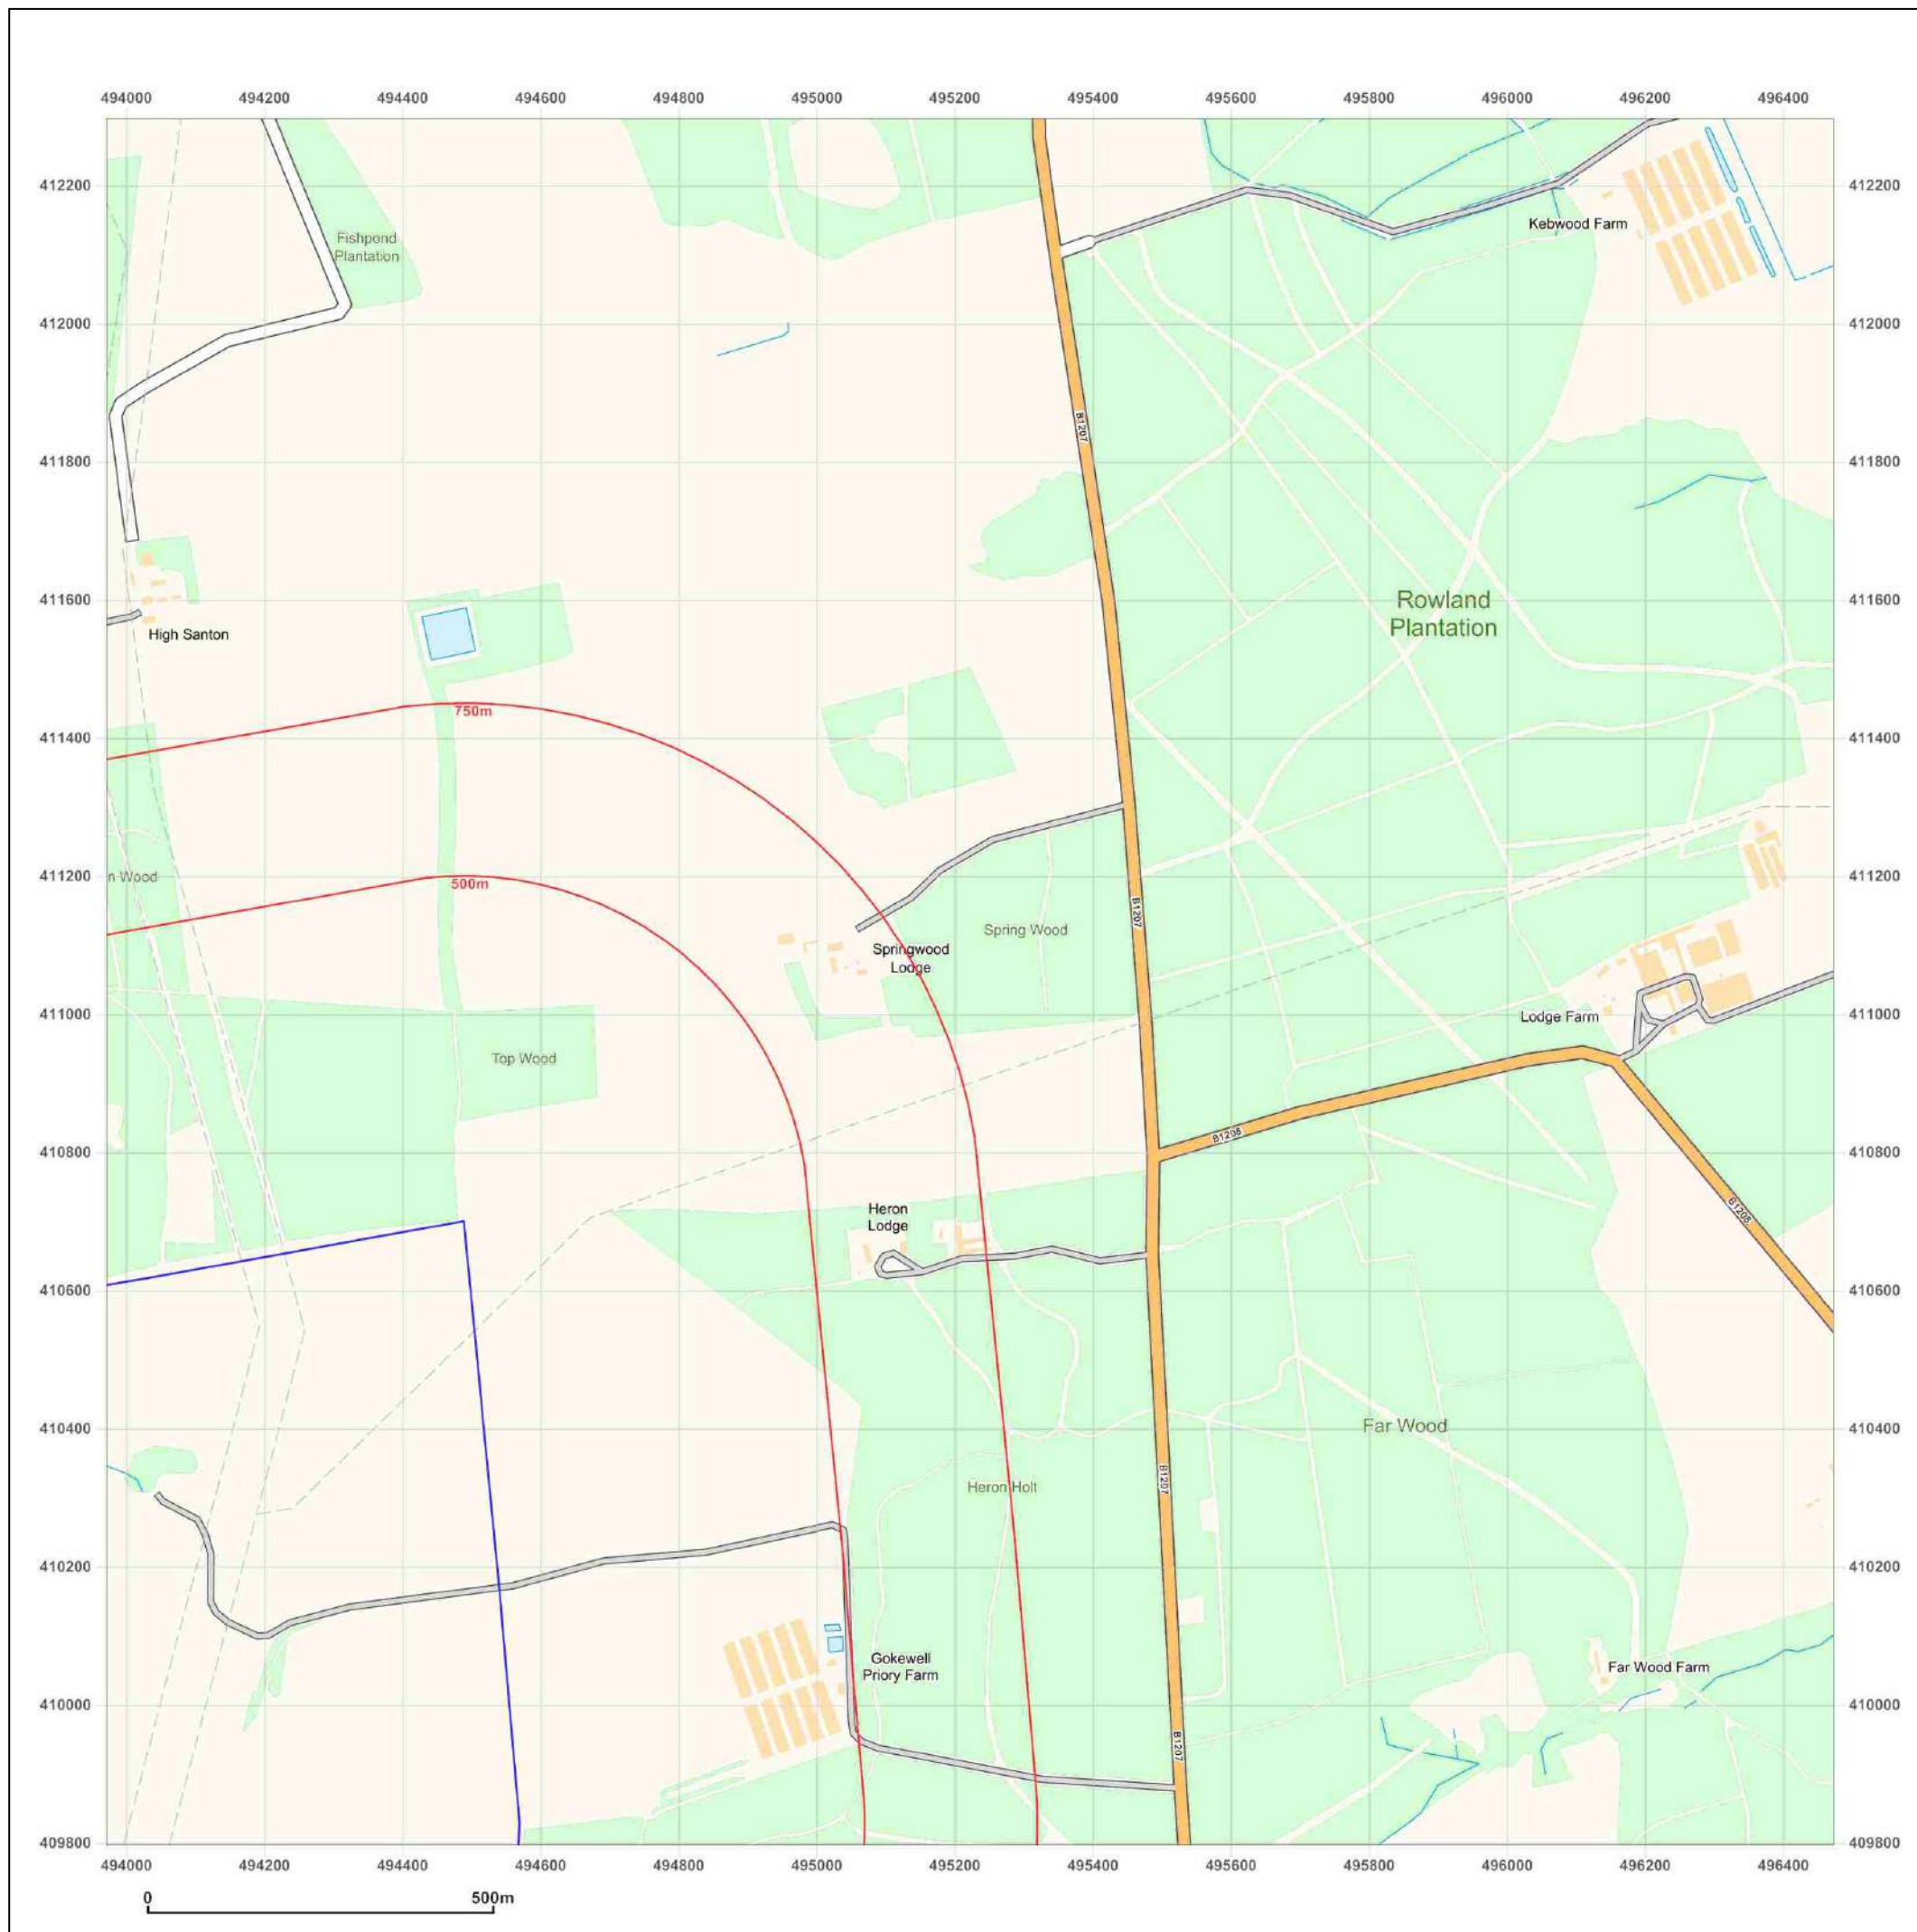

Site Details:

Santon, Scunthorpe, DN16 1XP



Client Ref: 13238
Report Ref: CMAPS-CM-643992-13238-310717HIS_SS_2_2
Grid Ref: 495222, 411047

Map Name: National Grid

Map date: 2014

Scale: 1:10,000

Printed at: 1:10,000

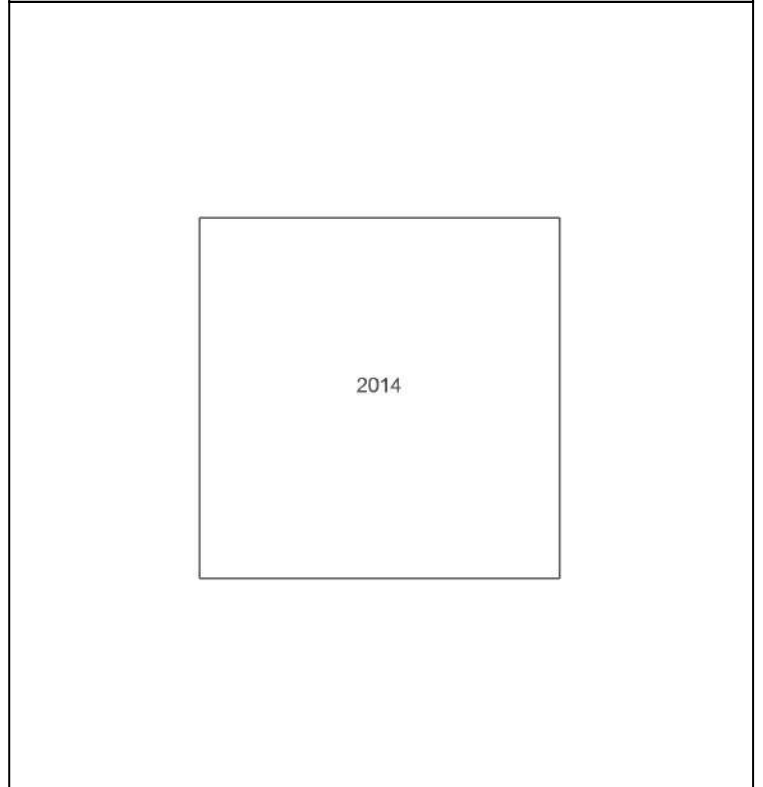

Produced by
 Groundsure Insights
www.groundsure.com




Supplied by:
www.centremapslive.com
groundsure@centremaps.com

© Crown copyright and database rights 2015 Ordnance Survey 100035207

Production date: 01 August 2017

To view map legend click here [Legend](#)

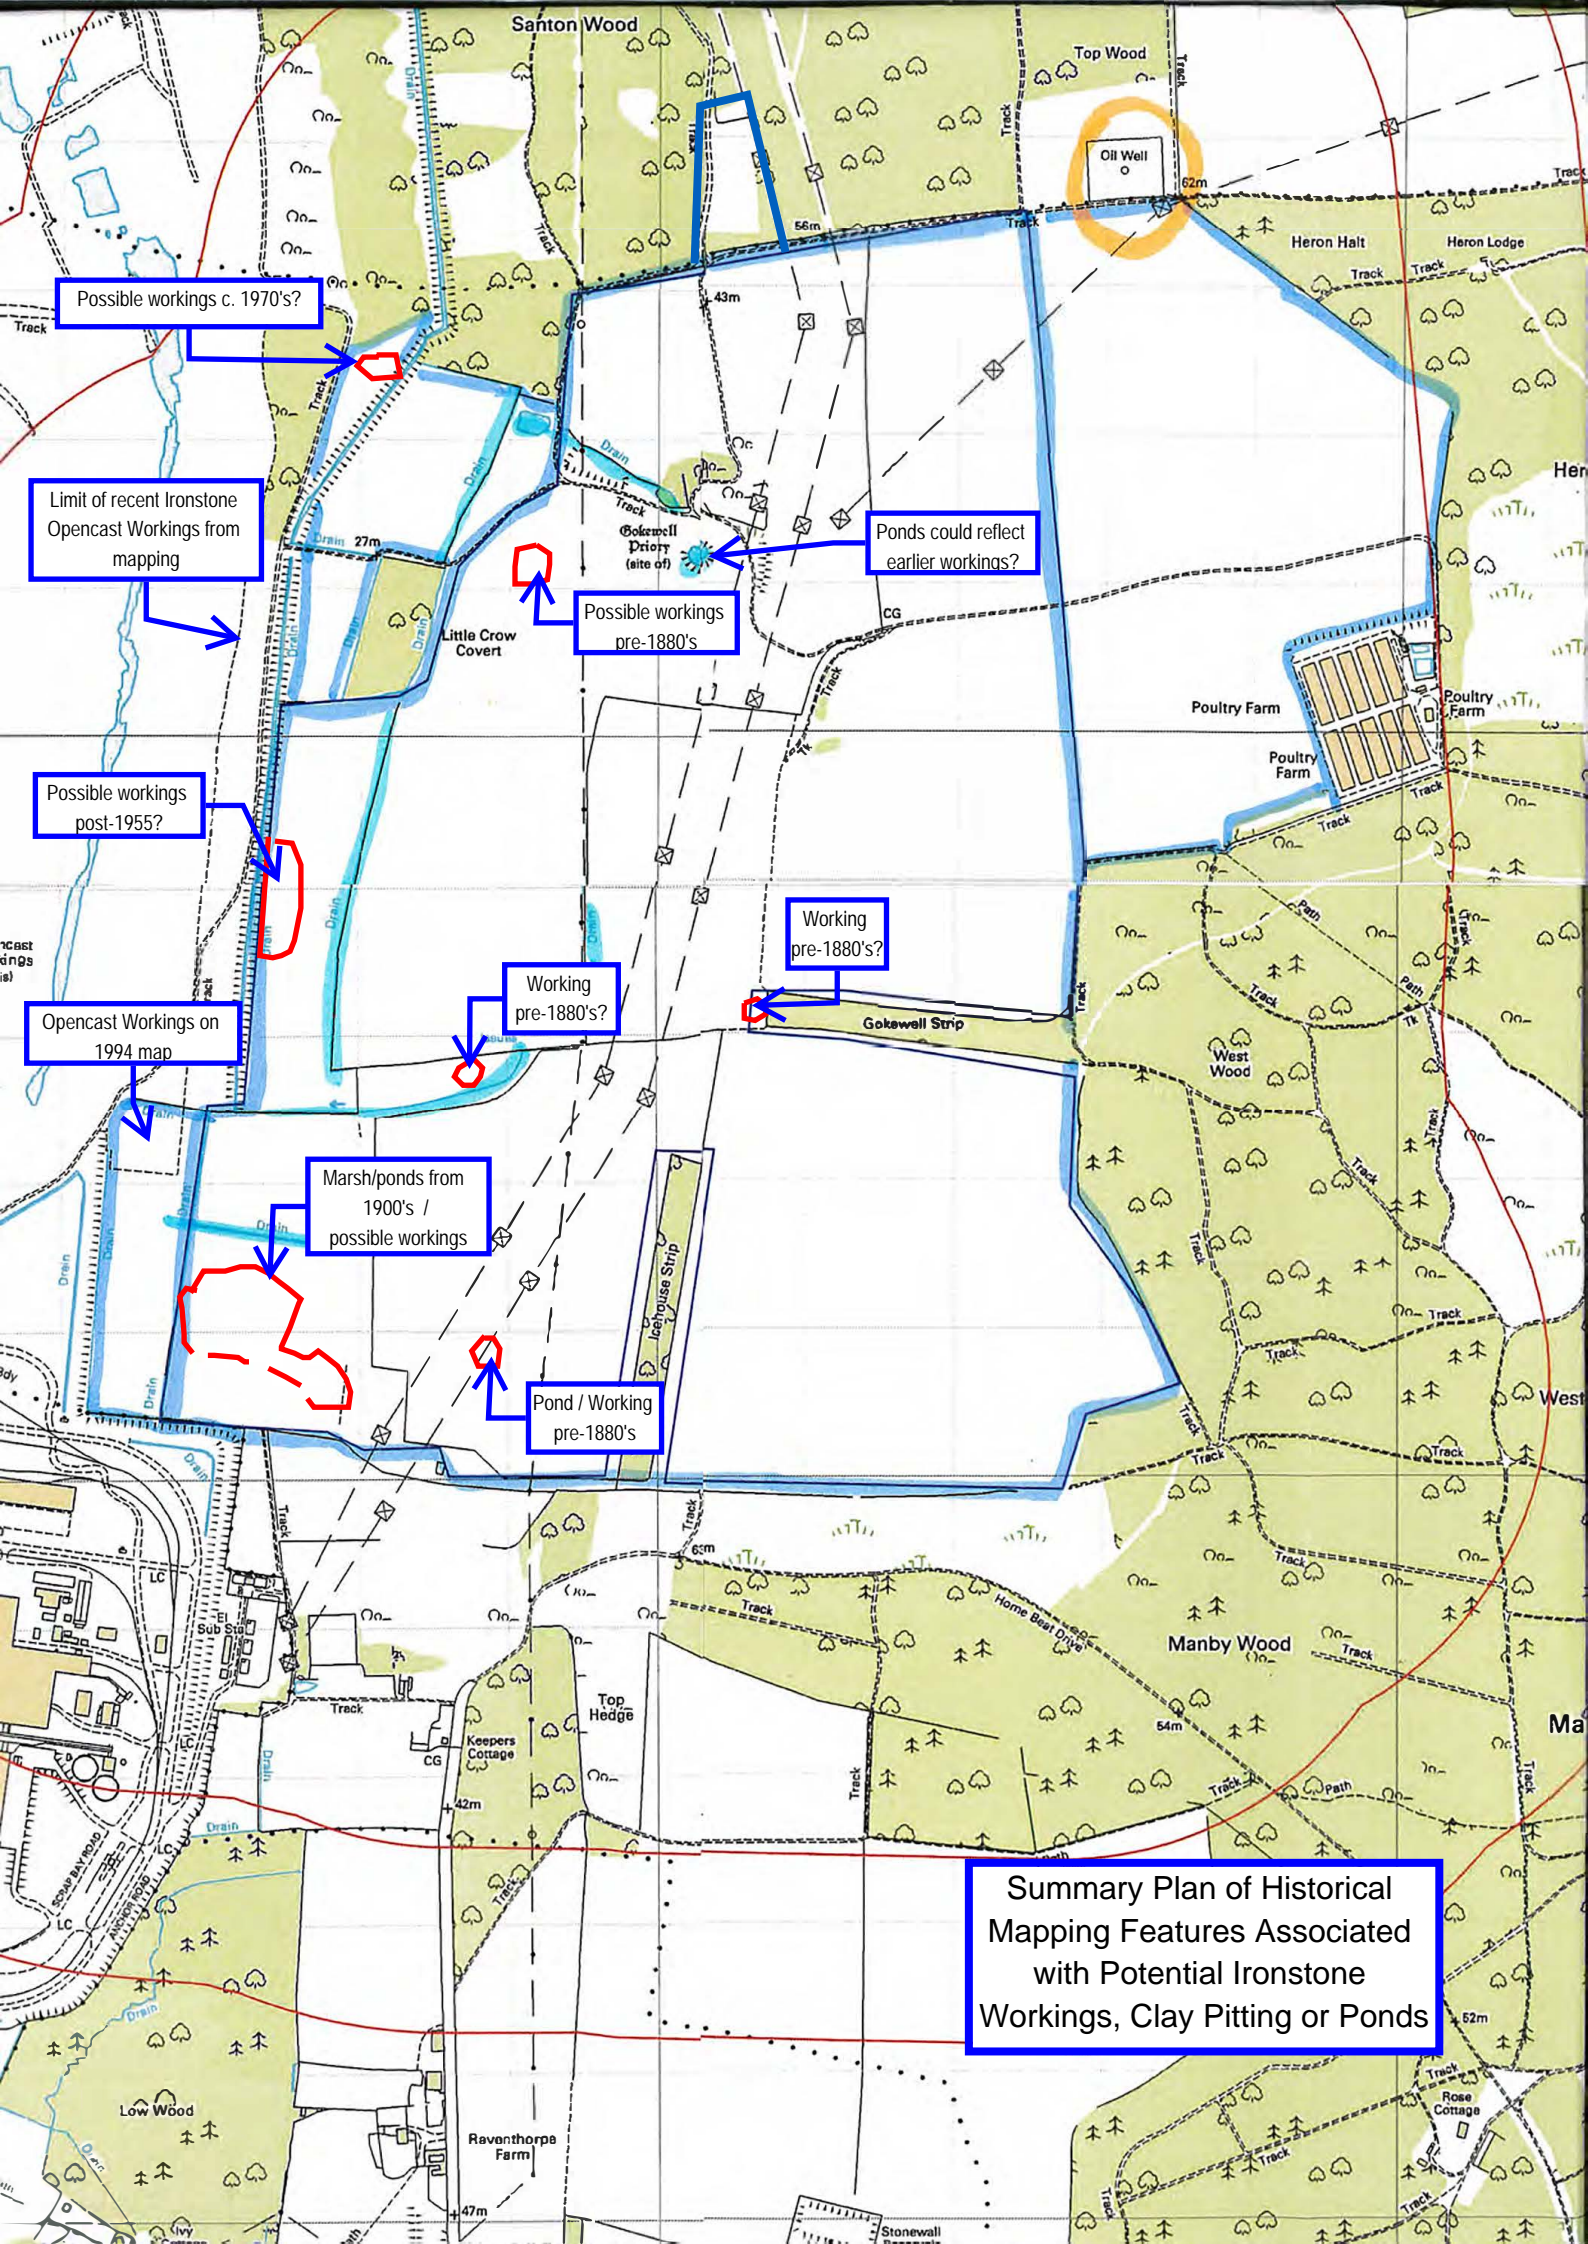

Possible workings c. 1970's?

Limit of recent Ironstone Opencast Workings from mapping

Possible workings post-1955?

Opencast Workings on 1994 map

Marsh/ponds from 1900's / possible workings

Working pre-1880's?

Pond / Working pre-1880's

Possible workings pre-1880's

Ponds could reflect earlier workings?




Working pre-1880's?

Summary Plan of Historical Mapping Features Associated with Potential Ironstone Workings, Clay Pitting or Ponds


Appendix F

Off-Site Conventional Oil Exploration Well



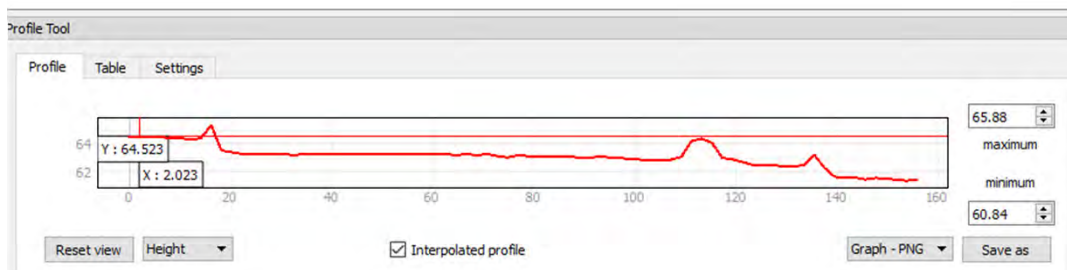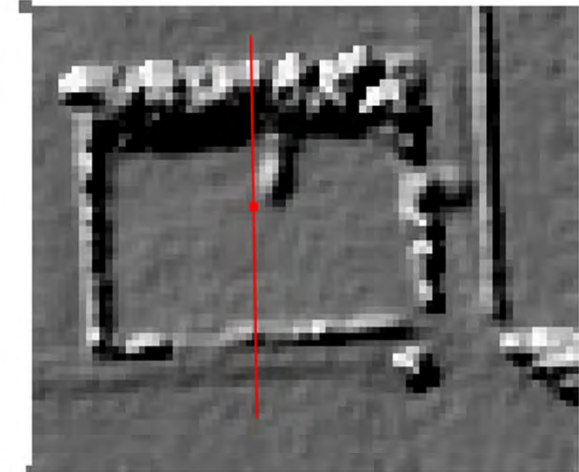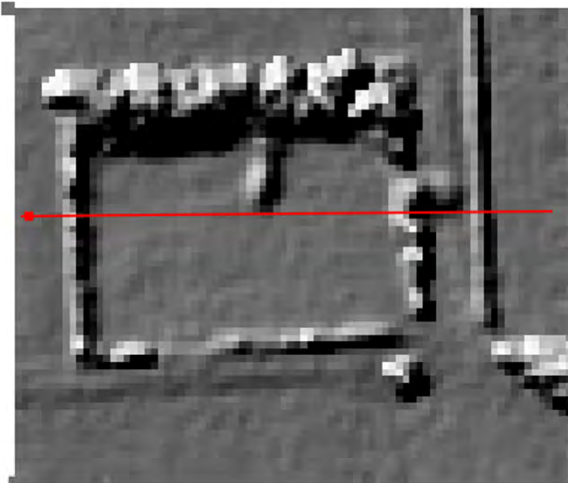

East-West Profile
across Oil Well site

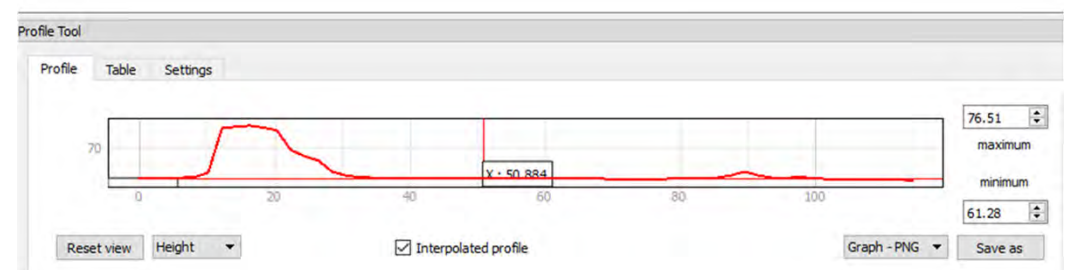

North-South Profile
across Oil Well site



Little Crow
Off-Site Oil Well
Contours

DCCID 39902

PETROLEUM DEVELOPMENT LIMITED
EXPLORATION AND PRODUCTION

EXPLORATION AND PRODUCTION
DEPARTMENT
COPY 1 OF 2

Drilling Completion Report
Broughton B1
by
D.J. Hodson

Eakring
November 1984

Broughton B1/W38

I Objectives/Results/Summary

OBJECTIVES:

Broughton B-1 was a pure exploration well, the primary objective was the Chatsworth sandstone in the Namurian and the secondary objectives were the Wingfield Flags (in the Westphalian) and the Ashover Grits (in the Namurian Group). The structure which it was drilled on is West of the Brigg structure which has now had two dry wells drilled in it.

RESULTS:

The drilling programme specified that cores should be cut through any section which indicated good hydrocarbon shows. Accordingly seven cores were cut; the formations cored were as follows:

1. The Penistone Flags (1497 m)
2. An un-named Westphalian Sand immediately below the Penistone Flags (1510 m)
3. The Wingfield Flags (1569 m)
4. The Chatsworth Sandstone (1629 m)
5. The Ashover Grit (1657 m)
6. The Ashover/Wrestle Sands (1668 m) and
7. The Sandton Sand (1855 m)

After the first two cores had been cut, indications were so encouraging that it was decided that the section should be logged and tested immediately, it was and the presence of moveable oil was established.

The comprehensive T.D. logging suite indicated that six zones should definitely be tested and a further two should also be evaluated if hole conditions permitted. Seven DST's were carried out in open-hole and one (in the Sandton at 1865 m) was repeated in cased hole because the hole was badly washed out at this depth. All formations except for the Penistone Flags were water, rather than hydrocarbon, bearing.

SUMMARY:

Broughton B-1 was a vertical exploration well drilled with Kenting Rig 36. It was spudded shortly after midnight on the 19th July 1984, drilling to T.D. was completed four days ahead of schedule, however the well was actually suspended eight days after the scheduled date mainly because of the extended testing programme and partly because time was lost:

- a. When circulation was lost during cementing of the 5½" casing and remedial work had to be carried out,
and
- b. When the 5½" casing hanger failed to set upon the first attempt.

The rig was released at 08.00 on the 9th September 1984

II Location Diagram

BP PETROLEUM DEVELOPMENT LTD.

LOCATION PLAT

BROUGHTON B1



COUNTRY- UK LAND

LICENCE NO. PL 185


COORDINATES - LAT. 49° 55' 5.704"

LONG. 6° 15' 17.496"

ELEVATION OF ROTARY TABLE A.O.D. 68.192m

REFERENCE - NATIONAL GRID SE 94627 10760

SCALE: 1:50,000

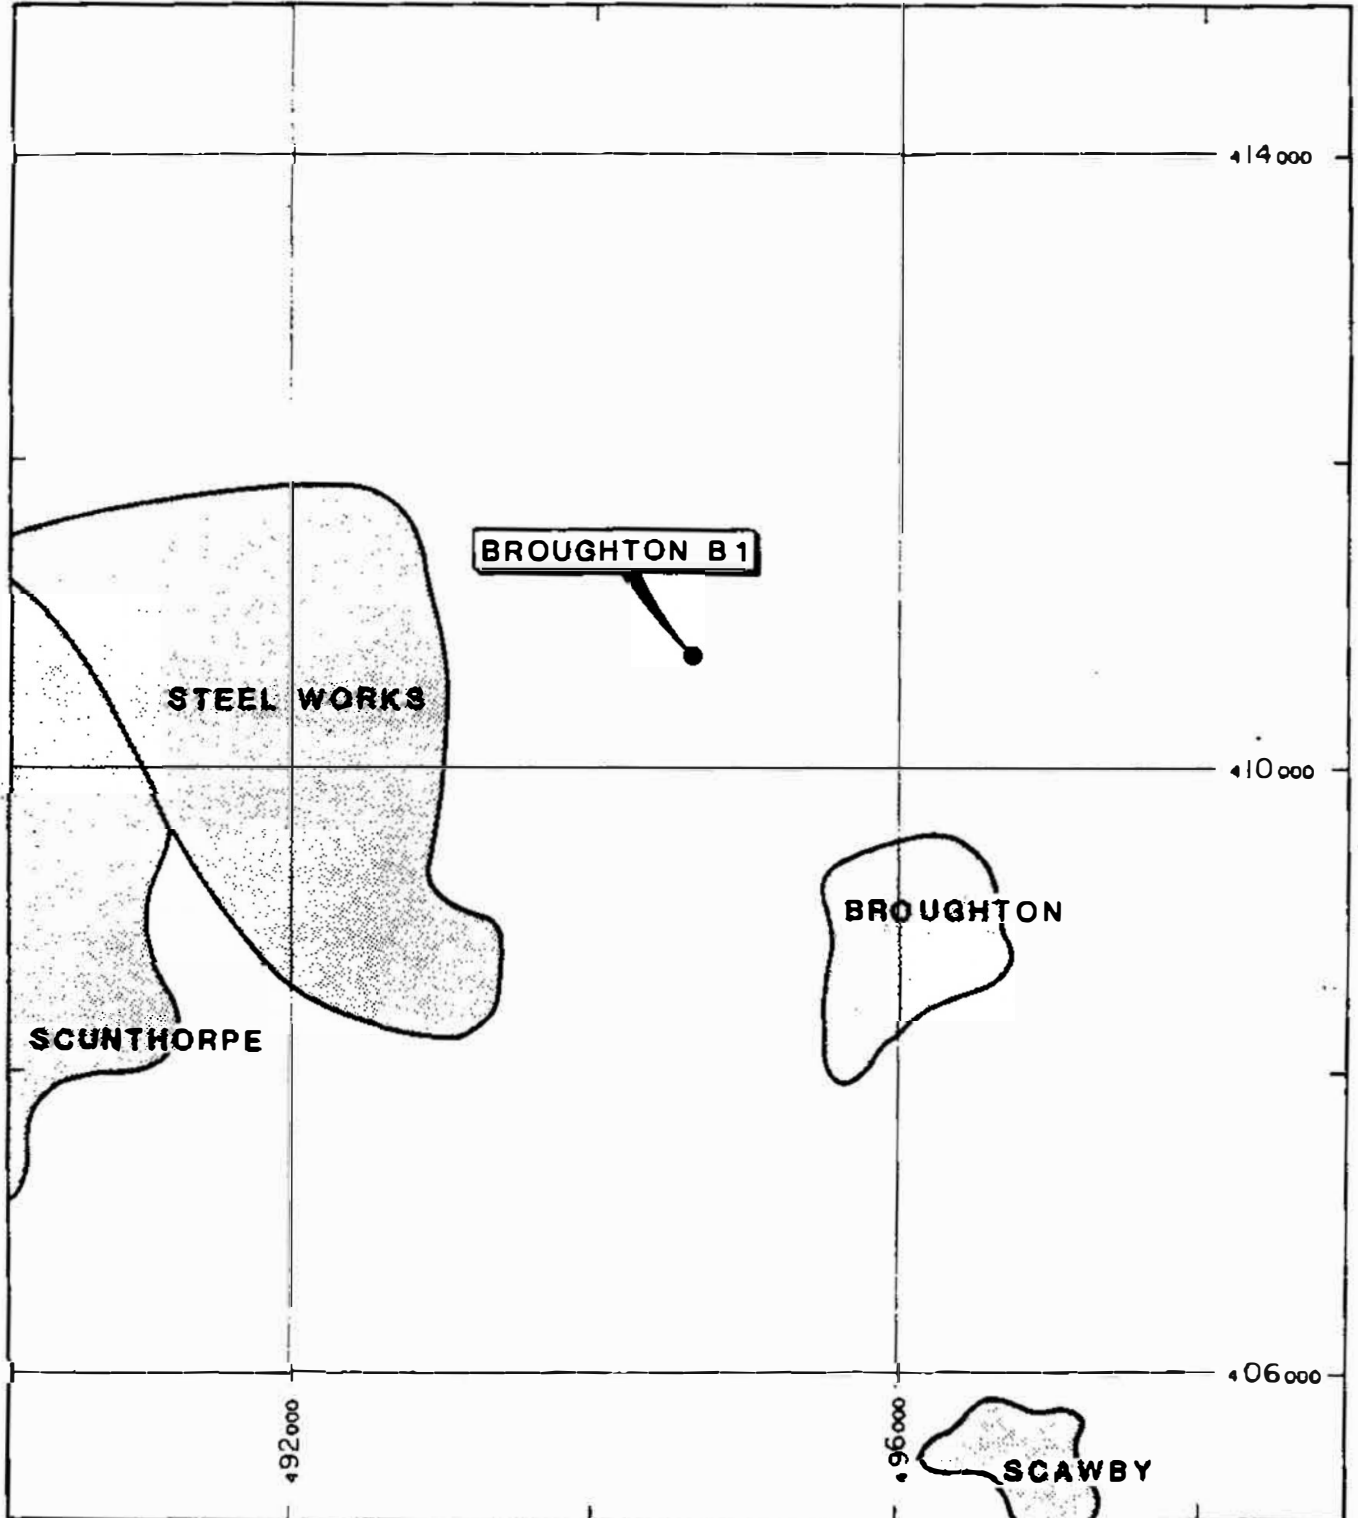

Ref: Broughton B1.	E/GL/84/290.
September, 1984.	G. Taylor.

Base Drg. E/MB/74/5

III General Well Data

GENERAL WELL DATA

a. Licence No. : UK Land Licence PL 185

b. Well Name : Broughton B-1

c. Well Classification : Exploration

d. Drilling Unit : Kenting Rig 36

e. Well Location : National Grid SE 94623 10755
Geophysicals 53° 35' 4.54" N
0° 34' 13.72" W

f. Rotary Table Elevation : 5 m AGL
68 m AOD

g. Total Depth : 1920 m DD BRT

h. Timing Spud : Midnight (00.00) 19.7.84
Rig Release : 08.00 9.9.84

i. Hole Depths (DD BRT) : 17½" hole to 46 m
: 12¼" hole to 824 m
: 8½" hole to 1920 m

j. Casing Depth (DD BRT) : 13¾" shoe at 45 m
: 9¾" shoe at 821 m
: 5½" shoe at 1920 m

IV Diary

DRILLING / WORKOVER DIARY

Rig: KENTING 36E

Well No: BROUGHTON B1

Month: JULY 1984.

<u>DATE</u>	<u>DAY No</u> (from spud)	<u>DEPTH</u> (m)	<u>MUD</u> (s.g)	<u>OPERATION</u>
18.7.84	0	-	-	Commenced drilling rathole and mousehole at 1500 - made up spud-in BHA.
19.7.84	1	46	1.04	Drilled 12 $\frac{1}{4}$ " pilot hole to 46m. Experienced 120 bbl loss @ 23m. Cured by mudding up. Opened hole to 17 $\frac{1}{2}$ ". Ran 13 3/8" casing to 45m. Cemented to surface. Waited on cement, nipples BOP's up.
20.7.84	2	255	1.04	Nipples BOP's up - tested diverter to 200 psi - Drilled cement cut and drilled 12 $\frac{1}{4}$ " hole to 255m. Had 20 Bbl/Hr. losses at 152m - cured with a mica pill.
21.7.84	3	424	1.04	Drilled with surveys to 409m. POH to change bit and wipe hole - Changed bit and BHA - RIH drilled to 424m.
22.7.84	4	745	1.04	Drilled to 745m.
23.7.84	5	824	1.04	Drilled to 824m - POH - Rigged up to log - 120 Bbl/Hr losses - Cured with LCM pill - logged BHCS/Cal/GR.
24.7.84	6	824	1.04	Logged verticality survey - RIH Wiper tip - Reamed last 14m to 824m - POH - Ran 9 5/8" casing to 821m - Cemented - lead 105 Bbls. Extended G @ 1.38SG - Tail 90 Bbls. Thixotropic @ 1.78 SG - lost 10 Bbls fluid. Regained circulation - Displaced cement with 201 Bbls mud. Bumped plug and held 1500 psi.
25.7.84	7	826	1.04	WOC - N.U. Wellhead and BOP. Broke down BHA - Tested choke manifold and line and kill line 2500 psi. Made up 8 $\frac{1}{2}$ " BHA and RIH. Tagged float at 793m. Drilled shoetrack cut. Tested pipe rams and Kelly cocks to 2500 psi. Annular to 1500 psi - Drilled 2m new formation.

<u>DATE</u>	<u>DAY No</u> (from spud)	<u>DEPTH</u> (m)	<u>MUD</u> (sg)	<u>OPERATION</u>
26.7.84	8	969	1.06	Circulated. Carried out L.O.T. (E.M.W. = 1.98 SG) - Drilled to 969m.
27.7.84	9	1026	1.08	Drilled to 973m - Tripped for bit (Survey 3/4 ^o) - Drilled to 1026m.
28.7.84	10	1067	1.09	Drilled to 1067m - Tripped for bit change.
29.7.84	11	1245	1.10	Drilled to 1245m.
30.7.84	12	1394	1.12	Drilled to 1315m. Survey (1 ^o). Check trip to shoe - Hole tight 1021-1231m. (Max 75000 lbs o'pull). Kick drill. RIH to 1302m. Wash/ream to 1315m. Drilled to 1391m. Circ. B.U. Drilled to 1394m.
31.7.84	13	1492	1.15	Drilled to 1478m. Survey - 1 ^c . Check trip to shoe - Hole tight 1157-1325 (Max 60000 lbs o'pull). Kick drill. RIH to 1463m - 15m fill - hole sloughing. Inc. mud weight to 1.14 SG. Drilled to 1492m. Circ. B.U. POOH to Core.
1.8.84	14	1515	1.14	M.U. corebarrel. RIH to shoe. Kick Drill + Rig Serv. RIH to btm (washed from 1381-1392). Cut core No.1 (1492-1510m). POQH. Service corebarrel. RIH. Cut core No.2 (1510-1515).
2.8.84	15	1568	1.15	Cont Cut Core No.2 (1515-1528). CIRC clean. POQH. STD CB back. M.U. 8½ Bit + BHA. RIH to SHOE. BOP FUNCTN TST & DRILL RIH. REAMED RATHOLE 1486-1528m. DRILLED 1528-1568. CIRC B.U. Survey (2). POQH.
3.8.84	16	1578	1.15	M.U. Core Barrel. RIH. Cut Core # 3 1568-1578m. Circ hole clean. POQH. Tight from 1568-1510m (25000 Max o'pull). M.U. 8½ BHA. RIH. Check Trip.
4.8.84	17	1580	1.15	Cont. Check trip. Reamed 1557-1578m (Drilled 2m to 1580. Pipe Tally error). Circ. clean. POQH. R.U. Welox and ran DLL/BHCS/GR/SP/CAL. Press. tested BOP's - OK. M.U. DST assy. RIH DST # 1 to 1520m. Set packers. Opened for init. flow.

<u>DATE</u>	<u>DAY No</u> (from spud)	<u>DEPTH</u> (m)	<u>MUD</u> (s.g.)	<u>OPERATION</u>
4.8.84 (cont'd)	17	1580	1.15	Shut in for init PBU. Opened tools for final flow period.
5.8.84	18	1580	1.14	Cont final flow. Shut in for final PBU. Drop Bar. Top up annulus. Close Hydril. Rev circ. contents of string. Circ norm. - cond. mud. POOH DST # 1.
6.8.84	19	1620	1.15	Pulled and laid D.S.T. tools out. RIH and drilled 1580m. to 1620m. Tripped for bit.
7.8.84	20	1638.5	1.16	(Mud weight increase due to caveins and connection gas). RIH drilled 1620 to 1629m. C.B.U. POH for core barrel. RIH and cored 1629m to 1638.5m.
8.8.84	21	1656	1.16	Cut core # 4 1638.5m to 1642.5m. POH - Recovered core 100% - RIH - Drilled 1643m to 1656.5m. C.B.U. POH.
9.8.84	22	1667.5	1.17	POH - Picked core barrel up - RIH. Cut core # 5 1656.5m to 1657.95m. jammed off - POH - Recovered core - RIH - Drilled 1657.95m to 1667.5m C.B.U. - POH - Picked core barrel up.
10.8.84	23	1685.51	1.17	RIH - Cut core No.6 1667.5m to 1685.51m - POH - (Tight from 1676m to 1666m). Recovered core. RIH to drill.
11.8.84	24	1761	1.17	Drilled to 1761m (Drilling stopped for 1 hour for SCR repairs).
12.8.84	25	1855	1.16	POH. Changed bit - RIH. Drilled to 1844m.
13.8.84	26	1861.5	1.16	Drilled to 1855m. - C.B.U. - Tripped for core barrel. Cut core # 7 from 1855m to 1861.5m. POH. Observed lost core and catcher. RIH with bit and junk sub.
14.8.84	27	1876	1.17	Cleaned out final 10m - Worked junk sub - Drilled to 1872m - Worked junk sub - POH - Recovered ½ core catcher - RIH new bit - Drilled 1872m to 1876m. Tripped for bit (No junk) - RIH.

<u>DATE</u>	<u>DAY No</u> (from spud)	<u>DEPTH</u> (m)	<u>MUD</u> (s.g.)	<u>OPERATION</u>
15.8.84	28	1898	1.16	RIH - Reamed u/g hole 1840m to 1876m - Circulated viscous pill for junk. Drilled 1876m to 1898m.
16.8.84	29	1920	1.19	Circulated clean with viscous pill. POH changed bit. Drilled to 1920m. Circulated. Check tripped back to 1650m. RIH to 1920m. Circulated, conditioned mud weighted up to 1.19 SG - Dropped survey and POH to log.
17.8.84	30	1920	1.19	POH - logged with Gearhart - MSFL/DLL - NEUTRON/DENSITY - BHCS/ SP DIPMETER - Rigged up Tesel Dipmeter.
18.8.84	31	1920	1.19	RIH Dipmeter - Hung up @ 1250m. Rigged Tesel down. Carried out wiper tip - (conditioned hole). RIH Tesel again; logged Dipmeter and Merlin Velpro V.S.P.
19.8.84	32	1920	1.19	Continued V.S.P. - Rigged Tesel down - Tested BOP's (Rams, valves and manifolds to 2500 psi; annular to 1500 psi) - RIH wiper trip conditioned hole - POH - Picked DST tools up. RIH. Attempted to set packers at 1805m - failed. POH packers to reset gauges and check tools.
20.8.84	33	1920	1.18	Pulled and redressed test tools - RIH and set pkr. @ 1865m. Opened tool for DST # 2. Opened 5 mins. Closed 1 hour - Opened 2 hours - Closed 2 hours - Nc good. Pulled packers and set at 1803m. Opened tool for DST # 3. Opened 5 mins. Shut 1 hour. Opened up and flowed well.
21.8.84	34	1920	1.19	Continued to flow well DST # 3 - Shut in for 12 hours. Deflated packers reverse-circulsted out contents of drill string - POH DST tools and RIH wiper tip.
22.8.84	35	1920	1.17	Carried out wiper trip to btm. @ 1910m - circulated and conditioned mud - POH - RIH DST tools to 1865m. Opened up for DST # 4A. 5 minute flow - 1 hour shut in. Attempted to open again - did not appear to succeed. Unseated packers. Observed string full.

<u>DATE</u>	<u>DAY No</u> (from spud)	<u>DEPTH</u> (m)	<u>MUD</u> (sg.)	<u>OPERATION</u>
22.8.84 (cont'd)	35	1920	1.17	Reverse - circulated out contents of pipe. Circulated conventionally and conditioned mud - POH - DST tools.
23.8.84	36	1920	1.18	Redress D.S.T. tools + R.I.H. to shoe. Wait @ shoe. R.I.H. D.S.T. tools to 1658m. Tested surface equipment OK. Inflated packers - open valve. 5 mins/shutin 1 hour/Open well up 12 hours - main flow period/Close well for main 12 hour P.B.U.
24.8.84	37	1920	1.10	Cont. with P.B.U. D.S.T. # 5. Deflate packers, drop bar, rev. circ. Circ. + cond. mud. POOH with tools. R.I.H. bit for wiper trip light ream 1660/1675, 1903/1920m. Circ. + cond. M.I.C. P.O.O.H. with bit.
25.8.84	38	1920	1.18	POOH wiper trip. Make up D.S.T. # 6 string + R.I.H. Test surface lines O.K. Inflate packers - 1637.5 to 1621.6. Open test valve - suspect burst packer POOH D.S.T. string. Change cut packers R.I.H. set packers 1615.2-1636.0m. Open test tool 5 mins/close 1 hour/open for main 12 hour flow.
26.8.84	39	1920	1.17+	Cont. with main flow period of DST # 6. Close test valve for main P.B.U. DST # 6. Deflate packers/drop bar/reverse circulate/circ. + cond. mud normally. POOH with D.S.T. # 6 test tools.
27.8.84	40	1920	1.17+	Cont. out of hole with D.S.T. # 6 string. Service tools etc. Change spacing R.I.H. tools for D.S.T. # 7. Set packers 1566.5m to 1578m. Open well 5 mins/close/hour/ open well main flow period/Close well for main P.B.U.
28.8.84	41	1920	1.17	Cont. P.B.U. D.S.T. # 7. Deflate packers, reverse circulate. Circulate normally POOH. D.S.T. string. Service tools etc. R.I.H. D.S.T. string # 8. Set packers 1490-1512.7m. Open well 5 mins/close 1 hr. Open well for main flow period D.S.T. # 8.

<u>DATE</u>	<u>DAY N^o</u> (from spud)	<u>DEPTH</u> (m)	<u>MUD</u> (s.g.)	<u>OPERATION</u>
29.8.84	42	1920	1.17	Cont. with flow period D.S.T. # 8. Close well for main PBU. Deflate packers POOH until top of cil. Reverse Circ. POOH. Lay down test tools
30.8.84	43	1920	1.18	Lay down excess DC's etc. R.I.H. OEDP to 1861m wash to 1920m. Circ and cond. mud work tight hole (180K O/PULL) Condition mud. P.O.O.H. OEDP. Make-up bit R.I.H. for wiper trip to 1861m wash to 1920m. Circulate hole tight 1908-1890. Spot vis. pill. POOH sideways.
31.8.84	44	1908 (5½" csg)	1.11 BRINE	POOH laying down pipe. Run 5½" Csg to 1920m - Circ. contents casing. P/test cmt. lines, pump 30 bbls. wash, 183bbls lead cmt - G + D75 @ 1.63 s.g., 130 bbls tail cmt. G NEAT @ 1.90 S.G. Displace cmt with 1.11 s.g. KCl brine - lost circ. with 130 bbls still to displace. Bump plug 2000 psi OK. No backflow.
1.9.84	45	1908 (5½" csg)	1.11 BRINE	W.O.C. Nipple down BOP's. Unable to set 5½" hanger slips - wait on replacement set of slips Run Gyro survey.
2.9.84	46	1908 (5½" csg)	1.11 BRINE	Cont. with Gyr. Welex run CBC/UDL/GR/CCL. Set 5½" hanger slips, cut and dress 5½" csg, nipple up tbg.hgr. test same 3000 psi OK. Nipple up B.O.P's test to 2000 psi - OK.
3.9.84	47	1908 (5½" csg)	1.11 BRINE	Welex perforate 1' @ 1845m. Perform injectivity test - no injection @ eq. mud cut of 1.68sg (1500 psi surface press.) Pick up 2 3/8" tbg + standback. Pick up D.S.T. string + D.C.'s + R.I.H.
4.9.84	48	1908 (5½" csg)	1.11 (BRINE)	Set packer @ 1840m - perform drawdown test - well open 2 hrs/ shut in ¼ hour. Unseat packer POOH. Wait on first light.
5.9.84	49	1908 (5½" csg)	1.11 (BRINE)	Wait on light. RIH with Welex and perforate 1860.09-1856.33m then 1856.33-1854.20m. Make up DST Tools and RIH to 1849m. Pressure test surface lines, hold safety meeting and set packers

<u>DATE</u>	<u>DAY N°</u> (from spud)	<u>DEPTH</u> (m)	<u>MUD</u> (s.g.)	<u>OPERATION</u>
5.9.84 (cont'd)	49	1908 (5½" csg)	1.11 BRINE	at 1849m. Open tool for 5 mins/ close for 1 hour. Open for main flow period.
6.9.84	50	1908 (5½" csg)	1.11 BRINE	Well open for main flow. Close well in. Deflate packer and POOH. RIH for 2nd cased hole DST. Tag fill at 1891.3m. Pressure test surface lines, hold safety meeting and set packers. Open tool.
7.9.84	51	1908 (5½" csg)	1.11 BRINE	Well flowing. Deflate packer and POOH. RIH with open ended tubing, washing to bottom. Circulate hole clean.
8.9.84	52	1908 (5½" csg)	1.11 BRINE	POOH with open ended tubing. Make up bridge plug and RIH. Set plug @ 1849m. POOH, laying down tubing. Nipple down BOP's. RIH with open ended tubing as kill string.
9.9.84	53	1908 (5½" csg)	1.11 BRINE	RIH with tubing, screw on tubing bonnet and land on tubing spool. Make up bonnet and screw in valve.

V Deviation Survey

SCIENTIFIC DRILLING CONTROLS.
GT YARMOUTH

Page 1

Directional survey
for

KIP DEVELOPMENT LTD.

Job number : 024G 09840783
Well number : BROUGHTON B-1
Well location : BROUGHTON
Survey date : 1/09/84
Survey engineer : K. MITCHELL

Meas. Depth	Vert. Depth	Inc. DEG	Direction DEG	Coordinates		D. Leg /030
				Latitude	Departure	
0.00	0.00	0.00	0.00	0.00 N	0.00 E	0.00
30.00	30.00	0.82	69.22	0.08 N	0.20 E	0.82
60.00	60.00	0.87	75.82	0.21 N	0.62 E	0.11
90.00	89.99	0.83	71.21	0.33 N	1.05 E	0.07
120.00	119.99	0.82	74.25	0.46 N	1.46 E	0.04
150.00	149.99	0.82	69.68	0.59 N	1.86 E	0.06
180.00	179.98	0.80	78.11	0.71 N	2.27 E	0.12
210.00	209.98	0.93	78.04	0.80 N	2.71 E	0.13
240.00	239.98	1.02	78.79	0.91 N	3.21 E	0.08
270.00	269.97	1.10	75.75	1.03 N	3.75 E	0.10
300.00	299.96	1.12	74.51	1.18 N	4.32 E	0.03
330.00	329.96	1.10	74.81	1.33 N	4.87 E	0.00
360.00	359.95	1.18	77.51	1.47 N	5.46 E	0.09
390.00	389.95	1.20	80.87	1.59 N	6.07 E	0.07
420.00	419.94	1.25	81.13	1.69 N	6.70 E	0.04
450.00	449.93	0.98	83.91	1.77 N	7.28 E	0.27
480.00	479.93	0.85	83.89	1.82 N	7.76 E	0.13
510.00	509.93	0.52	74.44	1.88 N	8.11 E	0.35
540.00	539.93	0.33	80.80	1.93 N	8.33 E	0.19
570.00	569.93	0.23	106.17	1.93 N	8.47 E	0.16
600.00	599.93	0.15	130.52	1.89 N	8.56 E	0.11
630.00	629.93	0.18	123.50	1.83 N	8.63 E	0.03
660.00	659.93	0.20	129.22	1.77 N	8.71 E	0.03
690.00	689.93	0.27	116.16	1.71 N	8.81 E	0.08
720.00	719.93	0.27	123.76	1.64 N	8.93 E	0.02
750.00	749.93	0.35	117.83	1.56 N	9.07 E	0.09
780.00	779.92	0.42	106.97	1.48 N	9.26 E	0.10
810.00	809.92	0.33	150.39	1.38 N	9.41 E	0.29
840.00	839.92	0.35	171.08	1.21 N	9.46 E	0.12
870.00	869.92	0.43	182.39	1.01 N	9.47 E	0.11

SCIENTIFIC DRILLING CONTROLS.
GT YARMOUTH

Page 2

Directional survey
for

BP DEVELOPMENT LTD.

Job number : 024G 09840783
Well number : BROUGHTON B-1

Meas. Depth	Vert. Depth	Inc. DEG	Direction DEG	Coordinates		D.Leg /030
				Latitude	Departure	
900.00	899.92	0.45	224.08	0.81 N	9.39 E	0.31
930.00	929.92	0.52	237.12	0.65 N	9.19 E	0.13
960.00	959.92	0.75	244.15	0.49 N	8.90 E	0.25
990.00	989.92	0.93	251.71	0.33 N	8.49 E	0.21
1020.00	1019.91	0.52	251.90	0.21 N	8.13 E	0.42
1050.00	1049.91	0.77	260.06	0.13 N	7.80 E	0.26
1080.00	1079.91	0.82	245.97	0.01 N	7.41 E	0.20
1110.00	1109.91	0.72	235.85	0.18 S	7.06 E	0.17
1140.00	1139.90	0.55	236.78	0.36 S	6.78 E	0.17
1170.00	1169.90	0.48	253.62	0.48 S	6.54 E	0.16
1200.00	1199.90	0.55	295.85	0.45 S	6.29 E	0.38
1230.00	1229.90	0.52	293.48	0.34 S	6.04 E	0.03
1260.00	1259.90	0.18	283.15	0.27 S	5.87 E	0.34
1290.00	1289.90	0.18	270.09	0.26 S	5.77 E	0.03
1320.00	1319.90	0.30	319.23	0.20 S	5.67 E	0.23
1350.00	1349.90	0.42	326.15	0.05 S	5.56 E	0.12
1380.00	1379.90	0.47	325.37	0.14 N	5.43 E	0.04
1410.00	1409.90	0.37	334.46	0.33 N	5.32 E	0.12
1440.00	1439.90	0.38	325.27	0.50 N	5.22 E	0.06
1470.00	1469.90	0.63	316.63	0.70 N	5.05 E	0.26
1500.00	1499.89	0.73	316.94	0.96 N	4.81 E	0.10
1530.00	1529.89	0.77	321.82	1.26 N	4.55 E	0.07
1560.00	1559.89	0.98	300.17	1.55 N	4.20 E	0.39
1590.00	1589.88	1.07	307.71	1.85 N	3.76 E	0.16
1620.00	1619.88	1.18	323.35	2.27 N	3.36 E	0.33
1650.00	1649.87	1.30	332.15	2.81 N	3.01 E	0.22
1680.00	1679.86	1.37	346.03	3.46 N	2.77 E	0.33
1710.00	1709.85	1.43	356.02	4.18 N	2.65 E	0.25
1740.00	1739.84	1.65	7.07	4.99 N	2.68 E	0.37
1770.00	1769.83	1.95	13.09	5.91 N	2.85 E	0.35

SCIENTIFIC DRILLING CONTROLS,
GT YARMOUTH

Page 3

Directional survey
for

BP DEVELOPMENT LTD.

Job number : 024G 09840783
Well number : BROUGHTON B-1

Meas. Depth	Vert. Depth	Inc. DEG	Direction DEG	Coordinates		D.Leg /030
				Latitude	Departure	
1800.00	1799.81	2.10	9.96	6.95 N	3.06 E	0.19
1830.00	1829.79	1.83	1.49	7.97 N	3.17 E	0.39
1860.00	1859.78	1.60	358.64	8.87 N	3.17 E	0.25
1890.00	1889.77	1.07	12.28	9.56 N	3.22 E	0.62

Slot coordinates : 0.00 N 0.00 E
Total closure : 10.09 metres at N 18.61 E

VERTICAL SECTION CALCULATED FROM CENTRE.

ALL DEPTHS RELATIVE TO R.K.B.

Survey run in 5.5 casing.

Survey referenced to UTM North.

Displacement from platform centre.

VI Drilling Report

SECTION BY SECTION DRILLING SUMMARY

17½" SECTION:

The hole was spudded shortly after midnight on 19th July 1984. During drilling of the 12¼" pilot hole the wellbore fluid was all lost at a depth of 23 m. This was cured by mudding up with a viscous Bentonite pill and the remainder of the section to 46 m was drilled without any problem. Hole inclination at this depth was ½°.

The hole was opened to 17½" with a 17½" bit.

12¼" SECTION:

This section was drilled with two bits and a 90' BHA throughout. The first bit, an HTC XIG, was pulled at 409 m still in the Mercia mudstone. No weight was required on the bit and ROP had to be restricted to 18 m/hr. Losses at a rate of 20 Bbl/hr were encountered at a depth of 152 m; these were cured with a Mica pill. The bit was pulled partly because it had drilled for 23¾ hrs but mainly because it was considered that the mudstone needed a wipe. Overpull on the trip out averaged at 30000 lbs and a large mud ring was found on the stabilisers.

The second bit was used to drill through the Sherwood sandstone down to 824 m. Drilling rate was again controlled to 18 m/hr. and mud weight was kept to a minimum by using the solids-control equipment all the time and not allowing mud to bypass the shaker screens. This bit run was drilled without event, a substantial reduction in ROP after the bit had completed 26¼ hours necessitated pulling out.

The logs confirmed that this depth was 20 m below Top Upper Permian Marl and that the formation was competent enough to set casing in. Heavy losses of 250 Bbl/hr were experienced shortly after logging commenced; these were cured with a 40 Bbl pill comprising 30 lbs/Bbl mixed LCM.

8½" SECTION

The section from the 9¾" shoe at 821 m to the first core point at 1492 m was drilled with three bits (2 x HTC XIG'S and 1 x J22). Drilling parameters were: W.O.B. c. 30000 lbs, R.P.M. 100 with the sealed bearing bits and 80 with the journal bearing bit, flow rate 250 G.P.M. and bit nozzle size three 10's to begin with and two 12's and a blank later on. ROP was c. 18 m/hr. in the siltstone in the Upper Permian but it slowed down to 2 m/hr in the Dolomite/Limestone and the Anhydrite.

Few drilling problems were encountered in the Permian; however problems with tight hole on check trips in the Westphalian Coal measures (top c. 1120 m) necessitated increasing the mud weight to 1.14 SG.

Two 18 m cores were cut without event in the fairly large sand body in the lower Westphalian interval: (1485 m to 1512 m) and the third was cut lower down (from 1568 m to 1578 m).

A DST was carried out across the top sand; the logging run before the test indicated that the hole up until this stage had a continuous $9\frac{1}{2}$ " diameter.

Upon resumption of drilling the mud weight was increased to 1.16 SG to combat heaving shale and connection gas. ROP through the transition from Westphalian to Namurian slowed up to 3.5 m/hr. Core No. 4 was cut through the interval 1629 m to 1643 m.

Core No. 5 was cut from 1657.9 m to 1667.5 m; upon recovery, a wedge of the mudstone in the top of the core showed why it had not been possible to core anymore. Core No. 6 was cut from 1667.5 m to 1685.51 m. Tight hole on trips at this stage necessitated increasing the mud weight to 1.17 SG.

Drilling continued with two more bits a medium hard milled tooth bit (Smiths SVH) and, when there did not appear to be any further likelihood of coring, an HTC J22.

A permeable sand with good oil shows at 1855 m necessitated more coring. Core No. 7 was cut down to 1861.5 m into what appeared to be very hard mudstone. The core barrel was tripped and found to be minus core and core-catcher.

There followed two short runs with milled-tooth bits and the junk sub. The junk was retrieved and cleared away without difficulty but a quantity of Pyrite in the formation made drilling very slow. Both bits (Smiths SVH's) came out after only 11 m and 4 hrs apiece.

A hard-formation milled-tooth bit (HTC J7) was committed; it drilled to 1898 m (top limestone was 1887 m) at an ROP of 1 m/hr. The well was completed with another hard formation, milled-tooth bit with standard bearings (W7R2J) which drilled to 1920 m at a steady 2.5 m/hr.

SUBSEQUENT OPERATIONS:

Upon completion of drilling a full T.D logging operation and a velocity survey (V.S.P.) were carried out. A wiper trip had to be carried out to wipe ledges in the coal measures to facilitate running the HDT.

Thereafter, a fairly extensive DST programme was commenced: two attempts were needed to set the packer for DST 2. The remaining DST's appeared to be mechanically successful. Wiper trips were carried out between DST's 3 and 4 and between DST's 5 and 6. During the second wiper trip the intervals 1660 m to 1675 m and 1903 m to 1920 m had to be reamed out lightly (the hole section had been open for 7 days at this stage).

After the DST programme was finished it was intended to spot a cement plug back to below the Penistone Flags (1490.9 m to 1512.6 m) and run 5½" casing to the top of the plug. The reason for this was the fact that none of the formations below the Penistone had been in the least bit productive. Accordingly OEDP was run into the hole in order to spot the cement plug.

During the trip in, it was decided by P.E. Department that the interval 1854 m to 1860 m should be tested again through casing. The hole was tight on P.O.H., a wiper trip was carried out, the hole was tight from 1908 m back to 1890 m.

5½" casing was run to T.D., major losses (a total of 130 bbls) occurred during displacement of the cement.

After the standard amount of time was spent waiting on cement and lifting BOP's, much time was spent trying to set the casing hanger. Eventually the hanger was changed out and the job was completed successfully.

A CBL/VDL/CCL and a gyromultishot survey were run. The CBL indicated that there was no cement above 1100 m.

The 5½" casing was perforated to 1845 m and an injectivity test was carried out prior to running in to squeeze cement. There was no injectivity at all, so a dry test string was run in order to have definite confirmation. This proved that the formation at 1845 m was sealed off so it was decided to perforate and test the zone of interest (DST 9 from 1854.20 m to 1860.99 m).

Finally, the well was suspended by setting a bridge plug at 1849 m, running in a 2½" kill string to 1418 m and hanging it off with the standard tubing bonnet.

The rig was released at 08.00 on the 9th September 1984.

VII Mud/Completion Fluids Report

WELL: BROUGHTON B-1 RIG: KENTING 36

DISCUSSION BY INTERVALS

17½" HOLE SECTION

This section supplements the Daily Operations log and discusses any points of interest or problems that occurred with possible causes and what remedies were used.

The 17½" Hole Section was drilled with fresh water and viscous Bentonite pills. A pilot hole of 12¼" was initially drilled and subsequently opened up to 17½". Some losses to the formation were remedied by circulating more frequent pills. At 46M the hole was circulated, a slug pumped and pipe pulled with no problems. The 13-3/8" casing was run and cemented at 45M.

Discussion By Intervals (Cont'd)

12 1/4" HOLE SECTION

The cement was tagged at 39M, the annulus pressure tested for 5 mins at 200 psi, and cement drilled out to 46M. Drilling continued with periodic surveys at which time the sandtrap was dumped. Blinding of the 30/40 x 2 shaker screens was eliminated by changing out one of the shakers to 20/30. Cement contamination was treated out with sodium bicarbonate.

At 161M gradual seepage of fluid to the formation began to accelerate. 100 barrels of the Bentonite/CMC mud was isolated and treated with 10 ppb of Fibre Mica. This was circulated with the shakers bypassed only once. Losses then stopped.

The sand trap was again dumped at the next survey at 341M.

The No.1 shale shaker ceased functioning at 270M as the basket had been resting on the edge of a steel airline which finally sheared. The airline was replaced by a flexible equivalent. At the same time the screens were reduced in size to 30/40. At the next survey at 409M, the sandtrap was dumped and the shaker screens further reduced to 40/50 and 50/60. The centrifuge was run at all times and similarly the mud cleaner, but in the desilting mode, with the screen blocked off.

The bit was pulled at 409M and some tightness was experienced. Mud rings were cleared as best as possible to avoid blocking the flowline. The X3A Hughes bit (with nozzles 2 x 13/32nds + 1 14/32nds) was replaced by an XIG (with nozzles 3 x 14/32 nds) in anticipation of drilling the Bunter sandstone.

Penetration rate in the Bunter was controlled with 5 mins circulating at the half way point to kelly down, and with 10 mins circulating at kelly down.

As the need for absolute maximum densities were stipulated, low gel strengths (with accompanying minimum practical yield points) were necessary because full use was made of the bund system. For sufficient settling out of the sandstone solids in the bund, very low gel strengths were essential in order to enable satisfactory re-use of the fluid for recirculation. The shale shakers were deliberately allowed to partially blind to allow a high proportion of the solids to precipitate in the bund, the balance of the fluid being treated by the mud cleaner in desilter mode, and the centrifuge.

The shaker screens were changed down to 30/40 nevertheless as the previous sizes were blinding excessively.

Controlled drilling continued with fluid density below 1.04 and at 775M the circulating system was reduced in size by eliminating the bund. Fluid for the premix was still however, taken from the bund.

Discussion By Intervals (Cont'd)

12½" Hole Section (Cont'd)

At 810M mudstone and siltstone were penetrated signalling the end of the Bunter sandstone and drilling continued to 824M when the bit showed signs of failure. The hole was circulated, and pipe pulled for logging. When the pipe was out of the hole losses to the formation occurred. A 30 pound per barrel mixture of loss circulation material (cellophane, Mica fine and coarse, and Nut Plug fine and coarse) was pumped into the top of the hole and allowed to subside into the thief zone, which was estimated to be at 130 metres. Losses then ceased, the hole was filled again with mud and logging commenced. Two suites were run without problems and casing run and cemented.

BP OIL

WELL: BROUGHTON B-1 RIG: KENTING 36

CONCLUSIONS AND RECOMMENDATIONS

17½" HOLE SECTION

This section was drilled effectively and economically. It is recommended that the same practice of drilling with fresh water and viscous Bentonite slugs if continued for future wells in the area.

Conclusions And Recommendations (Cont'd)

12 1/4" HOLE SECTION

By keeping the density of the fluid at all times below 1.04 in the Bunter Sandstone, by keeping fluid loss below 8 secs, and by ensuring gel strengths in the region of only 2-4, this formation was drilled without problems.

The bund was incorporated into the system successfully and the low gels of the fluid allowed the fine solids to precipitate out before the Sykes pump sucked it back again.

The part of the system which was not diverted into the bund was constantly treated by the mudcleaner in desilter mode, and by the centrifuge. This helped considerably in maintaining correct density.

The requirement for low gel strength meant that low yield points were unavoidable, but the decision to drill at a controlled rate (1 1/2-2 minutes per metre) without halt except for connections and with annular velocities of 27M/M around the pipe, proved to be correct and the hole was cleaned effectively although yield point was often below 10.

The fluid and the method employed to drill this sandstone is satisfactory in a vertical hole such as this, although it is questionable how stable the hole would remain in deviated wells.

BP OIL

WELL: BROUGHTON B-1 RIG: KENTING 36

MATERIALS AND MUD CONSUMPTION

<u>PRODUCT</u>	<u>QUANTITY AND UNIT</u>	<u>COST IN £ STERLING</u>	<u>TOTAL COST IN £ STERLING</u>
<u>17½" HOLE SECTION</u>			
BENTONITE	53 x 25 Kg	6.07	321.71
CAUSTIC SODA	2 x 50 Kg	12.50	<u>25.00</u>
	SECTION TOTAL		<u><u>£ 346.71</u></u>

BP OIL

WELL: BROUGHTON B-1 RIG: KENTING 36

Materials And Mud Consumption (Cont'd)

PRODUCT	QUANTITY AND UNIT	COST IN £ STERLING	TOTAL COST IN £ STERLING
<u>12½" HOLE SECTION</u>			
BENTONITE	52 x 25 Kg	6.07	315.64
CMC HI-VIS	52 x 25 Kg	22.10	1,249.20
CMC LO-VIS	41 x 25 Kg	18.55	760.55
SODA ASH	2 x 50 Kg	7.15	14.30
BICARB	14 x 50 Kg	9.80	137.20
CAUSTIC SODA	11 x 50 Kg	12.50	137.50
IDFLO	16 x 50 kg	11.49	183.84
FLR	20 x 25 Kg	51.94	1,038.80
MICA F	60 x 25 Kg	4.74	284.40
MICA C	17 x 25 Kg	4.74	80.58
NUT PULGE	15 x 25 Kg	5.35	80.25
GELLOPHANE	10 x 15 Kg	5.04	<u>50.40</u>
SECTION TOTAL			<u>£ 4,232.66</u>

BP OIL

WELL: BROUGHTON B-1 RIG: KENTING 36

Materials And Mud Consumption (Cont'd)

PRODUCT	QUANTITY AND UNIT	COST IN £ STERLING	TOTAL COST IN £ STERLING
<u>8½" HOLE SECTION</u>			
BARITE	759 x 50 Kg	4.02	3,051.18
BENTONITE	112 x 50 Kg	6.07	679.84
IDFLR	103 x 25 Kg	51.94	5,349.82
IDFLO	86 x 25 Kg	11.48	987.28
KCL	316 x 50 Kg	5.45	1,722.20
CAUSTIC	30 x 50 Kg	12.50	375.00
BICARB	4 x 50 Kg	9.80	39.20
SODA ASH	30 x 25 Kg	3.58	107.40
IDVIS	11 x 25 Kg	122.00	1,342.00
IDCIDE L	2 x 25 Lt	158.68	317.36
CMC HV	16 x 25 Kg	22.10	<u>353.60</u>
SECTION TOTAL			<u>£14,324.88</u>

BP OIL

WELL: BROUGHTON B-1 RIG: KENTING 36

COST SUMMARY

ACTUAL COST

17½" HOLE SECTION & 13-3/8" CASING

METRES DRILLED:	46M
COST PER METRE:	£7.54
DAYS ON SECTION:	2
COST PER DAY:	£173.36
ENGINEERING COST:	Per Contract
NO. OF M ³ MIXED:	26
COST PER M ³ :	£13.34

INTERVAL COST £346.71

12½" HOLE SECTION & 9-5/8" CASING

METRE DRILLED:	778M
COST PER METRE:	£5.44
DAYS ON SECTION:	6
COST PER DAY:	£705.44
ENGINEERING COST:	Per Contract
NO. OF M ³ MIXED:	197
COST PER M ³ :	£21.49

INTERVAL COST £4,232.66

BP OIL

WELL: BROUGHTON B-1 RIG: KENTING 36

Cost Summary (Cont'd)

ACTUAL COST

8½" HOLE SECTION & 5½" CASING

METRES DRILLED:	1,099
COST PER METRE:	£12.32
DAYS ON SECTION:	22
COST PER DAY:	£615.00
ENGINEERING COST:	-
NO. OF BARRELS MIXED:	
COST PER BARREL:	

INTERVAL COST

£13,540.48 based on days to TD.



INTERNATIONAL DRILLING FLUIDS

Drilling Fluid Properties Record
WATER BASE

WELL NAME BELMONT BI AREA HUNTERSIDE UI

STOCK POINT BRICE Contractor KENTLINE

FLUID SYSTEM Water/CMC

ENGINEERS NEIL REID KPRL BIRD

DATE	DEPTH	FLUID PROPERTIES																				REMARKS	
		RHEOLOGY								FILTRATE				FILTRATE ANALYSIS				RETORT					
		WEIGHT S.G.	F.V. SEC/10T	SAMPLE TEMPO		Y.P. LBS/100 SQ. FT.	GELS	PH	API ml/s	CAKE 320ds	HT HP	PI	MI	PM	CHLORIDES	TOTAL HARDNESS % CALCIUM	% SOLIDS	% OIL	SAND CONTENT	MBT	P.P.S.		P.P.S.W
				A.V. cps	P.V. cps																		
1	13-7	116	1.03	90																		DRILLING FLUID PROPS CHECKING	
2	19-7	112	1.04	50																		OPENED HOLE TO 450' RAN CASING, CEMENTED LOSSES TO FLOWLINE MAINTAINED 15' IN HOLE	
3	20-7	950	1.04	50	19	12	14	4	10.5	8	3			120	300	2.3		TR	12.5			SAVER DOWN & RETURNED CHANGE OF RHEOLOGY CHECKED BY FILTERATION	
4	21-7	415	1.04	47	21	15	12	3	10	7.5	2			1200	100	2.4		TR	10			DRILLING FLUID PROPS CHECKED BY FILTERATION	
5	22-7	730	1.04	40	19	16	10	2	10	7.5	2			1200	100	2.4		1	10			DRILLING FLUID PROPS CHECKED BY FILTERATION	
6	23-7	524	1.04	40	19	16	10	2	10	7.0	2			1200	300	2.3		TR				DRILLING FLUID PROPS CHECKED BY FILTERATION	
7	24-7	524			LOGGING				RUN # CEMENT		4	5	CALCULATED									NO FLOW - RAIN CEMENT 75% OF CASE N.O. CEMENT UP HOLE	
8	25-7	524							NIPPLE UP HOLE'S													DRILLING FLUID PROPS CHECKED BY FILTERATION	
9	26-7	949	1.06	114	20	14	11	2	11	7.8	1			1200	250	3			13.5			DRILLING FLUID PROPS CHECKED BY FILTERATION	
10	27-7	1040	1.08	105	20	15	10	2	10.2	6.2	1			1200	500	4.5			15	15		UP SECTION TO 1000'	
11	28-7	1092	1.09	114	17	12	10	2	9.8	6.3	1			1350	450	5			TR	15		DRILLING FLUID PROPS IFB NO PROBLEMS	
12	29-7	1393	1.10	105	20	16	12	2	10.5	7.0	1			240	500	6			15	15	21	BREAK OUT TO 1000' REVERTER 12.5' IN	
13	30-7	1441	1.12	108	23	11	14	2	9.0	6.0	1			250	600	6			11	12	20		
14	31-7	1492	1.15	141	21	16	10	2	9.0	7.1	1			200	300	6.5			15	12	19	FROM 112' TO 144' NIPPLE UP HOLE	

REMARKS: -



INTERNATIONAL DRILLING FLUIDS

Drilling Fluid Properties Record
WATER BASE

WELL NAME PROVINGTON B1 AREA S HUNTER 110

STOCK POINT BRIER Contractor KENTLAND

FLUID SYSTEM KCL / POLYMER

ENGINEERS NEIL RAY, MARK BACH, STEVE BARNARD

DATE	DEPTH	FLUID PROPERTIES																				REMARKS						
		RHEOLOGY										FILTRATE				FILTRATE ANALYSIS				RETORT								
		WEIGHT	F.V. SEC/QT	SAMPLE TEMP °	A.V.	P.V.	CPS	CPS	Y.P. LBS/100 SQ. FT.		GELS	PH	API ml/s	CAKE 32nds	HT HP	PI	ALKALINITY		CHLORIDES	TOTAL HARDNESS	CALS		% SOLIDS	% OIL	SAND CONTENT	MBT	PPB	P-TASH
									10	0							MI	Pm										
15	2-8	1527	1.14	43	20	15	10	2	4	10	5.4	1	125			4.5	100	6.5	115	10	19							CUT CORE # 1 (100% FINE)
16	3-8	1569	1.15	41	20	15	10	3	4	9.5	6.2	1	2			25.5	100	6.5	115	15	24							DRILL TO 1569 FT CUT CORE # 2
17	4-8	1591	1.15	52	36	26	20	5	4	10	5.8	1	3			25.5	100	6.5	115	12	21							CUT CORE # 3 - 1100 FT CHECK TEST RINGS W/ P PRIOR TO CORING
18	5-8	1551	1.15	80	36	26	20	5	3	10	5.8	1	2			25.5	100	6.5	115	17	20							LOW-WEAR RING
19	6-8	1551	1.14	45	27	30	15	3	5	9.5	6.5	1	2			25	100	6	115	12.5	20							FRESH TEST W/ RING RINGS DRILL
20	7-8	1629	1.16	44	25	19	13	2	4	10	5.8	1	3			30	100	6.5	115	12.5	23							DRILL TO 1629 FT FOR BIT DRILL
21	8-8	1640	1.16	43	22	17	10	2	4	9.5	5.8	1	2			30	100	6.5	11	12.5	22							DRILL TO 1640 FT RILL CUT CORE # 4
22	9-8	1657	1.17	46	23	16	14	3	4	9.5	5.0	1	2			30	100	6.5	11	12.5	22							RILL CUT CORE # 5 FROM RING CUT CORE # 4
23	10-8	1670	1.16	44	23	17	12	2	6	9.5	5.1	1	2			25.5	100	6.5	11	12.5	20							DRILL TO 1670 FT
24	11-8	1706	1.17	48	25	21	14	3	4	9	4.4	1	2			35.5	100	6.5	11	12.5	19							CUT CORE # 6
25	12-8	1766	1.17	46	22	17	11	2	4	9	3.9	1	2			30	100	6.5	11	15	22							DRILL TO 1766 FT FOR BIT
26	13-8	1555	1.16	44	23	13	11	3	4	9.5	4.3	1	2			30	100	6.5	115	12.5	22							DRILL TO 1555 FT (CHECK RING RINGS)
27	14-8	1871	1.17	45	23	16	12	2	4	9.5	5.1	1	2			29	100	6.5	115	12.5	23							CUT CORE # 7 (CUT CORE) RILL TO 1871 FT
28	15-8	1581	1.17	43	20	17	10	2	4	9	5.5	1	2			30	100	6.5	115	12.5	20							FROM CUTTING FLUID RILL & DRILL

REMARKS: -



INTERNATIONAL DRILLING FLUIDS

Drilling Mud Properties Record

MUD SYSTEM GEL/CMC

WELL NAME BROUGHTON B1 AREA HUMBERSIDE U.K.

STOCK POINT BRIGG Contractor KENTING

ENGINEERS NEIL REED, KARA BACH

DATE	DEPTH	MUD PROPERTIES																				OPERATION REMARKS			
		WEIGHT	VISCOSITY					GEL	Filtrate Analysis					RETORT											
			sec/100	A.V. cps	P.V. cps	Y.P. #/100 sq. ft.	10		FLUID LOSS 30 Min cc's	CAKE 32 nds	H.T.H.P. cc's	PH	Cl ⁻ ppm	Ca ⁺⁺ ppm	PT	% OIL	% SOLIDS	% SAND	BENTONITE #/BBL	POTASH #/BBL	POLYMER #/BBL		"N"	"K"	
1984	METRES	S.G.																							
1	18/7	46	1.03	90																					DRILLED PILOT HOLE. OPENING.
2	19/7	46	1.04	50																					OPENED HOLE TO 46M. RAN CASING. CEMENTED.
3	20/7	256	1.04	50	19	12	14	4	14	8	2	-	10.5	1200	360	.8	-	2.3	K	12.5	-	-	-	-	LOSSES TO FORMATION HALTED WITH 18 SX MICA.
4	21/7	415	1.04	47	21	15	12	3	9	7.5	2	-	10	1300	400	.2	-	2.4	TV	10	-	-	-	-	SHAKER DOWN & REPAIRED. CHANGE SCREENS. MUDCLEANER AS DISFILTER. TRIP FOR NEW BIT.
5	22/7	730	1.04	40	19	14	10	2	3	7.5	2	-	10	1200	400	.3	-	2.4	I	10	-	-	-	-	BUND USED IN CIRC. SYSTEM. SCREENS CHANGED. REGULAR SANDPAP PUMPING.
6	23/7	824	1.04	40	19	14	10	2	3	7.0	2	-	10	1200	360	.3	-	2.3	TV		-	-	-	-	DRILLED TO 824 M. POOH. L.C. LOGGING RAMP LCM PILL, LOG TWO RUNS COMPLETE LOGGING OPERATIONS WIPER TRIP - NO PROBLEMS. RUN!
7	24/7	824																							CEMENT 95% CASING. WDC. NIPPLE UP BOP'S.
8	25/7	824																							DRILL OUT SHOW F.CEMENT. LOG OFF TEST EQUIPMENT TO 1.9 S.C.
9	26/7	969	1.06	44	20	14	11	2	3	7.8	1	-	11	16800	250	.32	-	3	.35	-	-	-	-	-	DRILL MUD. WEIGHTING MUD UP SLOWLY WITH BENTONITE.
10	27/7	1040	1.08	45	20	15	10	3	4	6.2	1	-	10.2	15K	550	.2	-	4.5	.15	15	-	-	-	-	BRELLING ANTIWRITERS. TFA - NO PROBLEMS.
11	28/7	1092	1.09	44	17	12	10	2	3	6.3	1	-	9.8	13.5K	450	.12	-	5	TR	15	-	-	-	-	BREAK OVER TO KCL/PATMOR 1245m
12	29/7	1293	1.10	45	20	14	12	2	5	7.0	1	-	10.5	29K	600	.05	-	6	.15	15	21				
13	30/7	1441	1.12	48	23	16	14	2	4	6.0	1	-	9.0	28K	600	.12	-	6	.11	12	20				
14	31/7	1492	1.15	41	21	16	10	2	5	7.1	1	-	9.0	26K	320	.12	-	6.5	.15	12	19				WEIGHT UP MUD FROM 1.12 - 1.14

REMARKS:--

INTERNATIONAL DRILLING FLUIDS

Drilling Fluid & Material Consumption Report

MUD SYSTEM GEL / CMC

WELL NAME BROUGHTON P.I. AREA HUMBERSIDE U.K.

STOCK POINT BRIGG Contractor KENTING 36

ENGINEERS NEIL REED, KARL BAUN

DATE	ESTIMATED DAILY MUD VOLUMES M ³			MATERIALS ADDED TO CONTROL PROPERTIES																	TOTAL COST				
	LOSSES SUB SURFACE	LOSSES SURFACE	VOLUME MUD BUILT	BARITE	BENTONITE	THINNERS			POLYMERS					KCl	CAUSTIC	OTHERS									
									SS100	FLR	OF VIS	ECMC	ECMC	IDFLD			GLYCOL	MICA	SAND	API	NiF	CELLOPHANE	ZnCO ₃		
1984																									
18/7	4	3	26		53																				346.71
19/7					53																				
TOTAL	4	3	26		53																				346.71
20/7	24	14	105		25							13	19				3	14	18						1051.52
21/7	-	49	61		10				6			16	4				4								850.14
22/7	-	-	31		6				14			12	8	4			2		2						1262.44
23/7	20	-	-		11							10	10	6			2	59		15	10				977.52
24/7	-	36	-									1		6											91.04
25/7	9	(RETURN CASING)																							-
26/7	-	20	41		35	10			9					10			2	3	1						845.31
27/7	-	21	-		15	33			6			13		6			14	1	7				6		1227.42
28/7	-	8	30			39											1		2						264.13
29/7		45	29		35				6								65	4		6					
30/7																									
FORWARD																									
ESTIMATED TOTALS																									

REMARKS:- * MATERIALS DAMAGED / WRITTEN OFF

VIII Casing/Cement Record

SUMMARY OF BROUGHTON B-1 CEMENTING OPERATIONS:

13 $\frac{3}{8}$ " CEMENTATION:

This job went well, an excess of 100% over open-hole volume was pumped and the cement was displaced to within one joint of bottom. There were cement returns to surface; all surface returns were pumped out of the cellar and into the bund using the Sykes vacuum pump. This pump did not work very well and did not appear to like pumping rocks and gravel; it would be advisable, where possible, to use the cellar jet to clear the cellar out after running surface casing.

Waiting-on-cement time for the operation was 8 $\frac{1}{4}$ hrs.

9 $\frac{1}{8}$ " CEMENTATION:

An excess of 20% over the integrated caliper volume was pumped for this job. The float cellar was positioned 2 joints above the float shoe.

The job was carried out according to plan; a temporary loss of returns (approximately 10 Bbls) was experienced during mixing and pumping of the Thixotropic Tail slurry. However normal circulation was regained and the job was completed with returns to surface.

Waiting on cement time was 16 hrs; samples of both the lead and the tail slurries were very slow to harden. When the BOP's were lifted; it was found that the cement level had dropped. A top-up job was carried out a day later using $\frac{3}{4}$ " tubing (incidentally, this tubing could not be rammed further than 60 ft down the annulus; this may have been T.O.C. or it may have been a casing collar). The top up job was not very successful as the casing was moving around with all the motion of drilling at the time that it was carried out.

5 $\frac{1}{2}$ " CEMENTATION

Caliper volumes were used to calculate the quantity of cement required for this job. The cement programme was changed shortly before the job to involve using the heavier 1.63 SG extended lead slurry.

The job appeared to go smoothly until the displacement stage when circulation was lost never to be regained. A total of 130 Bbls was lost. Because a cased-hole DST was intended the success (or otherwise) of the cement job had to be established; a CBL was carried out and it showed that there was little or no cement above 1100 m and the cement, there was, below that was very poor.

The casing was perforated at 1845 m in order to carry out remedial work, however injectivity and dry testing indicated a perfect seal across this point so no remedial work was required. The recommendation for the future would be to use a lower weight (1.38 SG) lead slurry or, if necessary, Thixotropic cement.

CASING AND CEMENTING.

WELL No. BROUGHTON B-1

CASING SIZE	13 $\frac{1}{8}$ "	9 $\frac{1}{2}$ "	5 $\frac{1}{2}$ "				
Weight (lb/ft)	68	36	17				
Type of Casing	BUTTRESS J55	BUTTRESS J55	BUTTRESS J55				
Number of Joints	3 + PUP	67	167				
Shoe Depth (m BRT)	45	821	1920				
D.V./Hanger Depth	-						
CEMENTING (SLURRY VOLUMES)							
Spacer/pre flush (bbls)							
S.G.							
Additives (gal/sk)							
Top of Cement (Annuli)	CELLAR FLOOR (F)	?	?				
1st STAGE (bbls)	36.6	105	183				
Type of Cement	NEAT G	EXTENDED G	EXTENDED G				
S.G.	1.9	1.38	1.63				
Additives (gal/sk)	D77 @ 0.88	D75 @ 0.6 D75 @ 0.37	D75 @ 0.3 D77 @ 0.37 D81 @ 0.05				
TAIL IN (bbls)		90	130				
Type of Cement		THIXO G	G NEAT				
S.G.		1.78	1.90				
Additives (gal/sk)		D111 @ 0.8 D77 @ 0.57	D81 @ 0.04 D80 @ 0.2				
2nd STAGE (bbls)							
Type of Cement							
S.G.							
Additives (gal/sk)							
TAIL IN (bbls)							
Type of Cement							
S.G.							
Additives (gal/sk)							
Displacement (bbls)							

IX Bit Record

BP BIT RECORD

AREA: UK LAND

WELL NO.	BROUGHTON B1	RIG RATE #/HR	405	PUMP MAKE/TYPE	NATIONAL 8-P-80
RIG	KENTING 36E	TRIP TIME/1000m	4.516	OPERATOR	BP

Run Number		21	22	23	24	25	26	27	28						
Bit Number		12	11RR	13	14	15	16	9RR	9RR						
Size (inches)		8½"	8½"	8½"	8½"	8½"	8½"	8½"	1						
Make		HTC	CHR	SMITH	SMITH	HTC	HTC	HTC	SAME						
Type		C22	C22	SVH	SVH	J7	W7R2J	XIG	1						
Serial No.		310LK	154125	XB1956	XB2955	523FK	90856	897RP							
IADC Code		5-1-7		7-1-5	2-1-5	3-1-7	3-2-1	1-3-4							
Bear. (R) (S) (J) Lub. (N)															
Weight on Bit (k lbs)		30	18	30*	35	37	37	-							
R.P.M.		65	60	100	100	80	120	-							
Depth Out (m)		1855	1861.5	1872	1876	1898	1970	1920							
Hours (rot. only)		18½	6(25½)	11	3	20	9½	-(1½)							
Metres		94	3½(23½)	6½	4	22	22	-(8)							
R.O.P. (m/hr)		5	1.6	1.76	1.33	1.1	2.25								
Teeth															
Cone	Row	Wear													
			2		8	8	6	2	2						
Bearing															
Seal	Clearance	Wear													
			2	10%	4	2	2	7	1						
Cost/m (£)		137		1444	1448	546	345								
Broken Teeth/Inserts %															
Gauge (ins)		I	I	1/8	1/16	1/32	I	I							
% HHP Bit/HHP/in ²		79		79	79	79	65								
Nozzles		17	17		12	12	12	12	11	11	14	14			
1	2	3	4		BL		BL		BL		11		14		
Flow Rate (G.P.M.)		254	254	254	254	254	254	254	254						
Pump Pressure (PSI)		1500	700	1500	1500	1500	1150	850							
Overbalance (PSI)															
Pore Pressure (S.G.)															
Mud Type		KCL POLY	KCL PLOY	KCL POLY	KCL POLY	KCL POLY	KCL POLY	KCL POLY	KCL POLY						
Mud Weight (S.G.)		1.16	1.16	1.17	1.17	1.16	1.17	1.19							
P.V. (cp)	Y.P. (100 lbs/ft ²)	15	10	15	10	17	11	17	11	19	15	70	11	16	11
Solids %	Sand %	6.5	0.15	0.5	0.15	6.5	0.15	6.5	0.15	6.0	0.15	6.5	0.15	6.5	0.15
Lithology		MDST SST	SST 0.6 m MDST		MDST PYRITE	MDST LST	LST	-							
Completed By		DJH	DJH	DJH	DJH	DJH	DJH								
Comments		PULLED TO CUT CORE 7	PULLED OWING TO V. SLOW R.O.P. IN MDST	DRILLING ON JUNK (CORE CATCHER)	SLOWED UP BY PYRITE	PYRITE FOLLOWED BY HARD MUDSTONE	DRILLED TO T.D. BEARINGS WERE SLACK AT START	WIPER TRIP	NO. OF WIPER TRIPS						

x Bottom Hole Assembly Record

WELL No :

BOTTOM HOLE ASSEMBLY RECORD

HOLE SIZE	BOTTOM HOLE ASSEMBLY	DEPTH IN - OUT	COMMENTS
1	B/NBS/8"DC/SS/8"DC/SS/8"DC	Surface - 46	12 $\frac{1}{2}$ Pilot Hole
2	As above	Surface - 46	17 $\frac{1}{2}$ Hole Opening
3	B/NBS/2x8"DC/SS/8"DC/SS/3x8"DC/X-O/10x6 $\frac{1}{2}$ DC/X-O/J/X-O/2x6 $\frac{1}{2}$ DC/X-O/HWDP	46 - 409	12 $\frac{1}{2}$
4	B/BS/2x8"DC/SS/8"DC/SS/3x8"DC/X-O/10x6 $\frac{1}{2}$ DC/X-O/J/X-O/2x6 $\frac{1}{2}$ DC/X-O/12xHWDP/H.S.	409 - 824	12 $\frac{1}{2}$
5	B/BS/1x6 $\frac{1}{2}$ DC/SS/6 $\frac{1}{2}$ DC/SS/6 $\frac{1}{2}$ DC/SS/10x6 $\frac{1}{2}$ DC-J/2x6 $\frac{1}{2}$ DC/X-O/12xHWDP/H.S.	824 - 973	8 $\frac{1}{2}$
6	As above 5	973 - 1067	8 $\frac{1}{2}$
7	As above 5	1067 - 1492	8 $\frac{1}{2}$
8	CB/X-O/13x6 $\frac{1}{2}$ DC/J/2x6 $\frac{1}{2}$ DC/X-O/12xHWDP/H.S.	1492 - 1510	Core 1
9	CB/CIRC SUB/X-O/13x6 $\frac{1}{2}$ DC/J/2x6 $\frac{1}{2}$ DC/X-O/12xHWDP/H.S.	1510 - 1528	Core 2
10	B/BS/6 $\frac{1}{2}$ DC/SS/6 $\frac{1}{2}$ DC/SS/6 $\frac{1}{2}$ DC/SS/10x6 $\frac{1}{2}$ DC/J/2x6 $\frac{1}{2}$ DC/X-O/12xHWDP/H.S.	1528 - 1569	8 $\frac{1}{2}$
11	CB/CIRC SUB/X-O/13x6 $\frac{1}{2}$ DC/J/2x6 $\frac{1}{2}$ DC/X-O/12xHWDP/H.S.	1568 - 1578	Core 3
12	B/BS/6 $\frac{1}{2}$ DC/SS/6 $\frac{1}{2}$ DC/SS/6 $\frac{1}{2}$ DC/SS/10x6 $\frac{1}{2}$ DC/J/2x6 $\frac{1}{2}$ DC/X-O/12xHWDP/H.S.	WIPER TRIP (1580)	DRILLED 2m IN ERROR
13	As bit run no. 12	1580 - 1620	POH for bit
14	Ditto - "Drilling BHA 30.60.90"	1620 - 1628	POH to Core
15	CB/CIRC SUB/X/O/DC/STAB/DC/STAB/DC/STAB/DC/STAB/10x6 $\frac{1}{2}$ DC/JAR/X/O/2x6 $\frac{1}{2}$ DC/X/O/12x4 $\frac{1}{2}$ "HWDP/HYDRIL SUB (Casing BHA with stabilizers)	1628 - 1693	Core 4 (left stabilizers in BHA)
16	Drilling BHA 30-60-90	1643 - 1656.5	Pulled to core
17	"Coring BHA with stabilizers"	1656.5 - 1651.95	Jammed core
18	"Drilling BHA 30-60-90"	1657.95 - 1667.51	Gauged stabilizers on RIH-1/16, 1/16, 1/32
19	"Coring BHA with stabilizers"	1667.51 - 1685.51	Core 6
20	"Drilling BHA 30-60-90"	1685.51 - 176	

WELL N^o :BOTTOM HOLE ASSEMBLY RECORD

HOLE SIZE	BOTTOM HOLE ASSEMBLY	DEPTH IN -OUT	COMMENTS
21	Bit/Junk sub/Bit sub/"30-60-90"	1761 - 1855	Ran junk sub to fish gauge inserts from previous bit.
22	"Coring BHA with stabilizers"	1855 - 1861.5	Dropped core and catcher.
23	Bit/Junk sub/"Drilling BHA 30-60-90"	1861.5 - 1872	Fished & cleared junk.
24	Same	1872 - 1876	Fished & drilled formation containing pyrite.
25	"Drilling BHA 30-60-90"	1876 - 1898	Hard formation pyrite
26	Same	1898 - 1920	Limestone to TD

XI Formation Leak-Off Test Results

FORMATION LEAK-OFF TEST RESULTS

Well No : BROUGHTON B1


TEST NUMBER	1	2	3	4
DATE	26.7.84			
DEPTH (m TVD. BRT.)	826			
CASING SIZE (inches)	9 $\frac{5}{8}$ "			
SHOE DEPTH (m BRT.)	821			
SURFACE PRESSURE psi	1100			
MUD WEIGHT S.G.	1.04			
LEAK OFF PRESSURE psi	2320			
GRADIENT TO R.T. psi / ft	0.86			
MAXIMUM MUD WEIGHT S.G.	1.98			

XII Well Time Analysis

BROUGHTON B1 TIME ANALYSIS

OPERATION	CUMULATIVE TOTAL (HRS)	PERCENTAGE OF TOTAL
MOVE/PREPARE TO SPUD	14½	1.12
DRILLING	307	23.66
REAMING	123	9.48
CONDITION MUD/HOLE	62¼	4.80
TRIPPING	229¼	17.67
RIG SERVICE	10¼	0.79
DEVIATION SURVEY	8	0.62
BOP's NIPPLE UP/DOWN	21¾	1.68
BOP TESTS	11½	0.88
BLOCKLINE	2¾	0.21
CORING	78¾	6.07
LOGGING	18¾	1.45
CASING	41¾	3.22
WAIT ON CEMENT	10¾	0.83
LEAK-OFF TESTS	1	0.08
D.S.T.	372¾	24.87
COMPLETION	1	0.08
REPAIRS	2¼	0.21
DELAYS AND MISC	(29¾)	2.29
	1252	100.00


BROUGHTON - B-1 TIME ANALYSIS PIE CHART

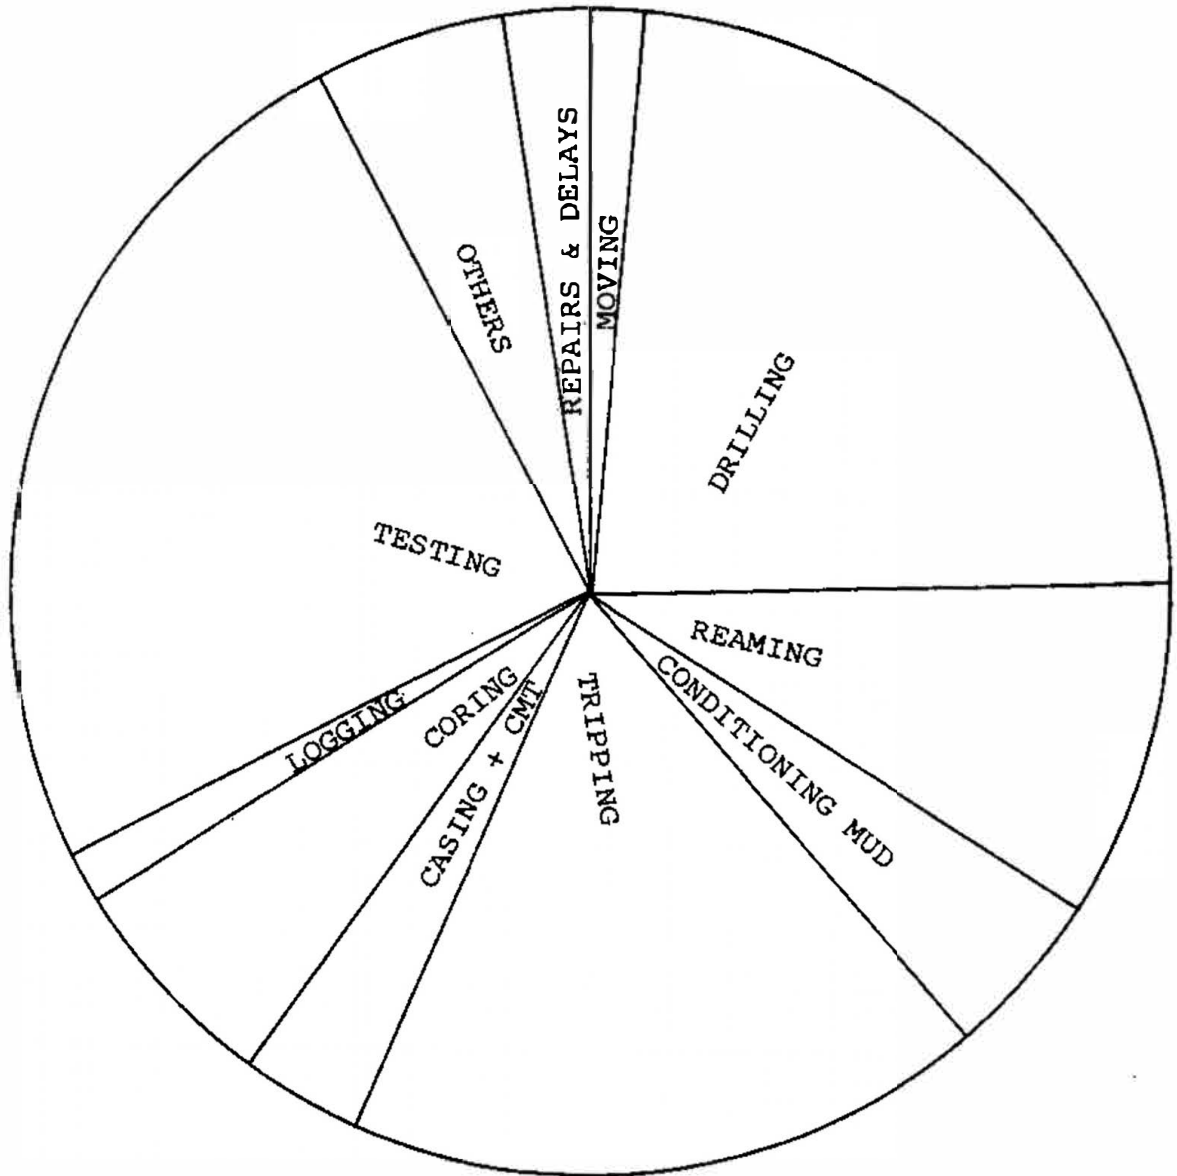

XIII Time VS Depth Plot

PROUGHTON B - 1

TIME - DEPTH CURVE

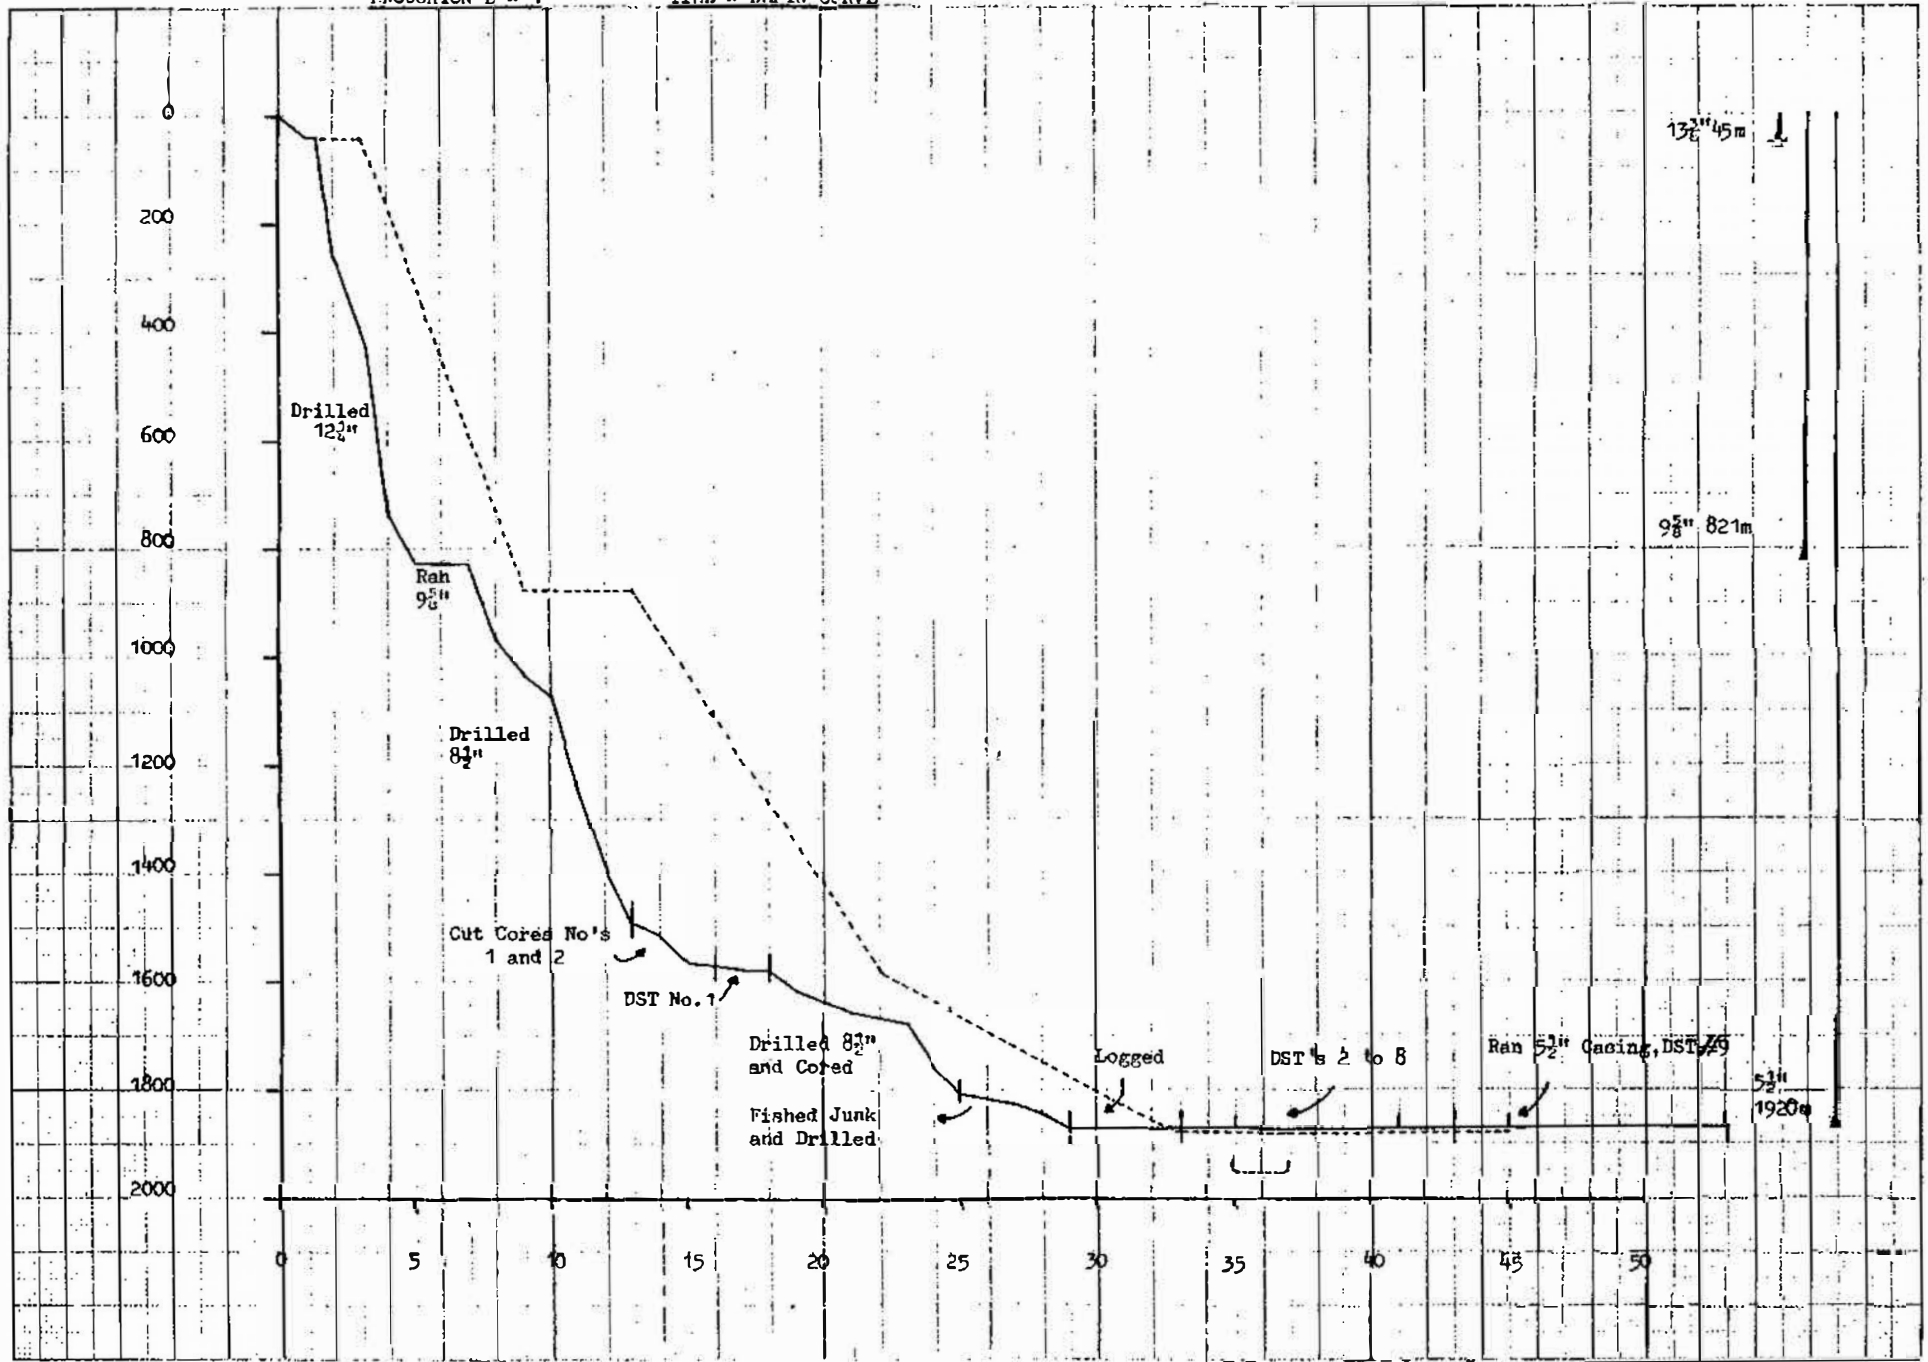

XIV Coring/Perforation Records

CORING RECORD

Well No. BROUGHTON B1

CORE No.	DATE	CORE HEAD	INTERVAL	m	HOURS	R.O.P.	RECOVERY		BARREL LENGTH	COMMENTS
							m	%		
1	1.8.84	C22 (116493)	1492 m - 1510 m	18 m	8 $\frac{3}{4}$	2.06m/hr	18	?	18	
2A	1/2.8.84	C22 (116493)	1510 m - 1528 m	18 m	8 $\frac{1}{2}$	2.12m/hr	18	?	18	
3	3.8.84	C22 (116493)	1568.57 m - 1578.22 m	9.65 m	7 $\frac{1}{2}$	1.29m/hr	9.65		18	
4	7/8.8.84	C22 (116493)	1629.28 m - 1643 m	13.72 m	16 $\frac{1}{4}$	1.18m/hr	13.72	100	18	
5	9.8.84	C22 (154125)	1656.5 m - 1658.25 m	1.75 m	5 $\frac{1}{4}$	0.28	1.62	92	18	0.6 m shale (upper section of core) had a longitudinal fracture which appeared to form a wedge and jam the core.
6	10.8.84	C22 (154125)	1667.51 m - 1685.51 m	18 m	14 $\frac{1}{2}$	1.24m/hr	18	100	18	
7	13.8.84	C22 (154125)	1855 m - 1861.5 m	6.5 m	6	1.08m/hr	0	0	18	ROP through approx 6m SST was 2m/hr - very slow through last 0.5m MDST however. On POH - found that both core and catcher had been lost.

CORING REPORT

OPERATOR: B.P.
RIG: Kenting Rig 36
WELL: Broughton 1
DATE: 1.8.84 - 13.8.84

CORE NO. 1: 1492m - 1510m

Interval Cored: 18m
Interval Recovered: 18m (100% Recovery)
Bit: Norton Christensen C22 Serial No.116493
Penetration Rate: 18m in 6 hours = 3m/hr
Formation Description: -
Footage on Bit: 18m
Operating Parameter: 60 RPM; 252 GPM; 18 k.lb

CORE NO. 2: 1510m - 1528m

Interval Cored: 18m
Interval Recovered: 18m (100% Recovery)
Bit: Norton Christensen C22 Serial No. 116493
Penetration Rate: 18m in 8.5 hours = 2.1m/hr
Formation Description: -
Footage on Bit: 36m
Operating Parameter: 60 RPM; 252 GPM; 18 k.lb

CORE NO. 3: 1568.5m - 1578.5m

Interval Cored: 10m
Interval Recovered: 10m (100% Recovery)
Bit: Norton Christensen C22 Serial No.116493
Penetration Rate: 10m in 7.5 hours = 1.3m/hr
Formation Description: -
Footage on Bit: 46m
Operating Parameter: 60 RPM; 250 GPM; 18 k.lb

CORE NO. 4: 1629.3m - 1643.5m

Interval Cored: 14.2m
Interval Recovered: 14.1m (99% Recovery)
Bit: Norton Christensen C22 Serial No.116493
Penetration Rate: 14.2m in 15.47 hours = 0.92m/hr
Formation Description: -
Footage on Bit: 60.2m
Operating Parameter: 60 RPM; 250 GPM; 18 k.lb

CORE NO. 5: 1656.5m - 1658.25m

Interval Cored: 1.75m
Interval Recovered: 1.74m (99% Recovery)
Bit: Norton Christensen C22 Serial No. 1431121
Penetration Rate: 1.75m in 4 hours = 0.44m/hr
Formation Description: -
Footage on Bit: 1.75m
Operating Parameter: 60-100 RPM; 250 GPM; 18 k.lb

CORE NO. 6: 1667m - 1685.5m

Interval Cored: 18m
Interval Recovered: 18m (100% Recovery)
Bit: Norton Christensen C22 Serial No.1431121
Penetration Rate: 18m in 15 hours = 1.2m/hr
Formation Description: -
Footage on Bit: 19.75m
Operating Parameter: 60 RPM; 250 GPM; 18 k.lb

CORE NO. 7: 1855m - 1861.5m

Interval Cored: 6.5m
Interval Recovered: 0
Bit: Norton Christensen C22 Serial No.1431121
Penetration Rate: 6.5m in 2.5 hours = 2.6m/hr
Formation Description: -
Footage on Bit: 26.35m
Operating Parameter: 60 RPM; 250 GPM; 18 k.lb

CORE HEAD PERFORMANCE

1. Norton Christensen C22
Serial No. 116493

Size: 8½" x 4"
Total Footage Cored: 60.2m
Total Footage Recovered: 60.1m
Percentage Recovery: 100%
Average R.O.P.: 1.6m/hour
Condition: 85% worn

2. Norton Christensen C22
Serial No. 1431121

Size: 8½" x 4"
Total Footage Cored: 26.35m
Total Footage Recovered: 19.75m
Percentage Recovery: 75%
Average R.O.P.: 1.2m/hr.
Condition: -

CORING LOG

NEPTON CHRISTENSEN
Drilling Products

CORE NO: TWO

KIRKSHILL ROAD / KIRKSHILL INDUSTRIAL ESTATE / DYCE / ABERDEEN AB2 0ES
PHONE: (0224) 79-2555 (4 lines) / TELEX: 73385

Service Engineer: **TOM GREIG**
Company: **B.P.**
Contract: **KENTING RIS# 36**
Sketch/Well No.: **BROUGHTON #1**
Field: _____ Location: _____
Hole Size: **8 1/2**
Formation Name: _____
Formation Type: _____
Mud Wt.: **1.15** Mud Type: _____ Vls: **41**

Date: **2nd AUGUST, 1984**
C/B Size: **6 1/2" L** Length: **19.9m**
Bit No.: **11649.3**
Size: **8 1/2** Type: **G.22**
Previous footage on bit: **RE-RUN**
This core: **18m**
Total footage on bit: _____
Bit Cond. Before: _____ After: **1520**
Pump Pressure: **680** Line Size: **5 1/2** Stroke: **100** Hole Angle: _____

Rotating time: **8 1/2 m. 02.1 m/hr**
Interval Corod. Finish: **1528**
- Start: **1510**
Footage Corod.: **18m**
Core Recovery: **100**
% Recovery: **100**
Comments: _____

NO METERS COROD	NO FEET COROD	DEPTH	TIME	PENETRATION RATE MINUTES PER						OPERATING CONDITIONS			TORQUE	
				2	3	4	5	6	7	PSI	WIGHT	ROTATING RPM		FLUID GPM
0	0	0	1510								5000	45	252	
0.25	0.2	1	1510											
0.50	0.4	2	11											
0.75	0.6	3	52											
1.00	0.8	4	12							18000	60			
1.25	1.0	5	32											
1.50	1.2	6	13											
1.75	1.4	7	1110											
2.00	1.6	8	14											
	1.8	9	66											
	2.0	10	15											
2.75	2.2	11	19											
3.00	2.4	12	16											
3.25	2.6	13	32											
3.50	2.8	14	17											
3.75	3.0	15	52											
4.00	3.2	16	18											
4.25	3.4	17	20											
4.50	3.6	18	19											
4.75	3.8	19	11											
5.00	4.0	20	1520											
5.25	4.2	21	10											
5.50	4.4	22	21											
5.75	4.6	23	30											
6.00	4.8	24	22											
6.25	5.0	25	56											
6.50	5.2	26	23											
6.75	5.4	27	19											
7.00	5.6	28	24											
7.25	5.8	29	50											
7.50	6.0	30	25											
7.75	6.2	31	20											
8.00	6.4	32	26											
8.25	6.6	33	55											
8.50	6.8	34	27											
8.75	7.0	35	20											
9.00	7.2	36	1528							18000				
9.25	7.4	37												
9.50	7.6	38												
9.75	7.8	39												
10.00	8.0	40												
10.25	8.2	41												
10.50	8.4	42												
10.75	8.6	43												
11.00	8.8	44												
11.25	9.0	45												
11.50	9.2	46												
11.75	9.4	47												
12.00	9.6	48												
12.25	9.8	49												
12.50	10.0	50												
12.75	10.2	51												
13.00	10.4	52												
13.25	10.6	53												
13.50	10.8	54												
13.75	11.0	55												
14.00	11.2	56												
14.25	11.4	57												
14.50	11.6	58												
14.75	11.8	59												
15.00	12.0	60												



CORING LOG

CORE NO: THREE

KIRKILL ROAD / KIRKILL INDUSTRIAL ESTATE / DYCE / ABERDEEN AB2 0ES
 PHONE: (0224) 73-5555 (4 lines) / TELEX: 73585

Service Engineer: TOM GREIG
 Company: B.P.
 Contractor: KENTING R15-36
 Drilling Unit No.:
 Field: Location:
 Hole Size: 8 1/2
 Formation Name:
 Automation Type:
 Mud Wt: 1.15 Mud Type: Via: 40

Date: 3rd AUGUST 1984
 C/B Size: 6 1/4 Length: 19.9m
 Bit No.: 116493
 Size: 8 1/2 Type: C22
 Previous footage on bit: RE-RUN
 This core: 10m
 Total footage on bit:
 Bit Cond. Before: 15% After: 20%
 Pump Pressure: 650 Liner Size: 5 1/2 Stroke: 100 Hole Angle:

Rotating time: 7: R.A.D.P. 7/14
 Interval Core: From 1578.5
- Start 1528.5
 Footage Core: 10m
 Core Recovery:
 % Recovery:
 Comments:

ID METERS CORED	NO FEET CORED	INTERVAL	TIME	PENETRATION RATE MINUTES PER		OPERATING CONDITIONS			TORQUE	
				2	3	PSI	WEIGHT	ROTATING RPM		FLUID GPM
0	0	0	1568.5	0710						
0.25	0.2	1	69	20			5-7		250	
0.50	0.4	2	5	30			18000	60		
0.75	0.6	3	70	59						
1.00	0.8	4	5	09						
1.25	1.0	5	71	18						
1.50	1.2	6	5	25						
1.75	1.4	7	72	35						
	1.6	8	5	50						
	1.8	9	73	02						
2.00	2.0	10	5	20						
2.75	2.2	11	74	30						
3.00	2.4	12	5	45						
3.25	2.6	13	75	08						
3.50	2.8	14	5	40						
3.75	3.0	15	76	10						
4.00	3.2	16	5	00						
4.25	3.4	17	77	16						
4.50	3.6	18	5	38						
4.75	3.8	19	78	25			18000	60	250	
5.00	4.0	20	1578.5	450						
5.25	4.2	21								
5.50	4.4	22								
5.75	4.6	23								
6.00	4.8	24								
6.25	5.0	25								
6.50	5.2	26								
6.75	5.4	27								
7.00	5.6	28								
7.25	5.8	29								
7.50	6.0	30								
7.75	6.2	31								
8.00	6.4	32								
	6.6	33								
	6.8	34								
8.75	7.0	35								
9.00	7.2	36								
9.25	7.4	37								
9.50	7.6	38								
9.75	7.8	38								
10.00	8.0	40								
10.25	8.2	41								
10.50	8.4	42								
10.75	8.6	43								
11.00	8.8	44								
11.25	9.0	45								
11.50	9.2	46								
11.75	9.4	47								
12.00	9.6	48								
12.25	9.8	49								
12.50	10.0	50								
12.75	10.2	51								
13.00	10.4	52								
13.25	10.6	53								
13.50	10.8	54								
13.75	11.0	55								
14.00	11.2	56								
14.25	11.4	57								
14.50	11.6	58								
14.75	11.8	59								
15.00	12.0	60								

P.O.B.H. BECAUSE OF
 SLOW R.O.P.

CORING LOG



CORE NO: FOUR

KIRKILL ROAD / KIRKILL INDUSTRIAL ESTATE / DYCE / ABERDEEN AB2 0ES
 PHONE: (0224) 72-2555 (4 lines) / TELEX: 73365

Service Engineer TOM GREIS
 Company B.P.
 Contractor KENTING R19 36
 Month/Well No. BROUGHTON #1
 Field _____ Location _____
 Hole Size 8 1/2
 Formation Name _____
 Formation Type _____
 Mud/PW 1:1.5 Mud Type _____ Vis 4.3

Date 7th AUGUST 1984
 C/B Size 6 1/2 x 6 Length 19.9m
 Bit No. 116493
 Size 8 1/2 Type C 22
 Previous footage on bit RE: RUN
 This core _____
 Total footage on bit _____
 Bit Cond. Before _____ After _____
 Pump Pressure 625 Liner Size 5 1/2 x 8 1/2 Stroke 160 Hole Angle _____

Rotating direction AAOP
 Interval Corer - Finish 1629.28
 - Start 1629.28
 Footage Corer 14.2
 Core Recovery 14.1
 % Recovery 99%
 Comments _____

NO. METRES CORER	NO. FEET CORER	INTERVAL	TIME	PENETRATION RATE MINUTES PER						OPERATING CONDITIONS				TORQUE								
				1	2	3	4	5	6	7	8	9	10		15	20	30	40	50	PSI	WEIGHT	ROTATING RPM
0	0	0	1619.28	1666													600	5-7	60	250		
0.25	0.2	1	5	56													625	11000	60	250		
0.50	0.4	2	1630	1700																		
0.75	0.6	3	5	08																		
1.00	0.8	4	31	16																		
1.25	1.0	5	5	20																		
1.50	1.2	6	32	24																		
1.75	1.4	7	5	28																		
	1.6	8	35	32																		
	1.8	9	5	36																		
2.50	2.0	10	36	40																		
2.75	2.2	11	5	46																		
3.00	2.4	12	55	48																		
3.25	2.6	13	5	63																		
3.50	2.8	14	36	110																		
3.75	3.0	15	5	120																		
4.00	3.2	16	57	126																		
4.25	3.4	17	6	2138																		
4.50	3.6	18	38	2260																		
4.75	3.8	19	5	2335																		
5.00	4.0	20	39	238																		
5.25	4.2	21	5	2766																		
5.50	4.4	22	40	2706																		
5.75	4.6	23	5	2738																		
6.00	4.8	24	41	2330																		
6.25	5.0	25	5	2430																		
6.50	5.2	26	42	2538																		
6.75	5.4	27	5	2745																		
7.00	5.6	28	43	2726																		
7.25	5.8	29	5	2812																		
7.50	6.0	30																18000	60	250		
7.75	6.2	31																				
8.00	6.4	32																				
	6.6	33																				
	6.8	34																				
8.75	7.0	35																				
9.00	7.2	36																				
9.25	7.4	37																				
9.50	7.6	38																				
9.75	7.8	39																				
10.00	8.0	40																				
10.25	8.2	41																				
10.50	8.4	42																				
10.75	8.6	43																				
11.00	8.8	44																				
11.25	9.0	45																				
11.50	9.2	46																				
11.75	9.4	47																				
12.00	9.6	48																				
12.25	9.8	49																				
12.50	10.0	50																				
12.75	10.2	51																				
13.00	10.4	52																				
13.25	10.6	53																				
13.50	10.8	54																				
13.75	11.0	55																				
14.00	11.2	56																				
14.25	11.4	57																				
14.50	11.6	58																				
14.75	11.8	59																				
15.00	12.0	60																				

CORING LOG



CORE NO: SEVEN

KIRKILL ROAD / KIRKILL INDUSTRIAL ESTATE / DYCE / ABERDEEN AB2 0ES
 PHONE: (0224) 72-2555 (4 lines) / TELEX: 73385

Service Engineer **TOM GREIG**
 Company **B.P.**
 Contractor **KENTINS RIS 36**
 Block/Wall No **BROUGHTON 1**
 Field _____ Location _____
 Hole Size **8 1/2**

Date **13th AUGUST, 1984**
 C/B Size **6 1/4** Length **19.9M**
 Bit No **156125 (1431121)**
 Size **8 1/2** Type **C.22**
 Previous footage on bit **RE-RUN**
 This core **6.5M**
 Total footage on bit _____
 Bit Cond. Before _____ After _____
 Pump Pressure **680** Line Size **5 1/2** Strokes **100** Hole Angle _____

Rotating time **2.5** R.O.P. _____
 Interval Cored - Finish **1861.5**
 - Start **1855**
 Footage Cored **6.5M**
 Core Recovery **0**
 % Recovery **0**
 Comments: _____

Formation Name _____

Formation Type _____

Mud-Wt. **1.14** Mud Type _____

Via **41**

DEPTH (M)	DEPTH (FT)	TIME (MIN)	TIME (HRS)	PENETRATION RATE (M/HR)	OPERATING CONDITIONS				TORQUE
					PSI	WGT (LBS)	ROTATING RPM	FEED (CM)	
0	0	0							
0.25	0.2	1		1855	1260	600	5000	60	250
0.50	0.4	2		1856	1300	700	18,000	60	250
0.75	0.6	3		1857	1316				
1.00	0.8	4		1858	1326				
1.25	1.0	5		1859	1340				
1.50	1.2	6		1860	1405				
1.75	1.4	7		1861	1436				
2.00	1.6	8		1861.5	1526				
	1.8	9							
	2.0	10							
2.75	2.2	11							
3.00	2.4	12							
3.25	2.6	13							
3.50	2.8	14							
3.75	3.0	15							
4.00	3.2	16							
4.25	3.4	17							
4.50	3.6	18							
4.75	3.8	19							
5.00	4.0	20							
5.25	4.2	21							
		22							
5.75	4.6	23							
6.00	4.8	24							
6.25	5.0	25							
6.50	5.2	26							
		27							
7.00	5.6	28							
7.25	5.8	29							
7.50	6.0	30							
7.75	6.2	31							
8.00	6.4	32							
8.25	6.6	33							
	6.8	34							
	7.0	35							
9.00	7.2	36							
9.25	7.4	37							
9.50	7.6	38							
9.75	7.8	39							
10.00	8.0	40							
10.25	8.2	41							
10.50	8.4	42							
10.75	8.6	43							
11.00	8.8	44							
11.25	9.0	45							
11.50	9.2	46							
11.75	9.4	47							
12.00	9.6	48							
12.25	9.8	49							
12.50	10.0	50							
12.75	10.2	51							
13.00	10.4	52							
13.25	10.6	53							
13.50	10.8	54							
13.75	11.0	55							
14.00		56							
14.25	11.4	57							
14.50	11.6	58							
14.75	11.8	59							
15.00	12.0								

P.O.O.H. DUE TO
 SLOW R.O.P. (MUDSTONE)
 CORE WAS CONTINUED IN
 BARREL BUT BROKE CORE
 30CM HIGH BR REP
 INSISTED ON GOING BACK
 FOR SAME WITH W.O.B
 + ROTARY CORE-CATCHER
 SNAPPED + LOST CORE.
 THIS WAS AGAINST
 MY RECOMMENDATIONS

47 1/2

PERFORATION RECORD

RUN Nº	DATE	INTERVAL PERFORATED (m)	METRES PERF.	Nº OF GUNS	TIME TAKEN (hours)	REMARKS
5A	3/9/84	1845.3 - 1845.0	0.3	1(4 shots)	2.25	CCL changed out due to weak response while RIH.
6B	5/9/84	1860.9 - 1856.33	4.57	1	1.25	Select fire switch failure - bottom gun only fired.
6B	5/9/84	1856.33 - 1854.2	2.13	1	2.0	


XV Wireline Logs

WIRELINES LOGS

<u>Run No.</u>	<u>Date</u>	<u>Log</u>	<u>Depth Interval</u>	<u>BHT</u>	<u>Comments</u>
					<u>Welex Logs</u>
1A	23/07/84	BHC-SONIC/GR	Surface to 813.5m	93 ^o F	Sonic 28.0
1A	24/07/84	X-Y-CAL-DRIFT SURVEY	28.0 to 813.5m	93 ^o F	Welex Log
					<u>Gearhart</u>
2B	04/08/84	DIL/BHC-SONIC/GR/CAL	795.0 to 1580	117 ^o F	Caliper reading 0.1" high, tool hanging up 1011m to 1437m
3A	17/08/84	DLL/MSFL/GR	810 to 1919.5	118 ^o F	Overpull 1420m 1450 bbls
3A	17/08/84	CNL/CD/GR	800 to 1917.5	120 ^o F	
3C	17/08/84	BHC-SONIC/GR	810 to 1914.5	118 ^o F	
3A	17/08/84	FE-DIPMETER/GR	810 to 1914.0	119 ^o F	Due to bad hole conditions pad #1 was broken at 1397m (2000 lbs overpull). Capiler was closed very often at washouts (1000 lbs overpull).
					<u>Tesel Log</u>
4B	18/08/84	6 ARM-DIPMETER	821.5 to 1918.3	131 ^o F	Temp. at 1910/m

XVI Well Diagrams

BROUGHTON B-1 SUSPENSION DIAGRAM

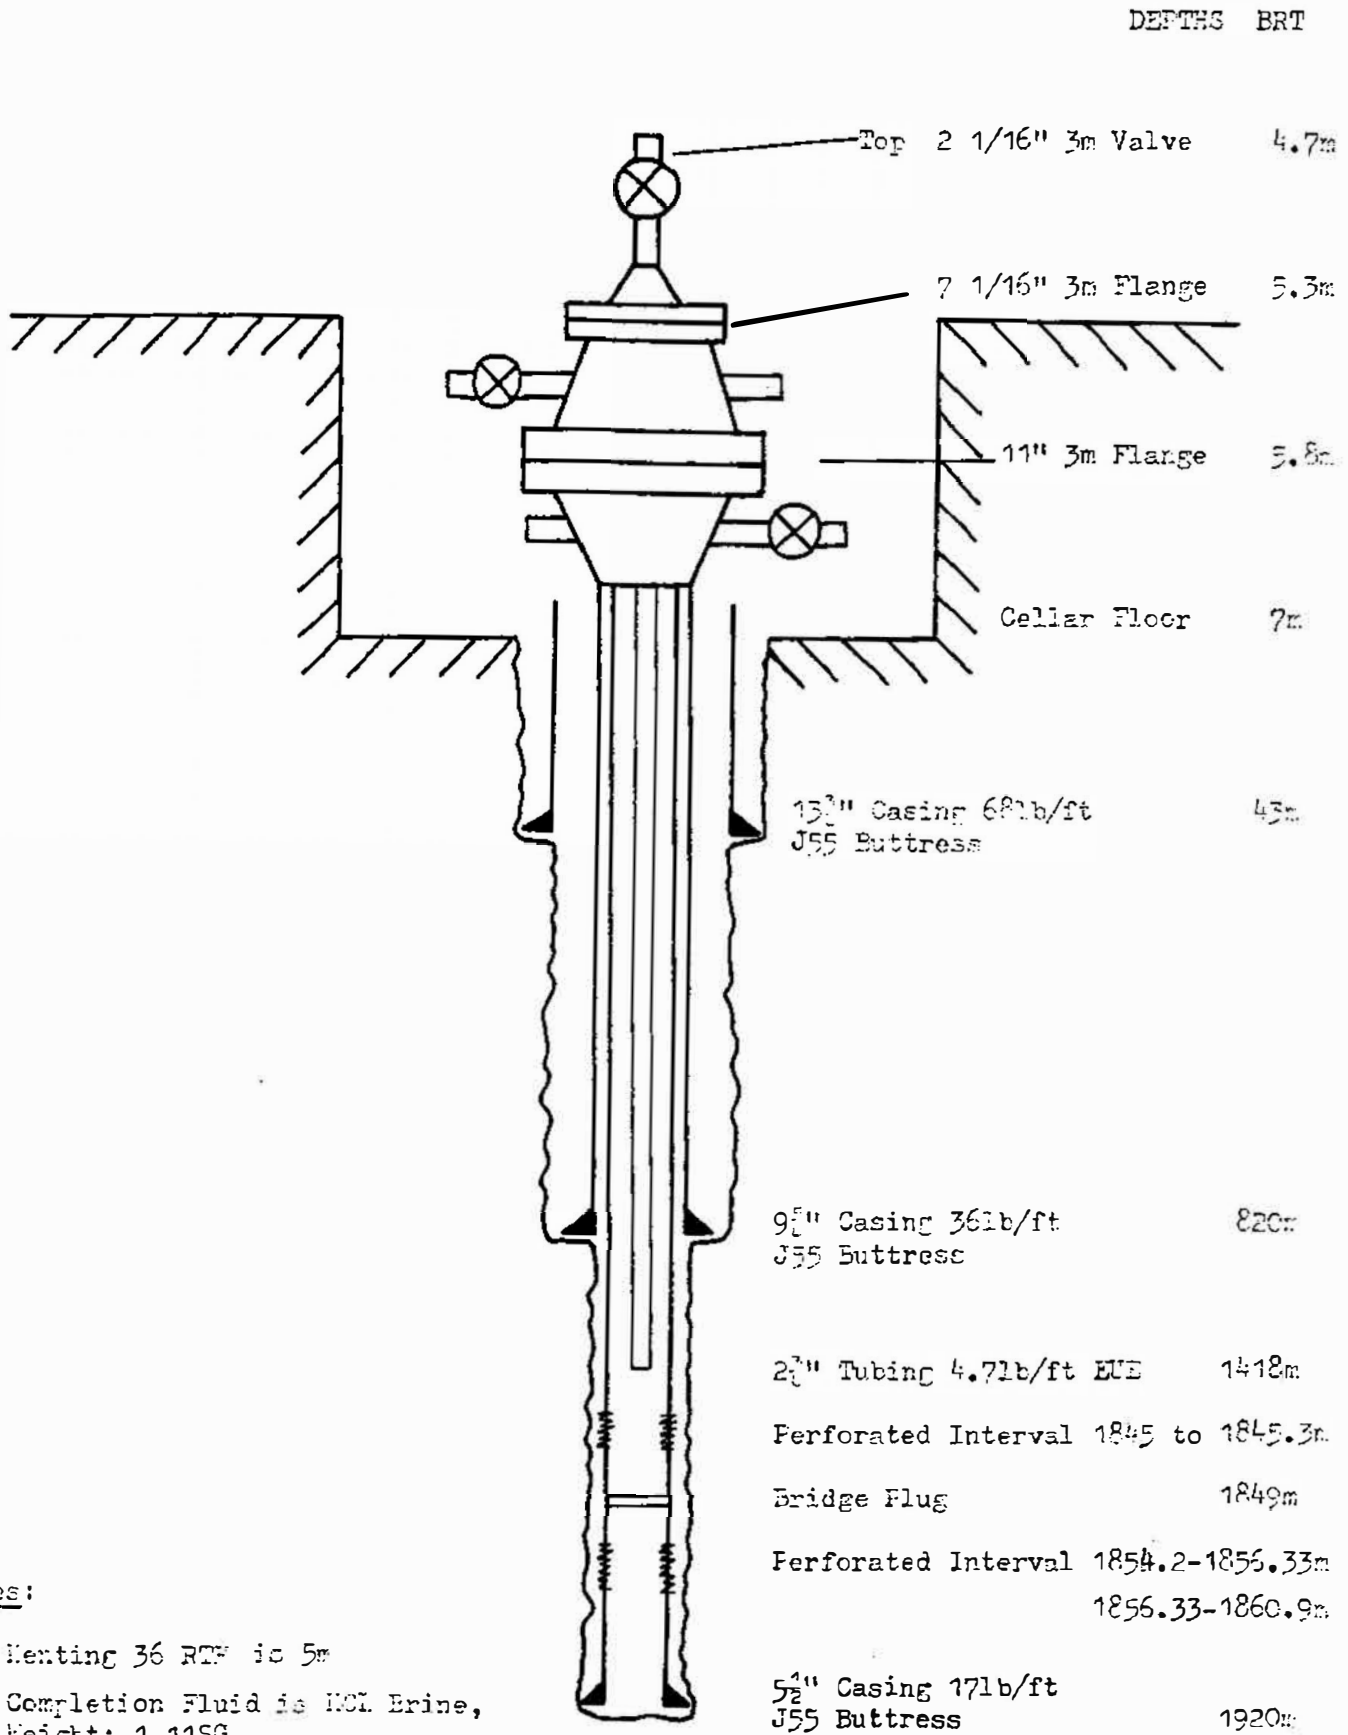

Notes:

1. Venting 36 RTF is 5m
2. Completion Fluid is HCl. Brine, Weight: 1.11SG

XVII Summarised Well Log

BROUGHTON - BI
SUMMARISED WELL LOG

SCALE 1 10,000

LOCATION SE 94627 10760

CHRONO-STRATIGRAPHY	LITHO-STRATIGRAPHY	Depth Drilled ft & m	Graphic Log	Description	Casing	Tests	Electric Logs	Remarks
B.T.E. 6819m A.O.D., 5.05m A.G.L.								
JURASSIC LOWER	HETT - AAL LIAS GROUP	250		LIMESTONE: white - grey - hard	13 3/8"			
				MUDSTONE: brown soft non-calc				
TRIASSIC	SCYTHIAN	250		SILTSTONE: dark grey sl. calc.	45.5 m			
				LIMESTONE: grey - white hard X micro-crystalline to crystalline				
				MUDSTONE: red to brown, soft				
				ANHYDRITE: wh. soft omorph.				
				DOLOMITE: grey mod. hard crystalline				
				MUDSTONE: red to brown soft anhydritic sl. calcareous				
				SANDSTONE: white to orange very fine to fine sl. calcareous				
				MUDSTONE: red to brown soft st. calcareous				
				LIMESTONE: white to light grey firm micro-crystalline				
				SALT				
PERMIAN	WESTPHALIAN	1250		DOLOMITE: grey, hard, micro-crystalline	9 7/8"			
				ANHYDRITE: white soft. amorphous to crystalline				
				LIMESTONE: grey to brown: firm crypto-crystalline				
				SANDSTONE: poorly consolidated medium grained moderately well sorted				
				SILTSTONE: grey to dark grey, firm, sandy, argillaceous				
				COAL: black, firm, vitreous				
				MUDSTONE: grey, firm, silty, carbonaceous				
				SANDSTONE: grey to brown: fine to medium grained well sorted.				
				SANDSTONE: white: medium hard medium to coarse poorly sorted slightly calcareous				
				SILTSTONE: grey to dark grey argillaceous very sandy				
CARBONIFEROUS	NAMURIAN	1750		LIMESTONE: white to off white, moderately hard, crypto-crystalline, cherty.	5 1/2"			
DINANTIAN	MILLSTONE GRIT GROUP	2000			1909m			
T.D. 1920m								
<p style="text-align: right;">PENARTH GROUP. 193.8 192.2</p> <p style="text-align: right;">UPPER MAGNESIAN LST. 1874.0 1911.2</p> <p style="text-align: right;">LOWER MARLS 1118.6 MARL SLATE 1119.7 ROYLIEGENDES GROUP 1126.9 BASAL SANDS 1126.9 MEXBOROUGH ROCK 1132.8 1142.5</p> <p style="text-align: right;">PENISTONE FLACS 1490.5 1509 WINGFIELD FLACS 1532.6 BRIGG SST. 1572.8 1508.9 1616.6 REDMIRE F.L.C. 1623.1 1626.1 1637 CHATSWORTH 1680.6 1680.5 ASHOVER 1658.3 1668.13 WIESSLE 1675.4 1680.2</p> <p style="text-align: right;">RAVENSTHORP 1804.6 1812.5 BASAL SST (SANTON) 1662.4 1671.5</p>								
BHC SONIC - GR DLL - MSFL - GR CDL - CMS - GR FED - GR								
DST-1 DST-7 DST 6 DST 5 DST 4 DST 3 DST 22A								
BP PETROLEUM DEVELOPMENT LTD GEOLOGICAL DEVISION, EAKRING AREA : HUMBERSIDE REF : E/SL/263 SEPTEMBER 1984 G. TAYLOR								

XVIII Pressure Information/RFT Results

Broughton Bl Pressure Information:


All pressure information obtained from Broughton was obtained from DST results which are as follows:-

DST No.	Interval Tested m BRT	Final Pressure Recorded (psia)	Gauge Depth (m BRT)
1	1490.0 - 1517.6	2227	1492.7
2	1865.0 - 1874.1	TOOL FAILED	-
3	1803.0 - 1812.1	TOOL FAILED	1805.9
4	1865 - 1876.6	HMSV OPEN THROUGHOUT TEST	1867.9
5	1658.0 - 1669.5	2502	1660.9
6	1615.2 - 1636	PACKER SEAT FAILURE	1619.1
7	1566 - 1578.0	2344	1569.4
8	1490 - 1512.7	2215	1492.9
9	1860.9 - 1854.2	2485	1838.0

Only three DST's were concerned to yield worthwhile information; the tentatively calculated figures are as follows:-

DST	P* (psia)
5	2511
8	2258
9	2748

BROUGHTON B-1 DST RESULTS:

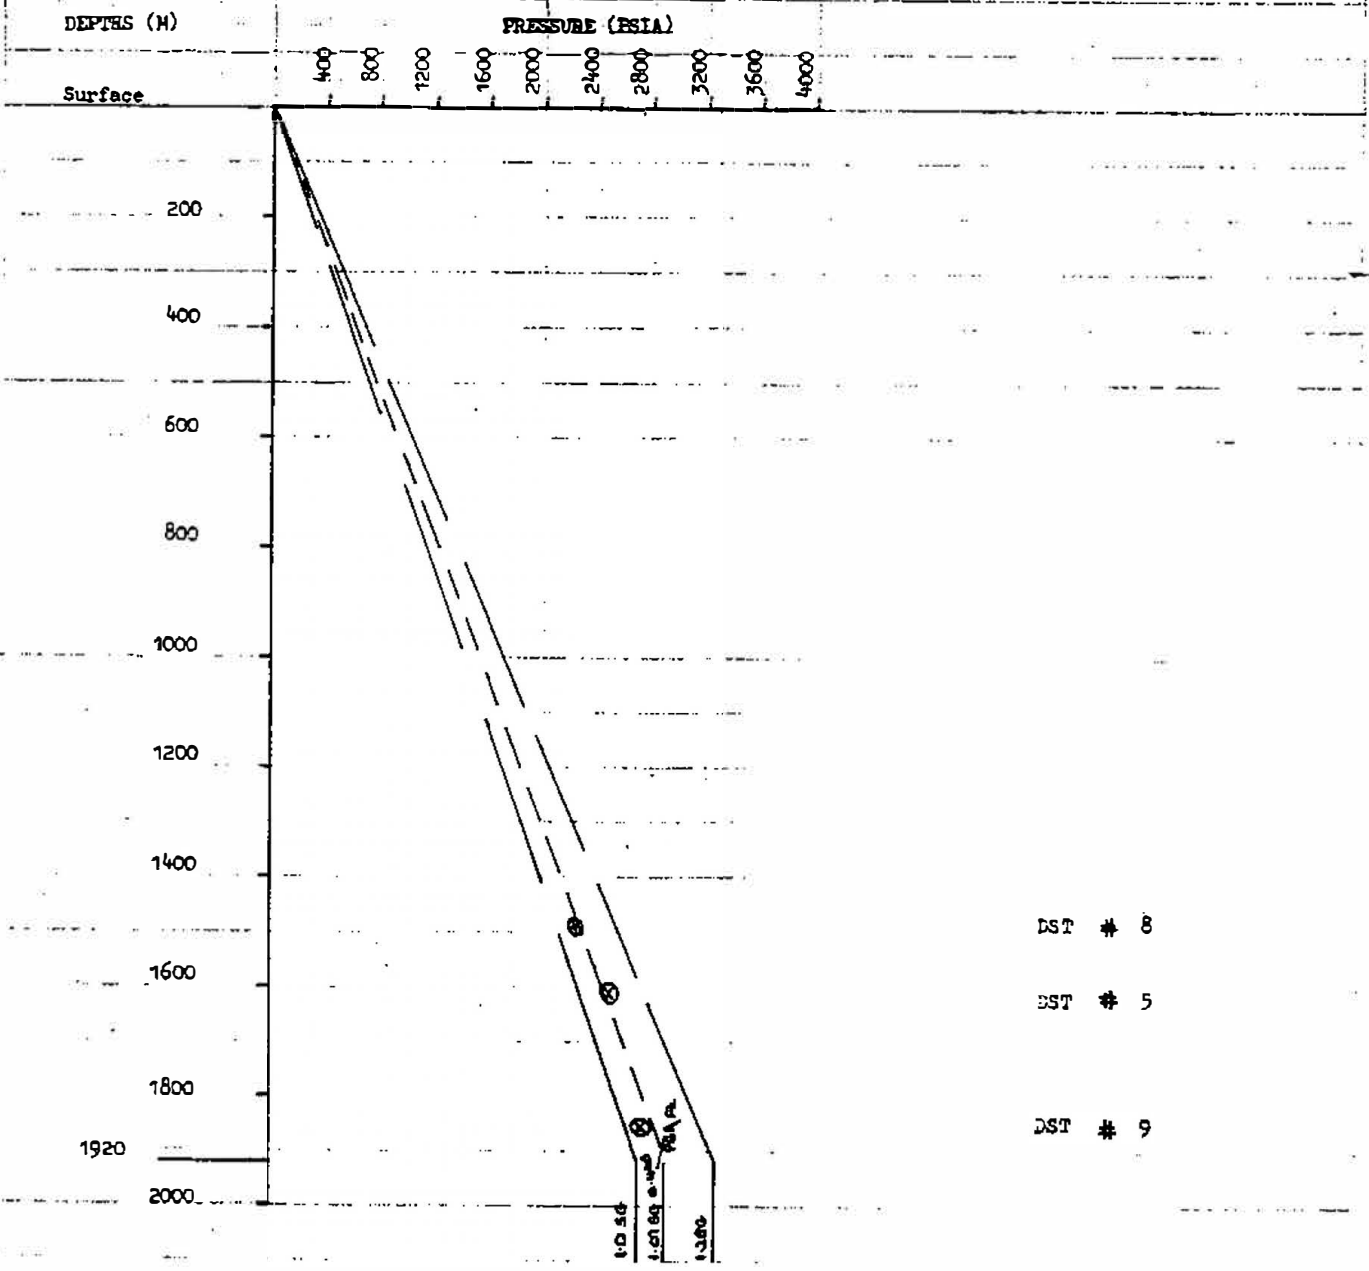

DST # 8
 DST # 5
 DST # 9

BROUGHTON B-1 - DST RESULTS

DEPTH (M)

PRESSURE (PSIA)

Surface

200

400

600

800

1000

1200

1400

1600

1800

1920

2000

400

800

1200

1600

2000

2400

2800

3200

3600

4000

DST # 8

DST # 5

DST # 9

10.26

1.0150

1.0150

1.0150

10.26

1.0150

1.0150

1.0150

UK/WF/BROU B1

MH
~~Post~~ 1/22/4

~~ATT~~

Pet. Eng. Library
(D. McCarty)

BP PETROLEUM DEVELOPMENT LIMITED

EXPLORATION AND PRODUCTION

Petroleum Engineering Factual Report
Broughton B1

by

J.U. Keir

Eakring
October 1984

Broughton B1/W48

DOCUMENT ID. 566103

BROUGHTON B1

OVERVIEW OF OPERATIONS

The well was spudded by Kenting Rig 36 on July 19th 1984.

After running a standard 12-1/4" hole logging suite, 8-1/2" hole was drilled to 1478 m brt. Three cores were then cut to a depth of 1578 m brt and after running an acoustic log a drill stem test, DST 1, was conducted over the Penistone Flags.

Drilling and coring of the 8-1/2" hole continued until T.D. was reached at 1920 m brt. A full T.D. logging suite was run and seven open hole drill stem tests performed over all the potential pay zones. Of these, DST 2 and DST 4A were mechanically unsuccessful although some fluid samples were obtained from the latter.

The 5-1/2" casing was run and cemented and two cased hole tests, both testing the same interval of the Santon Sandstone, were conducted.

The open hole test results indicated the Penistone Flags to be oil bearing. All other zones produced formation water although a trace of oil was observed in samples collected from the Wingfield Flags.

The results of the cased hole tests were inconclusive with respect to the nature of the formation fluids.

A bridge plug was set at 1849 m brt, the well suspended and the rig released on September 9th 1984.

WIRELINE LOGS RUN

RUN No.	DATE	LOG	DEPTH INTERVAL (MBRT)	HOLE SIZE (ins)	B.H. TEMP. (°C)	TIME TAKEN (hours)	LOST TIME (hours)	REMARKS
1A	23.7.84	<u>WELEX</u> AVL/GR	811.5 - 37.5 (GR to surface)	12½	33.9	3.0	-	Mud losses occurred when R.I.H. Tool pulled out LCM pumped in and logging continued.
1A	24.7.84	DRIPT SURVEY/CAL	812.5 - 28.0	12½	32.2	2.5	-	
2B	4.8.84	DIGL/AVL/GR/CAL	1578.0 - 792.0	8½	47.2	5.5	1.75	Lost time due to software problems SP loses sensitivity above 950 m. Saturation of resistivity curves from 1075-1025 MBRT. Sticky sections at 1169 MBRT and 1437.5 MBRT
		<u>GEARHART</u>						
3A	17..8.84	DLL/MSFL/SP/GR/CAL	1919.5 - 814.0	8½	47.8	4.75	-	} General increase in logging } time due to washouts } throughout borehole.
3A	17.8.84	CDL/CNS/GR/CAL	1917.5 - 800.0	8½	48.9	3.75	-	
3C	17.8.84	BHCS/GR	1912.0 - 810.0	8½	48.3	3.5	-	
3A	17.8.84	PED/GR	1913.7 - 810.0	8½	-	4.75	1	
		<u>TESEL</u>						
4B	18.8.84	D P D	1917.3 - 821.5	8½	55.0	16.75	12	Lost time due to hole conditions Wiper trip conducted. Pad No.2 damaged during survey.
		<u>WELEX</u>						
5A	2.9.84	CBL/MSG/GR/CCL	1897.0 - 800.0	5½" CSG	N.A.	4.5	-	Poor bonding indicated over majority of hole.

CORE ANALYSIS RECORD

Core No.	Top	Bottom	Recovery %	Core Analysis Available								Slabbed
				RESIDUAL Fluid Saturation % OIL/WATER	Corr	Corr	Helium Porosity %	Grain Density G/CC	Core # Gamma Ray	Photography *		
					Klinkenberg Horizontal Permeability M.D.	Klinkenberg Vertical Permeability M.D.				White Light	Ultra Violet	
1	1492.5	1508.25	100	13.5/37.0	3.26	1.52	12.8	2.685	Yes	Yes	No	Yes
2	1511.0	1528.0	100	1.5/56.0	0.47	0.17	11.6	2.71	"	"	"	"
3	1568.56	1574.75	94	7.3/49.1	1.26	0.46	12.0	2.69	"	"	"	"
4	1629.5	1635.75	99	7.9/34.8	33.5	18.1	14.0	2.655	"	"	"	"
5	1657.0	1658.0	95	7.3/59.9	0.15	0.07	9.1	2.74	"	"	"	"
6	1667.5	1685.7	100	5.3/42.9	1.1	0.87	6.8	2.68	"	"	"	"
7	1855.0	1861.5	0	-	-	-	-	-	-	-	-	-

* Refer W45 report for details.

N.B. - All results are arithmetic averages over each core interval.

Core Analysis Carried Out By - Redwood Corex

DRILL STEM TEST SUMMARY

WELL NO: BROUGHTON B1

RIG: KENTING 36

RTE: 68.27 mamsl

TEST NO: 3

FORMATION: Ravensthorpe Sandstone.

DATE: 20-21st August 1984

PERFORATED INTERVAL/DENSITY: OPEN HOLE TEST

TEST INTERVAL: 1805.3 mbrt - 1812.7 mbrt

PACKER DEPTH(S): 1803.0 mbrt : 1812.1 mbrt

FLUID CUSHION - Type/Height/Drawdown None / m / psi

TOTAL NUMBER OF DOWNHOLE GAUGES 4 x Pressure 2 x Temperature

SURFACE MEASUREMENTS

Flow/Shut In Period
 Duration - Mins.
 Total Flow Time - Mins.
 Final W/H Flowing Pressure - p.s.i.g.
 Final W/H Flowing Temperature - °F
 Choke Size at End of Flow - Inches
 Gas Flowrate Average/Final
 SCF/D
 Oil Flowrate Average/Final STBPD
 Water Flowrate Average/Final B/D
 Total Oil Produced STB
 Total Water Produced BBL

INITIAL	INITIAL	MAIN	MAIN
FLOW	S/I	FLOW	S/I
5	65	668	723
5	-	673	-
-	-	2	-
-	-	-	-
-	-	-	-
-	-	200	-
-	-	0	-
-	-	149.8	-
-	-	0	-
-	-	70	-

DOWNHOLE MEASUREMENTS

Gauge Number/Owner
 Gauge Depths mBRT Sensor Point
 mTVDss
 Initial Hydrostatic Pressure, psia
 Initial Flow Period - Final BHFP, psia
 Initial S.I. Period - Final BHCIP, psia
 Main Flow Period - Initial BHFP, psia
 Main Flow Period - Final BHFP, psia
 Main Flow Period - Final BHFT, °C
 Main S.I. Period - Final BHCIP, psia
 Main S.I. Period - Final BHCIT, °C
 Final Hydrostatic Pressure, psia

KUSTER K3		DMR 314	
17725	17734	1253	1296
1794.5	1805.5	1805.5	1805.5
1726.2	1737.2	1737.2	1737.2
3075	3094	3094	3088
N/A	N/A	284 +	303
2654	2679	2694	2689
314	337	367	387
~2500	~2524	2541	2531
-	-	62.4	63.3
2652	2672	2685	2676
-	-	61.9	62.9
3067	3088	3092	3083

PRODUCED FLUIDS DATA:

Gauge Tank Oil S.G./API Gravity 0 / At °F
 Produced Water Chlorides 66,210 ppm
 Produced H₂S 0 ppm
 BS & W 100 % FORMATION WATER : 1.078 SG

N/B TOTAL FLUID PRODUCTION IS THAT FROM INITIAL AND MAIN FLOW PERIODS.

DRILL STEM TEST SUMMARY

WELL NO: BROUGHTON B1

RIG: KENTING 36

RTE: 68.27 mams1

TEST NO: 4A

FORMATION: SANTON SANDSTONE

DATE: 22nd August 1984.

PERFORATED INTERVAL/DENSITY: OPEN HOLE TEST

TEST INTERVAL: 1854.2 - 1871.8

PACKER DEPTH(S): 1865.0 mbrt : 1876.5 mbrt

FLUID CUSHION - Type/Height/Drawdown NONE / m / psi

TOTAL NUMBER OF DOWNHOLE GAUGES 4 x Pressure 2 x Temperature

SURFACE MEASUREMENTS STATUS OF TEST TOOL THROUGHOUT TEST INCONCLUSIVE.
DATA GIVEN ASSUMES TOOL OPEN FOR DURATION OF TEST.

Flow/Shut In Period
Duration - Mins.
Total Flow Time - Mins.
Final W/H Flowing Pressure - p.s.i.g.
Final W/H Flowing Temperature - °F
Choke Size at End of Flow - Inches
Gas Flowrate Average/Final
MMSCF/D
Oil Flowrate Average/Final STBPD
Water Flowrate Average/Final B/D
Total Oil Produced STB
Total Water Produced BBL

INITIAL FLOW			
185			
185			
10 max			
-			
-			
-			
-			
623 *			
-			
80			

DOWNHOLE MEASUREMENTS

Gauge Number/Owner
Gauge Depths mBRT SENSOR POINT
mTVDss
Initial Hydrostatic Pressure, psia
Initial Flow Period - Final BHFP, psia
Initial S.I. Period - Final BHCIP, psia
Main Flow Period - Initial BHFP, psia
Main Flow Period - Final BHFP, psia
Main Flow Period - Final BHFT, °C Initial Flow
Main S.I. Period - Final BHCIP, psia
Main S.I. Period - Final BHCIT, °C
Final Hydrostatic Pressure, psia

KUSTER K3

DMR 314

17725	17734	1253	1296
1855.6	1867.9	1867.9	1867.9
1787.3	1799.6	1799.6	1799.6
3162	3183	3175	3176
2813	2828	2825	2824
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
-	-	64.3	65.4
N/A	N/A	N/A	N/A
-	-	N/A	N/A
3211	3230	3247	3247

PRODUCED FLUIDS DATA:

Gauge Tank Oil S.G./API Gravity 0 / At °F
Produced Water Chlorides 64, 790 ppm
Produced H₂S 0 ppm
BS & W 100 % FORMATION WATER; 1.077 SG

* RATE ASSUMES TOOL OPEN THROUGHOUT TEST.

DRILL STEM TEST SUMMARY

WELL NO: BROUGHTON B1

RIG: KENTING 36

RTE: 68.27 mams1

TEST NO: 6

FORMATION: CHATSWORTH SANDSTONE.

DATE: 25th - 27th August 1984

PERFORATED INTERVAL/DENSITY: OPEN HOLE TEST

TEST INTERVAL: 1627.0 - 1637.1 mbrt

PACKER DEPTH(S): 1615.2 mbrt, 1636.0 mbrt

FLUID CUSHION - Type/Height/Drawdown NONE / m / psi

TOTAL NUMBER OF DOWNHOLE GAUGES 4 x Pressure 2x Temperature

SURFACE MEASUREMENTS - TWO INITIAL FLOW PERIODS PRIOR TO MAIN FLOW.

	INITIAL	INITIAL	MAIN	MAIN
	FLOW	S/I	FLOW	S/I
Flow/Shut In Period				
Duration - Mins.	16/4	7/66	702	715
Total Flow Time - Mins.	20	-	722	-
Final W/H Flowing Pressure - p.s.i.g.	-/3	-	2	-
Final W/H Flowing Temperature - °F	-	-	-	-
Choke Size at End of Flow - Inches	-	-	-	-
Gas Flowrate Average/Final SCF/D	- / -	-	216	-
Oil Flowrate Average/Final STBPD	-	-	0	-
Water Flowrate Average/Final B/D	-	-	138	-
Total Oil Produced STB	-	-	0	-
Total Water Produced BBL	-	-	69	-

DOWNHOLE MEASUREMENTS

	KUSTER K3		DMR 314	
Gauge Number/Owner	17725	17734	1253	1296
Gauge Depths mBRT SENSOR POINT	1607.0	1618.0	1618.0	1618.0
mTVDss	1538.7	1549.7	1549.7	1549.7
Initial Hydrostatic Pressure, psia	2781	2797	2797	2799
SECOND Initial Flow Period - Final BHFP, psia	N/A	N/A	478	506
SECOND Initial S.I. Period - Final BHCIP, psia	2400	2416	2433	2433
Main Flow Period - Initial BHFP, psia	547	579	574	666
Main Flow Period - Final BHFP, psia	2388	2409	2425	2423
Main Flow Period - Final BHFT, °C	-	-	54.9	55.8
Main S.I. Period - Final BHCIP, psia	PACKER	SEAT	LOST	
Main S.I. Period - Final BHCIT, °C	-	-	54.6	55.6
Final Hydrostatic Pressure, psia	2784	2795	2804	2803

PRODUCED FLUIDS DATA:

Gauge Tank Oil S.G./API Gravity -/ At °F

Produced Water Chlorides 92, 300 ppm

Produced H₂S 0 ppm

BS & W 100% FORMATION WATER : 1.109 SG

N/B TOTAL FLUID PRODUCTION IS THAT FROM INITIAL AND MAIN FLOW PERIODS.

DRILL STEM TEST SUMMARY

WELL NO: BROUGHTON B1

RIG: KENTING 36

RTE: 68.27 mams1

TEST NO: 8A

FORMATION: PENISTONE FLAGS

DATE: 28th - 29th August 1984.

PERFORATED INTERVAL/DENSITY: OPEN HOLE TEST

TEST INTERVAL: 1491.3 - 1509.4 mbrt

PACKER DEPTH(S): 1490.0, 1512.8 mbrt

FLUID CUSHION - Type/Height/Drawdown NONE / m / psi

TOTAL NUMBER OF DOWNHOLE GAUGES 4 x Pressure 2 x Temperature

SURFACE MEASUREMENTS

	INITIAL	INITIAL	MAIN	MAIN
	FLOW	S/I	FLOW	S/I
Flow/Shut In Period				
Duration - Mins.	5	64	582	700
Total Flow Time - Mins.	5	-	587	-
Final W/H Flowing Pressure - p.s.i.g.	-	-	4	-
Final W/H Flowing Temperature - °F	-	-	-	-
Choke Size at End of Flow - Inches	-	-	-	-
Gas Flowrate Average/Final	-	-	4,320	-
SCF/D				
Oil Flowrate Average/Final STBPD	-	-	22.7	-
Water Flowrate Average/Final B/D	-	-	14.7	-
Total Oil Produced STB	-	-	9.25	-
Total Water Produced BBL MUD	-	-	6	-

DOWNHOLE MEASUREMENTS

	KUSTER K3		DMR 314	
Gauge Number/Owner	17725	17734	1253	1296
Gauge Depths mbRT SENSOR POINT	1481.8	1492.8	1492.8	1492.8
mTVDss	1413.5	1424.5	1424.5	1424.5
Initial Hydrostatic Pressure, psia	2481	2502	2496	2496
Initial Flow Period - Final BHFP, psia	N/A	N/A	172	.93
Initial S.I. Period - Final BHCIP, psia	2145	2168	2189	2190
Main Flow Period - Initial BHFP, psia	111	118	122	111
Main Flow Period - Final BHFP, psia	452	462	468	467
Main Flow Period - Final BHFT, °C	-	-	50.2	50.8
Main S.I. Period - Final BHCIP, psia	2187	2207	2215	2214
Main S.I. Period - Final BHCIT, °C	-	-	51.3	51.9
Final Hydrostatic Pressure, psia	2474	2493	2494	2493

PRODUCED FLUIDS DATA: RESULTS FROM ANALYSIS OF OIL SAMPLE

Gauge Tank Oil S.G./API Gravity 0.853 / 34.4 At 60 °F

Produced Water Chlorides 430 ppm

Produced H₂S 0 ppm

BS & W 12 % Vol.

DRILL STEM TEST SUMMARY

WELL NO: BROUGHTON B1 RIG: KENTING 36 RTE: 68.27 mams1
 TEST NO: 9 (CASED HOLE) FORMATION: SANTON SANDSTONE.
 DATE: 5th - 6th September 1984.
 PERFORATED INTERVAL/DENSITY: 1860.9 - 1854.2 mbrt @ 4 shots/ft
 TEST INTERVAL: 1871.8 - 1854.2 mbrt
 PACKER DEPTH(S): 1849.0 mbrt
 FLUID CUSHION - Type/Height/Drawdown / m / psi
 TOTAL NUMBER OF DOWNHOLE GAUGES 3 x Pressure 1 x Temperature

SURFACE MEASUREMENTS

	INITIAL	INITIAL	MAIN	MAIN
	FLOW	S/I	FLOW	S/I
Flow/Shut In Period	11	65	334	343
Duration - Mins.	11	-	345	-
Total Flow Time - Mins.	-	-	0	-
Final W/H Flowing Pressure - p.s.i.g.	-	-	-	-
Final W/H Flowing Temperature - °F	-	-	-	-
Choke Size at End of Flow - Inches	-	-	-	-
Gas Flowrate Average/Final	-	-	30	-
SCF/D				
Oil Flowrate Average/Final STBPD	0	-	0	-
Water Flowrate Average/Final B/D	-	-	9.6	-
Total Oil Produced STB	0	-	0	-
Total Water Produced BBL MUD	-	-	2.3	-

DOWNHOLE MEASUREMENTS

	HALLIBURTON - BOURDON TUBE GAUGES			
Gauge Number/Owner	4542	1286	2534	TE - 45
Gauge Depths mBRT	1843.2	1844.7	1859.1	FAILURE
mTVDss	1774.9	1776.4	1790.8	
Initial Hydrostatic Pressure, psia	2874	2863	2900	
Initial Flow Period - Final BHFP, psia	78	94	119	
Initial S.I. Period - Final BHCIP, psia	2601	2592	2630	
Main Flow Period - Initial BHFP, psia	127	134	175	
Main Flow Period - Final BHFP, psia	495	499	530	
Main Flow Period - Final BHFT, °C	N/A	N/A	N/A	
Main S.I. Period - Final BHCIP, psia	2483	2495	2527	
Main S.I. Period - Final BHCIT, °C	N/A	N/A	N/A	
Final Hydrostatic Pressure, psia	2853	2866	2904	

PRODUCED FLUIDS DATA: NO LABORATORY ANALYSIS PERFORMED, BEST ESTIMATES GIVEN.

Gauge Tank Oil S.G./API Gravity NA / At °F
 Produced Water Chlorides Approx 35,000 ppm
 Produced H₂S 0 ppm
 BS & W 100 % MUD FILTRATE

N/B TOTAL FLUID PRODUCTION IS THAT FROM INITIAL AND MAIN FLOW PERIODS.

WELL NUMBER: BROUGHTON B1 - OPEN HOLE TESTS

FLUID SAMPLE RECORD

TEST NO.	DATE/TIME SAMPLED	TYPE	SAMPLING POINT	TEMP/PRESS °C/psig	SAMPLE NUMBER	VOLUME	CONTAINER NUMBER	DESPATCHED TO	ANALYSIS REQUESTED	DATE ANALYSIS RECEIVED
DST 3	21/8/84 1600 hrs	FORMATION WATER	CHOKE MANIFOLD	AMBIENT	-	5 litres	-	Caleb Brett	10 ION ANALYSIS	21/9/84
DST 4A	22/8/84 1630 hrs	FORMATION WATER	"	"	-	"	-	"	"	"
DST 5	24/8/84 0815 hrs	FORMATION WATER	"	"	-	"	-	"	"	"
DST 6	26/8/84 2200 hrs	FORMATION WATER	"	"	-	"	-	"	"	"
DST 7	28/8/84 0945 hrs	FORMATION WATER	"	"	-	"	-	"	"	"
DST 8	29/8/84 2100 hrs	OIL	"	"	-	"	-	MOORE, BARRETT AND REDWOOD	OIL ASSY.	16/10/84 Preliminary

PERFORATION RECORD

RUN NO.	DATE	INTERVAL PERFORATED (m)	METRES PERF.	NO. OF GUNS	TIME TAKEN (hours)	REMARKS
5A	3/9/84	1845.3-1845.0	0.3	1(4 shots)	2.25	Perforated interval for dry test. CCL changed out due to weak response while R.I.H.
6B	5/9/84	1860.9-1856.33	4.57	1	1.25	Select fire switch failure - bottom gun only fired.
6B	5/9/84	1856.33-1854.2	2.13	1	2.0	

GAUGE SPECIFICATIONS SUMMARY.

<u>GAUGE NAME</u>		<u>LYNES KUSTER</u>	<u>LYNES DMR</u>	<u>HALLIBURTON</u>	<u>HALLIBURTON</u>
		<u>K3 *</u>	<u>314 *</u>	<u>BT **</u>	<u>BT</u>
<u>GAUGE NUMBER</u>		17725 17734	1253 1296	4542 (1) 1286 (1) 2534 (2)	TE 45
<u>TYPE OF GAUGE</u>		<u>BOURDON TUBE</u>	<u>QUARTZ CRYSTAL</u>	<u>BOURDON TUBE</u>	<u>BOURDON TUBE</u>
Pressure	Resolution	Not Available	± 0.5 psi	Not Available	Not Applicable
	Accuracy	± 7.5 psi	± 2.5 psi	± 7.5 psi (1) ± 12.5 psi (2)	Not Applicable
Temperature	Resolution	Not Applicable	0.14°C	Not Applicable	Not Available
	Accuracy	Not Applicable	1.0°C	Not Applicable	Not Available
<u>Sampling Rate</u>		Not Applicable	4 minutes (set using a 2 minute stagger)	Not Applicable	Not Applicable

* Used in open hole testing only.

** Used in cased hole testing only.

(1) 3000 psig FSD

(2) 5000 psig FSD

BROUGHTON B1
STRING DIAGRAM

DST 1
PENISTONE FLAGS

Stick-up of 3.46 m

Depth m BRT	Length m	ID inches	Volume ft ³	Cum Length m	Cum Volume ft ³
	1255.46	3.826	328.69	1255.46	328.69
	0.39	2.625	0.05	1255.85	328.74
	111.39	3.0	17.94	1367.24	346.68
	0.79	2.25	0.07	1368.03	346.75
	19.06	2.813	2.70	1387.09	349.45
	10.75	2.688	1.39	1397.84	350.84
	65.66	2.813	9.30	1463.50	360.14
	0.30	2.5	0.03	1463.80	360.17
	9.01	2.813	1.28	1472.81	361.45
	0.31	3.0	0.05	1473.12	361.50
	9.01	2.813	1.28	1482.13	362.78
	0.31	2.785	0.04	1482.44	362.82
	0.20	4	0.06	1482.64	362.88
	1.49	1.0	0.03	1484.13	362.91
	1.37	1.0	0.02	1485.50	362.93
	1.94	1.5	0.08	1487.44	363.01
	0.66	2.25	0.06	1488.10	363.07
	2.38	1.0	0.04	1490.48	363.11
	1.16	1.0	0.02	1491.64	363.13
	0.46	1.0	0.01	1492.10	363.14
1490.0	1.36	1.0	0.02	1493.46	363.16
	0.46	1.0	0.01	1493.92	363.17
	0.31	1.0	0.01	1494.23	363.18
	2.06	1.25	0.01	1496.29	363.19
	0.31	2.785	0.04	1496.60	363.23
	18.66	2.375	1.88	1515.26	365.11
	0.31	2.375	0.03	1515.57	365.14
1512.57	0.46	1.0	0.01	1516.03	365.15
	1.36	1.0	0.02	1517.39	365.17
	0.58	1.0	0.01	1517.97	365.18
	2.01	2.5	0.22	1519.98	365.40

BROUGHTON B1
STRING DIAGRAM

DST 3
RAVENSTHORPE SANDSTONE




















Stick-up of 4.21 m

Depth m BRT	Length m	ID inches	Volume ft ³	Cum Length m	Cum Volume ft ³
DP	1529.27	3.826	400.38	1529.27	400.38
HIDS	0.39	3.0	0.06	1529.66	400.44
HWDP	111.43	3.0	17.95	1641.09	418.39
	0.79	2.25	0.07	1641.88	418.46
DC & JARS	134.41	2.813	19.03	1776.29	437.49
	0.30	3.0	0.05	1776.59	437.54
DC	9.40	2.813	1.33	1785.99	438.87
	0.31	3.0	0.05	1786.30	438.92
DC	9.38	2.813	1.33	1795.68	440.25
	0.31	2.785	0.04	1795.99	440.29
	0.20	4.0	0.06	1796.19	440.35
	1.49	1.0	0.03	1797.68	440.38
	1.37	1.0	0.02	1799.05	440.40
	2.14	1.5	0.01	1801.19	440.41
	0.66	2.25	0.06	1801.85	440.47
PUMP	2.38	1.0	0.04	1804.23	440.51
	1.16	1.0	0.02	1805.39	440.53
	0.46	1.0	0.01	1805.85	440.54
1803.00	1.36	1.0	0.02	1807.21	440.56
	0.46	1.0	0.01	1807.67	440.57
	0.31	1.0	0.01	1807.98	440.58
	2.06	1.25	0.06	1810.04	440.64
SPACING	5.49	2.0	0.39	1815.53	441.03
1812.11	0.79	1.0	0.01	1816.32	441.04
	1.36	1.0	0.02	1817.68	441.06
	0.58	1.0	0.01	1818.26	441.07
	2.01	2.5	0.22	1820.27	441.29

BROUGHTON B1
STRING DIAGRAM

DST 4A
SANTON SANDSTONE

Stick-up of 3.40 m

Depth m BRT	Length m	ID inches	Volume ft ³	Cum Length m	Cum Volume ft ³
DP	1592.49	3.826	416.93	1592.49	416.93
HIDS	0.39	3.0	0.06	1592.88	416.99
HWDP	111.43	3.0	17.95	1704.31	434.94
	0.79	2.25	0.07	1705.10	495.01
DC & JARS	132.38	2.813	18.74	1837.48	453.75
	0.30	3.0	0.05	1837.78	453.80
DC	9.40	2.813	1.33	1847.18	455.13
	0.31	3.0	0.05	1847.49	455.18
DC	9.38	2.813	1.33	1856.87	456.51
	0.31	2.785	0.04	1857.18	456.55
	0.20	4.0	0.06	1857.38	456.61
	1.49	1.0	0.03	1858.87	456.64
	1.37	1.0	0.02	1860.24	456.66
	2.14	1.5	0.01	1862.38	456.67
	0.66	2.25	0.06	1863.04	456.73
PUMP	2.38	1.0	0.04	1865.42	456.77
	1.16	1.0	0.02	1866.58	456.79
	0.46	1.0	0.01	1867.04	456.80
	1.36	1.0	0.02	1868.40	456.82
	0.46	1.0	0.01	1868.86	456.83
	0.31	1.0	0.01	1869.17	456.84
	2.06	1.25	0.06	1871.23	456.90
SPACING	7.93	2.0	0.57	1879.16	457.47
	0.79	1.0	0.01	1879.95	457.48
	1.36	1.0	0.02	1881.31	457.50
	0.58	1.0	0.01	1881.89	457.51
	2.01	2.5	0.22	1883.90	457.73




















1865.00

1876.55

BROUGHTON B1
STRING DIAGRAM

DST 5
ASHOVER SANDSTONE

Stick-up of 3.32 m

	Depth m BRT	Length m	ID inches	Volume ft ³	Cum Length m	Cum Volume ft ³
DP		1385.41	3.826	362.72	1385.41	362.72
HIDS		0.39	3.0	0.06	1385.80	362.78
HWDP		111.43	3.0	17.95	1497.23	380.73
		0.79	2.25	0.07	1498.02	380.80
DC & JARS		132.38	2.813	18.74	1630.40	399.54
		0.30	3.0	0.05	1630.70	399.59
DC		9.40	2.813	1.33	1640.10	400.92
		0.31	3.0	0.05	1640.41	400.97
DC		9.38	2.813	1.33	1649.79	402.30
		0.31	2.785	0.04	1650.10	402.34
		0.20	4.0	0.06	1650.30	402.40
		1.49	1.0	0.03	1651.79	402.43
		1.37	1.0	0.02	1653.16	402.45
		2.14	1.5	0.01	1655.30	402.46
		0.66	2.25	0.06	1655.96	402.52
PUMP		2.38	1.0	0.04	1658.34	402.56
		1.16	1.0	0.02	1659.50	402.58
		0.46	1.0	0.01	1659.96	402.59
	1658.00	1.36	1.0	0.02	1661.32	402.61
		0.46	1.0	0.01	1661.78	402.62
		0.31	1.0	0.01	1662.09	402.63
		2.06	1.25	0.06	1664.15	402.69
SPACING		7.93	2.0	0.57	1672.08	403.26
	1669.55	0.79	1.0	0.01	1672.87	403.27
		1.36	1.0	0.02	1674.23	403.29
		0.58	1.0	0.01	1674.81	403.30
		2.01	2.5	0.22	1676.82	403.52

BROUGHTON B1
STRING DIAGRAM

DST 6
CHATSWORTH SANDSTONE




















Stick-up of 3.52 m

Depth m BRT	Length m	ID inches	Volume ft ³	Cum Length m	Cum Volume ft ³
DP	1352.05	3.826	353.98	1352.05	353.98
HIDS	0.39	3.0	0.06	1352.44	354.04
HWDP	111.43	3.0	17.95	1463.87	371.99
	0.79	2.25	0.07	1464.66	372.06
DC & JARS	123.18	2.813	17.44	1587.84	389.50
	0.30	3.0	0.05	1588.14	389.55
DC	9.40	2.813	1.33	1597.54	390.88
	0.31	3.0	0.05	1597.85	390.93
DC	9.38	2.813	1.33	1607.23	392.26
	0.31	2.785	0.04	1607.54	392.30
	0.20	4.0	0.06	1607.74	392.36
	1.49	1.0	0.03	1609.23	392.39
	1.37	1.0	0.02	1610.60	392.41
	2.14	1.5	0.01	1612.74	392.42
	0.66	2.25	0.06	1613.40	392.48
PUMP	2.38	1.0	0.04	1615.78	392.52
	1.16	1.0	0.02	1616.94	392.54
	0.46	1.0	0.01	1617.40	392.55
1615.24	1.36	1.0	0.02	1618.76	392.57
	0.46	1.0	0.01	1619.22	392.58
	0.31	1.0	0.01	1619.53	392.59
	2.06	1.25	0.06	1621.59	392.65
	0.31	2.875	0.05	1621.90	392.70
DC	9.20	2.813	1.30	1631.10	394.00
	0.31	2.875	0.05	1631.41	394.05
SPACING	7.32	2.0	0.52	1638.73	394.57
1636.0	0.79	1.0	0.01	1639.52	394.58
	1.36	1.0	0.02	1640.88	394.60
	0.58	1.0	0.01	1641.46	394.61
	2.01	2.5	0.22	1643.47	394.83

BROUGHTON B1
STRING DIAGRAM

DST 7
WINGFIELD FLAGS

Stick-up of 3.21 m

	Depth m BRT	Length m	ID inches	Volume ft ³	Cum Length m	Cum Volume ft ³
DP		1293.80	3.826	338.73	1293.80	338.73
HIDS		0.39	3.0	0.06	1294.19	338.79
HWDP		111.43	3.0	17.95	1405.62	356.74
		0.79	2.25	0.07	1406.41	356.81
DC & JARS		132.38	2.813	17.44	1538.79	374.25
		0.30	3.0	0.05	1539.09	374.30
DC		9.40	2.813	1.33	1548.49	375.63
		0.31	3.0	0.05	1548.80	375.68
DC		9.38	2.813	1.33	1558.18	377.01
		0.31	2.785	0.04	1558.49	377.05
		0.20	4.0	0.06	1558.69	377.11
		1.49	1.0	0.03	1560.18	377.14
		1.37	1.0	0.02	1561.55	377.16
		2.14	1.5	0.01	1563.69	377.17
		0.66	2.25	0.06	1564.35	377.23
PUMP		2.38	1.0	0.04	1566.73	377.27
		1.16	1.0	0.02	1567.89	377.29
		0.46	1.0	0.01	1568.35	377.30
	1566.50	1.36	1.0	0.02	1569.71	377.32
		0.46	1.0	0.01	1570.17	377.33
		0.31	1.0	0.01	1570.48	377.34
		2.06	1.25	0.06	1572.54	377.40
SPACING		7.32	2.0	0.52	1579.86	377.92
	1577.44	0.79	1.0	0.01	1580.65	377.93
		1.36	1.0	0.02	1582.01	377.95
		0.58	1.0	0.01	1582.59	377.96
		2.01	2.5	0.22	1584.60	378.18

BROUGHTON B1
STRING DIAGRAM

DST 8 A
PENISTONE FLAGS

Stick-up of 3.38 m

Depth m BRT	Length m	ID inches	Volume ft ³	Cum Length m	Cum Volume ft ³
DP	1236.04	3.826	323.61	1236.04	323.61
HIDS	0.39	3.0	0.06	1236.43	323.67
HWDP	111.43	3.0	17.95	1347.86	341.62
	0.79	2.25	0.07	1348.65	341.69
DC	113.81	2.813	17.44	1462.46	359.13
	0.30	3.0	0.05	1462.76	359.18
DC	9.40	2.813	1.33	1472.16	360.51
	0.31	3.0	0.05	1472.47	360.56
DC	9.38	2.813	1.33	1481.85	361.89
	0.31	2.785	0.04	1482.16	361.93
	0.2	4.0	0.06	1482.36	361.99
	1.49	1.0	0.03	1483.85	362.02
	1.37	1.0	0.02	1485.22	362.04
	2.14	1.5	0.01	1487.36	362.05
	0.66	2.25	0.06	1488.02	362.11
PUMP	2.38	1.0	0.04	1490.40	362.15
	1.16	1.0	0.02	1491.56	362.17
	0.46	1.0	0.01	1492.02	362.18
1490.00	1.36	1.0	0.02	1493.38	362.20
	0.46	1.0	0.01	1493.84	362.21
	0.31	1.0	0.01	1494.15	362.22
	2.06	1.25	0.06	1496.21	362.28
	0.31	2.0	0.02	1496.52	362.30
DC	18.57	2.813	2.63	1515.09	364.93
	0.31	2.0	0.02	1515.40	364.95
1512.81	0.79	1.0	0.01	1516.19	364.96
	1.36	1.0	0.02	1517.55	364.98
	0.58	1.0	0.01	1518.13	364.99
	2.01	2.5	0.22	1520.14	365.21

STRING DIAGRAM

SANTON SANDSTONE

Stick-up of 1.13 m

Perforated Interval 1860.9 - 1854.2 m BRT

Depth m BRT	Length m	ID inches	Volume ft ³	Cum Length m	Cum Volume ft ³
TUBING	1650.05	1.995	117.52	1650.05	1650.05
	0.44	1.0	0.01	1650.49	1650.06
DC	187.83	1.0	3.36	1838.32	1653.42
	0.30	1.0	0.01	1838.62	1653.43
	0.18	2.375	0.02	1838.80	1653.45
	0.43	1.75	0.02	1839.23	1653.47
	0.20	2.75	0.03	1839.43	1653.50
	0.12	2.25	-	1839.55	1653.50
DCIP	1.46	0.625	0.01	1841.01	1653.51
	1.76	0.625	0.01	1842.77	1653.52
PRESSURE	1.51	0.625	0.01	1844.28	1653.53
PRESSURE	1.40	0.625	0.01	1845.68	1653.54
TEMP.	1.40	0.625	0.01	1847.08	1653.55
	1.54	1.25	0.04	1848.62	1653.59
	0.78	0.75	0.01	1849.40	1653.60
	0.17	2.0	0.01	1849.57	1653.61
	0.56	1.90	0.04	1850.13	1653.65
	0.15	1.90	0.01	1850.28	1653.66
	0.65	1.90	0.04	1850.93	1653.70
	0.17	1.75	0.01	1851.10	1653.71
	7.62	1.75	0.42	1858.72	1654.13
PRESSURE	1.27	0.625	0.01	1859.99	1654.14

1849.0

on B)


BP PETROLEUM DEVELOPMENT LIMITED

446/13-3 **BROUGHTON B-1** WELL RECORD

DRILLED DEPTH **29 MAY 1985**

NATIONAL GRID REFERENCE -
 SURFACE LOCATION SE 494627410760 *034 13.443 W*
 TOP RESERVOIR LOCATION _____ *63 35 04 N*
 BOTTOM HOLE LOCATION _____

R.T.E. 68.2 m A.O.D. 5.1 m A.G.L. G.L.E. 63.1 m A.O.D.
 RIG KENTING-36 SPUNDED 18th JULY 1984 COMPLETED DRILLING 17th AUG '84
 TOTAL DEPTH DRILLED 1920.0 m B.R.T. TOTAL DEPTH (T.V.D.) _____ m B.R.T. _____ m S.S.
 AVERAGE ANGLE OF DEVIATION THROUGH RESERVOIR 1.25° MAXIMUM DEVIATION 2°
 WELL STATUS SUSPENDED OIL WELL



LITHOLOGICAL		LITHOLOGICAL QUALIFIERS		GRA FOSSILIFEROUS
Limestone	Anhydrite, Gypsum	Clayey		Bert
Dolomite	Halite	Sandy		Flint
Misc Carbonate	Miscellaneous Chlorides and Sulphates	Silty		Bert
Dolomitic Limestone	Iron, Manganese, Phosphate and other Misc. Min.	Gravelly		Flint
Calcareous Dolomite	Chert	Calcareous		Flint
Clay, Mudstone, Shale (L.T. 79)	Extrusive Igneous	Dolomitic		Flint
Siltstone	Tuff	Significant Glauconite		
Sandstone, Sand	Intrusive Igneous	Significant Carb. Frags		
Conglomerate, Gravel	Metamorphic	Phosphatic, Ferruginous, Manganiferous		
Siliceous Rock	Cement (L.T. 110)	Bituminous		
Coal, Lignite & other Carbonaceous Rock	No Samples	Tuffaceous		

WELL SYMBOLS

Water Flow	Oil Show	Cased Interval	Drill Site
Loss to Formation	Gas & Condensate Show	Sidewall Core	Perforated
Gas Trace	Oil and Gas Show	No Recovery	Casing S
Gas Show	Hydrocarbon Fluorescence	Formation Interval Test	Liner Hole

Well name: BROUGHTON B1

MAIN DEPTHS DIRECTIONAL IMAGES BP ARCHIVES

Well name	BROUGHTON B1
Primary target	Conventional Oil and Gas
OGA Ref	L46/13- 3
BGS Ref (ID)	SE91SW456 (134540)
Operator	BP
Spud Date	18 Jul 1984
Completion Date	17 Aug 1984
Coordinates (BNG)	494627, 410760 Operator Easting Northing
Deviated	Vertical
Donor Bore	None

+ Add to Selection 🔍 Zoom To

Well name: BROUGHTON B1

MAIN

DEPTHS

DIRECTIONAL

IMAGES

BP ARCHIVES

Datum (ft)	RT 224
Datum (m)	RT 68.2
GL (ft)	207
GL (m)	63.1
TD (ft)	6300
TD (m)	1920
TVD SS (ft)	6076
TVD SS (m)	1851.8
TD Period	Carboniferous
TD Detail	Dinantian

+ Add to Selection

🔍 Zoom To



Former Oil Well compound entrance and general view



Concrete slab assumed capping decommissioned well



Vegetated bund surround



