



Sheringham Shoal and Dudgeon Offshore Wind Farm Extension Projects

Environmental Statement

Volume 3

Appendix 10.2 - Underwater Noise Modelling Report

August 2022

Document Reference: 6.3.10.2

APFP Regulation: 5(2)(a)

Submitted to:
Magnus Eriksen
Equinor
Forusbeen 50
4035 Stavanger
Norway

Tel: +47 94 87 63 49

E-mail: mager@equinor.com

Website: [REDACTED]

Submitted by:
Tim Mason
Subacoustech Environmental Ltd
Unit 2, Muira Industrial Estate
William Street
Southampton
SO14 5QH
United Kingdom

Tel: +44 (0)23 80 236 330

E-mail: [REDACTED]

Website: [REDACTED]

Sheringham Extension Project and Dudgeon Extension Project: Underwater noise assessment

Richard Barham, Tim Mason

01 December 2021

Subacoustech Environmental Report No. P272R0306



| <i>Document No.</i> | <i>Date</i> | <i>Written</i> | <i>Approved</i> | <i>Distribution</i> |
|---------------------|-------------|----------------|-----------------|---------------------|
| P272R0301 | 23/12/2020 | R Barham | T Mason | M Eriksen (Equinor) |
| P272R0302 | 12/02/2021 | R Barham | T Mason | R Stocks (RHDHV) |
| P272R0303 | 23/02/2021 | R Barham | T Mason | R Stocks (RHDHV) |
| P272R0304 | 25/02/2021 | R Barham | T Mason | R Stocks (RHDHV) |
| P272R0305 | 04/11/2021 | R Barham | T Mason | P Morgan (RHDHV) |
| P272R0306 | 01/12/2021 | R Barham | T Mason | P Morgan (RHDHV) |

This report is a controlled document. The report documentation page lists the version number, record of changes, referencing information, abstract and other documentation details.

List of contents

| | | |
|---------|--|----|
| 1 | Introduction | 1 |
| 2 | Background to underwater noise metrics | 3 |
| 2.1 | Underwater noise | 3 |
| 2.1.1 | Background | 3 |
| 2.1.2 | Units of measurement | 3 |
| 2.1.2.1 | Sound pressure level (SPL)..... | 3 |
| 2.1.2.2 | Peak sound pressure level (SPL _{peak})..... | 4 |
| 2.1.2.3 | Sound exposure level (SEL)..... | 4 |
| 2.2 | Analysis of environmental effects | 5 |
| 2.2.1 | Background | 5 |
| 2.2.2 | Criteria to be used | 5 |
| 2.2.2.1 | Marine mammals..... | 5 |
| 2.2.2.2 | Fish..... | 8 |
| 2.2.2.3 | Particle motion..... | 10 |
| 3 | Background noise levels | 12 |
| 4 | Modelling methodology | 15 |
| 4.1 | Introduction | 15 |
| 4.2 | Modelling confidence..... | 15 |
| 4.3 | Modelling parameters..... | 17 |
| 4.3.1 | Modelling locations..... | 17 |
| 4.3.2 | Impact piling parameters | 18 |
| 4.3.2.1 | Source levels..... | 20 |
| 4.3.2.2 | Environmental conditions | 20 |
| 4.3.3 | Cumulative SELs and fleeing receptors..... | 21 |
| 4.3.3.1 | The effects of input parameters on cumulative SELs and fleeing receptors | 23 |
| 5 | Modelling results | 26 |
| 5.1 | Worst case parameters | 26 |
| 5.1.1 | Marine mammals..... | 28 |
| 5.1.2 | Fish..... | 34 |
| 5.2 | Most likely parameters | 39 |
| 5.2.1 | Marine mammals..... | 40 |
| 5.2.2 | Fish..... | 42 |
| 5.3 | Simultaneous piling | 44 |
| 5.3.1 | Marine mammals..... | 45 |
| 5.3.2 | Fish..... | 50 |

| | | |
|------------|---|----|
| 5.4 | Sequential piling..... | 54 |
| 5.4.1 | Marine mammals..... | 55 |
| 5.4.2 | Fish..... | 57 |
| 6 | Other noise sources..... | 60 |
| 6.1 | Noise making activities..... | 60 |
| 6.2 | Operational WTG noise..... | 63 |
| 6.3 | UXO detonation..... | 65 |
| 6.3.1 | Estimation of underwater noise levels..... | 65 |
| 6.3.2 | Estimation of underwater noise propagation..... | 66 |
| 6.3.3 | Impact ranges..... | 67 |
| 6.3.3.1 | Bubble curtain..... | 68 |
| 6.3.4 | Summary..... | 69 |
| 7 | Summary and conclusions..... | 70 |
| | References..... | 72 |
| Appendix A | Single strike modelling results..... | 75 |
| A.1 | Worst case parameters..... | 75 |
| A.1.1 | Marine mammals..... | 76 |
| A.1.2 | Fish..... | 86 |
| A.2 | Most likely parameters..... | 91 |
| A.2.1 | Marine mammals..... | 92 |
| A.2.2 | Fish..... | 95 |
| | Report documentation page..... | 97 |

Glossary

| Term | Definition |
|---------------------------------|---|
| Decibel | A customary scale commonly used (in various ways) for reporting levels of sound. A difference of 10 dB corresponds to a factor of 10 in sound power. The actual sound measurement is compared to a fixed reference level and the "decibel" value is defined to be $10 \log_{10} \left(\frac{\text{actual}}{\text{reference}} \right)$, where $\left(\frac{\text{actual}}{\text{reference}} \right)$ is a power ratio. Because sound power is usually proportional to sound pressure squared, the decibel value for sound pressure is $20 \log_{10} \left(\frac{\text{actual pressure}}{\text{reference pressure}} \right)$. The standard reference for underwater sound pressure is 1 micropascal (μPa). The dB symbol is followed by a second symbol identifying the specific reference value (i.e. re 1 μPa). |
| Peak pressure | The highest pressure above or below ambient that is associated with a sound wave. |
| Peak-to-peak pressure | The sum of the highest positive and negative pressures that is associated with a sound wave. |
| Permanent Threshold Shift (PTS) | A permanent total or partial loss of hearing caused by acoustic trauma. PTS results in irreversible damage to the sensory hair cells of the ear, and thus a permanent reduction of hearing acuity. |
| Sound Exposure Level (SEL) | The constant sound level acting for one second, which has the same amount of acoustic energy, as indicated by the square of the sound pressure, as the original sound. It is the time-integrated, sound-pressure-squared level. SEL is typically used to compare transient sound events having different time durations, pressure levels, and temporal characteristics. |
| Sound Pressure Level (SPL) | The sound pressure level or SPL is an expression of the sound pressure using the decibel (dB) scale, and the standard reference pressures of 1 μPa for water and 20 μPa for air. |
| Temporary Threshold Shift (TTS) | Temporary reduction of hearing acuity as a result of exposure to sound over time. Exposure to high levels of sound over relatively short time periods could cause the same amount of TTS as exposure to lower levels of sound over longer time periods. The mechanisms underlying TTS are not well understood, but there may be some temporary damage to the sensory cells. The duration of TTS varies depending on the nature of the stimulus. |
| Unweighted sound level | Sound levels which are 'raw' or have not been adjusted in any way, for example to account for the hearing ability of a species. |
| Weighted sound level | A sound level which has been adjusted with respect to a 'weighting envelope' in the frequency domain, typically to make an unweighted level relevant to a particular species. Examples of this are the dB(A), where the overall sound level has been adjusted to account for the hearing ability of humans in air, or the filters used by Southall <i>et al.</i> (2019) for marine mammals. |

1 Introduction

1. The Sheringham Shoal Offshore Wind Farm Extension Project (SEP) and the Dudgeon Offshore Wind Farm Extension Project (DEP) are proposed extensions to the existing Sheringham Shoal and Dudgeon offshore wind farms in the North Sea, off the coast of Norfolk, England. As part of the Environmental Impact Assessment (EIA) process, Subacoustech Environmental Ltd. have undertaken detailed underwater noise modelling and analysis in relation to marine mammals and fish for the two wind farm sites.
2. SEP is located immediately to the north and east of the existing Sheringham Shoal offshore wind farm, approximately 13.6 km from the shore at its closest point, with an expected capacity of up to 338 MW from between 13 and 23 wind turbine generators (WTGs). DEP covers two areas situated immediately to the north and southeast of the existing Dudgeon offshore wind farm, approximately 24.8 km from the shore at its closest point and with an expected capacity of 448 MW from between 17 and 30 WTGs. The locations of the two wind farm sites are shown in Figure 1-1.

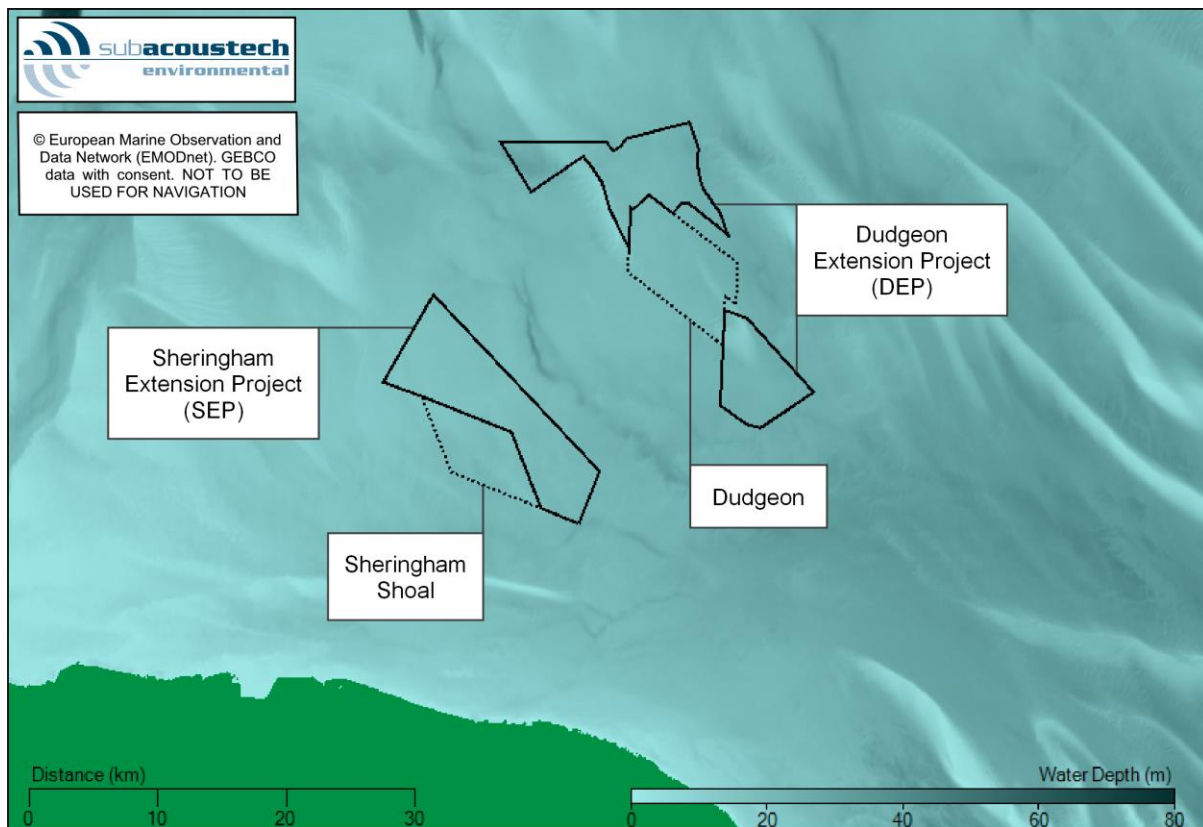


Figure 1-1 Overview map showing the SEP and DEP site boundaries (solid lines) as well as the original Sheringham Shoal and Dudgeon offshore wind farms (dotted lines)

3. This report presents a detailed assessment of the potential underwater noise and its effects during construction and operation of the SEP and DEP wind farms, and covers the following:
 - A review of background information on the units for measuring and assessing underwater noise and a review of the underwater noise metrics and criteria used to assess the possible environmental effects in marine receptors (Section 2);
 - Discussion of the approach, input parameters and assumptions for the noise modelling undertaken (Section 3);
 - A summary of measured background noise levels in the area (Section 3);
 - Presentation and interpretation of the detailed subsea noise modelling for impact piling with regards to the effects in marine mammals and fish using various metrics and criteria (Section 5);
 - Noise modelling of the other noise sources expected around construction and operation of the wind farms including cable laying, trenching, rock placement, drilling, dredging, vessel noise, operational WTG noise and UXO detonation (Section 6); and
 - Summary and conclusions (Section 7).
4. Further modelling results for single strike noise levels are provided in Appendix A of this report.

2 Background to underwater noise metrics

2.1 Underwater noise

2.1.1 Background

5. Sound travels much faster in water (approximately 1,500 ms⁻¹) than in air (340 ms⁻¹). Since water is a relatively incompressible, dense medium, the pressure associated with underwater sound tends to be much higher than in air. As an example, background noise levels in the sea of 130 dB re 1 µPa for UK coastal waters are not uncommon (Nedwell *et al.* 2003 and 2007).
6. It should be noted that stated underwater noise levels should not be confused with noise levels in air, which use a different scale.

2.1.2 Units of measurement

7. Sound measurements underwater are usually expressed using the decibel (dB) scale, which is a logarithmic measure of sound. A logarithmic scale is used because, rather than equal increments of sound having an equal increase in effect, typically each doubling of sound level will cause a roughly equal increase of “loudness.”
8. Any quantity expressed in this scale is termed a “level.” If the unit is sound pressure, expressed on the dB scale, it will be termed a “sound pressure level.”
9. The fundamental definition of the dB scale is given by:

$$Level = 10 \times \log_{10} \left(\frac{Q}{Q_{ref}} \right)$$

where Q is the quantity being expressed on the scale, and Q_{ref} is the reference quantity.

10. The dB scale represents a ratio. It is therefore used with a reference unit, which expresses the base from which the ratio is expressed. The reference quantity is conventionally smaller than the smallest value to be expressed on the scale so that any level quoted is positive. For example, a reference quantity of 20 µPa is used for sound in air since that is the lower threshold of human hearing.
11. When used with sound pressure, the pressure value is squared. So that variations in the units agree, the sound pressure must be specified as units of Root Mean Square (RMS) pressure squared. This is equivalent to expressing the sound as:

$$Sound\ pressure\ level = 20 \times \log_{10} \left(\frac{P_{RMS}}{P_{ref}} \right)$$

12. For underwater sound, a unit of 1 µPa is typically used as the reference unit (P_{ref}); a Pascal is equal to the pressure exerted by one Newton over one square metre, one micropascal equals one millionth of this.

2.1.2.1 Sound pressure level (SPL)

13. The sound pressure level (SPL) is normally used to characterise noise and vibration of a continuous nature, such as drilling, boring, continuous wave sonar, or background sea and river noise levels. To calculate the SPL, the variation in sound pressure is measured over a specific period to determine the RMS level of the time-varying sound. The SPL can therefore be considered a measure of the average unweighted level of sound over the measurement period.
14. Where SPL is used to characterise transient pressure waves, such as that from impact piling, seismic airgun or underwater blasting, it is critical that the period over which the RMS level is calculated is quoted. For instance, in the case of a pile strike lasting a tenth of a second, the mean

taken over a tenth of a second will be ten times higher than the mean averaged over one second. Often, transient sounds such as these are quantified using “peak” SPLs or sound exposure levels (SELs).

15. Unless otherwise defined, all SPL noise levels in this report are referenced to 1 µPa. It is recognised that ISO 18405 (2017) defines SPL in reference to the unit 1 µPa². As the key publications used in this assessment use the unit 1 µPa, this terminology will also be used in this report. This does not affect any results or values.

2.1.2.2 Peak sound pressure level (SPL_{peak})

16. Peak SPLs are often used to characterise transient sound from impulsive sources, such as percussive impact piling. SPL_{peak} is calculated using the maximum variation of the pressure from positive to zero within the wave. This represents the maximum change in positive pressure (differential pressure from positive to zero) as the transient pressure wave propagates.
17. A further variation of this is the peak-to-peak SPL (SPL_{peak-to-peak}) where the maximum variation of the pressure from positive to negative is considered. Where the wave is symmetrically distributed in positive and negative pressure, the peak-to-peak pressure will be twice the peak level, or 6 dB higher (see section 2.1.2).

2.1.2.3 Sound exposure level (SEL)

18. When considering the noise from transient sources, the issue of the duration of the pressure wave is often addressed by measuring the total acoustic energy (energy flux density) of the wave. This form of analysis was used by Bebb and Wright (1953, 1954a, 1954b, 1955), and later by Rawlins (1987), to explain the apparent discrepancies in the biological effect of short and long-range blast waves on human divers. More recently, this form of analysis has been used to develop criteria for assessing injury ranges for fish and marine mammals from various noise sources (Popper *et al.*, 2014 and Southall *et al.*, 2019).
19. The SEL sums the acoustic energy over a measurement period, and effectively takes account of both the SPL of the sound and the duration it is present in the acoustic environment. Sound Exposure (SE) is defined by the equation:

$$SE = \int_0^T p^2(t) dt$$

20. where p is the acoustic pressure in Pascals, T is the total duration of the sound in seconds, and t is the time in seconds. The SE is a measurement of acoustic energy and has units of Pascal squared seconds (Pa²s).
21. To express the SE on a logarithmic scale by means of a dB, it has to be compared with a reference acoustic energy level (p_{ref}^2) and a reference time (T_{ref}). The SEL is then defined by:

$$SEL = 10 \times \log_{10} \left(\frac{\int_0^T p^2(t) dt}{p_{ref}^2 T_{ref}} \right)$$

22. By selecting a common reference pressure (p_{ref}) of 1 µPa for assessments of underwater noise, the SEL and SPL can be compared using the expression:

$$SEL = SPL + 10 \times \log_{10} T$$

23. where the SPL is a measure of the average level of broadband noise and the SEL sums the cumulative broadband noise energy.

24. This means that, for continuous sounds of less than one second, the SEL will be lower than the SPL. For periods greater than one second, the SEL will be numerically greater than the SPL (i.e. for a continuous sound of 10 seconds duration, the SEL will be 10 dB higher than the SPL; for a sound of 100 seconds duration the SEL will be 20 dB higher than the SPL, and so on).
25. All SEL noise levels presented in this report are dB re 1 $\mu\text{Pa}^2\text{s}$.

2.2 Analysis of environmental effects

2.2.1 Background

26. Over the last 20 years it has become increasingly evident that noise from human activities in and around underwater environments can have an impact on the marine species in the area. The extent to which intense underwater sound might cause adverse impacts in species is dependent upon the incident sound level, source frequency, duration of exposure, and/or repetition rate of an impulsive sound (see, for example, Hastings and Popper, 2005). As a result, scientific interest in the hearing abilities of aquatic species has increased. Studies are primarily based on evidence from high level sources of underwater noise such as blasting or impact piling, as these sources are likely to have the greatest immediate environmental impact and therefore the clearest observable effects, although interest in chronic noise exposure is increasing.
27. The impacts of underwater sound on marine species can be broadly summarised as follows:
 - Physical traumatic injury and fatality;
 - Auditory injury (either permanent or temporary); and
 - Disturbance.
28. The following sections discuss the underwater noise criteria used in this study with respect to species of marine mammals and fish that may be present at the SEP and DEP wind farm sites.

2.2.2 Criteria to be used

29. The main metrics, criteria and observed levels that have been used in this study to aid assessment of environmental effects come from several key papers covering underwater noise and its effects:
 - Southall *et al.* (2019) marine mammal noise exposure criteria;
 - Lucke *et al.* (2009) TTS and behavioural thresholds for harbour porpoise;
 - Popper *et al.* (2014) sound exposure guidelines for fishes; and
 - Hawkins *et al.* (2014) observed responses in fish.
30. At the time of writing these are used as the most up to date and authoritative criteria for assessing environmental effects for use in impact assessments.

2.2.2.1 Marine mammals

31. The Southall *et al.* (2019) paper is effectively an update of the previous Southall *et al.* (2007) paper and provides identical thresholds to those from the National Marine Fisheries Service (NMFS) (2018) guidance for marine mammals.
32. The Southall *et al.* (2019) guidance groups marine mammals into categories of similar species and applies filters to the unweighted noise to approximate the hearing sensitivities of the receptor. The hearing groups given in Southall *et al.* (2019) are summarised in Table 2-1 and Figure 2-1. Further groups for sirenians and other marine carnivores in water are also given, but these have not been used for this study as those species are not commonly found in the North Sea.

| Hearing group | Generalised hearing range | Example species |
|-------------------------------------|---------------------------|---|
| Low-frequency cetaceans (LF) | 7 Hz to 35 kHz | Baleen whales |
| High-frequency cetaceans (HF) | 150 Hz to 160 kHz | Dolphins, toothed whales, beaked whales, bottlenose whales (including bottlenose dolphin) |
| Very high-frequency cetaceans (VHF) | 275 Hz to 160 kHz | True porpoises (including harbour porpoise) |
| Phocid carnivores in water (PCW) | 50 Hz to 86 kHz | True seals (including harbour seal) |

Table 2-1 Marine mammal hearing groups (from Southall et al., 2019)

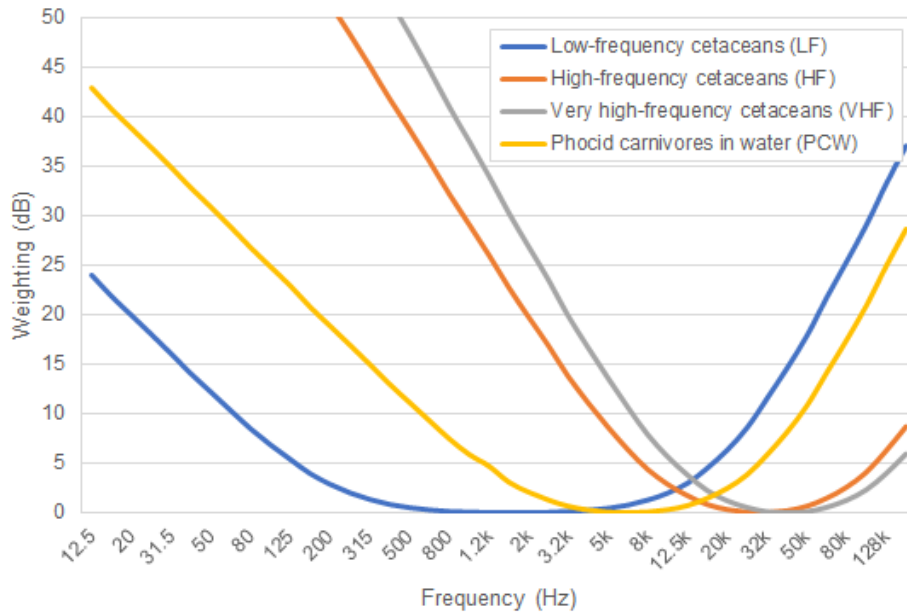


Figure 2-1 Auditory weighting functions for low-frequency cetaceans (LF), high-frequency cetaceans (HF), very high-frequency cetaceans (VHF), and phocid carnivores in water (PCW) (from Southall et al., 2019)

33. Southall et al. (2019) also gives individual criteria based on whether the noise source is considered impulsive or non-impulsive. Southall et al. categorises impulsive noises as having high peak sound pressure, short duration, fast rise-time and broad frequency content at source, and non-impulsive sources as steady-state noise. Explosives, impact piling and seismic airguns are considered impulsive noise sources and sonars, vibro-piling, drilling and other low-level continuous noises are considered non-impulsive. A non-impulsive noise does not necessarily have to have a long duration.
34. Southall et al. (2019) presents single strike, unweighted peak criteria (SPL_{peak}) and cumulative (i.e. more than a single sound impulse) weighted sound exposure criteria (SEL_{cum}) for both permanent threshold shift (PTS), where unrecoverable hearing damage may occur, and temporary threshold shift (TTS), where a temporary reduction in hearing sensitivity may occur in individual receptors.
35. As sound pulses propagate through the environment and dissipate, they also lose their most injurious characteristics (e.g. rapid pulse rise time and high peak sound pressure) and become more like a “non-pulse” at greater distances; Southall et al. (2019) briefly discusses this. Active research is currently underway into the identification of the distance at which the pulse can be considered effectively non-impulsive, and Hastie et al. (2019) have analysed a series of impulsive data to investigate this. Although the situation is complex, the paper reported that most of the

signals crossed their threshold for rapid rise time and high peak sound pressure characteristics associated with impulsive noise at around 3.5 km from the source. However, research by Martin *et al.* (2020) casts doubt on these findings, showing that noise in this category should be considered impulsive as long as it is above effective quiet. To provide as much detail as possible, both impulsive and non-impulsive criteria from Southall *et al.* (2019) have been included in this study.

36. Table 2-2 and Table 2-3 present the Southall *et al.* (2019) criteria for the onset of PTS and TTS risk for each of the key marine mammal hearing groups considering impulsive and non-impulsive sources.

| Southall <i>et al.</i> (2019) | Unweighted SPL _{peak} (dB re 1 µPa) | |
|-------------------------------------|--|-----|
| | Impulsive | |
| | PTS | TTS |
| Low-frequency cetaceans (LF) | 219 | 213 |
| High-frequency cetaceans (HF) | 230 | 224 |
| Very high-frequency cetaceans (VHF) | 202 | 196 |
| Phocid carnivores in water (PCW) | 218 | 212 |

Table 2-2 Single strike SPL_{peak} criteria for PTS and TTS in marine mammals (Southall *et al.*, 2019)

| Southall <i>et al.</i> (2019) | Weighted SEL _{cum} (dB re 1 µPa ² s) | | | |
|-------------------------------------|--|-----|---------------|-----|
| | Impulsive | | Non-impulsive | |
| | PTS | TTS | PTS | TTS |
| Low-frequency cetaceans (LF) | 183 | 168 | 199 | 179 |
| High-frequency cetaceans (HF) | 185 | 170 | 198 | 178 |
| Very high-frequency cetaceans (VHF) | 155 | 140 | 173 | 153 |
| Phocid carnivores in water (PCW) | 185 | 170 | 201 | 181 |

Table 2-3 Impulsive and non-impulsive SEL_{cum} criteria for PTS and TTS in marine mammals (Southall *et al.*, 2019)

37. Where SEL_{cum} are required, a fleeing animal model has been used for marine mammals. This assumes that a receptor, when exposed to high noise levels, will swim away from the noise source. For this, a constant fleeing speed of 3.25 ms⁻¹ has been assumed for the low-frequency cetaceans (LF) group (Blix and Folkow, 1995), based on data for minke whale, and for other receptors, a constant rate of 1.5 ms⁻¹ has been assumed for fleeing, which is a cruising speed for a harbour porpoise (Otani *et al.*, 2000). These are considered worst case assumptions as marine mammals are expected to be able to swim much faster under stress conditions. The fleeing animal model and the assumptions related to it are discussed in more detail in section 4.3.3.
38. It is worth noting that, with regards to the criteria from NMFS (2018), although numerically identical to Southall *et al.* (2019), the guidance applies different names to the marine mammal groups and weightings. For example, what Southall *et al.* (2019) calls high-frequency cetaceans (HF), NMFS (2018) calls mid-frequency cetaceans (MF), and what Southall *et al.* (2019) calls very high-frequency cetaceans (VHF), NMFS (2018) refers to as high-frequency cetaceans (HF). As such, care should be taken when comparing results using the Southall *et al.* (2019) and NMFS (2018) criteria, especially as the “HF” groupings and criteria describe different species depending on which study is being used.

39. Additionally, unweighted impulsive single-strike criteria from Lucke *et al.* (2009) have also been included as part of this study covering TTS and behavioural thresholds for harbour porpoise, which are based on impulsive seismic airgun stimuli. The criteria are given as unweighted peak-to-peak SPLs and unweighted single strike SELs.

- TTS in harbour porpoise at 199.7 dB re 1 μ Pa ($SPL_{peak-to-peak}$), and 164.3 dB re 1 μPa^2s (SEL_{ss}); and
- Aversive behavioural reaction in harbour porpoise at 174 dB re 1 μ Pa ($SPL_{peak-to-peak}$), and 145 dB re 1 μPa^2s (SEL_{ss})

2.2.2.2 *Fish*

40. The large number of, and variation in, fish species leads to a greater challenge in production of a generic noise criterion, or range of criteria, for the assessment of noise impacts. Whereas previous studies applied broad criteria based on limited studies of fish that are not present in UK waters (e.g., McCauley *et al.*, 2000), the publication of Popper *et al.* (2014) provides an authoritative summary of the latest research and guidelines for fish exposure to sound and uses categories for fish that are representative of the species present in UK waters.

41. The Popper *et al.* (2014) study groups species of fish by whether they possess a swim bladder, and whether it is involved in its hearing; a group for fish eggs and larvae is also included. The guidance also gives specific criteria (as both unweighted SPL_{peak} and unweighted SEL_{cum} values) for a variety of noise sources. A further set of criteria also exists for turtles, which have not been included as part of this study as they are not expected to be present at the site.

42. For this study, criteria for impact piling, continuous noise sources, and explosions have been considered; these are summarised in Table 2-4 to Table 2-6.

| Type of animal | Mortality and potential mortal injury | Impairment | |
|--|---------------------------------------|---------------------------------------|-----------------------|
| | | Recoverable injury | TTS |
| <i>Fish: no swim bladder</i> | > 219 dB SEL_{cum} > 213 dB peak | > 216 dB SEL_{cum} > 213 dB peak | >> 186 dB SEL_{cum} |
| <i>Fish: swim bladder is not involved in hearing</i> | 210 dB SEL_{cum} > 207 dB peak | 203 dB SEL_{cum} > 207 dB peak | > 186 dB SEL_{cum} |
| <i>Fish: swim bladder involving in hearing</i> | 207 dB SEL_{cum} > 207 dB peak | 203 dB SEL_{cum} > 207 dB peak | 186 dB SEL_{cum} |
| <i>Eggs and larvae</i> | > 210 dB SEL_{cum} > 207 dB peak | See Table 2-7 | See Table 2-7 |

Table 2-4 Criteria for mortality and potential mortal injury, recoverable injury and TTS in species of fish from impact piling noise (Popper *et al.*, 2014)

| Type of animal | Impairment | |
|--|--------------------------|--------------------------|
| | Recoverable injury | TTS |
| <i>Fish: swim bladder involving in hearing</i> | 170 dB RMS for 48 hrs | 158 dB RMS For 12 hrs |

Table 2-5 Criteria for recoverable injury and TTS in species of fish from continuous noise sources (Popper *et al.*, 2014)

| Type of animal | Mortality and potential mortal injury |
|--|---------------------------------------|
| <i>Fish: no swim bladder</i> | 229 – 234 dB peak |
| <i>Fish: swim bladder is not involved in hearing</i> | 229 – 234 dB peak |

| | |
|---|---------------------------------------|
| <i>Fish: swim bladder involved in hearing</i> | 229 – 234 dB peak |
| <i>Eggs and larvae</i> | > 13 mm s ⁻¹ peak velocity |

Table 2-6 Criteria for potential mortal injury in species of fish from explosions (Popper et al., 2014)

43. Where insufficient data are available, Popper et al. (2014) also gives qualitative criteria that summarise the effect of the noise as having either a high, moderate or low effect on an individual in either the near-field (tens of metres), intermediate-field (hundreds of metres), or far-field (thousands of metres). These qualitative effects are reproduced in Table 2-7 to Table 2-9.

| Type of animal | Impairment | | | Behaviour |
|--|------------------------------------|------------------------------------|--------------------------------------|--------------------------------------|
| | Recoverable injury | TTS | Masking | |
| <i>Fish: no swim bladder</i> | See Table 2-4 | See Table 2-4 | (N) Moderate (I) Low (F) Low | (N) High (I) Moderate (F) Low |
| <i>Fish: swim bladder is not involved in hearing</i> | See Table 2-4 | See Table 2-4 | (N) Moderate (I) Low (F) Low | (N) High (I) Moderate (F) Low |
| <i>Fish: swim bladder involving in hearing</i> | See Table 2-4 | See Table 2-4 | (N) High (I) High (F) Moderate | (N) High (I) High (F) Moderate |
| <i>Eggs and larvae</i> | (N) Moderate (I) Low (F) Low | (N) Moderate (I) Low (F) Low | (N) Moderate (I) Low (F) Low | (N) Moderate (I) Low (F) Low |

Table 2-7 Summary of the qualitative effects on species of fish from impact piling noise (Popper et al., 2014) (N = Near-field; I = Intermediate-field; F = Far-field)

| Type of animal | Mortality and potential mortal injury | Impairment | | | Behaviour |
|--|---------------------------------------|-------------------------------|------------------------------------|--------------------------------------|---|
| | | Recoverable injury | TTS | Masking | |
| <i>Fish: no swim bladder</i> | (N) Low (I) Low (F) Low | (N) Low (I) Low (F) Low | (N) Moderate (I) Low (F) Low | (N) High (I) High (F) Moderate | (N) Moderate (I) Moderate (F) Low |
| <i>Fish: swim bladder is not involved in hearing</i> | (N) Low (I) Low (F) Low | (N) Low (I) Low (F) Low | (N) Moderate (I) Low (F) Low | (N) High (I) High (F) Moderate | (N) Moderate (I) Moderate (F) Low |
| <i>Fish: swim bladder involving in hearing</i> | (N) Low (I) Low (F) Low | See Table 2-5 | See Table 2-5 | (N) High (I) High (F) High | (N) High (I) Moderate (F) Low |
| <i>Eggs and larvae</i> | (N) Low (I) Low (F) Low | (N) Low (I) Low (F) Low | (N) Low (I) Low (F) Low | (N) High (I) Moderate (F) Low | (N) Moderate (I) Moderate (F) Low |

Table 2-8 Summary of the qualitative effects on fish from continuous noise from Popper et al. (2014) (N = Near-field; I = Intermediate-field; F = Far-field)

| Type of animal | Impairment | | | Behaviour |
|--|---------------------------------|-------------------------------------|---------|-------------------------------------|
| | Recoverable injury | TTS | Masking | |
| <i>Fish: no swim bladder</i> | (N) High (I) Low (F) Low | (N) High (I) Moderate (F) Low | N/A | (N) High (I) Moderate (F) Low |
| <i>Fish: swim bladder is not involved in hearing</i> | (N) High (I) High (F) Low | (N) High (I) Moderate (F) Low | N/A | (N) High (I) High (F) Low |
| <i>Fish: swim bladder involving in hearing</i> | (N) High (I) High (F) Low | (N) High (I) High (F) Low | N/A | (N) High (I) High (F) Low |
| <i>Eggs and larvae</i> | (N) High (I) Low | (N) High (I) Low | N/A | (N) High (I) Low |

| | | | | |
|--|---------|---------|--|---------|
| | (F) Low | (F) Low | | (F) Low |
|--|---------|---------|--|---------|

Table 2-9 Summary of the qualitative effects on species of fish from explosions (Popper *et al.*, 2014)
(N = Near-field; I = Intermediate-field; F = Far-field)

44. Both fleeing animal and stationary animal models have been used to cover the SEL_{cum} criteria for fish. It is recognised that there is limited evidence for fish fleeing from high level noise sources in the wild, and it would reasonably be expected that the reaction would differ between species. Most species are likely to move away from a sound that is loud enough to cause harm (Dahl *et al.*, 2015; Popper *et al.*, 2014), some may seek protection in the sediment and others may dive deeper in the water column. For those species that flee, the speed chosen for this study of 1.5 ms⁻¹ is relatively slow in relation to data from Hirata (1999) and thus is considered somewhat conservative.
45. Although it is feasible that some species will not flee, those that are likely to remain are thought more likely to be benthic species or species without a swim bladder; these are the least sensitive species. For example, from Popper *et al.* (2014): “There is evidence (e.g., Goertner *et al.*, 1994; Stephenson *et al.*, 2010; Halvorsen *et al.*, 2012) that little or no damage occurs to fishes without a swim bladder except at very short ranges from an in-water explosive event. Goertner (1978) showed that the range from an explosive event over which damage may occur to a non-swim bladder fish is in the order of 100 times less than that for swim bladder fish.”
46. Stationary animal modelling has been included in this study, based on research from Hawkins *et al.* (2014) and other modelling for similar EIA projects. However, basing the modelling on a stationary (zero flee speed) receptor is likely to greatly overestimate the potential risk to fish species, assuming that an individual would remain in the high noise level region of the water column, especially when considering the precautionary nature of the parameters already built into the cumulative exposure calculations.
47. In the absence of reliable numerical criteria for behavioural disturbance in fish, observed levels from Hawkins *et al.* (2014) have been used for this study, even though the authors of the paper themselves urge caution with the use of the values as criteria. Also, the study was conducted under conditions in quiet inland waters which are unlikely to be equivalent to those around the SEP and DEP sites.
48. Hawkins *et al.* (2014) gives unweighted SPL_{peak}, SPL_{peak-to-peak}, and SEL_{ss} levels where a 50% response level was recorded in sprat and mackerel for an impulsive noise source, simulating pile driving. These levels are summarised in Table 2-10.

| Noise metric | Observed noise level for 50% response |
|--|---------------------------------------|
| Unweighted SPL _{peak} | 173 |
| | 168 |
| Unweighted SPL _{peak-to-peak} | 163 |
| Unweighted SEL _{ss} | 142 |
| | 135 |

Table 2-10 Levels where a 50% response was observed in fish from Hawkins *et al.* (2014)

2.2.2.3 Particle motion

49. The criteria defined in the above section all define the noise impacts on fishes in terms of sound pressure-associated functions (i.e., SEL). It has been identified by researchers (e.g., Popper and Hawkins, 2019; Nedelec *et al.*, 2016; Radford *et al.*, 2012) that species of fish, as well as invertebrates, actually detect particle motion rather than pressure. Particle motion describes the back-and-forth movement of a tiny theoretical ‘element’ of water, substrate or other media as a sound wave passes, rather than the pressure caused by the action of the force created by this movement. Particle motion is usually defined in reference to the velocity of the particle (often a peak particle velocity, PPV), but sometimes the related acceleration or displacement of the particle

is used. Note that species in the “Fish: swim bladder involved in hearing” category, the most sensitive species in the tables above, are sensitive to sound pressure.

50. Popper and Hawkins (2018) state that in derivation of the sound pressure-based criteria in Popper *et al.* (2014) it may be the unmeasured particle motion detected by the fish, to which the fish were responding: there is a relationship between particle motion and sound pressure in a medium. This relationship is very difficult to define where the sound field is complex, such as close to the noise source or where there are multiple reflections of the sound wave in shallow water. Even these terms “shallow” and “close” do not have simple definitions.
51. The primary reason for the continuing use of sound pressure as the criteria, despite particle motion appearing to be the physical quantity to which many fish react or sense, is a lack of data (Popper and Hawkins, 2018), both in respect of predictions of the particle motion level as a consequence of a noise source such as piling, and a lack of knowledge of the sensitivity of a fish, or a wider category of fish, to a particle motion value. There continue to be calls for additional research on the levels of and effects with respect to levels of particle motion. Until sufficient data are available to enable revised thresholds based on the particle motion metric, Popper *et al.* (2014) continues to be the best source of criteria in respect to fish impacts (Andersson *et al.*, 2016; Popper and Hawkins, 2019).

3 Background noise levels

52. The baseline noise level in open water, in the absence of any anthropogenic noise source, is generally dependent on a mix of the movement of the water and sediment, weather conditions and shipping. There is a component of biological noise from marine mammals and fish vocalisation, as well as an element from invertebrates.
53. Outside of the naturally occurring ambient noise, man-made noise dominates the background. The North Sea is heavily shipped by fishing, cargo, and passenger vessels, which contribute to the ambient noise in the water. The larger vessels are not only louder, but the noise tends to have a lower frequency, which travels more readily, especially in the deeper open water. Other vessels such as aggregate dredgers and small fishing boats have a lower overall contribution. There are no dredging areas, active dredge zones, or dredging application option and prospecting areas within or in close proximity to the SEP or DEP project area.
54. Other sources of anthropogenic noise include oil and gas platforms and other drilling activity and military exercises. Drilling, including oil and gas drilling, may contribute some low frequency noise in the wind farm site, although due to its low-level nature (see Section 6), this is unlikely to contribute to the overall ambient noise. Little information is available on the scope and timing of military exercises, but they are not expected to last for an extended period and so would have little contribution to the long-term ambient noise in the area. There are increasing numbers of wind turbines in the North Sea, and in combination, Tougaard *et al.* (2020) predict that *“If the ambient noise is high, as it would be for a wind farm next to a shipping lane, the turbine noise will only be detectable above ambient very close to the individual turbines.”* Thus, the ambient noise levels at the SEP and DEP wind farms are unlikely to be affected significantly by operational turbines at any other wind farm site.
55. The Marine Strategy Framework Directive requires European Union members to ascertain baseline noise levels by 2020 and monitoring processes are being put into place for this around Europe. Good quality, long-term underwater noise data for the region is, however, not currently available.
56. Typical underwater noise levels show a frequency dependency in relation to different noise sources; the classic curves for this are given in Wenz (1962) and are reproduced in Figure 3-1 below. Figure 3-1 shows that any unweighted overall (i.e., single-figure, non-frequency-dependent) noise level is typically dependent on the very low frequency element of the noise. The introduction of a nearby anthropogenic noise source (such as piling or sources involving engines) will tend to increase the noise levels in the 100 to 1,000 Hz region, but to a lesser extent will also extend into higher and lower frequencies.

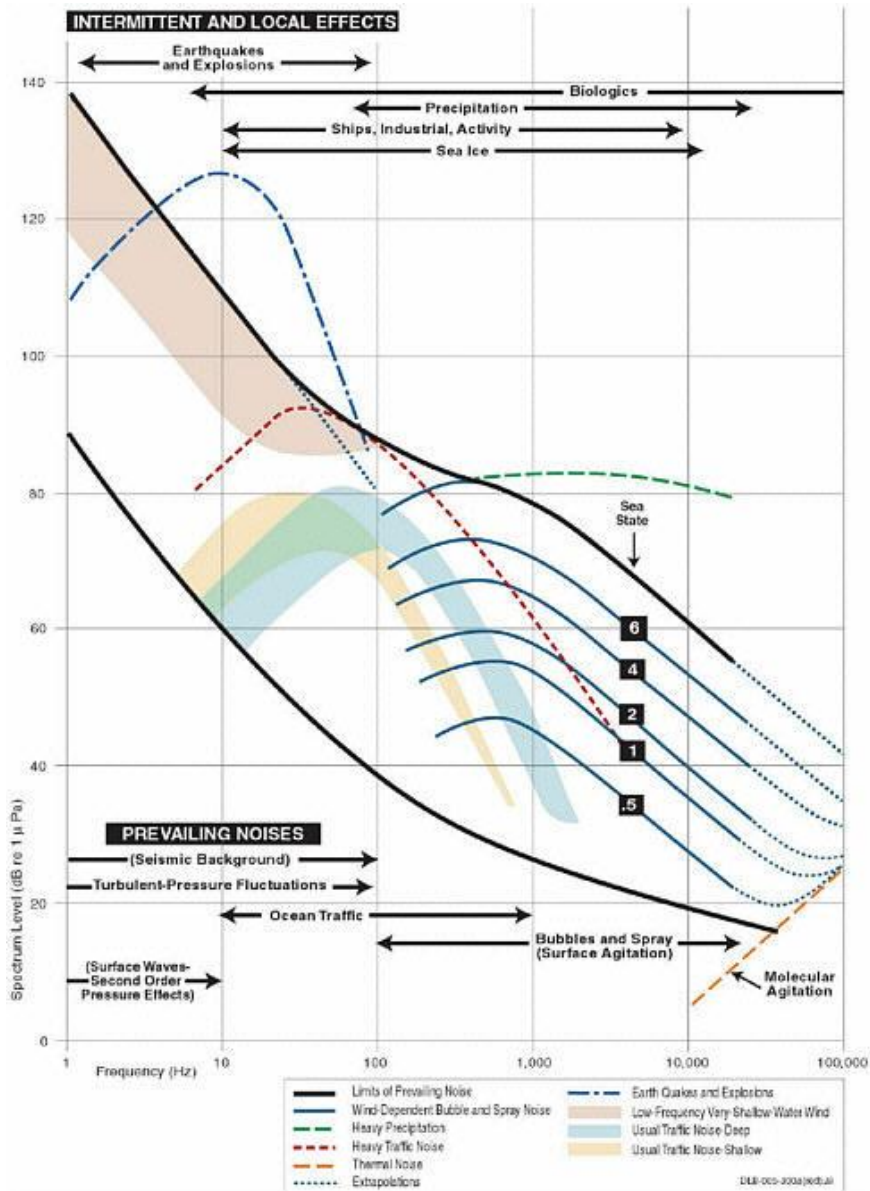


Figure 3-1 : Ambient underwater noise, following Wenz (1962), showing frequency dependency from different noise sources.

57. Background noise monitoring was undertaken as part of the Sheringham Shoal Offshore Wind Farm installation and during the operational phase, but at sufficient distance or under appropriate conditions that there was no influence from any piling, site traffic or operational turbines (NPL, 2010 and 2013). Measurements of background noise taken as part of the piling survey in 2010 showed the highest third-octave band noise levels in the 100 Hz band of approximately 116 to 117 dB re 1 µPa. NPL (2013) identified that “maximum third-octave band spectral noise levels are generally between around 95 and 120 dB re 1 µPa²/Hz”. During this survey under low wind conditions when turbines were not operational, noise levels were generally below 95 dB in any third-octave band above 20 Hz.
58. In 2011, around the time of the met mast installation in the former Hornsea zone, snapshot baseline underwater noise levels were sampled as part of the met mast installation noise survey (Nedwell and Cheesman, 2011). Measurements were taken outside of the installation period and in the absence of any nearby vessel noise. The survey sampled noise levels of between 112 and 122 dB re 1 µPa (RMS) over two days, levels that were described as not unusual for the area and in line

with the measurements taken by NPL at Sheringham Shoal. The higher figure was due to a higher sea state on that day. Unweighted overall noise levels of this type should be used with caution without access to more detail regarding the duration, frequency content and conditions under which the sound was recorded, although they do demonstrate an indication of the natural variation in background noise levels.

59. The measurements taken do show noise levels that are of the same order as baseline noise levels sampled elsewhere in the North Sea (Nedwell et al., 2003) and so are considered to be typical and realistic.
60. In principle, when noise introduced by anthropogenic sources propagates far enough it will reduce to the level of natural ambient noise, at which point it can be considered negligible. In practice, as the underwater noise thresholds defined in section 2.2 are all considerably above the level of background noise, any noise baseline would not feature in an assessment to these criteria.

4 Modelling methodology

4.1 Introduction

61. To estimate the underwater noise levels likely to arise during the construction and operation of SEP and DEP, predictive noise modelling has been undertaken. The methods described in this section, and utilised within this report, meet the requirements set by the NPL Good Practice Guide 133 for underwater noise measurement (Robinson *et al.*, 2014).
62. The modelling of impact piling has been undertaken using the INSPIRE noise model. The INSPIRE model (currently version 5.1) is a semi-empirical underwater noise propagation model based around a combination of numerical modelling and actual measured data. It is designed to calculate the propagation of noise in shallow, mixed water, typical of the conditions around the UK and very well suited to the region around SEP and DEP. The model has been tuned for accuracy using over 80 datasets of underwater noise propagation from monitoring around offshore piling activities.
63. The model provides estimates of unweighted SPL_{peak} , SEL_{ss} and SEL_{cum} noise levels, as well as various other weighted noise metrics. Calculations are made along 180 equally spaced radial transects (one every two degrees). For each modelling run a criterion level can be specified allowing a contour to be drawn, within which a given effect may occur. These results can then be plotted over digital bathymetry data so that impact ranges can be clearly visualised as necessary. INSPIRE also produces these contours as GIS shapefiles.
64. INSPIRE considers a wide array of input parameters, including variations in bathymetry and source frequency content to ensure accurate results are produced specific to the location and nature of the piling operation. It should also be noted that the results presented in this study should be considered conservative as maximum design parameters and worst case assumptions have been selected for:
 - Piling hammer blow energies;
 - Soft start, ramp up profile, and strike rate;
 - Total duration of piling; and
 - Receptor swim speeds.
65. A simple modelling approach has been used for noise sources other than piling that may be present during the lifecycle of SEP and DEP. These are discussed in section 6.

4.2 Modelling confidence

66. Previous iterations of the INSPIRE model have endeavoured to give a conservative estimate of underwater noise levels from impact piling. There is always some variability with underwater noise measurements, even when considering measurements of pile strikes at the same blow energy taken at the same range. For example, there can be big variations in noise level, sometimes up to 5 or even 10 dB, as seen in Bailey *et al.* (2010) and the data shown in Figure 4-1. When using a such an approach, conservatism can be compounded and create overcautious predictions; for example, calculating SEL_{cum} . With this in mind, the current version of the INSPIRE model attempts to calculate an average fit to the measured noise levels at all ranges.
67. The current version of INSPIRE is the product of re-analysing all the impact piling noise measurements in Subacoustech Environmental's measurement database and cross-referencing it with blow energy data from piling logs, giving a database of single strike noise levels referenced to a specific blow energy at a specific range. This re-analysis showed that the previous versions of INSPIRE could overestimate the change in noise level with higher blow energies and

underestimate levels at lower blow energies, which in some cases led to overestimations in predicted levels.

68. As INSPIRE is semi-empirical, a validation process is inherently built into the development process. Whenever a new set of good, reliable impact piling measurement data is gathered through offshore surveys, it is compared against the outputted levels from INSPIRE and, if necessary, the model can be adjusted accordingly. Currently over 80 separate impact piling noise datasets from all around the UK have been used as part of the development for the latest version of INSPIRE, and in each case, an average fit is used. This is the same process that has been used for previous iterations of INSPIRE, and with each new version more measurement data is included.
69. In addition, INSPIRE is also validated by comparing the noise levels outputted from the model with measurements and modelling undertaken by third parties.
70. Figure 4-1 and Figure 4-2 present a small selection of measured impact piling noise data plotted against outputs from INSPIRE covering both SPL_{peak} and SEL_{ss} data. The plots show data points from measured data (in blue) plotted alongside modelled data (in orange) using INSPIRE version 5.1, matching the pile size, blow energy and range from the measured data. These show the average fit to data, with the INSPIRE modelled data points sitting, more or less, in the middle of the measured noise levels at each range.

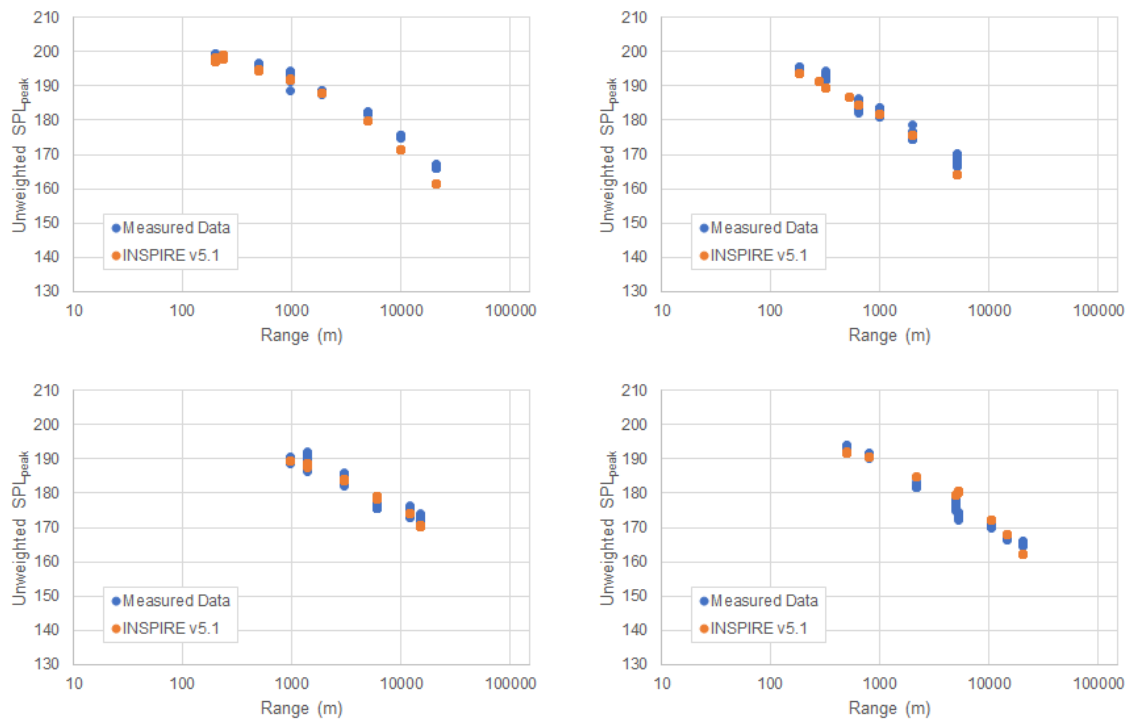


Figure 4-1 Comparison between example unweighted SPL_{peak} measured data (blue points) and modelled data using INSPIRE version 5.1 (orange points)

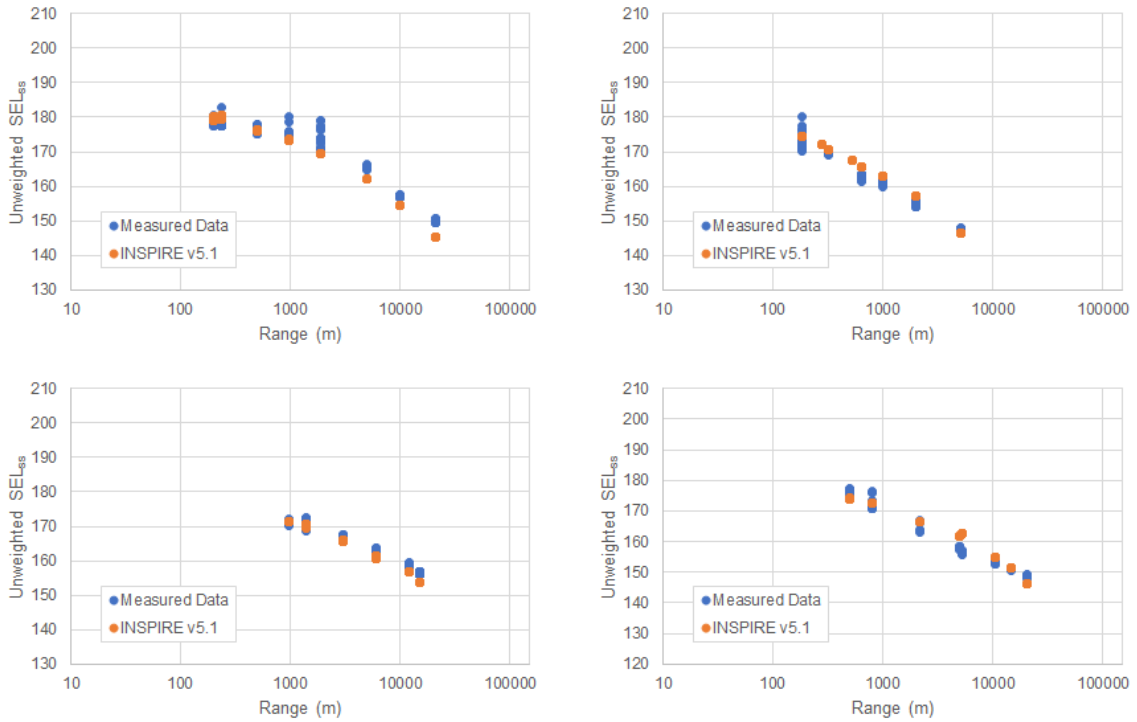


Figure 4-2 Comparison between example unweighted SEL_{ss} measured data (blue points) and modelled data using INSPIRE version 5.1 (orange points)

4.3 Modelling parameters

4.3.1 Modelling locations

71. Modelling has been undertaken at four representative locations, covering the extents of the SEP and DEP sites, with two positions modelled at each site. The eastern and northern corners were chosen for SEP and the north-eastern corner of DEP North and the south-eastern corner of DEP South were chosen for modelling. These locations are summarised in Table 4-1 and illustrated in Figure 4-3.

| Modelling locations | SEP | | DEP | |
|-------------------------|------------|------------|-----------------|-----------------|
| | East (E) | North (N) | North East (NE) | South East (SE) |
| Latitude | 53.1219°N | 53.2446° N | 53.3657°N | 53.1775°N |
| Longitude | 001.2841°E | 001.0920°E | 001.3897°E | 001.5335°E |
| Water depth (mean tide) | 21.3 m | 18.6 m | 23.2 m | 25.5 m |

Table 4-1 Summary of the underwater noise modelling locations at the SEP and DEP sites

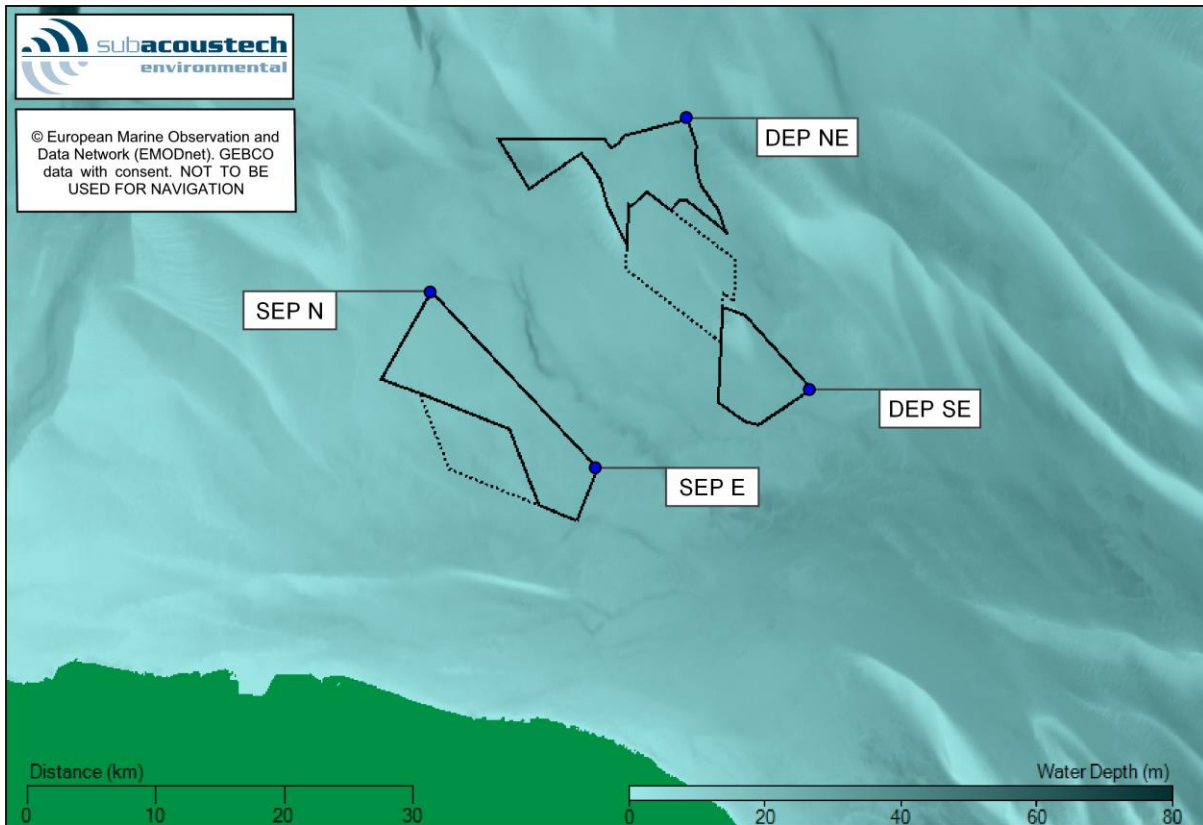


Figure 4-3 Approximate positions of the modelling locations at the SEP and DEP sites

4.3.2 Impact piling parameters

72. A selection of piling scenarios has been modelled including monopile and pin pile foundations for WTGs, covering both worst case and most likely installation scenarios. The worst case installation scenarios consider the maximum possible piling durations and blow energies at the end of ramp up, which may prove to be highly unrealistic due to hammer capacity or pile fatigue. The most likely scenarios use more realistic blow energies and durations, which have been chosen based on what has been seen at other wind farm installations. The modelled scenarios include:
- Monopile worst case – up to 16 m in diameter, installed using a maximum blow energy of 5,500 kJ;
 - Worst case pin pile – up to 4.0 m in diameter, installed using a maximum blow energy of 3,000 kJ;
 - Worst case pin pile – up to 3.5 m in diameter, installed using a maximum blow energy of 3,000 kJ; and
 - Most likely monopile – up to 16 m in diameter, installed using a maximum blow energy of 4,500 kJ.
73. Two “worst case” options have been included for the pin piles, rather than a “most likely” to reflect the options currently available.
74. For SEL_{cum} , the soft start and ramp up of blow energies along with the total duration and strike rate must also be considered; these vary for the worst case and most likely scenarios. The soft start and ramp up scenarios for this modelling are summarised in Table 4-2 to Table 4-4. The main difference between the worst case and most likely scenarios are that the most likely

scenario uses lower blow energies and utilises a soft start procedure whereby single blows of the piling hammer occur at low energy, interspersed with pauses of several minutes before commencing a more continuous strike rate, before ramping up to maximum energy.

75. The modelled scenarios contain a total of 9,250 strikes over 4 hours for the worst case monopile scenario, 6,600 strikes over 3 hours for the worst case pin pile scenarios, and 7,004 strikes over 3 hours and 10 minutes for the most likely monopile scenario.

| Monopile worst case | 1,000 kJ | 1,500 kJ | 2,500 kJ | 3,500 kJ | 4,500 kJ | 5,500 kJ |
|---------------------|------------|------------|------------|------------|------------|------------|
| Number of strikes | 1,350 | 2,400 | 1,600 | 1,200 | 1,350 | 1,350 |
| Duration | 30 mins | 40 mins | 40 mins | 40 mins | 45 mins | 45 mins |
| Strikes per minute | 45 str/min | 60 str/min | 40 str/min | 30 str/min | 30 str/min | 30 str/min |

Table 4-2 Summary of the worst case ramp up scenario used for calculating SEL_{cum} for monopiles

| Pin pile worst case | 400 kJ | 920 kJ | 1,440 kJ | 1,960 kJ | 2,480 kJ | 3,000 kJ |
|---------------------|------------|------------|------------|------------|------------|------------|
| Number of strikes | 1,200 | 1,200 | 1,200 | 1,200 | 900 | 900 |
| Duration | 30 mins | 30 mins | 30 mins | 30 mins | 30 mins | 30 mins |
| Strikes per minute | 40 str/min | 40 str/min | 40 str/min | 40 str/min | 30 str/min | 30 str/min |

Table 4-3 Summary of the worst case ramp up scenario used for calculating SEL_{cum} for pin piles (the same ramp up has been assumed for both 4.0 m and 3.5 m diameter pile scenarios)

| Monopile most likely | 600 kJ | 600 kJ | 1,500 kJ | 2,500 kJ | 3,500 kJ | 4,500 kJ |
|----------------------|---------------------|------------|------------|------------|------------|------------|
| Number of strikes | 4 | 900 | 2,400 | 1,600 | 1,200 | 900 |
| Duration | 20 mins | 20 mins | 40 mins | 40 mins | 40 mins | 30 mins |
| Strike rate | 1 strike per 5 mins | 45 str/min | 60 str/min | 40 str/min | 30 str/min | 30 str/min |

Table 4-4 Summary of the most likely ramp up scenario used for calculating SEL_{cum} for monopiles

76. In addition, scenarios covering various combinations of piles being installed simultaneously in multiple, worst case, locations, and piles installed sequentially, are summarised below.
77. Simultaneous piling (4 scenarios):
- Installation of monopiles (worst case) at the SEP East (E) location and DEP South East (SE) location;
 - Installation of pin piles (worst case; 4 m diameter) at the SEP E location and DEP SE location;
 - Installation of a pin pile (worst case; 4 m diameter) at the SEP E location and a monopile (worst case) at the DEP SE location; and
 - Installation of a monopile (worst case) at the SEP E location and a pin pile (worst case; 4 m diameter) at the DEP SE location.
78. Sequential piling (5 scenarios):
- Installation of 2 monopiles at the SEP E location;
 - Installation of 2 monopiles at the DEP SE location;
 - Installation of 4 pin piles at the SEP E location;
 - Installation of 4 pin piles at the DEP SE location; and
 - Installation of 1 monopile at DEP SE followed by 1 monopile at SEP E.

4.3.2.1 Source levels

79. Noise modelling requires knowledge of the source level, which is the theoretical noise level at one metre from the noise source. These are derived as part of Subacoustech’s modelling, based on empirical measurements of over 80 datasets of piling noise.
80. The INSPIRE model assumes that the noise source, the hammer striking the pile, acts as a single point, as it will appear at a distance. The source level is estimated based on the pile diameter and the blow energy imparted on the pile by the hammer. This is then adjusted depending on the water depth at the modelling location to allow for the length of pile in contact with the water, which can affect the amount of noise that is transmitted from the pile into its surroundings.
81. Technically a source level does not exist for piling in this situation as the actual source level at 1 m from the pile is highly complex, and so this number is effectively an ‘apparent source level’, critical to the operation of the model and designed solely to produce accurate noise levels at a significant distance from the pile. The source levels are not necessarily compatible or comparable with any other model or predicted source levels.
82. The unweighted single strike SPL_{peak} and SEL_{ss} source levels estimated for this study are provided in Table 4-5 and Table 4-6. In general, the source levels for the different locations are very similar, due to the relative uniformity of all the water depths at the source locations (Table 4-1; 18.6 m to 25.5 m). The difference in source level between the two sizes of pin pile are also minor.

| SPL_{peak} source levels (dB re 1 μPa @ 1 m) | Site | Location | Monopile (16 m diameter) | Pin Pile (4.0 m diameter) | Pin pile (3.5 m diameter) |
|---|------|----------|--------------------------------|---------------------------------|---------------------------------|
| Worst case Monopile: 5,500 kJ Pin pile: 3,000 kJ | SEP | E | 242.9 | 241.6 | 241.4 |
| | | N | 242.9 | 241.5 | 241.4 |
| | DEP | NE | 242.9 | 241.6 | 241.5 |
| | | SE | 242.9 | 241.6 | 241.5 |
| Most Likely Monopile: 4,500 kJ | SEP | E | 242.6 | | |
| | | N | 242.6 | | |
| | DEP | NE | 242.6 | | |
| | | SE | 242.6 | | |

Table 4-5 Summary of the unweighted SPL_{peak} source levels used for modelling

| SEL_{ss} source levels (dB re 1 μPa^2s @ 1 m) | Site | Location | Monopile (16 m diameter) | Pin Pile (4.0 m diameter) | Pin pile (3.5 m diameter) |
|---|------|----------|--------------------------------|---------------------------------|---------------------------------|
| Worst case Monopile: 5,500 kJ Pin pile: 3,000 kJ | SEP | E | 224.1 | 222.3 | 222.1 |
| | | N | 224.1 | 222.2 | 222.0 |
| | DEP | NE | 224.1 | 222.3 | 222.1 |
| | | SE | 224.1 | 222.4 | 222.2 |
| Most Likely Monopile: 4,500 kJ | SEP | E | 223.7 | | |
| | | N | 223.7 | | |
| | DEP | NE | 223.7 | | |
| | | SE | 223.7 | | |

Table 4-6 Summary of the unweighted SEL_{ss} source levels used for modelling

4.3.2.2 Environmental conditions

83. With the inclusion of measured data for similar offshore piling operations in UK waters, the INSPIRE model intrinsically accounts for various environmental conditions. This includes the differences that can occur with the temperature and salinity of water as well as the sediment type surrounding the site. Data from the European Marine Observation and Data Network (EMODnet)

geology study show that the seabed surrounding the SEP and DEP sites are generally made up of sand and sandy gravel.

84. Digital bathymetry, also from the EMODnet, has been used for this modelling; mean tidal depth has been used throughout.

4.3.3 Cumulative SELs and fleeing receptors

85. Expanding on the information in section 2.2.2 regarding SEL_{cum} and the fleeing animal model used for modelling, it is important to understand what the results presented in the following sections mean.
86. When an SEL_{cum} impact range is presented for a fleeing animal, this range can essentially be considered a starting position (at commencement of piling) for the receptor. For example, if a receptor starting at a position denoted on a PTS contour began to flee, in a straight line, away from the noise source, the receptor would receive exactly the noise exposure as per the PTS criterion under consideration.
87. To help explain this, it is helpful to examine how the multiple pulse SEL_{cum} ranges are calculated. As explained in section 2.1.2.3, the SEL_{cum} is a measure of the total received noise over the whole piling operation; in the case of the Southall *et al.* (2019) and Popper *et al.* (2014) criteria this covers any piling a 24-hour period.
88. When considering a stationary receptor, that is, one that stays at the same position throughout piling, calculating the SEL_{cum} is relatively straightforward: all the noise levels received at a single point along the transect are aggregated to calculate the SEL_{cum} . If this calculated level is greater than the threshold being modelling, the model steps away from the noise source and the noise levels from that new location are aggregated to calculate the new SEL_{cum} . This continues outward until the threshold is met.
89. For a fleeing animal, the receptor's distance from the noise source while fleeing needs to be considered. To model this, a starting point close to the source is chosen, and then the received noise level for each pile strike while the receptor is fleeing is noted. If, for example, a pile strike occurs every 6 seconds and an animal is fleeing at a rate of 1.5 ms^{-1} , it is 9 m further from the source at a subsequent pile strike, resulting in a slightly reduced received noise level with each strike. These values are then aggregated into an SEL_{cum} over the entire piling period. The faster an animal is fleeing the greater distance travelled between each pile strike. The impact range outputted by the model for this situation is the distance the receptor must be at the start of piling to exactly meet the exposure threshold.
90. The graphs in Figure 4-4 and Figure 4-5 show the difference in the SELs received by a stationary receptor and a fleeing receptor travelling at a constant speed of 1.5 ms^{-1} , using the worst case monopile parameters (Table 4-2). This was carried out at the SEP East location as an example.
91. The received SEL_{ss} from a stationary receptor, as illustrated in Figure 4-4, shows the noise level gradually increasing as the blow energy increases throughout the piling operation. These step changes are also visible for the fleeing receptor, but as the receptor is further from the source by the time the levels increase, the total received exposure is reduced, resulting in progressively lower received noise levels. For example, after the first 30 minutes where the blow energy is 1,000 kJ, the fleeing receptor will have already moved 2.7 km away. After the full piling duration of 4 hours the receptor will be over 21 km from the pile.
92. Figure 4-5 shows the effect these different received levels have when calculating the SEL_{cum} . It clearly shows the difference in cumulative effect of the receptor remaining still as opposed to fleeing. To use an extreme example, starting at a range of 1 m, the first strike results in a received level of 219.2 dB re $1 \mu\text{Pa}^2\text{s}$. If the receptor were to remain stationary throughout the 4 hours of

piling it would receive a cumulative received level of 262.0 dB re 1 $\mu\text{Pa}^2\text{s}$, whereas fleeing at 1.5 ms^{-1} over the same piling scenario would result in a cumulative received level of just 221.9 dB re 1 $\mu\text{Pa}^2\text{s}$.

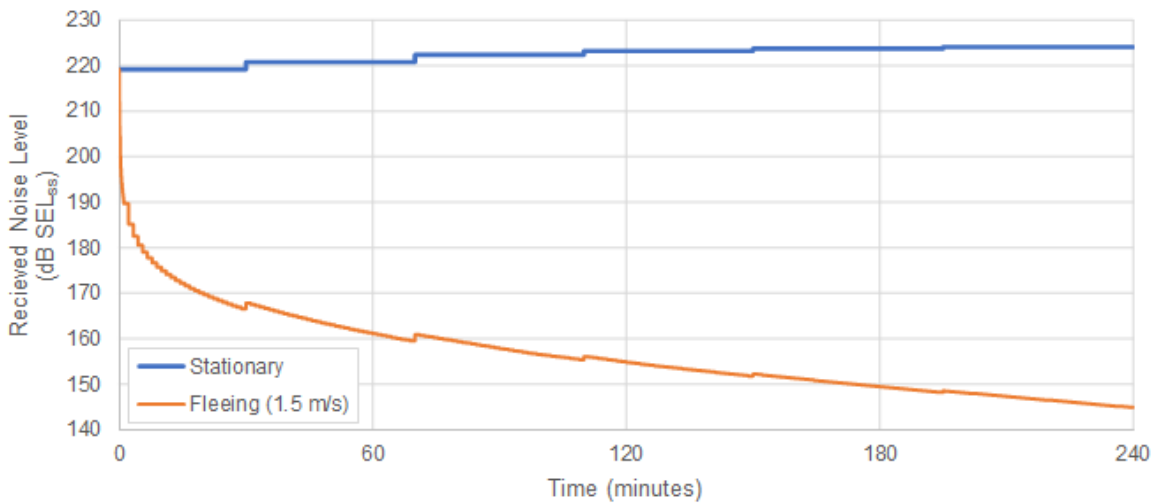


Figure 4-4 Received single-strike noise levels (SEL_{ss}) for receptors during the worst case monopile piling parameters assuming both a stationary and a fleeing receptor starting at a location 1 m from the noise source

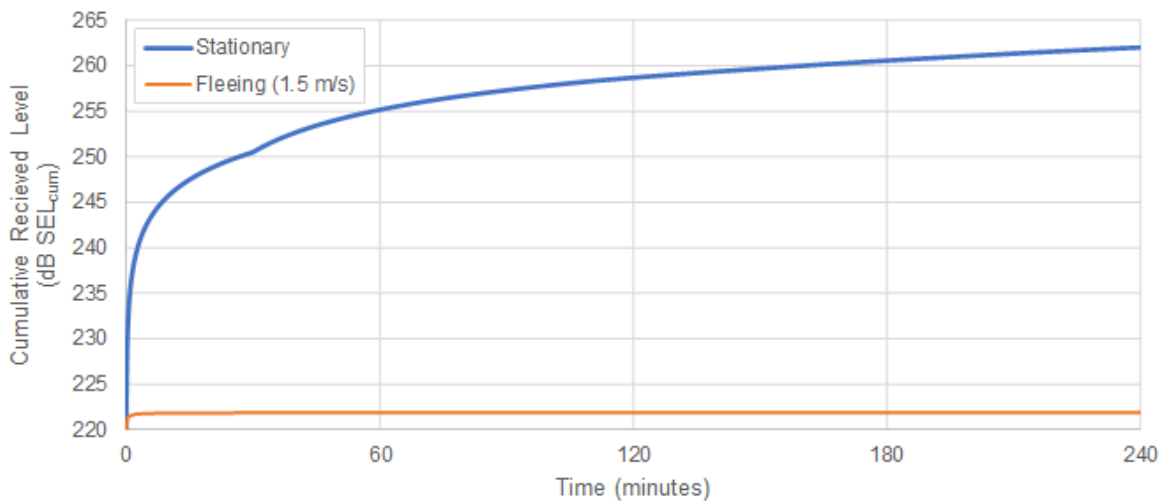


Figure 4-5 Cumulative received noise levels (SEL_{cum}) for receptors during the worst case monopile piling parameters assuming both a stationary and fleeing receptor starting at a location 1 m from the noise source

- The outputted SEL_{cum} values, and ranges presented in section 5, represent the position from where a receptor must begin fleeing at the start of piling in order to exactly receive the noise exposure criterion at the end of the modelled piling event. To summarise, if the receptor were to start fleeing in a straight line from the noise source starting at a range closer than the modelled value it would receive a noise exposure in excess of the criteria, and if the receptor were to start fleeing from a range further than the modelled value it would receive a noise exposure below the criteria. This is illustrated in Figure 4-6.

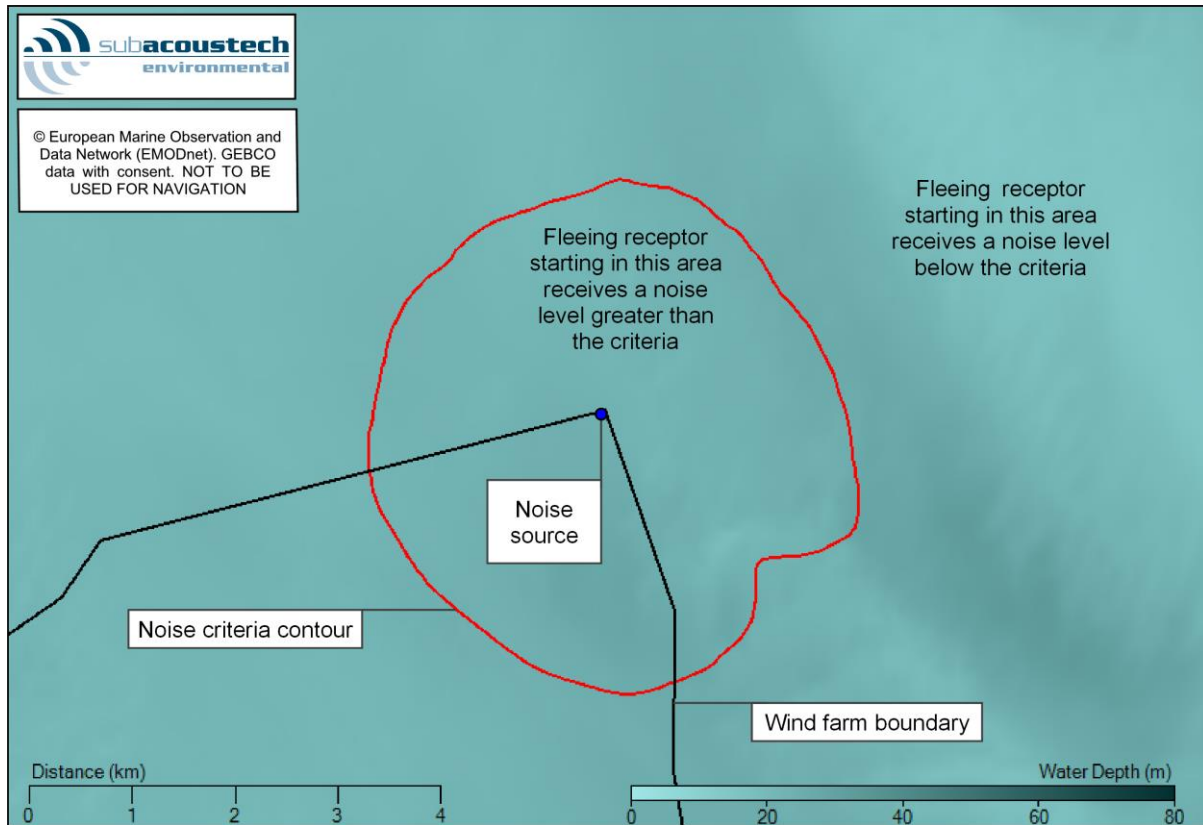


Figure 4-6 Example plot showing a fleeing animal SEL_{cum} criteria contour and the areas where the cumulative received level will exceed the criteria

94. Some modelling approaches include the effects of Acoustic Deterrent Devices (ADDs) that cause receptors to flee an area certain distance before the piling activity commences. Subacoustech’s modelling approach does not include this, but the effects of using an ADD can still be inferred from the results. For example, if a receptor were to flee for 20 minutes from an ADD at a rate 1.5 ms^{-1} , it would travel 1.8 km before piling begins. If a cumulative SEL impact range from INSPIRE was calculated to be below 1.8 km, it can safely be assumed that the ADD will be effective in eliminating the risk of injury on the receptor. The noise from an ADD is of a much lower level than impact piling, and as such, the overall effect on the SEL_{cum} exposure on a receptor would be negligible.

4.3.3.1 The effects of input parameters on cumulative SELs and fleeing receptors

95. As discussed in section 4.3.2, parameters such as water depth, hammer blow energies, piling ramp up, strike rate and duration all have an effect on predicted noise levels. When considering SEL_{cum} and a fleeing animal model, some of these parameters can have a greater influence than others.
96. Parameters like hammer blow energies can have a clear effect on impact ranges, with higher energies resulting in higher source noise levels and therefore larger impact ranges. When considering cumulative noise levels, these higher levels are compounded sometimes thousands of times due to the number of pile strikes. With this in mind, the ramp up from low blow energies to higher ones requires careful consideration for fleeing animals, as the levels while the receptors are relatively close to the noise source will have a greater effect on the overall cumulative exposure level. Figure 4-7 summarises the hammer blow energy ramp up for the three modelled cumulative scenarios, showing how the monopile scenarios reach a higher blow energy over a greater total duration.

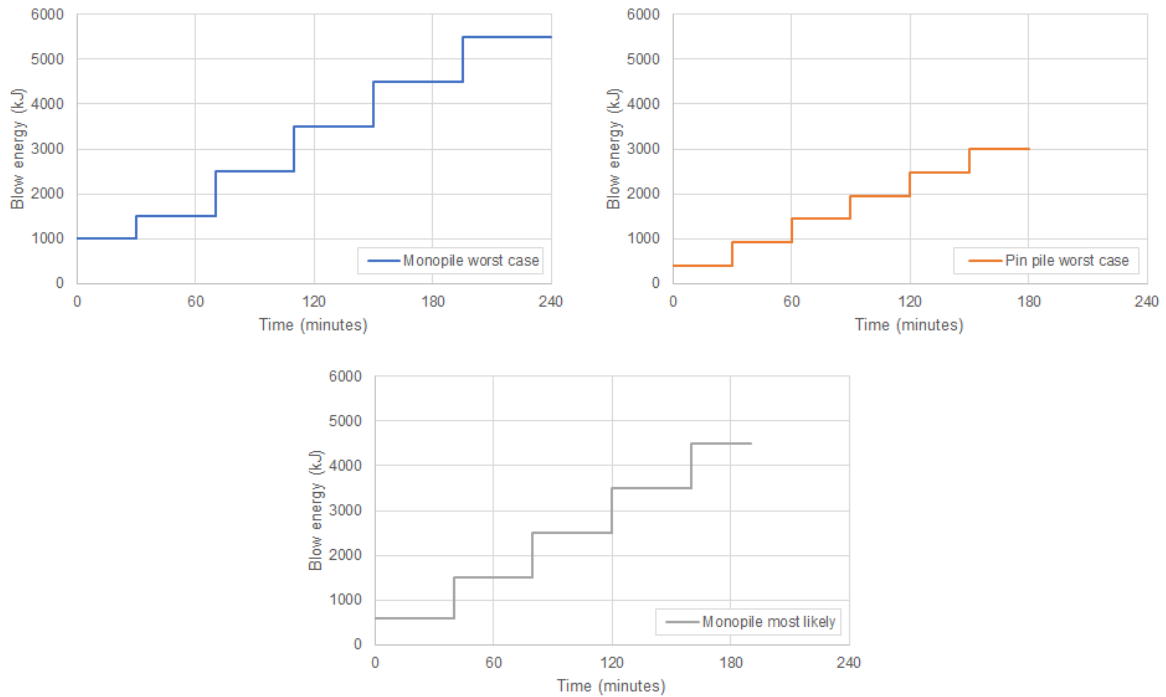


Figure 4-7 Graphical representation of the three modelled ramp up scenarios

97. Linked to the effect of the ramp up is the strike rate, as the more strikes that occur while the receptor is close to the noise source, the greater the exposure and the greater effect it will have on the SEL_{cum} . The faster the strike rate, the shorter the distance the receptor can flee between each pile strike, which leads to greater exposure. Figure 4-8 shows the strike rate against time for the three modelled scenarios, with the fastest strike rates being achieved for the monopile scenarios as well as the slow “one strike every five minutes” period at the start of the monopile most likely scenario. The total duration of piling is less important when considering a fleeing animal as the additional pile strikes at the end of piling occur when the receptor has travelled to a greater distance, where noise levels will have reduced to a relatively low level. This can be seen in Figure 4-4 and Figure 4-5 in the previous section.

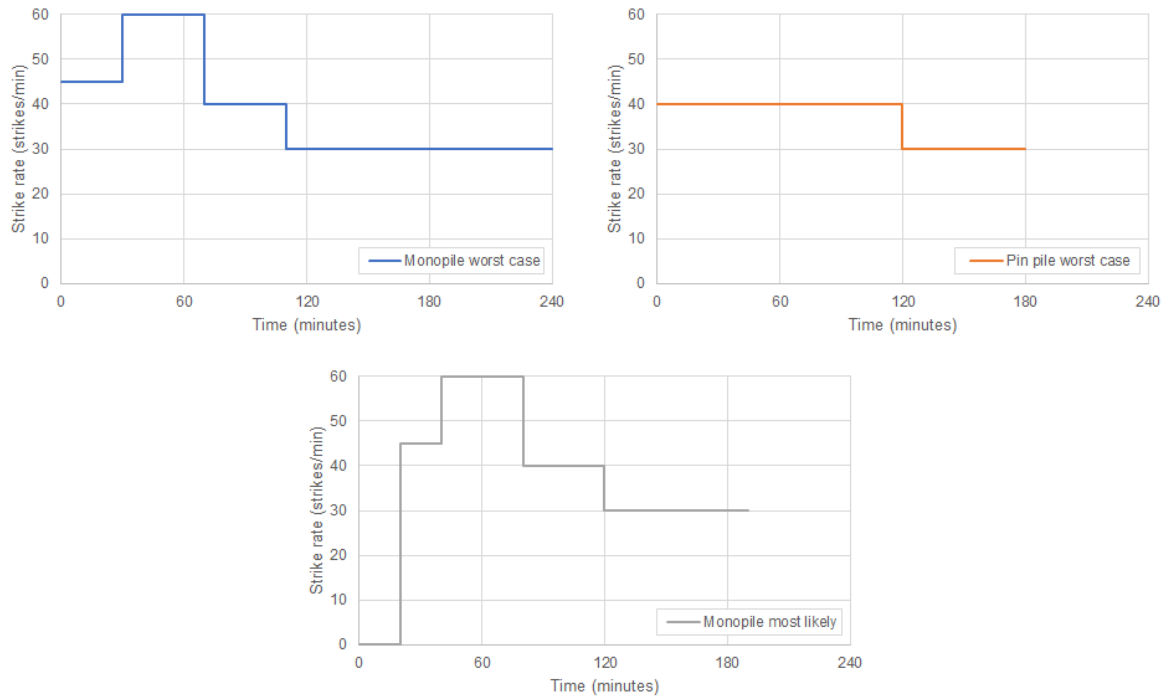


Figure 4-8 Graphical representation of the strike rate for the three modelled ramp up scenarios

5 Modelling results

98. The following sections present the modelled impact ranges for the parameters detailed in section 4.3 and the criteria outlined in section 2.2.2, split into the worst case parameters (section 5.1) and the most likely parameters (section 5.2). To aid navigation Table 5-1 and Table 5-56 contain a list of all the impact range tables for the worst case and most likely parameters, respectively.
99. Results for modelling multiple piling operations are covered in section 5.3 for piles installed at two locations simultaneously. Piles installed sequentially at either the same location or at separate locations are reported in section 5.4.
100. Further modelling has also been completed covering single strike noise criteria, and the noise from the first pile strike, these results are presented in Appendix A.
101. For the results presented in this section, predicted ranges smaller than 50 m and areas less than 0.01 km² for single strike criteria, and ranges smaller than 100 m and areas less than 0.1 km² for cumulative criteria, have not been presented. This close to the noise source, the modelling processes are unable to model a sufficient level of accuracy due to acoustic effects near the pile.
102. The largest ranges are predicted for the worst case monopile scenario, with smaller ranges predicted for the most likely monopile scenarios, and smaller ranges still for the pin pile scenarios. The SE location at DEP resulted in the largest ranges due to the deeper water at, and surrounding, that location.

5.1 Worst case parameters

103. Table 5-2 to Table 5-53 present the worst case monopile results, covering the Southall *et al.* (2019) criteria for marine mammals and the Popper *et al.* (2014) criteria for fish, as discussed in section 2.2.2. These predicted impact ranges show that, for the worst case parameters, impact ranges for monopiles are greater than those predicted for pin piles.
104. Maximum PTS injury ranges in marine mammals of 8.3 km for Low Frequency (LF) cetaceans and 4.9 km for VHF cetaceans are predicted using the impulsive SEL_{cum} Southall *et al.* (2019) criteria at the SE location of DEP. A maximum behavioural impact range of 25 km is predicted for aversive behavioural reaction in harbour porpoise using the Lucke *et al.* (2009) SEL criteria. For fish, a maximum fleeing range of 12 km (19 km stationary) is predicted for TTS using the Popper *et al.* (2014) criteria at the same location.
105. Lower ranges are predicted at the SEP site, with maximum ranges predicted of 6.2 km for PTS in LF cetaceans, 4.1 km for PTS in VHF cetaceans and 9.6 km for TTS in fleeing fish (16 km for stationary receptors), all at the deeper E location.

| Table (page) | Parameters | Criteria | | | |
|------------------|------------|-------------------|---|--|---|
| Table 5-2 (p28) | SEP | Worst case | Monopiles | Southall <i>et al.</i> (2019) | Unweighted SPL _{peak} |
| Table 5-3 (p28) | DEP | | | | Weighted SEL _{cum} (impulsive) |
| Table 5-4 (p28) | SEP | | | | Weighted SEL _{cum} (non-impulsive) |
| Table 5-5 (p28) | DEP | | | Lucke <i>et al.</i> (2009) | Unweighted SPL _{peak-to-peak} |
| Table 5-6 (p29) | SEP | | | | Unweighted SEL _{ss} |
| Table 5-7 (p29) | DEP | | | | Pin piles (4.0 m) |
| Table 5-8 (p29) | SEP | | Weighted SEL _{cum} (impulsive) | | |
| Table 5-9 (p29) | DEP | | Weighted SEL _{cum} (non-impulsive) | | |
| Table 5-10 (p29) | SEP | | Lucke <i>et al.</i> (2009) | Unweighted SPL _{peak-to-peak} | |
| Table 5-11 (p30) | DEP | | | Unweighted SEL _{ss} | |
| Table 5-12 (p30) | SEP | | | Pin piles (3.5 m) | |
| Table 5-13 (p30) | DEP | | Weighted SEL _{cum} (impulsive) | | |
| Table 5-14 (p30) | SEP | | Weighted SEL _{cum} (non-impulsive) | | |
| Table 5-15 (p31) | DEP | | Lucke <i>et al.</i> (2009) | | Unweighted SPL _{peak-to-peak} |
| Table 5-16 (p31) | SEP | | | | Unweighted SEL _{ss} |
| Table 5-17 (p31) | DEP | | | | Monopiles |
| Table 5-18 (p31) | SEP | | Unweighted SEL _{cum} (fleeing) | | |
| Table 5-19 (p32) | DEP | | Unweighted SEL _{cum} (stationary) | | |
| Table 5-20 (p32) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , and SEL _{ss} | |
| Table 5-21 (p32) | DEP | | | | |
| Table 5-22 (p32) | SEP | | | | |
| Table 5-23 (p32) | DEP | Pin piles (4.0 m) | Popper <i>et al.</i> (2014) | Unweighted SPL _{peak} | |
| Table 5-24 (p33) | SEP | | | Unweighted SEL _{cum} (fleeing) | |
| Table 5-25 (p33) | DEP | | | Unweighted SEL _{cum} (stationary) | |
| Table 5-26 (p33) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , and SEL _{ss} | |
| Table 5-27 (p33) | DEP | | | | |
| Table 5-28 (p34) | SEP | | | | |
| Table 5-29 (p34) | DEP | Pin piles (3.5 m) | Popper <i>et al.</i> (2014) | Unweighted SPL _{peak} | |
| Table 5-30 (p34) | SEP | | | Unweighted SEL _{cum} (fleeing) | |
| Table 5-31 (p34) | DEP | | | Unweighted SEL _{cum} (stationary) | |
| Table 5-32 (p34) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , and SEL _{ss} | |
| Table 5-33 (p34) | DEP | | | | |
| Table 5-34 (p35) | SEP | | | | |
| Table 5-35 (p35) | DEP | Pin piles (3.5 m) | Popper <i>et al.</i> (2014) | Unweighted SPL _{peak} | |
| Table 5-36 (p35) | SEP | | | Unweighted SEL _{cum} (fleeing) | |
| Table 5-37 (p35) | DEP | | | Unweighted SEL _{cum} (stationary) | |
| Table 5-38 (p35) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , and SEL _{ss} | |
| Table 5-39 (p36) | DEP | | | | |
| Table 5-40 (p36) | SEP | | | | |
| Table 5-41 (p36) | DEP | Pin piles (3.5 m) | Popper <i>et al.</i> (2014) | Unweighted SPL _{peak} | |
| Table 5-42 (p36) | SEP | | | Unweighted SEL _{cum} (fleeing) | |
| Table 5-43 (p36) | DEP | | | Unweighted SEL _{cum} (stationary) | |
| Table 5-44 (p37) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , and SEL _{ss} | |
| Table 5-45 (p37) | DEP | | | | |
| Table 5-46 (p37) | SEP | | | | |
| Table 5-47 (p37) | DEP | Pin piles (3.5 m) | Popper <i>et al.</i> (2014) | Unweighted SPL _{peak} | |
| Table 5-48 (p37) | SEP | | | Unweighted SEL _{cum} (fleeing) | |
| Table 5-49 (p38) | DEP | | | Unweighted SEL _{cum} (stationary) | |
| Table 5-50 (p38) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , and SEL _{ss} | |
| Table 5-51 (p38) | DEP | | | | |
| Table 5-52 (p38) | SEP | | | | |
| Table 5-53 (p38) | DEP | Pin piles (3.5 m) | Popper <i>et al.</i> (2014) | Unweighted SPL _{peak} | |
| Table 5-54 (p39) | SEP | | | Unweighted SEL _{cum} (fleeing) | |
| Table 5-55 (p39) | DEP | | | Unweighted SEL _{cum} (stationary) | |

Table 5-1 Summary of the worst case modelling results tables presented in this section

5.1.1 Marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case monopiles | | | | | | | |
|---|--------------|------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.82 km ² | 510 m | 510 m | 510 m | 0.68 km ² | 470 m | 460 m | 470 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | 50 m | 50 m | 50 m |
| TTS | 213 dB (LF) | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 100 m | 90 m | 100 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 4.2 km ² | 1.2 km | 1.1 km | 1.2 km | 3.4 km ² | 1.1 km | 1.0 km | 1.0 km |
| | 212 dB (PCW) | 0.04 km ² | 120 m | 120 m | 120 m | 0.04 km ² | 110 m | 110 m | 110 m |

Table 5-2 Summary of impact ranges from worst case monopile modelling at the SEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case monopiles | | | | | | | |
|---|--------------|------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.91 km ² | 550 m | 540 m | 540 m | 1.0 km ² | 570 m | 570 m | 570 m |
| | 218 dB (PCW) | < 0.01 km ² | 50 m | 50 m | 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | 0.03 km ² | 110 m | 100 m | 110 m | 0.04 km ² | 110 m | 110 m | 110 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 4.7 km ² | 1.3 km | 1.2 km | 1.2 km | 5.3 km ² | 1.3 km | 1.3 km | 1.3 km |
| | 212 dB (PCW) | 0.05 km ² | 120 m | 120 m | 120 m | 0.05 km ² | 130 m | 130 m | 130 m |

Table 5-3 Summary of impact ranges from worst case monopile modelling at the DEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopiles | | | | | | | |
|--|--------------|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 92 km ² | 6.2 km | 4.8 km | 5.4 km | 55 km ² | 4.8 km | 3.6 km | 4.2 km |
| | 185 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 155 dB (VHF) | 43 km ² | 4.1 km | 3.4 km | 3.7 km | 29 km ² | 3.4 km | 2.8 km | 3.1 km |
| | 185 dB (PCW) | 0.84 km ² | 600 m | 500 m | 500 m | 0.52 km ² | 500 m | 400 m | 400 m |
| TTS (Impulsive) | 168 dB (LF) | 720 km ² | 20 km | 12 km | 15 km | 470 km ² | 15 km | 8.3 km | 12 km |
| | 170 dB (HF) | 0.33 km ² | 400 m | 300 m | 300 m | 0.27 km ² | 400 m | 300 m | 300 m |
| | 140 dB (VHF) | 530 km ² | 16 km | 11 km | 13 km | 370 km ² | 13 km | 7.8 km | 11 km |
| | 170 dB (PCW) | 140 km ² | 7.7 km | 6.0 km | 6.8 km | 91 km ² | 6.1 km | 4.5 km | 5.4 km |

Table 5-4 Summary of impact ranges from worst case monopile modelling at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopiles | | | | | | | |
|--|--------------|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 100 km ² | 6.7 km | 4.9 km | 5.7 km | 150 km ² | 8.3 km | 5.7 km | 6.9 km |
| | 185 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 155 dB (VHF) | 47 km ² | 4.4 km | 3.6 km | 3.9 km | 61 km ² | 4.9 km | 4.0 km | 4.4 km |
| | 185 dB (PCW) | 1.1 km ² | 700 m | 600 m | 600 m | 1.4 km ² | 700 m | 600 m | 700 m |
| TTS (Impulsive) | 168 dB (LF) | 750 km ² | 20 km | 11 km | 15 km | 1100 km ² | 25 km | 14 km | 18 km |
| | 170 dB (HF) | 0.44 km ² | 400 m | 400 m | 400 m | 0.44 km ² | 400 m | 400 m | 400 m |
| | 140 dB (VHF) | 540 km ² | 16 km | 9.7 km | 13 km | 750 km ² | 19 km | 12 km | 15 km |
| | 170 dB (PCW) | 150 km ² | 8.1 km | 6.0 km | 7.0 km | 220 km ² | 9.7 km | 6.8 km | 8.3 km |

Table 5-5 Summary of impact ranges from worst case monopile modelling at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopiles | | | | | | | |
|--|--------------|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | 0.24 km ² | 300 m | 300 m | 300 m | 0.16 km ² | 300 m | 200 m | 200 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | 200 m | 100 m | 100 m | < 0.1 km ² | 200 m | 100 m | 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 190 km ² | 9.2 km | 6.7 km | 7.8 km | 120 km ² | 7.0 km | 5.1 km | 6.1 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 70 km ² | 5.2 km | 4.3 km | 4.7 km | 47 km ² | 4.3 km | 3.4 km | 3.9 km |
| | 181 dB (PCW) | 5.8 km ² | 1.5 km | 1.3 km | 1.4 km | 3.5 km ² | 1.2 km | 1.0 km | 1.1 km |

Table 5-6 Summary of impact ranges from worst case monopile modelling at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopiles | | | | | | | |
|--|--------------|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | 0.28 km ² | 400 m | 300 m | 300 m | 0.37 km ² | 400 m | 300 m | 300 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | 200 m | 100 m | 100 m | < 0.1 km ² | 200 m | 100 m | 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 200 km ² | 9.7 km | 6.6 km | 8.0 km | 300 km ² | 12 km | 7.6 km | 9.8 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 74 km ² | 5.5 km | 4.4 km | 4.9 km | 98 km ² | 6.3 km | 4.9 km | 5.6 km |
| | 181 dB (PCW) | 7.2 km ² | 1.7 km | 1.4 km | 1.5 km | 9.6 km ² | 1.9 km | 1.7 km | 1.8 km |

Table 5-7 Summary of impact ranges from worst case monopile modelling at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Worst case monopiles | | | | | | | |
|--|--|----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 7.5 km ² | 1.6 km | 1.5 km | 1.6 km | 6.0 km ² | 1.4 km | 1.4 km | 1.4 km |
| Behavioural (174 dB) | | 540 km ² | 15 km | 11 km | 13 km | 390 km ² | 13 km | 8.8 km | 11 km |

Table 5-8 Summary of impact ranges from worst case monopile modelling at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Worst case monopiles | | | | | | | |
|--|--|----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 8.6 km ² | 1.7 km | 1.6 km | 1.7 km | 9.7 km ² | 1.8 km | 1.7 km | 1.8 km |
| Behavioural (174 dB) | | 550 km ² | 15 km | 11 km | 13 km | 730 km ² | 18 km | 13 km | 15 km |

Table 5-9 Summary of impact ranges from worst case monopile modelling at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | | Worst case monopiles | | | | | | | |
|--|--|----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | | 66 km ² | 4.9 km | 4.3 km | 4.6 km | 90 km ² | 5.7 km | 5.1 km | 5.4 km |
| Behavioural (145 dB) | | 700 km ² | 17 km | 10 km | 15 km | 980 km ² | 21 km | 15 km | 18 km |

Table 5-10 Summary of impact ranges from worst case monopile modelling at the SEP site using the Lucke *et al.* (2009) unweighted SEL_{ss} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Worst case monopiles | | | | | | | |
|--|----------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 100 km ² | 6.2 km | 5.3 km | 5.6 km | 120 km ² | 6.5 km | 5.9 km | 6.2 km |
| Behavioural (145 dB) | 1000 km ² | 22 km | 13 km | 18 km | 1400 km ² | 25 km | 16 km | 21 km |

Table 5-11 Summary of impact ranges from worst case monopile modelling at the DEP site using the Lucke *et al.* (2009) unweighted SEL_{ss} criteria for harbour porpoise

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case pin piles (4.0 m) | | | | | | | |
|---|--------------|------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | 0.01 km ² | 50 m | < 50 m | < 50 m | 0.01 km ² | 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.59 km ² | 440 m | 430 m | 440 m | 0.49 km ² | 400 m | 390 m | 400 m |
| | 218 dB (PCW) | 0.01 km ² | 60 m | 50 m | 60 m | 0.01 km ² | 60 m | 50 m | 60 m |
| TTS | 213 dB (LF) | 0.03 km ² | 100 m | 90 m | 100 m | 0.02 km ² | 90 m | 80 m | 90 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 3.0 km ² | 990 m | 970 m | 980 m | 2.4 km ² | 900 m | 860 m | 880 m |
| | 212 dB (PCW) | 0.03 km ² | 110 m | 100 m | 110 m | 0.03 km ² | 100 m | 90 m | 100 m |

Table 5-12 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case pin piles (4.0 m) | | | | | | | |
|---|--------------|------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | 0.01 km ² | 50 m | < 50 m | < 50 m | 0.01 km ² | 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.65 km ² | 460 m | 450 m | 460 m | 0.72 km ² | 490 m | 470 m | 480 m |
| | 218 dB (PCW) | 0.01 km ² | 60 m | 50 m | 60 m | 0.01 km ² | 60 m | 50 m | 60 m |
| TTS | 213 dB (LF) | 0.03 km ² | 100 m | 90 m | 100 m | 0.03 km ² | 100 m | 90 m | 100 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 3.4 km ² | 1.1 km | 1.0 km | 1.0 km | 3.9 km ² | 1.1 km | 1.1 km | 1.1 km |
| | 212 dB (PCW) | 0.03 km ² | 110 m | 100 m | 110 m | 0.04 km ² | 120 m | 110 m | 120 m |

Table 5-13 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (4.0 m) | | | | | | | |
|--|--------------|------------------------------|---------|---------|---------|------------------------|---------|---------|---------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 18 km ² | 2.7 km | 2.2 km | 2.4 km | 9.9 km ² | 2.0 km | 1.6 km | 1.8 km |
| | 185 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.01 km ² | < 100 m | < 100 m | < 100 m |
| | 155 dB (VHF) | 8.3 km ² | 1.8 km | 1.5 km | 1.6 km | 5.3 km ² | 1.4 km | 1.2 km | 1.3 km |
| | 185 dB (PCW) | < 0.1 km ² | 130 m | 100 m | 110 m | < 0.1 km ² | 130 m | < 100 m | 100 m |
| TTS (Impulsive) | 168 dB (LF) | 380 km ² | 14 km | 9.2 km | 11 km | 230 km ² | 10 km | 6.5 km | 8.6 km |
| | 170 dB (HF) | < 0.1 km ² | 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| | 140 dB (VHF) | 300 km ² | 12 km | 8.4 km | 9.7 km | 200 km ² | 9.1 km | 6.0 km | 7.9 km |
| | 170 dB (PCW) | 56 km ² | 4.8 km | 3.8 km | 4.2 km | 33 km ² | 3.7 km | 2.8 km | 3.2 km |

Table 5-14 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (4.0 m) | | | | | | | |
|--|--------------|------------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 22 km ² | 3.1 km | 2.4 km | 2.7 km | 33 km ² | 3.8 km | 2.8 km | 3.3 km |
| | 185 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 155 dB (VHF) | 9.6 km ² | 2.0 km | 1.6 km | 1.7 km | 13 km ² | 2.2 km | 1.8 km | 2.0 km |
| | 185 dB (PCW) | < 0.1 km ² | 150 m | 130 m | 140 m | < 0.1 km ² | 180 m | 130 m | 160 m |
| TTS (Impulsive) | 168 dB (LF) | 400 km ² | 14 km | 8.4 km | 11 km | 590 km ² | 18 km | 11 km | 14 km |
| | 170 dB (HF) | < 0.1 km ² | 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| | 140 dB (VHF) | 300 km ² | 12 km | 7.5 km | 9.8 km | 430 km ² | 14 km | 9.2 km | 12 km |
| | 170 dB (PCW) | 62 km ² | 5.1 km | 3.9 km | 4.5 km | 90 km ² | 6.3 km | 4.5 km | 5.4 km |

Table 5-15 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (4.0 m) | | | | | | | |
|--|--------------|------------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 56 km ² | 4.9 km | 3.7 km | 4.2 km | 32 km ² | 3.6 km | 2.8 km | 3.2 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 17 km ² | 2.6 km | 2.1 km | 2.3 km | 11 km ² | 2.1 km | 1.7 km | 1.9 km |
| | 181 dB (PCW) | 0.5 km ² | 430 m | 380 m | 400 m | 0.3 km ² | 350 m | 380 m | 310 m |

Table 5-16 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (4.0 m) | | | | | | | |
|--|--------------|------------------------------|---------|---------|---------|-----------------------|--------|---------|---------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.1 km ² | 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 64 km ² | 5.4 km | 4.0 km | 4.5 km | 98 km ² | 6.8 km | 4.6 km | 5.6 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 19 km ² | 2.8 km | 2.3 km | 2.5 km | 2.6 km ² | 3.2 km | 2.6 km | 2.9 km |
| | 181 dB (PCW) | 0.7 km ² | 530 m | 430 m | 470 m | 0.9 km ² | 580 m | 530 m | 550 m |

Table 5-17 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Worst case pin piles (4.0 m) | | | | | | | |
|--|--|------------------------------|-------|-------|-------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 5.4 km ² | 1.3 m | 1.3 m | 1.3 m | 4.3 km ² | 1.2 km | 1.1 km | 1.2 km |
| Behavioural (174 dB) | | 480 km ² | 14 km | 11 km | 12 km | 340 km ² | 12 km | 8.4 km | 10 km |

Table 5-18 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | 6.2 km ² | 1.5 km | 1.4 km | 1.4 km | 7.0 km ² | 1.5 km | 1.5 km | 1.5 km |
| Behavioural (174 dB) | 490 km ² | 14 km | 10 km | 12 km | 650 km ² | 17 km | 12 km | 14 km |

Table 5-19 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 65 km ² | 4.8 km | 4.4 km | 4.6 km | 48 km ² | 4.1 km | 3.7 km | 3.9 km |
| Behavioural (145 dB) | 840 km ² | 20 km | 14 km | 16 km | 600 km ² | 16 km | 10 km | 14 km |

Table 5-20 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Lucke *et al.* (2009) unweighted SEL_{ss} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 74 km ² | 5.2 km | 4.6 km | 4.9 km | 8.7 km ² | 5.5 km | 5.1 km | 5.3 km |
| Behavioural (145 dB) | 860 km ² | 20 km | 12 km | 17 km | 1200 km ² | 23 km | 15 km | 19 km |

Table 5-21 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Lucke *et al.* (2009) unweighted SEL_{ss} criteria for harbour porpoise

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | Worst case pin piles (3.5 m) | | | | | | | | |
|---|------------------------------|------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.54 km ² | 420 m | 420 m | 420 m | 0.45 km ² | 380 m | 380 m | 380 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | 0.02 km ² | 80 m | 80 m | 80 m | 0.02 km ² | 80 m | 80 m | 80 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 2.9 km ² | 960 m | 950 m | 960 m | 2.3 km ² | 870 m | 840 m | 860 m |
| | 212 dB (PCW) | 0.03 km ² | 100 m | 90 m | 100 m | 0.02 km ² | 90 m | 90 m | 90 m |

Table 5-22 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | Worst case pin piles (3.5 m) | | | | | | | | |
|---|------------------------------|------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.6 km ² | 440 m | 440 m | 440 m | 0.67 km ² | 470 m | 460 m | 460 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | 0.02 km ² | 90 m | 80 m | 90 m | 0.02 km ² | 90 m | 90 m | 90 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 3.2 km ² | 1.0 km | 1.0 km | 1.0 km | 3.7 km ² | 1.1 km | 1.1 km | 1.1 km |
| | 212 dB (PCW) | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 100 m | 100 m | 100 m |

Table 5-23 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (3.5 m) | | | | | | | |
|--|--------------|------------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 18 km ² | 2.7 km | 2.1 km | 2.4 km | 9.6 km ² | 2.0 km | 1.6 km | 1.8 km |
| | 185 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 155 dB (VHF) | 8.5 km ² | 1.8 km | 1.5 km | 1.6 km | 5.5 km ² | 1.5 km | 1.2 km | 1.3 km |
| | 185 dB (PCW) | < 0.1 km ² | 200 m | 100 m | 100 m | < 0.1 km ² | 200 m | 100 m | 100 m |
| TTS (Impulsive) | 168 dB (LF) | 370 km ² | 14 km | 9.1 km | 11 km | 230 km ² | 10 km | 6.5 km | 8.5 km |
| | 170 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | 200 m | 100 m | 100 m |
| | 140 dB (VHF) | 300 km ² | 12 km | 8.4 km | 9.7 km | 200 km ² | 9.2 km | 6.0 km | 8.0 km |
| | 170 dB (PCW) | 55 km ² | 4.8 km | 3.8 km | 4.2 km | 32 km ² | 3.7 km | 2.8 km | 3.2 km |

Table 5-24 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (3.5 m) | | | | | | | |
|--|--------------|------------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 22 km ² | 3.1 km | 2.4 km | 2.6 km | 33 km ² | 3.8 km | 2.8 km | 3.2 km |
| | 185 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 155 dB (VHF) | 9.9 km ² | 2.0 km | 1.7 km | 1.8 km | 13 km ² | 2.3 km | 1.9 km | 2.0 km |
| | 185 dB (PCW) | < 0.1 km ² | 200 m | 200 m | 200 m | < 0.1 km ² | 200 m | 200 m | 200 m |
| TTS (Impulsive) | 168 dB (LF) | 390 km ² | 14 km | 8.4 km | 11 km | 590 km ² | 18 km | 10 km | 14 km |
| | 170 dB (HF) | < 0.1 km ² | 200 m | 100 m | 100 m | < 0.1 km ² | 200 m | 100 m | 100 m |
| | 140 dB (VHF) | 310 km ² | 12 km | 7.5 km | 9.9 km | 440 km ² | 15 km | 9.3 km | 12 km |
| | 170 dB (PCW) | 62 km ² | 5.2 km | 3.9 km | 4.4 km | 90 km ² | 6.3 km | 4.5 km | 5.3 km |

Table 5-25 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (3.5 m) | | | | | | | |
|--|--------------|------------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 55 km ² | 4.8 km | 3.7 km | 4.2 km | 31 km ² | 3.6 km | 2.7 km | 3.1 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 18 km ² | 2.6 km | 2.2 km | 2.4 km | 11 km ² | 2.1 km | 1.7 km | 1.9 km |
| | 181 dB (PCW) | 0.57 km ² | 500 m | 400 m | 500 m | 0.33 km ² | 400 m | 300 m | 300 m |

Table 5-26 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (3.5 m) | | | | | | | |
|--|--------------|------------------------------|---------------------|---------|---------|-----------------------|---------|---------|---------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 63 km ² | 5.3 km | 3.9 km | 4.5 km | 96 km ² | 6.8 km | 4.6 km | 5.5 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 20 km ² | 2.9 km ² | 2.3 km | 2.5 km | 27 km ² | 3.3 km | 2.6 km | 2.9 km |
| | 181 dB (PCW) | 0.73 km ² | 600 m | 500 m | 500 m | 1.0 km ² | 600 m | 500 m | 600 m |

Table 5-27 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | Worst case pin piles (3.5 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | 5.3 km ² | 1.3 km | 1.3 km | 1.3 km | 4.2 km ² | 1.2 km | 1.2 km | 1.2 km |
| Behavioural (174 dB) | 470 km ² | 14 km | 11 km | 12 km | 340 km ² | 12 km | 8.4 km | 10 km |

Table 5-28 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | Worst case pin piles (3.5 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | 6.0 km ² | 1.4 km | 1.4 km | 1.4 km | 6.8 km ² | 1.5 km | 1.5 km | 1.5 km |
| Behavioural (174 dB) | 480 km ² | 14 km | 10 km | 12 km | 640 km ² | 16 km | 12 km | 14 km |

Table 5-29 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Worst case pin piles (3.5 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 46 km ² | 4.1 km | 3.6 km | 3.8 km | 63 km ² | 4.7 km | 4.3 km | 4.5 km |
| Behavioural (145 dB) | 590 km ² | 16 km | 9.9 km | 14 km | 820 km ² | 19 km | 14 km | 16 km |

Table 5-30 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Lucke *et al.* (2009) unweighted SEL_{ss} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Worst case pin piles (3.5 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 71 km ² | 5.1 km | 4.5 km | 4.8 km | 84 km ² | 5.4 km | 5.0 km | 5.2 km |
| Behavioural (145 dB) | 850 km ² | 20 km | 12 km | 16 km | 1100 km ² | 23 km | 15 km | 19 km |

Table 5-31 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Lucke *et al.* (2009) unweighted SEL_{ss} criteria for harbour porpoise

5.1.2 Fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case monopiles | | | | | | | |
|---|----------------------|-------|-------|-------|----------------------|-------|-------|-------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 100 m | 90 m | 100 m |
| 207 dB | 0.19 km ² | 250 m | 250 m | 250 m | 0.16 km ² | 230 m | 230 m | 230 m |

Table 5-32 Summary of impact ranges from worst case monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case monopiles | | | | | | | |
|---|----------------------|-------|-------|-------|----------------------|-------|-------|-------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | 0.03 km ² | 110 m | 100 m | 110 m | 0.04 km ² | 110 m | 110 m | 110 m |
| 207 dB | 0.21 km ² | 260 m | 260 m | 260 m | 0.23 km ² | 270 m | 270 m | 270 m |

Table 5-33 Summary of impact ranges from worst case monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case monopiles | | | | | | | |
|--|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | 200 m | 200 m | 200 m | < 0.1 km ² | 200 m | 200 m | 200 m |
| 203 dB (fleeing) | 1.1 km ² | 600 m | 600 m | 600 m | 0.62 km ² | 500 m | 400 m | 500 m |
| 186 dB (fleeing) | 210 km ² | 9.6 km | 7.2 km | 8.3 km | 140 km ² | 7.5 km | 5.3 km | 6.5 km |

Table 5-34 Summary of impact ranges from worst case monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case monopiles | | | | | | | |
|--|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | 200 m | 100 m | 100 m |
| 207 dB (fleeing) | 0.16 km ² | 300 m | 200 m | 200 m | 0.16 km ² | 300 m | 200 m | 200 m |
| 203 dB (fleeing) | 1.4 km ² | 800 m | 600 m | 700 m | 1.9 km ² | 900 m | 800 m | 800 m |
| 186 dB (fleeing) | 230 km ² | 10 km | 6.9 km | 8.5 km | 330 km ² | 12 km | 8.1 km | 10 km |

Table 5-35 Summary of impact ranges from worst case monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case monopiles | | | | | | | |
|--|----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 1.2 km ² | 700 m | 600 m | 600 m | 1.0 km ² | 600 m | 600 m | 600 m |
| 216 dB (stationary) | 2.7 km ² | 1.0 km | 900 m | 900 m | 2.1 km ² | 900 m | 800 m | 800 m |
| 210 dB (stationary) | 12 km ² | 2.0 km | 1.9 km | 2.0 km | 9.4 km ² | 1.8 km | 1.7 km | 1.7 km |
| 207 dB (stationary) | 24 km ² | 2.8 km | 2.7 km | 2.8 km | 19 km ² | 2.6 km | 2.3 km | 2.4 km |
| 203 dB (stationary) | 55 km ² | 4.4 km | 4.1 km | 4.2 km | 42 km ² | 3.9 km | 3.5 km | 3.6 km |
| 186 dB (stationary) | 620 km ² | 16 km | 12 km | 14 km | 450 km ² | 13 km | 9.2 km | 12 km |

Table 5-36 Summary of impact ranges from worst case monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case monopiles | | | | | | | |
|--|----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 1.3 km ² | 700 m | 600 m | 700 m | 1.4 km ² | 700 m | 700 m | 700 m |
| 216 dB (stationary) | 3.0 km ² | 1.0 km | 1.0 km | 1.0 km | 3.3 km ² | 1.1 km | 1.0 km | 1.0 km |
| 210 dB (stationary) | 14 km ² | 2.2 km | 2.0 km | 2.1 km | 15 km ² | 2.3 km | 2.2 km | 2.2 km |
| 207 dB (stationary) | 28 km ² | 3.2 km | 2.8 km | 3.0 km | 31 km ² | 3.3 km | 3.1 km | 3.2 km |
| 203 dB (stationary) | 63 km ² | 4.8 km | 4.3 km | 4.5 km | 72 km ² | 5.0 km | 4.7 km | 4.8 km |
| 186 dB (stationary) | 640 km ² | 17 km | 11 km | 14 km | 840 km ² | 19 km | 13 km | 16 km |

Table 5-37 Summary of impact ranges from worst case monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case monopiles | | | | | | | |
|--|----------------------|-------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 290 km ² | 11 km | 8.8 km | 9.6 km | 210 km ² | 9.0 km | 7.1 km | 8.2 km |
| 168 (SPL _{peak}) | 490 km ² | 14 km | 11 km | 12 km | 350 km ² | 12 km | 8.5 km | 11 km |
| 163 dB (SPL _{peak-to-peak}) | 1200 km ² | 24 km | 17 km | 19 km | 850 km ² | 19 km | 11 km | 16 km |
| 142 dB (SEL _{ss}) | 1200 km ² | 25 km | 17 km | 20 km | 890 km ² | 20 km | 11 km | 17 km |
| 135 (SEL _{ss}) | 2000 km ² | 34 km | 20 km | 25 km | 1500 km ² | 26 km | 14 km | 22 km |

Table 5-38 Summary of impact ranges from worst case monopile modelling at the SEP site using the Hawkins *et al.* (2014) unweighted single strike observed levels for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case monopiles | | | | | | | |
|--|----------------------|--------------------|--------|--------|----------------------|-------|--------|-------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 300 km ² | 11 km | 8.9 km | 9.8 km | 390 km ² | 12 km | 9.4 km | 11 km |
| 168 (SPL _{peak}) | 500 km ² | 15 km | 11 km | 13 km | 670 km ² | 17 km | 12 km | 15 km |
| 163 dB (SPL _{peak-to-peak}) | 1200 km ² | 24 km | 14 km | 20 km | 1600 km ² | 29 km | 18 km | 23 km |
| 142 dB (SEL _{ss}) | 1300 km ² | 25 km | 14 km | 20 km | 1700 km ² | 29 km | 19 km | 23 km |
| 135 (SEL _{ss}) | 2100 km ² | 33 km ² | 18 km | 26 km | 2700 km ² | 39 km | 24 km | 29 km |

Table 5-39 Summary of impact ranges from worst case monopile modelling at the DEP site using the Hawkins *et al.* (2014) unweighted single strike observed levels for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case pin piles (4.0 m) | | | | | | | |
|---|------------------------------|-------|-------|-------|----------------------|-------|-------|-------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | 0.03 km ² | 100 m | 90 m | 100 m | 0.02 km ² | 90 m | 80 m | 90 m |
| 207 dB | 0.14 km ² | 220 m | 210 m | 220 m | 0.12 km ² | 200 m | 190 m | 200 m |

Table 5-40 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case pin piles (4.0 m) | | | | | | | |
|---|------------------------------|-------|-------|-------|----------------------|-------|-------|-------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | 0.03 km ² | 100 m | 90 m | 100 m | 0.03 km ² | 100 m | 90 m | 100 m |
| 207 dB | 0.16 km ² | 230 m | 220 m | 230 m | 0.17 km ² | 240 m | 230 m | 240 m |

Table 5-41 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 203 dB (fleeing) | < 0.1 km ² | 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 186 dB (fleeing) | 78 km ² | 5.8 km | 4.4 km | 5.0 km | 44 km ² | 4.3 km | 3.1 km | 3.7 km |

Table 5-42 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 203 dB (fleeing) | < 0.1 km ² | 100 m | < 100 m | < 100 m | < 0.1 km ² | 130 m | 100 m | 110 m |
| 186 dB (fleeing) | 87 km ² | 6.3 km | 4.4 km | 5.3 km | 130 km ² | 7.9 km | 5.2 km | 6.5 km |

Table 5-43 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 0.4 km ² | 350 m | 330 m | 340 m | 0.3 km ² | 320 m | 300 m | 310 m |
| 216 dB (stationary) | 0.8 km ² | 530 m | 500 m | 510 m | 0.7 km ² | 480 m | 450 m | 460 m |
| 210 dB (stationary) | 4.2 km ² | 1.2 km | 1.2 km | 1.2 km | 3.4 km ² | 1.1 km | 1.0 km | 1.0 km |
| 207 dB (stationary) | 9.2 km ² | 1.7 km | 1.7 km | 1.7 km | 7.2 km ² | 1.6 km | 1.5 km | 1.5 km |
| 203 dB (stationary) | 24 km ² | 2.8 km | 2.7 km | 2.7 km | 18 km ² | 2.5 km | 2.3 km | 2.4 km |
| 186 dB (stationary) | 400 km ² | 12 km | 10 km | 11 km | 290 km ² | 11 km | 8.0 km | 9.5 km |

Table 5-44 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 0.4 km ² | 380 m | 350 m | 360 m | 0.5 km ² | 400 m | 380 m | 390 m |
| 216 dB (stationary) | 0.9 km ² | 580 m | 530 m | 550 m | 1.1 km ² | 600 m | 580 m | 590 m |
| 210 dB (stationary) | 4.9 km ² | 1.3 km | 1.2 km | 1.3 km | 5.6 km ² | 1.4 km | 1.3 km | 1.3 km |
| 207 dB (stationary) | 11 km ² | 1.9 km | 1.8 km | 1.8 km | 12 km ² | 2.0 km | 2.0 km | 2.0 km |
| 203 dB (stationary) | 27 km ² | 3.1 km | 2.8 km | 3.0 km | 32 km ² | 3.2 km | 3.1 km | 3.2 km |
| 186 dB (stationary) | 420 km ² | 13 km | 10 km | 12 km | 550 km ² | 15 km | 11 km | 13 km |

Table 5-45 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 250 km ² | 9.7 km | 8.2 km | 8.9 km | 180 km ² | 8.3 km | 6.7 km | 7.5 km |
| 168 (SPL _{peak}) | 430 km ² | 13 km | 11 km | 12 km | 310 km ² | 11 km | 8.1 km | 9.9 km |
| 163 dB (SPL _{peak-to-peak}) | 1100 km ² | 23 km | 16 km | 19 km | 780 km ² | 18 km | 11 km | 16 km |
| 142 dB (SEL _{ss}) | 1100 km ² | 23 km | 16 km | 19 km | 770 km ² | 18 km | 11 km | 16 km |
| 135 (SEL _{ss}) | 1800 km ² | 31 km | 19 km | 24 km | 1300 km ² | 25 km | 13 km | 20 km |

Table 5-46 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Hawkins *et al.* (2014) unweighted single strike observed levels for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case pin piles (4.0 m) | | | | | | | |
|--|------------------------------|-------|--------|--------|----------------------|-------|--------|-------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 260 km ² | 10 km | 8.3 km | 9.1 km | 330 km ² | 11 km | 8.8 km | 10 km |
| 168 (SPL _{peak}) | 440 km ² | 14 km | 10 km | 12 km | 590 km ² | 16 km | 11 km | 14 km |
| 163 dB (SPL _{peak-to-peak}) | 1100 km ² | 23 km | 13 km | 19 km | 1500 km ² | 27 km | 17 km | 22 km |
| 142 dB (SEL _{ss}) | 1100 km ² | 23 km | 13 km | 19 km | 1500 km ² | 27 km | 17 km | 22 km |
| 135 (SEL _{ss}) | 1900 km ² | 31 km | 18 km | 24 km | 2400 km ² | 36 km | 23 km | 28 km |

Table 5-47 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Hawkins *et al.* (2014) unweighted single strike observed levels for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case pin piles (3.5 m) | | | | | | | |
|---|------------------------------|-------|-------|-------|----------------------|-------|-------|-------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | 0.02 km ² | 80 m | 80 m | 80 m | 0.02 km ² | 80 m | 80 m | 80 m |
| 207 dB | 0.12 km ² | 200 m | 200 m | 200 m | 0.11 km ² | 190 m | 180 m | 180 m |

Table 5-48 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case pin piles(3.5 m) | | | | | | | |
|---|-----------------------------|-------|-------|-------|----------------------|-------|-------|-------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | 0.02 km ² | 90 m | 80 m | 90 m | 0.02 km ² | 90 m | 90 m | 90 m |
| 207 dB | 0.14 km ² | 210 m | 210 m | 210 m | 0.15 km ² | 220 m | 220 m | 220 m |

Table 5-49 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles(3.5 m) | | | | | | | |
|--|-----------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 203 dB (fleeing) | < 0.1 km ² | 200 m | 100 m | 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 186 dB (fleeing) | 75 km ² | 5.7 km | 4.3 km | 4.9 km | 42 km ² | 4.3 km | 3.0 km | 3.6 km |

Table 5-50 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles(3.5 m) | | | | | | | |
|--|-----------------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 203 dB (fleeing) | < 0.1 km ² | 200 m | 100 m | 100 m | < 0.1 km ² | 200 m | 100 m | 100 m |
| 186 dB (fleeing) | 84 km ² | 6.2 km | 4.4 km | 5.2 km | 130 km ² | 7.8 km | 5.1 km | 6.4 km |

Table 5-51 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles(3.5 m) | | | | | | | |
|--|-----------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 0.44 km ² | 400 m | 400 m | 400 m | 0.33 km ² | 400 m | 300 m | 300 m |
| 216 dB (stationary) | 0.86 km ² | 600 m | 500 m | 500 m | 0.71 km ² | 500 m | 500 m | 500 m |
| 210 dB (stationary) | 4.3 km ² | 1.2 km | 1.2 km | 1.2 km | 3.4 km ² | 1.1 km | 1.0 km | 1.0 km |
| 207 dB (stationary) | 9.2 km ² | 1.8 km | 1.7 km | 1.7 km | 7.1 km ² | 1.6 km | 1.5 km | 1.5 km |
| 203 dB (stationary) | 23 km ² | 2.8 km | 2.7 km | 2.7 km | 18 km ² | 2.5 km | 2.3 km | 2.4 km |
| 186 dB (stationary) | 400 km ² | 12 km | 10 km | 11 km | 280 km ² | 10 km | 7.9 km | 9.5 km |

Table 5-52 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles(3.5 m) | | | | | | | |
|--|-----------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 0.44 km ² | 400 m | 400 m | 400 m | 0.44 km ² | 400 m | 400 m | 400 m |
| 216 dB (stationary) | 1.0 km ² | 600 m | 600 m | 600 m | 1.0 km ² | 600 m | 600 m | 600 m |
| 210 dB (stationary) | 4.9 km ² | 1.3 km | 1.2 km | 1.2 km | 5.5 km ² | 1.4 km | 1.3 km | 1.3 km |
| 207 dB (stationary) | 11 km ² | 2.0 km | 1.8 km | 1.8 km | 12 km ² | 2.0 km | 2.0 km | 2.0 km |
| 203 dB (stationary) | 27 km ² | 3.1 km | 2.8 km | 2.9 km | 31 km ² | 3.2 km | 3.1 km | 3.2 km |
| 186 dB (stationary) | 410 km ² | 13 km | 10 km | 11 km | 540 km ² | 15 km | 11 km | 13 km |

Table 5-53 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case pin piles (3.5 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 240 km ² | 9.7 km | 8.1 km | 8.8 km | 170 km ² | 8.3 km | 6.7 km | 7.5 km |
| 168 (SPL _{peak}) | 420 km ² | 13 km | 10 km | 12 km | 300 km ² | 11 km | 8.1 km | 9.8 km |
| 163 dB (SPL _{peak-to-peak}) | 1100 km ² | 23 km | 16 km | 19 km | 770 km ² | 18 km | 11 km | 16 km |
| 142 dB (SEL _{ss}) | 1100 km ² | 23 km | 16 km | 18 km | 760 km ² | 18 km | 11 km | 16 km |
| 135 (SEL _{ss}) | 1800 km ² | 31 km | 19 km | 24 km | 1300 km ² | 24 km | 13 km | 20 km |

Table 5-54 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Hawkins *et al.* (2014) unweighted single strike observed levels for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case pin piles (3.5 m) | | | | | | | |
|--|------------------------------|--------|--------|--------|----------------------|-------|--------|-------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 260 km ² | 9.9 km | 8.3 km | 9.0 km | 330 km ² | 11 km | 8.7 km | 10 km |
| 168 (SPL _{peak}) | 440 km ² | 13 km | 10 km | 12 km | 580 km ² | 16 km | 11 km | 14 km |
| 163 dB (SPL _{peak-to-peak}) | 1100 km ² | 23 km | 13 km | 19 km | 1500 km ² | 27 km | 17 km | 22 km |
| 142 dB (SEL _{ss}) | 1100 km ² | 23 km | 13 km | 19 km | 1500 km ² | 27 km | 17 km | 22 km |
| 135 (SEL _{ss}) | 1900 km ² | 31 km | 18 km | 24 km | 2400 km ² | 36 km | 22 km | 28 km |

Table 5-55 Summary of impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Hawkins *et al.* (2014) unweighted single strike observed levels for fish

5.2 Most likely parameters

106. Table 5-57 to Table 5-72 present the impact ranges for monopile foundations using the most likely parameters as described in section 4.3 and the marine mammal and fish impact criteria detailed in section 2.2.2.

107. Compared to the worst case parameters, reductions in impact ranges for the most likely parameters with maximum PTS ranges injury ranges in marine mammals of 4.1 km for LF cetaceans and 3.0 km for VHF cetaceans are predicted using the impulsive SEL_{cum} Southall *et al.* (2019) criteria at the SE location of the DEP. For fish, the maximum fleeing range was 10 km for TTS using the Popper *et al.* (2014) criteria at the same location. It should be noted that these most likely ranges for monopile foundations are still in excess of those predicted for the worst case pin pile parameters. Again, lower ranges are predicted at the SEP site, with maximum ranges predicted of 1.9 km for PTS in LF cetaceans, 2.2 km for PTS in VHF cetaceans and 7.7 km for TTS in fish at the E location.

| Table (page) | Parameters | Criteria | | | |
|------------------|------------|-------------|-----------|-------------------------------|---|
| Table 5-57 (p40) | SEP | Most likely | Monopiles | Southall <i>et al.</i> (2019) | Unweighted SPL _{peak} |
| Table 5-58 (p40) | DEP | | | | Weighted SEL _{cum} (impulsive) |
| Table 5-59 (p40) | SEP | | | | Weighted SEL _{cum} (non-impulsive) |
| Table 5-60 (p41) | DEP | | | Lucke <i>et al.</i> (2009) | Unweighted SPL _{peak-to-peak} |
| Table 5-61 (p41) | SEP | | | | Unweighted SEL _{ss} |
| Table 5-62 (p41) | DEP | | | Popper <i>et al.</i> (2014) | Unweighted SPL _{peak} |
| Table 5-63 (p41) | SEP | | | | Unweighted SEL _{cum} (fleeing) |
| Table 5-64 (p41) | DEP | | | | Unweighted SEL _{cum} (stationary) |
| Table 5-65 (p41) | SEP | | | | Hawkins <i>et al.</i> (2014) |
| Table 5-66 (p42) | DEP | | | | |
| Table 5-67 (p42) | SEP | | | | |
| Table 5-68 (p42) | DEP | | | | |
| Table 5-69 (p42) | SEP | | | | |
| Table 5-70 (p42) | DEP | | | | |
| Table 5-71 (p43) | SEP | | | | |
| Table 5-72 (p43) | DEP | | | | |
| Table 5-73 (p43) | SEP | | | | |
| Table 5-74 (p43) | DEP | | | | |

Table 5-56 Summary of the most likely modelling results tables presented in this section

5.2.1 Marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Most likely monopiles | | | | | | | |
|---|--------------|------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.76 km ² | 490 m | 490 m | 490 m | 0.63 km ² | 450 m | 440 m | 450 m |
| | 218 dB (PCW) | < 0.01 km ² | 50 m | 50 m | 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 90 m | 90 m | 90 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 3.9 km ² | 1.1 km | 1.1 km | 1.1 km | 3.1 km ² | 1.0 km | 980 m | 1.0 km |
| | 212 dB (PCW) | 0.04 km ² | 110 m | 110 m | 110 m | 0.03 km ² | 110 m | 110 m | 110 m |

Table 5-57 Summary of impact ranges from most likely monopile modelling at the SEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Most likely monopiles | | | | | | | |
|---|--------------|------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.84 km ² | 530 m | 510 m | 520 m | 0.93 km ² | 550 m | 550 m | 550 m |
| | 218 dB (PCW) | < 0.01 km ² | 50 m | 50 m | 50 m | < 0.1 km ² | 50 m | 50 m | 50 m |
| TTS | 213 dB (LF) | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 110 m | 100 m | 110 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 4.4 km ² | 1.2 km | 1.2 km | 1.2 km | 5.0 km ² | 1.3 km | 1.3 km | 1.3 km |
| | 212 dB (PCW) | 0.04 km ² | 120 m | 120 m | 120 m | 0.05 km ² | 120 m | 120 m | 120 m |

Table 5-58 Summary of impact ranges from most likely monopile modelling at the DEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Most likely monopiles | | | | | | | |
|--|--------------|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 4.3 km ² | 1.9 km | 400 m | 1.1 km | < 0.1 km ² | 400 m | < 100 m | 100 m |
| | 185 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 155 dB (VHF) | 10 km ² | 2.2 km | 1.5 km | 1.8 km | 4.0 km ² | 1.5 km | 800 m | 1.1 km |
| | 185 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Impulsive) | 168 dB (LF) | 380 km ² | 16 km | 8.0 km | 11 km | 200 km ² | 11 km | 3.9 km | 7.8 km |
| | 170 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 140 dB (VHF) | 390 km ² | 14 km | 9.2 km | 11 km | 260 km ² | 11 km | 5.7 km | 9.0 km |
| | 170 dB (PCW) | 75 km ² | 5.7 km | 4.2 km | 4.9 km | 39 km ² | 4.3 km | 2.7 km | 3.5 km |

Table 5-59 Summary of impact ranges from most likely monopile modelling at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Most likely monopiles | | | | | | | |
|--|--------------|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 6.2 km ² | 2.4 km | 500 m | 1.3 km | 24 km ² | 4.1 km | 1.3 km | 2.6 km |
| | 185 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 155 dB (VHF) | 12 km ² | 2.5 km | 1.6 km | 2.0 km | 20 km ² | 3.0 km | 2.1 km | 2.5 km |
| | 185 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Impulsive) | 168 dB (LF) | 400 km ² | 16 km | 6.3 km | 11 km | 650 km ² | 21 km | 9.4 km | 14 km |
| | 170 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 140 dB (VHF) | 400 km ² | 14 km | 7.7 km | 11 km | 580 km ² | 17 km | 10 km | 13 km |
| | 170 dB (PCW) | 82 km ² | 6.2 km | 4.1 km | 5.1 km | 130 km ² | 7.7 km | 4.9 km | 6.4 km |

Table 5-60 Summary of impact ranges from most likely monopile modelling at the DEP site using the impulsive Southall et al. (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall et al. (2019) Weighted SEL _{cum} | | Most likely monopiles | | | | | | | |
|---|--------------|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 39 km ² | 5.0 km | 2.4 km | 3.5 km | 11 km ² | 2.7 km | 500 m | 1.7 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 25 km ² | 3.3 km | 2.4 km | 2.8 km | 12 km ² | 2.4 km | 1.5 km | 2.0 km |
| | 181 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |

Table 5-61 Summary of impact ranges from most likely monopile modelling at the SEP site using the non-impulsive Southall et al. (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall et al. (2019) Weighted SEL _{cum} | | Most likely monopiles | | | | | | | |
|---|--------------|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 44 km ² | 5.5 km | 2.1 km | 3.7 km | 100 km ² | 7.9 km | 3.3 km | 5.5 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 28 km ² | 3.6 km | 2.5 km | 3.0 km | 43 km ² | 4.4 km | 2.9 km | 3.7 km |
| | 181 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |

Table 5-62 Summary of impact ranges from most likely monopile modelling at the DEP site using the non-impulsive Southall et al. (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Lucke et al. (2009) Unweighted SPL _{peak-to-peak} | | Most likely monopiles | | | | | | | |
|---|--|-----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 7.0 km ² | 1.5 km | 1.5 km | 1.5 km | 5.6 km ² | 1.4 km | 1.3 km | 1.3 km |
| Behavioural (174 dB) | | 520 km ² | 15 km | 11 km | 13 km | 380 km ² | 12 km | 8.7 km | 11 km |

Table 5-63 Summary of impact ranges from most likely monopile modelling at the SEP site using the Lucke et al. (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke et al. (2009) Unweighted SPL _{peak-to-peak} | | Most likely monopiles | | | | | | | |
|---|--|-----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 8.0 km ² | 1.7 km | 1.6 km | 1.6 km | 9.1 km ² | 1.7 km | 1.7 km | 1.7 km |
| Behavioural (174 dB) | | 540 km ² | 15 km | 11 km | 13 km | 710 km ² | 18 km | 13 km | 15 km |

Table 5-64 Summary of impact ranges from most likely monopile modelling at the DEP site using the Lucke et al. (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke et al. (2009) Unweighted SEL _{ss} | | Most likely monopiles | | | | | | | |
|---|--|-----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | | 62 km ² | 4.8 km | 4.2 km | 4.5 km | 85 km ² | 5.5 km | 5.0 km | 5.2 km |
| Behavioural (145 dB) | | 680 km ² | 17 km | 10 km | 15 km | 950 km ² | 21 km | 15 km | 17 km |

Table 5-65 Summary of impact ranges from most likely monopile modelling at the SEP site using the Lucke et al. (2009) unweighted SEL_{ss} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Most likely monopiles | | | | | | | |
|--|-----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 94 km ² | 6.0 km | 5.1 km | 5.5 km | 110 km ² | 6.3 km | 5.7 km | 6.0 km |
| Behavioural (145 dB) | 970 km ² | 21 km | 13 km | 18 km | 13 km ² | 25 km | 16 km | 20 km |

Table 5-66 Summary of impact ranges from most likely monopile modelling at the DEP site using the Lucke *et al.* (2009) unweighted SEL_{ss} criteria for harbour porpoise

5.2.2 Fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Most likely monopiles | | | | | | | |
|---|-----------------------|-------|-------|-------|----------------------|-------|-------|-------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 90 m | 90 m | 90 m |
| 207 dB | 0.18 km ² | 240 m | 240 m | 240 m | 0.15 km ² | 220 m | 220 m | 220 m |

Table 5-67 Summary of impact ranges from most likely monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Most likely monopiles | | | | | | | |
|---|-----------------------|-------|-------|-------|----------------------|-------|-------|-------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 110 m | 100 m | 110 m |
| 207 dB | 0.19 km ² | 250 m | 250 m | 250 m | 0.21 km ² | 260 m | 260 m | 260 m |

Table 5-68 Summary of impact ranges from most likely monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Most likely monopiles | | | | | | | |
|--|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 203 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 186 dB (fleeing) | 130 km ² | 7.7 km | 5.4 km | 6.4 km | 69 km ² | 5.7 km | 3.3 km | 4.7 km |

Table 5-69 Summary of impact ranges from most likely monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Most likely monopiles | | | | | | | |
|--|-----------------------|---------|---------|---------|-----------------------|---------|---------|---------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 203 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 186 dB (fleeing) | 140 km ² | 8.3 km | 5.0 km | 6.6 km | 220 km ² | 10 km | 6.2 km | 8.3 km |

Table 5-70 Summary of impact ranges from most likely monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Most likely monopiles | | | | | | | |
|--|-----------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 0.86 km ² | 600 m | 500 m | 500 m | 0.71 km ² | 500 m | 500 m | 500 m |
| 216 dB (stationary) | 1.9 km ² | 800 m | 800 m | 800 m | 1.4 km ² | 700 m | 700 m | 700 m |
| 210 dB (stationary) | 8.6 km ² | 1.7 km | 1.6 km | 1.7 km | 6.8 km ² | 1.6 km | 1.4 km | 1.5 km |
| 207 dB (stationary) | 17 km ² | 2.4 km | 2.3 km | 2.4 km | 14 km ² | 2.2 km | 2.0 km | 2.1 km |
| 203 dB (stationary) | 42 km ² | 3.8 km | 3.5 km | 3.7 km | 32 km ² | 3.4 km | 3.1 km | 3.2 km |
| 186 dB (stationary) | 540 km ² | 15 km | 11 km | 13 km | 390 km ² | 12 km | 8.8 km | 11 km |

Table 5-71 Summary of impact ranges from most likely monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Most likely monopiles | | | | | | | |
|--|-----------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 0.86 km ² | 600 m | 500 m | 500 m | 1.0 km ² | 600 m | 600 m | 600 m |
| 216 dB (stationary) | 2.0 km ² | 900 m | 800 m | 800 m | 2.4 km ² | 900 m | 900 m | 900 m |
| 210 dB (stationary) | 9.8 km ² | 1.9 km | 1.7 km | 1.8 km | 11 km ² | 1.9 km | 1.9 km | 1.9 km |
| 207 dB (stationary) | 20 km ² | 2.7 km | 2.4 km | 2.5 km | 23 km ² | 2.8 km | 2.7 km | 2.7 km |
| 203 dB (stationary) | 48 km ² | 4.2 km | 3.7 km | 3.9 km | 55 km ² | 4.3 km | 4.1 km | 4.2 km |
| 186 dB (stationary) | 560 km ² | 15 km | 11 km | 13 km | 730 km ² | 18 km | 13 km | 15 km |

Table 5-72 Summary of impact ranges from most likely monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Hawkins <i>et al.</i> (2014) Unweighted | Most likely monopiles | | | | | | | |
|--|-----------------------|-------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 280 km ² | 10 km | 8.7 km | 9.5 km | 200 km ² | 8.9 km | 7.1 km | 8.0 km |
| 168 (SPL _{peak}) | 480 km ² | 14 km | 11 km | 12 km | 340 km ² | 12 km | 8.4 km | 10 km |
| 163 dB (SPL _{peak-to-peak}) | 1200 km ² | 24 km | 17 km | 19 km | 840 km ² | 19 km | 11 km | 16 km |
| 142 dB (SEL _{ss}) | 1200 km ² | 24 km | 17 km | 20 km | 870 km ² | 19 km | 11 km | 17 km |
| 135 (SEL _{ss}) | 1900 km ² | 33 km | 20 km | 25 km | 1400 km ² | 26 km | 14 km | 21 km |

Table 5-73 Summary of impact ranges from most likely monopile modelling at the SEP site using the Hawkins *et al.* (2014) unweighted single strike observed levels for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Most likely monopiles | | | | | | | |
|--|-----------------------|-------|--------|--------|----------------------|-------|--------|-------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 290 km ² | 11 km | 8.7 km | 9.7 km | 380 km ² | 12 km | 9.2 km | 11 km |
| 168 (SPL _{peak}) | 490 km ² | 14 km | 10 km | 13 km | 650 km ² | 17 km | 12 km | 14 km |
| 163 dB (SPL _{peak-to-peak}) | 1200 km ² | 24 km | 14 km | 19 km | 1600 km ² | 28 km | 18 km | 23 km |
| 142 dB (SEL _{ss}) | 1200 km ² | 25 km | 14 km | 20 km | 1700 km ² | 29 km | 18 km | 23 km |
| 135 (SEL _{ss}) | 2100 km ² | 32 km | 18 km | 26 km | 2600 km ² | 38 km | 24 km | 29 km |

Table 5-74 Summary of impact ranges from most likely monopile modelling at the DEP site using the Hawkins *et al.* (2014) unweighted single strike observed levels for fish

5.3 Simultaneous piling

108. Additional modelling has been carried out to investigate the potential impacts of two pile installations occurring simultaneously at separated foundation locations. Using the worst case monopile and pin pile (4 m diameter) scenarios from section 4.3, modelling has been carried out for simultaneous piling at both the SEP E and the DEP SE modelling locations, representing the worst case locations of each site. All modelling in this section assumes that the two piling operations start at the same time.
109. When considering SEL_{cum} modelling, piling from multiple sources has the ability to increase impact ranges and areas significantly as, in this case, it introduces double the number of pile strikes to the water. Unlike the sequential piling investigated in section 5.4, the fleeing receptor can be closer to a source for more pile strikes resulting in higher received noise levels. Figure 5-1 shows the TTS contour for fish from Popper *et al.* (2014) (186 dB SEL_{cum}) as an example, given as unweighted SEL_{cum} for a fleeing receptor. The blue contours show the impact from each modelling location individually, and the red contour shows the increase in impact range when both sources occur simultaneously, resulting in a contour encircling the previous two.

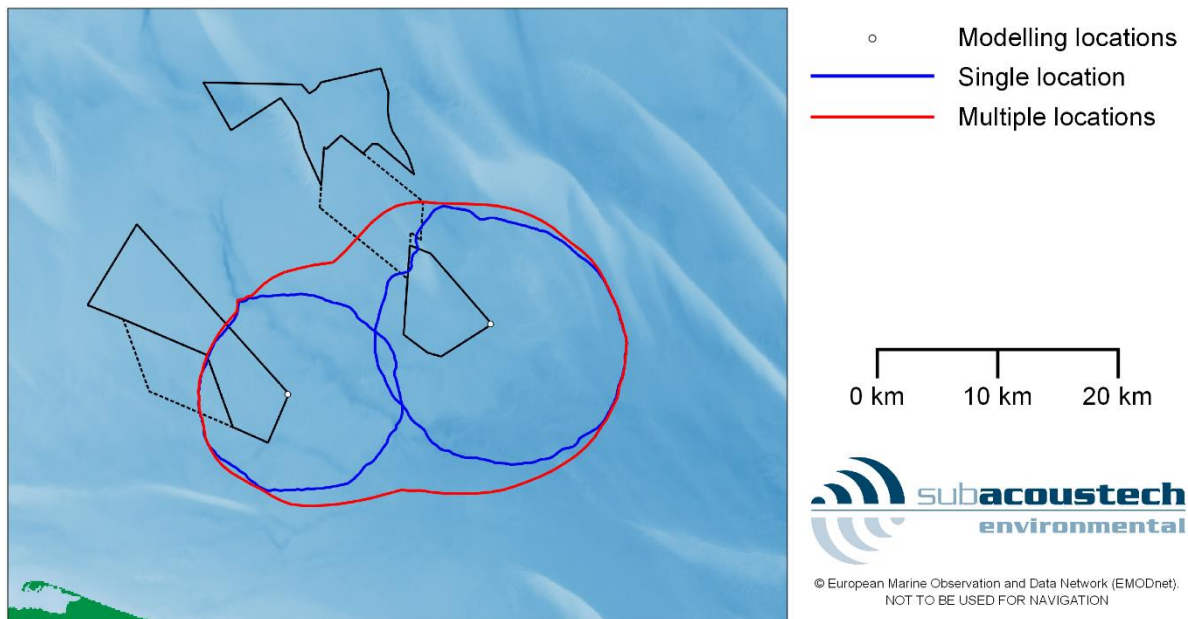


Figure 5-1 Contour plot showing the interaction between two noise sources when occurring simultaneously, contours for fish TTS, 186 dB SEL_{cum}

110. Sections 5.3.1 and 5.3.2 present contour plots for the multiple location piling scenarios alongside tables showing the increases in overall area. Impact ranges have not been presented in this section as there are two starting points for receptors. Fields denoted with a dash “-” show where there is no in-combination effect when the two piles are installed simultaneously, generally where the individual ranges are small enough that the distant site does not produce an influencing additional exposure. Contours that are too small to be seen clearly at the scale of the figures have not been included.

5.3.1 Marine mammals

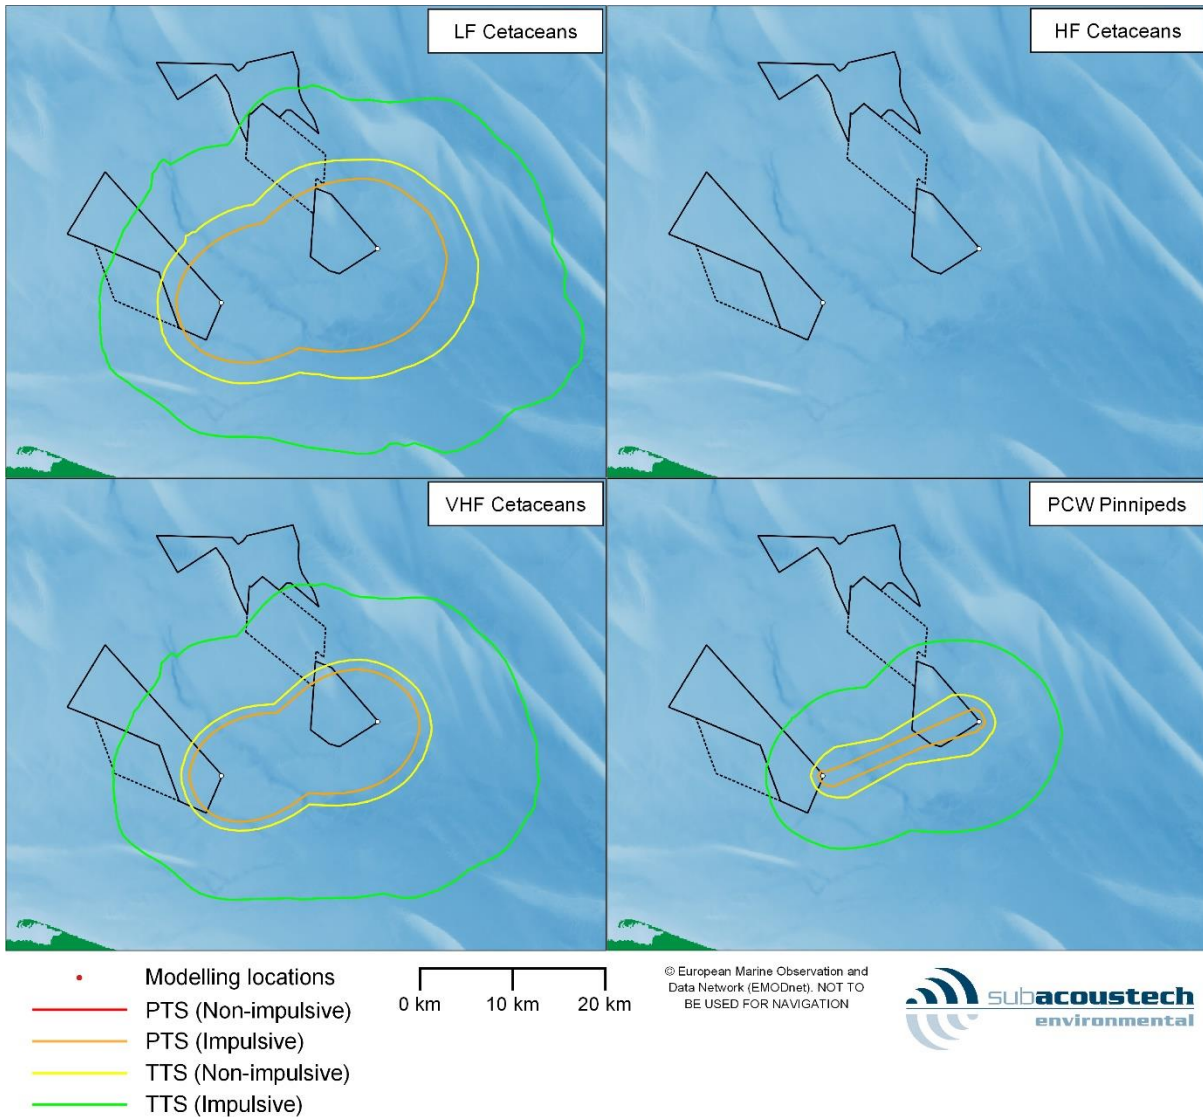


Figure 5-2 Contour plots showing the in-combination impacts of simultaneous installation of worst case monopile foundations at the SEP E and DEP SE modelling locations for marine mammals using the Southall et al. (2019) criteria assuming a fleeing receptor

| Southall et al. (2019) Weighted SEL _{cum} | | Worst case monopile SEP E area | Worst case monopile DEP SE area | In-combination area |
|---|--------------|--------------------------------------|---------------------------------------|------------------------|
| PTS (Impulsive) | LF (183 dB) | 92 km ² | 150 km ² | 420 km ² |
| | HF (185 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (155 dB) | 43 km ² | 61 km ² | 260 km ² |
| | PCW (185 dB) | 0.84 km ² | 1.4 km ² | 33 km ² |
| TTS (Impulsive) | LF (168 dB) | 720 km ² | 1100 km ² | 1600 km ² |
| | HF (170 dB) | 0.33 km ² | 0.44 km ² | - |
| | VHF (140 dB) | 530 km ² | 750 km ² | 1200 km ² |
| | PCW (170 dB) | 140 km ² | 220 km ² | 520 km ² |

Table 5-75 Summary for the impact areas for installation of monopile foundations using the worst case parameters at the SEP E and DEP SE modelling locations for marine mammals using the Southall et al. (2019) impulsive criteria assuming a fleeing receptor

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopile SEP E area | Worst case monopile DEP SE area | In-combination area |
|--|--------------|--------------------------------------|---------------------------------------|------------------------|
| PTS (Non-impulsive) | LF (199 dB) | 0.24 km ² | 0.37 km ² | - |
| | HF (198 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (173 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | PCW (201 dB) | < 0.1 km ² | < 0.1 km ² | - |
| TTS (Non-impulsive) | LF (179 dB) | 190 km ² | 300 km ² | 640 km ² |
| | HF (178 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (153 dB) | 70 km ² | 98 km ² | 330 km ² |
| | PCW (181 dB) | 5.8 km ² | 9.6 km ² | 100 km ² |

Table 5-76 Summary for the impact areas for installation of monopile foundations using the worst case parameters at the SEP E and DEP SE modelling locations for marine mammals using the Southall *et al.* (2019) non-impulsive criteria assuming a fleeing receptor

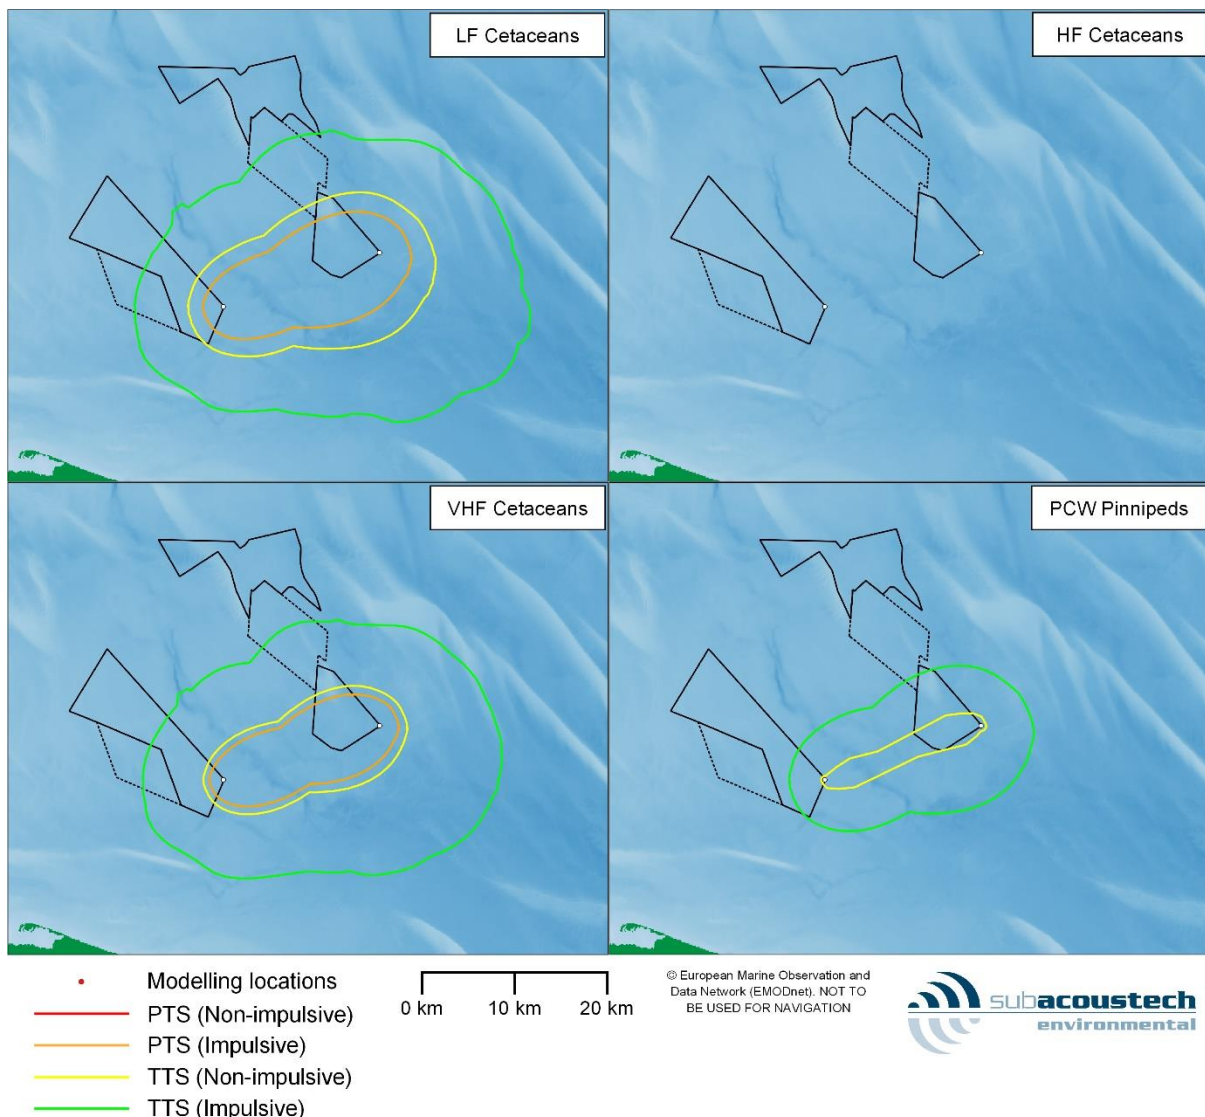


Figure 5-3 Contour plots showing the in-combination impacts of simultaneous installation of worst case pin pile foundations (4.0 m diameter) at the SEP E and DEP SE modelling locations for marine mammals using the Southall *et al.* (2019) criteria assuming a fleeing receptor

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case (4.0 m) pin pile SEP E area | Worst case (4.0 m) pin pile DEP SE area | In-combination area |
|--|--------------|--|---|------------------------|
| PTS (Impulsive) | LF (183 dB) | 18 km ² | 33 km ² | 200 km ² |
| | HF (185 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (155 dB) | 8.3 km ² | 13 km ² | 150 km ² |
| | PCW (185 dB) | < 0.1 km ² | < 0.1 km ² | - |
| TTS (Impulsive) | LF (168 dB) | 380 km ² | 590 km ² | 1000 km ² |
| | HF (170 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (140 dB) | 300 km ² | 430 km ² | 840 km ² |
| | PCW (170 dB) | 56 km ² | 90 km ² | 330 km ² |

Table 5-77 Summary for the impact areas for installation of pin pile foundations using the worst case parameters (4.0 m diameter piles) at the SEP E and DEP SE modelling locations for marine mammals using the Southall *et al.* (2019) impulsive criteria assuming a fleeing receptor

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case (4.0 m) pin pile SEP E area | Worst case (4.0 m) pin pile DEP SE area | In-combination area |
|--|--------------|--|---|------------------------|
| PTS (Non-impulsive) | LF (199 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | HF (198 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (173 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | PCW (201 dB) | < 0.1 km ² | < 0.1 km ² | - |
| TTS (Non-impulsive) | LF (179 dB) | 56 km ² | 98 km ² | 340 km ² |
| | HF (178 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (153 dB) | 17 km ² | 26 km ² | 190 km ² |
| | PCW (181 dB) | 0.5 km ² | 0.9 km ² | 50 km ² |

Table 5-78 Summary for the impact areas for installation of pin pile foundations using the worst case parameters (4.0 m diameter piles) at the SEP E and DEP SE modelling locations for marine mammals using the Southall *et al.* (2019) non-impulsive criteria assuming a fleeing receptor

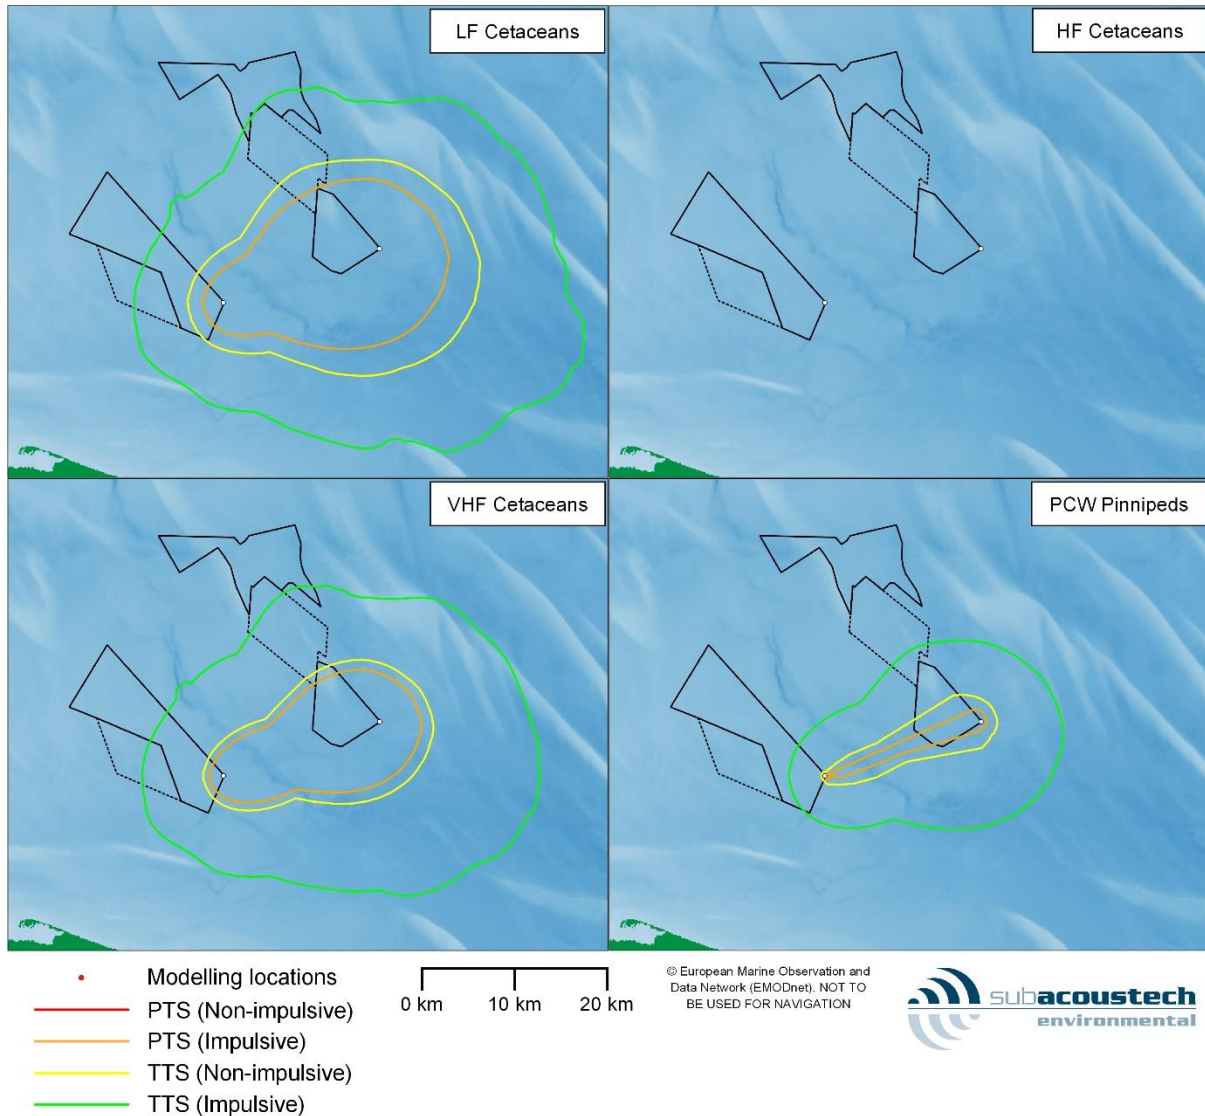


Figure 5-4 Contour plots showing the in-combination impacts of simultaneous installation of a worst case pin pile foundation (4.0 m diameter) at SEP E and a worst case monopile foundation at DEP SE, for marine mammals using the Southall et al. (2019) criteria, assuming a fleeing receptor

| Southall et al. (2019) Weighted SEL _{cum} | | Worst case (4.0 m) pin pile SEP E area | Worst case monopile DEP SE area | In-combination area |
|---|--------------|--|---------------------------------------|------------------------|
| PTS (Impulsive) | LF (183 dB) | 18 km ² | 150 km ² | 350 km ² |
| | HF (185 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (155 dB) | 8.3 km ² | 61 km ² | 210 km ² |
| | PCW (185 dB) | < 0.1 km ² | 1.4 km ² | 27 km ² |
| TTS (Impulsive) | LF (168 dB) | 380 km ² | 1100 km ² | 1400 km ² |
| | HF (170 dB) | < 0.1 km ² | 0.44 km ² | - |
| | VHF (140 dB) | 300 km ² | 750 km ² | 1100 km ² |
| | PCW (170 dB) | 56 km ² | 220 km ² | 450 km ² |

Table 5-79 Summary for the impact areas for installation of a pin pile foundation using the worst case parameters (4.0 m diameter piles) at the SEP E modelling location and a monopile foundation using the worst case parameters at the DEP SE modelling location, for marine mammals using the Southall et al. (2019) impulsive criteria, assuming a fleeing receptor

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case (4.0 m) pin pile SEP E area | Worst case monopile DEP SE area | In-combination area |
|--|--------------|--|---------------------------------------|------------------------|
| PTS (Non-impulsive) | LF (199 dB) | < 0.1 km ² | 0.37 km ² | - |
| | HF (198 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (173 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | PCW (201 dB) | < 0.1 km ² | < 0.1 km ² | - |
| TTS (Non-impulsive) | LF (179 dB) | 56 km ² | 300 km ² | 460 km ² |
| | HF (178 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (153 dB) | 17 km ² | 98 km ² | 250 km ² |
| | PCW (181 dB) | 0.5 km ² | 9.6 km ² | 74 km ² |

Table 5-80 Summary for the impact areas for installation of a pin pile foundation using the worst case parameters (4.0 m diameter piles) at the SEP E modelling location and a monopile foundation using the worst case parameters at the DEP SE modelling location, for marine mammals using the Southall *et al.* (2019) non-impulsive criteria, assuming a fleeing receptor

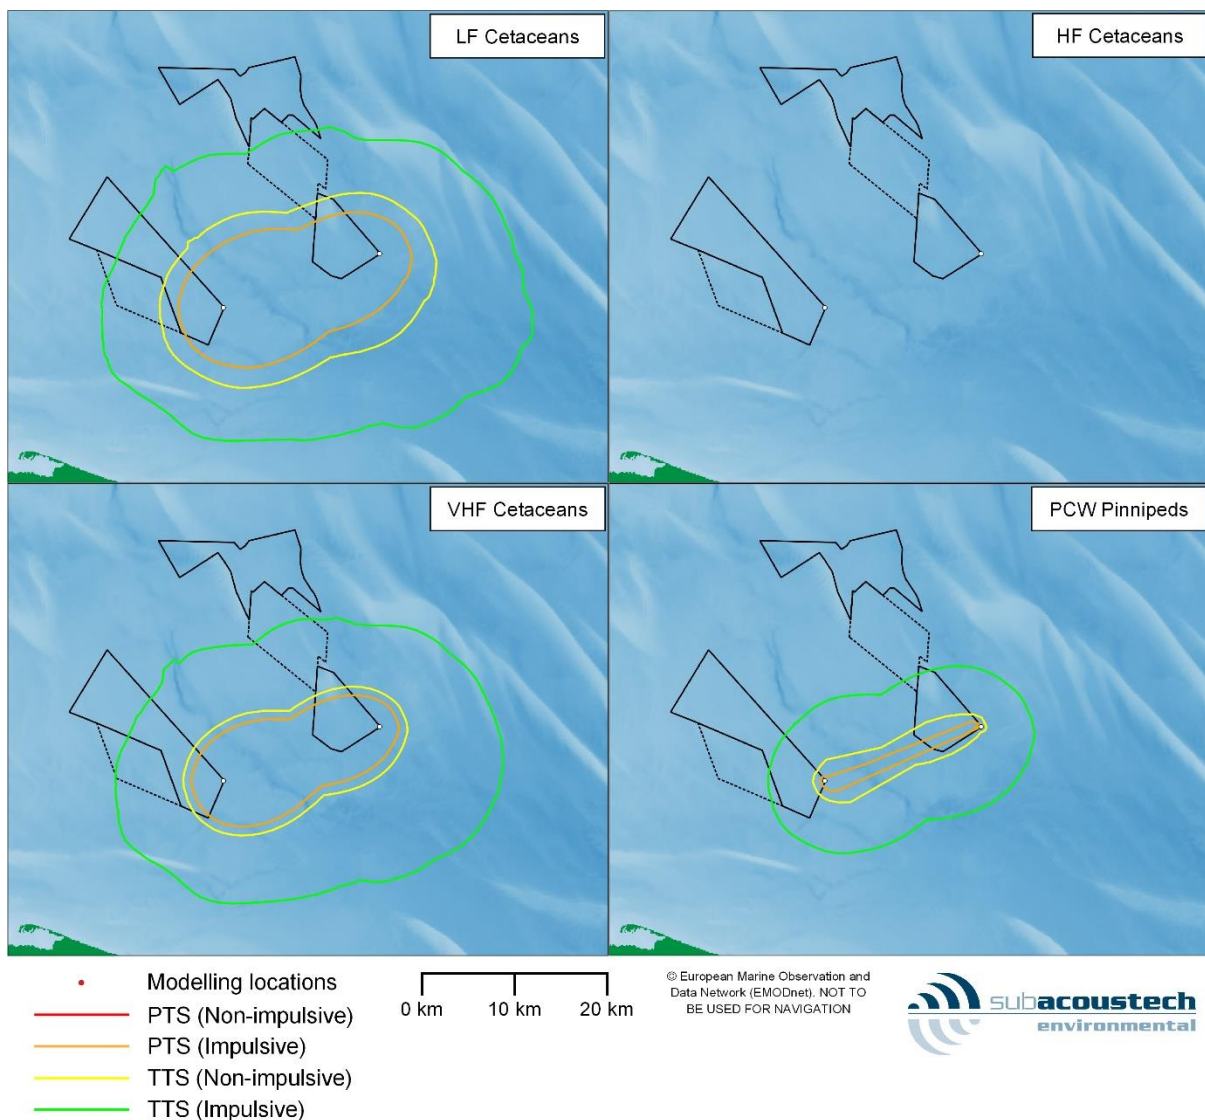


Figure 5-5 Contour plots showing the in-combination impacts of simultaneous installation of a worst case monopile foundation at SEP E and a worst case pin pile foundation (4.0 m diameter) at DEP SE, for marine mammals using the Southall *et al.* (2019) criteria, assuming a fleeing receptor

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopile SEP E area | Worst case (4.0 m) pin pile DEP SE area | In-combination area |
|--|--------------|--------------------------------------|---|------------------------|
| PTS (Impulsive) | LF (183 dB) | 92 km ² | < 0.1 km ² | 290 km ² |
| | HF (185 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (155 dB) | 43 km ² | < 0.1 km ² | 200 km ² |
| | PCW (185 dB) | 0.84 km ² | < 0.1 km ² | 23 km ² |
| TTS (Impulsive) | LF (168 dB) | 720 km ² | 98 km ² | 1200 km ² |
| | HF (170 dB) | 0.33 km ² | < 0.1 km ² | - |
| | VHF (140 dB) | 530 km ² | 26 km ² | 1000 km ² |
| | PCW (170 dB) | 140 km ² | 0.9 km ² | 410 km ² |

Table 5-81 Summary for the impact areas for installation of a monopile foundation using the worst case parameters at the SEP E modelling location and a pin pile foundation using the worst case parameters (4.0 m diameter piles) at the DEP SE modelling location, for marine mammals using the Southall *et al.* (2019) impulsive criteria, assuming a fleeing receptor

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopile SEP E area | Worst case (4.0 m) pin pile DEP SE area | In-combination area |
|--|--------------|--------------------------------------|---|------------------------|
| PTS (Non-impulsive) | LF (199 dB) | 0.24 km ² | < 0.1 km ² | - |
| | HF (198 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (173 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | PCW (201 dB) | < 0.1 km ² | < 0.1 km ² | - |
| TTS (Non-impulsive) | LF (179 dB) | 190 km ² | 98 km ² | 460 km ² |
| | HF (178 dB) | < 0.1 km ² | < 0.1 km ² | - |
| | VHF (153 dB) | 70 km ² | 26 km ² | 250 km ² |
| | PCW (181 dB) | 5.8 km ² | 0.9 km ² | 74 km ² |

Table 5-82 Summary for the impact areas for installation of a monopile foundation using the worst case parameters at the SEP E modelling location and a pin pile foundation using the worst case parameters (4.0 m diameter piles) at the DEP SE modelling location, for marine mammals using the Southall *et al.* (2019) non-impulsive criteria, assuming a fleeing receptor

5.3.2 Fish

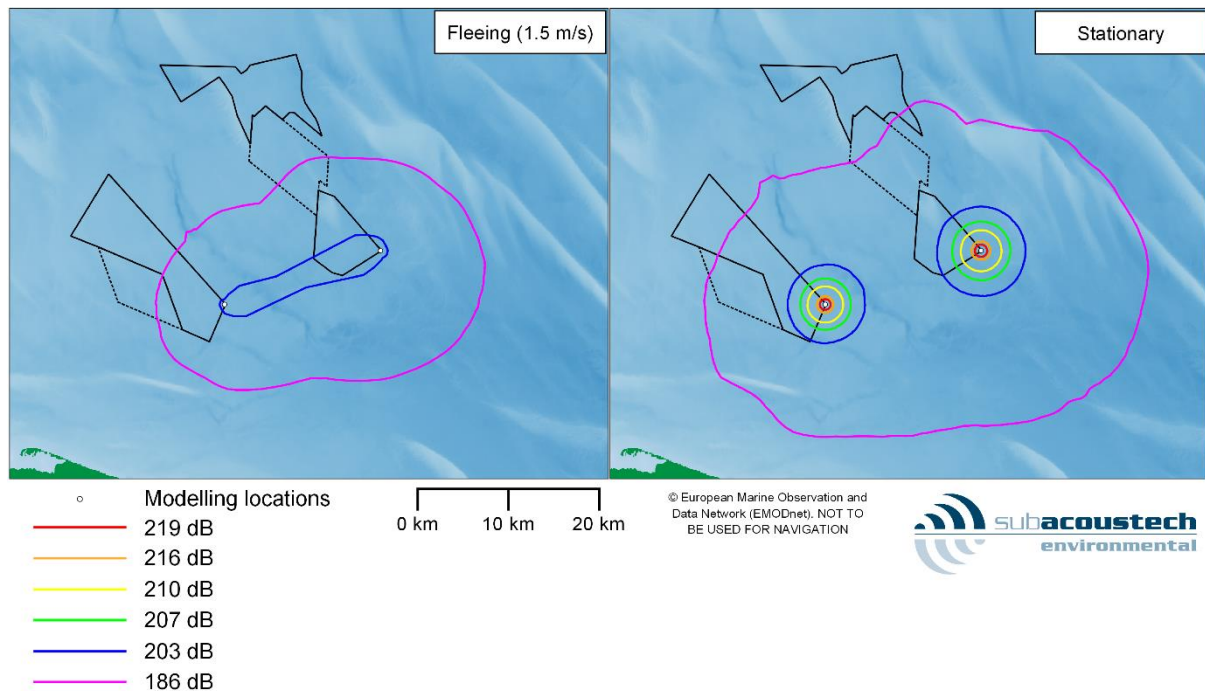


Figure 5-6 Contour plots showing the in-combination impacts of simultaneous installation of monopile foundations at the SEP E and DEP SE modelling locations, for fish using the Popper *et al.* (2014) criteria, assuming both fleeing and stationary receptors

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | | Worst case monopile SEP E area | Worst case monopile DEP SE area | In-combination area |
|--|--------|--------------------------------------|---------------------------------------|------------------------|
| Fleeing (1.5 ms⁻¹) | 219 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 216 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 210 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 207 dB | < 0.1 km ² | 0.16 km ² | - |
| | 203 dB | 1.1 km ² | 1.9 km ² | 57 km ² |
| | 186 dB | 210 km ² | 330 km ² | 680 km ² |
| Stationary | 219 dB | 1.2 km ² | 1.4 km ² | 2.5 km ² |
| | 216 dB | 2.7 km ² | 3.3 km ² | 5.7 km ² |
| | 210 dB | 12 km ² | 15 km ² | 27 km ² |
| | 207 dB | 24 km ² | 31 km ² | 55 km ² |
| | 203 dB | 55 km ² | 72 km ² | 130 km ² |
| | 186 dB | 620 km ² | 840 km ² | 1300 km ² |

Table 5-83 Summary for the impact areas for installation of monopile foundations using the worst case parameters at the SEP E and DEP SE modelling locations, for fish using the Popper *et al.* (2014) criteria, assuming both a fleeing and stationary receptor

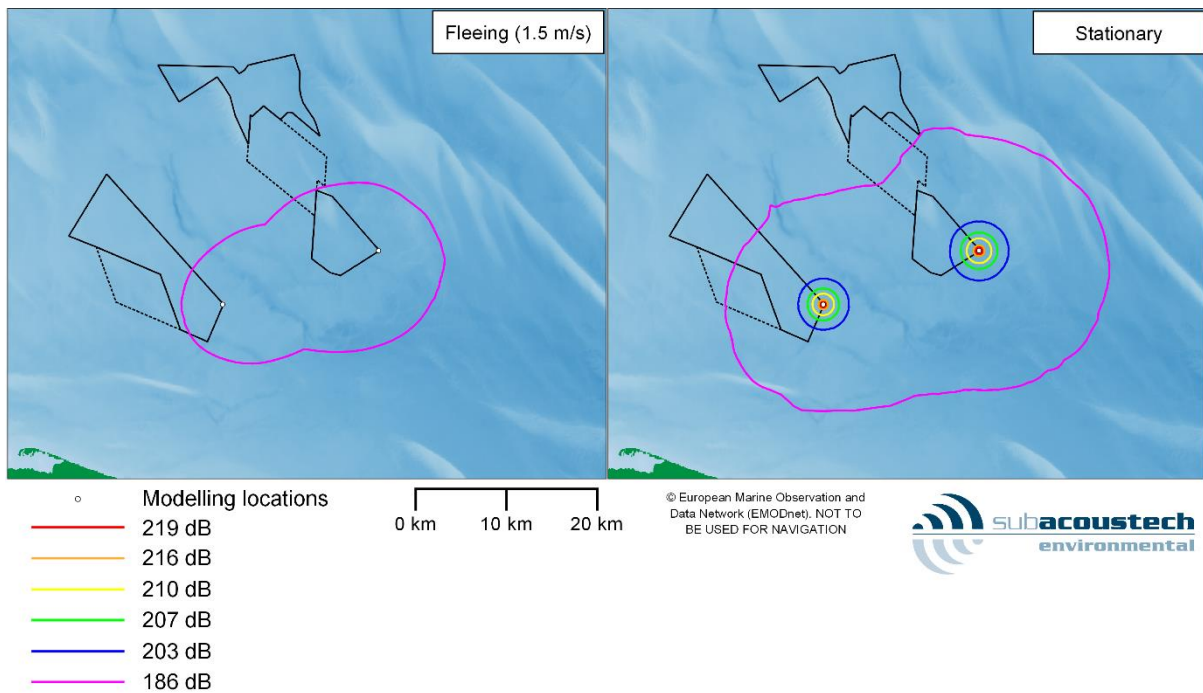


Figure 5-7 Contour plots showing the in-combination impacts of simultaneous installation of pin pile foundations (4.0 m diameter) at the SEP E and DEP SE modelling locations, for fish using the Popper *et al.* (2014) criteria, assuming both fleeing and stationary receptors

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | | Worst case (4.0 m) pin pile SEP E area | Worst case (4.0 m) pin pile DEP SE area | In-combination area |
|--|---------------------|--|---|------------------------|
| Fleeing (1.5 ms⁻¹) | 219 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 216 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 210 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 207 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 203 dB | < 0.1 km ² | < 0.1 km ² | - |
| Stationary | 186 dB | 78 km ² | 130 km ² | 400 km ² |
| | 219 dB | 0.4 km ² | 0.5 km ² | 0.8 km ² |
| | 216 dB | 0.8 km ² | 1.1 km ² | 1.9 km ² |
| | 210 dB | 4.2 km ² | 5.6 km ² | 9.8 km ² |
| | 207 dB | 9.2 km ² | 12 km ² | 21 km ² |
| | 203 dB | 24 km ² | 32 km ² | 56 km ² |
| 186 dB | 400 km ² | 550 km ² | 930 km ² | |

Table 5-84 Summary for the impact areas for installation of pin pile foundations using the worst case parameters (4.0 m diameter piles) at the SEP E and DEP SE modelling locations, for fish using the Popper *et al.* (2014) criteria, assuming both a fleeing and stationary receptor

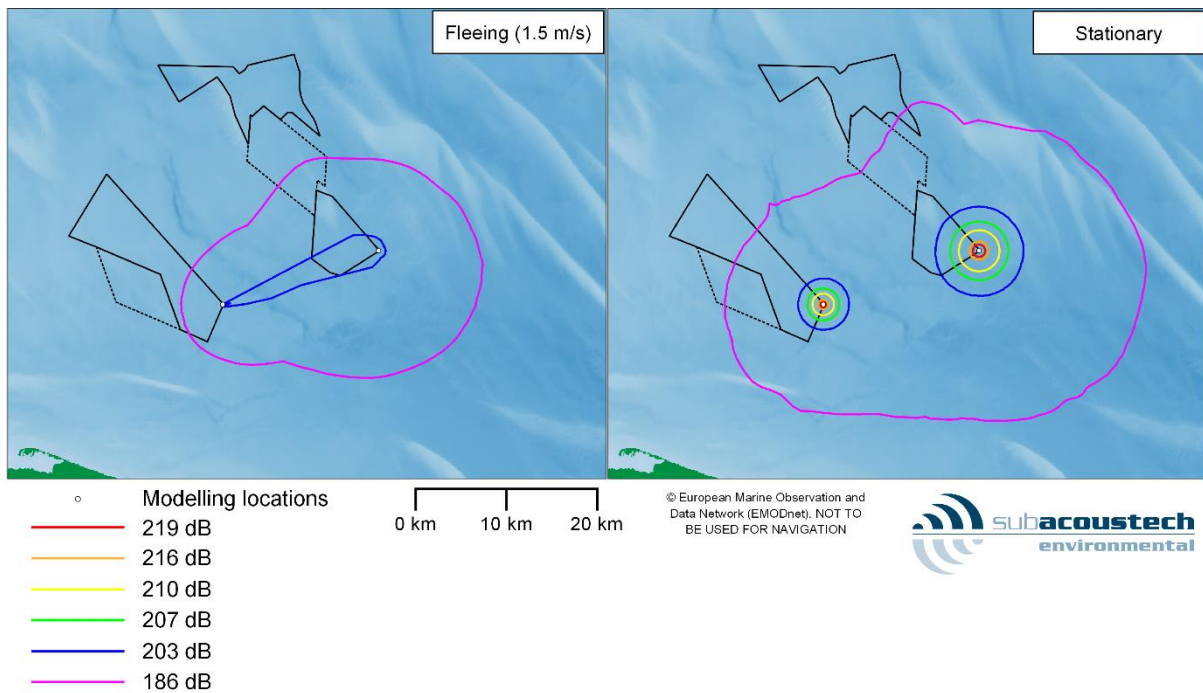


Figure 5-8 Contour plots showing the in-combination impacts of simultaneous installation of a worst case pin pile foundation (4.0 m diameter) at SEP E and a worst case monopile foundation at DEP SE, for fish using the Popper *et al.* (2014) criteria, assuming both fleeing and stationary receptors

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | | Worst case (4.0 m) pin pile SEP E area | Worst case monopile DEP SE area | In-combination area |
|--|--------|--|---------------------------------------|------------------------|
| Fleeing (1.5 ms⁻¹) | 219 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 216 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 210 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 207 dB | < 0.1 km ² | 0.16 km ² | - |
| | 203 dB | < 0.1 km ² | 1.9 km ² | 43 km ² |
| | 186 dB | 78 km ² | 330 km ² | 580 km ² |
| Stationary | 219 dB | 0.4 km ² | 1.4 km ² | 1.7 km ² |
| | 216 dB | 0.8 km ² | 3.3 km ² | 4.0 km ² |
| | 210 dB | 4.2 km ² | 15 km ² | 20 km ² |
| | 207 dB | 9.2 km ² | 31 km ² | 40 km ² |
| | 203 dB | 24 km ² | 72 km ² | 96 km ² |
| | 186 dB | 400 km ² | 840 km ² | 1200 km ² |

Table 5-85 Summary for the impact areas for installation of a pin pile foundation using the worst case parameters (4.0 m diameter piles) at the SEP E and a monopile foundation using the worst case parameters at the DEP SE modelling location, for fish using the Popper *et al.* (2014) criteria, assuming both fleeing and stationary receptors

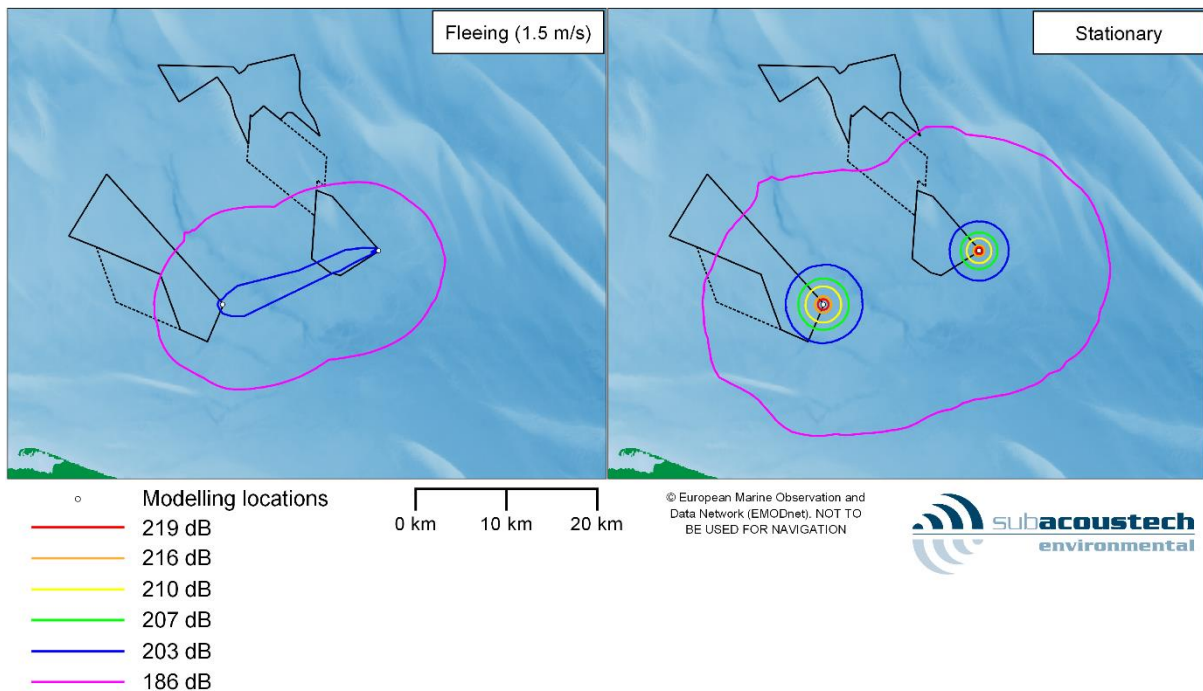


Figure 5-9 Contour plots showing the in-combination impacts of simultaneous installation of a worst case monopile foundation at SEP E and a worst case pin pile foundation (4.0 m diameter) at DEP SE, for fish using the Popper *et al.* (2014) criteria, assuming both fleeing and stationary receptors

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | | Worst case monopile SEP E area | Worst case (4.0 m) pin pile DEP SE area | In-combination area |
|--|--------|--------------------------------------|---|------------------------|
| Fleeing (1.5 ms ⁻¹) | 219 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 216 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 210 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 207 dB | < 0.1 km ² | < 0.1 km ² | - |
| | 203 dB | 1.1 km ² | < 0.1 km ² | 37 km ² |
| | 186 dB | 210 km ² | 130 km ² | 520 km ² |
| Stationary | 219 dB | 1.2 km ² | 0.5 km ² | 1.6 km ² |
| | 216 dB | 2.7 km ² | 1.1 km ² | 3.6 km ² |
| | 210 dB | 12 km ² | 5.6 km ² | 17 km ² |
| | 207 dB | 24 km ² | 12 km ² | 36 km ² |
| | 203 dB | 55 km ² | 32 km ² | 87 km ² |
| | 186 dB | 620 km ² | 550 km ² | 1100 km ² |

Table 5-86 Summary for the impact areas for installation of a pin pile foundation using the worst case parameters (4.0 m diameter piles) at the SEP E and a monopile foundation using the worst case parameters at the DEP SE modelling location, for fish using the Popper *et al.* (2014) criteria, assuming both a fleeing and stationary receptor

5.4 Sequential piling

111. Further modelling covering the potential for multiple impact piling operations to occur at the same location in the same 24-hour period have been considered. Unlike the simultaneous piling results presented in section 5.3, a fleeing receptor will have travelled away from the noise source by the time the second pile installation starts, and as such increases in noise level compared to a single installation are not as pronounced. The benefit does not extend to modelling of a stationary receptor.
112. The modelling in the following sections presents results for 2 monopiles installed sequentially or 4 pin piles installed sequentially at the worst case locations of each site. A fifth sequential scenario has also been considered where a monopile is installed at DEP, followed by a second monopile installed at SEP. This uses the same methodology as the results in section 5.3, and shows that by the time the second pile installation begins, the receptor will be at a sufficient distance to only receive low levels of noise from the second installation.
113. This scenario is of particular note due to the shapes of the fleeing contours presented in Figure 5-10 and Figure 5-11; the multiple location modelling presented in section 5.3 assumed receptors fleeing from each of the noise sources starting at the same time, whereas for the scenario considered here the second noise source doesn't commence until the first is complete. This means that an animal fleeing from the second location while only the first is operating will only receive aversive levels of noise in the unlikely case it flees towards the noise source, resulting in the contours shown. This methodology of straight-line fleeing has been chosen for multiple location modelling in order to keep fleeing assumptions and modelling calculations manageable.
114. Due to the uncertainty of what a receptor will do between piling operations it has been assumed that any additional piling will occur immediately after the previous installation, with no pause.

5.4.1 Marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopiles (2 piles installed sequentially) | | | | | | | |
|--|--------------|---|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | LF (183 dB) | 91 km ² | 6.2 km | 4.8 km | 5.4 km | 150 km ² | 8.3 km | 5.7 km | 6.9 km |
| | HF (185 dB) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | VHF (155 dB) | 43 km ² | 4.1 km | 3.4 km | 3.7 km | 60 km ² | 4.9 km | 3.9 km | 4.4 km |
| | PCW (185 dB) | 0.7 km ² | 500 m | 450 m | 490 m | 1.3 km ² | 680 m | 600 m | 640 m |
| TTS (Impulsive) | LF (168 dB) | 720 km ² | 20 km | 12 km | 15 km | 1100 km ² | 25 km | 14 km | 18 km |
| | HF (170 dB) | 0.3 km ² | 330 m | 300 m | 310 m | 0.4 km ² | 380 m | 350 m | 360 m |
| | VHF (140 dB) | 530 km ² | 16 km | 11 km | 13 km | 750 km ² | 19 km | 12 km | 15 km |
| | PCW (170 dB) | 5.6 km ² | 1.4 km | 1.3 km | 1.3 km | 220 km ² | 9.7 km | 6.7 km | 8.3 km |

Table 5-87 Summary of impact ranges from worst case monopile modelling at the worst case SEP and DEP modelling locations, using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals, assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case monopiles (2 piles installed sequentially) | | | | | | | |
|--|--------------|---|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | 0.2 km ² | 250 m | 230 m | 240 m | 0.3 km ² | 350 m | 300 m | 320 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 190 km ² | 9.2 km | 6.7 km | 7.7 km | 300 km ² | 12 km | 7.6 km | 9.7 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 69 km ² | 5.2 km | 4.3 km | 4.7 km | 97 km ² | 6.3 km | 4.8 km | 5.6 km |
| | 181 dB (PCW) | 5.6 km ² | 1.4 km | 1.3 km | 1.3 km | 9.4 km ² | 1.9 km | 1.7 km | 1.7 km |

Table 5-88 Summary of impact ranges from worst case monopile modelling at the worst case SEP and DEP modelling locations using the non-impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (4.0 m diameter) (4 piles installed sequentially) | | | | | | | |
|--|--------------|--|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | LF (183 dB) | 18 km ² | 2.7 km | 2.2 km | 2.4 km | 33 km ² | 3.8 km | 2.8 km | 3.3 km |
| | HF (185 dB) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | VHF (155 dB) | 8.3 km ² | 1.8 km | 1.5 km | 1.6 km | 13 km ² | 2.3 km | 1.8 km | 2.0 km |
| | PCW (185 dB) | < 0.1 km ² | 130 m | 100 m | 110 m | < 0.1 km ² | 180 m | 130 m | 160 m |
| TTS (Impulsive) | LF (168 dB) | 380 km ² | 14 km | 9.2 km | 11 km | 590 km ² | 18 km | 11 km | 14 km |
| | HF (170 dB) | < 0.1 km ² | 100 m | < 100 m | < 100 m | < 0.1 km ² | 100 m | < 100 m | < 100 m |
| | VHF (140 dB) | 300 km ² | 12 km | 8.4 km | 9.7 km | 440 km ² | 15 km | 9.3 km | 12 km |
| | PCW (170 dB) | 56 km ² | 4.8 km | 3.8 km | 4.2 km | 92 km ² | 6.4 km | 4.5 km | 5.4 km |

Table 5-89 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the worst case SEP and DEP modelling locations using the impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | Worst case pin piles (4.0 m diameter) (4 piles installed sequentially) | | | | | | | |
|--|--------------|--|---------|---------|---------|-----------------------|---------|---------|---------|
| | | SEP E | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 198 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 56 km ² | 4.9 km | 3.7 km | 4.2 km | 98 km ² | 6.8 km | 4.6 km | 5.6 km |
| | 178 dB (HF) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | 17 km ² | 2.6 km | 2.1 km | 2.3 km | 26 km ² | 3.3 km | 2.6 km | 2.9 km |
| | 181 dB (PCW) | 0.5 km ² | 430 m | 380 m | 410 m | < 0.1 km ² | 600 m | 530 m | 550 m |

Table 5-90 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the worst case SEP and DEP modelling locations using the non-impulsive Southall *et al.* (2019) weighted SEL_{cum} criteria for marine mammals assuming a fleeing animal

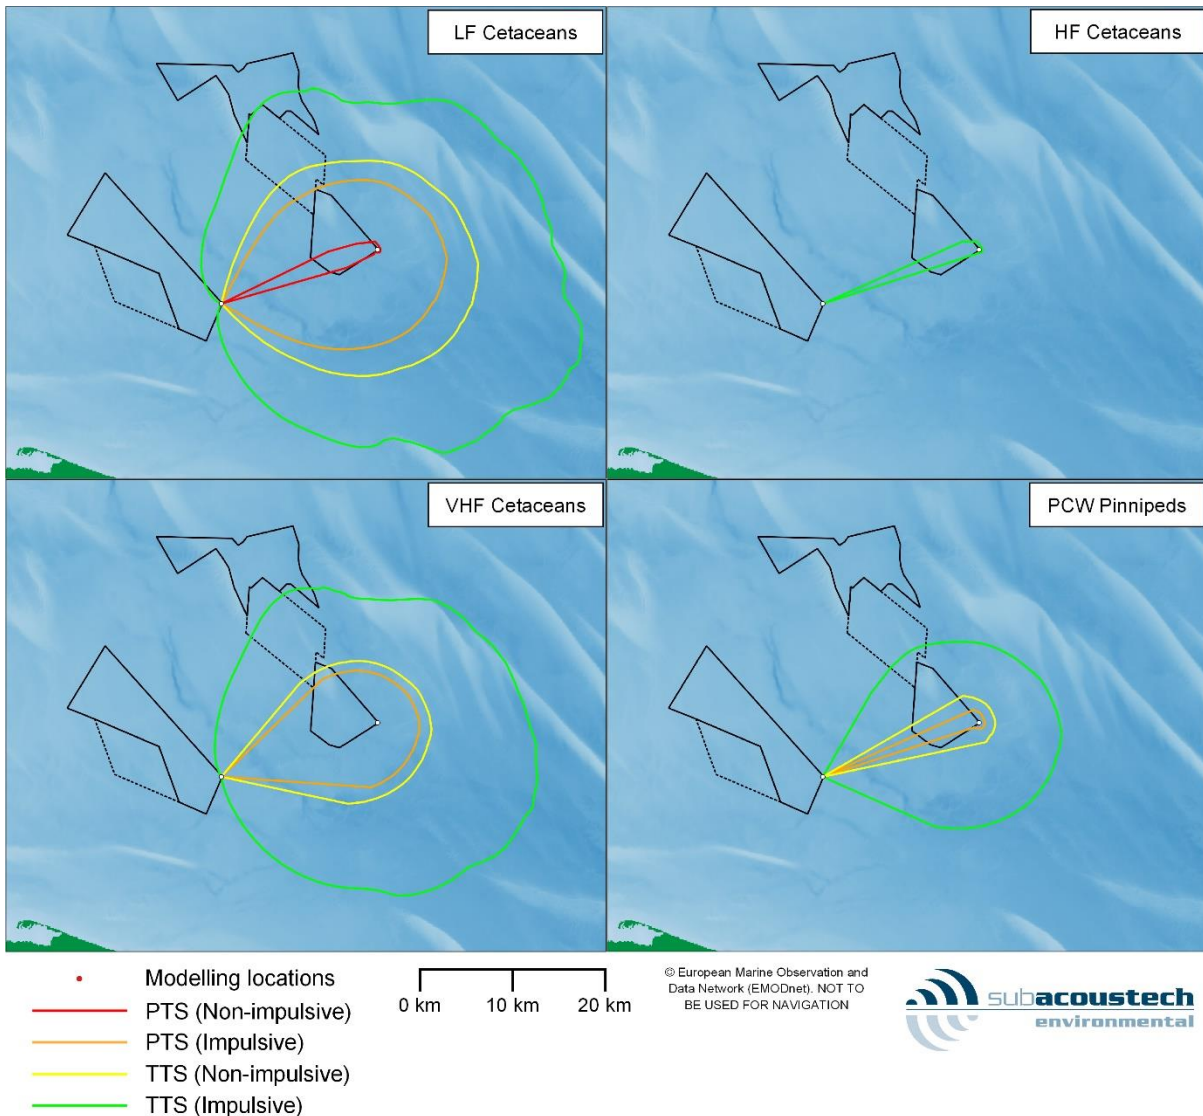


Figure 5-10 Contour plots showing the in-combination impacts of consecutive installation of a worst case monopile foundation at DEP SE followed by a worst case monopile foundation at DEP SE for marine mammals using the Southall *et al.* (2019) criteria assuming a fleeing receptor

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | In-combination area |
|--|--------------|------------------------|
| PTS (Impulsive) | LF (183 dB) | 320 km ² |
| | HF (185 dB) | - |
| | VHF (155 dB) | 170 km ² |
| | PCW (185 dB) | 18 km ² |
| TTS (Impulsive) | LF (168 dB) | 1200 km ² |
| | HF (170 dB) | 17 km ² |
| | VHF (140 dB) | 900 km ² |
| | PCW (170 dB) | 370 km ² |

Table 5-91 Summary for the impact areas for installation of a monopile foundation using the worst case parameters at the SEP E followed by a monopile foundation at the DEP SE modelling location for marine mammals using the Southall *et al.* (2019) impulsive criteria assuming a fleeing receptor

| Southall <i>et al.</i> (2019) Weighted SEL _{cum} | | In-combination area |
|--|--------------|------------------------|
| PTS (Non-impulsive) | LF (183 dB) | 24 km ² |
| | HF (185 dB) | - |
| | VHF (155 dB) | - |
| | PCW (185 dB) | - |
| TTS (Non-impulsive) | LF (168 dB) | 480 km ² |
| | HF (170 dB) | - |
| | VHF (140 dB) | 230 km ² |
| | PCW (170 dB) | 56 km ² |

Table 5-92 Summary for the impact areas for installation of a monopile foundation using the worst case parameters at the SEP E followed by a monopile foundation at the DEP SE modelling location for marine mammals using the Southall *et al.* (2019) non-impulsive criteria assuming a fleeing receptor

5.4.2 Fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case monopiles (2 piles installed sequentially) | | | | | | | |
|--|---|---------|---------|---------|-----------------------|---------|---------|---------|
| | SEP E | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | 180 m | 150 m | 160 m | 0.1 km ² | 220 m | 200 m | 210 m |
| 203 dB (fleeing) | < 0.1 km ² | 580 m | 530 m | 550 m | 1.8 km ² | 800 m | 720 m | 760 m |
| 186 dB (fleeing) | 210 km ² | 9.6 km | 7.2 km | 8.2 km | 330 km ² | 12 km | 8.0 km | 10 km |

Table 5-93 Summary of impact ranges from worst case monopile modelling at the worst case SEP and DEP modelling locations using the Popper *et al.* (2019) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case monopiles (2 piles installed sequentially) | | | | | | | |
|--|---|--------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 2.5 km ² | 900 m | 880 m | 890 m | 3.2 km ² | 1.0 km | 1.0 km | 1.0 km |
| 216 dB (stationary) | 5.5 km ² | 1.4 km | 1.3 km | 1.3 km | 7.1 km ² | 1.5 km | 1.5 km | 1.5 km |
| 210 dB (stationary) | 24 km ² | 2.8 km | 2.7 km | 2.7 km | 31 km ² | 3.2 km | 3.1 km | 3.2 km |
| 207 dB (stationary) | 45 km ² | 4.0 km | 3.7 km | 3.8 km | 59 km ² | 4.5 km | 4.2 km | 4.3 km |
| 203 dB (stationary) | 95 km ² | 5.9 km | 5.3 km | 5.5 km | 130 km ² | 6.7 km | 6.0 km | 6.3 km |
| 186 dB (stationary) | 820 km ² | 19 km | 14 km | 16 km | 1100 km ² | 23 km | 15 km | 19 km |

Table 5-94 Summary of impact ranges from worst case monopile modelling at the worst case SEP and DEP modelling locations using the Popper *et al.* (2019) unweighted SEL_{cum} criteria for fish assuming a stationary animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles (4.0 m diameter) (4 piles installed sequentially) | | | | | | | |
|--|--|---------|---------|---------|-----------------------|---------------------|---------|---------|
| | SEP E | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 216 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 210 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 207 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | < 100 m | < 100 m | < 100 m |
| 203 dB (fleeing) | < 0.1 km ² | < 100 m | < 100 m | < 100 m | < 0.1 km ² | 130 m | 100 m | 110 m |
| 186 dB (fleeing) | 79 km ² | 5.8 km | 4.4 km | 5.0 km | 140 km ² | 8.0 km ² | 5.2 km | 6.5 km |

Table 5-95 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the worst case SEP and DEP modelling locations using the Popper *et al.* (2019) unweighted SEL_{cum} criteria for fish assuming a fleeing animal

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | Worst case pin piles (4.0 m diameter) (4 piles installed sequentially) | | | | | | | |
|--|--|--------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB (stationary) | 1.8 km ² | 780 m | 750 m | 760 m | 2.3 km ² | 880 m | 850 m | 860 m |
| 216 dB (stationary) | 4.0 km ² | 1.2 km | 1.1 km | 1.1 km | 5.3 km ² | 1.3 km | 1.3 km | 1.3 km |
| 210 dB (stationary) | 18 km ² | 2.4 km | 2.3 km | 2.4 km | 24 km ² | 2.8 km | 2.7 km | 2.8 km |
| 207 dB (stationary) | 34 km ² | 3.4 km | 3.2 km | 3.3 km | 47 km ² | 4.0 km | 3.8 km | 3.9 km |
| 203 dB (stationary) | 76 km ² | 5.2 km | 4.7 km | 4.9 km | 100 km ² | 6.0 km | 5.5 km | 5.7 km |
| 186 dB (stationary) | 730 km ² | 18 km | 13 km | 15 km | 1000 km ² | 21 km | 14 km | 18 km |

Table 5-96 Summary of impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the worst case SEP and DEP modelling locations using the Popper *et al.* (2019) unweighted SEL_{cum} criteria for fish assuming a stationary animal

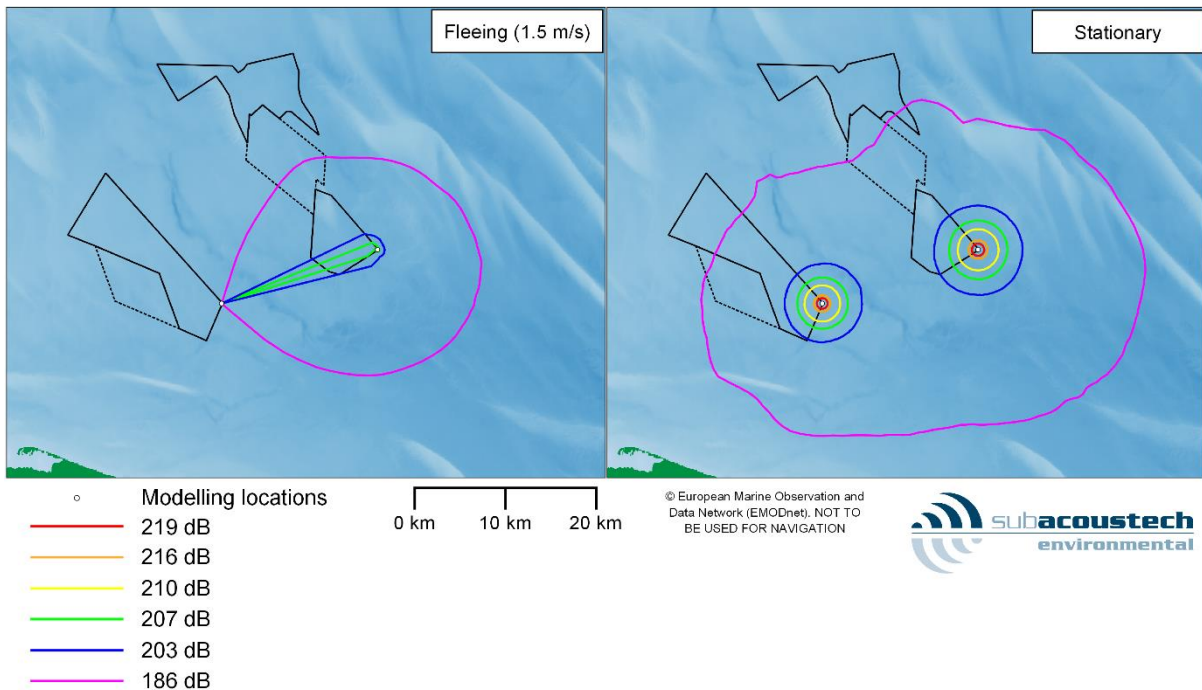


Figure 5-11 Contour plots showing the in-combination impacts of consecutive installation of a worst case monopile foundation at DEP SE followed by a worst case monopile foundation at DEP SE for marine mammals using the Popper *et al.* (2014) criteria assuming both fleeing and stationary receptors

| Popper <i>et al.</i> (2014) Unweighted SEL _{cum} | | In-combination area |
|--|--------|------------------------|
| Fleeing (1.5 ms⁻¹) | 219 dB | - |
| | 216 dB | - |
| | 210 dB | - |
| | 207 dB | 11 km ² |
| | 203 dB | 34 km ² |
| | 186 dB | 490 km ² |
| Stationary | 219 dB | 2.5 km ² |
| | 216 dB | 5.7 km ² |
| | 210 dB | 27 km ² |
| | 207 dB | 55 km ² |
| | 203 dB | 130 km ² |
| | 186 dB | 1300 km ² |

Table 5-97 Summary for the impact areas for installation of a monopile foundation using the worst case parameters at the SEP E followed by a monopile foundation at the DEP SE modelling location for fish using the Popper *et al.* (2014) criteria assuming both a fleeing and stationary receptor

6 Other noise sources

115. Although impact piling is expected to be the primary noise source during offshore wind farm construction and development (Bailey *et al.*, 2014), several other anthropogenic noise sources may be present. Each of these has been considered, and relevant biological noise criteria presented, in this section.
116. Table 6-1 provides a summary of the various noise producing sources, aside from impact piling, that are expected to be present during the construction and operation of the SEP and DEP sites.

| Activity | Description |
|---------------------------------------|--|
| Cable laying | Noise from the cable laying vessel and any other associated noise during the offshore cable installation. |
| Trenching | Plough trenching may be required during offshore cable installation. |
| Rock Placement | Potentially required on site for installation of offshore cables (cable crossings and cable protection) and scour protection around foundation structures. |
| Drilling | Necessary in case of impact piling refusal. |
| Suction dredging (seabed preparation) | Trailer suction hopper dredging may be required on site for seabed preparation work for certain foundation options, as well as for the export cable, array cable and interconnector cable installation. |
| Vessel noise | Jack-up barges for piling substructure and WTG installation. Other large and medium sized vessels on site to carry out other construction tasks, and anchor handling. Other small vessel for crew transport and maintenance on site. |
| Operational WTG | Noise transmitted through the water from operation WTG. The project design envelope gives turbines with capacities of up to 26 MW. |
| UXO detonation | Unexploded Ordnance (UXO) has been identified with the boundaries of the SEP and DEP sites, which need to be cleared before construction can begin. |

Table 6-1 Summary of the possible noise making activities at the SEP and DEP other than impact piling

117. The NPL Good Practice Guide 133 for underwater noise measurements (Robinson *et al.*, 2014) indicated that under certain circumstances, a simple modelling approach may be considered acceptable. Such an approach has been used for these noise sources, which are variously either quiet compared to impact piling (e.g. drilling and cable laying) or where detailed modelling would imply unjustified accuracy (e.g. where data is limited such as with large operational WTG noise or UXO detonation). The high-level overview of modelling that has been presented here is considered sufficient and there would be little benefit in using a more detailed model at this stage. The limitations of this approach are noted, including the lack of frequency or bathymetric dependence.

6.1 Noise making activities

118. For the purposes of identifying the greatest noise levels, approximate subsea noise levels have been predicted using a simple modelling approach based on measured data from Subacoustech Environmental's own underwater noise measurement database, scaled to relevant parameters for the site and specific noise sources to be used. The calculation of underwater noise transmission loss for the non-impulsive sources is based on an empirical analysis of the noise measurements taken on transects around these sources by Subacoustech. The predictions use the following principle fitted to the measured data, where R is the range from the source, N is the transmission loss and α is the absorption loss:

$$\text{Source level (SL)} - N \log R - \alpha R$$

119. Predicted source levels and propagation calculations for the construction activities are presented in Table 6-2 along with a summary of the number of datasets used in each case. As previously, all SELcum criteria use the same assumptions as presented in 2.2.2, and ranges smaller than 50 m (single strike) and 100 m (cumulative) have not been presented. It should be noted that this modelling approach does not take bathymetry or other environmental conditions into account, and as such can be applied to any location in either the SEP or DEP areas. Noise from operational WTGs has been reviewed separately in section 6.2, and UXO detonation is covered in section 6.3.

| Source | Estimated unweighted source level | Approximate transmission loss | Comments |
|-----------------------|-----------------------------------|--------------------------------|---|
| Cable laying | 171 dB re 1 μ Pa @ 1 m (RMS) | $13 \log R$ (no absorption) | Based on 11 datasets from a pipe laying vessel measuring 300 m in length; this is considered a worst case noise source for cable laying operations. |
| Trenching | 172 dB re 1 μ Pa @ 1 m (RMS) | $13 \log R - 0.0004R$ | Based on three datasets of measurements from trenching vessels more than 100 m in length. |
| Rock Placement | 172 dB re 1 μ Pa @ 1 m (RMS) | $12 \log R - 0.0005R$ | Based on four datasets from rock placement vessel 'Rollingstone.' |
| Drilling | 169 dB re 1 μ Pa @ 1 m (RMS) | $16 \log R - 0.0006R$ | Based on seven datasets of offshore drilling using a variety of drill sizes and powers. Modelling assumes a 200 kW drilling rig. |
| Suction dredging | 186 dB re 1 μ Pa @ 1 m (RMS) | $19 \log R - 0.0009R$ | Based on five datasets from suction and cutter suction dredgers. |
| Vessel noise (large) | 168 dB re 1 μ Pa @ 1 m (RMS) | $12 \log R - 0.0021R$ | Based on five datasets of large vessels including container ships, FPSOs and other vessels more than 100 m in length. Vessel speed assumed as 10 knots. |
| Vessel noise (medium) | 161 dB re 1 μ Pa @ 1 m (RMS) | $12 \log R - 0.0021R$ | Based on three datasets of moderate sized vessels less than 100 m in length. Vessel speed assumed as 10 knots. |

Table 6-2 Summary of the estimated unweighted source levels and transmission losses for the different construction noise sources considered

120. For SELcum calculations, the duration the noise is present is also considered, with all sources operating for a worst case 24 hours a day.

121. To account for the weightings required for modelling using the Southall et al. (2019) criteria (section 2.2.2.1), reductions in source level have been applied to the various noise sources. Figure 6-1 shows the representative noise measurements used, adjusted for the source levels in Table 6-2. Table 6-3 presents details of the reductions in source levels for each of the weightings used for modelling.

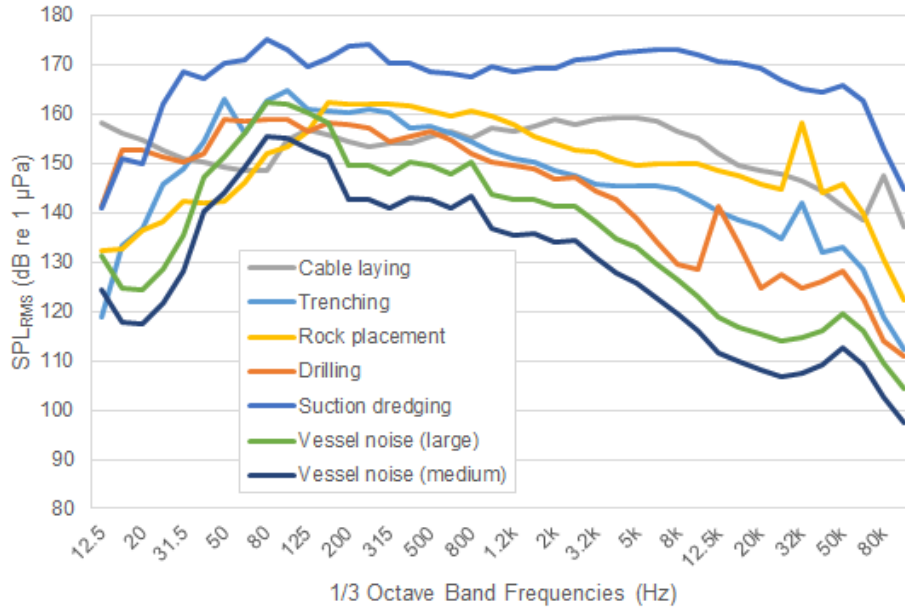


Figure 6-1 Summary of the 1/3 octave frequency bands used as a basis for the Southall et al. (2019) weightings used in the simple modelling

| Source | Reduction in source level from the unweighted level | | | |
|------------------|---|---------|---------|---------|
| | LF | HF | VHF | PCW |
| Cable laying | 3.6 dB | 22.9 dB | 23.9 dB | 13.2 dB |
| Trenching | 4.1 dB | 23.0 dB | 25.0 dB | 13.7 dB |
| Rock Placement | 1.6 dB | 11.9 dB | 12.5 dB | 8.2 dB |
| Drilling | 4.0 dB | 25.8 dB | 28.4 dB | 13.2 dB |
| Suction dredging | 2.5 dB | 7.9 dB | 9.6 dB | 4.2 dB |
| Vessel noise | 5.5 dB | 34.4 dB | 38.6 dB | 17.4 dB |

Table 6-3 Reductions in source level for the different construction noise sources considered when the Southall et al. (2019) weightings are applied

122. Table 6-4 and Table 6-5 summarise the predicted impact ranges for these noise sources. It is worth noting that Southall et al. (2019) and Popper et al. (2014) give different criteria for non-impulsive or continuous noise sources compared to impulsive noise (see section 2.2.2); all sources in this section are considered non-pulse or continuous.
123. Given the modelled impact ranges, any marine mammal would have to be less than 100 m from the continuous noise source at the start of the activity, in most cases, to acquire the necessary exposure to induce PTS as per Southall et al. (2019). The exposure calculation assumes the same receptor swim speed as the impact piling modelling in section 5. As explained in section 4.3.3, it should also be noted that this would only mean that the receptor reaches the 'onset' stage, which is the minimum exposure that could potentially lead to the start of an effect and may only be marginal. In most hearing groups, the noise levels are low enough that there is negligible risk.
124. For fish, there is a low to negligible risk of any injury or TTS in line with the SPLRMS guidance for continuous noise sources in Popper et al. (2014).
125. All sources presented here are much quieter than those presented for impact piling in section 5.

| Southall <i>et al.</i> (2019) | | Cable laying | Trenching | Rock placement | Drilling | Suction dredging | Vessels (large) | Vessels (medium) |
|-------------------------------|--------------|--------------|-----------|----------------|----------|------------------|-----------------|------------------|
| Weighted SEL _{cum} | | | | | | | | |
| PTS | 199 dB (LF) | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m |
| | 198 dB (HF) | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m |
| | 173 dB (VHF) | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m |
| | 201 dB (PCW) | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m |
| TTS | 179 dB (LF) | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m |
| | 178 dB (HF) | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m |
| | 153 dB (VHF) | < 100 m | < 100 m | 1.0 km | < 100 m | 200 m | < 100 m | < 100 m |
| | 181 dB (PCW) | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m | < 100 m |

Table 6-4 Summary of the impact ranges for the different construction noise sources using the non-impulsive criteria from Southall *et al.* (2019) for marine mammals

| Popper <i>et al.</i> (2014) | | Cable laying | Trenching | Rock placement | Drilling | Suction dredging | Vessels (large) | Vessels (medium) |
|---|--|--------------|-----------|----------------|----------|------------------|-----------------|------------------|
| Unweighted SPL _{RMS} | | | | | | | | |
| Recoverable injury 170 dB (48 hours) Unweighted SPL _{RMS} | | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m |
| TTS 158 dB (12 hours) Unweighted SPL _{RMS} | | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m |

Table 6-5 Summary of the impact ranges from Popper *et al.* (2014) for shipping and continuous noise, covering the different construction noise sources for fish (swim bladder involved in hearing)

6.2 Operational WTG noise

126. The main source of underwater noise from operational WTGs will be mechanically generated vibration from the rotating machinery in the turbines, which is transmitted into the sea through the structure of the turbine tower, pile and foundations (Nedwell *et al.*, 2003; Tougaard *et al.*, 2020). Noise levels generated above the water surface are low enough that no significant airborne sound will pass from the air to the water.
127. Tougaard *et al.* (2020) published a study investigating underwater noise data from 17 operational WTGs in Europe and the United States, from 0.2 MW to 6.15 MW nominal power output. The paper identified the nominal power output and wind speed as the two primary driving factors for underwater noise generation. Although the datasets were acquired under different conditions, the authors devised a formula based on the published data for the operational wind farms, allowing a broadband noise level to be estimated based on the application of wind speed, turbine size (by nominal power output) and distance from the turbine:

$$L_{eq} = C + \alpha \log_{10} \left(\frac{\text{distance}}{100 \text{ m}} \right) + \beta \log_{10} \left(\frac{\text{wind speed}}{10 \text{ ms}^{-1}} \right) + \gamma \log_{10} \left(\frac{\text{turbine size}}{1 \text{ MW}} \right)$$

128. Where C is a fixed constant and the coefficients α , β , and γ are derived from the empirical data for the 17 datasets.
129. The turbine sizes proposed at SEP and DEP are much larger than those used for the estimation above, so caution must be used when considering the results presented in this section. Figure 6-2 presents a level against range plot for 26 MW turbines using the Tougaard *et al.* (2020) calculation, assuming an average 6 ms⁻¹ wind speed.

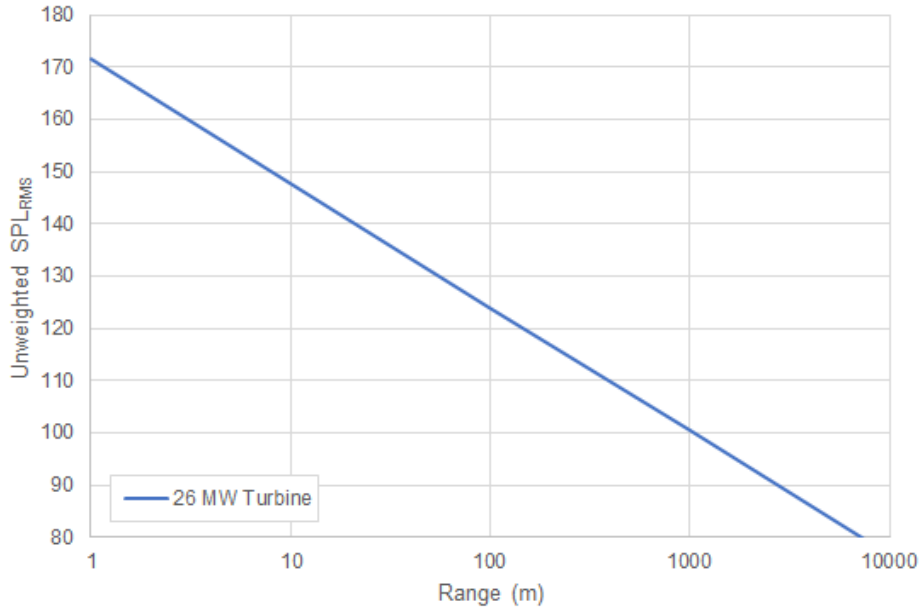


Figure 6-2 Predicted unweighted SPL_{RMS} from a 26 MW operational WTG using the calculation from Tougaard et al. (2020)

130. Using this data, a summary of the predicted impact ranges has been produced, as shown in Table 6-6 and Table 6-7. All SEL_{cum} criteria use the same assumptions as presented in section 2.2.2, and ranges smaller than 50 m (single strike) and 100 m (cumulative) have not been presented. The operational WTG source is considered a non-impulsive sound by Southall et al. (2019) and a continuous source by Popper et al. (2014). For SEL_{cum} calculations it has been assumed that the operational WTG noise is present 24 hours a day.

| | Southall et al. (2019) | Operational WTG (26 MW) |
|---------------------|----------------------------------|-------------------------|
| PTS (non-impulsive) | 199 dB (LF SEL _{cum}) | < 100 m |
| | 198 dB (HF SEL _{cum}) | < 100 m |
| | 173 dB (VHF SEL _{cum}) | < 100 m |
| | 201 dB (PCW SEL _{cum}) | < 100 m |
| TTS (non-impulsive) | 179 dB (LF SEL _{cum}) | < 100 m |
| | 178 dB (HF SEL _{cum}) | < 100 m |
| | 153 dB (VHF SEL _{cum}) | < 100 m |
| | 181 dB (PCW SEL _{cum}) | < 100 m |

Table 6-6 Summary of the impact ranges for the proposed operational WTGs using the non-impulsive noise criteria from Southall et al (2019) for marine mammals

| | Popper et al. (2014) | Operational WTG (26 MW) |
|--|----------------------|-------------------------|
| Recoverable injury 170 dB (48 hours) Unweighted SPL _{RMS} | | < 50 m |
| TTS 158 dB (12 hours) Unweighted SPL _{RMS} | | < 50 m |

Table 6-7 Summary of the impact ranges for the proposed operational WTGs using the continuous noise criteria from Popper et al (2014) for fish (swim bladder involved in hearing)

131. These results show that, for operational WTGs, injury risk is minimal. Taking the results from this and the previous section (6.2), and comparing them to the impact piling results in section 5, it is clear that noise from impact piling results in much greater noise levels and impact ranges, and hence should be considered the activity which has the potential to have the greatest effect during the construction and lifecycle of SEP and DEP.

6.3 UXO detonation

132. Several UXO devices with a range of charge weights (or quantity of contained explosive) have been identified within the boundaries of the SEP and DEP sites. These need to be cleared before any construction can begin. There are expected to be a variety of explosive types, many of which have been subject to degradation and burying over time. Two otherwise identical explosive devices are likely to produce different blasts in the case where one has spent an extended period on the seabed. A selection of explosive sizes has been considered based on site surveys and, in each case, it has been assumed that the maximum explosive charge in each device is present and detonates with the clearance.

6.3.1 Estimation of underwater noise levels

133. The noise produced by the detonation of explosives is affected by several different elements, only one of which can easily be factored into a calculation: the charge weight. In this case the charge weight is based on the equivalent weight of TNT. Many other elements relating to its situation (e.g., its design, composition, age, position, orientation, whether it is covered by sediment) and exactly how they will affect the sound produced by detonation are usually unknown and cannot be directly considered in this type of assessment. This leads to a high degree of uncertainty in the estimation of the source noise level. A worst case estimation has therefore been used for calculations, assuming the UXO to be detonated is not buried, degraded or subject to any other significant attenuation from its “as new” condition. The consequence of this is that the noise levels produced, particularly by the larger explosives under consideration, are likely to be over-estimated as some degree of degradation would be expected.

134. A selection of munitions that are potentially present at SEP and DEP, and their NEQ is given in Table 6-8 below. A broader range of NEQs has been included in the assessment to account for others that could be found.

| UXO description | NEQ |
|-----------------------------|--------|
| German 50 kg bomb | 25 kg |
| Air-delivered 1,000 lb bomb | 240 kg |
| Air-delivered 2,000 lb bomb | 525 kg |

Table 6-8 Selection of UXO munitions potentially present at SEP/DEP and their NEQ

135. The range of equivalent charge weights for the potential UXO devices that could be present within the SEP and DEP site boundaries have been estimated as 25, 55, 120, 240 and 525 kg, plus the donor weight of 0.5 kg in each case used to initiate detonation. In addition low-order deflagration has been assessed, which assumes that the donor or shaped charge (charge weight of 0.5 kg) detonates fully but without the follow-up detonation of the UXO. Each of these scenarios has also been assessed with the inclusion of a bubble curtain as mitigation, reducing source levels by 10 dB. This reduction is an estimate of the attenuation performance of bubble curtains typically used at offshore wind farm sites (Verfuss *et al.* 2019). Estimation of the source noise level for each charge weight has been carried out in accordance with the methodology of Soloway and Dahl (2014), which follows Arons (1954) and MTD (1996).

6.3.2 Estimation of underwater noise propagation

136. For this assessment, the attenuation of the noise from UXO detonation has been accounted for in calculations using geometric spreading and a sound absorption coefficient, primarily using the methodologies cited in Soloway and Dahl (2014), which establishes a trend based on measured data in open water. These are, for SPL_{peak} :

$$SPL_{peak} = 52.4 \times 10^6 \left(\frac{R}{W^{1/3}} \right)^{-1.13}$$

137. and for SEL_{ss}

$$SEL = 6.14 \times \log_{10} \left(W^{1/3} \left(\frac{R}{W^{1/3}} \right)^{-2.12} \right) + 219$$

138. where W is the equivalent charge weight for TNT in kilograms and R is the range from the source.
139. These equations give a relatively simple calculation which can be used to give an indication of the range of effect. The equation does not consider variable bathymetry or seabed type, and thus calculation results will be the same regardless where it is used. An attenuation correction can be added to the Soloway and Dahl (2014) equations for the absorption over long ranges (i.e. of the order of thousands of metres), based on measurements of high intensity noise propagation taken in the North and Irish Seas in similar depths to the present at SEP and DEP.
140. Despite this attenuation correction, the resulting noise levels still need to be considered carefully. For example, SPL_{peak} noise levels over larger distances are difficult to predict accurately (von Benda-Beckmann *et al.*, 2015). Soloway and Dahl (2014) only verify results from the equation above for small charges at ranges of less than 1 km, although the results do agree with the measurements presented by von Benda-Beckmann *et al.* (2015). At longer ranges, greater confidence is expected with the SEL calculations.
141. A further limitation in the Soloway and Dahl (2014) equations that must be considered are that variations in noise levels at different depths are not considered. Where animals are swimming near the surface, the acoustics can cause the noise level, and hence the exposure, to be lower (MTD, 1996). The risk to animals near the surface may therefore be lower than indicated by the impact ranges and therefore the results presented can be considered conservative in respect of the impact at different depths.
142. Additionally, an impulsive wave tends to be smoothed (i.e., the pulse becomes longer) over distance (Cudahy and Parvin, 2001), meaning the injurious potential of a wave at greater range can be even lower than just a reduction in the absolute noise level. An assessment in respect of SEL is considered preferential at long range as it considers the overall energy, and the smoothing of the peak is less critical.
143. The selection of assessment criteria must also be considered in light of this. As discussed in section 2.2.2.1, the smoothing of the pulse at range means that a pulse may be considered a non-pulse at greater distance. This study has presented impact ranges for both impulsive and non-impulsive criteria at greater ranges, suggesting that, at greater ranges, it may be more appropriate to use the non-pulse criteria.
144. A summary of the unweighted UXO source levels calculated using the equations above are given in Table 6-9.

| Charge weight | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|---|--------|---------------|---------------|----------------|----------------|----------------|
| SPL _{peak} source level (dB re 1 µPa @ 1 m) | 272.1 | 284.9 | 287.5 | 290.0 | 292.3 | 294.8 |
| SEL _{ss} source level (dB re 1 µPa ² s @ 1 m) | 217.1 | 228.0 | 230.1 | 232.3 | 234.2 | 236.4 |

Table 6-9 Summary of the unweighted SPL_{peak} and SEL_{ss} source levels used for UXO modelling

6.3.3 Impact ranges

145. Table 6-10 to Table 6-13 present the impact ranges for UXO detonation, considering various charge weights and impact criteria. It should be noted that Popper et al. (2014) gives specific impact criteria for explosions (Table 2-6). A UXO detonation source is defined as a single pulse, and as such the SEL_{cum} criteria from Southall et al. (2019) have been given as SEL_{ss} in the tables below, thus, fleeing animal assumptions do not apply.

146. As with the previous sections, ranges smaller than 50 m have not been presented.

147. Although the impact ranges presented in the following tables are large, the duration the noise is present must also be considered. For the detonation of a UXO, each explosion is a single noise event, compared to the multiple pulse nature and longer durations of impact piling.

| Southall et al. (2019) Unweighted SPL _{peak} | | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|--|--------------|--------|---------------|---------------|----------------|----------------|----------------|
| PTS | 219 dB (LF) | 220 m | 820 m | 1.0 km | 1.3 km | 1.7 km | 2.2 km |
| | 230 dB (HF) | 70 m | 260 m | 340 m | 450 m | 560 m | 730 m |
| | 202 dB (VHF) | 1.2 km | 14.6 km | 6.0 km | 7.8 km | 9.8 km | 13 km |
| | 218 dB (PCW) | 240 m | 910 m | 1.1 km | 1.5 km | 1.9 km | 2.5 km |
| TTS | 213 dB (LF) | 410 m | 1.5 km | 1.9 km | 2.5 km | 3.2 km | 4.1 km |
| | 224 dB (HF) | 130 m | 490 m | 640 m | 830 m | 1.0 km | 1.3 km |
| | 196 dB (VHF) | 2.3 km | 8.5 km | 11 km | 14 km | 18 km | 23 km |
| | 212 dB (PCW) | 450 m | 1.6 km | 2.1 km | 2.8 km | 3.5 km | 4.6 km |

Table 6-10 Summary of the PTS and TTS impact ranges for UXO detonation using the impulsive, unweighted SPL_{peak} noise criteria from Southall et al. (2019) for marine mammals

| Southall et al. (2019) Weighted SEL _{ss} | | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|--|--------------|---------|---------------|---------------|----------------|----------------|----------------|
| PTS (Impulsive) | 183 dB (LF) | 320 m | 2.2 km | 3.2 km | 4.7 km | 6.5 km | 9.5 km |
| | 185 dB (HF) | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | 50 m |
| | 155 dB (VHF) | 110 m | 570 m | 740 m | 950 m | 1.1 km | 1.4 km |
| | 185 dB (PCW) | 60 m | 390 m | 570 m | 830 m | 1.1 km | 1.6 km |
| TTS (Impulsive) | 168 dB (LF) | 4.5 km | 29 km | 41 km | 57 km | 76 km | 103 km |
| | 170 dB (HF) | < 540 m | 150 m | 210 m | 300 m | 390 m | 530 m |
| | 140 dB (VHF) | 930 m | 2.4 km | 2.8 km | 3.2 km | 3.5 km | 4.0 km |
| | 170 dB (PCW) | 800 m | 5.2 km | 7.5 km | 11 km | 14 km | 20 km |

Table 6-11 Summary of the PTS and TTS impact ranges for UXO detonation using the impulsive, weighted SEL_{ss} noise criteria from Southall et al. (2019) for marine mammals

| Southall et al. (2019) Weighted SEL _{ss} | | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|---|--------------|---------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|
| PTS (Non-impulsive) | 199 dB (LF) | < 50 m | 130 m | 190 m | 280 m | 390 m | 570 m |
| | 198 dB (HF) | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 50 m | < 50 m | < 50 m | 70 m | 100 m | 130 m |
| | 201 dB (PCW) | < 50 m | < 50 m | < 50 m | < 50 m | 70 m | 100 m |
| TTS (Non-impulsive) | 179 dB (LF) | 650 m | 4.4 km | 6.4 km | 9.4 km | 13 km | 19 km |
| | 178 dB (HF) | < 50 m | < 50 m | 60 m | 80 m | 110 m | 160 m |
| | 153 dB (VHF) | 150 m | 730 m | 940 m | 1.1 km | 1.4 km | 1.7 km |
| | 181 dB (PCW) | 110 m | 790 m | 1.1 km | 1.6 km | 2.3 km | 3.3 km |

Table 6-12 Summary of the PTS and TTS impact ranges for UXO detonation using the non-impulsive, weighted SEL_{ss} noise criteria from Southall et al. (2019) for marine mammals

| Popper et al. (2014) Unweighted SPL _{peak} | | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|---|--|---------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|
| 234 dB (Mortality and potential mortal injury) | | < 50 m | 170 m | 230 m | 300 m | 370 m | 490 m |
| 229 dB (Mortality and potential mortal injury) | | 80 m | 290 m | 380 m | 490 m | 620 m | 810 m |

Table 6-13 Summary of the impact ranges for UXO detonation using the unweighted SPL_{peak} explosion noise criteria from Popper et al. (2014) for species of fish

6.3.3.1 Bubble curtain

148. Table 6-14 to Table 6-17 present the predicted impact ranges for the various UXO detonations assuming a bubble curtain is used that achieves a 10 dB reduction in source levels.

| Southall et al. (2019) Unweighted SPL _{peak} | | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|---|--------------|---------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|
| PTS | 219 dB (LF) | 80 m | 290 m | 380 m | 490 m | 620 m | 810 m |
| | 230 dB (HF) | < 50 m | 100 m | 120 m | 160 m | 200 m | 260 m |
| | 202 dB (VHF) | 450 m | 1.6 km | 2.1 km | 2.8 km | 3.5 km | 4.6 km |
| | 218 dB (PCW) | 90 m | 320 m | 420 m | 550 m | 690 m | 900 m |
| TTS | 213 dB (LF) | 140 m | 540 m | 710 m | 920 m | 1.1 km | 1.5 km |
| | 224 dB (HF) | < 50 m | 170 m | 230 m | 300 m | 370 m | 490 m |
| | 196 dB (VHF) | 830 m | 3.1 km | 4.0 km | 5.1 km | 6.5 km | 8.4 km |
| | 212 dB (PCW) | 160 m | 600 m | 780 m | 1.0 km | 1.2 km | 1.6 km |

Table 6-14 Summary of the PTS and TTS impact ranges for UXO detonation using the impulsive, unweighted SPL_{peak} noise criteria from Southall et al. (2019) for marine mammals when using a bubble curtain as mitigation

| Southall et al. (2019) Weighted SEL _{ss} | | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|---|--------------|---------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|
| PTS (Impulsive) | 183 dB (LF) | 60 m | 370 m | 550 m | 810 m | 1.1 km | 1.6 km |
| | 185 dB (HF) | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | < 50 m | 120 m | 180 m | 250 m | 340 m | 460 m |
| | 185 dB (PCW) | < 50 m | 70 m | 100 m | 140 m | 200 m | 290 m |
| TTS (Impulsive) | 168 dB (LF) | 780 m | 5.3 km | 7.7 km | 11 km | 15 km | 22 km |
| | 170 dB (HF) | < 50 m | < 50 m | < 50 m | 60 m | 80 m | 110 m |
| | 140 dB (VHF) | 240 m | 1.0 km | 1.2 km | 1.5 km | 1.8 km | 2.1 km |
| | 170 dB (PCW) | 130 m | 940 m | 1.3 km | 1.9 km | 2.7 km | 4.0 km |

Table 6-15 Summary of the PTS and TTS impact ranges for UXO detonation using the impulsive, weighted SEL_{ss} noise criteria from Southall et al. (2019) for marine mammals when using a bubble curtain as mitigation

| Southall et al. (2019) Weighted SEL _{ss} | | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|---|--------------|---------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|
| PTS (Non-impulsive) | 199 dB (LF) | < 50 m | < 50 m | < 50 m | < 50 m | 70 m | 100 m |
| | 198 dB (HF) | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 110 m | 760 m | 1.1 km | 1.6 km | 2.2 km | 3.3 km |
| | 178 dB (HF) | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | < 50 m | 170 m | 250 m | 340 m | 450 m | 600 m |
| | 181 dB (PCW) | < 50 m | 130 m | 190 m | 290 m | 400 m | 590 m |

Table 6-16 Summary of the PTS and TTS impact ranges for UXO detonation using the non-impulsive, weighted SEL_{ss} noise criteria from Southall et al. (2019) for marine mammals when using a bubble curtain as mitigation

| Popper et al. (2014) Unweighted SPL _{peak} | | 0.5 kg | 25 kg + donor | 55 kg + donor | 120 kg + donor | 240 kg + donor | 525 kg + donor |
|---|--|---------------|----------------------|----------------------|-----------------------|-----------------------|-----------------------|
| 234 dB (Mortality and potential mortal injury) | | < 50 m | 60 m | 80 m | 100 m | 130 m | 170 m |
| 229 dB (Mortality and potential mortal injury) | | < 50 m | 100 m | 130 m | 180 m | 220 m | 290 m |

Table 6-17 Summary of the impact ranges for UXO detonation using the unweighted SPL_{peak} explosion noise criteria from Popper et al. (2014) for species of fish when using a bubble curtain as mitigation

6.3.4 Summary

149. The maximum PTS range calculated for UXO is 13 km for the VHF cetacean category, based on the unweighted SPL_{peak} criteria. For SEL_{ss} criteria, the largest PTS range is calculated for LF cetaceans with a predicted impact of 9.5 km using the impulsive SEL_{ss} criteria; these ranges reduce to 4.6 km (VHF SPL_{peak}) and 1.6 km (LF SEL_{ss}) when a bubble curtain is utilised as mitigation. As explained earlier, this assumes no degradation of the UXO and no smoothing of the pulse over that distance, which is very precautionary. Although an assumption of non-pulse could under-estimate the potential impact (Martin et al. 2020) (the equivalent range based on LF cetacean non-pulse criteria is 570 m; 100 m mitigated), it is likely that the long-range smoothing of the pulse peak would reduce its potential harm and the maximum 'impulsive' range for all species is very precautionary.

7 Summary and conclusions

150. Subacoustech Environmental have undertaken a study on behalf of Equinor to assess the potential underwater noise, and its effects, during construction and operation of the proposed SEP and DEP offshore wind farms.
151. The level of underwater noise from the installation of monopile and pin pile foundations during construction has been estimated using the semi-empirical underwater noise model INSPIRE. The modelling considers a wide variety of input parameters including bathymetry, hammer blow energy, strike rate and receptor fleeing speed.
152. Four representative locations were chosen, two at SEP and two at DEP, to give spatial variation as well as account for changes in water depth around the site. At each location, four sets of modelling parameters were considered:
 - Worst case monopile – a 16 m diameter pile installed with a maximum blow energy of 5,500 kJ;
 - Worst case pin pile – a 4 m diameter pile installed with a maximum blow energy of 3,000 kJ;
 - Worst case pin pile – a 3.5 m diameter pile installed with a maximum blow energy of 3,000 kJ; and
 - Most likely monopile – a 16 m diameter pile installed with a maximum blow energy of 4,500 kJ.
153. The loudest levels of noise and greatest impact ranges have been predicted for the worst case monopile parameters, with reduced ranges for the most likely monopile parameters and smaller still ranges overall for the worst case 3.5 and 4.0 m diameter pin pile parameters. Also, the deeper SE location at DEP resulted in larger ranges than the three other, shallower, locations.
154. The modelling results were analysed in terms of relevant noise metrics and criteria to assess the impacts of the impact piling noise on marine mammals (Southall et al., 2019 and Lucke et al., 2009) and fish (Popper et al., 2014 and Hawkins et al., 2014), which have been used to aid biological assessments.
155. For marine mammals, maximum PTS ranges were predicted for LF cetaceans of 8.3 km and for VHF cetaceans of 4.9 km, for the worst case monopile parameters at the SE DEP modelling location. These ranges are reduced when considering the most likely monopile parameters, pin pile parameters and the other modelling locations. A maximum behavioural impact range of 25 km was predicted for aversive behavioural reaction in harbour porpoise using the Lucke et al. (2009) SEL criteria. For fish, the largest TTS ranges were predicted using the worst case monopile parameters with a maximum range of 12 km for fleeing receptors at the SE DEP location. Ranges were smaller for the most likely monopile parameters, the worst case pin pile parameters and the other modelling locations.
156. Noise sources other than piling were considered using a high-level, simple modelling approach, including cable laying, trenching, rock placement, drilling, dredging, vessel noise and operational WTG noise. The predicted noise levels for the other construction noise sources and during WTG operation are well below those predicted for impact piling noise. The risk of any potentially injurious effects to fish or marine mammals from these sources are expected to be negligible as the noise emissions from these are close to, or below, the appropriate injury criteria when very close to the source of the noise.
157. UXO detonation has also been considered at the SEP and DEP sites, and for the expected UXO detonation noise, there is a risk of PTS up to 13 km for the largest UXO considered, a 525 kg

device using the unweighted SPL_{peak} Southall et al. (2019) criteria for VHF cetaceans. However, this is likely to be very precautionary as the impact range is based on worst case criteria that do not account for any smoothing of the pulse over long ranges, which reduces the pulse peak and other characteristics of the sound that cause injury.

158. The outputs of this modelling have been used to inform analysis of the impacts of underwater noise on marine mammals and fish in their respective reports.

References

- Anderson M H, Andersson S, Ahlsén J, Andersson B L, Hammar J, Persson L K G, Pihl J, Sigraý P, Wilkström A (2016). *A framework for regulating underwater noise during pile driving*. A technical Vindval report, ISBN 978-91-620-6775-5, Swedish Environmental Protection Agency, Stockholm, Sweden.
- Arons A B (1954). *Underwater explosion shock wave parameters at large distances from the charge*. J. Acoust. Soc. Am. 26, 343-346.
- Bailey H, Senior B, Simmons D, Rusin J, Picken G, Thompson P M (2010). *Assessing underwater noise levels during pile-driving at an offshore wind farm and its potential effects on marine mammals*. Marine Pollution Bulletin 60 (2010), pp 888-897.
- Bebb A H, Wright H C (1953). *Injury to animals from underwater explosions*. Medical Research Council, Royal Navy Physiological Report 53/732, Underwater Blast Report 31, January 1953.
- Bebb A H, Wright H C (1954a). *Lethal conditions from underwater explosion blast*. RNP Report 51/654, RNPL 3/51, National Archives Reference ADM 298/109, March 1954.
- Bebb A H, Wright H C (1954b). *Protection from underwater explosion blast: III. Animal experiments and physical measurements*. RNP Report 57/792, RNPL 2/54m March 1954.
- Bebb A H, Wright H C (1955). *Underwater explosion blast data from the Royal Navy Physiological Labs 1950/1955*. Medical Research Council, April 1955.
- Blix A S, Folkow L P (1995). *Daily energy expenditure in free living minke whales*. Acta Physio. Scand., 153: 61-66.
- Cudahy E A, Partvin S (2001). *The effects of underwater blast on divers*. Report 1218, Naval Submarine Medical Research Laboratory: #63706N M0099.001-5901.
- Dahl P H, de Jong C A, Popper A N (2015). *The underwater sound field from impact pile driving and its potential effects on marine life*. Acoustics Today, Spring 2015, Volume 11, Issue 2.
- Goertner J F (1978). *Dynamical model for explosion injury to fish*. Naval Surface Weapons Center, White Oak Lab, Silver Spring, MD. Report No. NSWC/WOL.TR-76-155.
- Goertner J F, Wiley M L, Young G A, McDonald W W (1994). *Effects of underwater explosions on fish without swim bladders*. Naval Surface Warfare Center. Report No. NSWC/TR-76-155.
- Halvorsen M B, Casper B C, Matthew D, Carlson T J, Popper A N (2012). *Effects of exposure to pile driving sounds on the lake sturgeon, Nile tilapia, and hogchoker*. Proc. Roy. Soc. B 279: 4705-4714.
- Hastie G, Merchant N D, Götz T, Russell D J F, Thompson P, Janik V M (2019). *Effects of impulsive noise on marine mammals: Investigating range-dependent risk*. DOI: 10.1002/eap.1906.
- Hastings M C and Popper A N (2005). *Effects of sound on fish*. Report to the California Department of Transport, under Contract No. 43A01392005, January 2005.
- Hawkins A D, Roberts L, Cheesman S (2014). *Responses of free-living coastal pelagic fish to impulsive sounds*. J. Acoust. Soc. Am. 135: 3101-3116.
- Hirata K (1999). *Swimming speeds of some common fish*. National Maritime Research Institute (Japan). Data sourced from Iwai T, Hisada M (1998). *Fishes – Illustrated book of Gakken* (in Japanese). Accessed on 8th March 2017 at [REDACTED]
- Lucke K, Siebert U, Lepper P A, Blanchet M-A (2009). *Temporary shift in masked hearing thresholds in a harbor porpoise (Phocoena phocoena) after exposure to seismic airgun stimuli*. J. Acoust. Soc. Am. 125 (6), pp 4060-4070, June 2009.

Marine Technical Directorate Ltd (MTD) (1996). *Guidelines for the safe use of explosives underwater*. MTD Publication 96/101. ISBN 1 870553 23 3.

Martin S B, Lucke K, Barclay D R (2020). *Techniques for distinguishing between impulsive and non-impulsive sound in the context of regulating sound exposure for marine mammals*. The Journal of the Acoustical Society of America 147, 2159.

McCauley E D, Fewtrell K, Duncan A J, Jenner C, Jenner M-N, Penrose J D, Prince R I T, Adhitya A, Murdoch J, McCabe K (2000). *Marine seismic survey – A study of environmental implications*. *Apnea Journal*, pp 692-708.

National Marine Fisheries Service (NMFS) (2018). *Revisions to: Technical guidance for assessing the effects of anthropogenic sound on marine mammal hearing (version 2.0): Underwater thresholds for onset of permanent and temporary threshold shifts*. U.S. Dept. of Commer., NOAA. NOAA Technical Memorandum NMFS-OPR-59.

National Physical Laboratory (NPL) (2010). *Underwater Noise Monitoring During Marine Piling for the Sheringham Shoal Offshore Wind Farm*. Report for Scira Offshore Energy Ltd/Statoil, used by permission.

National Physical Laboratory (NPL) (2013). *Measurement of Underwater Noise during the Operational Phase of the Sheringham Shoal Offshore Wind Farm*. Report for Scira Offshore Energy Ltd, used by permission.

Nedelec S L, Campbell J, Radford A N, Simpson S D, Merchant N D (2016). *Particle motion: The missing link in underwater acoustic ecology*. *Methods Ecol. Evol.* 7, 836 – 842.

Nedwell J R, Langworthy J, Howell D (2003). *Assessment of subsea noise and vibration from offshore wind turbines and its impact on marine wildlife. Initial measurements of underwater noise during construction of offshore wind farms, and comparisons with background noise*. Subacoustech Report No. 544R0423, published by COWRIE, May 2003.

Nedwell J R, Parvin S J, Edwards B, Workman R, Brooker A G, Kynoch J E (2007). *Measurement and interpretation of underwater noise during construction and operation of offshore windfarms in UK waters*. Subacoustech Report No. 544R0738 to COWRIE. ISBN: 978-09554276-5-4.

Nedwell J R, Cheesman S T (2011). *Measurement and assessment of underwater noise during impact piling operations of the foundations of the met mast at Hornsea Windfarm*. Subacoustech Report to EMU Limited; Report Ref: E322R0110.

Otani S, Naito T, Kato A, Kawamura A (2000). *Diving behaviour and swimming speed of a free-ranging harbour porpoise (*Phocoena phocoena*)*. *Marine Mammal Science*, Volume 16, Issue 4, pp 881-814, October 2000.

Popper A N, Hawkins A D, Fay R R, Mann D A, Bartol S, Carlson T J, Coombs S, Ellison W T, Gentry R L, Halvorsen M B, Løkkeborg S, Rogers P H, Southall B L, Zeddies D G, Tavolga W N (2014). *Sound exposure guidelines for Fishes and Sea Turtles*. Springer Briefs in Oceanography, DOI 10.1007/978-3-319-06659-2.

Popper A N, Hawkins A D (2018). *The importance of particle motion to fishes and invertebrates*. *J. Acoust. Soc. Am.* 143, 470 – 486.

Popper A N, Hawkins A D (2019). *An overview in fish bioacoustics and the impacts of anthropogenic sounds on fishes*. *Journal of Fish Biology*, 1-22. DOI: 10.1111/jfp.13948.

Radford C A, Montgomery J C, Caiger P, Higgs D M (2012). *Pressure and particle motion detection thresholds in fish: a re-examination of salient auditory cues in teleosts*. *Journal of Experimental Biology*, 215, 3429 – 3435.

Rawlins J S P (1987). *Problems in predicting safe ranges from underwater explosions*. Journal of Naval Science, Volume 13, No. 4, pp 235-246.

Robinson S P, Lepper P A, Hazelwood R A (2014). *Good practice guide for underwater noise measurement*. National Measurement Office, Marine Scotland, The Crown Estate. NPL Good Practice Guide No. 133, ISSN 1368-6550.

Soloway A G, Dahl P H (2014). *Peak sound pressure and sound exposure level from underwater explosions in shallow water*. The Journal of the Acoustical Society of America, 136(3), EL219 – EL223. <http://dx.doi.org/10.1121/1.4892668>.

Southall B L, Bowles A E, Ellison W T, Finneran J J, Gentry R L, Green Jr. C R, Kastak D, Ketten D R, Miller J H, Nachtigall P E, Richardson W J, Thomas J A, Tyack P L (2007). *Marine mammal noise exposure criteria: Initial scientific recommendations*. Aquatic Mammals, 33 (4), pp 411-509.

Southall B L, Finneran J J, Reichmuth C, Nachtigall P E, Ketten D R, Bowles A E, Ellison W T, Nowacek D P, Tyack P L (2019). *Marine mammal noise exposure criteria: Updated scientific recommendations for residual hearing effects*. Aquatic Mammals 2019, 45 (20, 125-232) DOI 10.1578/AM.45.2.2019.125.

Stephenson J R, Gingerich A J, Brown R S, Pflugrath B D, Deng Z, Carlson T J, Langeslay M J, Ahmann M L, Johnson R L, Seaburg A G (2010). *Assessing barotrauma in neutrally and negatively buoyant juvenile salmonids exposed to simulated hydro-turbine passage using a mobile aquatic barotrauma laboratory*. Fisheries Research Volume 106, Issue 3, pp 271-278, December 2010.

Tougaard J, Hermanssen, L, Madsen P T (2020), *How loud is the underwater noise from operating offshore wind turbines?* J. Acoust. Soc. Am. 148 (5). doi.org/10.1121/10.0002453.

Verfuss, U.K., Sinclair, R.R. & Sparling, C.E. (2019). A review of noise abatement systems for offshore wind farm construction noise, and the potential for their application in Scottish waters. Scottish Natural Heritage Research Report No. 1070

von Benda-Beckmann A M, Aarts G, Sertlek H Ö, Lucke K, Verboom W C, Kastelein R A, Ketten D R, van Bemmelen R, Lamm F-P A, Kirkwood R J, Ainslie M A (2015). *Assessing the impact of underwater clearance of unexploded ordnance on harbour porpoises (Phocoena phocoena) in the southern North Sea*. Aquatic Mammals 2015, 41(4), pp 503-523, DOI 10.1578/ AM.41.4.2015.503.

Wenz G M (1962). *Acoustic ambient noise in the ocean: spectra and sources*. Journal of the Acoustical Society of America, Volume 34, No. 12, December 1962, pp 1936-1956.

Appendix A Single strike modelling results

This appendix presents single strike impact piling modelling results that were calculated in addition to the results presented in section 5. It should be noted that the SEL_{ss} parameters presented in this appendix are not part of the Southall *et al.* (2019) and Popper *et al.* (2014) criteria but have been included to give an idea as to the levels of noise present for the first pile strike and at full energy at the end of the piling operations. The results for the worst case parameters are given in section A.1 and the results for the most likely parameters are given in section A.2.

As with the previous modelling for single strikes, predicted ranges smaller than 50 m and areas less than 0.01 km² have not been presented as the modelling processes are unable to specify that level of accuracy with confidence due to acoustic effects near the source and other noise processes at close ranges.

A.1 Worst case parameters

| Table (page) | Parameters | Criteria | | | |
|------------------|------------|------------|---|---|---|
| Table A 2 (p76) | SEP | Worst case | Monopiles | Southall <i>et al.</i> (2019) | Unweighted SPL _{peak} (First strike) |
| Table A 3 (p77) | DEP | | | | Weighted SEL _{ss} (impulsive) (First strike) |
| Table A 4 (p77) | SEP | | | | Weighted SEL _{ss} (non-impulsive) (First strike) |
| Table A 5 (p77) | DEP | | | Lucke <i>et al.</i> (2009) | Unweighted SPL _{peak-to-peak} (First strike) |
| Table A 6 (p77) | SEP | | | | Unweighted SEL _{ss} (First strike) |
| Table A 7 (p78) | DEP | | | | Southall <i>et al.</i> (2019) |
| Table A 8 (p78) | SEP | | | Weighted SEL _{ss} (impulsive) (First strike) | |
| Table A 9 (p78) | DEP | | | Weighted SEL _{ss} (non-impulsive) (First strike) | |
| Table A 10 (p78) | SEP | | | Pin piles (4.0 m) | Lucke <i>et al.</i> (2009) |
| Table A 11 (p78) | DEP | | Unweighted SEL _{ss} (First strike) | | |
| Table A 12 (p79) | SEP | | Southall <i>et al.</i> (2019) | | |
| Table A 13 (p79) | DEP | | | | Weighted SEL _{ss} (impulsive) (First strike) |
| Table A 14 (p79) | SEP | | | | Weighted SEL _{ss} (non-impulsive) (First strike) |
| Table A 15 (p79) | DEP | | Pin piles (3.5 m) | | Lucke <i>et al.</i> (2009) |
| Table A 16 (p80) | SEP | | | Unweighted SEL _{ss} (First strike) | |
| Table A 17 (p80) | DEP | | | Southall <i>et al.</i> (2019) | |
| Table A 18 (p80) | SEP | | | | Weighted SEL _{ss} (impulsive) (First strike) |
| Table A 19 (p80) | DEP | | | | Weighted SEL _{ss} (non-impulsive) (First strike) |
| Table A 20 (p80) | SEP | | | Lucke <i>et al.</i> (2009) | Unweighted SPL _{peak-to-peak} (First strike) |
| Table A 21 (p81) | DEP | | Unweighted SEL _{ss} (First strike) | | |
| Table A 22 (p81) | SEP | | Southall <i>et al.</i> (2019) | | Unweighted SPL _{peak} (First strike) |
| Table A 23 (p81) | DEP | | | Weighted SEL _{ss} (impulsive) (First strike) | |
| Table A 24 (p81) | SEP | | | Weighted SEL _{ss} (non-impulsive) (First strike) | |
| Table A 25 (p82) | DEP | | Mono piles | Southall <i>et al.</i> (2019) | Unweighted SEL _{ss} (Full energy) |
| Table A 26 (p82) | SEP | | | | |
| Table A 27 (p82) | DEP | | | | |
| Table A 28 (p82) | SEP | | | | |
| Table A 29 (p83) | DEP | | | | |
| Table A 30 (p83) | SEP | | | | |
| Table A 31 (p83) | DEP | | Pins (4.0 m) | Southall <i>et al.</i> (2019) | Unweighted SEL _{ss} (Full energy) |
| Table A 32 (p83) | SEP | | | | |
| Table A 33 (p83) | DEP | | | | |
| Table A 34 (p84) | SEP | | Pins (4.0 m) | Southall <i>et al.</i> (2019) | Unweighted SEL _{ss} (Full energy) |
| Table A 35 (p84) | DEP | | | | |
| Table A 36 (p84) | SEP | | | | |
| Table A 37 (p84) | DEP | | | | |
| Table A 38 (p85) | SEP | | | | |
| Table A 39 (p85) | DEP | | | | |

| Table (page) | Parameters | | Criteria | |
|------------------|------------|----------------------|--|--|
| Table A 40 (p85) | SEP | Pins (3.5 m) | | |
| Table A 41 (p85) | DEP | | | |
| Table A 42 (p86) | SEP | | | |
| Table A 43 (p86) | DEP | | | |
| Table A 44 (p86) | SEP | Monopiles | Unweighted SPL _{peak} (First strike) | |
| Table A 45 (p86) | DEP | | Popper <i>et al.</i> (2014) | Unweighted SEL _{ss} (First strike) |
| Table A 46 (p87) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , SEL _{ss} (First strike) |
| Table A 47 (p87) | DEP | | | |
| Table A 48 (p87) | SEP | | | |
| Table A 49 (p87) | DEP | | | |
| Table A 50 (p87) | SEP | Pin piles (4.0 m) | Unweighted SPL _{peak} (First strike) | |
| Table A 51 (p88) | DEP | | Popper <i>et al.</i> (2014) | Unweighted SEL _{ss} (First strike) |
| Table A 52 (p88) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , SEL _{ss} (First strike) |
| Table A 53 (p88) | DEP | | | |
| Table A 54 (p88) | SEP | | | |
| Table A 55 (p88) | DEP | | | |
| Table A 56 (p89) | SEP | Pin piles (3.5 m) | Unweighted SPL _{peak} (First strike) | |
| Table A 57 (p89) | DEP | | Popper <i>et al.</i> (2014) | Unweighted SEL _{ss} (First strike) |
| Table A 58 (p89) | SEP | | Hawkins <i>et al.</i> (2014) | Unweighted SPL _{peak} , SPL _{peak-to-peak} , SEL _{ss} (First strike) |
| Table A 59 (p89) | DEP | | | |
| Table A 60 (p89) | SEP | | | |
| Table A 61 (p90) | DEP | | | |
| Table A 62 (p90) | SEP | Mono piles | Unweighted SEL _{ss} (Full energy) | |
| Table A 63 (p90) | DEP | | | |
| Table A 64 (p90) | SEP | Pins (4.0 m) | | Popper <i>et al.</i> (2014) |
| Table A 65 (p90) | DEP | | | |
| Table A 66 (p91) | SEP | Pins (3.5 m) | | |
| Table A 67 (p91) | DEP | | | |

Table A 1 Summary of the worst case, single strike modelling results tables presented in this section

A.1.1 Marine mammals

First strike

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case monopiles (first strike) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.22 km ² | 270 m | 270 m | 270 m | 0.19 km ² | 250 m | 250 m | 250 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | < 0.01 km ² | 50 m | 50 m | 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 1.3 km ² | 630 m | 630 m | 630 m | 1.0 km ² | 580 m | 570 m | 570 m |
| | 212 dB (PCW) | < 0.01 km ² | 60 m | 60 m | 60 m | < 0.1 km ² | 60 m | 60 m | 60 m |

Table A 2 Summary of the first strike impact ranges from worst case monopile modelling at the SEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case monopiles (first strike) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.24 km ² | 280 m | 280 m | 280 m | 0.27 km ² | 290 m | 290 m | 290 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | 60 m | 50 m | 60 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 1.4 km ² | 680 m | 660 m | 670 m | 1.6 km ² | 710 m | 700 m | 710 m |
| | 212 dB (PCW) | < 0.01 km ² | 60 m | 60 m | 60 m | < 0.01 km ² | 60 m | 60 | 60 m |

Table A 3 Summary of the first strike impact ranges from worst case monopile modelling at the DEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case monopiles (first strike) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.09 km ² | 170 m | 170 m | 170 m | 0.07 km ² | 160 m | 150 m | 150 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 90 m | 90 m | 90 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 7.1 km ² | 1.5 km | 1.5 km | 1.5 km | 5.5 km ² | 1.4 km | 1.3 km | 1.3 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 1.4 km ² | 680 m | 680 m | 680 m | 1.3 km ² | 650 m | 640 m | 640 m |
| | 170 dB (PCW) | 0.05 km ² | 130 m | 130 m | 130 m | 0.05 km ² | 120 m | 120 m | 120 m |

Table A 4 Summary of the first strike impact ranges from worst case monopile modelling at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case monopiles (first strike) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.1 km ² | 180 m | 180 m | 180 m | 0.11 km ² | 190 m | 190 m | 190 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 100 m | 100 m | 100 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 8.2 km ² | 1.7 km | 1.6 km | 1.6 km | 9.4 km ² | 1.7 km | 1.7 km | 1.7 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 1.5 km ² | 710 m | 700 m | 700 m | 1.6 km ² | 730 m | 720 m | 730 m |
| | 170 dB (PCW) | 0.06 km ² | 140 m | 140 m | 140 m | 0.06 km ² | 140 m | 140 m | 140 m |

Table A 5 Summary of the first strike impact ranges from worst case monopile modelling at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case monopiles (first strike) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.3 km ² | 310 m | 310 m | 310 m | 0.25 km ² | 280 m | 280 m | 280 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.05 km ² | 130 m | 120 m | 130 m | 0.05 km ² | 120 m | 120 m | 120 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 6 Summary of the first strike impact ranges from worst case monopile modelling at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case monopiles (first strike) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.34 km ² | 330 m | 330 m | 330 m | 0.38 km ² | 350 m | 350 m | 350 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.05 km ² | 130 m | 130 m | 130 m | 0.05 km ² | 130 m | 130 m | 130 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 7 Summary of the first strike impact ranges from worst case monopile modelling at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Worst case monopiles (first strike) | | | | | | | |
|--|--|-------------------------------------|-------|--------|-------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 2.4 km ² | 880 m | 870 m | 880 m | 2.0 km ² | 800 m | 770 m | 790 m |
| Behavioural (174 dB) | | 340 km ² | 11 km | 9.6 km | 10 km | 250 km ² | 9.8 km | 7.6 km | 8.9 km |

Table A 8 Summary of the first strike impact ranges from worst case monopile modelling at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Worst case monopiles (first strike) | | | | | | | |
|--|--|-------------------------------------|-------|--------|-------|---------------------|-------|-------|-------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 2.7 km ² | 950 m | 910 m | 930 m | 3.0 km ² | 990 m | 970 m | 980 m |
| Behavioural (174 dB) | | 350 km ² | 12 km | 9.4 km | 11 km | 460 km ² | 14 km | 10 km | 12 km |

Table A 9 Summary of the first strike impact ranges from worst case monopile modelling at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | | Worst case monopiles (first strike) | | | | | | | |
|--|--|-------------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | | 27 km ² | 3.1 km | 2.8 km | 2.9 km | 35 km ² | 3.4 km | 3.2 km | 3.3 km |
| Behavioural (145 dB) | | 450 km ² | 13 km | 9.2 km | 12 km | 620 km ² | 16 km | 12 km | 14 km |

Table A 10 Summary of the first strike impact ranges from worst case monopile modelling at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | | Worst case monopiles (first strike) | | | | | | | |
|--|--|-------------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | | 40 km ² | 3.8 km | 3.4 km | 3.6 km | 46 km ² | 3.9 km | 3.7 km | 3.8 km |
| Behavioural (145 dB) | | 640 km ² | 17 km | 11 km | 14 km | 850 km ² | 19 km | 13 km | 16 km |

Table A 11 Summary of the first strike impact ranges from worst case monopile modelling at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.05 km ² | 130 m | 120 m | 130 m | 0.04 km ² | 120 m | 110 m | 120 m |
| | 218 dB (PCW) | 0.01 km ² | 50 m | < 50 m | < 50 m | 0.01 km ² | 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | 0.01 km ² | 60 m | 50 m | 60 m | 0.01 km ² | 60 m | 50 m | 60 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 0.27 km ² | 300 m | 290 m | 300 m | 0.23 km ² | 280 m | 260 m | 270 m |
| | 212 dB (PCW) | 0.01 km ² | 70 m | 60 m | 70 m | 0.01 km ² | 70 m | 60 m | 70 m |

Table A 12 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.06 km ² | 140 m | 130 m | 140 m | 0.06 km ² | 140 m | 130 m | 140 m |
| | 218 dB (PCW) | 0.01 km ² | 50 m | < 50 m | < 50 m | 0.01 km ² | 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | 0.01 km ² | 60 m | 50 m | 60 m | 0.01 km ² | 60 m | 50 m | 60 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 0.29 km ² | 320 m | 300 m | 310 m | 0.33 km ² | 330 m | 320 m | 330 m |
| | 212 dB (PCW) | 0.01 km ² | 70 m | 60 m | 70 m | 0.01 km ² | 70 m | 60 m | 70 m |

Table A 13 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.02 km ² | 90 m | 80 m | 90 m | 0.02 km ² | 80 m | 70 m | 80 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.01 km ² | 60 m | 50 m | 60 m | 0.01 km ² | 60 m | 50 m | 60 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 1.6 km ² | 730 m | 720 m | 730 m | 1.3 km ² | 650 m | 630 m | 640 m |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 0.42 km ² | 370 m | 360 m | 370 m | 0.39 km ² | 360 m | 340 m | 350 m |
| | 170 dB (PCW) | 0.02 km ² | 90 m | 80 m | 90 m | 0.02 km ² | 80 m | 70 m | 80 m |

Table A 14 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.02 km ² | 90 m | 80 m | 90 m | 0.02 km ² | 90 m | 80 m | 90 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.01 km ² | 60 m | 50 m | 60 m | 0.01 km ² | 60 m | 50 m | 60 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 1.9 km ² | 790 m | 760 m | 780 m | 2.1 km ² | 840 m | 820 m | 830 m |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 0.44 km ² | 380 m | 370 m | 380 m | 0.46 km ² | 390 m | 380 m | 390 m |
| | 170 dB (PCW) | 0.02 km ² | 90 m | 80 m | 90 m | 0.02 km ² | 90 m | 80 m | 90 m |

Table A 15 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.07 km ² | 150 m | 140 m | 150 m | 0.06 km ² | 140 m | 130 m | 140 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.02 km ² | 80 m | 70 m | 80 m | 0.02 km ² | 80 m | 70 m | 80 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 16 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.07 km ² | 160 m | 140 m | 150 m | 0.08 km ² | 160 m | 150 m | 160 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.02 km ² | 80 m | 70 m | 80 m | 0.02 km ² | 80 m | 70 m | 80 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 17 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|--|--|---|--------|--------|--------|----------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 0.51 km ² | 410 m | 400 m | 410 m | 0.43 km ² | 380 m | 360 m | 370 m |
| Behavioural (174 dB) | | 170 km ² | 8.1 km | 6.9 km | 7.5 km | 130 km ² | 6.9 km | 5.9 km | 6.3 km |

Table A 18 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|--|--|---|--------|--------|--------|----------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 0.58 km ² | 440 m | 420 m | 430 m | 0.65 km ² | 460 m | 450 m | 460 m |
| Behavioural (174 dB) | | 190 km ² | 8.5 km | 7.0 km | 7.7 km | 230 km ² | 9.4 km | 7.6 km | 8.6 km |

Table A 19 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|--|--|---|--------|--------|--------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | | 10 km ² | 1.8 km | 1.8 km | 1.8 km | 8.0 km ² | 1.6 km | 1.6 km | 1.6 km |
| Behavioural (145 dB) | | 350 km ² | 12 km | 9.7 km | 11 km | 250 km ² | 9.8 km | 7.6 km | 8.9 km |

Table A 20 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|--|---|--------|--------|--------|---------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 12 km ² | 2.0 km | 1.9 km | 2.0 km | 14 km ² | 2.1 km | 2.1 km | 2.1 km |
| Behavioural (145 dB) | 360 km ² | 12 km | 9.5 km | 11 km | 480 km ² | 14 km | 10 km | 12 km |

Table A 21 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.04 km ² | 120 m | 110 m | 120 m | 0.04 km ² | 110 m | 110 m | 110 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 0.25 km ² | 280 m | 280 m | 280 m | 0.21 km ² | 260 m | 260 m | 260 m |
| | 212 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 22 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.04 km ² | 120 m | 120 m | 120 m | 0.05 km ² | 130 m | 120 m | 130 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 0.27 km ² | 300 m | 290 m | 300 m | 0.3 km ² | 310 m | 310 m | 310 m |
| | 212 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 23 Summary of the first strike impact ranges from worst case pin pile modelling at the DEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.02 km ² | 70 m | 70 m | 70 m | < 0.01 km ² | 70 m | 60 m | 70 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | < 0.01 km ² | 50 m | 50 m | 50 m | < 0.01 km ² | 50 m | 50 m | 50 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 1.5 km ² | 700 m | 700 m | 700 m | 1.2 km ² | 630 m | 610 m | 620 m |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 0.4 km ² | 360 m | 360 m | 360 m | 0.36 km ² | 340 m | 340 m | 340 m |
| | 170 dB (PCW) | 0.02 km ² | 80 m | 70 m | 70 m | 0.02 km ² | 70 m | 70 m | 70 m |

Table A 24 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.02 km ² | 70 m | 70 m | 70 m | 0.02 km ² | 80 m | 80 m | 80 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | < 0.01 km ² | 50 m | 50 m | 50 m | < 0.01 km ² | 50 m | 50 m | 50 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 1.8 km ² | 760 m | 740 m | 750 m | 2.0 km ² | 810 m | 800 m | 800 m |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 0.43 km ² | 370 m | 370 m | 370 m | 0.45 km ² | 380 m | 380 m | 380 m |
| | 170 dB (PCW) | 0.02 km ² | 80 m | 80 m | 80 m | 0.02 km ² | 80 m | 80 m | 80 m |

Table A 25 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.05 km ² | 130 m | 130 m | 130 m | 0.04 km ² | 120 m | 120 m | 120 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | < 0.01 km ² | 70 m | 60 m | 70 m | < 0.01 km ² | 60 m | 60 m | 60 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 26 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|--------------|---|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.06 km ² | 140 m | 140 m | 140 m | 0.07 km ² | 150 m | 150 m | 150 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | < 0.01 km ² | 70 m | 70 m | 70 m | < 0.01 km ² | 70 m | 70 m | 70 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 27 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|--|--|---|--------|--------|--------|----------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 0.51 km ² | 410 m | 400 m | 410 m | 0.42 km ² | 370 m | 360 m | 370 m |
| Behavioural (174 dB) | | 170 km ² | 8.0 km | 6.9 km | 7.4 km | 120 km ² | 6.9 km | 5.8 km | 6.3 km |

Table A 28 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|--|---|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | 0.56 km ² | 430 m | 420 m | 430 m | 0.62 km ² | 450 m | 440 m | 450 m |
| Behavioural (174 dB) | 180 km ² | 8.5 km | 7.0 km | 7.6 km | 230 km ² | 9.3 km | 7.6 km | 8.5 km |

Table A 29 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|--|---|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 7.6 km ² | 1.6 km | 1.5 km | 1.6 km | 9.8 km ² | 1.8 km | 1.7 km | 1.8 km |
| Behavioural (145 dB) | 240 km ² | 9.7 km | 7.5 km | 8.8 km | 340 km ² | 11 km | 9.6 km | 10 km |

Table A 30 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|--|---|--------|--------|--------|---------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | 11 km ² | 2.0 km | 1.8 km | 1.9 km | 13 km ² | 2.1 km | 2.0 km | 2.0 km |
| Behavioural (145 dB) | 350 km ² | 12 km | 9.4 km | 11 km | 470 km ² | 14 km | 10 km | 12 km |

Table A 31 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

Full energy

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | Worst case monopiles (full energy) | | | | | | | | |
|---|------------------------------------|------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.38 km ² | 350 m | 350 m | 350 m | 0.31 km ² | 320 m | 310 m | 320 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.1 km ² | 180 m | 180 m | 180 m | 0.1 km ² | 180 m | 170 m | 180 m |
| TTS (Impulsive) | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 168 dB (LF) | 22 km ² | 2.7 km | 2.6 km | 2.7 km | 17 km ² | 2.4 km | 2.2 km | 2.3 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 4.7 km ² | 1.2 km | 1.2 km | 1.2 km | 4.2 km ² | 1.2 km | 1.1 km | 1.2 km |
| | 170 dB (PCW) | 0.11 km ² | 190 m | 190 m | 190 m | 0.1 km ² | 180 m | 180 m | 180 m |

Table A 32 Summary of the full energy single strike impact ranges from worst case monopile modelling at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | Worst case monopiles (full energy) | | | | | | | | |
|---|------------------------------------|------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.43 km ² | 370 m | 370 m | 370 m | 0.48 km ² | 390 m | 390 m | 390 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.11 km ² | 190 m | 190 m | 190 m | 0.11 km ² | 190 m | 190 m | 190 m |
| TTS (Impulsive) | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 168 dB (LF) | 26 km ² | 3.0 km | 2.8 km | 2.9 km | 30 km ² | 3.1 km | 3.1 km | 3.1 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 5.1 km ² | 1.3 km | 1.3 km | 1.3 km | 5.5 km ² | 1.3 km | 1.3 km | 1.3 km |
| | 170 dB (PCW) | 0.12 km ² | 200 m | 200 m | 200 m | 0.13 km ² | 210 m | 200 m | 210 m |

Table A 33 Summary of the full energy single strike impact ranges from worst case monopile modelling at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case monopiles (full energy) | | | | | | | |
|---|--------------|------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 1.3 km ² | 640 m | 630 m | 630 m | 1.0 km ² | 570 m | 560 m | 570 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.18 km ² | 240 m | 240 m | 240 m | 0.16 km ² | 230 m | 230 m | 230 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 34 Summary of the full energy single strike impact ranges from worst case monopile modelling at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case monopiles (full energy) | | | | | | | |
|---|--------------|------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 1.4 km ² | 680 m | 670 m | 680 m | 1.6 km ² | 720 m | 720 m | 720 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.18 km ² | 240 m | 240 m | 240 m | 0.19 km ² | 250 m | 250 m | 250 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 35 Summary of the full energy single strike impact ranges from worst case monopile modelling at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (4.0 m) (full energy) | | | | | | | |
|---|--------------|--|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.39 km ² | 360 m | 350 m | 360 m | 0.22 km ² | 270 m | 260 m | 270 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.14 km ² | 220 m | 210 m | 220 m | 0.13 km ² | 210 m | 200 m | 210 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 23 km ² | 2.8 km | 2.6 km | 2.7 km | 12 km ² | 2.0 km | 1.9 km | 2.0 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 3.6 km ² | 1.1 km | 1.1 km | 1.1 km | 3.2 km ² | 1.0 km | 990 m | 1.0 km |
| | 170 dB (PCW) | 0.11 km ² | 190 m | 180 m | 190 m | 0.09 km ² | 170 m | 160 m | 170 m |

Table A 36 Summary of the full energy single strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (4.0 m) (full energy) | | | | | | | |
|---|--------------|--|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.29 km ² | 310 m | 300 m | 310 m | 0.33 km ² | 330 m | 320 m | 330 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.14 km ² | 220 m | 210 m | 220 m | 0.16 km ² | 230 m | 220 m | 230 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 19 km ² | 2.6 km | 2.4 km | 2.5 km | 22 km ² | 2.7 km | 2.6 km | 2.7 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 3.9 km ² | 1.1 km | 1.1 km | 1.1 km | 4.2 km ² | 1.2 km | 1.2 km | 1.2 km |
| | 170 dB (PCW) | 0.11 km ² | 190 m | 180 m | 190 m | 0.12 km ² | 200 m | 190 m | 200 m |

Table A 37 Summary of the full energy single strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (4.0 m) (full energy) | | | | | | | |
|---|--------------|--|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 1.3 km ² | 650 m | 640 m | 650 m | 0.69 km ² | 480 m | 460 m | 470 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 1.1 km ² | 590 m | 580 m | 590 m | 0.96 km ² | 560 m | 540 m | 550 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | 0.01 km ² | 50 m | < 50 m | < 50 m |

Table A 38 Summary of the full energy single strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (4.0 m) (full energy) | | | | | | | |
|---|--------------|--|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.98 km ² | 570 m | 550 m | 560 m | 1.1 km ² | 600 m | 590 m | 600 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 1.1 km ² | 610 m | 590 m | 600 m | 1.2 km ² | 630 m | 620 m | 620 m |
| | 181 dB (PCW) | 0.01 km ² | 50 m | < 50 m | < 50 m | 0.01 km ² | 50 m | < 50 m | < 50 m |

Table A 39 Summary of the full energy single strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (3.5 m) (full energy) | | | | | | | |
|---|--------------|--|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.24 km ² | 280 m | 270 m | 280 m | 0.19 km ² | 250 m | 250 m | 250 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.08 km ² | 160 m | 160 m | 160 m | 0.07 km ² | 150 m | 150 m | 150 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 16 km ² | 2.3 km | 2.2 km | 2.2 km | 12 km ² | 2.0 km | 1.9 km | 1.9 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 3.6 km ² | 1.1 km | 1.1 km | 1.1 km | 3.1 km ² | 1.0 km | 990 m | 1.0 km |
| | 170 dB (PCW) | 0.09 km ² | 170 m | 170 m | 170 m | 0.08 km ² | 160 m | 160 m | 160 m |

Table A 40 Summary of the full energy single strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (3.5 m) (full energy) | | | | | | | |
|---|--------------|--|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.27 km ² | 290 m | 290 m | 290 m | 0.3 km ² | 310 m | 310 m | 310 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.08 km ² | 160 m | 160 m | 160 m | 0.08 km ² | 160 m | 160 m | 160 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 18 km ² | 2.5 km | 2.3 km | 2.4 km | 21 km ² | 2.6 km | 2.6 km | 2.6 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 3.8 km ² | 1.1 km | 1.1 km | 1.1 km | 4.1 km ² | 1.2 km | 1.1 km | 1.1 km |
| | 170 dB (PCW) | 0.1 km ² | 180 m | 180 m | 180 m | 0.11 km ² | 190 m | 190 m | 190 m |

Table A 41 Summary of the full energy single strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (3.5 m) (full energy) | | | | | | | |
|---|--------------|--|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.79 km ² | 500 m | 500 m | 500 m | 0.63 km ² | 450 m | 450 m | 450 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.13 km ² | 200 m | 200 m | 200 m | 0.12 km ² | 200 m | 190 m | 200 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 42 Summary of the full energy single strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Worst case pin piles (3.5 m) (full energy) | | | | | | | |
|---|--------------|--|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.9 km ² | 540 m | 530 m | 540 m | 1.0 km ² | 580 m | 570 m | 570 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.14 km ² | 210 m | 210 m | 210 m | 0.14 km ² | 210 m | 210 m | 210 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 43 Summary of the full energy single strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

A.1.2 Fish

First strike

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | | Worst case monopiles (first strike) | | | | | | | |
|---|--|-------------------------------------|-------|-------|-------|------------------------|-------|-------|-------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | | < 0.01 km ² | 50 m | 50 m | 50 m | < 0.01 km ² | 50 m | 50 m | 50 m |
| 207 dB | | 0.05 km ² | 130 m | 130 m | 130 m | 0.04 km ² | 120 m | 120 m | 120 m |

Table A 44 Summary of the first strike impact ranges from worst case monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | | Worst case monopiles (first strike) | | | | | | | |
|---|--|-------------------------------------|-------|-------|-------|------------------------|-------|-------|-------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | | < 0.01 km ² | 50 m | 50 m | 50 m | < 0.01 km ² | 60 m | 50 m | 60 m |
| 207 dB | | 0.05 km ² | 130 m | 130 m | 130 m | 0.06 km ² | 140 m | 140 m | 140 m |

Table A 45 Summary of the first strike impact ranges from worst case monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case monopiles (first strike) | | | | | | | |
|---|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.1 km ² | 180 m | 180 m | 180 m | 0.08 km ² | 160 m | 160 m | 160 m |

Table A 46 Summary of the first strike impact ranges from worst case monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case monopiles (first strike) | | | | | | | |
|---|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.11 km ² | 190 m | 180 m | 190 m | 0.12 km ² | 190 m | 190 m | 190 m |

Table A 47 Summary of the first strike impact ranges from worst case monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case monopiles (first strike) | | | | | | | |
|--|-------------------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 160 km ² | 7.8 km | 6.7 km | 7.2 km | 120 km ² | 6.7 km | 5.7 km | 6.2 km |
| 168 (SPL _{peak}) | 310 km ² | 11 km | 9.1 km | 9.9 km | 220 km ² | 9.3 km | 7.3 km | 8.4 km |
| 163 dB (SPL _{peak-to-peak}) | 860 km ² | 20 km | 14 km | 17 km | 620 km ² | 16 km | 10 km | 14 km |
| 142 dB (SEL _{ss}) | 830 km ² | 19 km | 14 km | 16 km | 600 km ² | 16 km | 10 km | 14 km |
| 135 (SEL _{ss}) | 1500 km ² | 27 km | 18 km | 21 km | 1000 km ² | 22 km | 12 km | 18 km |

Table A 48 Summary of the first strike impact ranges from worst case monopile modelling at the SEP site using the Hawkins *et al.* (2014) observed levels for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case monopiles (first strike) | | | | | | | |
|--|-------------------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 170 km ² | 8.3 km | 6.8 km | 7.5 km | 220 km ² | 9.1 km | 7.5 km | 8.3 km |
| 168 (SPL _{peak}) | 320 km ² | 11 km | 9.0 km | 10 km | 410 km ² | 13 km | 9.6 km | 11 km |
| 163 dB (SPL _{peak-to-peak}) | 880 km ² | 20 km | 12 km | 17 km | 1200 km ² | 23 km | 15 km | 19 km |
| 142 dB (SEL _{ss}) | 850 km ² | 20 km | 12 km | 16 km | 1100 km ² | 23 km | 15 km | 19 km |
| 135 (SEL _{ss}) | 1500 km ² | 27 km | 15 km | 22 km | 2000 km ² | 32 km | 20 km | 25 km |

Table A 49 Summary of the first strike impact ranges from worst case monopile modelling at the DEP site using the Hawkins *et al.* (2014) observed levels for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|---|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | 0.01 km ² | 70 m | 60 m | 70 m | 0.01 km ² | 70 m | 60 m | 70 m |

Table A 50 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|---|--------|--------|--------|------------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | 0.01 km ² | 70 m | 60 m | 70 m | 0.01 km ² | 70 m | 60 m | 70 m |

Table A 51 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|---|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.02 km ² | 90 m | 80 m | 90 m | 0.02 km ² | 90 m | 80 m | 90 m |

Table A 52 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|---|---|--------|--------|--------|------------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.03 km ² | 100 m | 90 m | 100 m | 0.03 km ² | 100 m | 90 m | 100 m |

Table A 53 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|--|---|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 69 km ² | 5.0 km | 4.5 km | 4.7 km | 51 km ² | 4.3 km | 3.8 km | 4.1 km |
| 168 (SPL _{peak}) | 150 km ² | 7.5 km | 6.5 km | 7.0 km | 110 km ² | 6.4 km | 5.5 km | 5.9 km |
| 163 dB (SPL _{peak-to-peak}) | 540 km ² | 15 km | 11 km | 13 km | 390 km ² | 12 km | 8.8 km | 11 km |
| 142 dB (SEL _{ss}) | 490 km ² | 14 km | 11 km | 13 km | 350 km ² | 12 km | 8.5 km | 11 km |
| 135 (SEL _{ss}) | 970 km ² | 21 km | 15 km | 18 km | 690 km ² | 17 km | 10 km | 15 km |

Table A 54 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Hawkins *et al.* (2014) observed levels for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case pin piles (4.0 m) (first strike) | | | | | | | |
|--|---|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 78 km ² | 5.4 km | 4.7 km | 5.0 km | 91 km ² | 5.7 km | 5.2 km | 5.4 km |
| 168 (SPL _{peak}) | 160 km ² | 8.0 km | 6.6 km | 7.2 km | 200 km ² | 8.7 km | 7.3 km | 8.0 km |
| 163 dB (SPL _{peak-to-peak}) | 550 km ² | 15 km | 11 km | 13 km | 730 km ² | 18 km | 13 km | 15 km |
| 142 dB (SEL _{ss}) | 510 km ² | 15 km | 11 km | 13 km | 670 km ² | 17 km | 12 km | 15 km |
| 135 (SEL _{ss}) | 990 km ² | 22 km | 13 km | 18 km | 1300 km ² | 25 km | 16 km | 21 km |

Table A 55 Summary of the first strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Hawkins *et al.* (2014) observed levels for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|---|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | 60 m | 50 m | 60 m | < 0.01 km ² | 50 m | 50 m | 50 m |

Table A 56 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|---|--------|--------|--------|------------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | 60 m | 60 m | 60 m | < 0.01 km ² | 60 m | 60 m | 60 m |

Table A 57 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|---|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.02 km ² | 80 m | 80 m | 80 m | 0.02 km ² | 70 m | 70 m | 70 m |

Table A 58 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|---|---|--------|--------|--------|------------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.02 km ² | 80 m | 80 m | 80 m | 0.02 km ² | 80 m | 80 m | 80 m |

Table A 59 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|--|---|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 68 km ² | 4.9 km | 4.5 km | 4.7 km | 50 km ² | 4.3 km | 3.8 km | 4.0 km |
| 168 (SPL _{peak}) | 450 km ² | 7.5 km | 6.4 km | 6.9 km | 110 km ² | 6.4 km | 5.4 km | 5.9 km |
| 163 dB (SPL _{peak-to-peak}) | 530 km ² | 15 km | 11 km | 13 km | 380 km ² | 12 km | 8.7 km | 11 km |
| 142 dB (SEL _{ss}) | 480 km ² | 14 km | 11 km | 12 km | 340 km ² | 12 km | 8.5 km | 10 km |
| 135 (SEL _{ss}) | 950 km ² | 21 km | 15 km | 17 km | 680 km ² | 17 km | 10 km | 15 km |

Table A 60 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Hawkins *et al.* (2014) observed levels for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Worst case pin piles (3.5 m) (first strike) | | | | | | | |
|--|---|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 76 km ² | 5.3 km | 4.7 km | 4.9 km | 89 km ² | 5.6 km | 5.2 km | 5.4 km |
| 168 (SPL _{peak}) | 160 km ² | 8.0 km | 6.5 km | 7.2 km | 200 km ² | 8.6 km | 7.2 km | 7.9 km |
| 163 dB (SPL _{peak-to-peak}) | 550 km ² | 15 km | 11 km | 13 km | 720 km ² | 18 km | 13 km | 15 km |
| 142 dB (SEL _{ss}) | 500 km ² | 15 km | 11 km | 13 km | 660 km ² | 17 km | 12 km | 14 km |
| 135 (SEL _{ss}) | 980 km ² | 21 km | 13 km | 18 km | 1300 km ² | 25 km | 16 km | 20 km |

Table A 61 Summary of the first strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Hawkins *et al.* (2014) observed levels for fish

Full energy

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case monopiles (full energy) | | | | | | | |
|---|------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | 1.1 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 210 km ² | 370 m | 370 m | 370 m | 0.35 km ² | 340 m | 330 m | 340 m |

Table A 62 Summary of the full energy single strike impact ranges from worst case monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case monopiles (full energy) | | | | | | | |
|---|------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.47 km ² | 390 m | 380 m | 390 m | 0.52 km ² | 410 m | 410 m | 410 m |

Table A 63 Summary of the full energy single strike impact ranges from worst case monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case pin piles (4.0 m) (full energy) | | | | | | | |
|---|--|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | 50 m | < 50 m | < 50 m | 0.01 km ² | 50 m | < 50 m | < 50 m |
| 203 dB | 0.01 km ² | 60 m | 50 m | 60 m | 0.01 km ² | 60 m | 50 m | 60 m |
| 186 dB | 0.27 km ² | 300 m | 290 m | 300 m | 0.22 km ² | 270 m | 260 m | 270 m |

Table A 64 Summary of the full energy single strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case pin piles (4.0 m) (full energy) | | | | | | | |
|---|--|-------|--------|--------|------------------------|-------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | 50 m | < 50 m | < 50 m | < 0.01 km ² | 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | 50 m | < 50 m | < 50 m | < 0.01 km ² | 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | 50 m | < 50 m | < 50 m | < 0.01 km ² | 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | 50 m | < 50 m | < 50 m | < 0.01 km ² | 50 m | < 50 m | < 50 m |
| 203 dB | 0.01 km ² | 60 m | 50 m | 60 m | 0.01 km ² | 60 m | < 50 m | < 50 m |
| 186 dB | 0.29 km ² | 310 m | 300 m | 310 m | 0.33 km ² | 330 m | 320 m | 330 m |

Table A 65 Summary of the full energy single strike impact ranges from worst case pin pile modelling (4.0 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case pin piles (3.5 m) (full energy) | | | | | | | |
|---|--|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.23 km ² | 280 m | 270 m | 270 m | 0.19 km ² | 250 m | 250 m | 250 m |

Table A 66 Summary of the full energy single strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the SEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Worst case pin piles (3.5 m) (full energy) | | | | | | | |
|---|--|--------|--------|--------|------------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.26 km ² | 290 m | 290 m | 290 m | 0.29 km ² | 310 m | 310 m | 310 m |

Table A 67 Summary of the full energy single strike impact ranges from worst case pin pile modelling (3.5 m diameter piles) at the DEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

A.2 Most likely parameters

| Table (page) | Parameters | | Criteria | | |
|------------------|------------|-----------------------------|---|--|--|
| Table A 69 (p92) | SEP | Most likely | Monopiles | Unweighted SPL _{peak} (First strike) | |
| Table A 70 (p92) | DEP | | | Weighted SEL _{ss} (impulsive) (First strike) | |
| Table A 71 (p92) | SEP | | | Southall <i>et al.</i> (2019) | Weighted SEL _{ss} (non-impulsive) (First strike) |
| Table A 72 (p92) | DEP | | | | Unweighted SPL _{peak-to-peak} (First strike) |
| Table A 73 (p93) | SEP | | | | Lucke <i>et al.</i> (2009) |
| Table A 74 (p93) | DEP | | | Weighted SEL _{ss} (impulsive) (Full energy) | |
| Table A 75 (p93) | SEP | | | Southall <i>et al.</i> (2019) | Weighted SEL _{ss} (non-impulsive) (Full energy) |
| Table A 76 (p93) | DEP | | | | Popper <i>et al.</i> (2014) |
| Table A 77 (p93) | SEP | | | Hawkins <i>et al.</i> (2014) | |
| Table A 78 (p93) | DEP | | | | Popper <i>et al.</i> (2014) |
| Table A 79 (p94) | SEP | | | Popper <i>et al.</i> (2014) | |
| Table A 80 (p94) | DEP | | | | Popper <i>et al.</i> (2014) |
| Table A 81 (p94) | SEP | | | Popper <i>et al.</i> (2014) | |
| Table A 82 (p95) | DEP | | | | Popper <i>et al.</i> (2014) |
| Table A 83 (p95) | SEP | | | Popper <i>et al.</i> (2014) | |
| Table A 84 (p95) | DEP | | | | Popper <i>et al.</i> (2014) |
| Table A 85 (p95) | SEP | | | Popper <i>et al.</i> (2014) | |
| Table A 86 (p95) | DEP | | | | Popper <i>et al.</i> (2014) |
| Table A 87 (p96) | SEP | | | Popper <i>et al.</i> (2014) | |
| Table A 88 (p96) | DEP | | | | Popper <i>et al.</i> (2014) |
| Table A 89 (p96) | SEP | Popper <i>et al.</i> (2014) | Unweighted SEL _{ss} (Full energy) | | |
| Table A 90 (p96) | DEP | | Popper <i>et al.</i> (2014) | Unweighted SEL _{ss} (Full energy) | |

Table A 68 Summary of the most likely, single strike modelling results tables presented in this section

A.2.1 Marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Most likely monopiles (first strike) | | | | | | | |
|---|--------------|--------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.1 km ² | 180 m | 180 m | 180 m | 0.09 km ² | 170 m | 170 m | 170 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 0.59 km ² | 440 m | 440 m | 440 m | 0.5 km ² | 400 m | 400 m | 400 m |
| | 212 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 69 Summary of the first strike impact ranges from most likely monopile modelling at the SEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Unweighted SPL _{peak} | | Most likely monopiles (first strike) | | | | | | | |
|---|--------------|--------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS | 219 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 230 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 202 dB (VHF) | 0.11 km ² | 190 m | 190 m | 190 m | 0.12 km ² | 200 m | 200 m | 200 m |
| | 218 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS | 213 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 224 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 196 dB (VHF) | 0.66 km ² | 460 m | 460 m | 460 m | 0.73 km ² | 490 m | 480 m | 480 m |
| | 212 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 70 Summary of the first strike impact ranges from most likely monopile modelling at the DEP site using the Southall *et al.* (2019) unweighted SPL_{peak} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Most likely monopiles (first strike) | | | | | | | |
|---|--------------|--------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.04 km ² | 110 m | 110 m | 110 m | 0.03 km ² | 100 m | 100 m | 100 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | < 0.01 km ² | 70 m | 70 m | 70 m | < 0.01 km ² | 70 m | 70 m | 70 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 3.5 km ² | 1.1 km | 1.1 km | 1.1 km | 2.8 km ² | 960 m | 930 m | 960 m |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 0.76 km ² | 490 m | 490 m | 490 m | 0.68 km ² | 470 m | 460 m | 470 m |
| | 170 dB (PCW) | 0.03 km ² | 100 m | 100 m | 100 m | 0.03 km ² | 100 m | 90 m | 100 m |

Table A 71 Summary of the first strike impact ranges from most likely monopile modelling at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Most likely monopiles (first strike) | | | | | | | |
|---|--------------|--------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.04 km ² | 120 m | 120 m | 120 m | 0.05 km ² | 120 m | 120 m | 120 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.02 km ² | 70 m | 70 m | 70 m | 0.02 km ² | 70 m | 70 m | 70 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 4.1 km ² | 1.2 km | 1.1 km | 1.1 km | 4.7 km ² | 1.2 km | 1.2 km | 1.2 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 0.8 km ² | 510 m | 510 m | 510 m | 0.85 km ² | 520 m | 520 m | 520 m |
| | 170 dB (PCW) | 0.03 km ² | 110 m | 100 m | 100 m | 0.04 km ² | 110 m | 110 m | 110 m |

Table A 72 Summary of the first strike impact ranges from most likely monopile modelling at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Most likely monopiles (first strike) | | | | | | | |
|---|--------------|--------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.14 km ² | 210 m | 210 m | 210 m | 0.11 km ² | 190 m | 190 m | 190 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.02 km ² | 90 m | 90 m | 90 m | 0.02 km ² | 90 m | 90 m | 90 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 73 Summary of the first strike impact ranges from most likely monopile modelling at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Most likely monopiles (first strike) | | | | | | | |
|---|--------------|--------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 0.15 km ² | 220 m | 220 m | 220 m | 0.17 km ² | 230 m | 230 m | 230 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.03 km ² | 90 m | 90 m | 90 m | 0.03 km ² | 90 m | 90 m | 90 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 74 Summary of the first strike impact ranges from most likely monopile modelling at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Most likely monopiles (first strike) | | | | | | | |
|--|--|--------------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 1.2 km ² | 620 m | 610 m | 620 m | 1.0 km ² | 570 m | 550 m | 560 m |
| Behavioural (174 dB) | | 250 km ² | 9.9 km | 8.3 km | 9.0 km | 180 km ² | 8.5 km | 6.8 km | 7.6 km |

Table A 75 Summary of the first strike impact ranges from most likely monopile modelling at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SPL _{peak-to-peak} | | Most likely monopiles (first strike) | | | | | | | |
|--|--|--------------------------------------|-------|--------|--------|---------------------|-------|--------|-------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (199.7 dB) | | 1.3 km ² | 660 m | 640 m | 650 m | 1.5 km ² | 690 m | 680 m | 690 m |
| Behavioural (174 dB) | | 270 km ² | 10 km | 8.4 km | 9.2 km | 340 km ² | 12 km | 8.8 km | 10 km |

Table A 76 Summary of the first strike impact ranges from most likely monopile modelling at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | | Most likely monopiles (first strike) | | | | | | | |
|--|--|--------------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | | 16 km ² | 2.3 km | 2.2 km | 2.2 km | 20 km ² | 2.6 km | 2.5 km | 2.5 km |
| Behavioural (145 dB) | | 350 km ² | 12 km | 8.5 k | 11 km | 480 km ² | 14 km | 11 km | 12 km |

Table A 77 Summary of the first strike impact ranges from most likely monopile modelling at the SEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

| Lucke <i>et al.</i> (2009) Unweighted SEL _{ss} | | Most likely monopiles (first strike) | | | | | | | |
|--|--|--------------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| TTS (164.3 dB) | | 23 km ² | 2.9 km | 2.6 km | 2.7 km | 27 km ² | 3.0 km | 2.9 km | 2.9 km |
| Behavioural (145 dB) | | 500 km ² | 15 km | 11 km | 13 km | 660 km ² | 17 km | 12 km | 14 km |

Table A 78 Summary of the first strike impact ranges from most likely monopile modelling at the DEP site using the Lucke *et al.* (2009) unweighted SPL_{peak-to-peak} criteria for harbour porpoise

Full energy

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Most likely monopiles (full energy) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.35 km ² | 330 m | 330 m | 330 m | 0.28 km ² | 300 m | 300 m | 300 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.1 km ² | 180 m | 170 m | 180 m | 0.09 km ² | 170 m | 170 m | 170 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 21 km ² | 2.6 km | 2.5 km | 2.6 km | 16 km ² | 2.3 km | 2.2 km | 2.2 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 4.4 km ² | 1.2 km | 1.2 km | 1.2 km | 3.8 km ² | 1.1 km | 1.1 km | 1.1 km |
| | 170 dB (PCW) | < 0.01 km ² | 190 m | 190 m | 190 m | 0.09 km ² | 170 m | 170 m | 170 m |

Table A 79 Summary of the full energy single strike impact ranges from most likely monopile modelling at the SEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Most likely monopiles (full energy) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Impulsive) | 183 dB (LF) | 0.39 km ² | 360 m | 350 m | 350 m | 0.43 km ² | 370 m | 370 m | 370 m |
| | 185 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 155 dB (VHF) | 0.1 km ² | 180 m | 180 m | 180 m | 0.1 km ² | 180 m | 180 m | 180 m |
| | 185 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Impulsive) | 168 dB (LF) | 24 km ² | 2.9 km | 2.7 km | 2.8 km | 28 km ² | 3.0 km | 2.9 km | 3.0 km |
| | 170 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 140 dB (VHF) | 4.7 km ² | 1.2 km | 1.2 km | 1.2 km | 5.1 km ² | 1.3 km | 1.3 km | 1.3 km |
| | 170 dB (PCW) | 0.12 km ² | 200 m | 190 m | 190 m | 0.13 km ² | 200 m | 200 m | 200 m |

Table A 80 Summary of the full energy single strike impact ranges from most likely monopile modelling at the DEP site using the impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Most likely monopiles (full energy) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 1.1 km ² | 610 m | 600 m | 610 m | 0.92 km ² | 550 m | 540 m | 540 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.16 km ² | 230 m | 230 m | 230 m | 0.15 km ² | 220 m | 220 m | 220 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 81 Summary of the full energy single strike impact ranges from most likely monopile modelling at the SEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

| Southall <i>et al.</i> (2019) Weighted SEL _{ss} | | Most likely monopiles (full energy) | | | | | | | |
|---|--------------|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| PTS (Non-impulsive) | 199 dB (LF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 198 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 173 dB (VHF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 201 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| TTS (Non-impulsive) | 179 dB (LF) | 1.3 km ² | 650 m | 640 m | 650 m | 1.5 km ² | 690 m | 680 m | 690 m |
| | 178 dB (HF) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| | 153 dB (VHF) | 0.17 km ² | 230 m | 230 m | 230 m | 0.18 km ² | 240 m | 240 m | 240 m |
| | 181 dB (PCW) | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |

Table A 82 Summary of the full energy single strike impact ranges from most likely monopile modelling at the DEP site using the non-impulsive Southall *et al.* (2019) weighted SEL_{ss} criteria for marine mammals

A.2.2 Fish

First strike

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | | Most likely monopiles (first strike) | | | | | | | |
|---|------------------------|--------------------------------------|--------|--------|------------------------|--------|--------|--------|------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 207 dB | 0.02 km ² | 90 m | 90 m | 90 m | 0.02 km ² | 80 m | 80 m | 80 m | |

Table A 83 Summary of the first strike impact ranges from most likely monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SPL _{peak} | | Most likely monopiles (first strike) | | | | | | | |
|---|------------------------|--------------------------------------|--------|--------|------------------------|--------|--------|--------|------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 213 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 207 dB | 0.02 km ² | 90 m | 90 m | 90 m | 0.03 km ² | 90 m | 90 m | 90 m | |

Table A 84 Summary of the first strike impact ranges from most likely monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SPL_{peak} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | | Most likely monopiles (first strike) | | | | | | | |
|---|------------------------|--------------------------------------|--------|--------|------------------------|--------|--------|--------|------|
| | | SEP E | | | | SEP N | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 186 dB | 0.05 km ² | 120 m | 120 m | 120 m | 0.04 km ² | 110 m | 110 m | 110 m | |

Table A 85 Summary of the first strike impact ranges from most likely monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | | Most likely monopiles (first strike) | | | | | | | |
|---|------------------------|--------------------------------------|--------|--------|------------------------|--------|--------|--------|------|
| | | DEP NE | | | | DEP SE | | | |
| | | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m | |
| 186 dB | 0.05 km ² | 130 m | 130 m | 130 m | 0.05 km ² | 130 m | 130 m | 130 m | |

Table A 86 Summary of the first strike impact ranges from most likely monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Most likely monopiles (first strike) | | | | | | | |
|--|--------------------------------------|--------|--------|--------|---------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 110 km ² | 6.4 km | 5.6 km | 6.0 km | 82 km ² | 5.5 km | 4.8 km | 5.1 km |
| 168 (SPL _{peak}) | 220 km ² | 9.3 km | 7.8 km | 8.5 km | 160 km ² | 7.9 km | 6.5 km | 7.2 km |
| 163 dB (SPL _{peak-to-peak}) | 700 km ² | 17 km | 13 km | 15 km | 500 km ² | 14 km | 9.4 km | 13 km |
| 142 dB (SEL _{ss}) | 660 km ² | 17 km | 13 km | 14 km | 480 km ² | 14 km | 9.4 km | 12 km |
| 135 (SEL _{ss}) | 1200 km ² | 25 km | 17 km | 20 km | 870 km ² | 19 km | 11 km | 17 km |

Table A 87 Summary of the first strike impact ranges from most likely monopile modelling at the SEP site using the Hawkins *et al.* (2014) observed levels for fish

| Hawkins <i>et al.</i> (2014) Unweighted | Most likely monopiles (first strike) | | | | | | | |
|--|--------------------------------------|--------|--------|--------|----------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 173 (SPL _{peak}) | 120 km ² | 6.9 km | 5.8 km | 6.2 km | 150 km ² | 7.3 km | 6.5 km | 6.8 km |
| 168 (SPL _{peak}) | 240 km ² | 9.5 km | 8.0 km | 8.7 km | 300 km ² | 11 km | 8.4 km | 9.8 km |
| 163 dB (SPL _{peak-to-peak}) | 710 km ² | 18 km | 12 km | 15 km | 950 km ² | 21 km | 14 km | 17 km |
| 142 dB (SEL _{ss}) | 680 km ² | 17 km | 11 km | 15 km | 900 km ² | 20 km | 14 km | 17 km |
| 135 (SEL _{ss}) | 1200 km ² | 25 km | 14 km | 20 km | 1700 km ² | 29 km | 18 km | 23 km |

Table A 88 Summary of the first strike impact ranges from most likely monopile modelling at the DEP site using the Hawkins *et al.* (2014) observed levels for fish

Full energy

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Most likely monopiles (full energy) | | | | | | | |
|---|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | SEP E | | | | SEP N | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.38 km ² | 350 m | 350 m | 350 m | 0.32 km ² | 320 m | 320 m | 320 m |

Table A 89 Summary of the full energy single strike impact ranges from most likely monopile modelling at the SEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

| Popper <i>et al.</i> (2014) Unweighted SEL _{ss} | Most likely monopiles (full energy) | | | | | | | |
|---|-------------------------------------|--------|--------|--------|------------------------|--------|--------|--------|
| | DEP NE | | | | DEP SE | | | |
| | Area | Max | Min | Mean | Area | Max | Min | Mean |
| 219 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 216 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 210 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 207 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 203 dB | < 0.01 km ² | < 50 m | < 50 m | < 50 m | < 0.01 km ² | < 50 m | < 50 m | < 50 m |
| 186 dB | 0.42 km ² | 370 m | 360 m | 370 m | 0.46 km ² | 390 m | 390 m | 390 m |

Table A 90 Summary of the full energy single strike impact ranges from most likely monopile modelling at the DEP site using the Popper *et al.* (2014) unweighted SEL_{ss} criteria for fish

Report documentation page

- This is a controlled document.
- Additional copies should be obtained through the Subacoustech Environmental librarian.
- If copied locally, each document must be marked “Uncontrolled copy”.
- Amendment shall be by whole document replacement.
- Proposals for change to this document should be forwarded to Subacoustech Environmental.

| Document No. | Draft | Date | Details of change |
|--------------|-------|------------|--|
| P272R0300 | 02 | 13/11/2020 | Initial writing and internal review. |
| E272R0301 | 02 | 23/12/2020 | First issue to client. |
| E272R0302 | 01 | 12/02/2021 | Re-modelling using INSPIRE version 5.1. |
| E272R0303 | 01 | 23/02/2021 | Addition of Lucke <i>et al.</i> (2009) criteria. |
| E272R0304 | 02 | 25/02/2021 | Minor amendments following client review. |
| E272R0305 | 01 | 04/11/2021 | Inclusion of 4 m diameter pin pile modelling, Hawkins <i>et al.</i> (2014) criteria, simultaneous piling modelling, sequential piling modelling, updated UXO modelling, updated operational WTG modelling, longer duration SPEAR modelling, a baseline noise level summary, and other amendments following review. |
| E272R0306 | - | 01/12/2021 | Minor updates following client review. |

| | |
|--|---|
| Originator's current report number | P272R0306 |
| Originator's name and location | R Barham; Subacoustech Environmental Ltd. |
| Contract number and period covered | P272; June 2020 – December 2021 |
| Sponsor's name and location | Magnus Eriksen; Equinor |
| Report classification and caveats in use | COMMERCIAL IN CONFIDENCE |
| Date written | November 2020 – December 2021 |
| Pagination | Cover + iii + 97 |
| References | 0 |
| Report title | Sheringham Extension Project and Dudgeon Extension Project: Underwater noise assessment |
| Translation/Conference details (if translation, give foreign title/if part of a conference, give conference particulars) | |
| Title classification | Unclassified |
| Author(s) | Richard Barham, Tim Mason |
| Descriptors/keywords | |
| Abstract | |
| Abstract classification | Unclassified; Unlimited distribution |