



MORGAN AND MORECAMBE OFFSHORE WIND FARMS: TRANSMISSION ASSETS

Environmental Statement

Volume 2, Annex 1.1: Physical processes associated modelling studies – Part 2 of 2



September 2024
Rev: ES Issue

MOR001-FLO-CON-ENV-RPT-0031
MRCNS-J3303-RPS-10002

PINS Reference: EN020028
APFP Regulations: 5(2)(a)
Document reference: F2.1.1

Document status					
Version	Purpose of document	Approved by	Date	Approved by	Date
ES	For issue	AS	September 2024	IM	September 2024

The report has been prepared for the exclusive use and benefit of the Applicants and solely for the purpose for which it is provided. Unless otherwise agreed in writing by RPS Group Plc, any of its subsidiaries, or a related entity (collectively 'RPS') no part of this report should be reproduced, distributed or communicated to any third party. RPS does not accept any liability if this report is used for an alternative purpose from which it is intended, nor to any third party in respect of this report. The report does not account for any changes relating to the subject matter of the report, or any legislative or regulatory changes that have occurred since the report was produced and that may affect the report.

The report has been prepared using the information provided to RPS by its client, or others on behalf of its client. To the fullest extent permitted by law, RPS shall not be liable for any loss or damage suffered by the client arising from fraud, misrepresentation, withholding of information material relevant to the report or required by RPS, or other default relating to such information, whether on the client's part or that of the other information sources, unless such fraud, misrepresentation, withholding or such other default is evident to RPS without further enquiry. It is expressly stated that no independent verification of any documents or information supplied by the client or others on behalf of the client has been made. The report shall be used for general information only.

Prepared by:

RPS

Prepared for:

**Morgan Offshore Wind Limited
Morecambe Offshore Windfarm Ltd**

1.3 **Morgan Offshore Wind Project: Generation Assets, Environmental Statement, Volume 4, Annex 1.1: Physical Processes Technical Report**

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Environmental Statement

Volume 4, Annex 1.1: Physical processes technical report

Planning Inspectorate Reference Number: EN010136

Document Number: MRCNS-J3303-RPS-10063

Document Reference: F4.1.1

APFP Regulations: 5(2)(a)

April 2024

F01



MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Document status

Version	Purpose of document	Authored by	Reviewed by	Approved by	Review date
F01	Application	RPS	Morgan Offshore Wind Ltd.	Morgan Offshore Wind Ltd.	April 2024

Prepared by:

RPS

Prepared for:

Morgan Offshore Wind Ltd.

Contents

1	PHYSICAL PROCESSES TECHNICAL REPORT	1
1.1	Introduction	1
1.2	Study area	2
1.3	Modelling in support of the PEIR	4
1.3.1	Overview	4
1.3.2	Methodology	4
1.3.3	Desktop study.....	8
1.3.4	Site-specific surveys.....	9
1.3.5	Baseline environment.....	10
1.3.6	Potential environmental changes (as presented in the PEIR)	68
1.3.7	Potential changes during construction (as presented in the PEIR)	104
1.4	Modelling to support the Environmental Statement.....	171
1.4.1	Overview	171
1.4.2	Suction bucket foundations	173
1.4.3	Conical gravity base foundations	195
1.4.4	Rectangular gravity base foundations.....	217
1.5	Summary	240
1.6	References	241

Tables

Table 1.1:	MIKE suite of models.....	5
Table 1.2:	Summary of modelled environmental variation scenarios for PEIR.....	6
Table 1.3:	Summary of key resources.....	8
Table 1.4:	Summary of survey undertaken to inform physical processes.....	9
Table 1.5:	Tidal levels at Standard Ports.....	16
Table 1.6:	Summary of modelled environmental variation scenarios for the Environmental Statement....	172

Figures

Figure 1.1:	Physical processes study area.....	3
Figure 1.2:	Model domain (blue outline).....	7
Figure 1.3:	MEDIN bathymetric data coverage.....	12
Figure 1.4:	Morgan and Mona Scoping Array bathymetric survey data coverage – Source: Gardline (2022) and XOcean (2022).....	13
Figure 1.5:	Model bathymetry in the east Irish Sea with Morgan Potential Array Area and Marine Conservation Zones (MCZ).....	14
Figure 1.6:	Model mesh with section of Morgan Potential Array Area inset.....	15
Figure 1.7:	Extent and bathymetry of Irish Seas model.....	17
Figure 1.8:	Availability of metocean datasets across the east Irish Sea.....	18
Figure 1.9:	Location of calibration data presented.....	19
Figure 1.10:	Comparison of model and admiralty harmonic tide data for Llandudno.....	21
Figure 1.11:	Comparison of model and recorded Morgan Metocean – current speed and direction spring... ..	22
Figure 1.12:	Comparison of model and recorded Morgan Metocean – current speed and direction neap.....	22
Figure 1.13:	Comparison of model and recorded Mona Metocean – current speed and direction spring.....	23
Figure 1.14:	Comparison of model and recorded Mona Metocean – current speed and direction neap.....	23
Figure 1.15:	Comparison of modelled metocean and recorded DA ASG and SIG – current speed and direction spring.....	24
Figure 1.16:	Comparison of modelled Morgan metocean and recorded ASG – spring surface elevation.....	24
Figure 1.17:	Comparison of modelled metocean and recorded DA ASG and SIG DA – current speed and direction neap.....	25
Figure 1.18:	Comparison of modelled Morgan metocean and recorded ASG – neap surface elevation.....	25

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Figure 1.19: Comparison of model and recorded data BODC Location A – current speed and direction spring.	26
Figure 1.20: Comparison of model and recorded data BODC Location A – current speed and direction neap.	26
Figure 1.21: Comparison of model and recorded data BODC Location B – current speed and direction spring.	27
Figure 1.22: Comparison of model and recorded data BODC Location B – current speed and direction neap.	27
Figure 1.23: Comparison of model and recorded data BODC Location C – current speed and direction spring.	28
Figure 1.24: Comparison of model and recorded data BODC Location C – current speed and direction neap.	28
Figure 1.25: Comparison of model and recorded data BODC Location D – current speed and direction spring.	29
Figure 1.26: Comparison of model and recorded data BODC Location D – current speed and direction neap.	29
Figure 1.27: Comparison of model and recorded data BODC Location E – current speed and direction spring.	30
Figure 1.28: Comparison of model and recorded data BODC Location E – current speed and direction neap.	30
Figure 1.29: Tidal flow patterns – neap tide flood.	31
Figure 1.30: Tidal flow patterns – neap tide ebb.	32
Figure 1.31: Tidal flow patterns – spring tide flood.	33
Figure 1.32: Tidal flow patterns – spring tide ebb.	34
Figure 1.33: Wave rose for Morgan Potential Array Area.	36
Figure 1.34: Wind rose for Morgan Potential Array Area.	37
Figure 1.35: Location of wave calibration data presented.	38
Figure 1.36: Validation of modelled mean wave direction with measured data at CIV.	39
Figure 1.37: Validation of modelled significant wave height with measured data at CIV.	39
Figure 1.38: Validation of modelled peak wave period with measured data at CIV.	40
Figure 1.39: Validation of modelled mean wave direction with measured data at GyM.	40
Figure 1.40: Validation of modelled significant wave height with measured data at GyM.	40
Figure 1.41: Validation of modelled peak wave period with measured data at GyM.	41
Figure 1.42: Validation of modelled mean wave direction with measured data at RhF.	41
Figure 1.43: Validation of modelled significant wave height with measured data at RhF.	41
Figure 1.44: Validation of modelled peak wave period with measured data at RhF.	42
Figure 1.45: Wave roses for model boundaries - 22 year ECMWF Dataset and wind rose for 40 year NOAA dataset.	44
Figure 1.46: Wave climate 1 in 1 year storm from 000° MHW.	45
Figure 1.47: Wave climate 1 in 1 year storm from 030° MHW.	46
Figure 1.48: Wave climate 1 in 1 year storm from 210° MHW.	47
Figure 1.49: Wave climate 1 in 1 year storm from 240° MHW.	48
Figure 1.50: Wave climate 1 in 20 year storm from 000° MHW.	49
Figure 1.51: Wave climate 1 in 20 year storm from 030° MHW.	50
Figure 1.52: Wave climate 1 in 20 year storm from 240° MHW.	51
Figure 1.53: Wave climate 1 in 20 year storm from 270° MHW.	52
Figure 1.54: Littoral current 1 in 1 year storm from 210° - Flood Tide.	54
Figure 1.55: Littoral current 1 in 1 year storm from 210° - Ebb Tide.	55
Figure 1.56: Seabed sample data Folk classification - BGS.	57
Figure 1.57: Seabed substrate geology EMODnet and SSS.	58
Figure 1.58: Residual current spring tide.	61
Figure 1.59: Potential sediment transport over the course of one day (two tide cycles).	62
Figure 1.60: Sediment transport – flood tide.	63
Figure 1.61: Sediment transport – ebb tide.	64
Figure 1.62: Residual current spring tide with 1 in 1 year storm from 210°.	65
Figure 1.63: Turbidity levels from the Morgan metocean site.	66
Figure 1.64: Distribution of average non-algal SPM (CEFAS, 2016).	67
Figure 1.65: Modelled array and trenching route indicative layout for PEIR.	69
Figure 1.66: Post-construction tidal flow pattern – flood tide.	71
Figure 1.67: Change in tidal flow (post-construction minus baseline) – flood tide.	72
Figure 1.68: Change in tidal flow (post-construction minus baseline) – flood tide detail view.	73

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Figure 1.69: Post-construction tidal flow pattern – ebb tide.....	74
Figure 1.70: Change in tidal flow (post-construction minus baseline) – ebb tide.	75
Figure 1.71: Change in tidal flow (post-construction minus baseline) – ebb tide detailed view.	76
Figure 1.72: Post-construction wave climate 1 in 1 year storm 000° MHW.	78
Figure 1.73: Change in wave climate 1 in 1 year storm 000° MHW (post-construction minus baseline).....	79
Figure 1.74: Post-construction wave climate 1 in 20 year storm 000° MHW.	80
Figure 1.75: Change in wave climate 1 in 20 year storm 000° MHW (post-construction minus baseline).....	81
Figure 1.76: Post-construction wave climate 1 in 20 year storm 030° MHW.	82
Figure 1.77: Change in wave climate 1 in 20 year storm 030° MHW (post-construction minus baseline).....	83
Figure 1.78: Post-construction wave climate 1 in 20 year storm 240° MHW.	84
Figure 1.79: Change in wave climate 1 in 20 year storm 240° MHW (post-construction minus baseline).....	85
Figure 1.80: Post-construction wave climate 1 in 20 year storm 270° MHW.	86
Figure 1.81: Change in wave climate 1 in 20 year storm 270° MHW (post-construction minus baseline).....	87
Figure 1.82: Post-construction littoral current 1 in 1 year storm from 210° - flood tide.	89
Figure 1.83: Change in littoral current 1 in 1 year storm from 210° - flood tide (post-construction minus baseline).	90
Figure 1.84: Change in littoral current 1 in 1 year storm from 210° - flood tide (post-construction minus baseline) detailed view.	91
Figure 1.85: Post-construction littoral current 1 in 1 year storm from 210° - ebb tide.	92
Figure 1.86: Change in littoral current 1 in 1 year storm from 210° - ebb tide (post-construction minus baseline).	93
Figure 1.87: Change in littoral current 1 in 1 year storm from 210° - ebb tide (post-construction minus baseline) detailed view.	94
Figure 1.88: Post-construction residual current spring tide.	96
Figure 1.89: Change in residual current spring tide (post-construction minus baseline).....	97
Figure 1.90: Change in residual current spring tide (post-construction minus baseline) detailed view.....	98
Figure 1.91: Post-construction potential sediment over the course of one day (two tide cycles).....	99
Figure 1.92: Difference in potential sediment transport over the course of one day (post-construction minus baseline).	100
Figure 1.93: Post-construction residual current 1 in 1 year storm from 210° spring tide.	101
Figure 1.94: Change in residual current 1 in 1 year storm from 210° spring tide (post-construction minus baseline).	102
Figure 1.95: Change in residual current 1 in 1 year storm from 210° spring tide (post-construction minus baseline) detailed view.	103
Figure 1.96: Sand wave clearance path modelled for PEIR.....	105
Figure 1.97: SSC during dredging phase – inter-array cable path.	107
Figure 1.98: SSC during dumping phase – inter-array cable path.	108
Figure 1.99: SSC with sediment re-mobilisation – inter-array cable path.	109
Figure 1.100: Average SSC during operation – inter-array cable path.....	110
Figure 1.101: Average sedimentation during operation – inter-array cable path.....	111
Figure 1.102: Average sedimentation during operation – inter-array cable path detailed view.....	112
Figure 1.103: Sedimentation one day following cessation of operation – inter-array cable path.	113
Figure 1.104: Sedimentation one day following cessation of operation – inter-array cable path detail view.	114
Figure 1.105: Location of modelled piled installation for piling – PEIR scenario A.....	117
Figure 1.106: Average SSC – pile installation scenario A.	118
Figure 1.107: SSC day one flood - pile installation scenario A.....	119
Figure 1.108: SSC day one ebb - pile installation scenario A.....	120
Figure 1.109: SSC day three flood - pile installation scenario A.....	121
Figure 1.110: SSC day three ebb - pile installation scenario A.	122
Figure 1.111: Average sedimentation during pile installation – scenario A.	123
Figure 1.112: Average sedimentation during pile installation – scenario A detail view.	124
Figure 1.113: Sedimentation one day following cessation of pile installation – scenario A.....	125
Figure 1.114: Sedimentation one day following cessation of pile installation – scenario A detail view.....	126
Figure 1.115: Location of modelled piled installation for piling – PEIR scenario B.....	128
Figure 1.116: Average SSC – pile installation scenario B.	129
Figure 1.117: SSC day one flood - pile installation scenario B.....	130

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Figure 1.118: SSC day one ebb - pile installation scenario B.....	131
Figure 1.119: SSC day three flood - pile installation scenario B.....	132
Figure 1.120: SSC day three ebb - pile installation scenario B.	133
Figure 1.121: Average sedimentation during pile installation – scenario B.	134
Figure 1.122: Average sedimentation during pile installation – scenario B detail view.	135
Figure 1.123: Sedimentation one day following cessation of pile installation – scenario B.....	136
Figure 1.124: Sedimentation one day following cessation of pile Installation – scenario B detail view.....	137
Figure 1.125: Location of modelled piled installation for piling – PEIR scenario C.	139
Figure 1.126: Average SSC – pile installation scenario C.	140
Figure 1.127: SSC day one flood - pile installation scenario C.....	141
Figure 1.128: SSC day one ebb - pile installation scenario C.	142
Figure 1.129: SSC day three flood - pile installation scenario C.	143
Figure 1.130: SSC day three ebb - pile installation scenario C.	144
Figure 1.131: Average sedimentation during pile installation – scenario C.....	145
Figure 1.132: Average sedimentation during pile installation – scenario C detail view.....	146
Figure 1.133: Sedimentation one day following cessation of pile installation – scenario C.	147
Figure 1.134: Sedimentation one day following cessation of pile installation – scenario C detail view.....	148
Figure 1.135: Modelled inter-array cable route for PEIR.	150
Figure 1.136: Average SSC during inter-array cable trenching.	151
Figure 1.137: SSC day two flood – inter-array cable installation.....	152
Figure 1.138: SSC day two ebb – inter-array cable installation.....	153
Figure 1.139: SSC day three flood – inter-array cable installation.	154
Figure 1.140: SSC day three ebb – inter-array cable installation.	155
Figure 1.141: SSC day four flood – inter-array cable installation.	156
Figure 1.142: SSC day four ebb – inter-array cable installation.	157
Figure 1.143: Average sedimentation during inter-array cable installation.....	158
Figure 1.144: Sedimentation one day following cessation of inter-array cable installation.	159
Figure 1.145: Modelled export cable route for PEIR.....	161
Figure 1.146: Average SSC during interconnector cable trenching.....	162
Figure 1.147: SSC day two peak flood – interconnector cable installation.....	163
Figure 1.148: SSC day two peak ebb – interconnector cable installation.	164
Figure 1.149: SSC day three peak flood – interconnector cable installation.	165
Figure 1.150: SSC day three peak ebb – interconnector cable installation.....	166
Figure 1.151: SSC day four peak flood – interconnector cable installation.	167
Figure 1.152: SSC day four peak ebb – interconnector cable installation.	168
Figure 1.153: Average sedimentation during interconnector cable installation.	169
Figure 1.154: Sedimentation one day following cessation of interconnector cable installation.	170
Figure 1.155: Location of foundation used for sensitivity modelling.	173
Figure 1.156: Baseline tidal flow pattern – flood tide.	175
Figure 1.157: Change in tidal flow (post-construction minus baseline) suction bucket foundation – flood tide.....	176
Figure 1.158: Baseline tidal flow pattern – ebb tide.....	177
Figure 1.159: Change in tidal flow (post-construction minus baseline) suction bucket foundation – ebb tide.....	178
Figure 1.160: Baseline wave climate 1 in 1 year storm 000° MHW.....	180
Figure 1.161: Change in wave climate 1 in 1 year storm 000° MHW (post-construction minus baseline) – suction bucket foundation.	181
Figure 1.162: Baseline wave climate 1 in 1 year storm 090° MHW.....	182
Figure 1.163: Change in wave climate 1 in 1 year storm 090° MHW (post-construction minus baseline) – suction bucket foundation.....	183
Figure 1.164: Baseline wave climate 1 in 1 year storm 240° MHW.....	184
Figure 1.165: Change in wave climate 1 in 1 year storm 240° MHW (post-construction minus baseline) – suction bucket foundation.	185
Figure 1.166: Baseline wave climate 1 in 1 year storm 270° MHW.....	186
Figure 1.167: Change in wave climate 1 in 1 year storm 270° MHW (post-construction minus baseline) – suction bucket foundation.	187
Figure 1.168: Baseline wave climate 1 in 20 year storm 000° MHW.....	188

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Figure 1.169: Change in wave climate 1 in 20 year storm 000° MHW (post-construction minus baseline) – suction bucket foundation.....	189
Figure 1.170: Baseline wave climate 1 in 20 year storm 090° MHW.....	190
Figure 1.171: Change in wave climate 1 in 20 year storm 090° MHW (post-construction minus baseline) – suction bucket foundation.....	191
Figure 1.172: Baseline wave climate 1 in 20 year storm 240° MHW.....	192
Figure 1.173: Change in wave climate 1 in 20 year storm 240° MHW (post-construction minus baseline) – suction bucket foundation.....	193
Figure 1.174: Baseline wave climate 1 in 20 year storm 270° MHW.....	194
Figure 1.175: Change in wave climate 1 in 20 year storm 270° MHW (post-construction minus baseline) – suction bucket foundation.....	195
Figure 1.176: Baseline tidal flow pattern – flood tide.....	197
Figure 1.177: Change in tidal flow (post-construction minus baseline) conical gravity base foundation – flood tide.....	198
Figure 1.178: Baseline tidal flow pattern – ebb tide.....	199
Figure 1.179: Change in tidal flow (post-construction minus baseline) conical gravity base foundation – ebb tide.....	200
Figure 1.180: Baseline wave climate 1 in 1 year storm 000° MHW.....	202
Figure 1.181: Change in wave climate 1 in 1 year storm 000° MHW (post-construction minus baseline) – conical gravity base foundation.....	203
Figure 1.182: Baseline wave climate 1 in 1 year storm 090° MHW.....	204
Figure 1.183: Change in wave climate 1 in 1 year storm 090° MHW (post-construction minus baseline) – conical gravity base foundation.....	205
Figure 1.184: Baseline wave climate 1 in 1 year storm 240° MHW.....	206
Figure 1.185: Change in wave climate 1 in 1 year storm 240° MHW (post-construction minus baseline) – conical gravity base foundation.....	207
Figure 1.186: Baseline wave climate 1 in 1 year storm 270° MHW.....	208
Figure 1.187: Change in wave climate 1 in 1 year storm 270° MHW (post-construction minus baseline) – conical gravity base foundation.....	209
Figure 1.188: Baseline wave climate 1 in 20 year storm 000° MHW.....	210
Figure 1.189: Change in wave climate 1 in 20 year storm 000° MHW (post-construction minus baseline) – conical gravity base foundation.....	211
Figure 1.190: Baseline wave climate 1 in 20 year storm 090° MHW.....	212
Figure 1.191: Change in wave climate 1 in 20 year storm 090° MHW (post-construction minus baseline) – conical gravity base foundation.....	213
Figure 1.192: Baseline wave climate 1 in 20 year storm 240° MHW.....	214
Figure 1.193: Change in wave climate 1 in 20 year storm 240° MHW (post-construction minus baseline) – conical gravity base foundation.....	215
Figure 1.194: Baseline wave climate 1 in 20 year storm 270° MHW.....	216
Figure 1.195: Change in wave climate 1 in 20 year storm 270° MHW (post-construction minus baseline) – conical gravity base foundation.....	217
Figure 1.196: Baseline tidal flow pattern – flood tide.....	219
Figure 1.197: Change in tidal flow (post-construction minus baseline) rectangular gravity base foundation – flood tide.....	220
Figure 1.198: Baseline tidal flow pattern – ebb tide.....	221
Figure 1.199: Change in tidal flow (post-construction minus baseline) rectangular gravity base foundation – ebb tide.....	222
Figure 1.200: Baseline wave climate 1 in 1 year storm 000° MHW.....	224
Figure 1.201: Change in wave climate 1 in 1 year storm 000° MHW (post-construction minus baseline) - rectangular gravity base foundation.....	225
Figure 1.202: Baseline wave climate 1 in 1 year storm 090° MHW.....	226
Figure 1.203: Change in wave climate 1 in 1 year storm 090° MHW (post-construction minus baseline) - rectangular gravity base foundation.....	227
Figure 1.204: Baseline wave climate 1 in 1 year storm 240° MHW.....	228
Figure 1.205: Change in wave climate 1 in 1 year storm 240° MHW (post-construction minus baseline) - rectangular gravity base foundation.....	229

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Figure 1.206: Baseline wave climate 1 in 1 year storm 270° MHW.....	230
Figure 1.207: Change in wave climate 1 in 1 year storm 270° MHW (post-construction minus baseline) - rectangular gravity base foundation.	231
Figure 1.208: Baseline wave climate 1 in 20 year storm 000° MHW.....	232
Figure 1.209: Change in wave climate 1 in 20 year storm 000° MHW (post-construction minus baseline) - rectangular gravity base foundation.	233
Figure 1.210: Baseline wave climate 1 in 20 year storm 090° MHW.....	234
Figure 1.211: Change in wave climate 1 in 20 year storm 090° MHW (post-construction minus baseline) - rectangular gravity base foundation.	235
Figure 1.212: Baseline wave climate 1 in 20 year storm 240° MHW.....	236
Figure 1.213: Change in wave climate 1 in 20 year storm 240° MHW (post-construction minus baseline) - rectangular gravity base foundation.	237
Figure 1.214: Baseline wave climate 1 in 20 year storm 270° MHW.....	238
Figure 1.215: Change in wave climate 1 in 20 year storm 270° MHW (post-construction minus baseline) - rectangular gravity base foundation.	239

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Glossary

Term	Meaning
Bathymetry	The measurement of depth of water in oceans, seas, or lakes.
Bed resistance coefficient	Represents the roughness or friction applied to the flow by the seabed.
Ebb tide	The tidal phase during which the water level is falling.
Erosion	Depletion of sediment in the intertidal region.
Fetch	Length in the wind direction of the marine area where water waves are generated by wind.
Flood tide	The tidal phase during which the water level is rising.
Folk classification	A technical descriptive classification of sedimentary rocks devised by Robert L. Folk., (Folk, 1954).
Highest Astronomical Tide	The highest tidal height predicted to occur under average meteorological conditions and any combination of astronomical conditions.
Hydrodynamic boundary conditions	The conditions used in a model boundary which can include surface elevation and velocity which will affect the rest of the model domain. The boundary condition can vary with time and along the boundary.
Intertidal region	An area of a shoreline that is covered at high tide and uncovered at low tide.
Lee	Shelter from wind or weather given by an object.
Littoral currents	Flow derived from tide and wave climate.
Lowest Astronomical Tide	The lowest tidal height predicted to occur under average meteorological conditions and any combination of astronomical conditions.
Mean High Water	The highest water level reached during an average tide.
Mean High Water Spring	The most inshore level location reached by the sea at high tide during mean high water spring tide. This is defined as the average throughout the year, of two successive high waters, during a 24-hour period in each month when the range of the tide is at its greatest.
Mean Low Water Spring	The most offshore location reached by the sea at low tide during low water spring tide. This is defined as the average throughout the year, of two successive low waters, during a 24-hour period in each month when the range of the tide is at its greatest.
Mean Sea Level	The average tidal height over a long period of time.
Metocean	Refers to the syllabic abbreviation of meteorology and (physical) oceanography.
Neap tide	Tide that occurs when the sun and moon are at right angles to each other and the gravitational pull of the sun partially cancels out the pull of the moon on the ocean.
Refraction	The change in direction of a wave passing from one medium to another caused by its change in speed.
Residual current	The net flow over the course of the tidal cycle. This is effectively the driving force of the sediment transport.
Sandwave	A lower regime sedimentary structure that forms across from tidal currents.
Scour protection	Measures to prevent loss of seabed sediment around any structure placed in or on the seabed (e.g. by use of protective aprons, mattresses, rock and gravel placement).
Sedimentation	The process of settling or being deposited as a sediment.
Shoaling	Change in wave height when surface waves enter shallow water.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Term	Meaning
Significant wave height	Mean wave height (trough to crest) of the highest third of the waves.
Slack tide	Tidal phase at which the current turns from flood to ebb (high-water slack tide) or from ebb to flood (low-water slack tide).
Spectral waves	Describes the distribution of wave energy with frequency (1/period) and direction.
Spring tide	Tide that occurs when the sun and moon are directly in line with the Earth and their gravitational pulls on the ocean reinforce each other.
Suspended Particulate Matter	Particles that are suspended in the water column.
Turbidity	The quality of being cloudy, opaque, or thick with suspended matter.
Wave height	The distance from trough to crest of a wave.
Wave period	The time it takes for two successive crests (one wavelength) to pass a specified point.

Acronyms

Acronym	Description
2D UHRS	2D Ultra High Resolution Seismic
ASG	Aanderaa Seaguard
BEIS	Department for Business, Energy and Industrial Strategy
BERR	Department for Business Enterprise and Regulatory Reform
BGS	British Geological Survey
BODC	British Oceanographic Data Centre
CCO	Coastal Channel Observatory
CD	Chart Datum (generally defined as LAT)
CEFAS	Centre for Environment, Fisheries and Aquaculture Science
CIV	Cleveleys
CPT	Cone Penetration Test
DA	Depth Averaged
DEFRA	Department for Environment Food and Rural Affairs
DHI	Danish Hydraulic Institute
DSV	Digital Sound Velocity
ECMWF	European Centre for Medium-range Weather Forecast
EMODnet	European Marine Observation and Data Network
FM	Flexible Mesh
GEMS	Geotechnical Engineering and Marine Surveys
GSI	Geological Survey Ireland
GyM	Gwynt y Môr
HAT	Highest Astronomical Tide

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Acronym	Description
HWM	High Water Mark
INFOMAR	Integrated Mapping for the Sustainable Developments of Ireland's Marine Resource
LAT	Lowest Astronomical Tide
LWM	Low Water Mark
MBES	Multi-Beam Echo Sounder
MCZ	Marine Conservation Zone
MDS	Maximum Design Scenario
MEDIN	Marine Environmental Data and Information Network
MHW	Mean High Water
MHWN	Mean High Water Neaps
MHWS	Mean High Water Springs
MLWN	Mean Low Water Neaps
MLWS	Mean Low Water Springs
MMO	Marine Management Organisation
MSL	Mean Sea Level
MT	Mud Transport
NOAA	National Oceanic and Atmospheric Administration
OSP	Offshore Substation Platform
PDE	Project Design Envelope
PEIR	Preliminary Environmental Information Report
PSA	Particle Size Analysis
PT	Particle Tracking
RhF	Rhyl Flats
SBP	Sub-Bottom Profiler
SIG	Nortek Signature
SPM	Suspended Particulate Matter
SSC	Suspended Sediment Concentration
SSS	Side Scan Sonar
ST	Sand Transport
SW	Spectral Wave
TSSF	Tide and Storm Surge Forecast
UKCS	United Kingdom Continental Shelf
UKCP	UK Climate Projections
UKHO	United Kingdom Hydrographic Office

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Units

Unit	Description
%	Percent
°	Degrees (angle from True North)
cm	Centimetre (distance)
cm/s	Centimetre per second (speed)
mm	Millimetre (distance)
m	Metre (distance)
m ²	Square metres (area)
m ³	Cubic metres (volume)
m/h	Metres per hour (speed)
m ³ /h	Cubic metres per hour (rate of change)
km	Kilometre (distance)
m ³ /d/m	Cubic metres transported per day per metre width of transport path (i.e. perpendicular to direction of transport)
m ³ /s/m	Cubic metres transported per second per metre width of transport path (i.e. perpendicular to direction of transport)
m/s	Metres per second (speed)
mg/l	Milligrams per litre (Suspended Sediment Concentration)

1 Physical processes technical report

1.1 Introduction

- 1.1.1.1 This physical processes technical report provides information relating to the physical environment and processes for the Morgan Offshore Wind Project: Generation Assets (hereafter referred to as Morgan Generation Assets). The purpose of the technical report is to provide details of the supporting studies undertaken by means of numerical modelling. It describes the current baseline conditions and quantifies the potential changes due to the installation and presence of the Morgan Generation Assets. Modelling was undertaken to support the Preliminary Environmental Information Report (PEIR), (Morgan Offshore Wind Limited, 2023) and was supplemented with additional numerical modelling work to support the Environmental Statement; both of which are presented in this document.
- 1.1.1.2 The preparation of a PEIR and subsequent Environmental Statement is an iterative process, with refinements being made to the project description throughout this undertaking as information is acquired from the range of studies and assessments undertaken. For this reason, modelled scenarios based on the project description at both the PEIR and Environmental Statement stages of the application are presented within this report.
- 1.1.1.3 The Morgan Array Area has been reduced by approximately 10% from the Morgan Potential Array Area which was presented in the PEIR and is accompanied by revised indicative layouts. The reductions in area are modest and lie wholly within the Morgan Potential Array Area assessed for PEIR. Therefore it was concluded that the representative/indicative layout applied within the modelling studies undertaken for the PEIR is considered to provide appropriate information to support the physical processes assessment of the Morgan Generation Assets for the Environmental Statement. The modelling strategy for the physical processes environmental assessment was agreed in principle with stakeholders including Marine Management Organisation (MMO) and Centre for Environment, Fisheries and Aquaculture Science (CEFAS) through the Evidence Plan Process as detailed in Volume 2, Chapter 1: Physical processes of the Environmental Statement.
- 1.1.1.4 In some cases, the modelling of construction activities extends beyond the revised Morgan Array Area boundary, providing a more robust and precautionary modelling study. The areas, just beyond the Morgan Array Area boundary, have bathymetry, tidal currents and sediment classifications consistent with those within the Morgan Array Area. It is considered that, given these similarities, and that the revised layout represents a modest change in terms of the physical processes assessment, the modelling undertaken for the PEIR was applicable and has therefore been used to inform the physical processes assessment presented for the Environmental Statement.
- 1.1.1.5 Modelling scenarios undertaken for the PEIR and presented within section 1.3 of this technical report were informed by the project description presented at PEIR. The parameters modelled largely correspond to those defined for the Environmental Statement, however in some instances these may vary from those assessed for the application. Additional sensitivity testing has been included in section 1.4 to support variations in project design parameters from the Morgan Potential Array Area made since the PEIR was published and the subsequent Environmental Statement. When disparities occur, they are cited within the assessment with reference to the

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

applicability of the modelled data presented in this report and used to support the assessment.

1.1.1.6 This report is divided into two main sections:

- Modelling in support of the PEIR
 - Baseline conditions – describing current hydrography and sedimentology
 - Environmental variations – describing changes to baseline arising from the installation and presence of the Morgan Generation Assets for PEIR
 - Construction phase changes – describing the dispersion and fate of sediment mobilised during construction phase activities
- Modelling in support of the Environmental Statement
 - Sensitivity testing for alternative foundation types.

1.1.1.7 For the purposes of this physical processes technical report, physical processes are defined as encompassing the following elements:

- Tidal elevations and currents
- Waves
- Bathymetry
- Seabed sediments
- Suspended sediments
- Sediment transport.

1.2 Study area

1.2.1.1 The physical processes study area is illustrated in Figure 1.1 and defined as the:

- Morgan Array Area (the area within which the wind turbines, foundations, inter-array cables, interconnector cables and Offshore Substation Platforms (OSPs) forming part of the Morgan Generation Assets will be located)
- Seabed and coastal areas that may be influenced by changes to physical processes due to the Morgan Generation Assets for PEIR defined as one spring tidal excursion from the Morgan Potential Array Area which is the distance suspended sediment is transported prior to being carried back on the returning tide.

1.2.1.2 It is however noted that the physical processes study area forms the focus for the assessment and that the numerical model extent is not limited to this region. The modelling study therefore also identifies any potential impacts beyond the physical processes study area. Figure 1.1 also demonstrates how the Morgan Array Area has been reduced in size since the publication of the PEIR. However, to be conservative, the physical processes study area remains unchanged.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

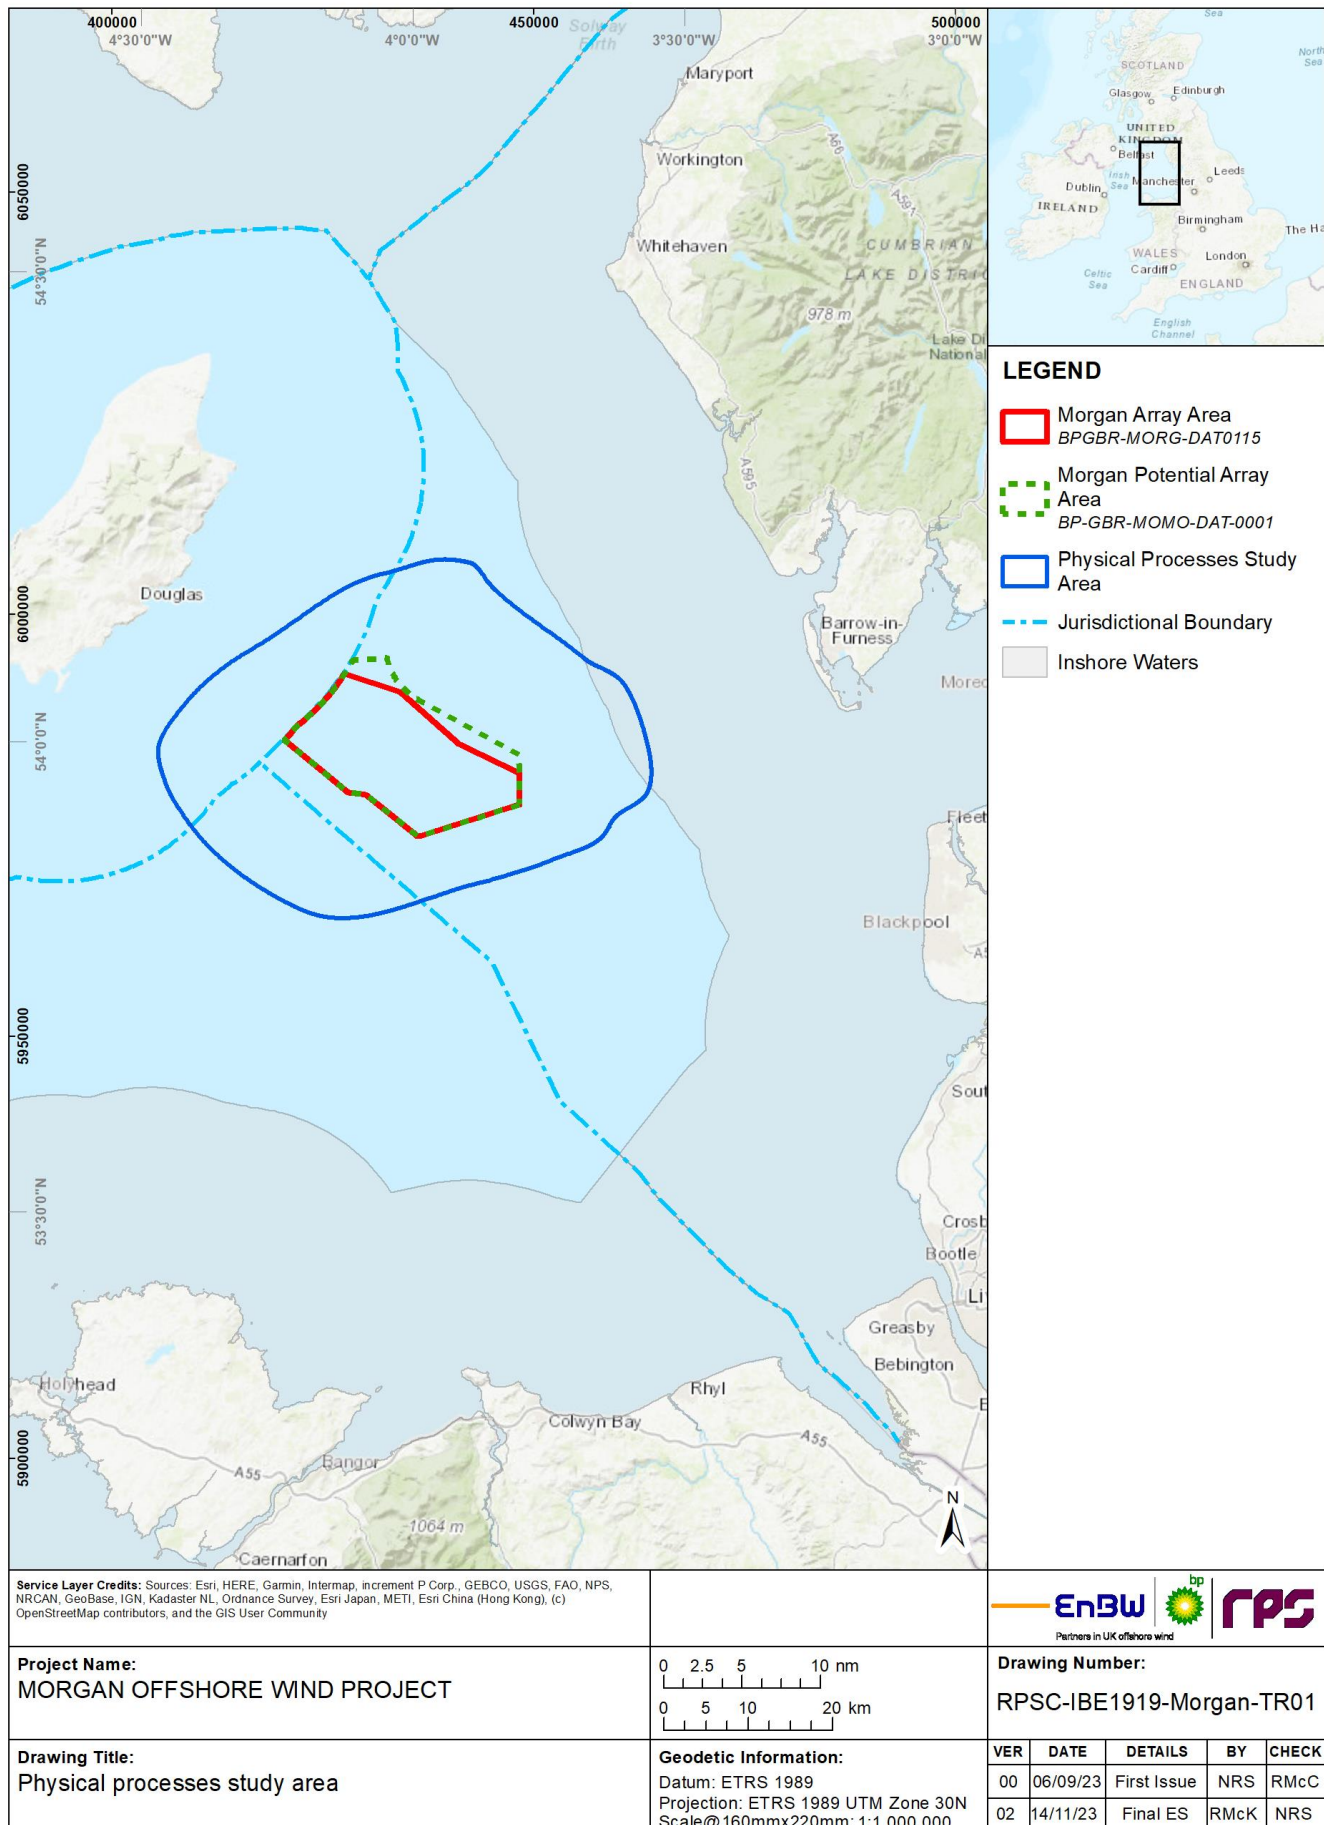


Figure 1.1: Physical processes study area.

1.3 Modelling in support of the PEIR

1.3.1 Overview

1.3.1.1 The following section outlines the modelling study undertaken for the Morgan Generation Assets PEIR. As noted, the application process is an iterative process with refinements being made to the project description throughout this period, as information is acquired from the range of studies and assessments undertaken. For this reason, the modelled scenarios presented in this section will, inevitably, vary by a small degree from those assessed in the Environmental Statement. When disparities occur, they are cited within the assessment with reference to the applicability of the modelled data presented in this report and used to support the application.

1.3.2 Methodology

1.3.2.1 The physical processes study was undertaken to provide information of potential changes to physical processes and the fate of mobilised sediment during the construction phase by means of numerical modelling. Numerical models were developed and calibrated using a combination of publicly available datasets and those collected specifically for the Morgan Generation Assets.

1.3.2.2 These models were then implemented in comparative studies to determine the potential impact of the infrastructure on tidal flow, wave climate and sediment transport patterns for a representative project design scenario. It is noted that this method investigates the influence on the drivers of physical processes rather than instigating detailed morphological studies. In the event that significant potential impacts were identified more detailed studies may be required.

1.3.2.3 The models were also used to undertake simulations of site preparation, cable trenching and pile installation activities to quantify potential increases in Suspended Sediment Concentration (SSC) and subsequent deposition. This information was then applied in the context of the physical processes environmental impact assessment and those of related disciplines.

Numerical modelling

1.3.2.4 Numerical modelling techniques were used to describe tide, wave and sediment transport regimes. The MIKE suite of software was employed, as a single model mesh could be used to simulate these processes both individually and in combination. The model domain is shown in Figure 1.2. The MIKE suite of models is a widely used industry standard modelling suite developed by the Danish Hydraulic Institute (DHI). It has been approved for use by industry and government bodies including MMO and CEFAS. The MIKE suite is a modular system that contains a number of different but complementary modules encompassing different physical processes: these are summarised in Table 1.1 and described in further detail within the relevant sections. A summary of the modelled environmental scenarios is provided in Table 1.2.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Table 1.1: MIKE suite of models.

Simulation	Model	Description
Baseline and post-construction tidal flow	MIKE21 Flexible Mesh (FM) modelling system	The FM Module is a 2-dimensional, depth averaged hydrodynamic model which simulates the water level variations and flows in response to a variety of forcing functions in lakes, estuaries and coastal areas. The water levels and flows are resolved on a mesh covering the area of interest when provided with bathymetry, bed resistance coefficient t , wind field, hydrodynamic boundary conditions, etc.
Baseline and post-construction wave climate	MIKE21 Spectral Wave (SW)	The wave modelling was undertaken using the spectral wave model, MIKE21 SW. The waves were computed on the same grid as the tidal flows. The model resolves the wave field by simulating wind generation of waves within the model domain and the propagation of externally generated swell waves through the domain. The model setup ensured that the detail of both locally generated wind waves and swell conditions from further afield were captured.
Baseline and post-construction littoral currents	MIKE21 FM and SW	The MIKE suite facilitates the coupling of models. The depth averaged hydrodynamic model, used for the tidal modelling, coupled with a spectral wave model, provides a full wave climate incorporating the impact of water levels and currents on waves and wave breaking. Using this, the littoral currents (i.e. those currents driven by tidal, wave and meteorological forces) were examined.
Baseline and post-construction sediment transport	MIKE21 Sand Transport (ST)	This module enables assessment of bed sediment transport rates and initial rates of bed level change for non-cohesive sediment resulting from currents or combined wave-current flows. The model combines inputs from both the hydrodynamic model and, if required, the wave propagation model. It uses sediment size and gradation to determine the bed level changes and sediment transport rates.
Foundation installation	MIKE21 Mud Transport (MT)	A sample of four representative pile installation scenarios were simulated to cover the range of conditions across the Morgan Potential Array Area both in terms of tidal currents and sediment type. The MIKE MT module allows the modelling of erosion, transport and deposition of cohesive and cohesive/granular sediments. This model is suited to sediment releases in the water column and allows sediment sources which may vary spatially and temporally.
Cable installation	MIKE21 Particle Tracking (PT)	The PT module was implemented for cable installation as it has the advantage that it could be used to describe the transport of material released in a specific part of the water column. In this way, the dispersion would not be over-estimated, or the corresponding sedimentation underestimated.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Table 1.2: Summary of modelled environmental variation scenarios for PEIR.

Variation/operation	Description	Parameter modelled
Hydrography Section 1.3.6	<p>Models updated to take account of the installation of the Morgan Generation Assets as defined in the PEIR and associated features to quantify:</p> <ul style="list-style-type: none"> • Changes to tidal currents • Changes to wave climate • Changes to littoral currents. 	<ul style="list-style-type: none"> • Wind turbines: 68 installations with four-legged suction bucket foundations, each jacket leg with a diameter of 5 m, spaced 48 m apart, and each bucket with a diameter of 16 m. Scour protection to a height of 2.5 m. Total footprint of 10,816 m² per wind turbine foundation • OSPs: four installations with three-legged suction bucket foundations, each jacket leg with a diameter of 3 m, spaced 30 m apart, and each bucket with a diameter of 14 m. Scour protection to a height of 2.5 m. Total footprint of 3,277 m² per OSP • Inter-array cables: cable protection with a height of 3 m and 5 m width. Cable crossings, each crossing with a height of 4 m, a width of 32 m and a length of 60 m • Interconnector cables: cable protection with a height of 3 m and 10 m width. Cable crossings, each crossing with a height of 3 m, a width of 20 m and a length of 50 m.
Sedimentology Section 1.3.6	<p>Models updated to take account of the installation of the Morgan Generation Assets as defined in the PEIR and associated features to quantify:</p> <ul style="list-style-type: none"> • Changes to sediment transport characteristics. 	<p>As above with the addition of:</p> <ul style="list-style-type: none"> • Scour protection simulated using an area of fixed bed around each structure.
Seabed features clearance Section 1.3.7	<p>Dispersion modelling relating to sandwave clearance. Dredging of sandwave crest and disposal at troughs is undertaken in a cycle along cable routes.</p>	<ul style="list-style-type: none"> • Clearance is undertaken at 100 m/h along 5.6 km sample cable routes of a width of 104 m with dredging undertaken at 10,000 m³/h with a spill rate of 3% • Inter-array cable clearance is undertaken to an average depth of 5.1 m • With sediment released through water column.
Augured pile installation Section 1.3.7	<p>Dispersion modelling of suspended sediment arising from augured pile installation. Under a range of tidal conditions.</p>	<p>Four sample scenarios are presented, in each case:</p> <ul style="list-style-type: none"> • Piles are 16 m in diameter and 60 m deep • Two adjacent operations occur simultaneously • Drilling undertaken at 0.89 m/h • 13,460 m³ of material mobilised per pile • Released throughout water column.
Cable installation Section 1.3.7	<p>Dispersion modelling of suspended sediment arising from cable installation via trenching. Relating to:</p> <ul style="list-style-type: none"> • Inter-array cable • Interconnector cable. 	<p>For inter-array cables sample trenching operations are presented.</p> <ul style="list-style-type: none"> • Trench 3 m wide at seabed and 3 m deep with triangular cross section • Trenching is undertaken at 450 m/h.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

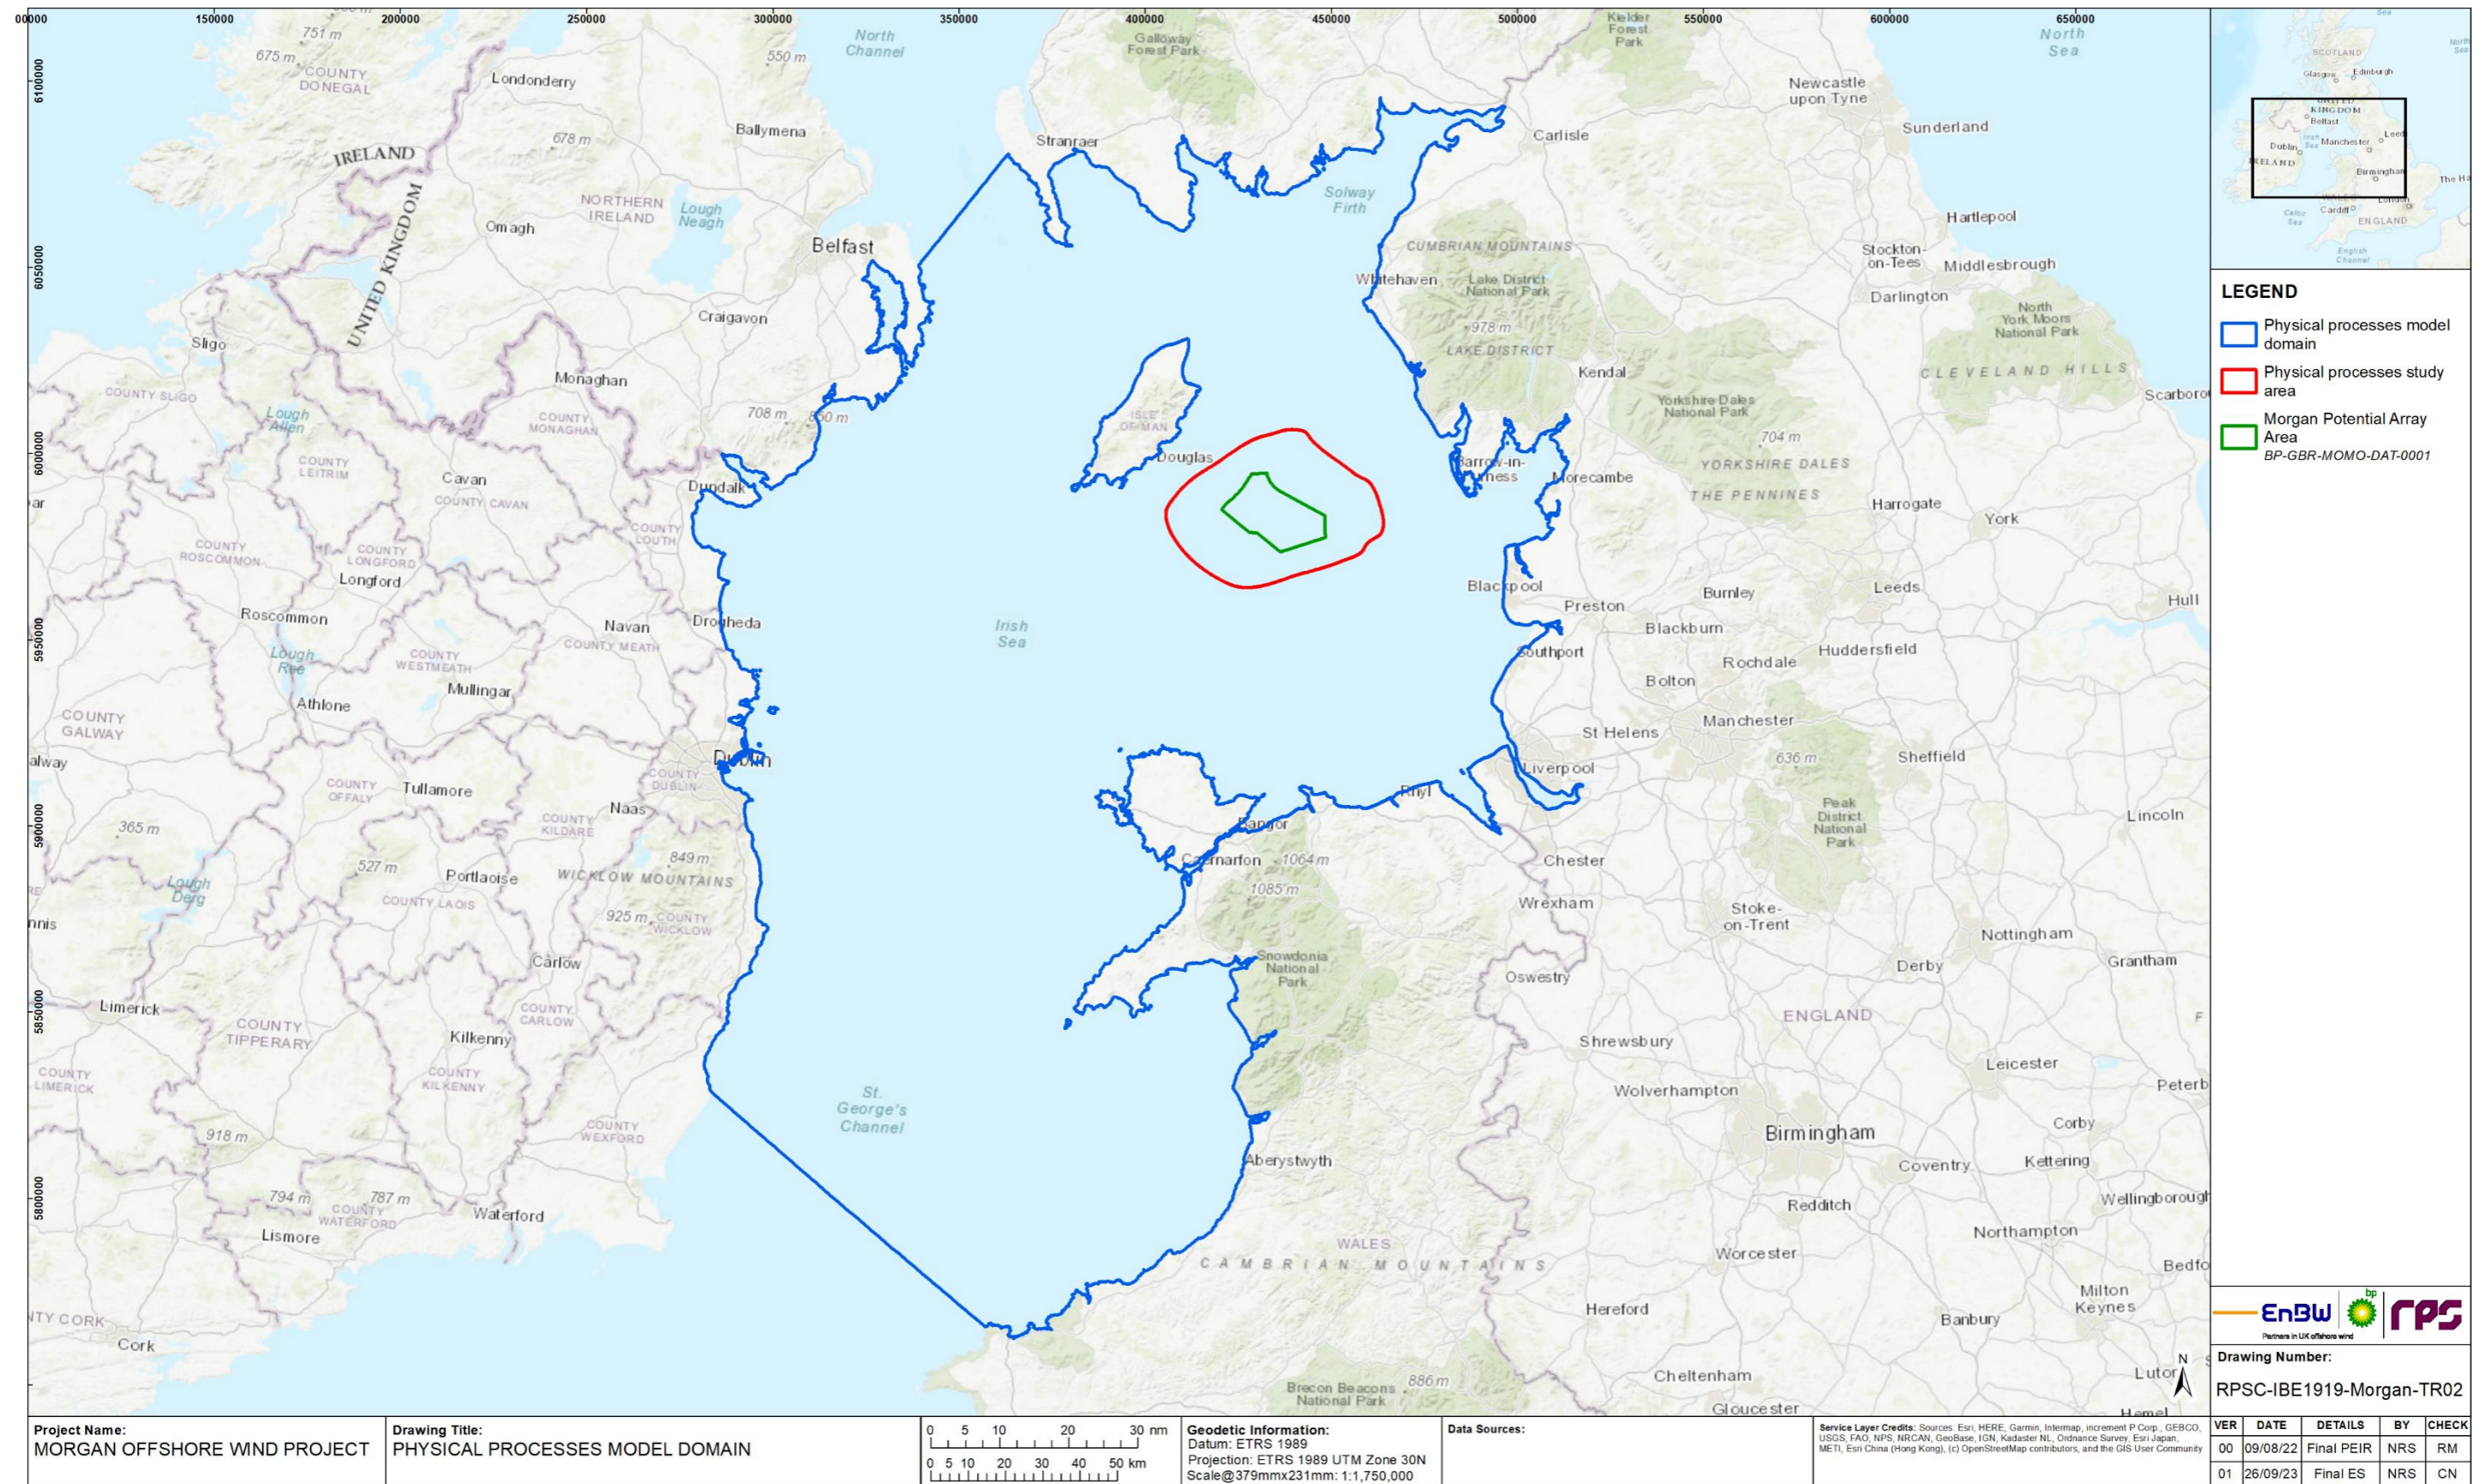


Figure 1.2: Model domain (blue outline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

1.3.3 Desktop study

1.3.3.1 Information on the physical environment within the physical processes study area and beyond to the model domain was collected through a detailed desktop review of existing studies and datasets. These are summarised in Table 1.3.

Table 1.3: Summary of key resources.

Title	Source	Year	Author
European Marine Observation and Data Network (EMODnet) – Seabed classification	https://www.emodnet-geology.eu/	2022	EMODnet
EMODnet – Bathymetry data	https://www.emodnet-bathymetry.eu/	2022	EMODnet
EMODnet – Metocean data	https://map.emodnet-physics.eu/	2022	EMODnet
Department for Environment Food and Rural Affairs (DEFRA) – Bathymetry data	https://environment.data.gov.uk/DefraDataDownload	2022	DEFRA
National Oceanic and Atmospheric Administration (NOAA) –Atmospheric data	DHI Metocean Data Portal	2022	NOAA
National Network of Regional Coastal Monitoring Programmes	https://coastalmonitoring.org/cc/o/	2022	Coastal Channel Observatory (CCO)
CEFAS – wave data	https://wavenet.cefas.co.uk/map	2022	CEFAS
ABPmer Data explorer	https://www.seastates.net/explorer-data/	2022	ABPmer
Hydrography of the Irish Sea, SEA6 Technical Report	UK Government	2005	Howarth M.J.
Atlas of UK Marine Renewable Energy Resources	https://www.renewables-atlas.info/	2022	ABPmer
Geology of the seabed and shallow subsurface: The Irish Sea.	British Geological Survey (BGS)	2015	Mellett <i>et al.</i>
BGS – sediment sample data	https://mapapps2.bgs.ac.uk/geoindex_offshore	2022	BGS
Suspended Sediment Climatologies around the UK.	Department for Business, Energy and Industrial Strategy (BEIS)	2016	Cefas
Metocean Data collection for the Ormonde offshore wind project.	Marine Data Exchange	2011	Geotechnical Engineering and Marine Surveys (GEMS)
Irish Sea Zone Hydrodynamic measurement campaign	Marine Data Exchange	2010 to 2013	EMU Ltd (now Fugro Ltd)

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Title	Source	Year	Author
Admiralty Tide Tables	United Kingdom Hydrographic Office (UKHO)	2022	UKHO
Marine Environmental Data Information Network (MEDIN) Seabed Mapping Programme	Admiralty Marine Data Portal	2022	MEDIN
Integrated Mapping for the Sustainable Developments of Ireland's Marine Resource (INFOMAR) Seabed Mapping Programme	Geological Survey Ireland (GSI) and Marine Institute	2022	INFOMAR
Long term wind and wave datasets	European Centre for Medium-range Weather Forecast (ECMWF)	2022	ECMWF
UK tide gauge network and database of current observation	British Oceanographic Data Centre (BODC)	2021	BODC
UK Climate Projections (UKCP)	Met Office	2018	Met Office
BODC	National Oceanography Centre	various	National Oceanography Centre

1.3.4 Site-specific surveys

A summary of the surveys undertaken of relevance to physical processes is outlined in Table 1.4. Results from recent geophysical and benthic surveys of the Morgan Potential Array Area were made available after the model study completion. These were used to verify that the data used within the physical processes modelling was appropriate to inform the Environmental Statement.

Table 1.4: Summary of survey undertaken to inform physical processes.

Title	Extent of survey	Overview of survey	Survey contractor	Date	Reference to further information
Environmental Baseline Surveys and Habitat Assessments	Morgan Potential Array Area	<p>Geophysical survey to determine characteristics of seabed sediment, characterise benthic communities (infauna and epifauna) and identification of any environmentally significant habitats (e.g. potential Habitats Directive Annex I and priority marine features).</p> <p>Deployment included multi-beam echo sounder (MBES), digital sound velocity (DSV) sensor, side scan sonar system (SSS), Sub-Bottom Profiler (SBP) & 2D Ultra High Resolution Seismic (2D UHRS) sensor. Additionally, seabed imagery was collected along with grab</p>	Gardline Ltd	June to September 2021	Gardline (2022)

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Title	Extent of survey	Overview of survey	Survey contractor	Date	Reference to further information
		samples and cone penetration testing (CPT).			
Geophysical survey	Morgan Potential Array Area	Geophysical survey to establish bathymetry, seabed sediment and identify seabed features. Deployment included MBES with multibeam backscatter.	XOCEAN Ltd	June 2021 to March 2022	XOCEAN (2022)
Metocean survey	Morgan Potential Array Area and Mona Potential Array Area	Metocean deployments to ascertain wind, wave, and tidal currents.	Fugro	November 2021 to November 2022	Fugro (2022)
Environmental Baseline Surveys and Habitat Assessments	Morgan Potential Array Area and Mona Potential Array Area	Deployment included multi-beam echo sounder (MBES), digital sound velocity (DSV) sensor, SSS, SBP & 2D Ultra High Resolution Seismic (2D UHRS) sensor. Additionally, seabed imagery was collected along with grab samples (Particle Size Analysis (PSA)) and cone penetration testing (CPT).	Gardline Ltd	April 2022 to August 2022	Ocean Ecology (2023a and 2023b)

1.3.5 Baseline environment

Bathymetry

- 1.3.5.1 The model domain had full bathymetry data coverage and was populated using a combination of data sources. The site-specific geophysical survey undertaken for both the Morgan Potential Array Area, (Morgan Offshore Wind Limited, 2023) and Mona PEIR Array Area (Mona Offshore Wind Limited, 2023) and the resulting bathymetry data, as detailed in Table 1.4, was used to populate the model. The extent of this survey data is shown in Figure 1.4, Gardline (2022) and XOcean (2022). The survey data provided to Lowest Astronomical Tide (LAT) vertical datum was converted to model mean sea level datum using reference values published by Admiralty.
- 1.3.5.2 Where additional data was required for the model extent beyond the survey area, bathymetry data was sourced from the MEDIN Seabed Mapping Programme via the Admiralty Marine Data Portal as shown in Figure 1.3. Each of the datasets for the east Irish Sea area was combined into a single set giving priority to the most recent survey data. For areas within region which did not have coverage from the MEDIN dataset further data was sourced from the DEFRA Survey Data Download site. This was undertaken for specific bays such as Conwy Bay and the Dee Estuary.
- 1.3.5.3 For the remaining model domain, the EMODnet 100 m resolution tiled data was utilised. This database is available under the European Inspire Directive and provides access to data in a variety of formats, datums and resolutions based on a combination of survey datasets. All data was converted, where necessary, to mean sea level datum

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

generally with a resolution of at least three times the mesh resolution to ensure that coastal features were represented within the numerical modelling, as illustrated in Figure 1.5.

- 1.3.5.4 The resolution of the model bathymetry was designed to reflect variations in water depth and bed forms for the accurate simulation of tidal currents. Additional model resolution was also included to incorporate the installation of the Morgan Generation Assets. This enabled the same cell arrangement to be used for the baseline and post-construction assessment, thereby avoiding the introduction of any numerical mesh effects into the assessment. Across the Morgan Potential Array Area, the resolution varied between circa 50 m down to 10 m in order that the influence of scour protection on the tidal flow and sediment transport for the Morgan Generation Assets infrastructure, as defined in the PEIR, could be quantified. With increasing distance from the physical processes study area, the cell size was increased but maintained at a level which retained model accuracy.
- 1.3.5.5 Figure 1.6 illustrates the mesh resolution with an inset of the mesh within the Morgan Array Area.
- 1.3.5.6 The extent of the domain, Figure 1.2, was designed to provide the basis for a model which could be utilised for tide, wave and sediment transport modelling. The focus of the study is a tidal excursion from the Morgan Potential Array Area to quantify any changes due to the installation however a larger domain is required to develop wave fields and ensure that tidal currents are simulated with the benefit of identifying any potential effects beyond the physical processes study area.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

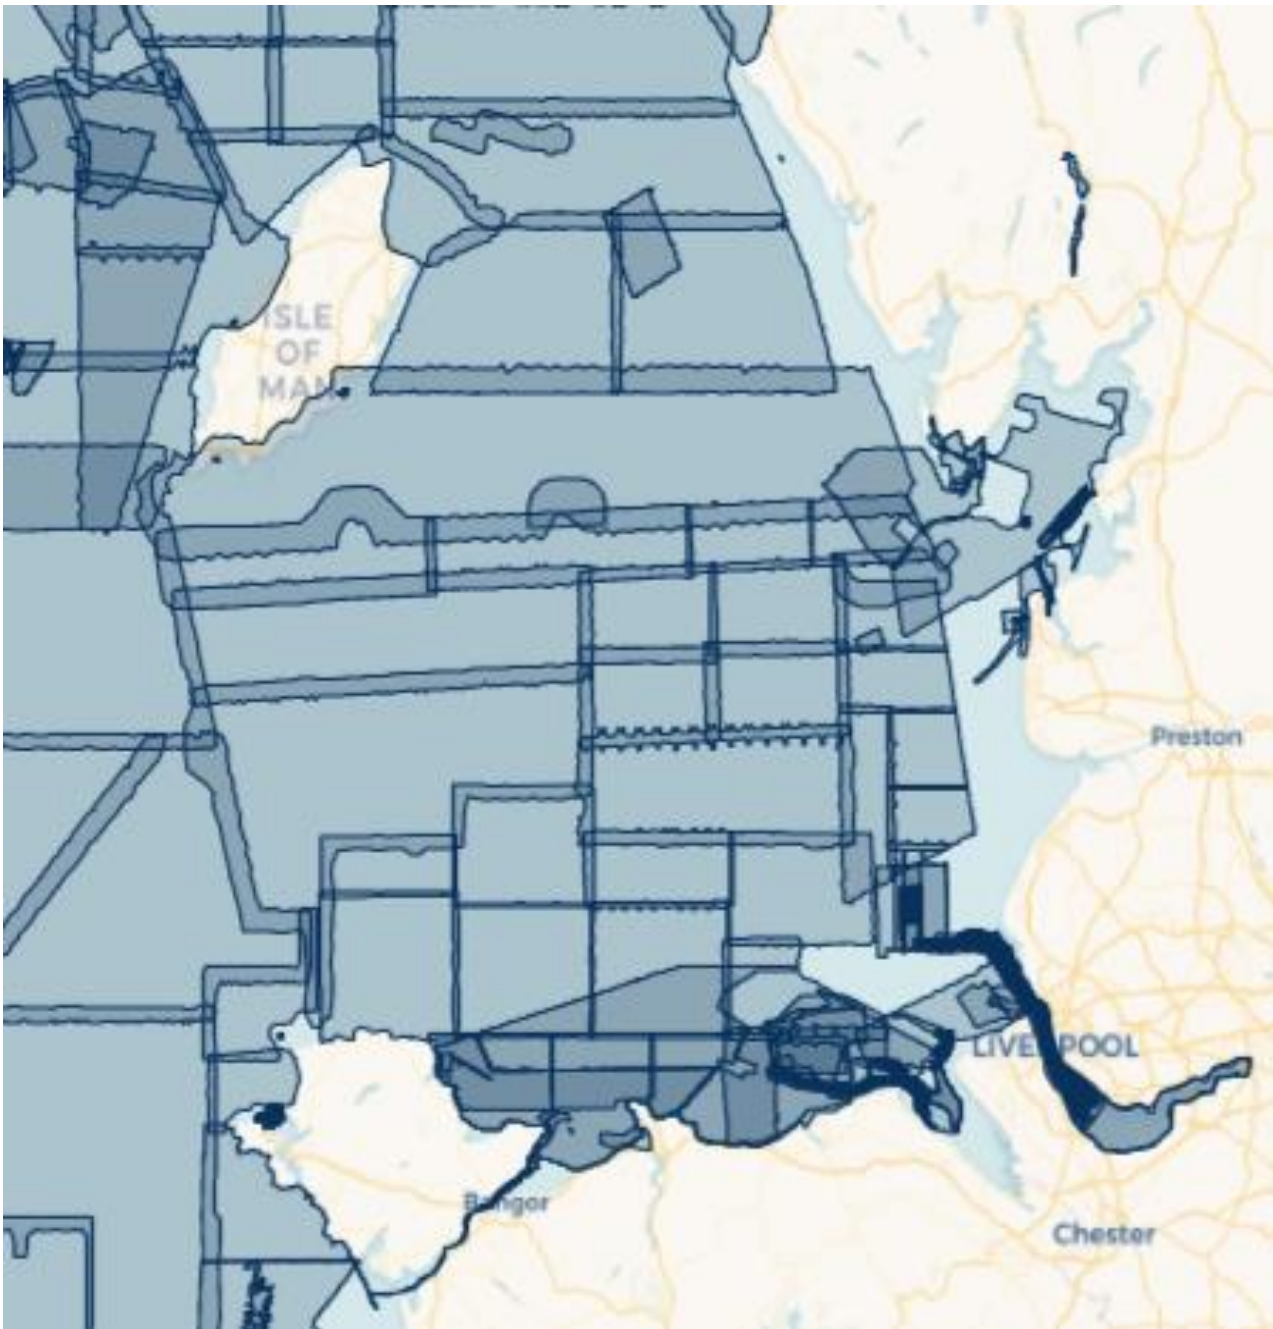


Figure 1.3: MEDIN bathymetric data coverage.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

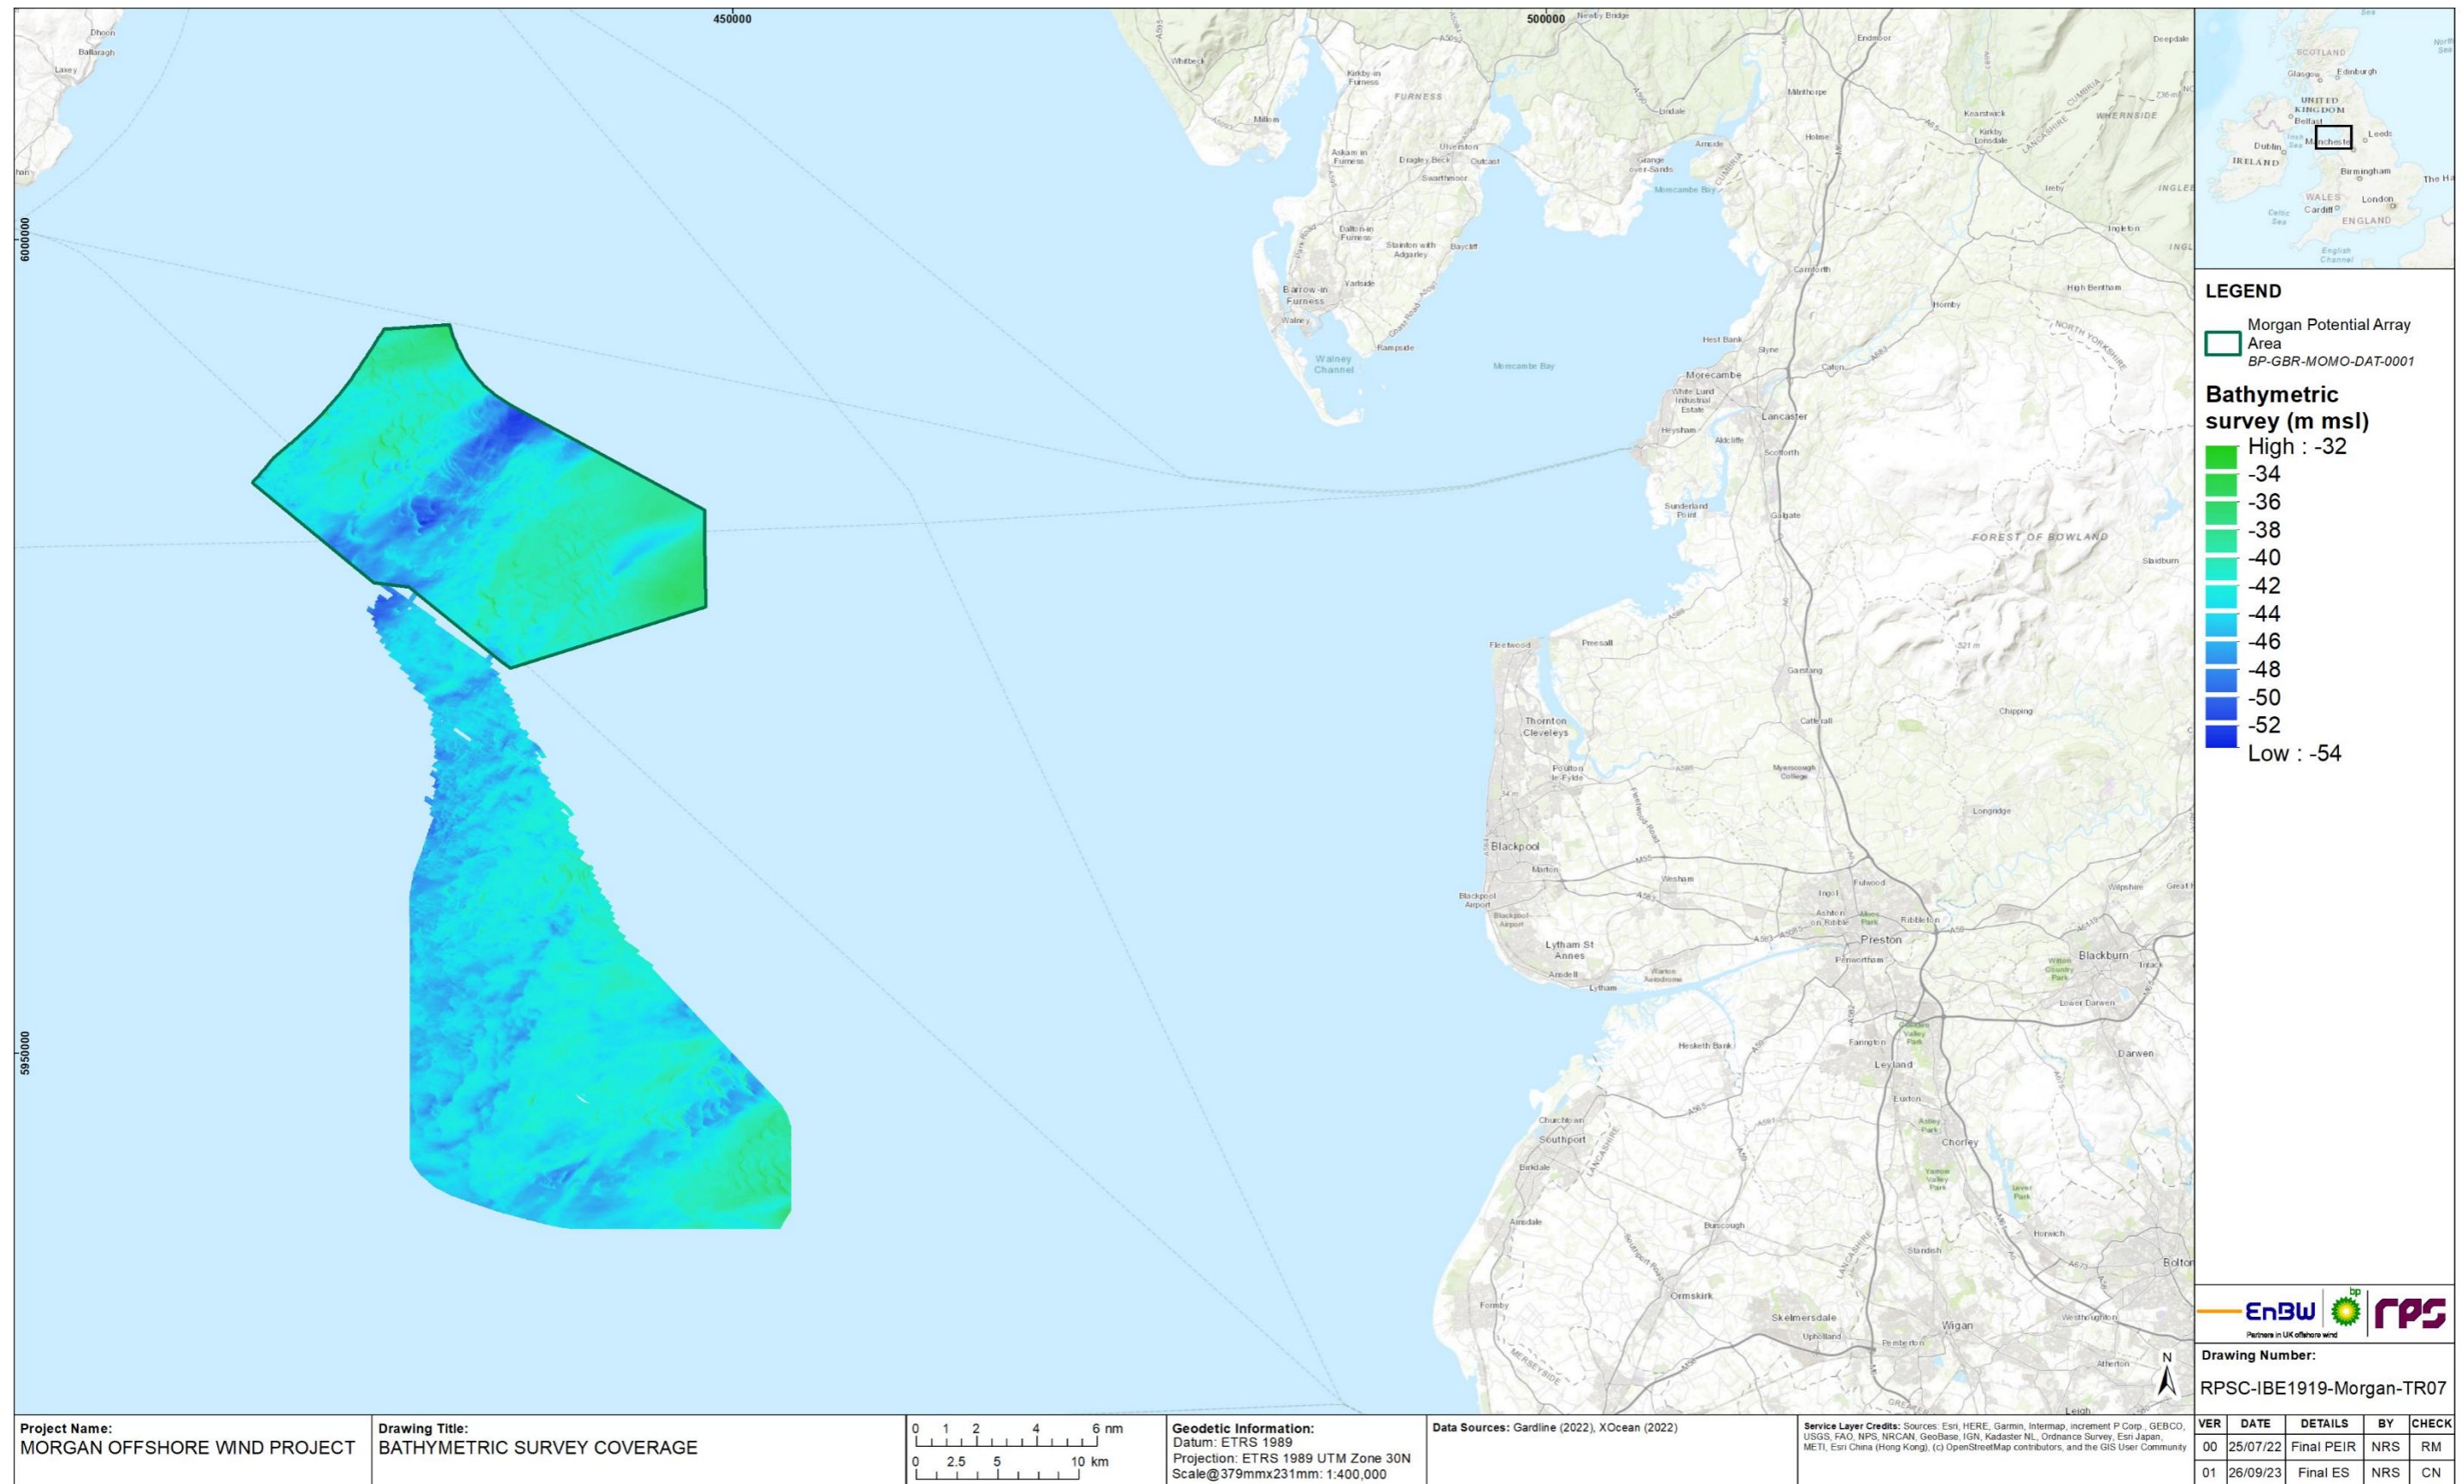


Figure 1.4: Morgan and Mona Scoping Array bathymetric survey data coverage – Source: Gardline (2022) and XOcean (2022).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

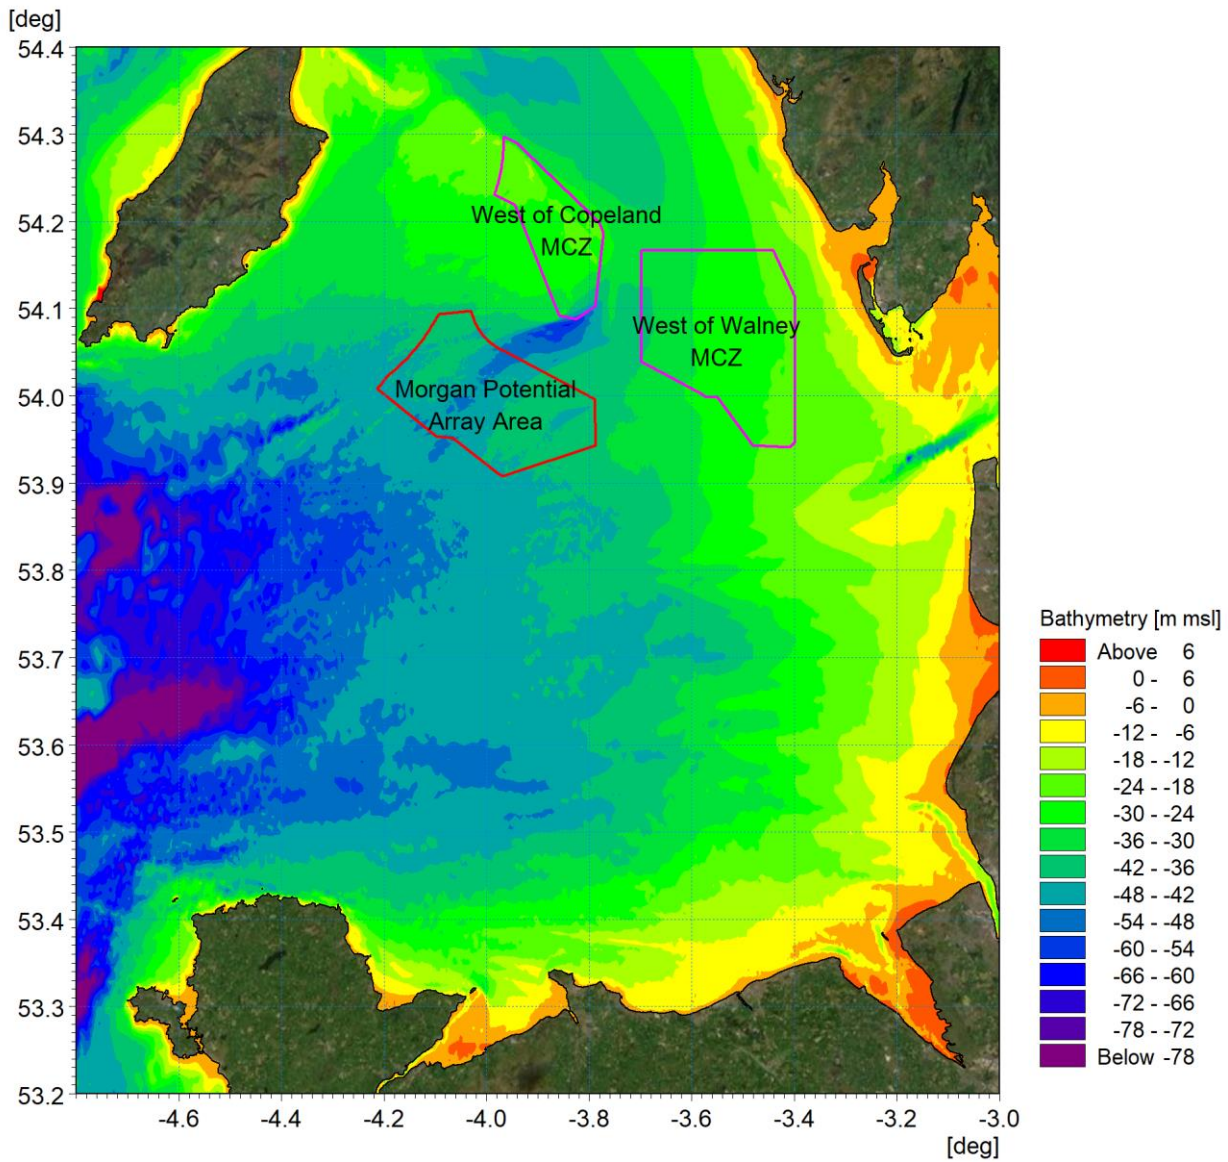


Figure 1.5: Model bathymetry in the east Irish Sea with Morgan Potential Array Area and Marine Conservation Zones (MCZ).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

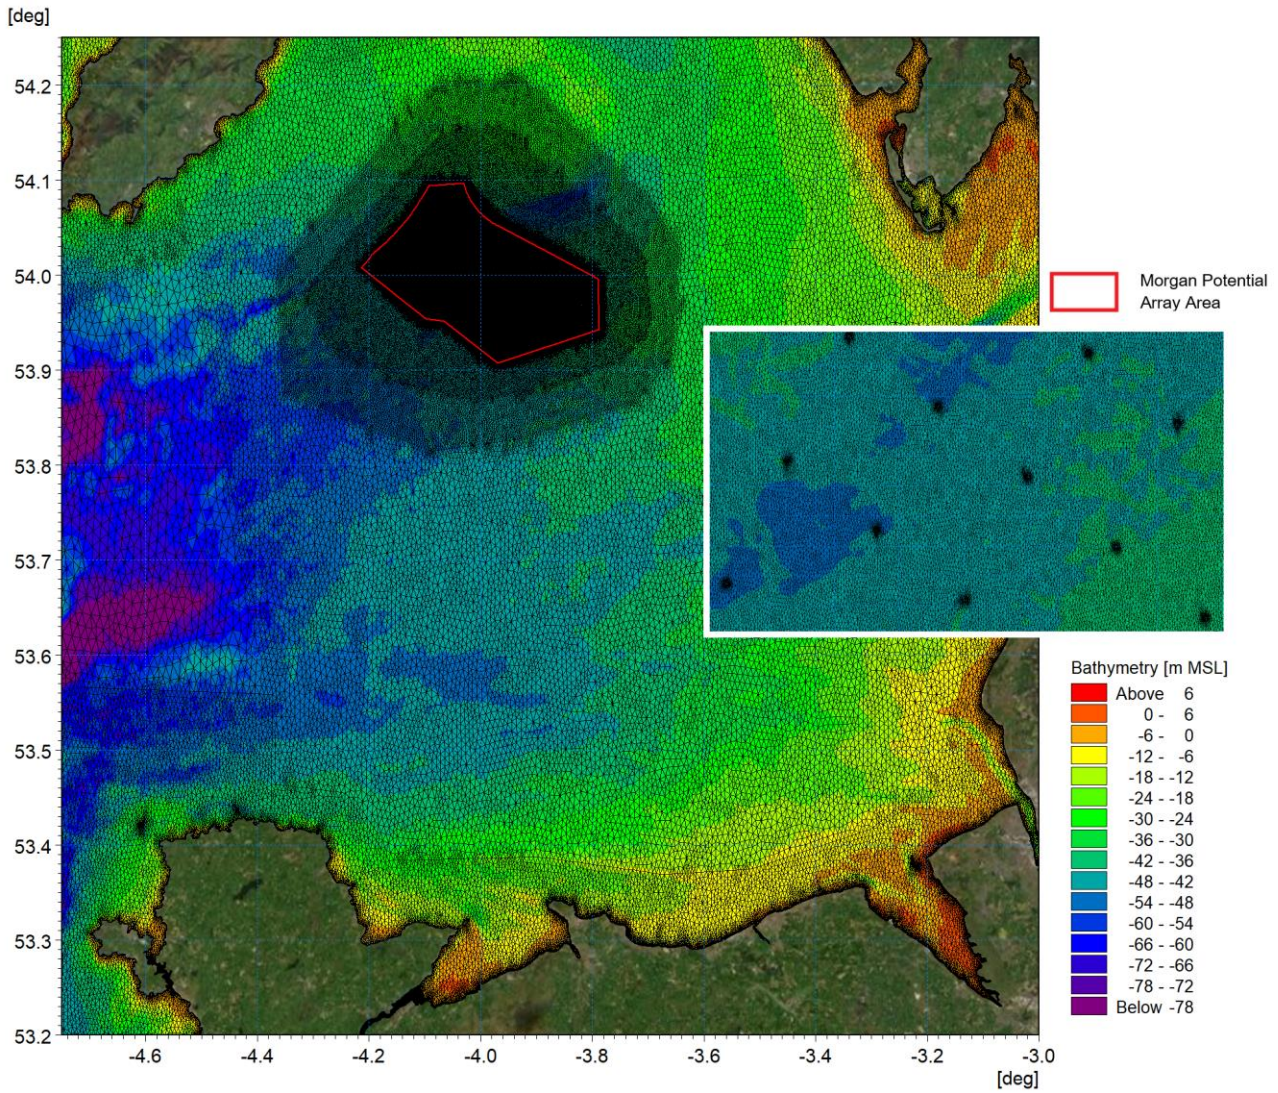


Figure 1.6: Model mesh with section of Morgan Potential Array Area inset.

Hydrography

1.3.5.7 The UKHO states that the mean tidal range at the Standard Port of Holyhead is approximately 3.65 m whilst at Douglas it is 4.55 m. The tidal characteristics shown in Table 1.5 in metres referenced to Chart Datum (CD).

Table 1.5: Tidal levels at Standard Ports.

Tidal level (m CD)	Holyhead	Douglas
LAT	0.0	-0.3
Mean Low Water Springs (MLWS)	0.7	0.8
Mean Low Water Neaps (MLWN)	2.0	2.4
Mean Sea Level (MSL)	3.3	3.8
Mean High Water Neaps (MHWN)	4.4	5.4
Mean High Water Springs (MHWS)	5.6	6.9
Highest Astronomical Tide (HAT)	6.3	7.9

1.3.5.8 The semi-diurnal tides are the dominant physical process in the Irish Sea moving into the Irish Sea from the Atlantic Ocean through both the North Channel and St. George's Channel. The tidal range in the Irish Sea is highly variable with the range in Liverpool Bay exceeding 10 m on the largest spring tides, the second largest in Britain.

1.3.5.9 The tidal flow simulations which form the basis of the study were undertaken using the MIKE21 FM flexible mesh modelling system. The FM Module is a two-dimensional, depth averaged hydrodynamic model which simulates the water level variations and flows in response to a variety of forcing functions in lakes, estuaries and coastal areas. The water levels and flows are resolved on a mesh covering the area of interest when provided with bathymetry, bed resistance coefficient, hydrodynamic boundary conditions, etc.

1.3.5.10 The tidal model was driven using boundary conditions extracted from RPS' Tide and Storm Surge Forecast (TSSF) model of Irish coastal waters (RPS, 2018), the extent and bathymetry of which is illustrated in Figure 1.7. This model was also developed using flexible mesh technology with the mesh size (model resolution) varying from circa 24 km along the offshore Atlantic boundary to circa 200 m around the Irish coastline. These boundaries were fully defined 'flather' boundaries for which both surface elevation and current vectors are specified.

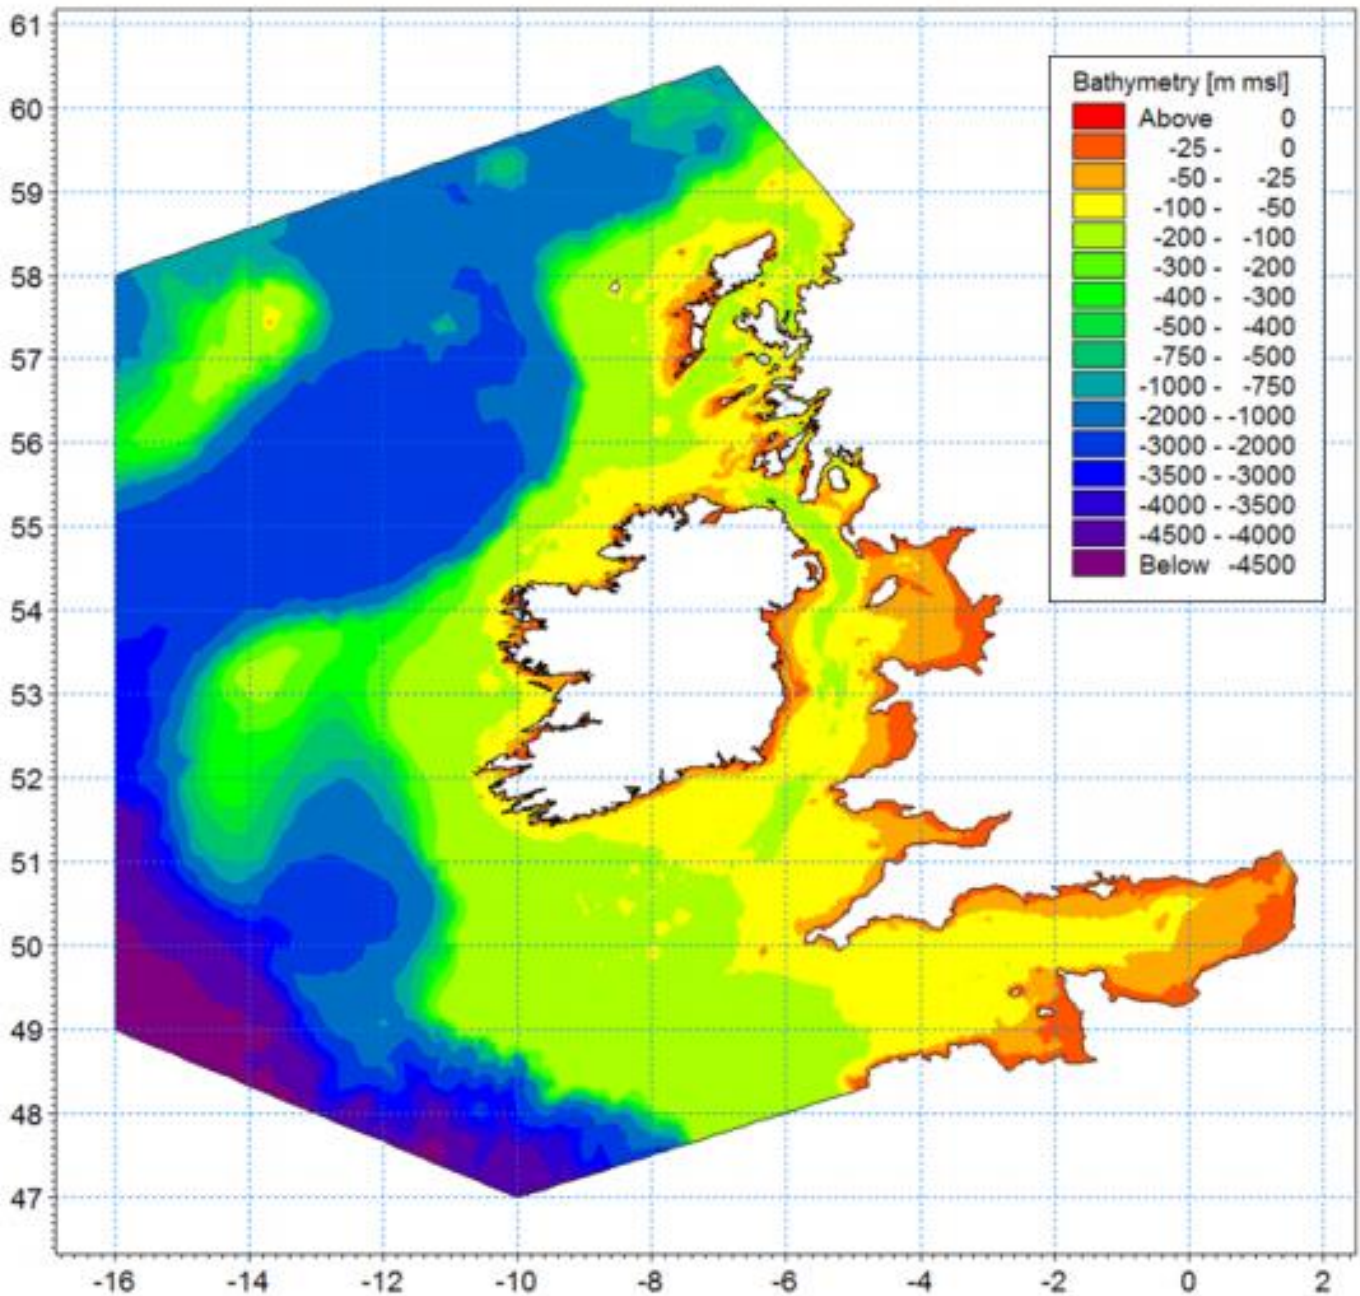


Figure 1.7: Extent and bathymetry of Irish Seas model.

1.3.5.11 A large amount of hydrometric data was available across the model domain as detailed in Table 1.3. The principal resources such as Admiralty tidal harmonics, BODC and CCO are illustrated in Figure 1.8, with a range of these datasets being implemented during model calibration. The locations of the selection of calibration data presented in this document for tidal flow is shown in Figure 1.9.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

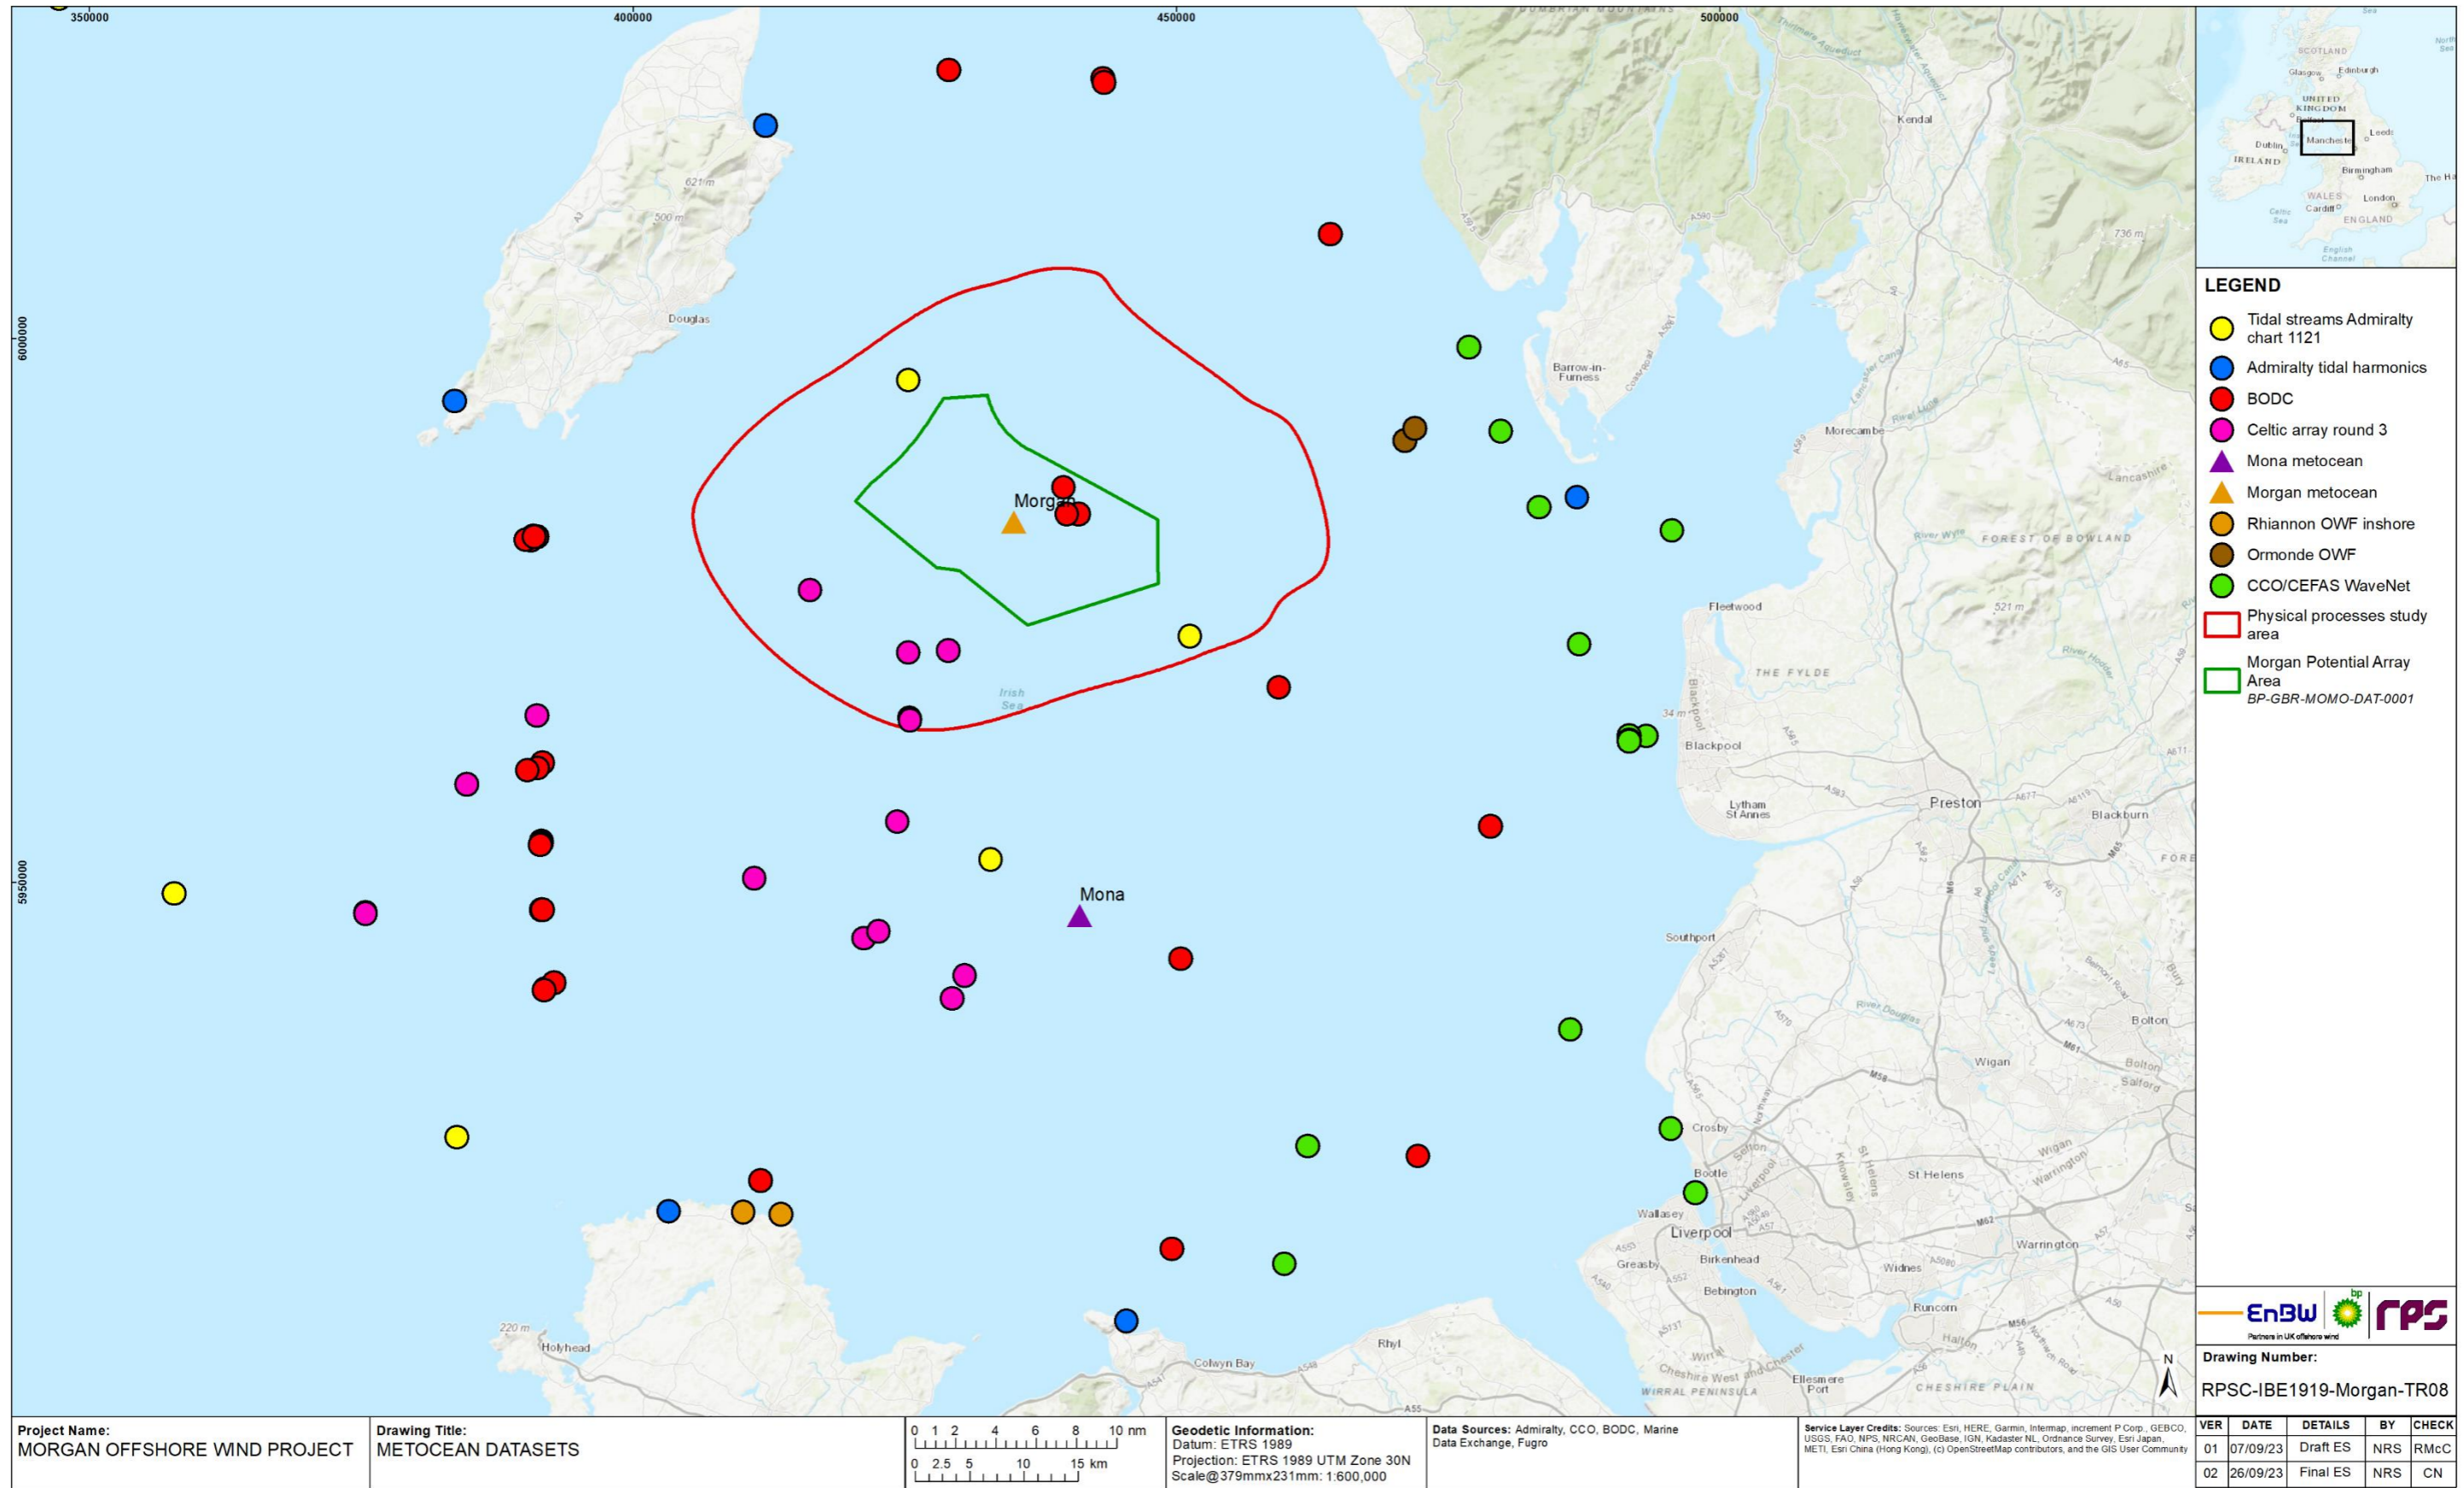


Figure 1.8: Availability of metocean datasets across the east Irish Sea.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

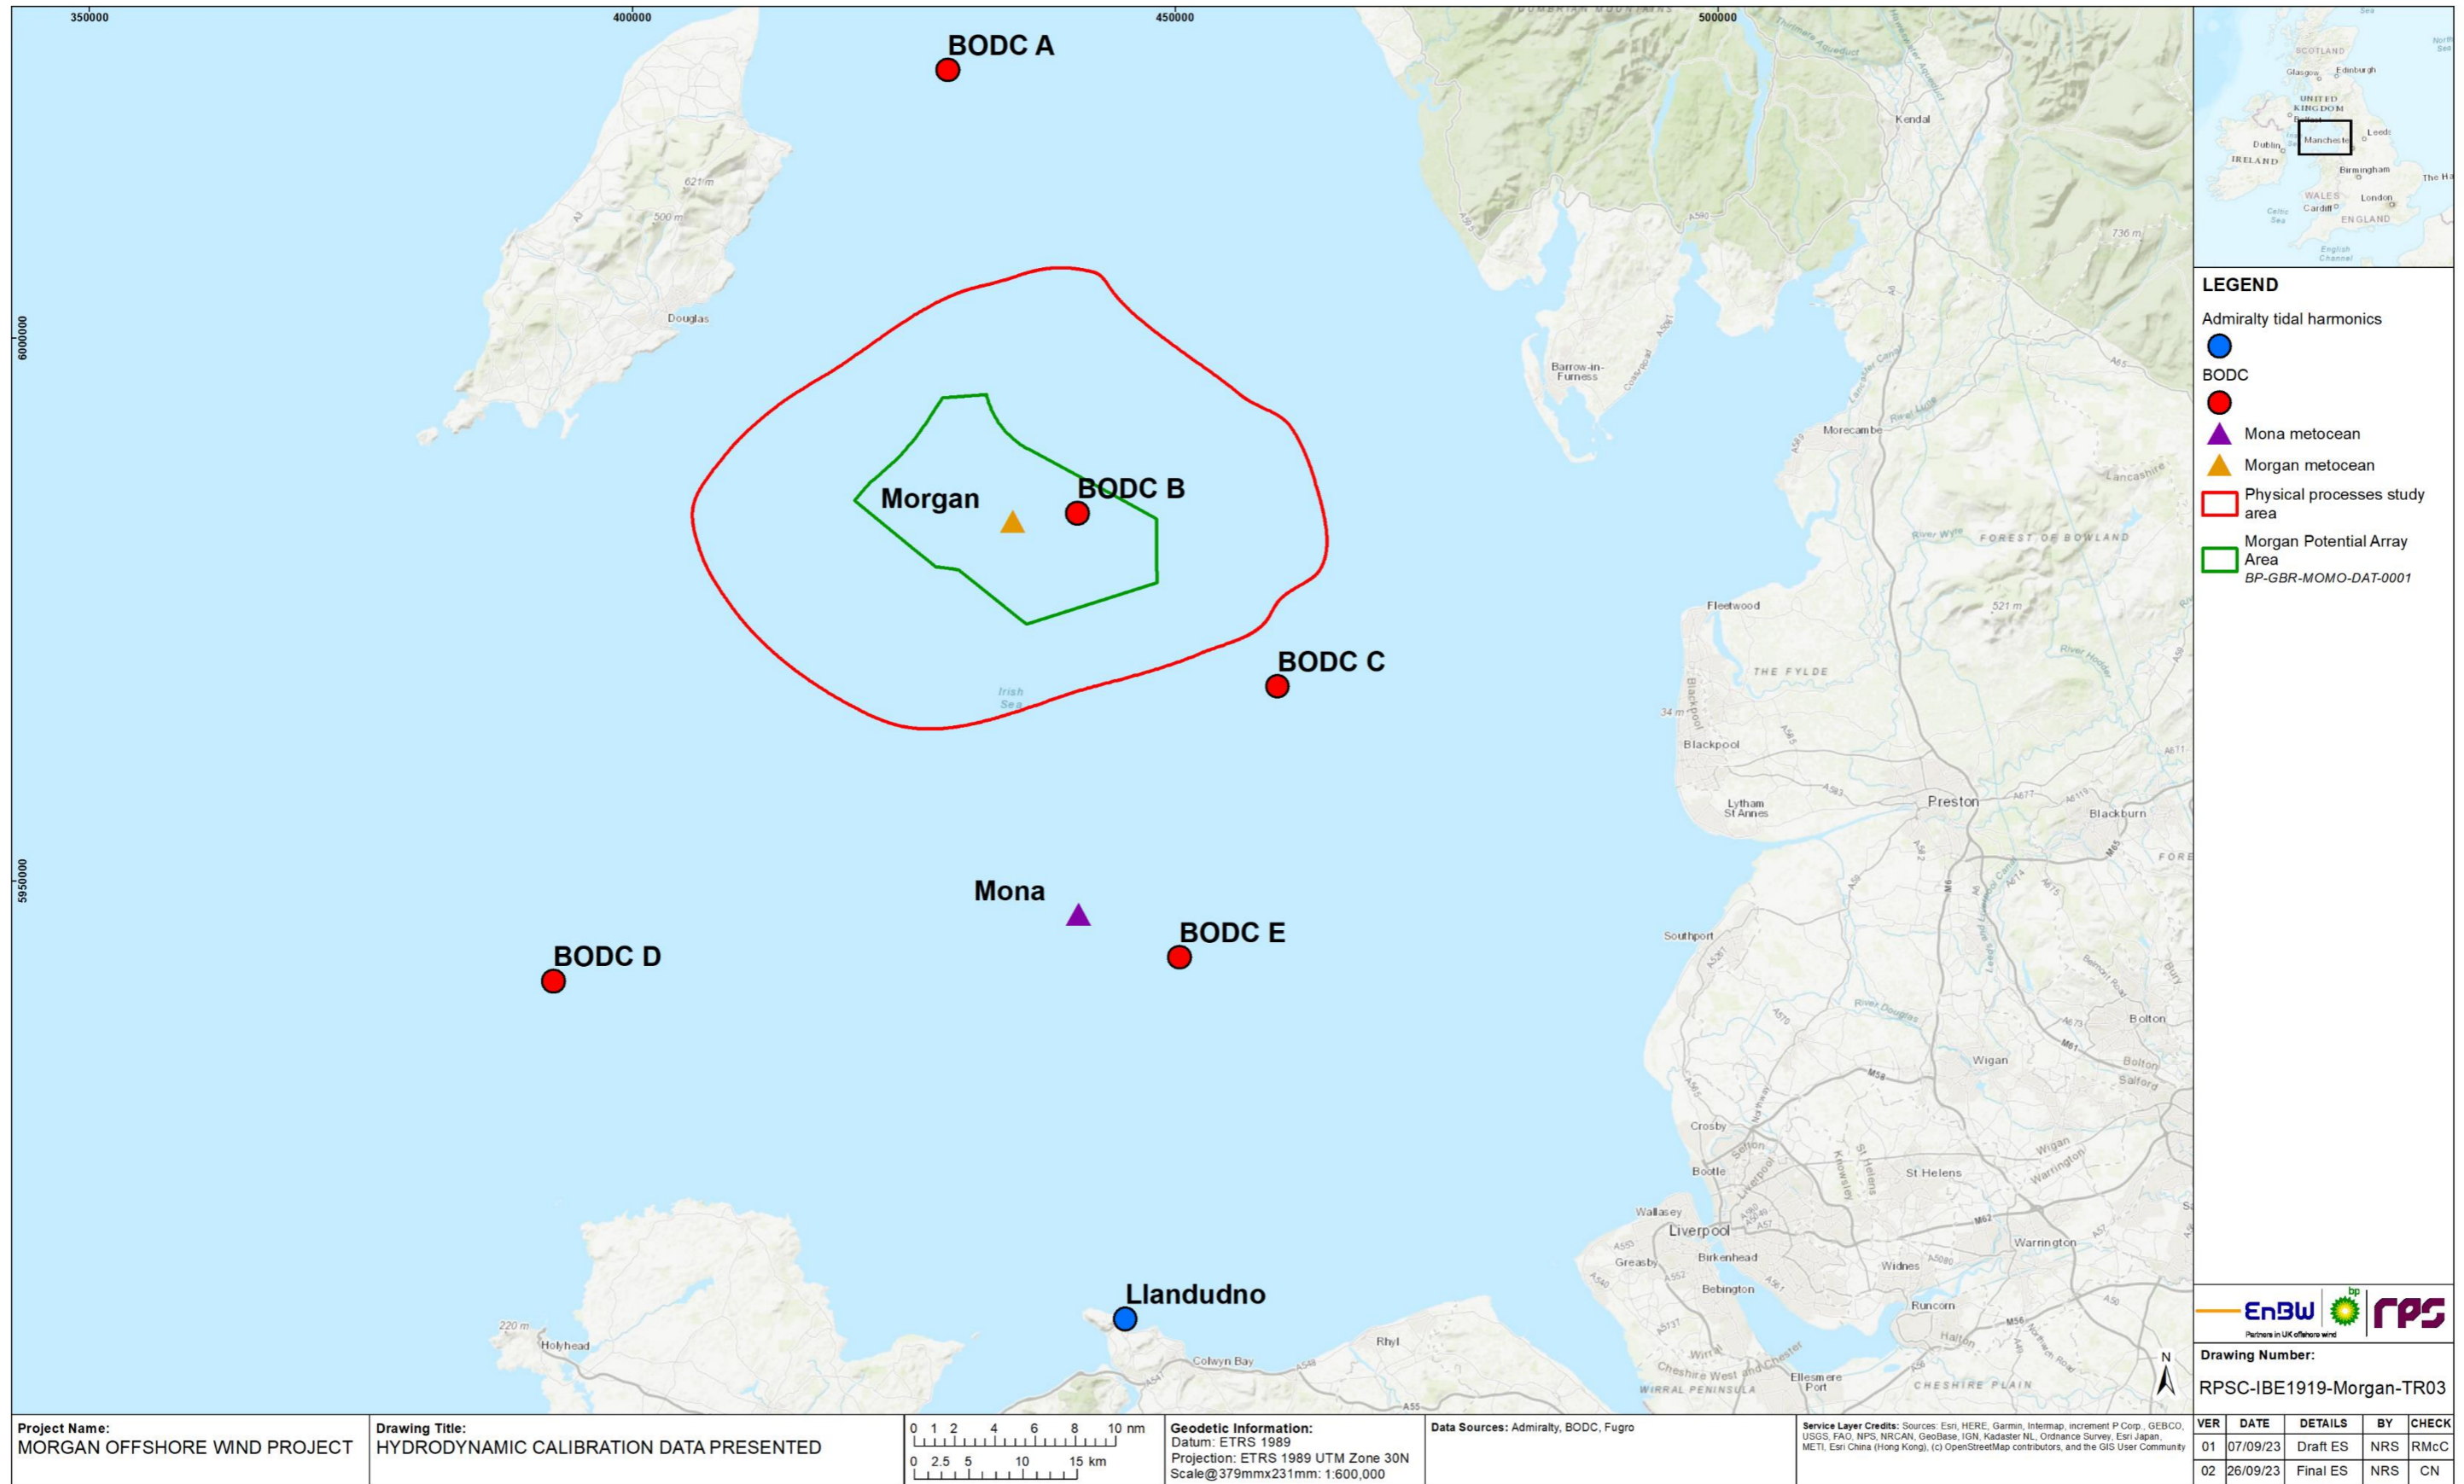


Figure 1.9: Location of calibration data presented.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

- 1.3.5.12 Figure 1.10 shows the comparison of the modelled (red) and Admiralty tidal levels predicted from harmonic analysis (blue) at Llandudno. The model correlated well through both spring and neap tidal phases. The comparative study undertaken to quantify the potential changes in tidal currents was undertaken during both and neap spring tides to ensure a wide range of tidal conditions were applied in the modelling. The validation data presented therefore includes both tidal phases for each location.
- 1.3.5.13 For site specific calibration data, Morgan metocean plots are presented first illustrating spring and neap tides within the Morgan Potential Array Area. Each plot displays the current speed data on the left axis and the current direction on the right axis. The modelled depth average current speed is shown by a red trace and current direction by an orange trace. The measured data was collected at various water depths noted within the legend.
- 1.3.5.14 The Morgan and Mona tidal current data are presented in Figure 1.11 to Figure 1.14 and show similar trends in that that current speeds during neap tides are half of the speed during spring tides. As well as the flood tide approaching from an easterly direction with the ebb tide being slightly weaker. The modelled data fits within the range of the Mona and Morgan measured data following similar tidal flow patterns.
- 1.3.5.15 Figure 1.15 to Figure 1.17 show the comparison between the Aanderaa Seaguard (ASG) and Nortek Signature (SIG) measuring devices against modelled metocean data during different tidal phases. The two devices were deployed at the Morgan site and the depth averaged (DA) current speed and direction are reported. The model current directionality correlates between both the ASG and SIG devices however current speeds between the model and ASG are more correlated than with the SIG device during the spring tide. In the neap tidal phase, the device speed and direction are within the range of the modelled data however the correlation is weaker than during the spring tidal phase. Comparisons of surface elevation between the ASG and modelled data are illustrated for both spring and neap tidal phases in Figure 1.16 and Figure 1.18.
- 1.3.5.16 For each location of BODC data, a pair of plots are presented firstly relating to spring tides and secondly neap tides. In each plot the current speed data is presented on the left axis whilst the current direction is presented to the right. The modelled depth average current speed is shown by a red trace and current direction by an orange trace. The measured data was collected at various water depths noted within the legend.
- 1.3.5.17 Site A presented in Figure 1.20 indicated that the flood tide which approaches the Morgan Generation Assets from the northeast direction and is more dominant than the ebb tide. Peak neap tidal current speeds are typically half of those experienced during spring tide. The modelled data largely lie within the range of the measured data and replicates the asymmetric tidal flows patterns.
- 1.3.5.18 This is also the case for site C shown in Figure 1.23 and Figure 1.24 for spring and neap respectively. Current directions and the dominance of flood tides are replicated with the model domain. Tidal currents at site D are more strongly bi-directional as flow is accelerated around Anglesey as illustrated in Figure 1.25 and Figure 1.26. It is noted that there is a wide variation in the measured tidal currents with respect to depth and 70m at this location would represent near bed conditions. The model does however correlate in terms of current directionality and the dominance of flood tide currents.
- 1.3.5.19 Finally, at the Morgan Potential Array Area, site B, the tidal current speeds and directions are well represented by the model. This is the case for both neap, Figure 1.21, and spring, Figure 1.22, tidal flows. The calibration data demonstrates that the

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

numerical model simulates the tidal currents in the region. This includes the representation of the dominant flood tide.

1.3.5.20 To provide a representation of tidal flows across the domain Figure 1.29 and Figure 1.30 illustrates tidal patterns during peak ebb and flood on a neap tide whilst Figure 1.31 and Figure 1.32 illustrates the spring tide. These points in the tidal cycle are used as reference for the assessment of potential impacts and changes to tidal flows due to the Morgan Generation Assets infrastructure, as defined in the PEIR. Also, for reference, the designated sites with relevant physical processes features which have been identified for assessment in Volume 2, Chapter 1: Physical processes of the Environmental Statement are shown in each figure with a pink outline denoting the boundary. The period selected for the comparative study represents a spring tide on the upper end of the range experienced in the region; this was to ensure the study included the greatest variation in tidal conditions, (i.e. water depth and current speed).

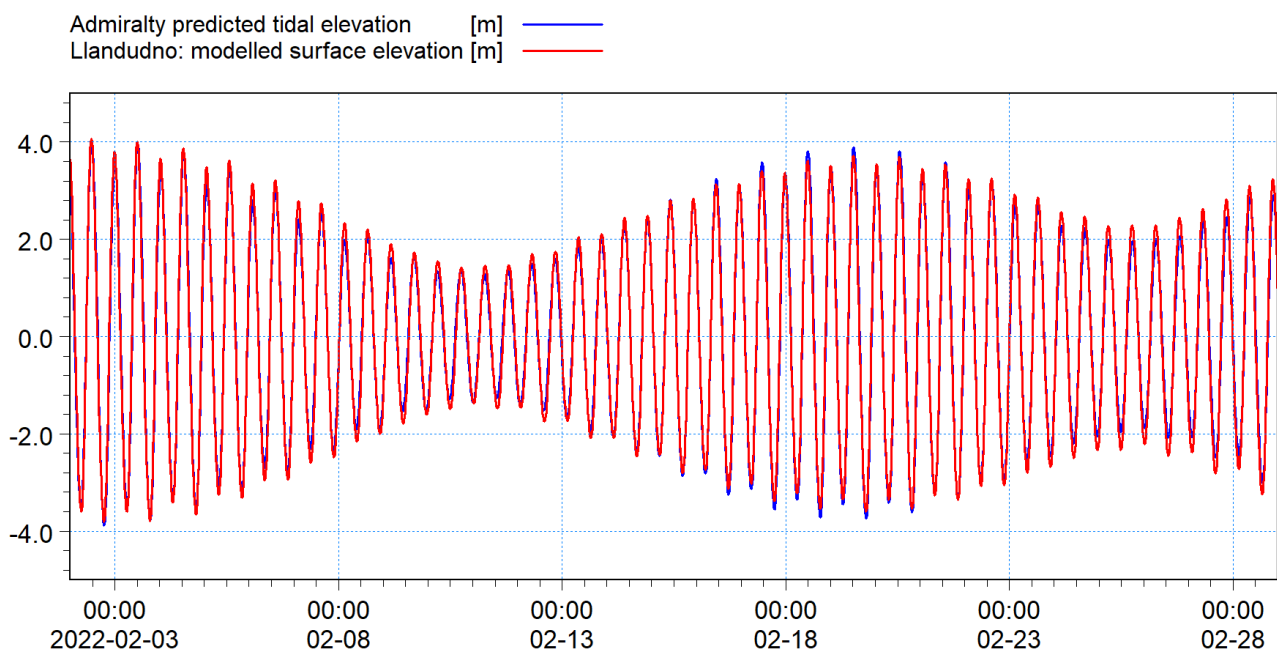


Figure 1.10: Comparison of model and admiralty harmonic tide data for Llandudno.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

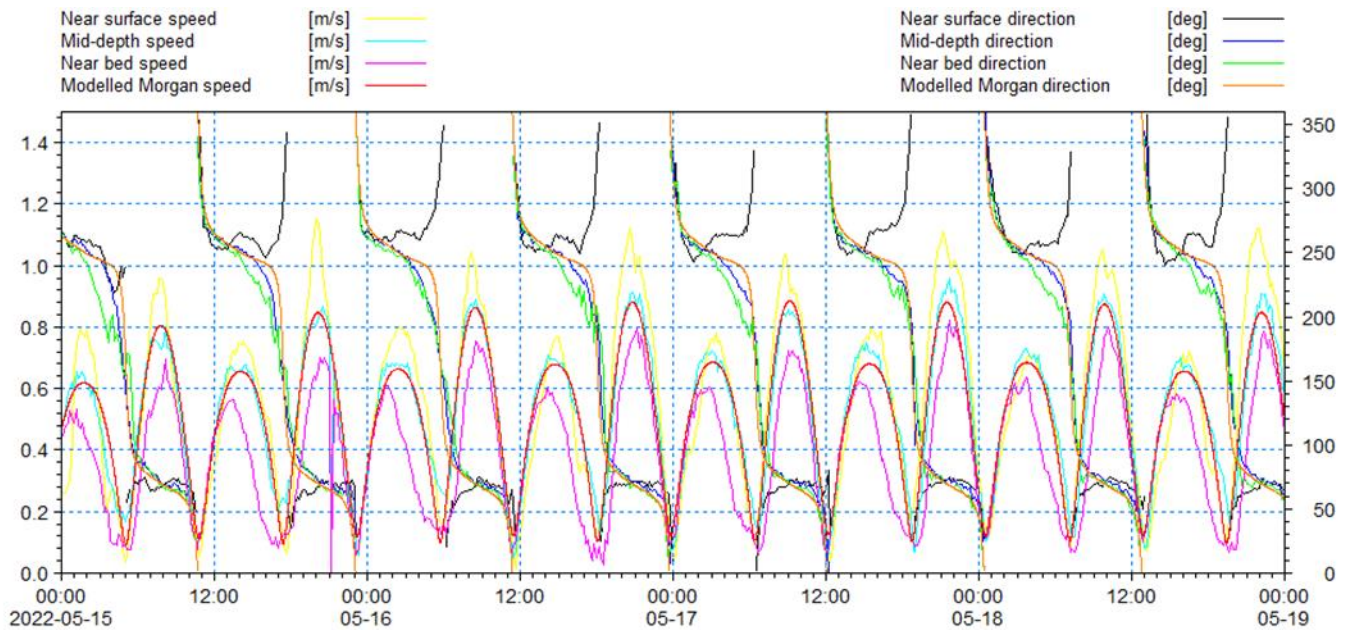


Figure 1.11: Comparison of model and recorded Morgan Metocean – current speed and direction spring.

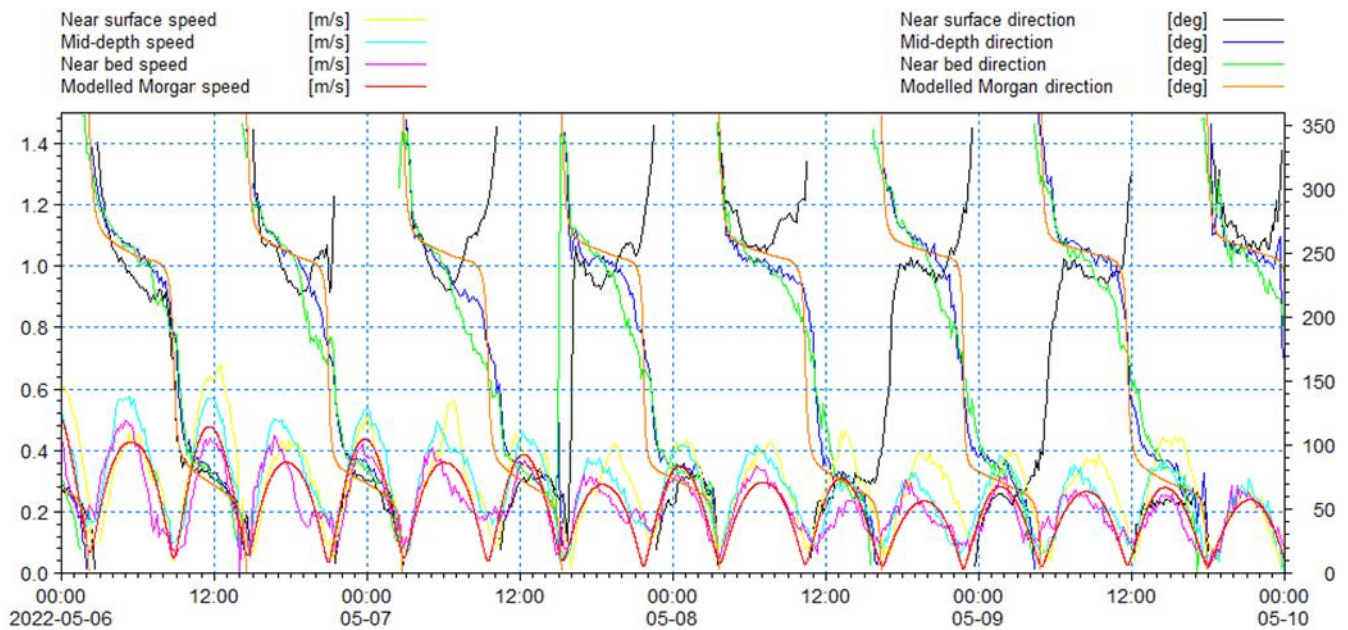


Figure 1.12: Comparison of model and recorded Morgan Metocean – current speed and direction neap.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

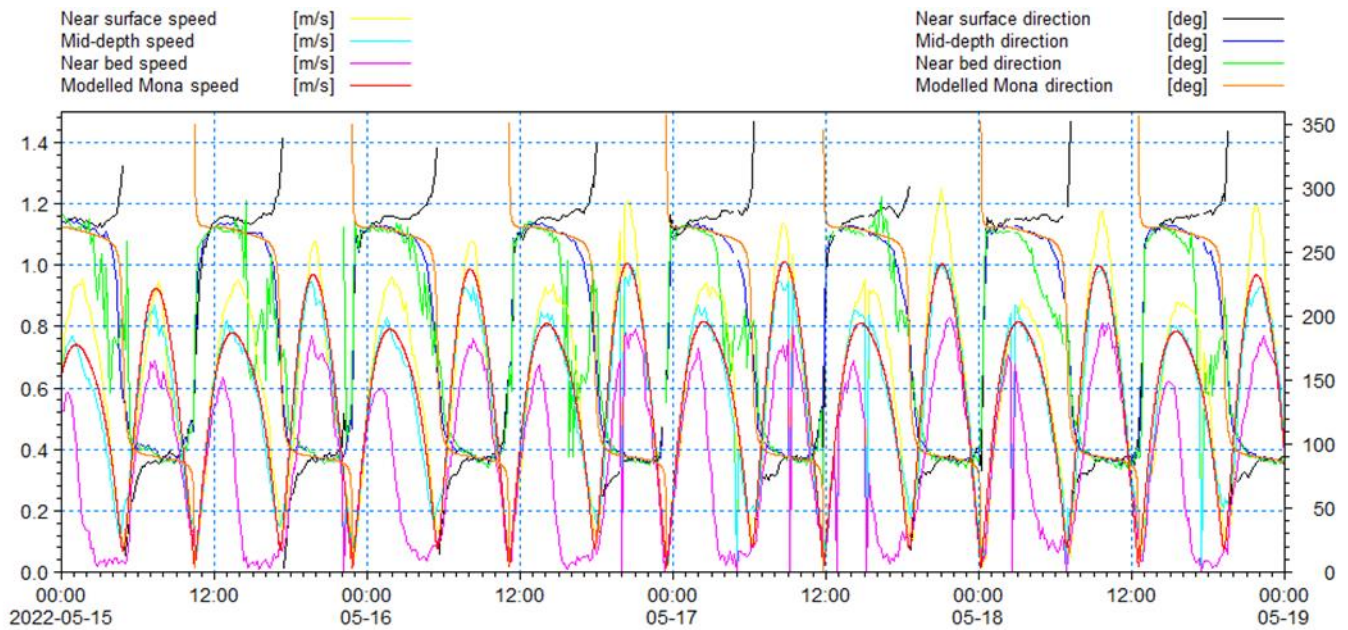


Figure 1.13: Comparison of model and recorded Mona Metocean – current speed and direction spring.

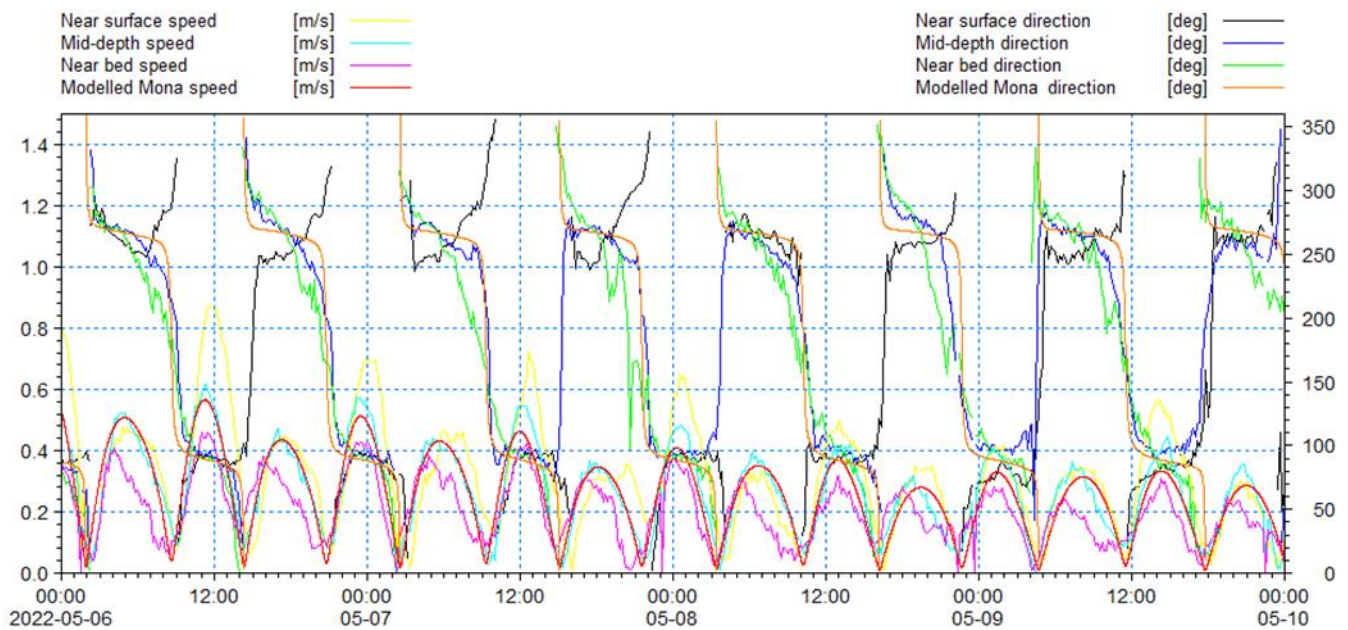


Figure 1.14: Comparison of model and recorded Mona Metocean – current speed and direction neap.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

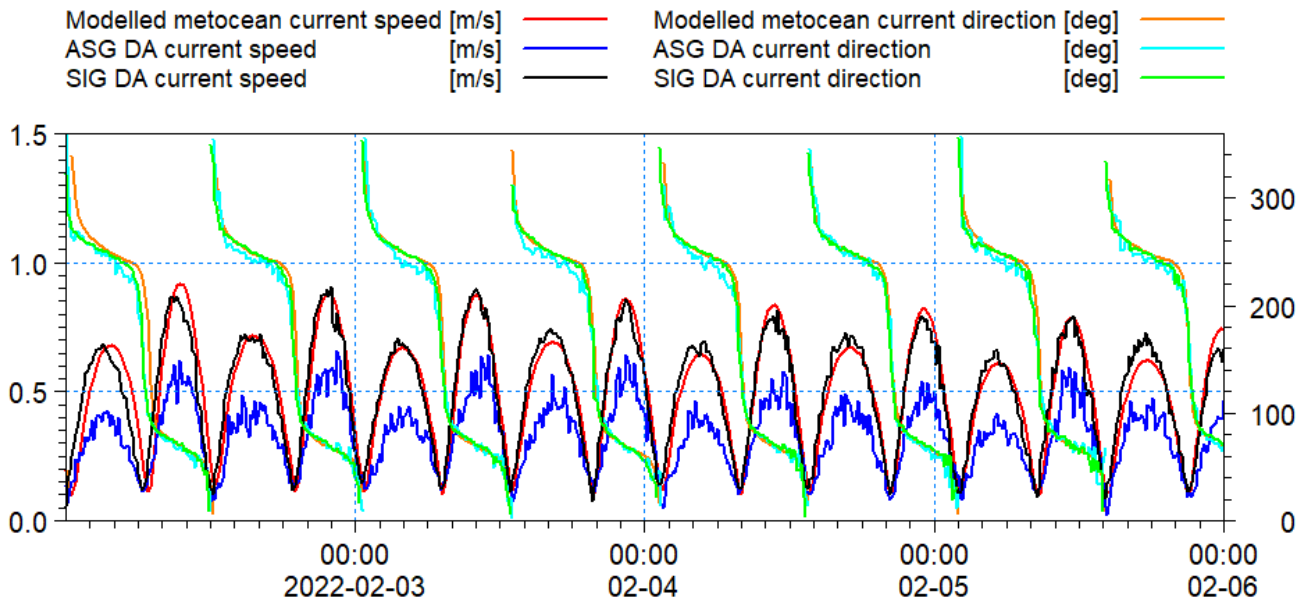


Figure 1.15: Comparison of modelled metocean and recorded DA ASG and SIG – current speed and direction spring.

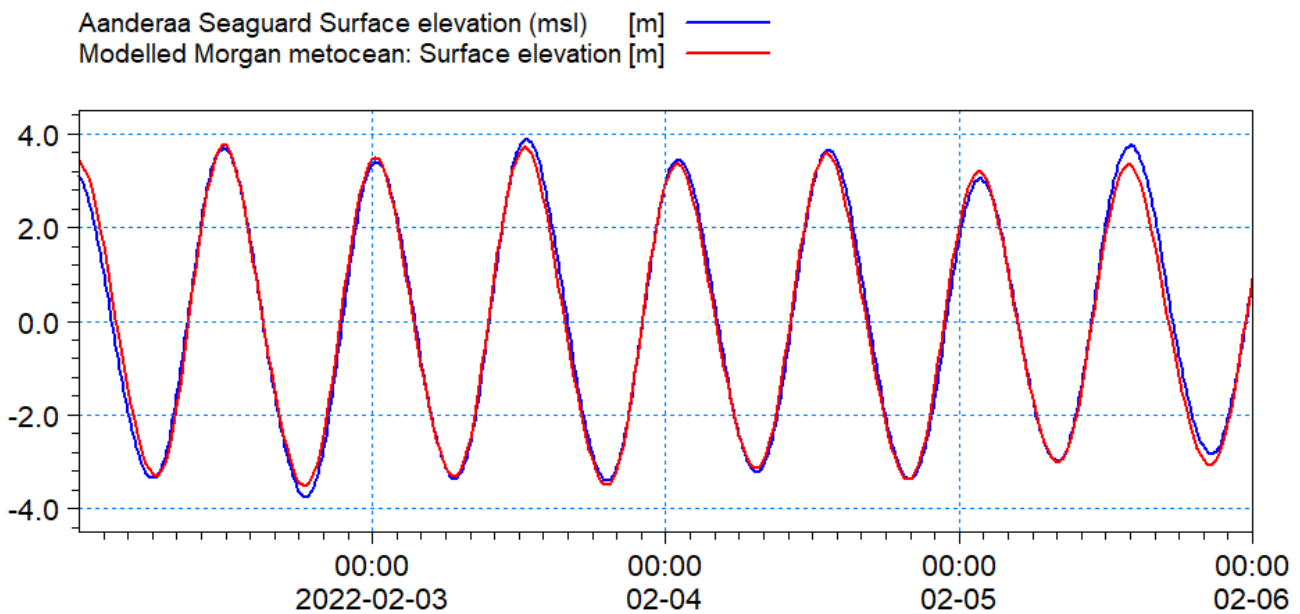


Figure 1.16: Comparison of modelled Morgan metocean and recorded ASG – spring surface elevation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

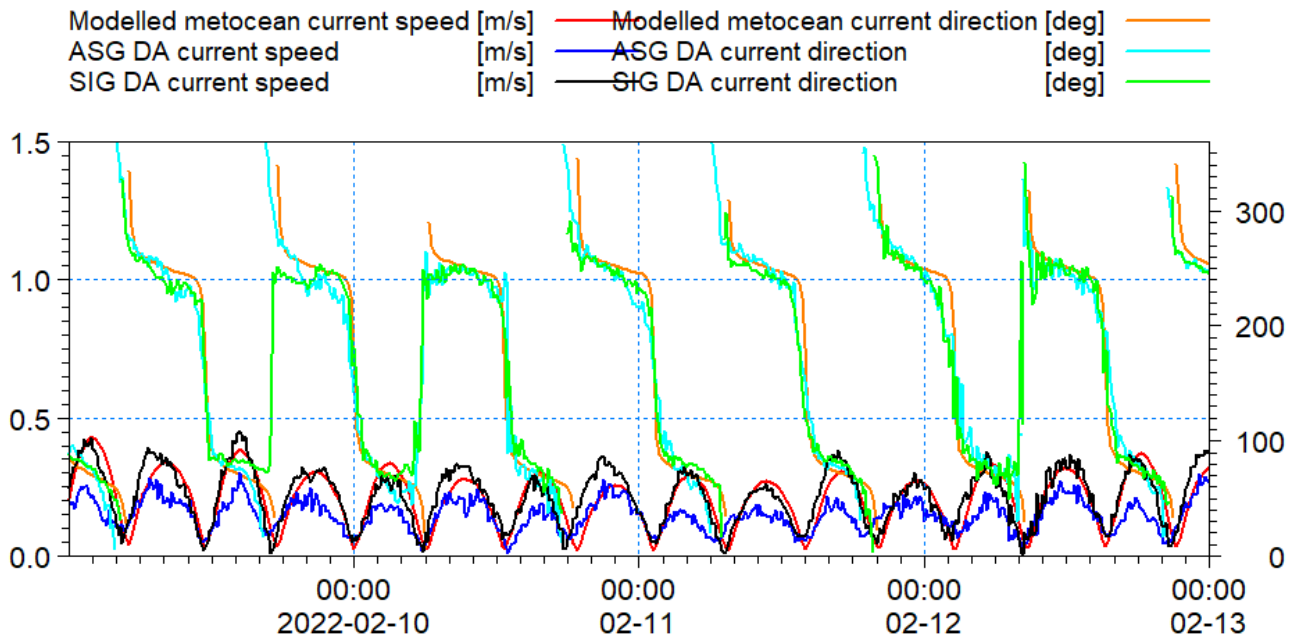


Figure 1.17: Comparison of modelled metocean and recorded DA ASG and SIG DA – current speed and direction neap.

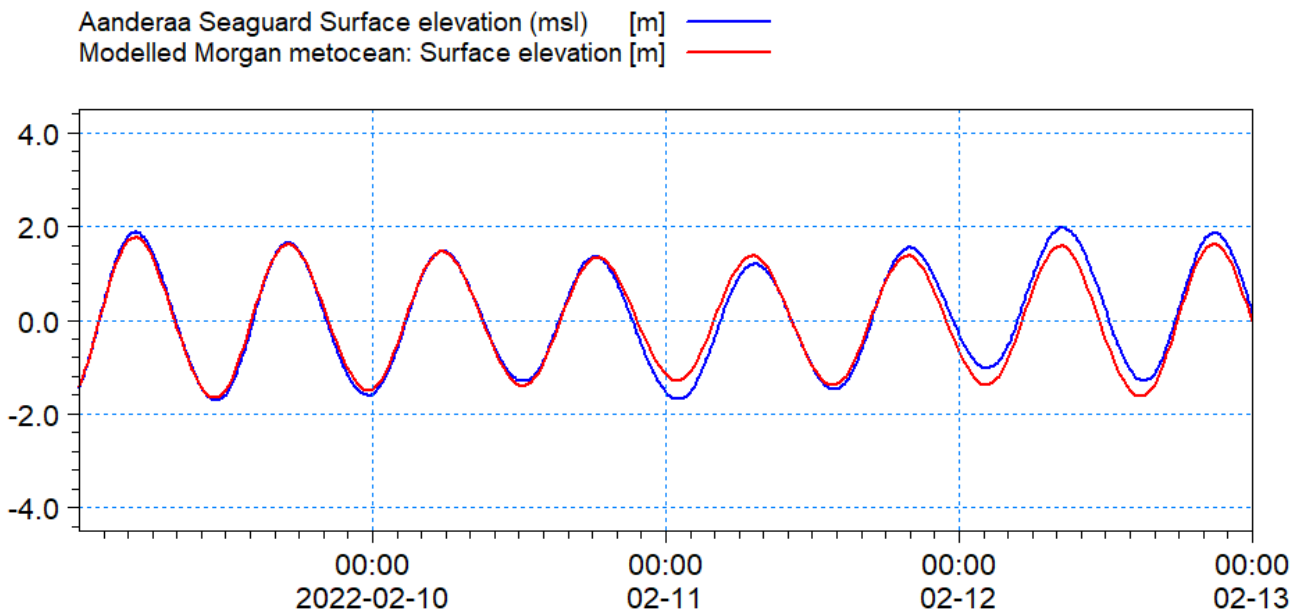


Figure 1.18: Comparison of modelled Morgan metocean and recorded ASG – neap surface elevation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

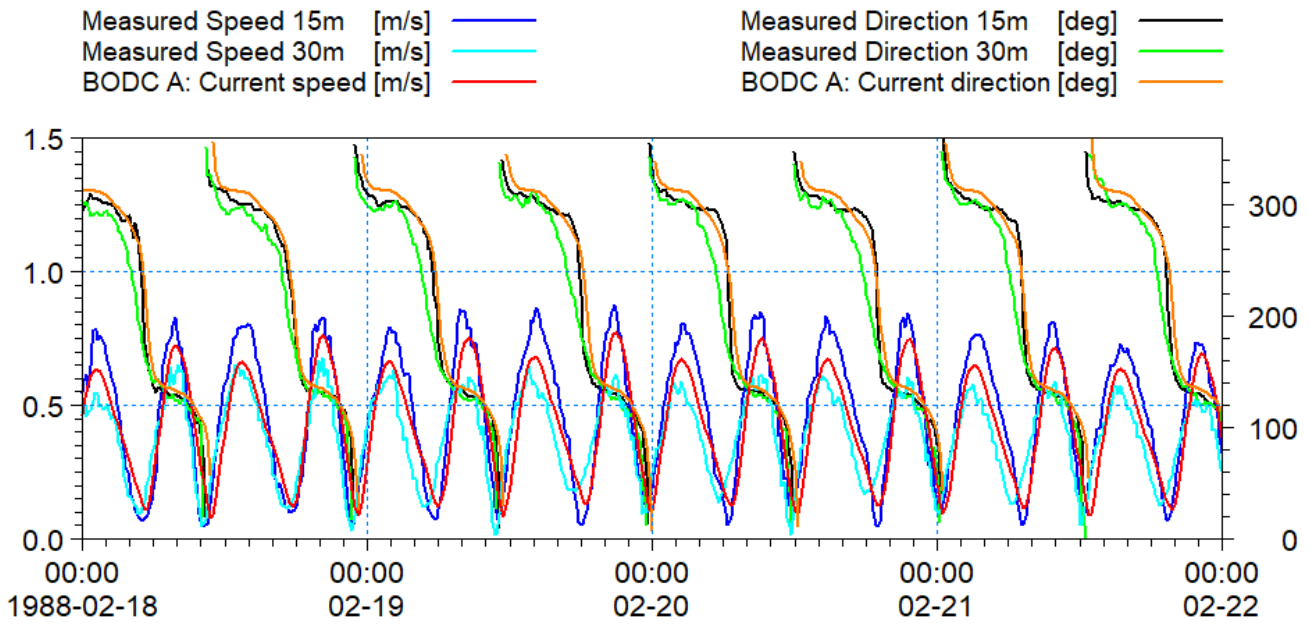


Figure 1.19: Comparison of model and recorded data BODC Location A – current speed and direction spring.

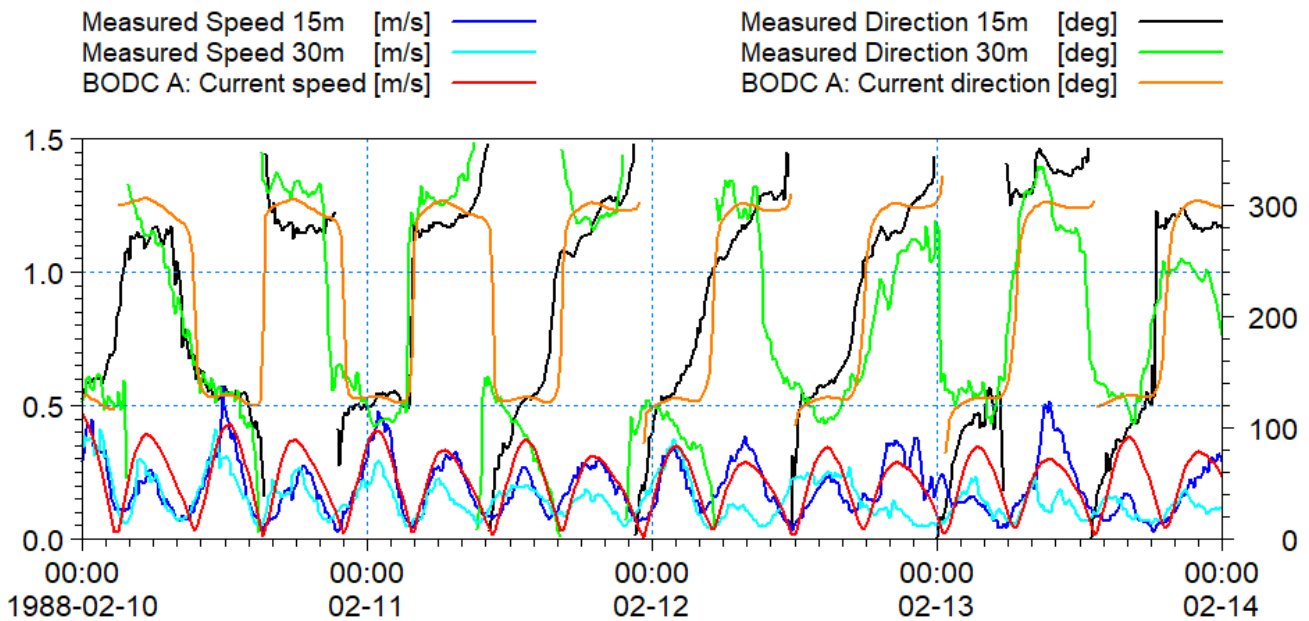


Figure 1.20: Comparison of model and recorded data BODC Location A – current speed and direction neap.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

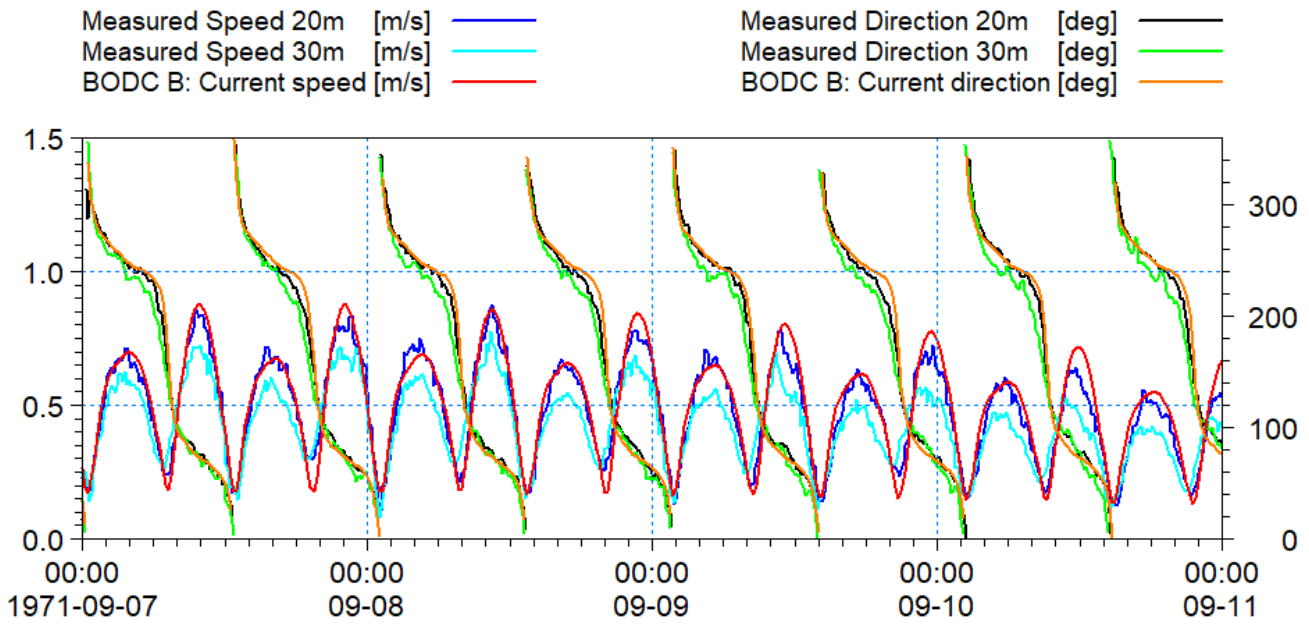


Figure 1.21: Comparison of model and recorded data BODC Location B – current speed and direction spring.

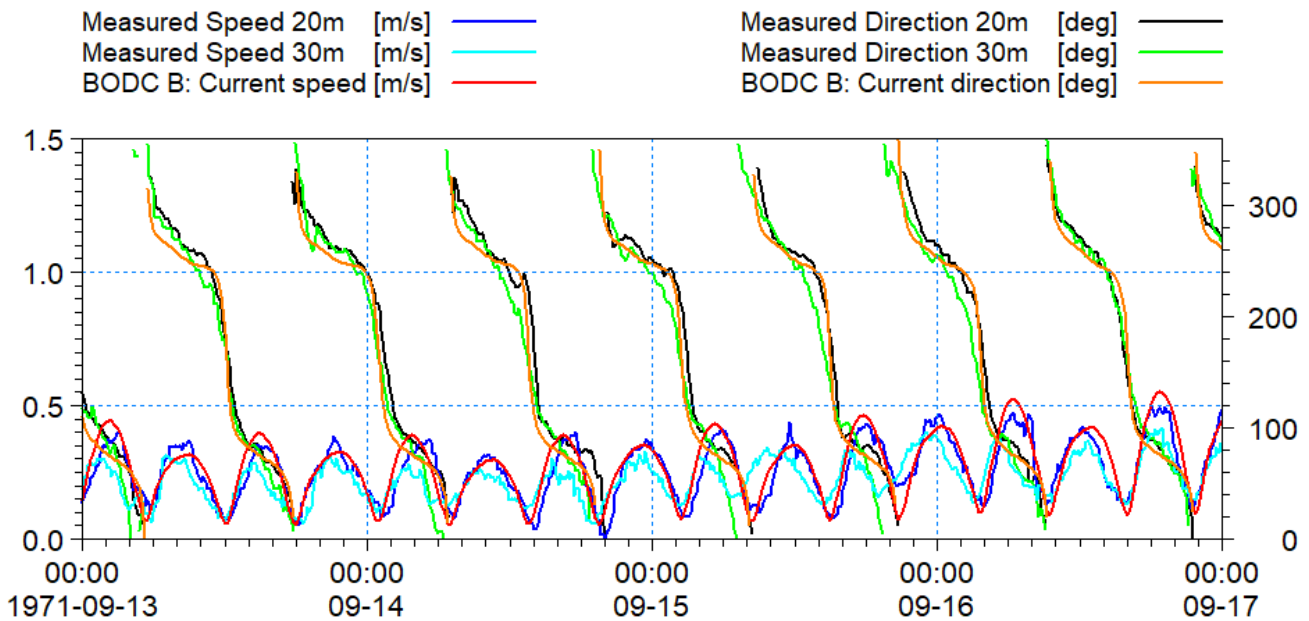


Figure 1.22: Comparison of model and recorded data BODC Location B – current speed and direction neap.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

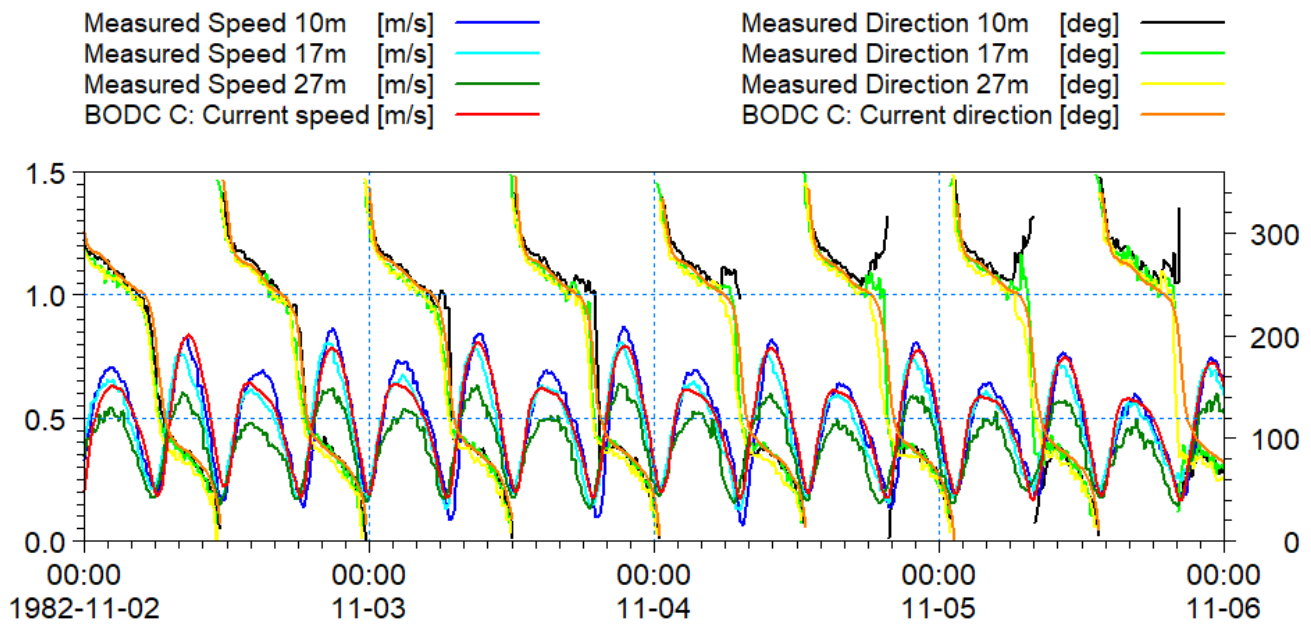


Figure 1.23: Comparison of model and recorded data BODC Location C – current speed and direction spring.

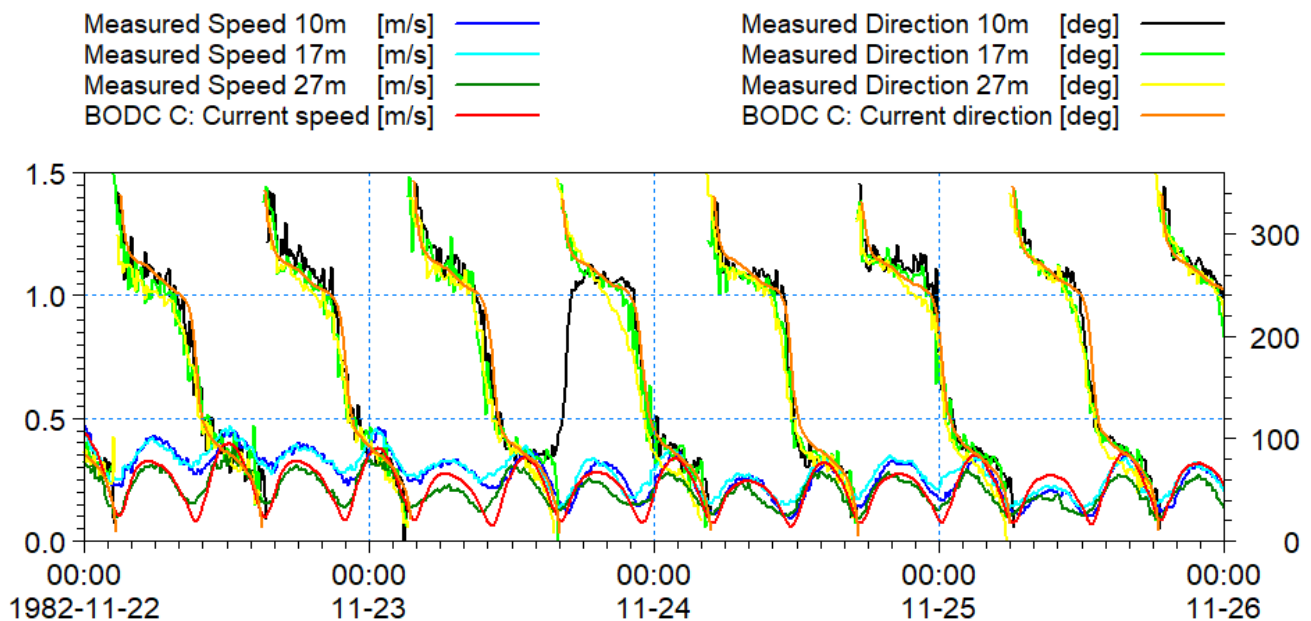


Figure 1.24: Comparison of model and recorded data BODC Location C – current speed and direction neap.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

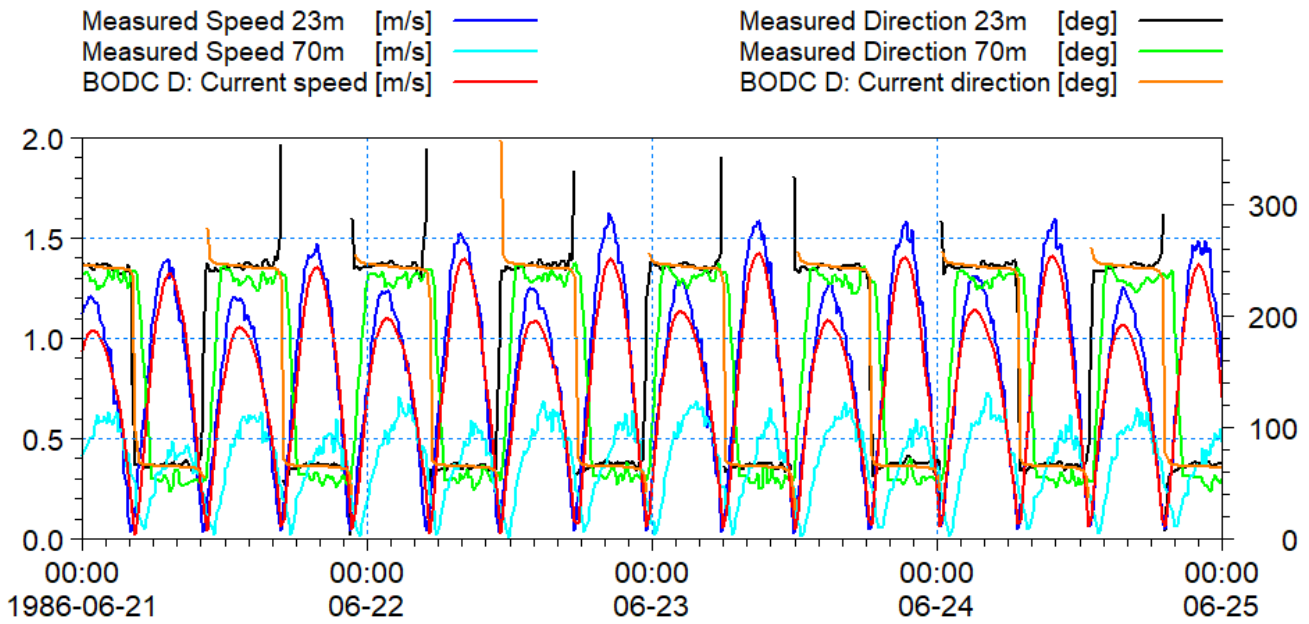


Figure 1.25: Comparison of model and recorded data BODC Location D – current speed and direction spring.

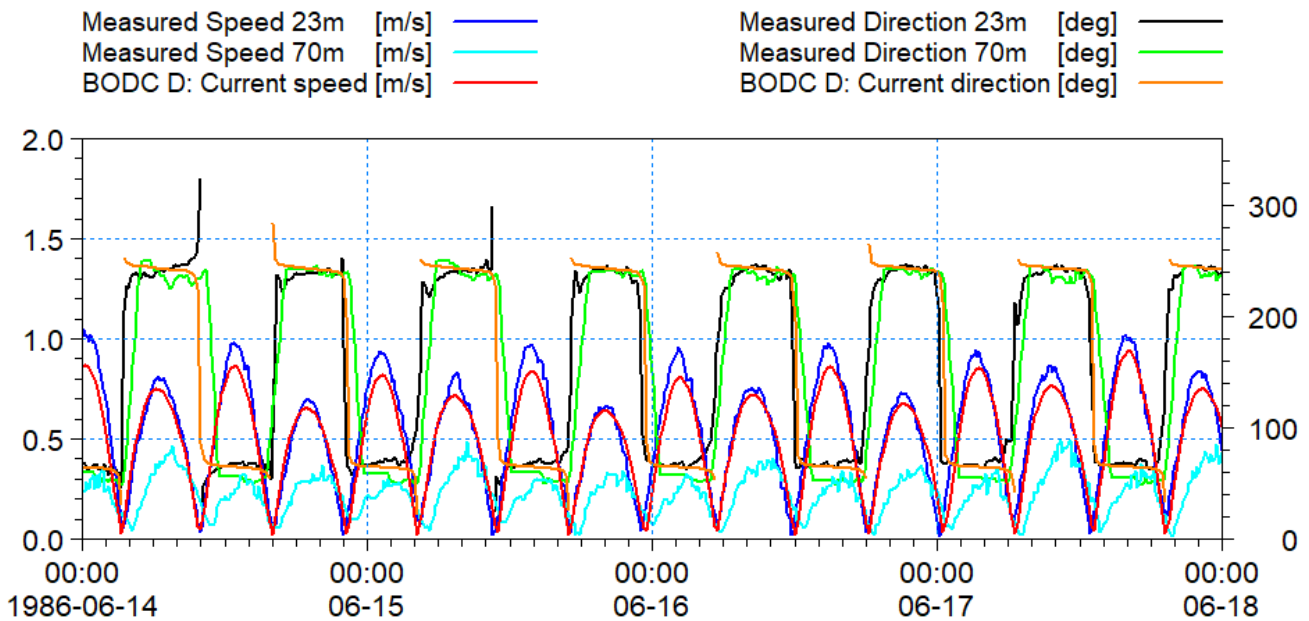


Figure 1.26: Comparison of model and recorded data BODC Location D – current speed and direction neap.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

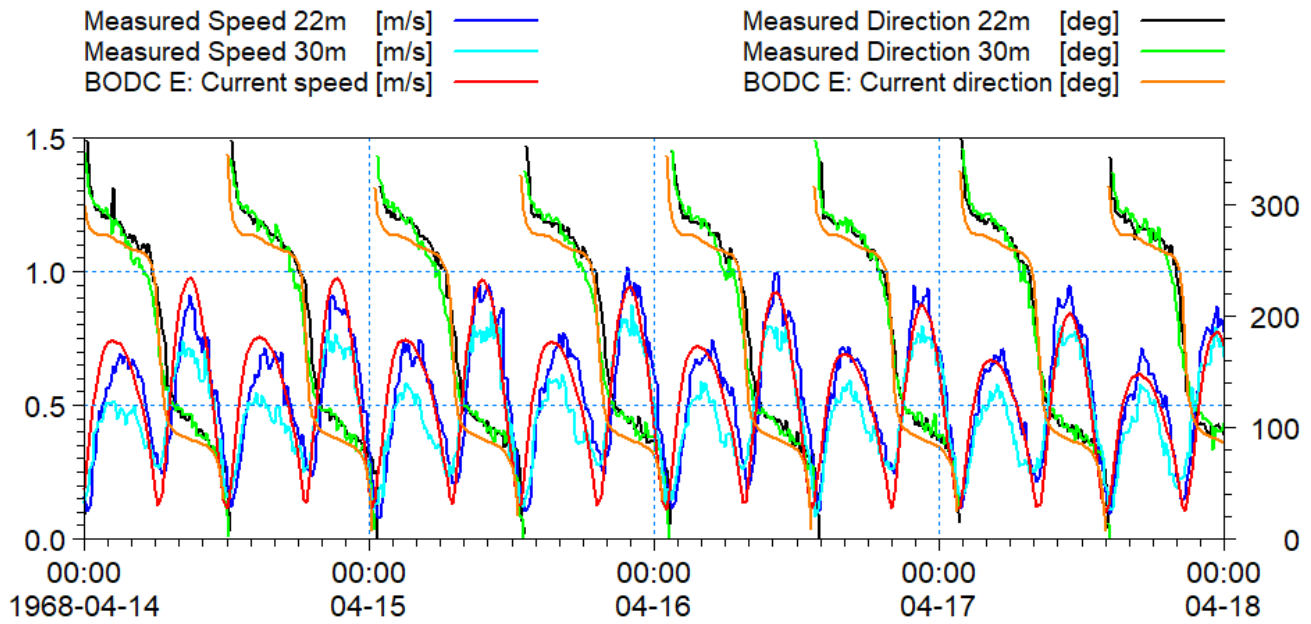


Figure 1.27: Comparison of model and recorded data BODC Location E – current speed and direction spring.

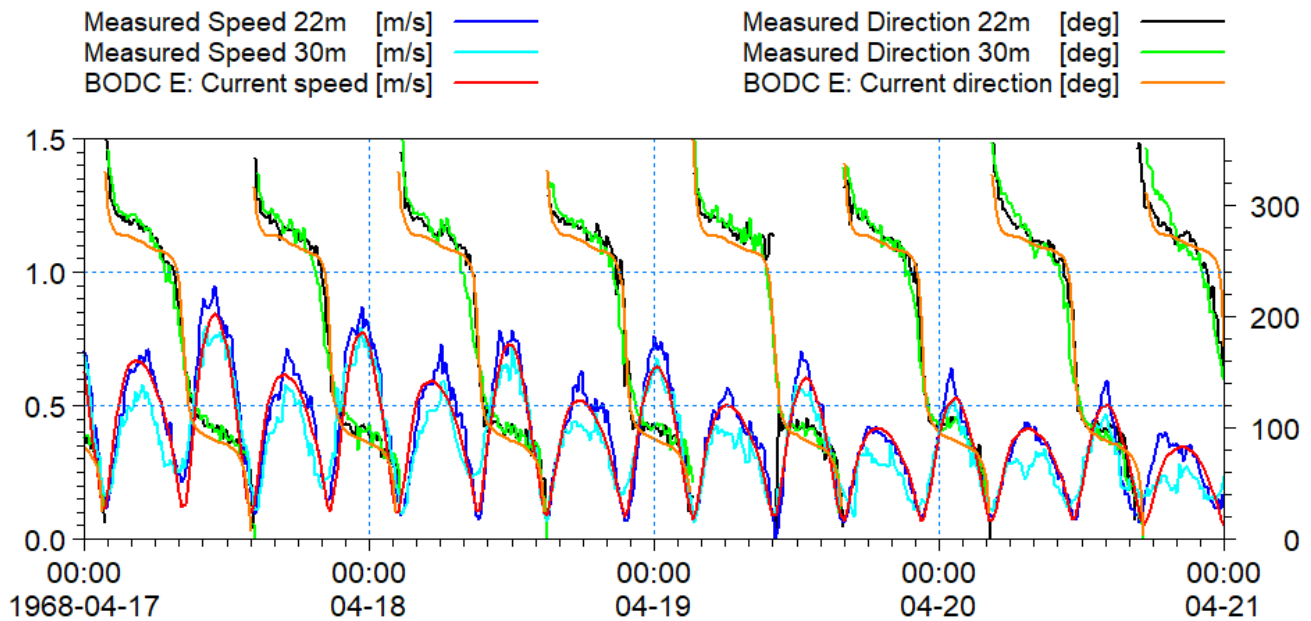


Figure 1.28: Comparison of model and recorded data BODC Location E – current speed and direction neap.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

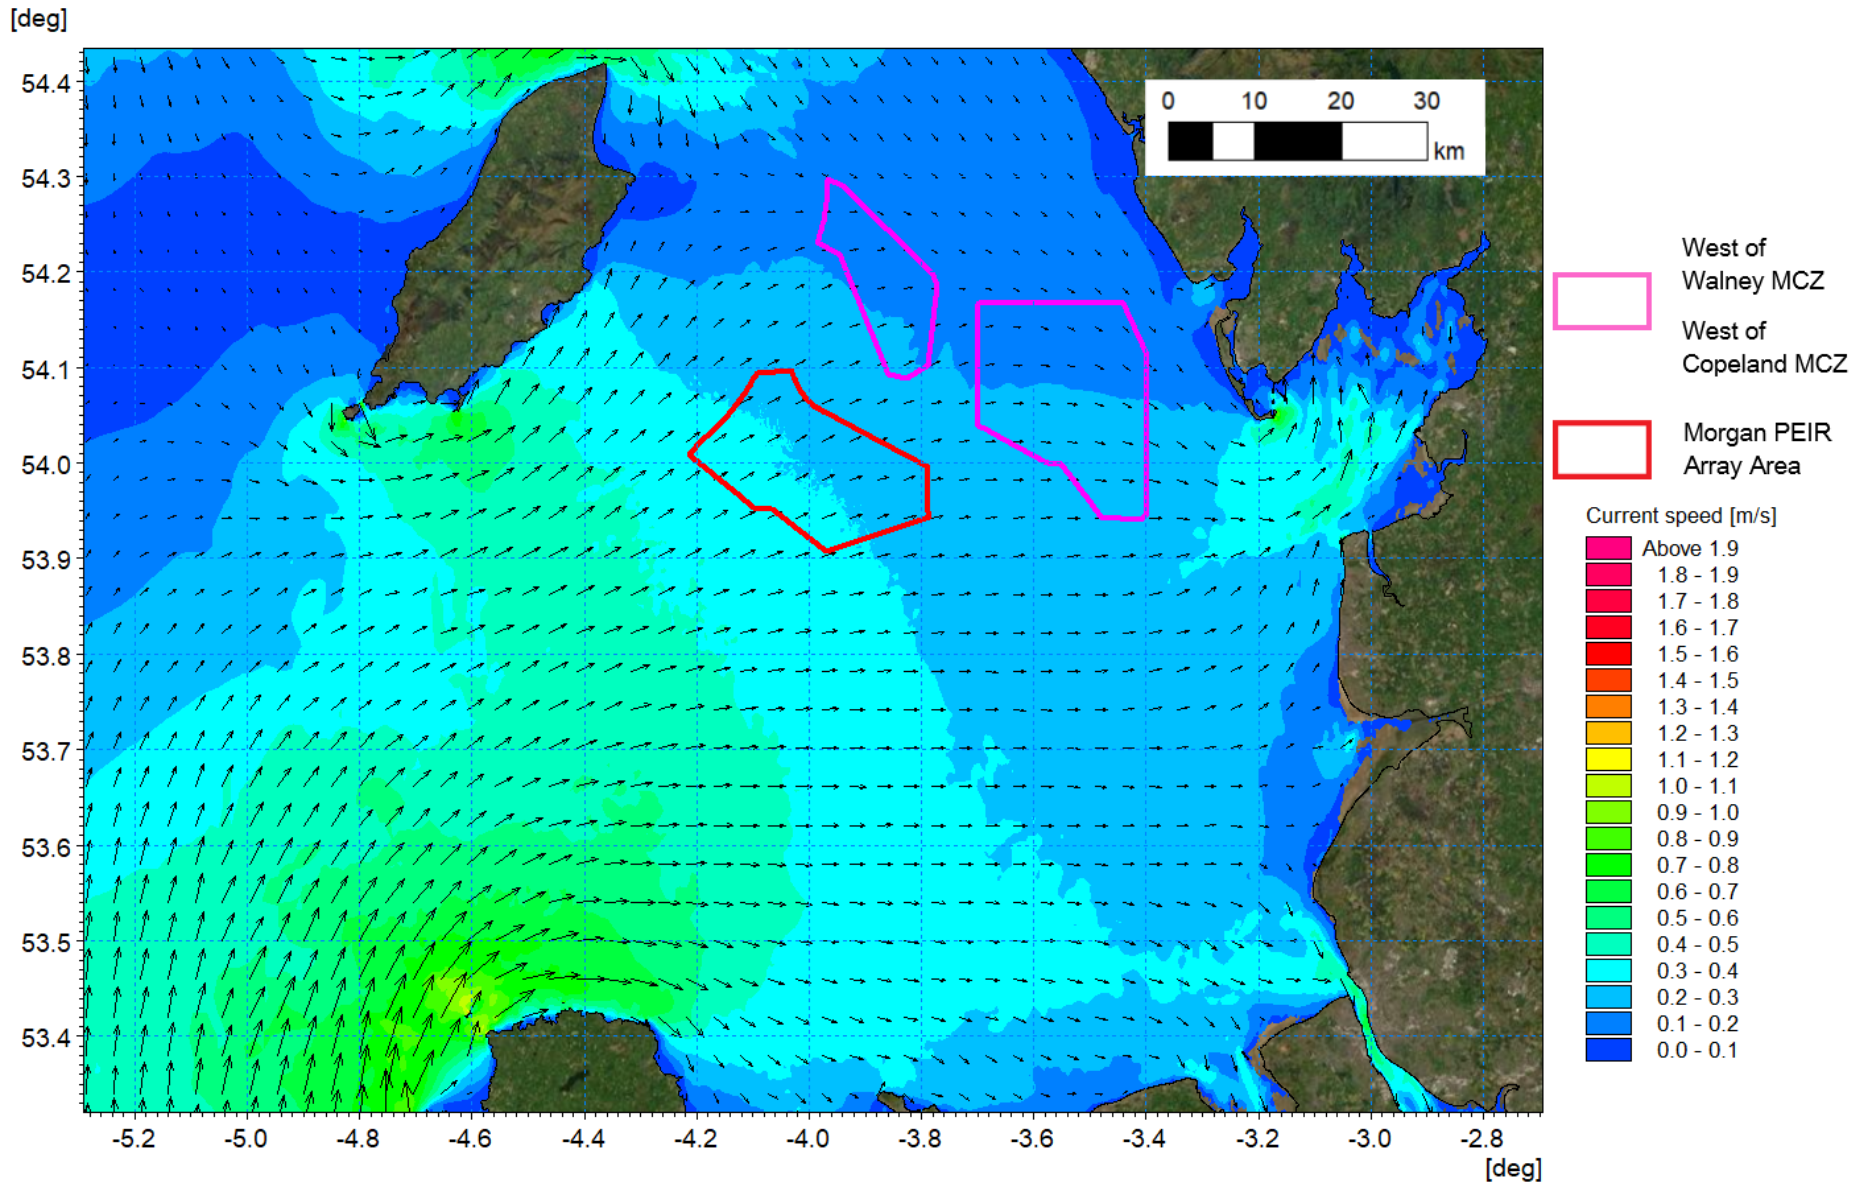


Figure 1.29: Tidal flow patterns – neap tide flood.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

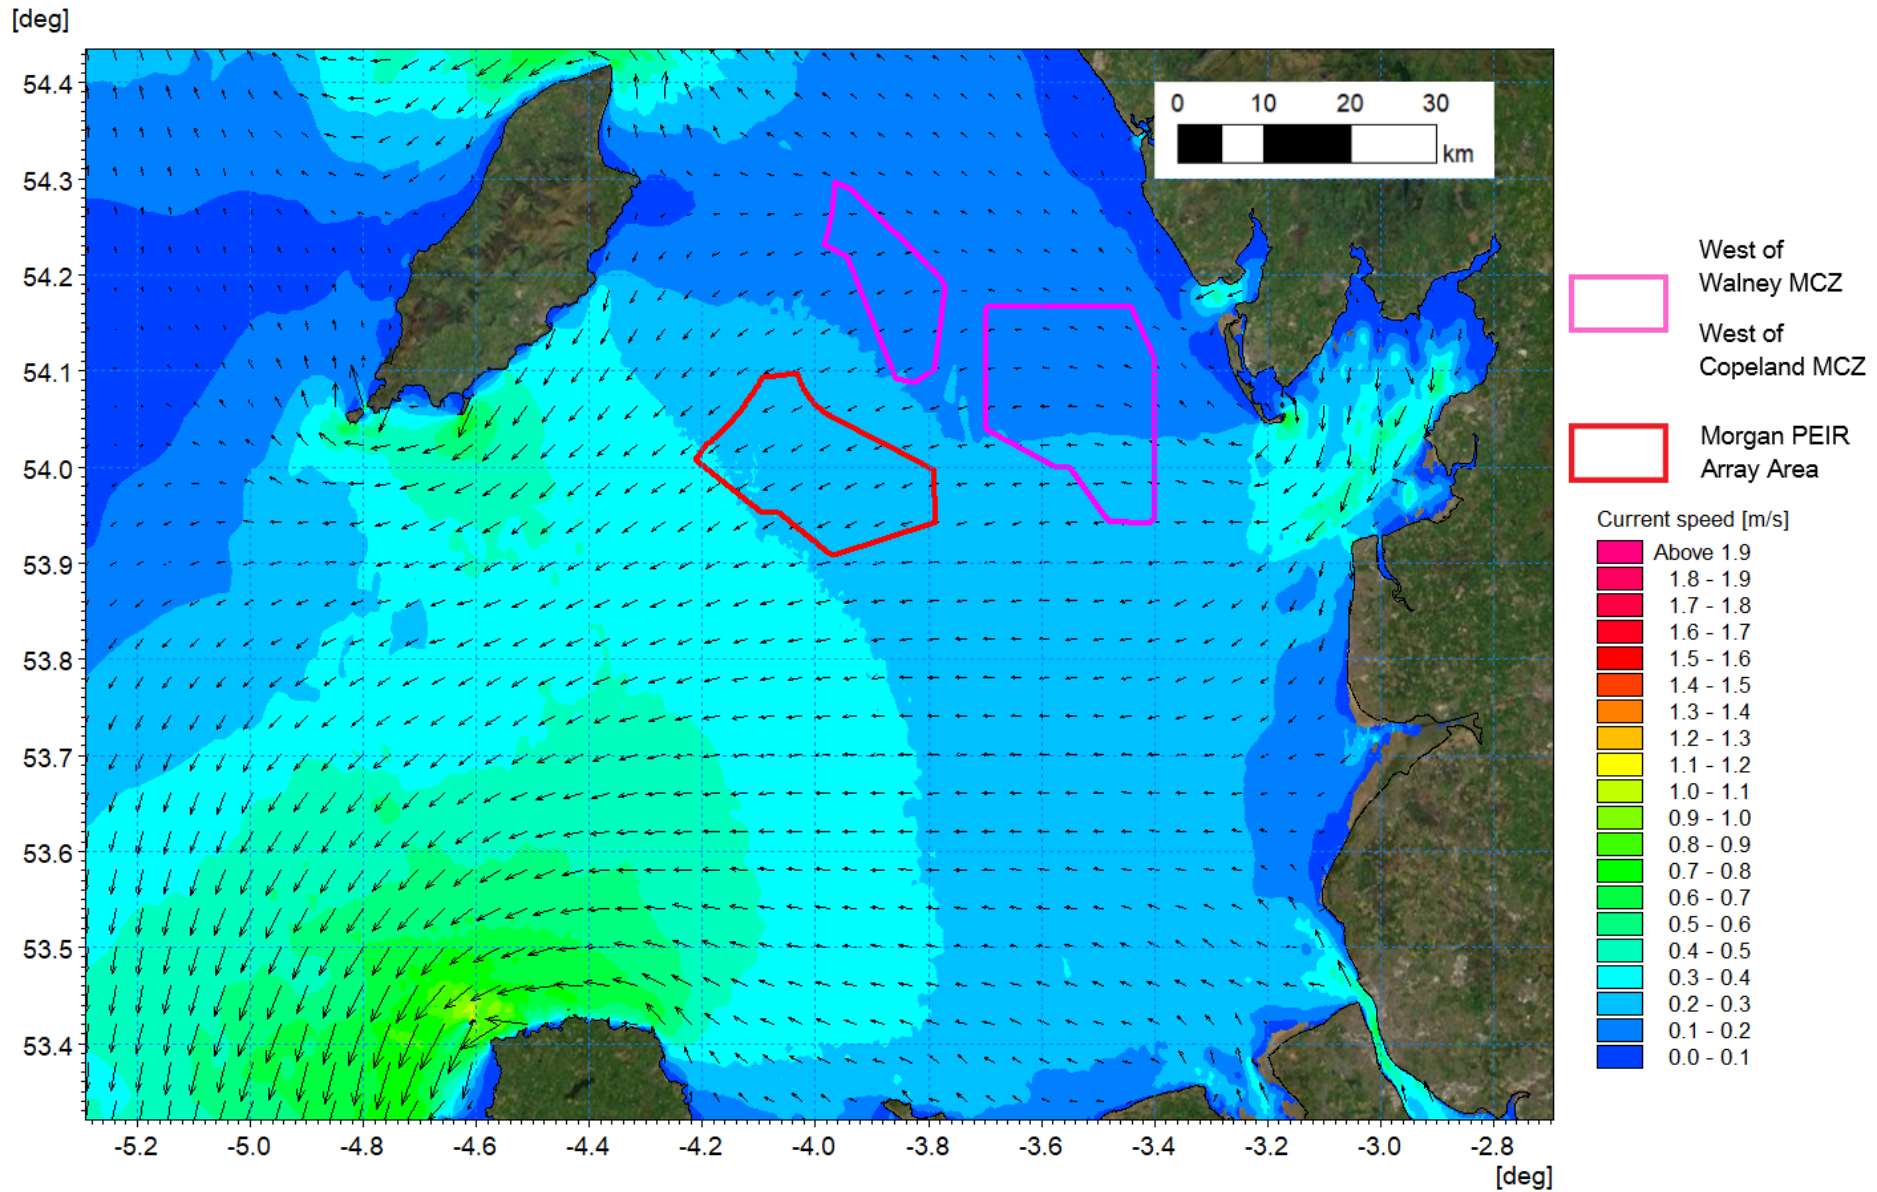


Figure 1.30: Tidal flow patterns – neap tide ebb.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

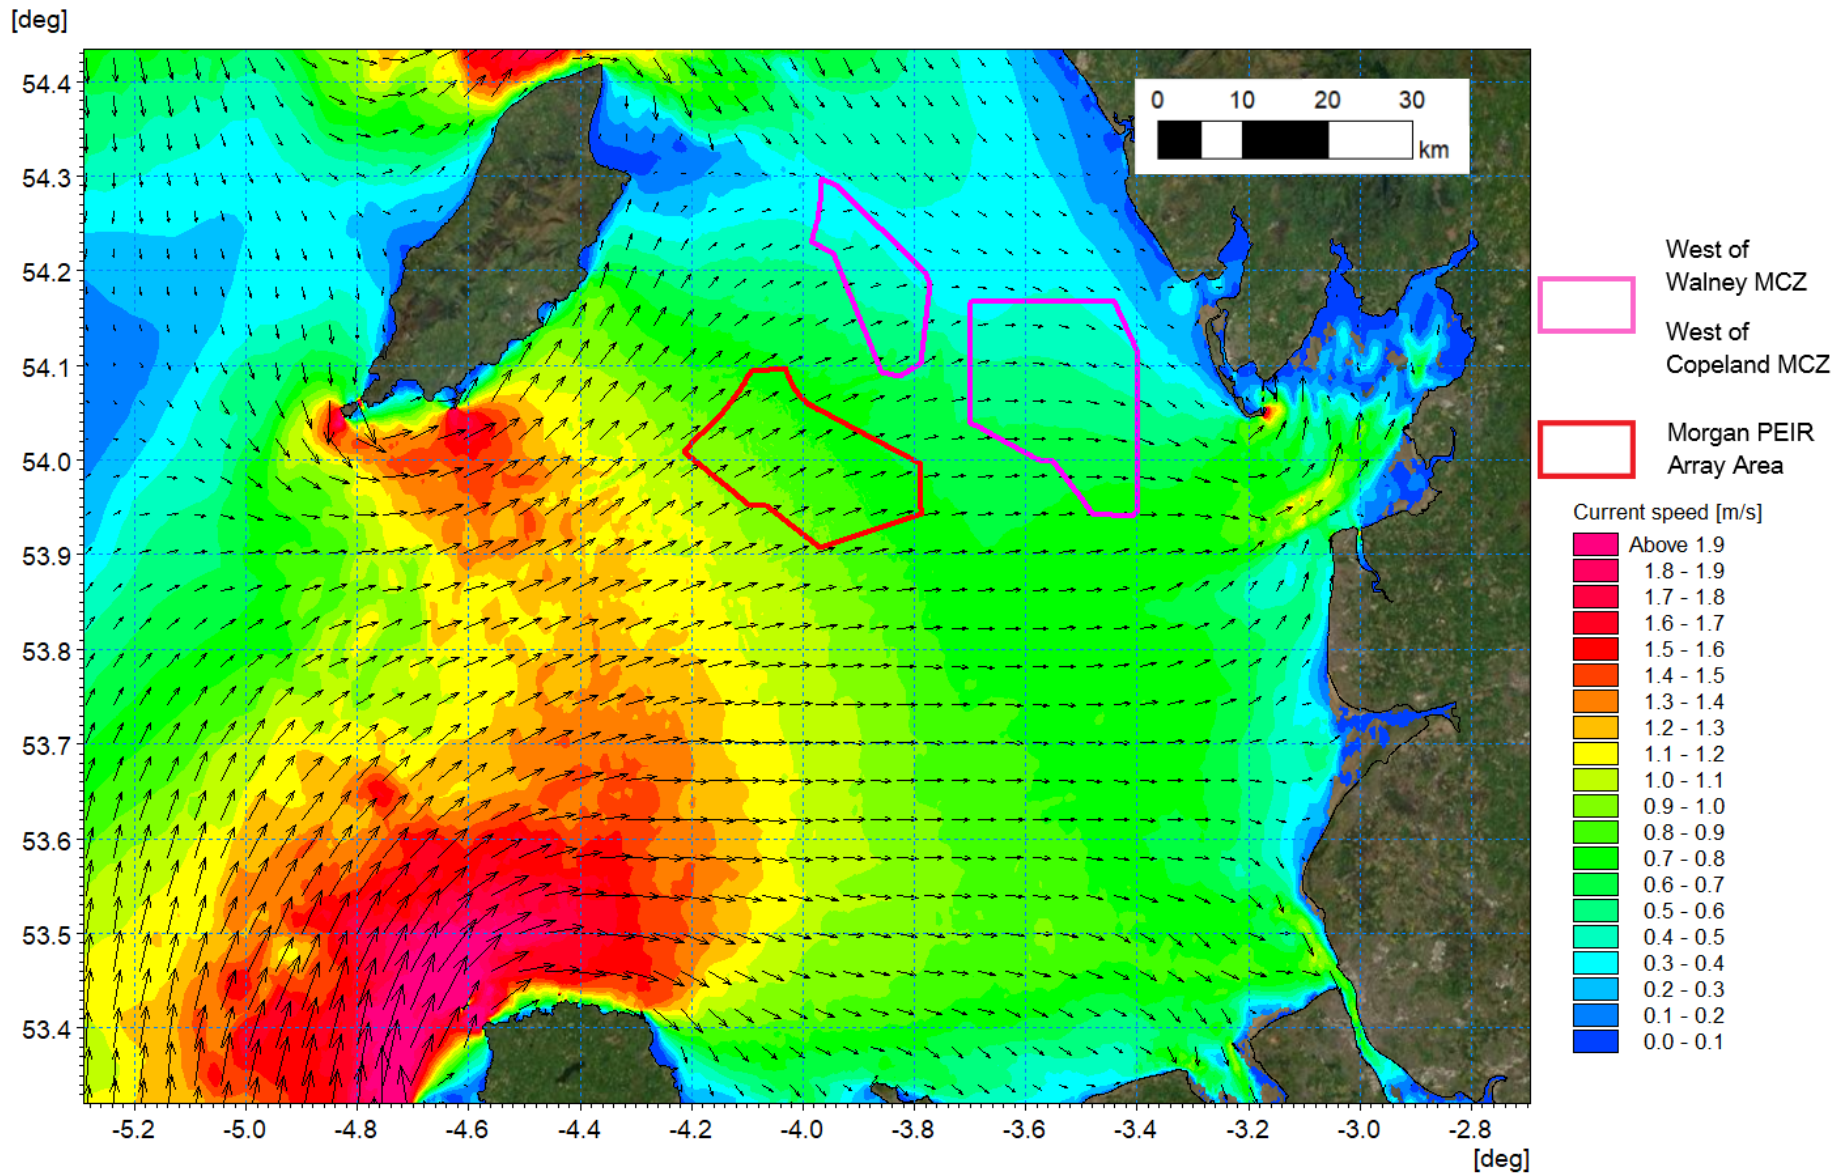


Figure 1.31: Tidal flow patterns – spring tide flood.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

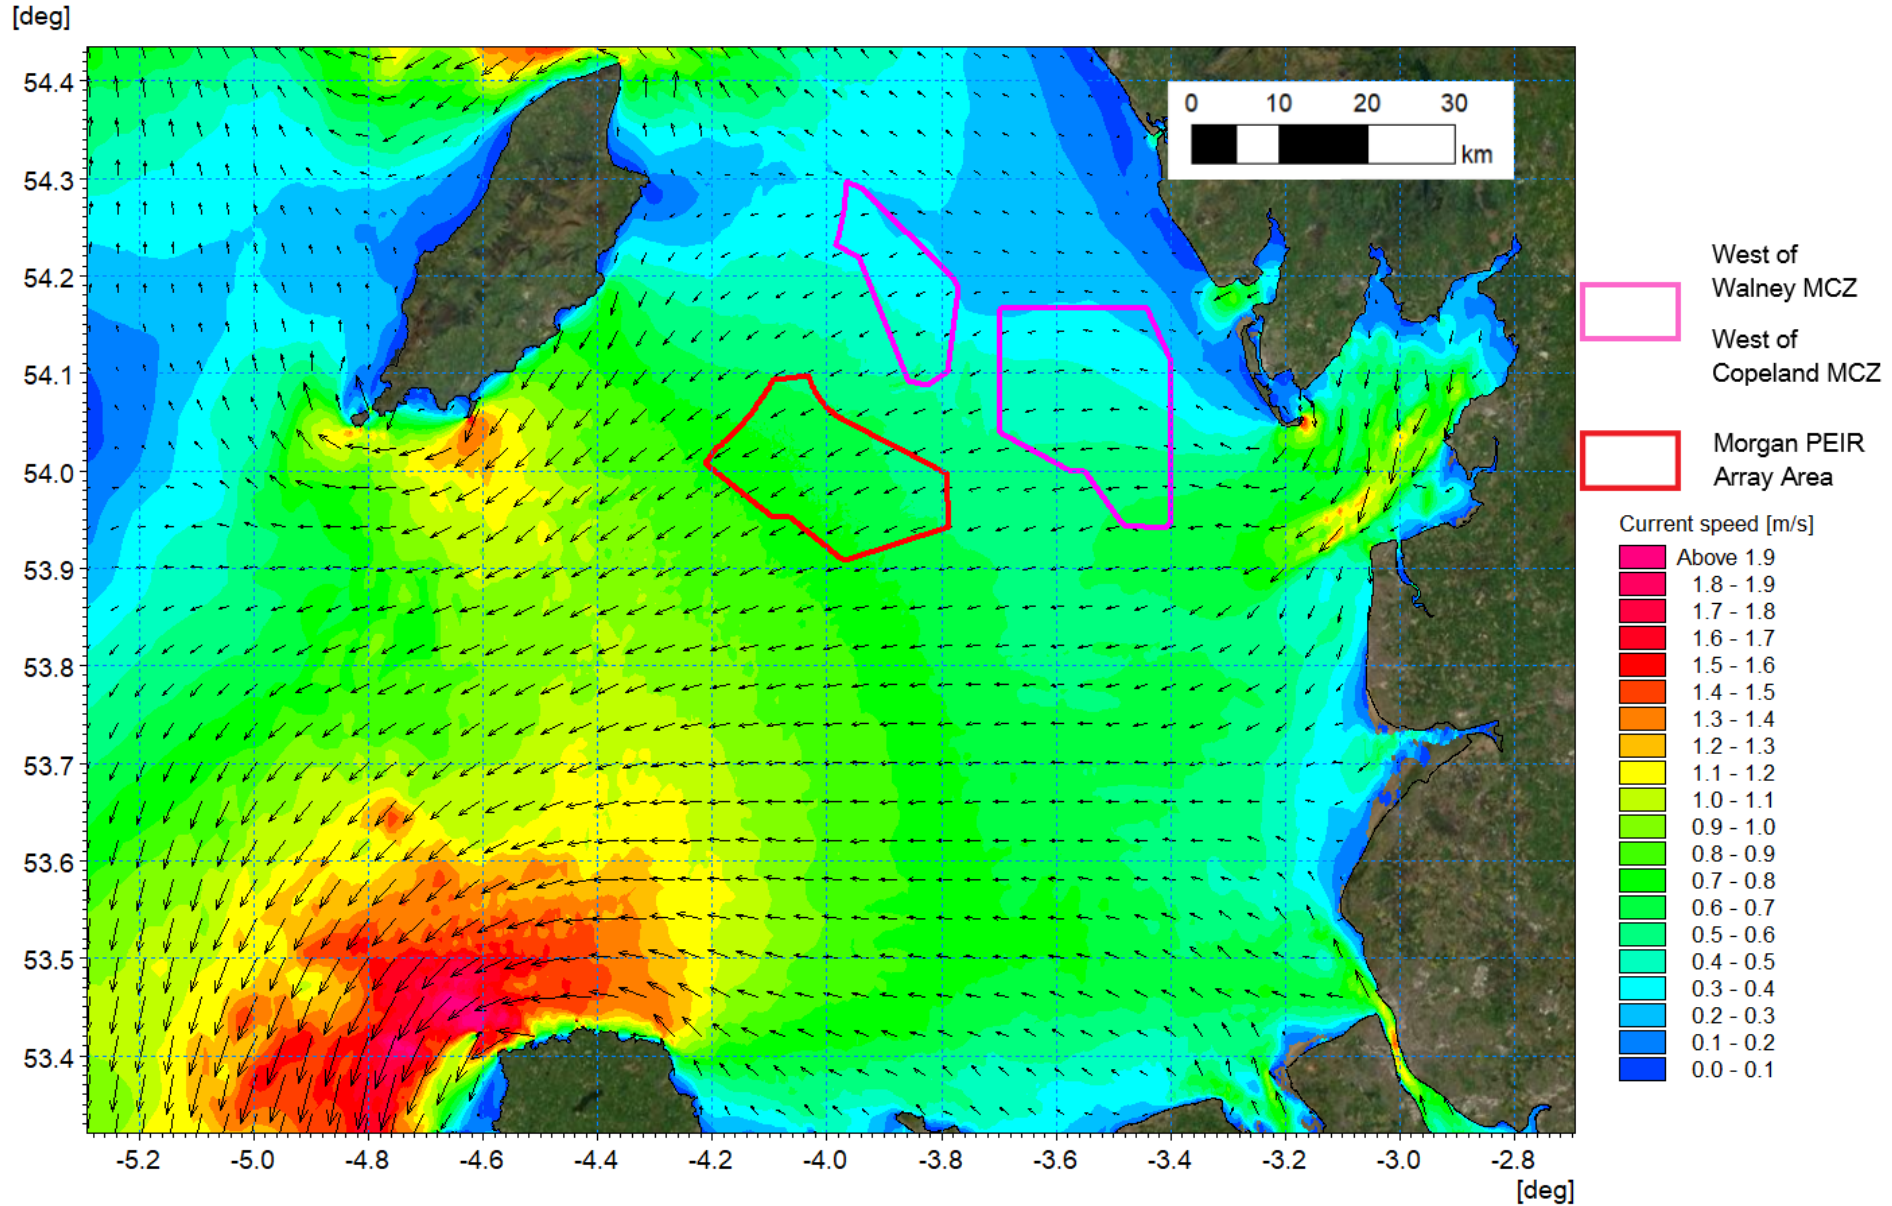


Figure 1.32: Tidal flow patterns – spring tide ebb.

Wave climate

- 1.3.5.21 Waves in the east Irish Sea are highest to the southwest of the Isle of Man with the highest mean annual significant wave height of 1.39 m recorded between the Isle of Man and Anglesey. Significant wave height is reduced closer to the coast with the lowest significant wave height of 0.73 m recorded to the west of the Dee Estuary (ABPmer, 2008). In the physical processes study area mean annual wave height ranges from 1.1 m to 1.3 m. Over 50% of the waves arise from the southwest with all significant wave heights (>4 m) arriving from the southwest (ABPmer, 2018). This is illustrated in Figure 1.33 which shows the wave rose for a point located within this area. Similarly, the corresponding wind rose presented in Figure 1.34 which illustrates the predominant winds are from the southwest with the site being located in the lee of the Isle of Man.
- 1.3.5.22 As offshore waves transfer from the deep offshore water to shallower coastal areas, a number of important modifications may result due to interactions of offshore deep-water waves with the seabed, with the resultant modifications producing shallow water waves. These physical ‘wave transformation’ interactions include:
- Shoaling and refraction (due to both depth and current interactions with the wave)
 - Energy loss due to breaking
 - Energy loss due to bottom friction
 - Momentum and mass transport effect.
- 1.3.5.23 The wave model developed for the assessment was calibrated using data collected during storm Christoph which occurred during January 2021. The model simulated water levels using boundary data extracted from the RPS storm surge model and applied meteorological conditions from the ECMWF operational dataset. Wave conditions at the model boundary were also provided from the ECMWF operational dataset.
- 1.3.5.24 The model output data was then compared with measured data obtained from the National Network of Regional Coastal Monitoring Programmes held by the CCO at the locations shown in Figure 1.35. For each of the three location three parameters are presented relating to mean wave direction, significant wave height and peak wave period.


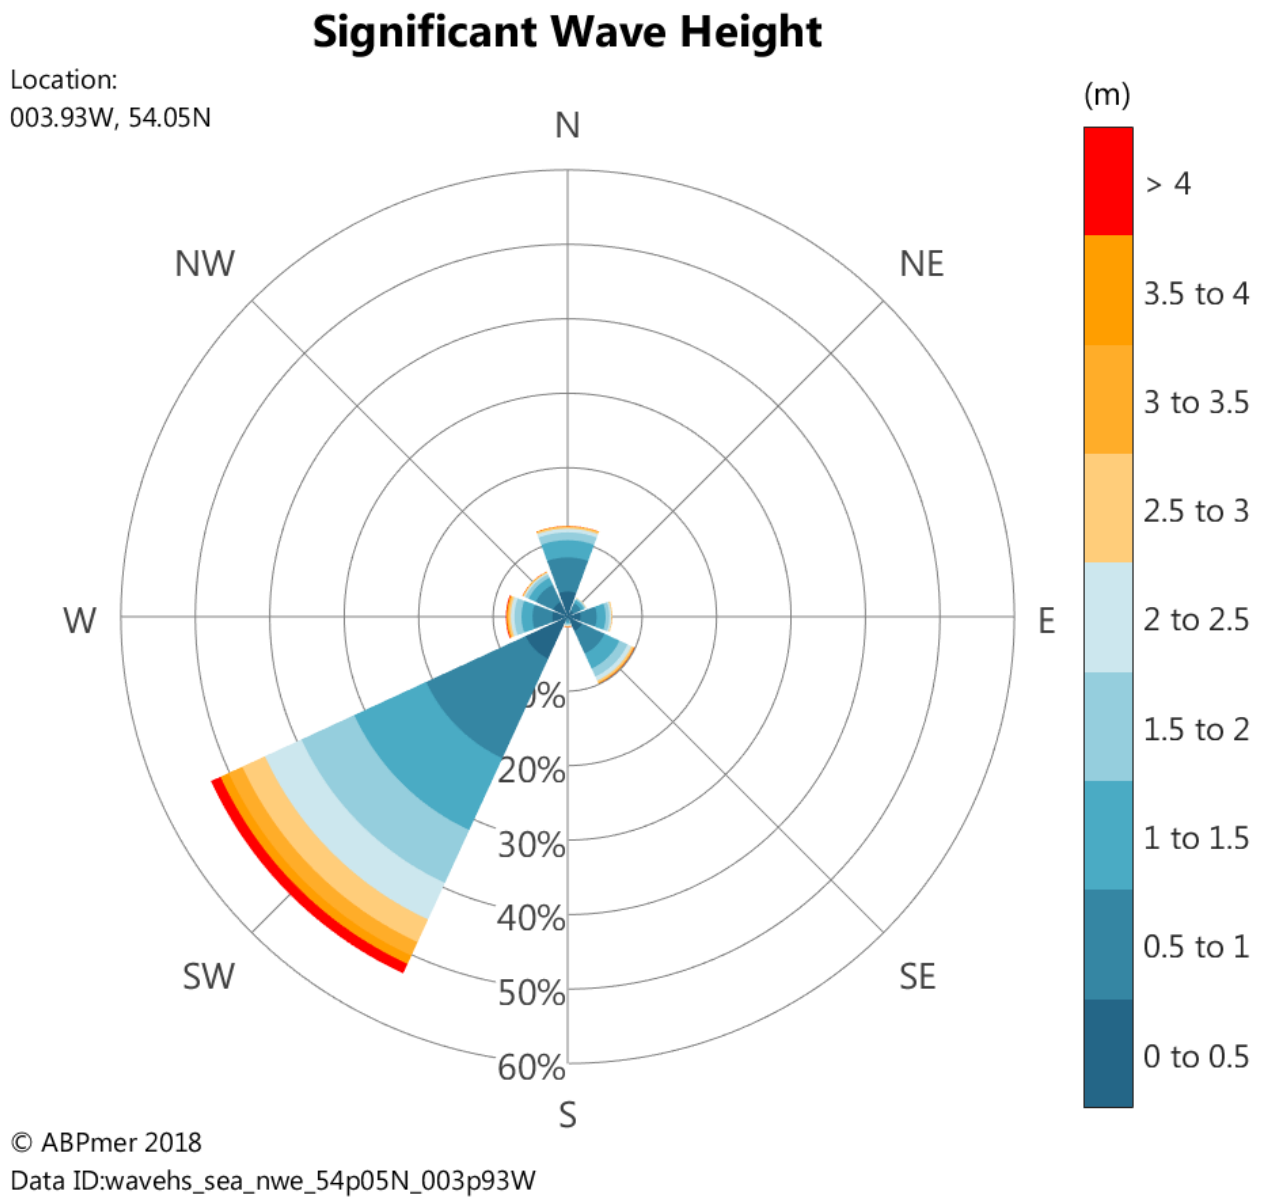


Figure 1.33: Wave rose for Morgan Potential Array Area.

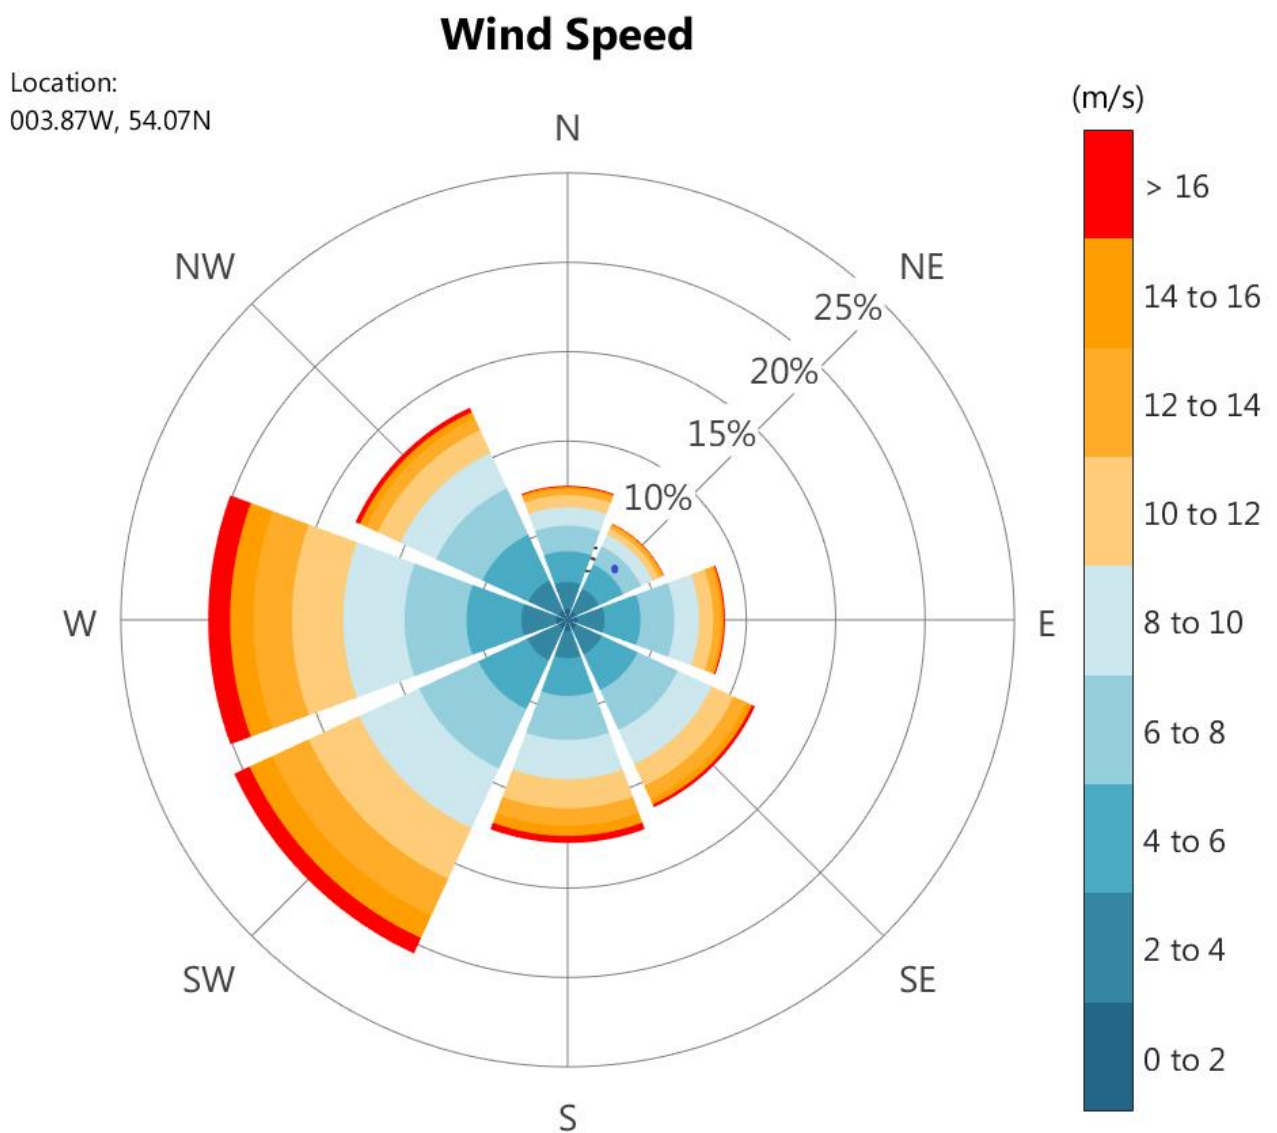

© ABPmer 2018
Data ID:wndspd_nsb_4m_54p07N_003p87W

Figure 1.34: Wind rose for Morgan Potential Array Area.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

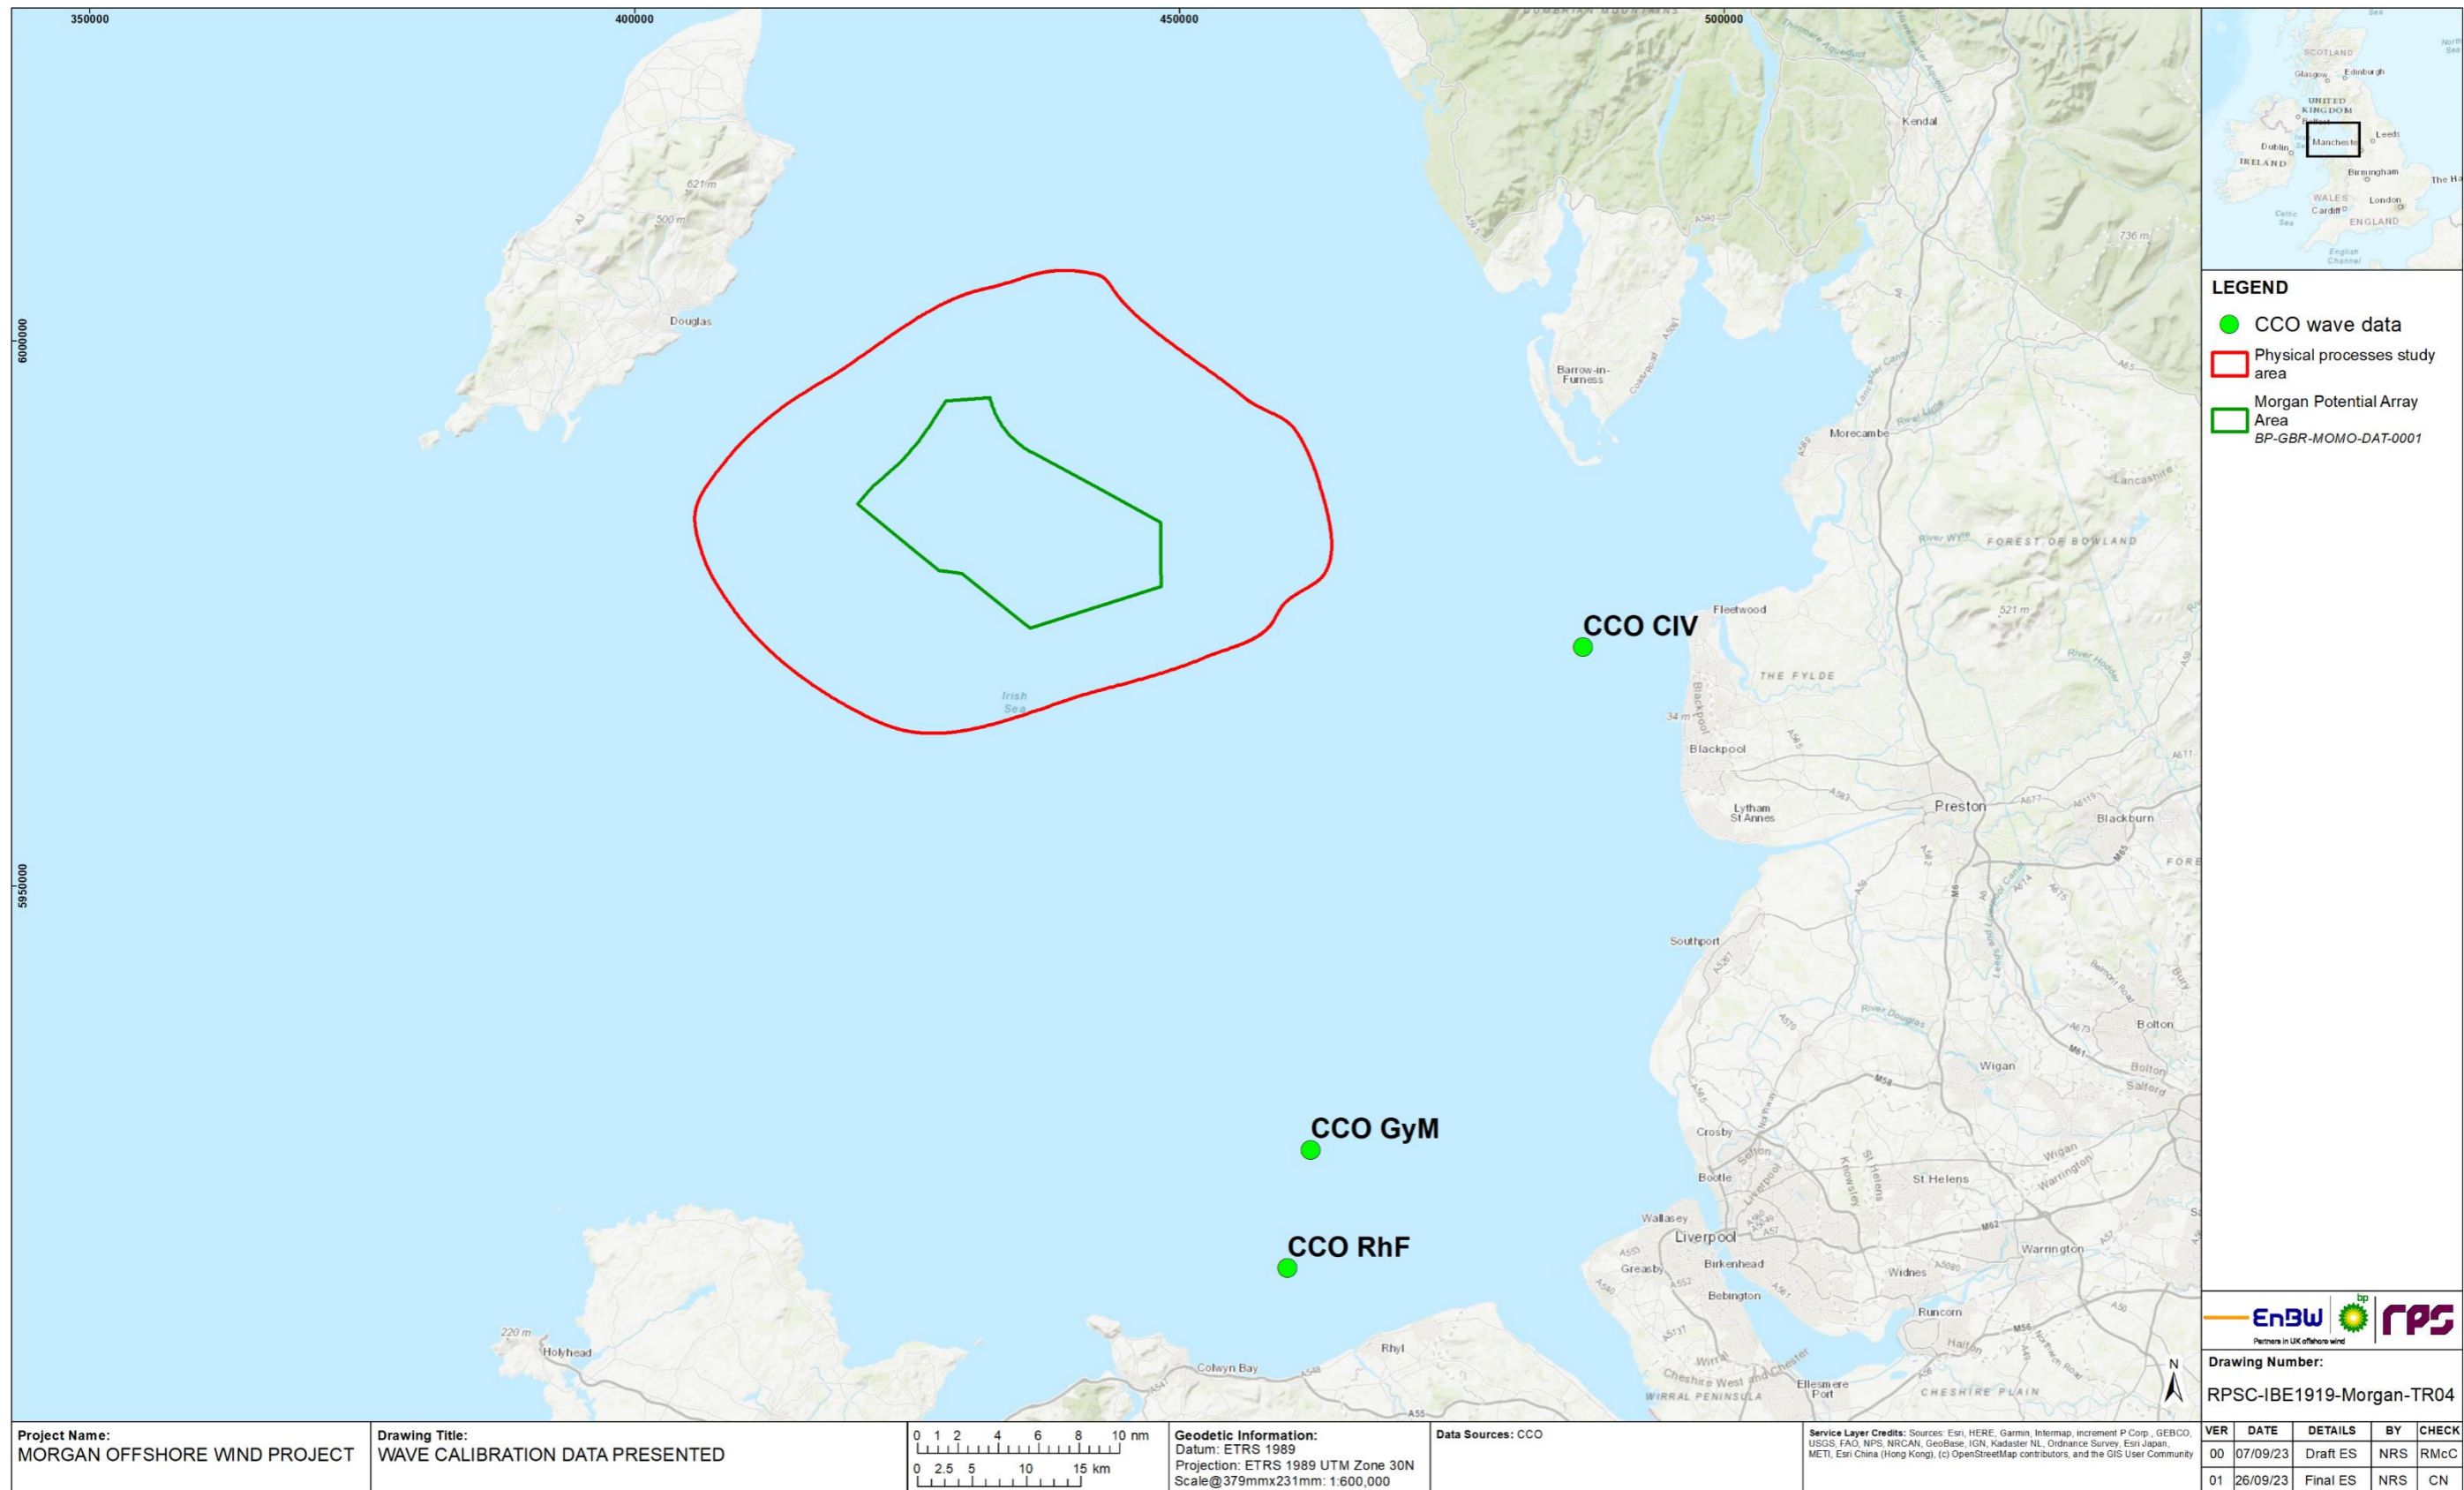


Figure 1.35: Location of wave calibration data presented.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

- 1.3.5.25 Storm Christoph (which occurred in January 2021) approached the east Irish Sea from an easterly direction and therefore the calibration site located to the east of the physical processes study area provide a good indicator as to how well the wave model transforms waves through the physical processes study area. Model and measured data for site Cleveleys (CIV) located at the mouth of Morecambe Bay are presented in Figure 1.36 to Figure 1.38. In each case it can be seen that the hourly interval model data tracks the progress of the storm. It is noted that the model is less 'peaky', but this is to be expected given that the ECMWF data is at three hourly intervals and linear interpolation was applied.
- 1.3.5.26 For the two southerly sites Gwynt y Môr (GyM) (Figure 1.39 to Figure 1.41) and Rhyl Flats (RhF) (Figure 1.42 to Figure 1.44) located on the southeast extent of the physical processes study area there is also a good correlation between modelled and monitored data. This indicated that the wave model was suitable for use in the comparative study of the potential impacts of the Morgan Generation Assets infrastructure, as defined in the PEIR, on wave climate.

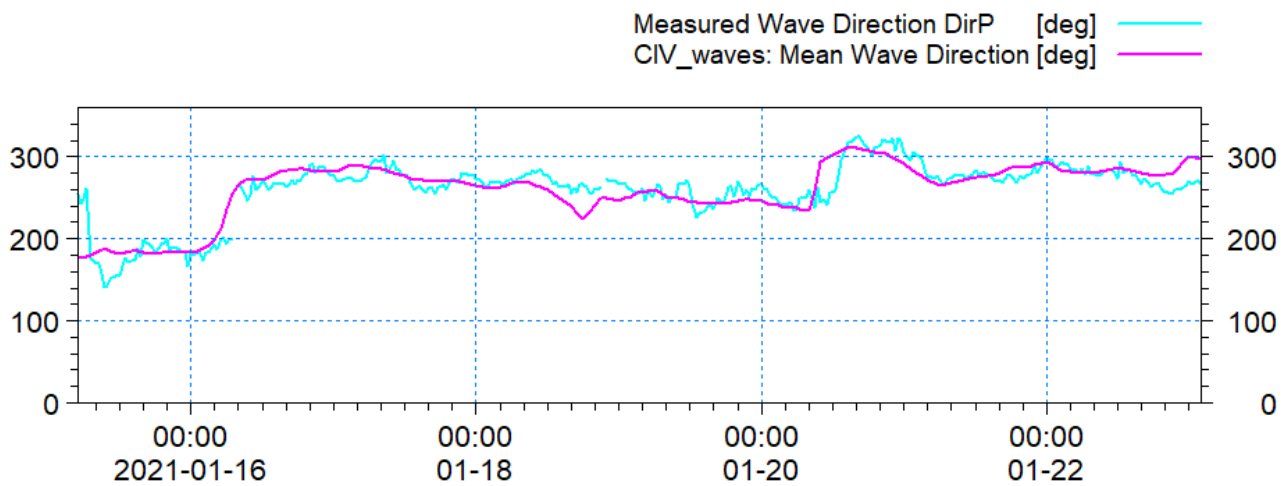


Figure 1.36: Validation of modelled mean wave direction with measured data at CIV.

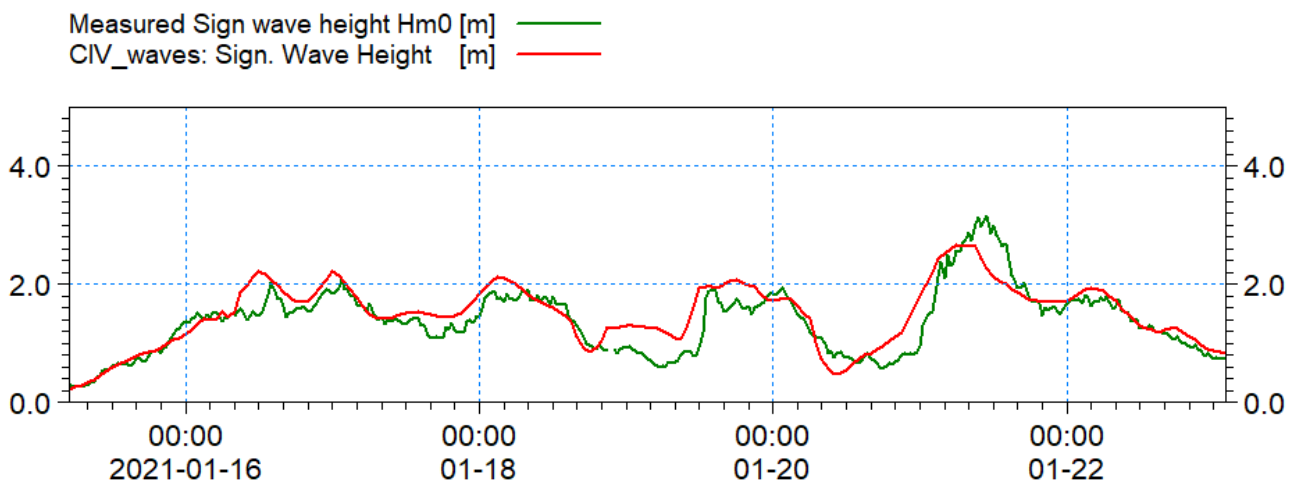


Figure 1.37: Validation of modelled significant wave height with measured data at CIV.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

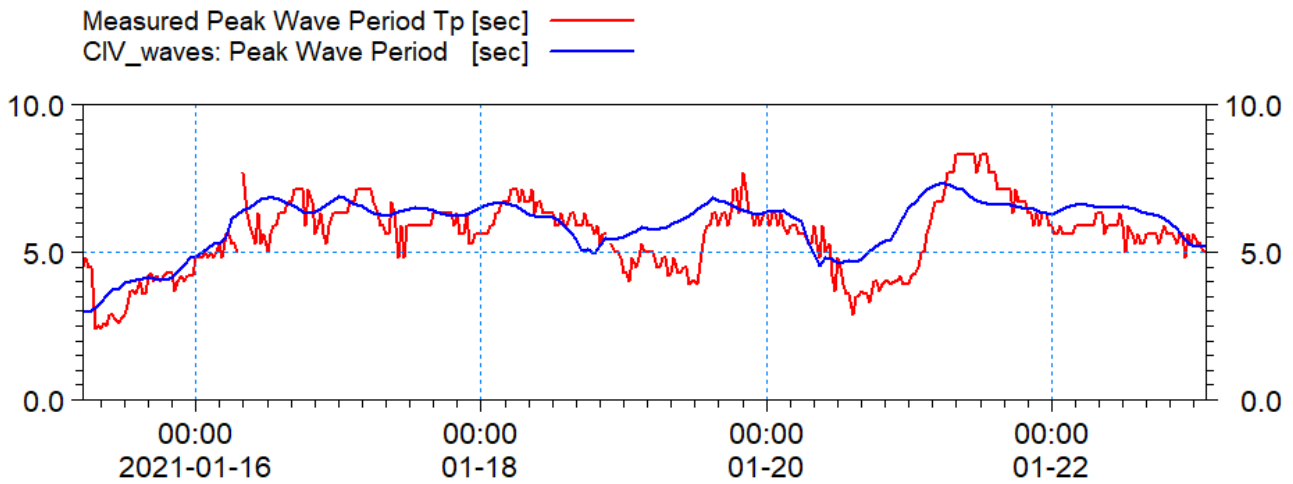


Figure 1.38: Validation of modelled peak wave period with measured data at CIV.

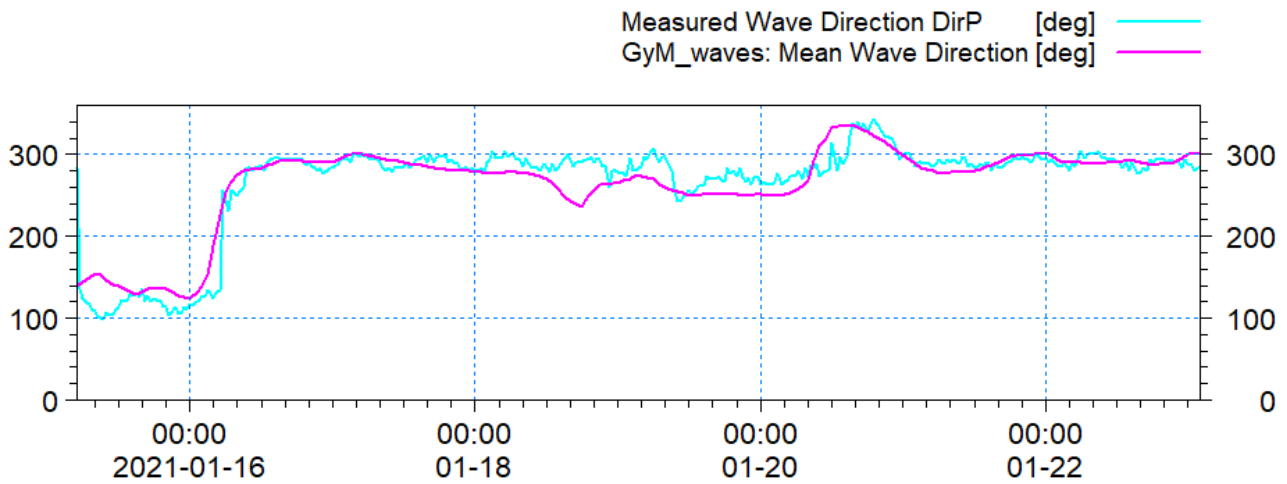


Figure 1.39: Validation of modelled mean wave direction with measured data at GyM.

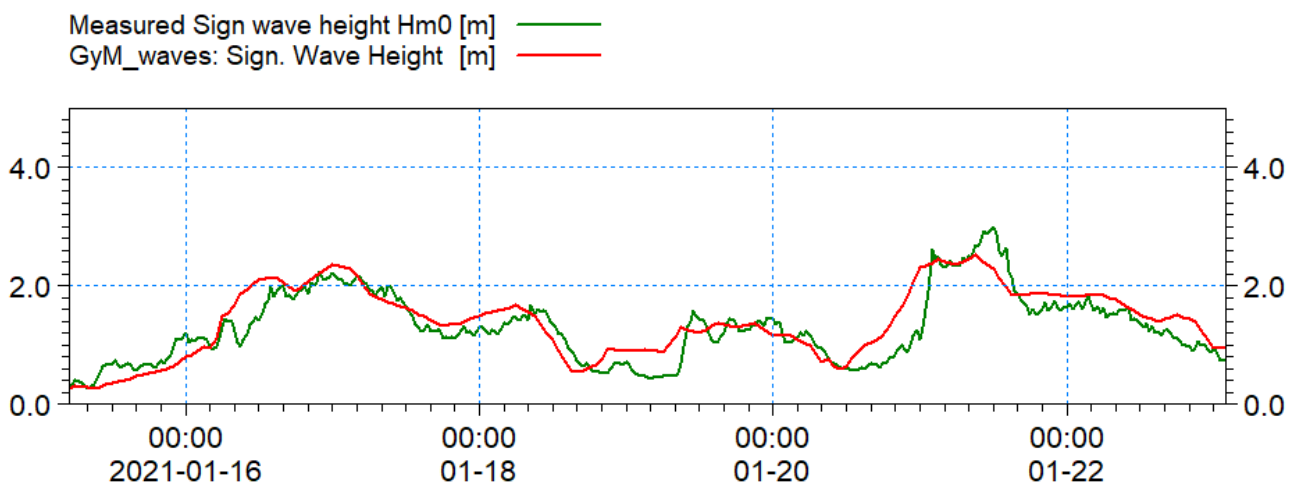


Figure 1.40: Validation of modelled significant wave height with measured data at GyM.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

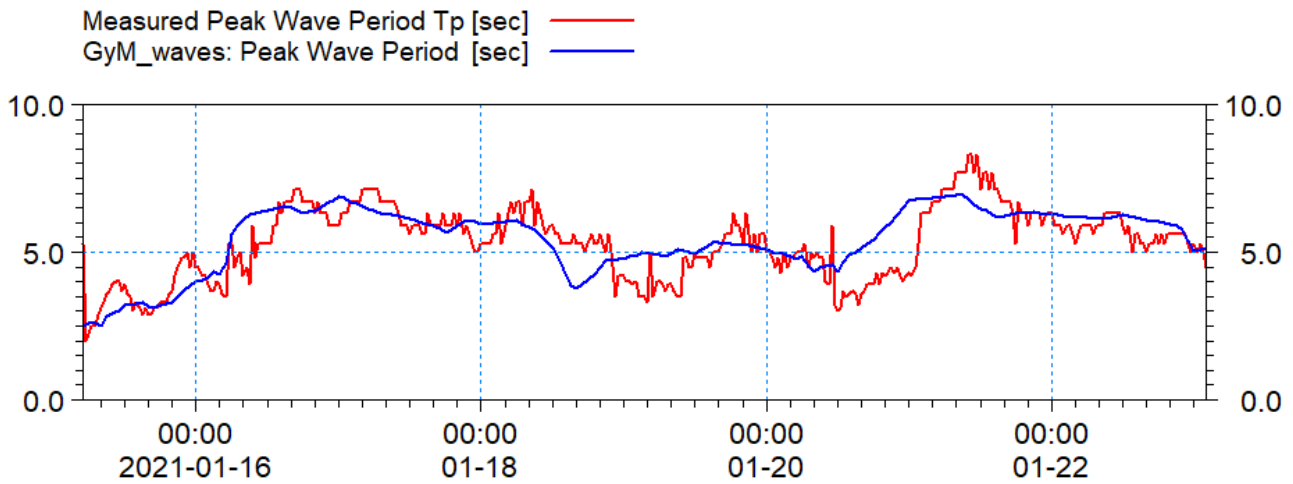


Figure 1.41: Validation of modelled peak wave period with measured data at GyM.

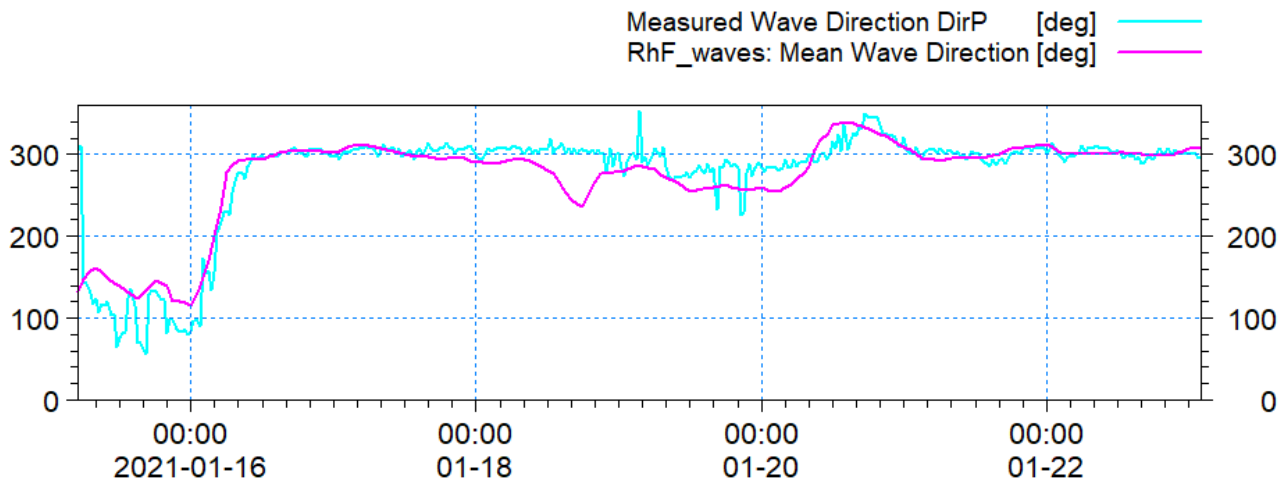


Figure 1.42: Validation of modelled mean wave direction with measured data at RhF.

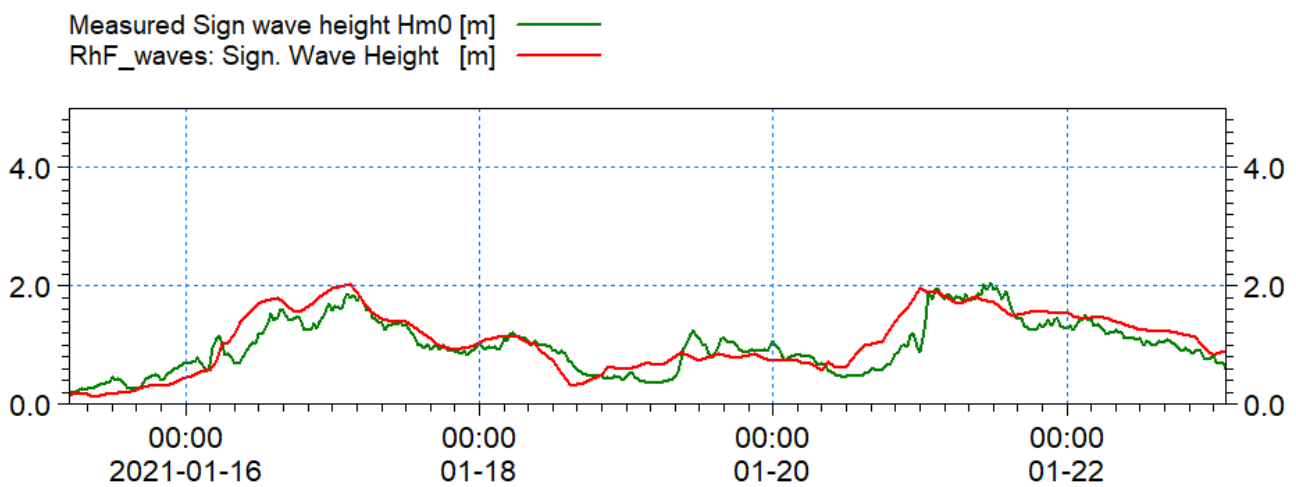


Figure 1.43: Validation of modelled significant wave height with measured data at RhF.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

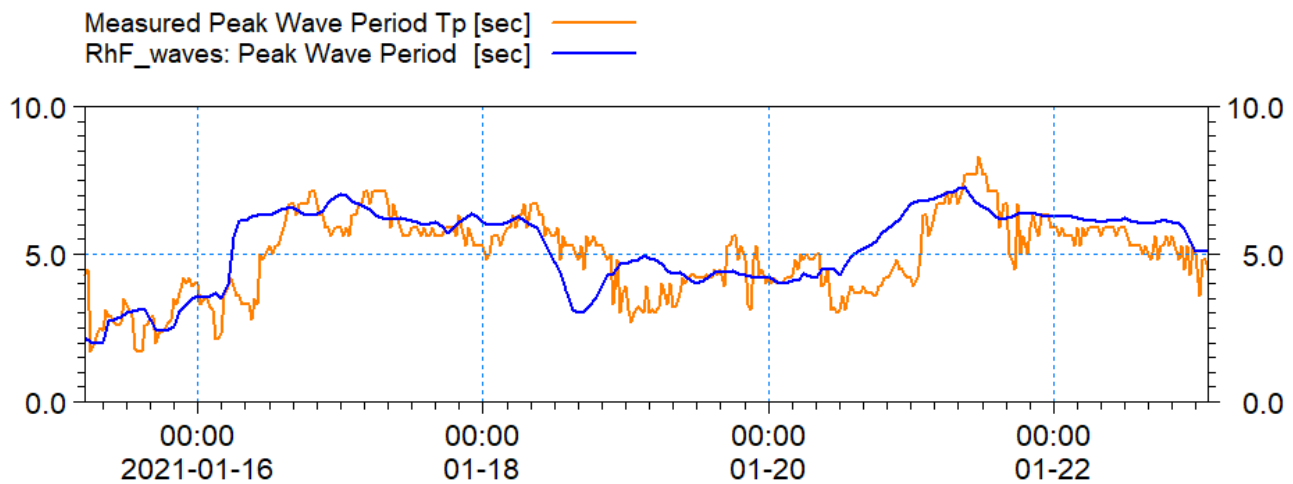


Figure 1.44: Validation of modelled peak wave period with measured data at RhF.

- 1.3.5.27 In order to evaluate the potential changes in wave climate due to the Morgan Generation Assets infrastructure, as defined in the PEIR, a comparative study was carried out. This meant that baseline wave climate was required; due to the comparative nature of the assessment, a full metocean study was not essential however representative sea-states were required.
- 1.3.5.28 An analysis was undertaken to determine the offshore conditions for which waves reach the site from all directions. Twenty-two years of data were obtained from the ECMWF operational dataset for locations on the north and south boundaries of the model domain. Extreme value analysis using peak over threshold was undertaken for each 30° sector to determine the 1 in 1 and 1 in 20 year offshore wave climate. These were then used as boundary conditions within the wave modelling to determine the resultant wave climate at the site and across the physical processes study area.
- 1.3.5.29 In addition to boundary wave data, it was necessary to analyse the wind field to include the contribution of local wind seas. For this, for a representative point for each of the key directions, was identified and utilised from the NOAA 40-year dataset. This was analysed on the same sectoral basis as the wave data to give an indication of the return period wind speed. Figure 1.45 shows the model domain with wind and wave roses relating to the forcing data.
- 1.3.5.30 The wave modelling was undertaken using the spectral wave model, MIKE21 SW, to provide a full wave climate and wave breaking across the physical processes study area. The model used a quasi-stationary formulation which meant that for each event the wave field fully established over a number of numerical iterations until convergence was reached. The model resolves the wave field by simulating wind generation of waves within the model domain and the propagation of externally generated swell waves through the domain. The model setup ensured that the detail of both locally generated wind waves and swell conditions from further afield were captured.
- 1.3.5.31 The following set of figures (Figure 1.46 to Figure 1.49) show the wave climate for four 1 in 1 year return period events from the principal directions; north (000°), northeast (030°), southwest (210°) and southwest (240°) direction respectively. These sectors were selected to be representative of the characteristics of the wave climate and also for sectors for which the Morgan Generation Assets infrastructure, as defined in the PEIR, may potentially affect marine processes along the coastline. The wave modelling was undertaken at Mean High Water (MHW) being the high water level on

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

an average tide. Figure 1.49 shows the waves approaching from the west and demonstrates, as anticipated, the largest waves approach from this sector.

- 1.3.5.32 A second set of figures are presented relating to the 1 in 20 year return period; Figure 1.50 to Figure 1.53. These show data for the principal directions of 000°, 030°, 240° and 270° and tidal height as the 1 in 1 year return period. They have been introduced to ensure that the baseline for a more arduous conditions is established for assessment of the potential effect of the Morgan Generation Assets infrastructure, as defined in the PEIR, on wave climate.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

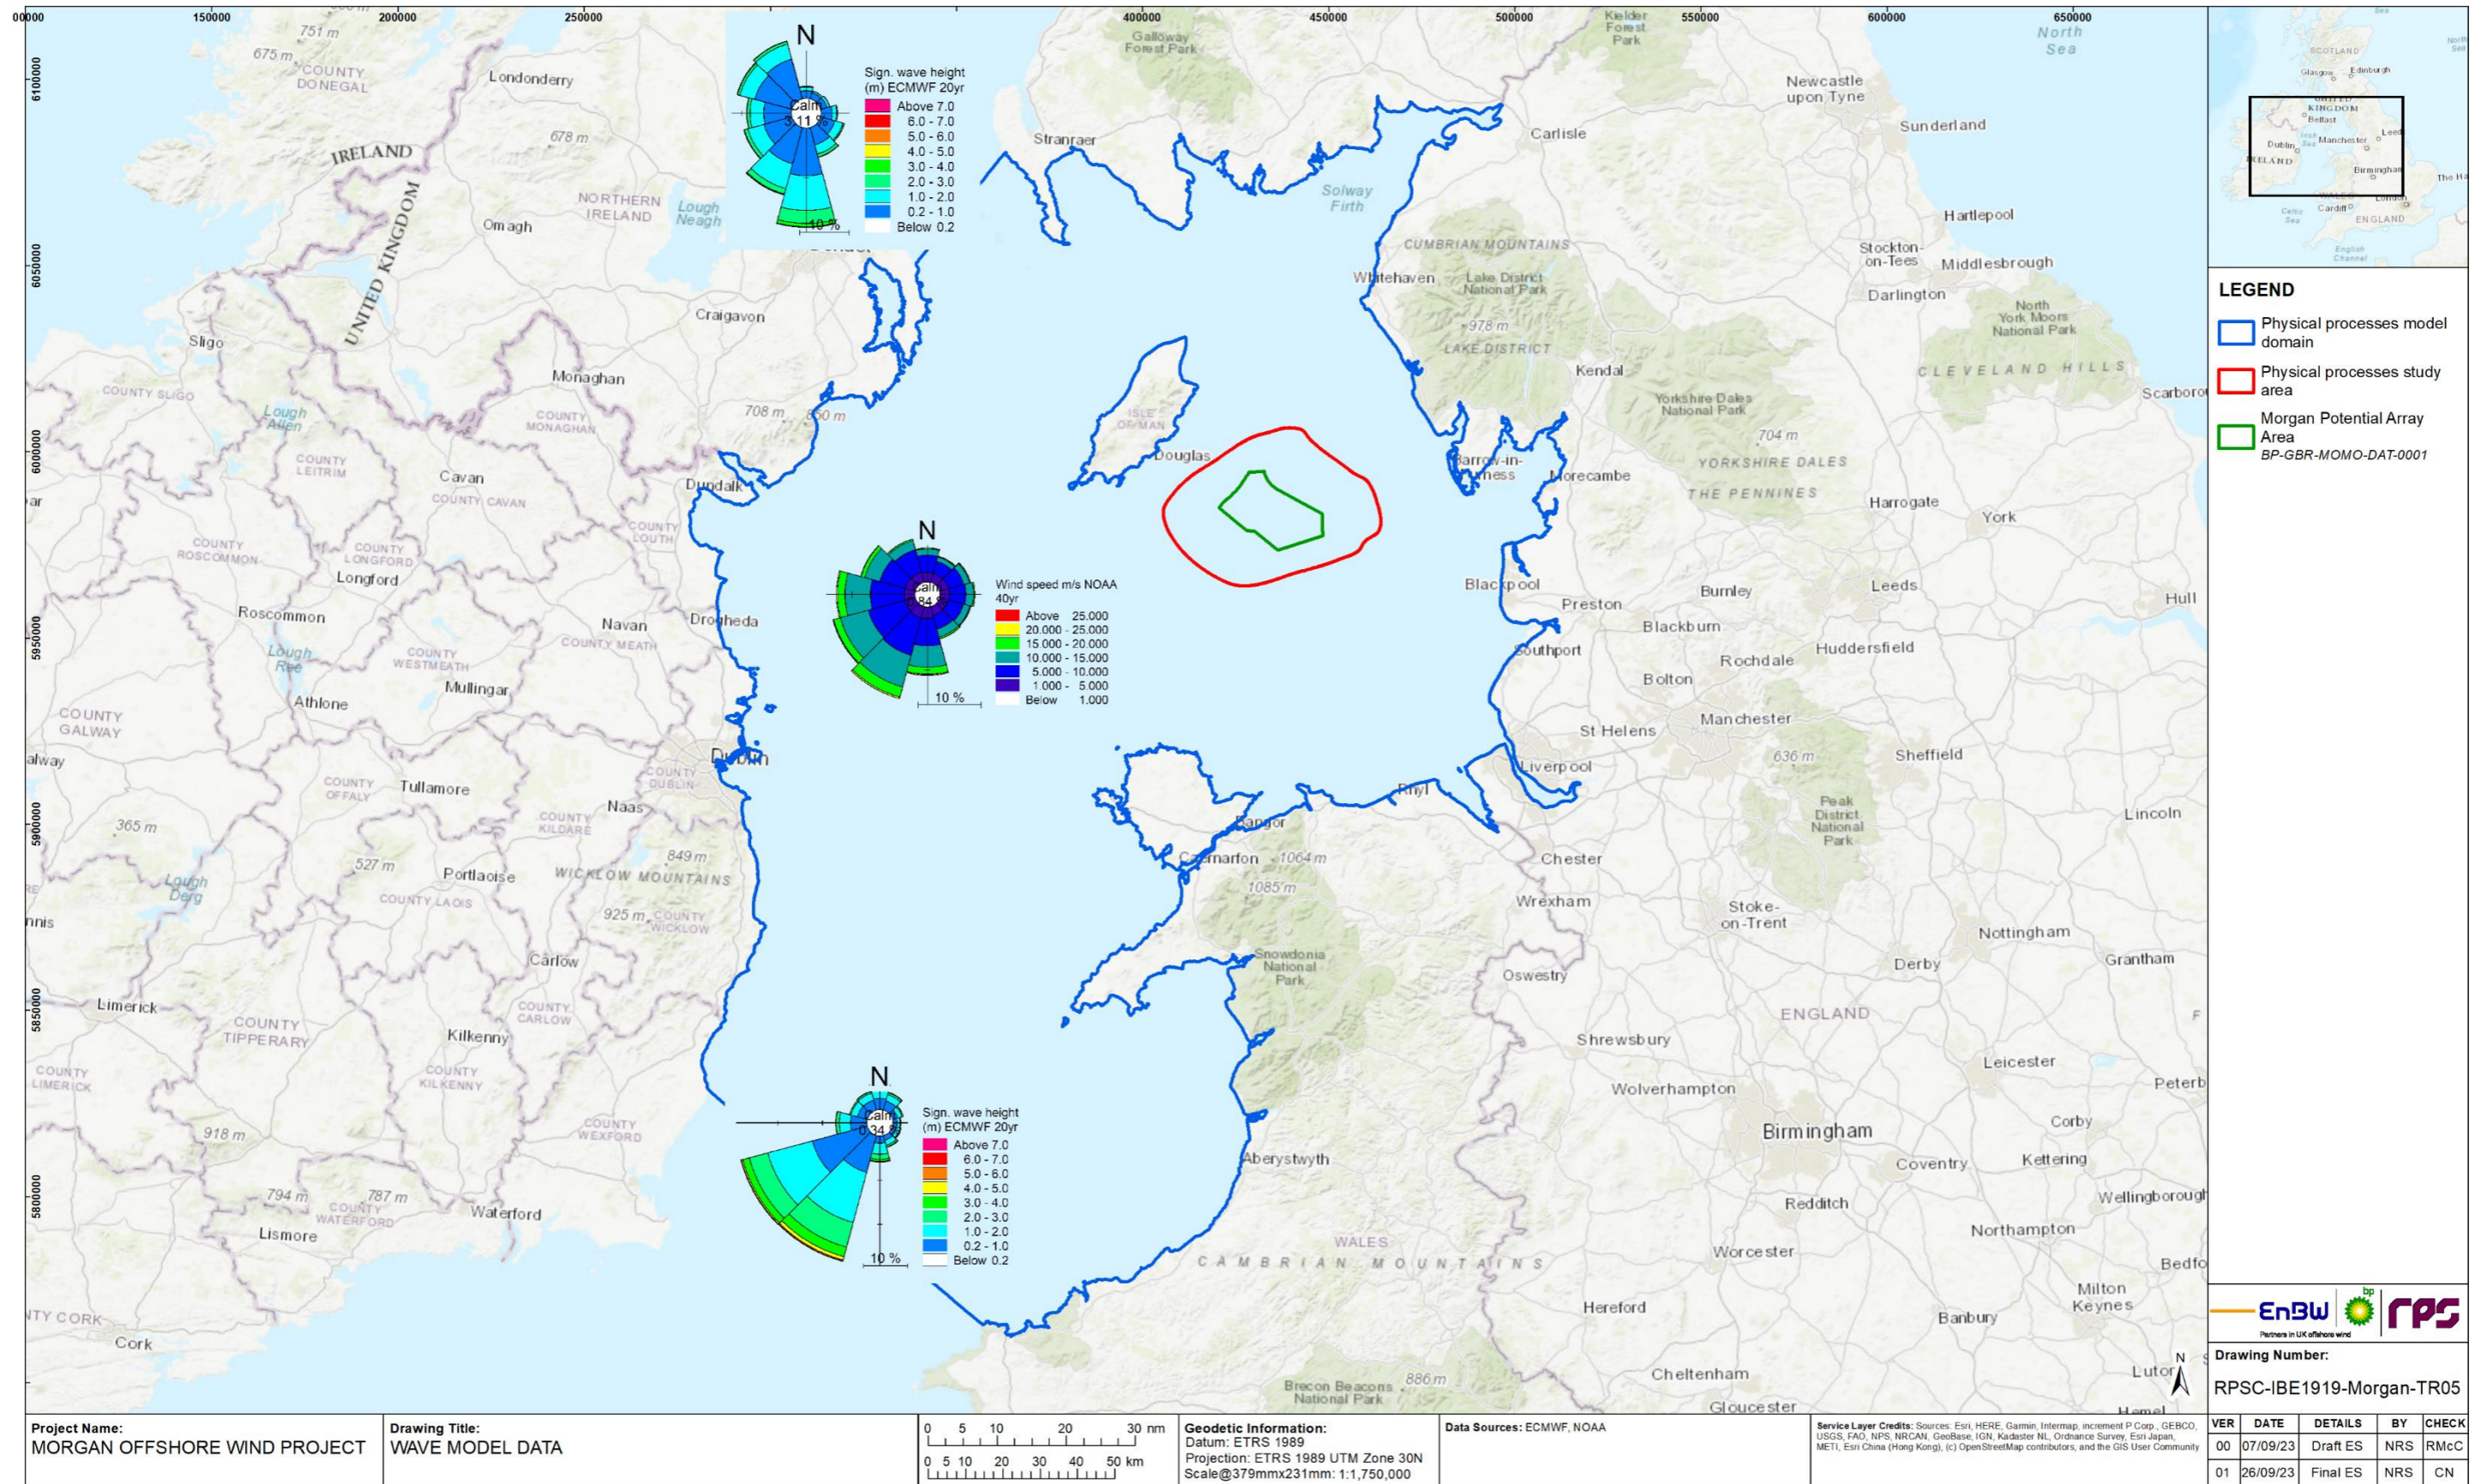


Figure 1.45: Wave roses for model boundaries - 22 year ECMWF Dataset and wind rose for 40 year NOAA dataset.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

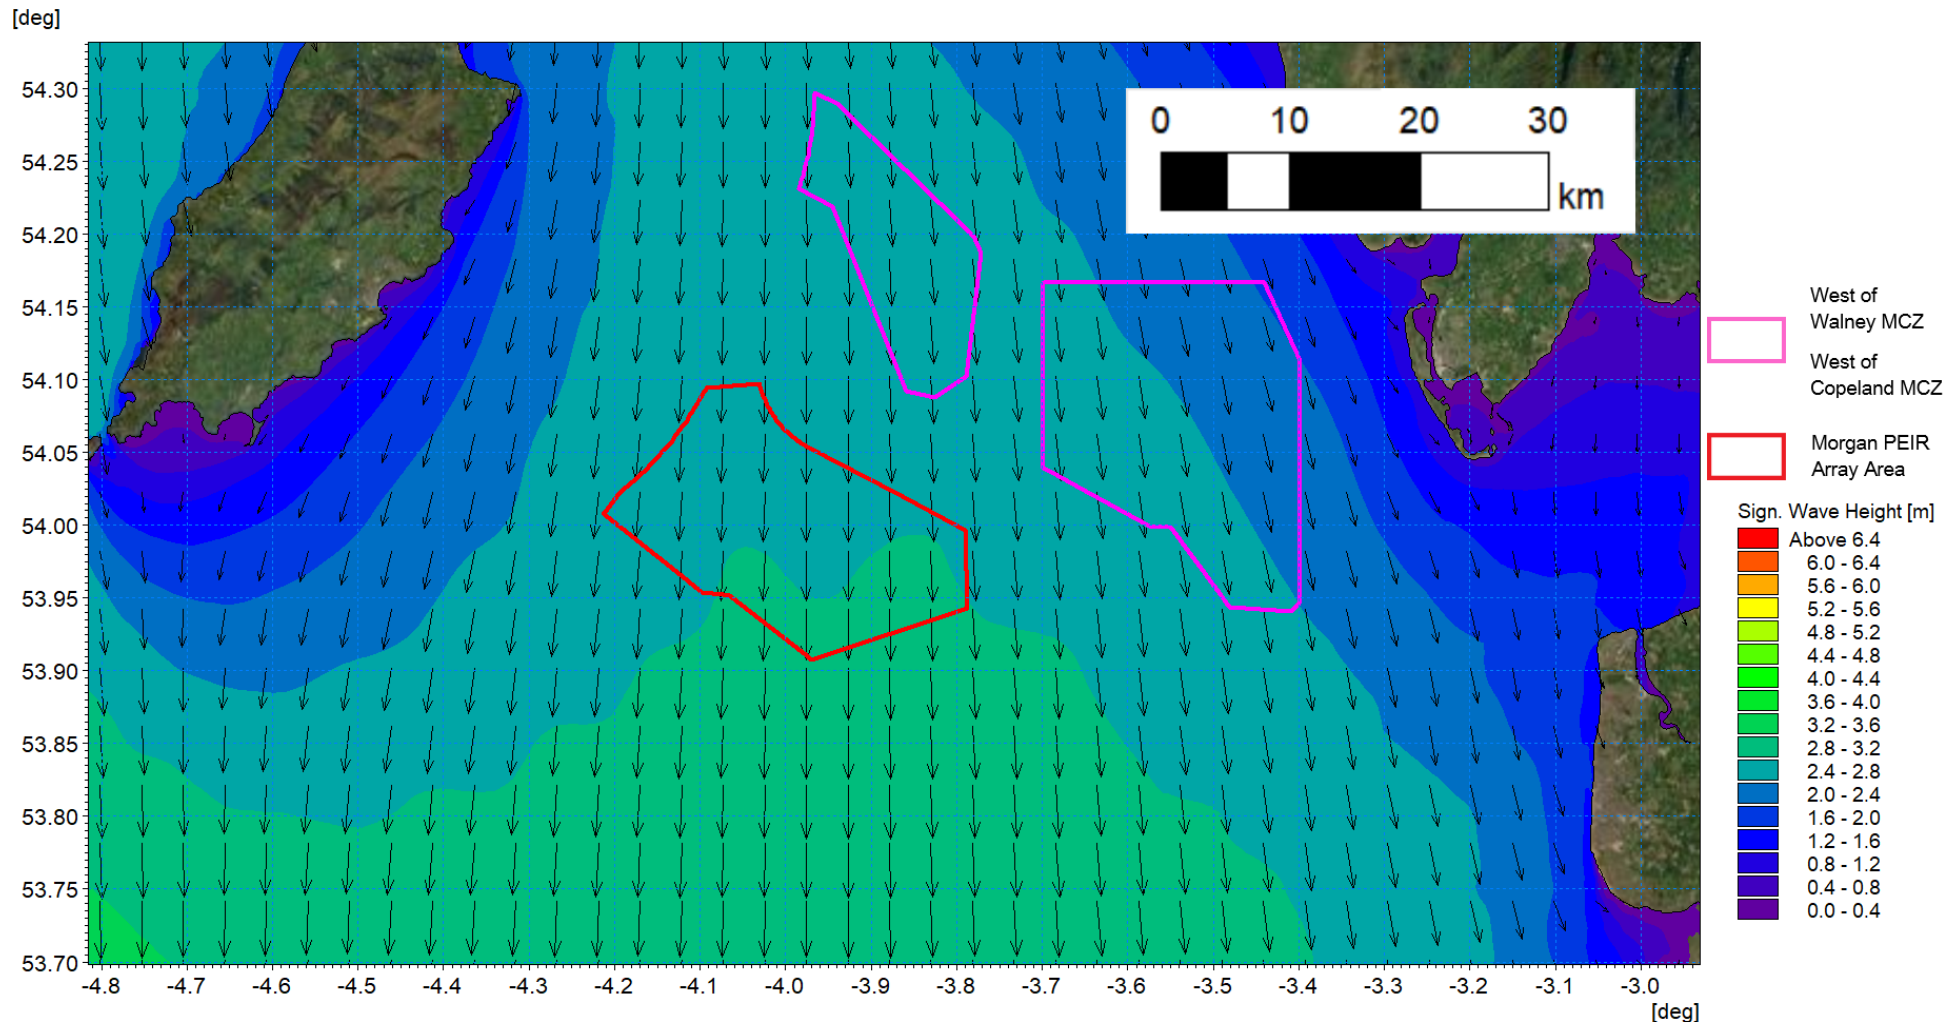


Figure 1.46: Wave climate 1 in 1 year storm from 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

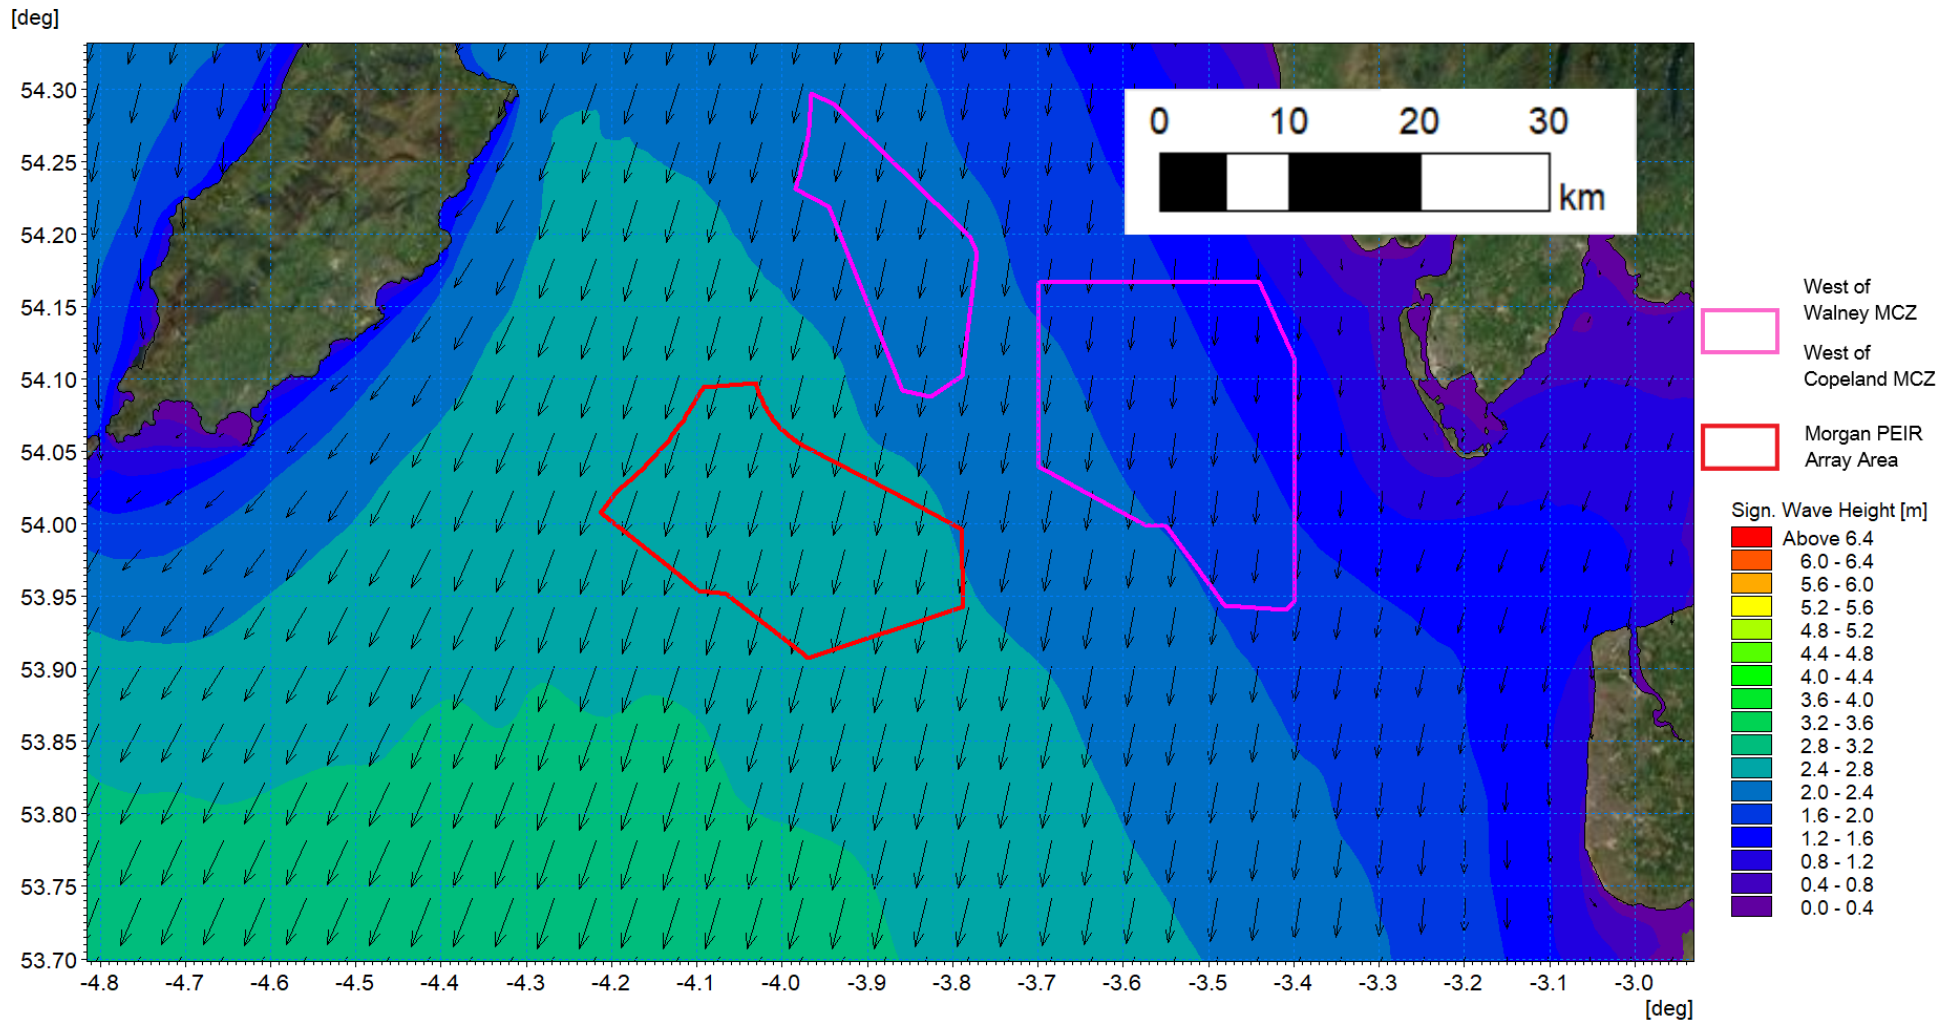


Figure 1.47: Wave climate 1 in 1 year storm from 030° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

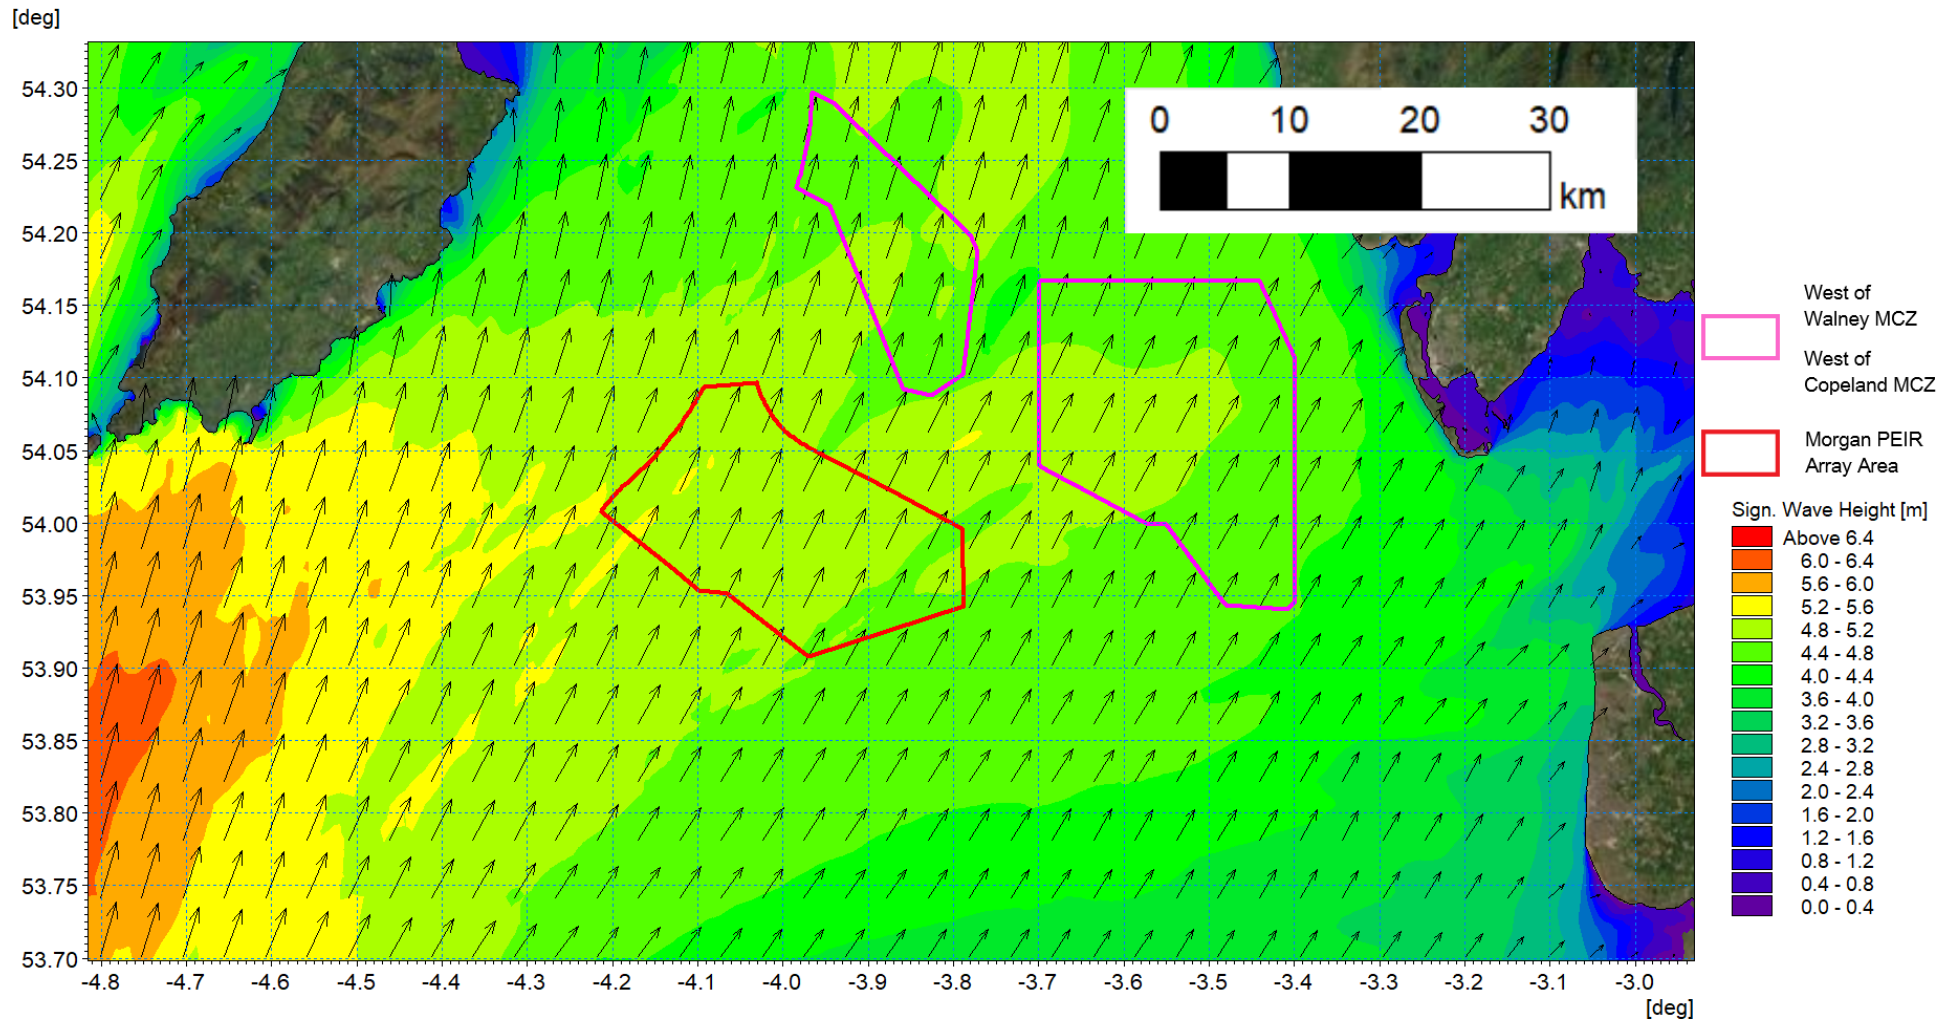


Figure 1.48: Wave climate 1 in 1 year storm from 210° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

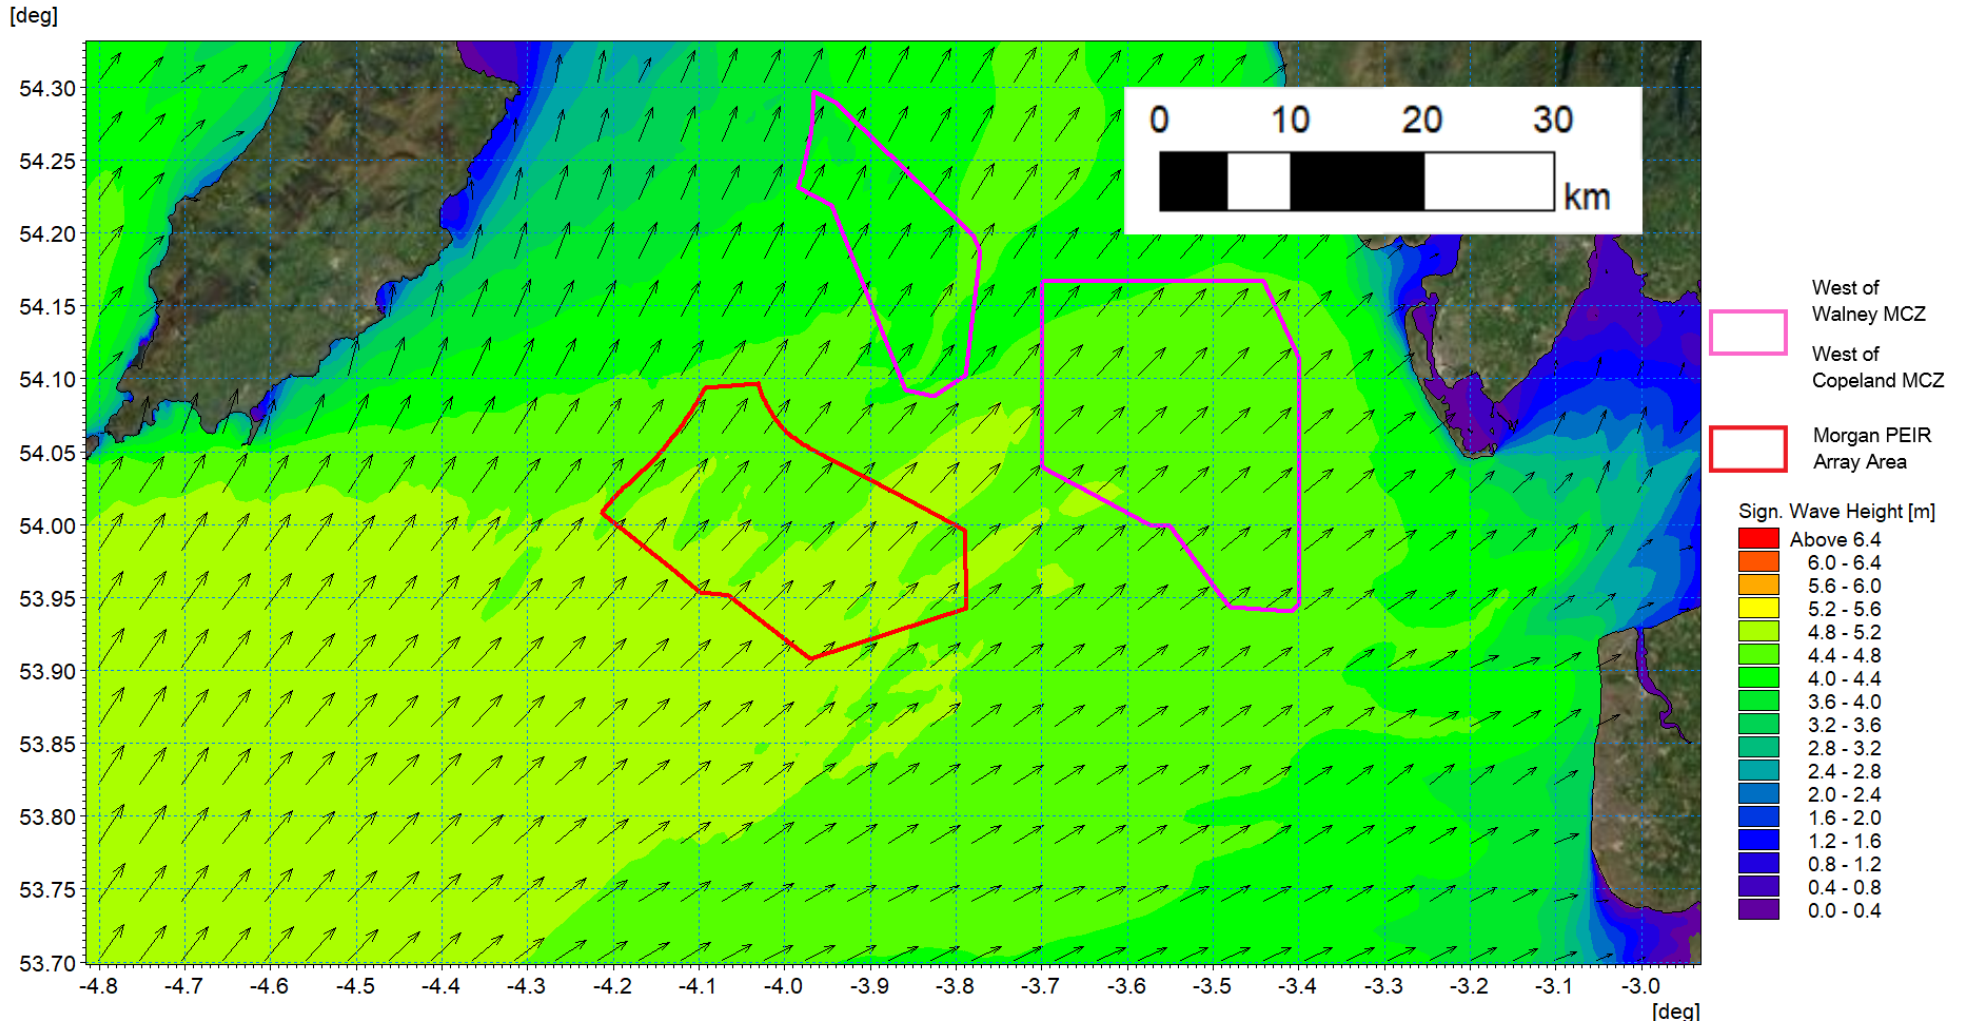


Figure 1.49: Wave climate 1 in 1 year storm from 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

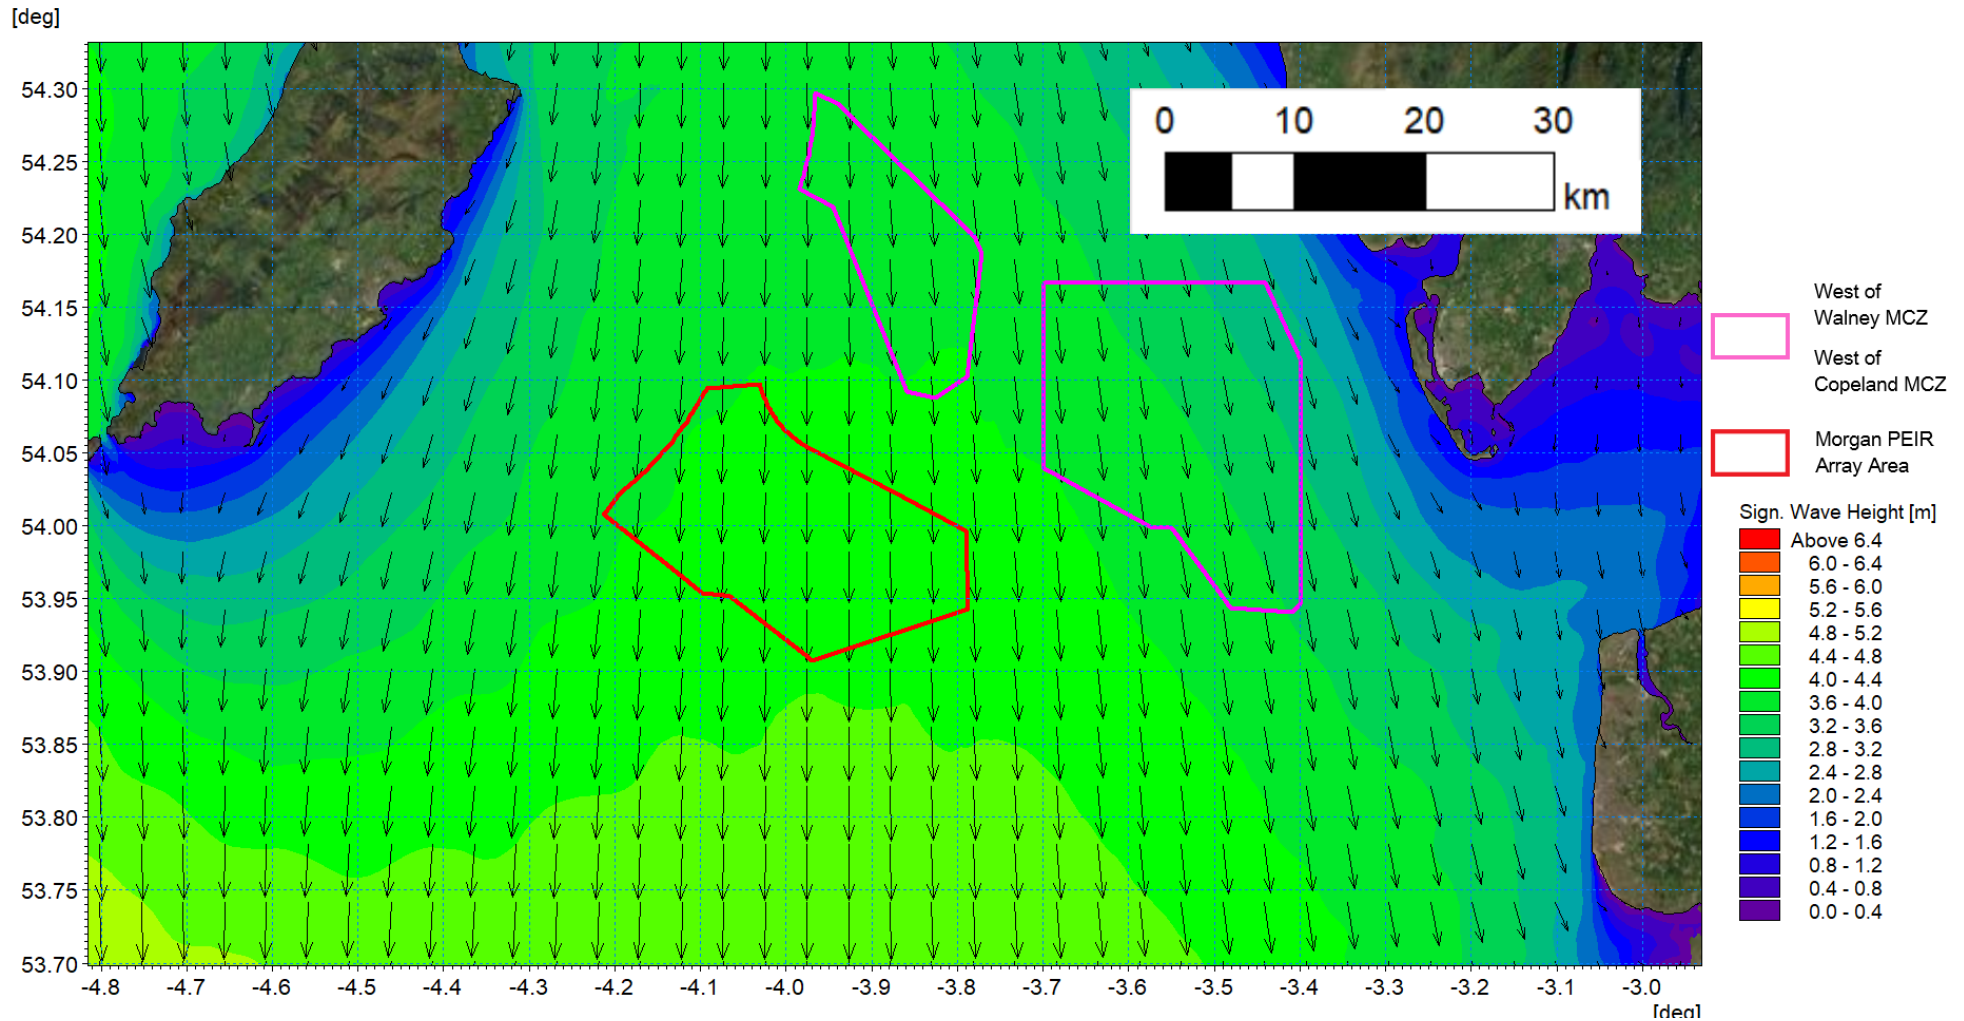


Figure 1.50: Wave climate 1 in 20 year storm from 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

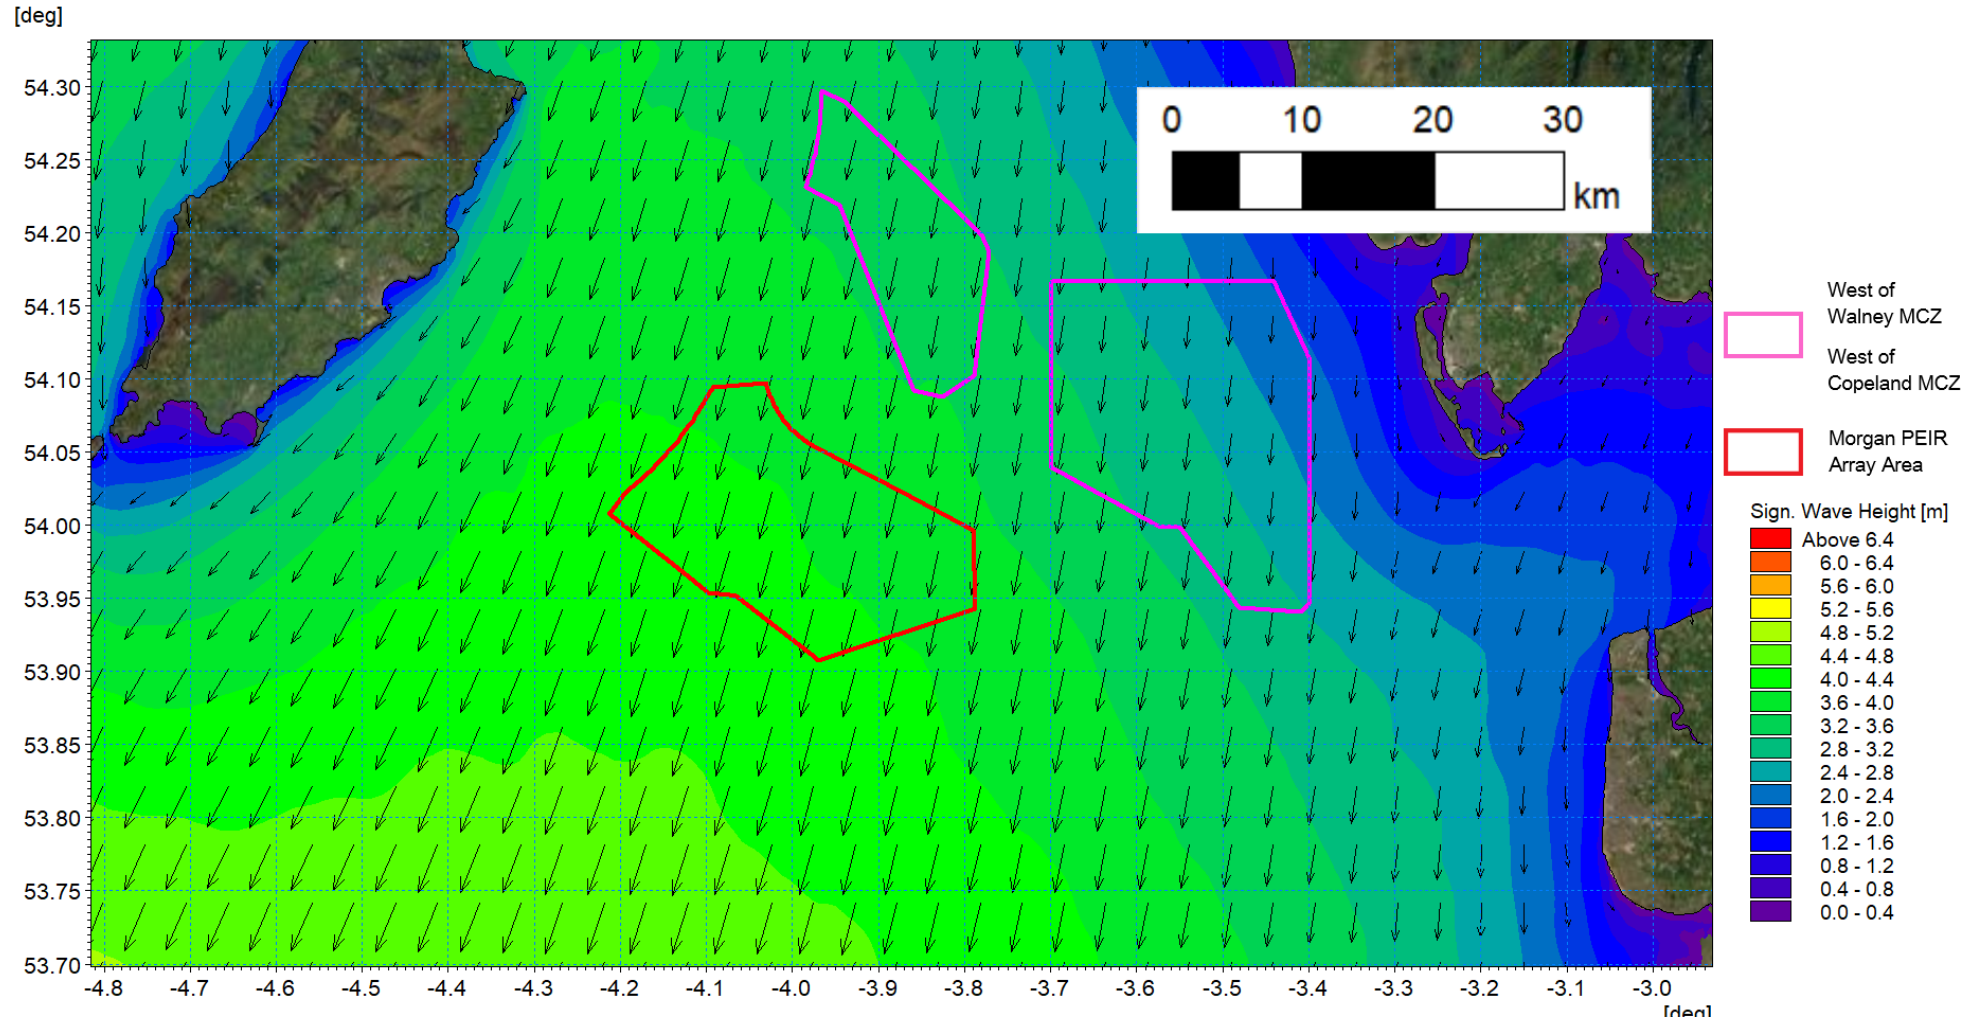


Figure 1.51: Wave climate 1 in 20 year storm from 030° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

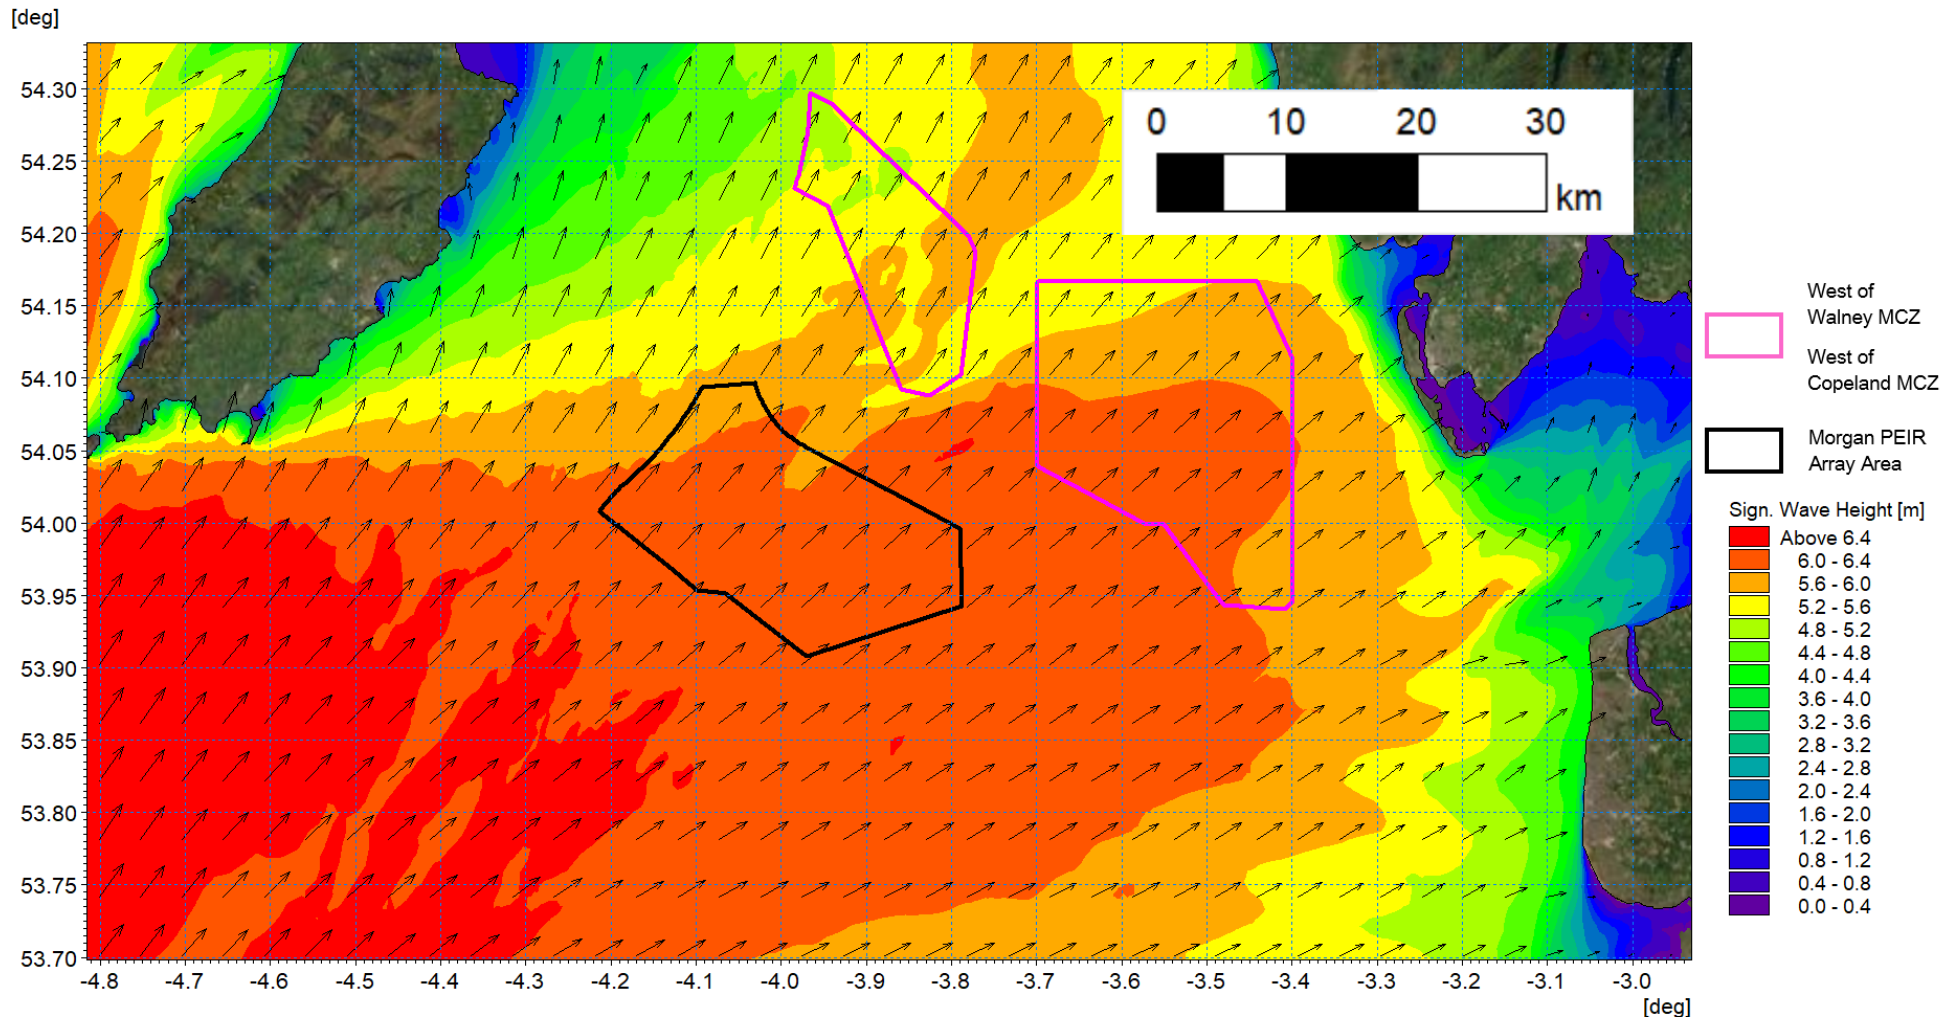


Figure 1.52: Wave climate 1 in 20 year storm from 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

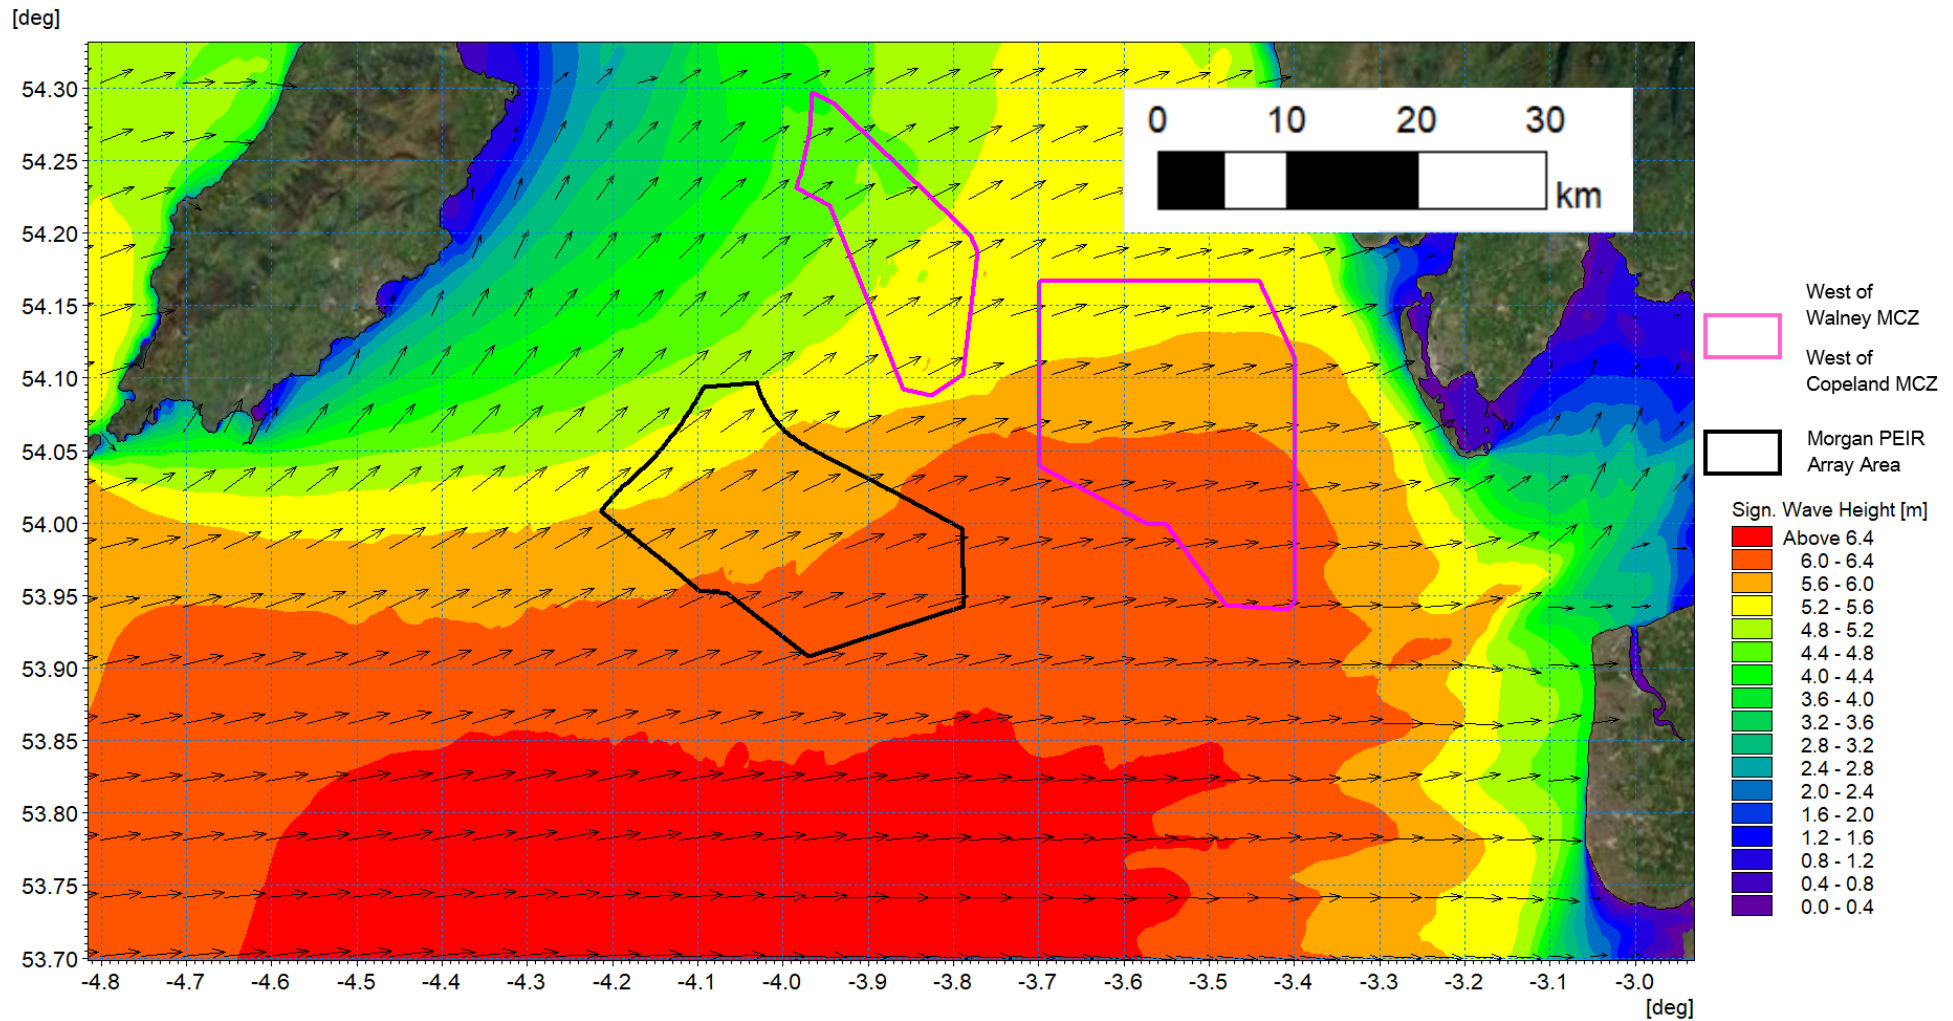


Figure 1.53: Wave climate 1 in 20 year storm from 270° MHW.

Littoral currents

- 1.3.5.33 The MIKE suite facilitates the coupling of models. The DA hydrodynamic model, used for the tidal modelling, coupled with the spectral wave model, provides a full wave climate incorporating the impact of water levels and currents on waves and wave breaking. Using this, the littoral currents (i.e. those currents driven by tidal, wave and meteorological forces) were examined.
- 1.3.5.34 As previously stated, the purpose of the modelling was to provide a baseline against which the impact of the installation of the Morgan Generation Assets was to be examined against. It was not designed to be an exhaustive physical processes modelling study and therefore an example storm condition was used as a benchmark. The 1 in 1 year storm from 210° sector was simulated with the inclusion of spring tides to encompass a wide range of tidal conditions and the resulting flood and ebb currents are presented in Figure 1.54 and Figure 1.55 respectively. These correspond with the (calm) tidal plots presented in Figure 1.31 and Figure 1.32. As expected, the presence of the northeast going waves increase the currents on the flood tide whilst reducing them on the ebb.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

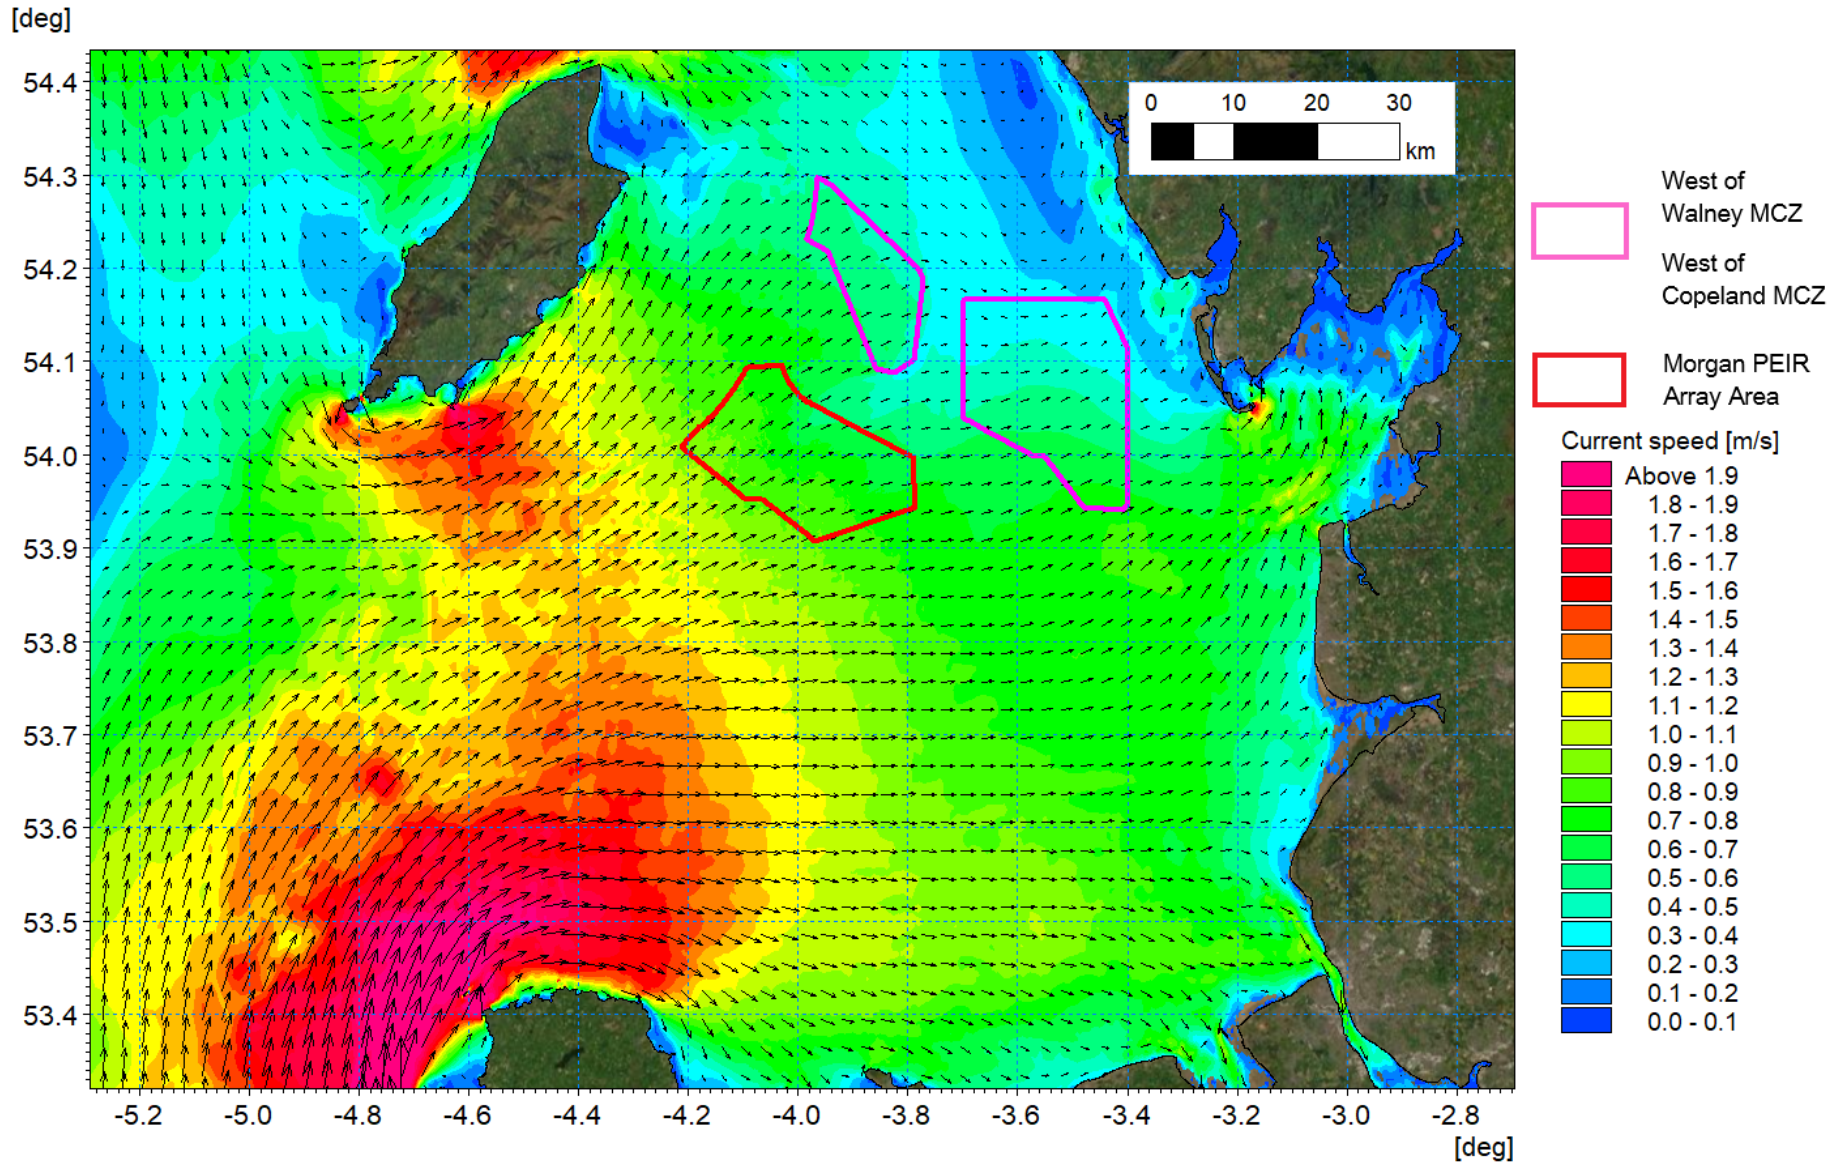


Figure 1.54: Littoral current 1 in 1 year storm from 210° - Flood Tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

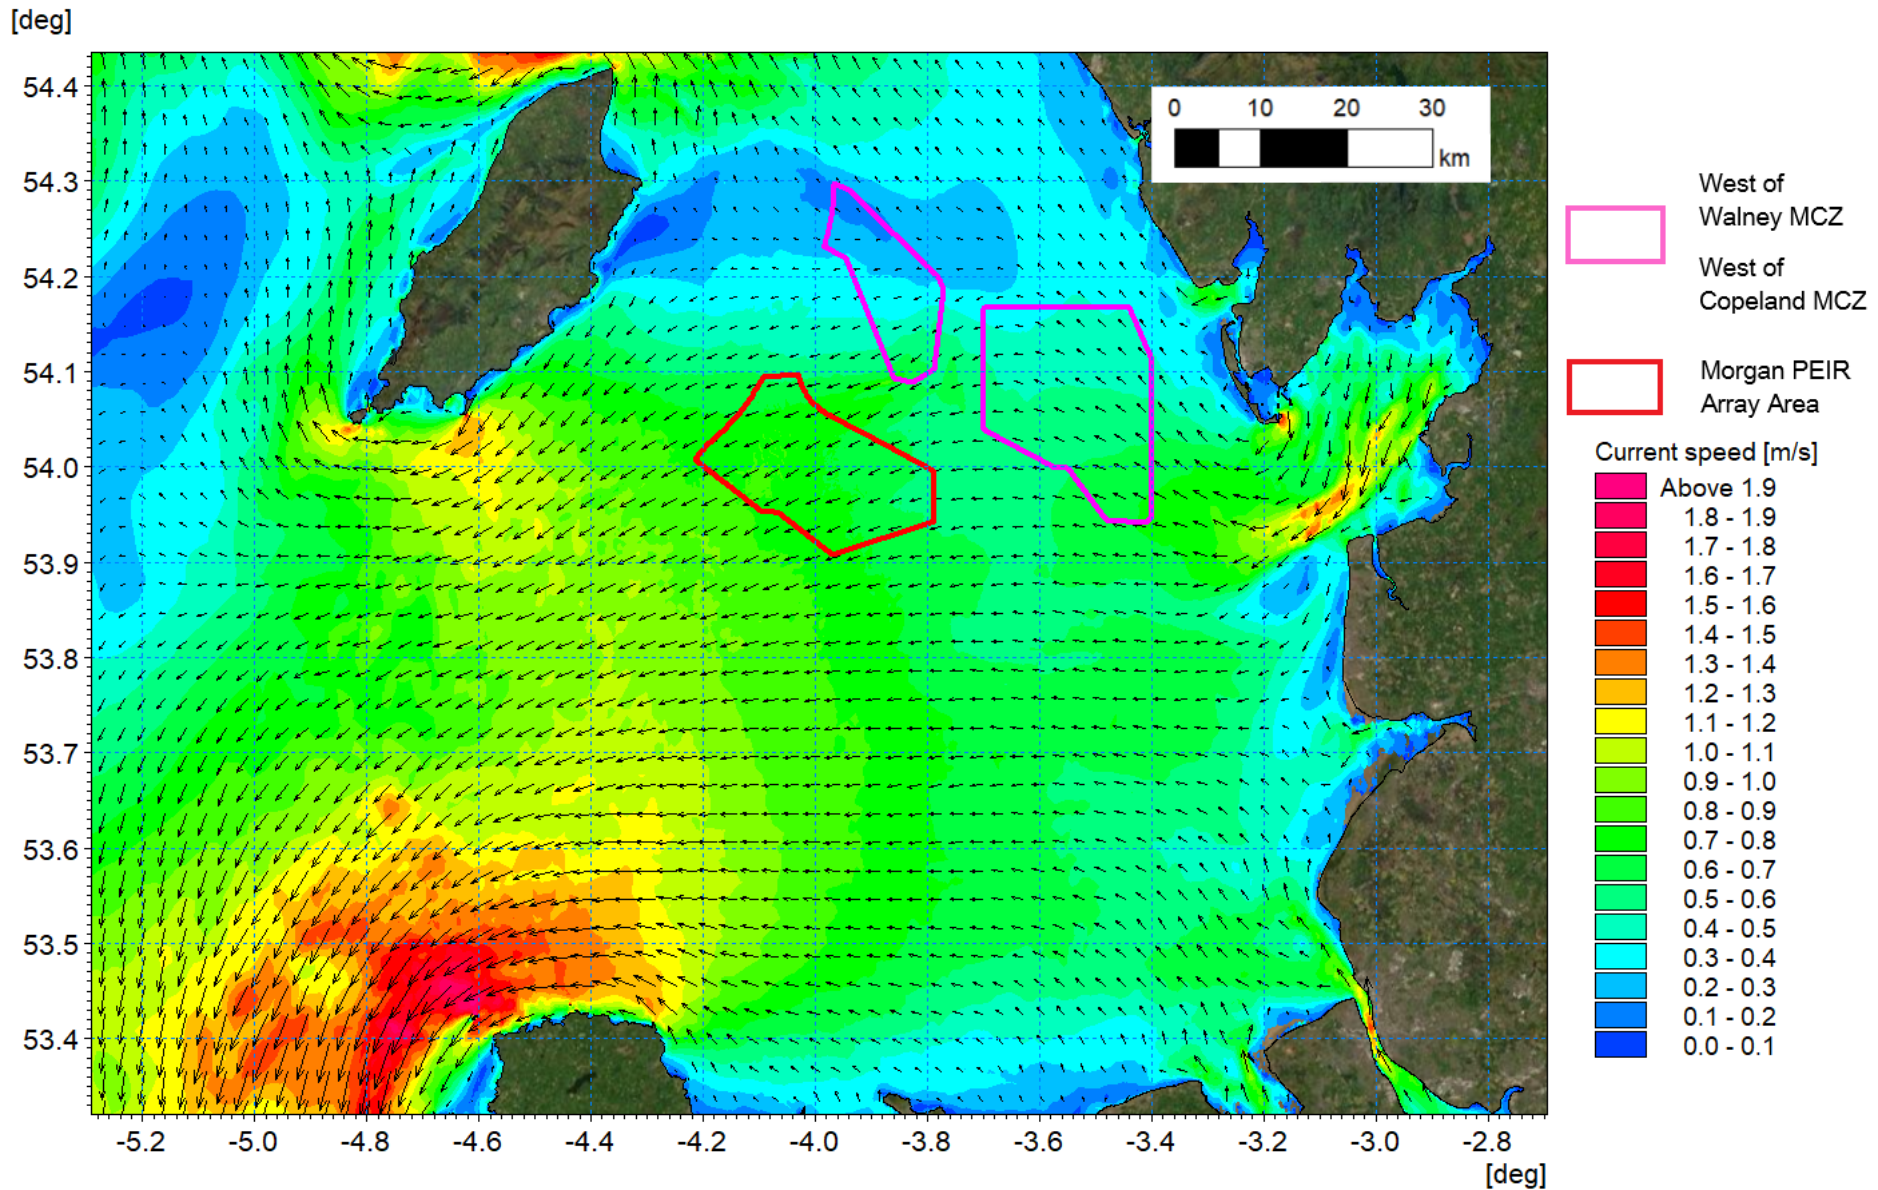


Figure 1.55: Littoral current 1 in 1 year storm from 210° - Ebb Tide.

Sedimentology and seabed substrate

- 1.3.5.35 An overview of surficial sediment geology and the seabed features data is presented in this section, based on a range of data sources including both publicly available datasets and interpretation undertaken of the SSS data collected during the recent geophysical surveys (Table 1.4). An understanding of seabed substrate types is required to assess the potential impacts which may arise due to the installation of wind turbines, offshore platform foundations and array cables.
- 1.3.5.36 The sediment grading properties applied within the modelling for both sediment transport assessment and characterisation of mobilised material during seabed preparation and installation operations was derived from BGS datasets as illustrated in Figure 1.56. These datasets included both generalised Folk classification from borehole logs and detailed particle analysis data, (Folk, 1954). This data was verified against Particle Size Analysis (PSA) of sediment samples collected during site-specific surveys the results of which were made available following completion of the modelling study.
- 1.3.5.37 The SSS interpretation defined a range of sediment types within the Morgan Potential Array Area comprising gravelly sand, sand, and gravel. Sandwaves and megaripples are associated with these sediment types. To inform the modelling study seabed sediment information was required beyond the extent of the survey data and the EMODnet Geology database was utilised. The seabed classification shown in Figure 1.57 shows both the datasets applied within the modelling context.
- 1.3.5.38 Following completion of the modelling studies for PEIR, a detailed analysis was undertaken of the geophysical and geotechnical data collected during the site-specific surveys for the project (bp/EnBW, 2023). Several glacial features were observed, particularly in the West and central of Morgan. Generally, the composition of these features is expected to be highly variable, but gravels and boulders expected to be very common. These features highlight that the seabed substrate would be derived from glacial origins and some areas more generally classified as boulders and cobbles in the preliminary assessment (and indeed within the EMODnet dataset) would be more precisely termed moraines which are comprised of glacial till.
- 1.3.5.39 The sediment parameters applied within the modelling used grading properties derived directly from the BGS sampled datasets, and subsequently verified from PSA of the site-specific grab samples. The re-characterisation of this material would not impact the modelling outcomes, as dispersion characteristics are not sensitive to the origin of the material but rather to the physical characteristics of the sediment.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

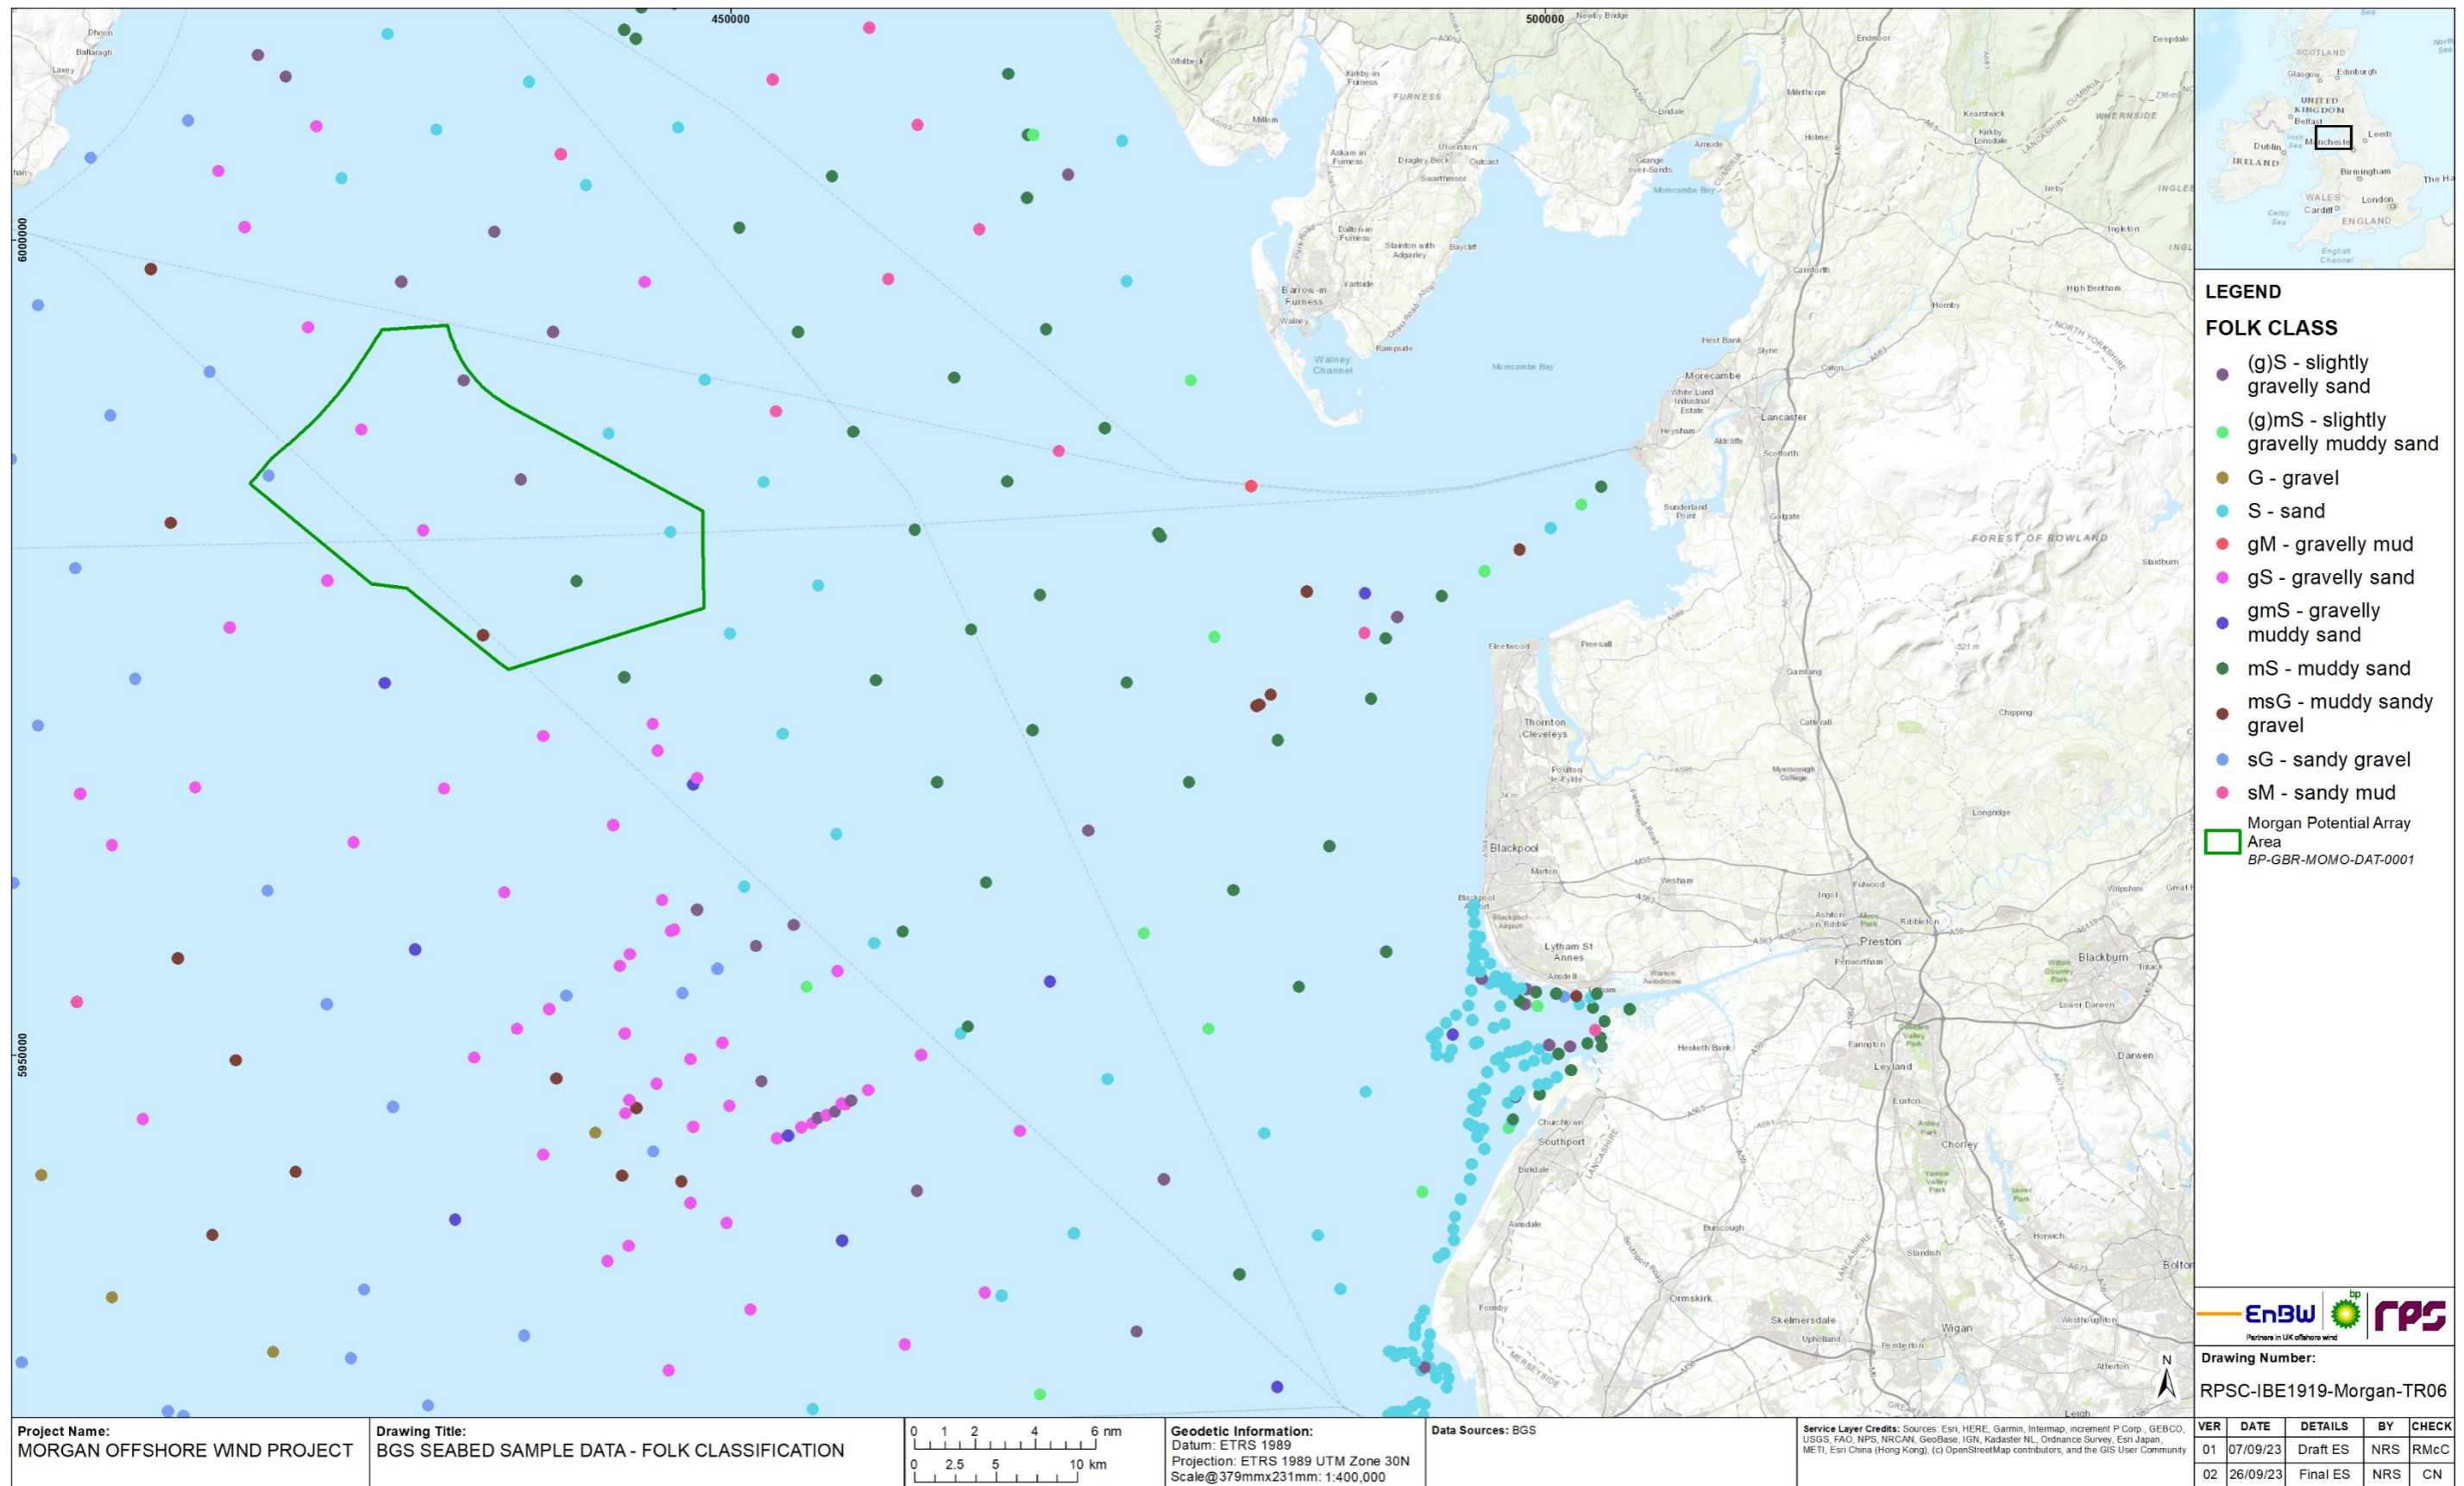


Figure 1.56: Seabed sample data Folk classification - BGS.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

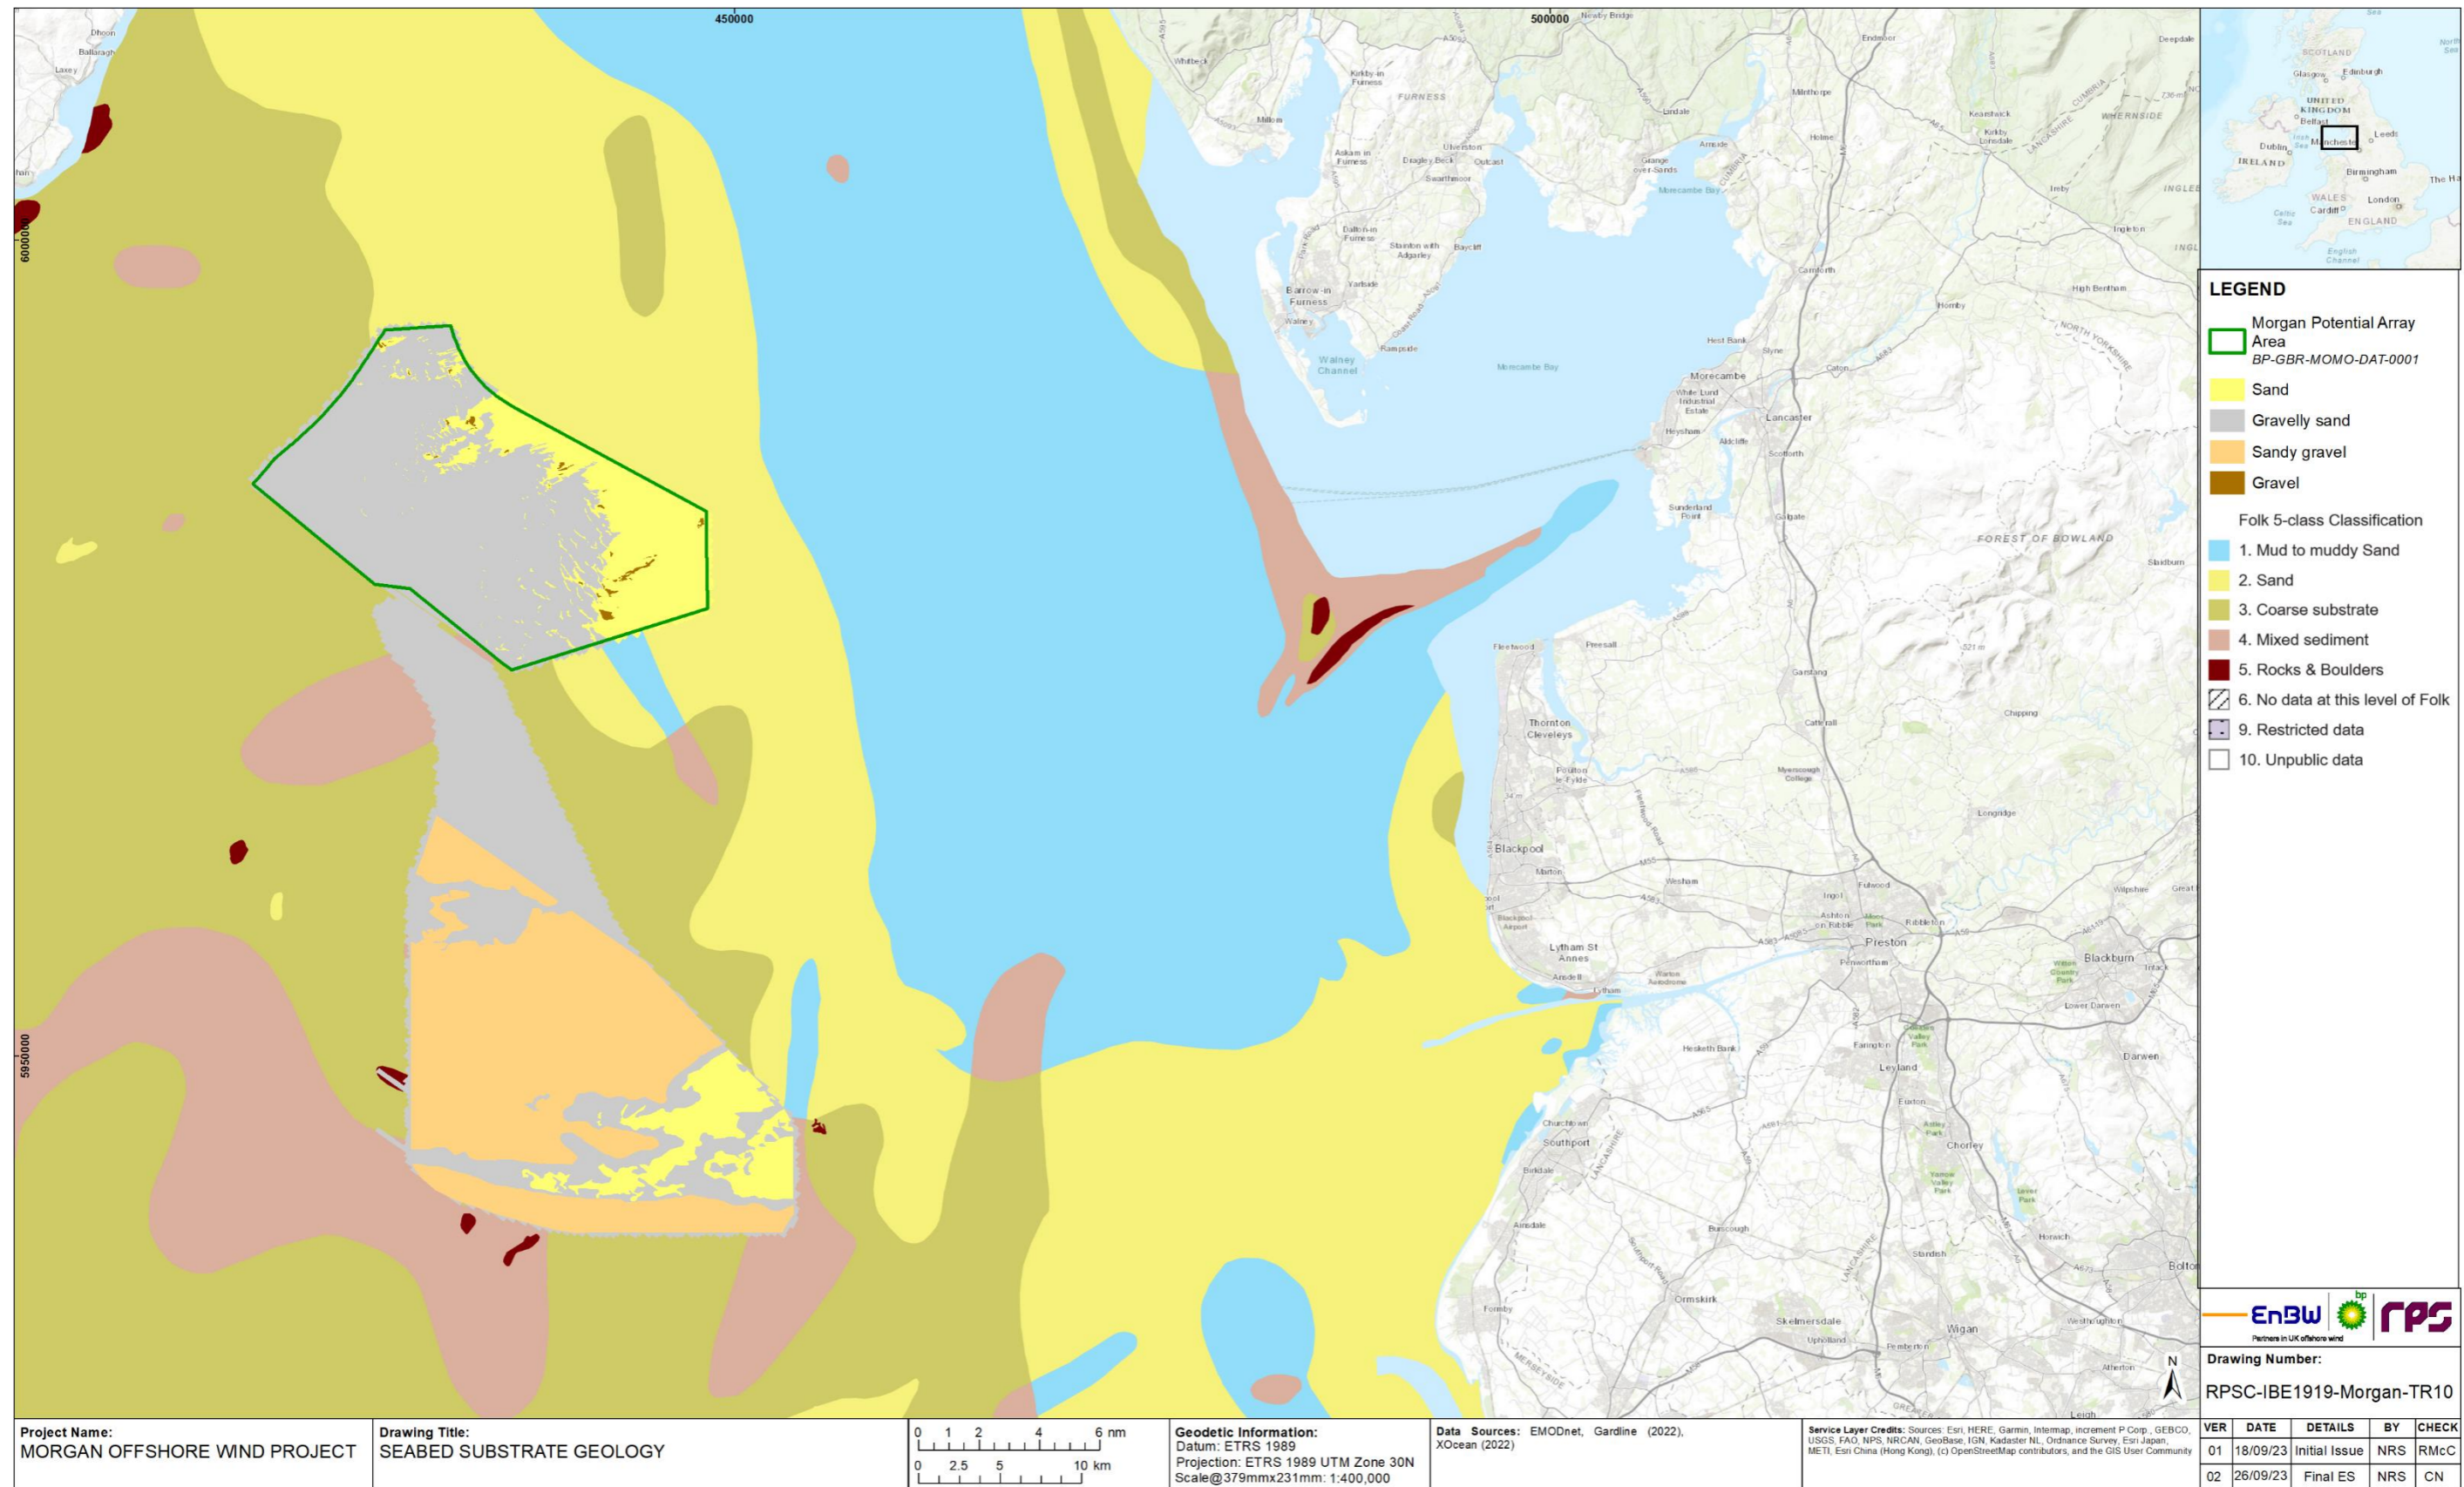


Figure 1.57: Seabed substrate geology EMODnet and SSS.

Sediment transport

- 1.3.5.40 The MIKE21 ST module enables assessment of bed sediment transport rates for non-cohesive sediment resulting from currents or combined wave-current flows. It was used to determine the sediment transport pattern within the model domain. The model combines inputs from both the hydrodynamic model and, if required, the wave propagation model. It used sediment characterisation provided by the recent survey and EMODnet data as presented in the previous section to determine the sediment transport characteristics. For each region a representative sample from the BGS was used to define the bed sediment and grading.
- 1.3.5.41 It is noted that for a detailed sediment transport study greater detail of sediment characteristics across the model domain and along the coastline would be required. In the context of a comparative study to identify the impact of the Morgan Generation Assets infrastructure, as defined in the PEIR, on sediment transport patterns the sediment characteristics identified within the survey and sampling were interpolated to those areas in the EMODnet data with similar sediment classifications.
- 1.3.5.42 The model domain was set up with a layer of mobile bed sediment. In areas where sediment is present an initial layer depth was set to 3 m and tapered to zero in the areas characterised as 'Rocks and Boulders' in the EMODnet geology datasets where the seabed is less mobile. These areas were subsequently classified as moraines which are comprised of glacial till associated with glacial lakes during detailed analysis of geophysical survey data, (bp, 2023). This initial depth ensured that sediment was not exhausted during the simulated events. Sediment transport was examined relating to spring tidal conditions over the course of two tidal cycles (one day) to provide a 'snap-shot' for comparison. The simulation included a period for the hydrodynamics to stabilise and develop across the domain prior to sediment transport being enabled (i.e. a 'warm-up' period).
- 1.3.5.43 Three aspects were examined:
- Residual current, which is the net flow over the course of the tidal cycle. This is effectively the driving force of the sediment transport
 - Potential sediment transport over this period
 - Potential sediment transport during flood and ebb tides. This provides information for a 'snap-shot' in time to enable the process to be illustrated.
- 1.3.5.44 The residual current is presented in Figure 1.58 and it should be noted that a log scale has been used to cover the range of residual current speeds encountered. The current vectors indicate residual flow into the east Irish Sea from the north and west which correlates with this region being a sediment sink. There are strong circulatory currents where tidal flows interact with headlands and embayments.
- 1.3.5.45 An indication of transport rate is shown in Figure 1.59, again using a log scale palette as the values within the offshore regions are several orders of magnitude smaller than those along the coastline. The greatest transport rates are seen in areas where finer sand fractions are present and in estuaries and at headland where tidal currents are strongest. The mechanism is more clearly illustrated in Figure 1.60 and Figure 1.61 for flood and ebb tides respectively. It is evident that transport rates are highest during the dominant flood tide and the region is a sediment sink.
- 1.3.5.46 As previously discussed, the modelling undertaken was not designed to form a detailed sediment transport modelling study but to provide an indication of potential changes as a result of the installation of the Morgan Generation Assets infrastructure, as

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

defined in the PEIR. Therefore, by way of completeness, and for use in the comparative study, residual currents relating to the 1 in 1 year return period storm approaching from 210° are also presented, Figure 1.62. As anticipated, the littoral currents and dominant flood tide significantly increase easterly residual currents particularly along the Welsh coastline. This in turn would result in increased sediment transport rates during storm conditions.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

[deg]

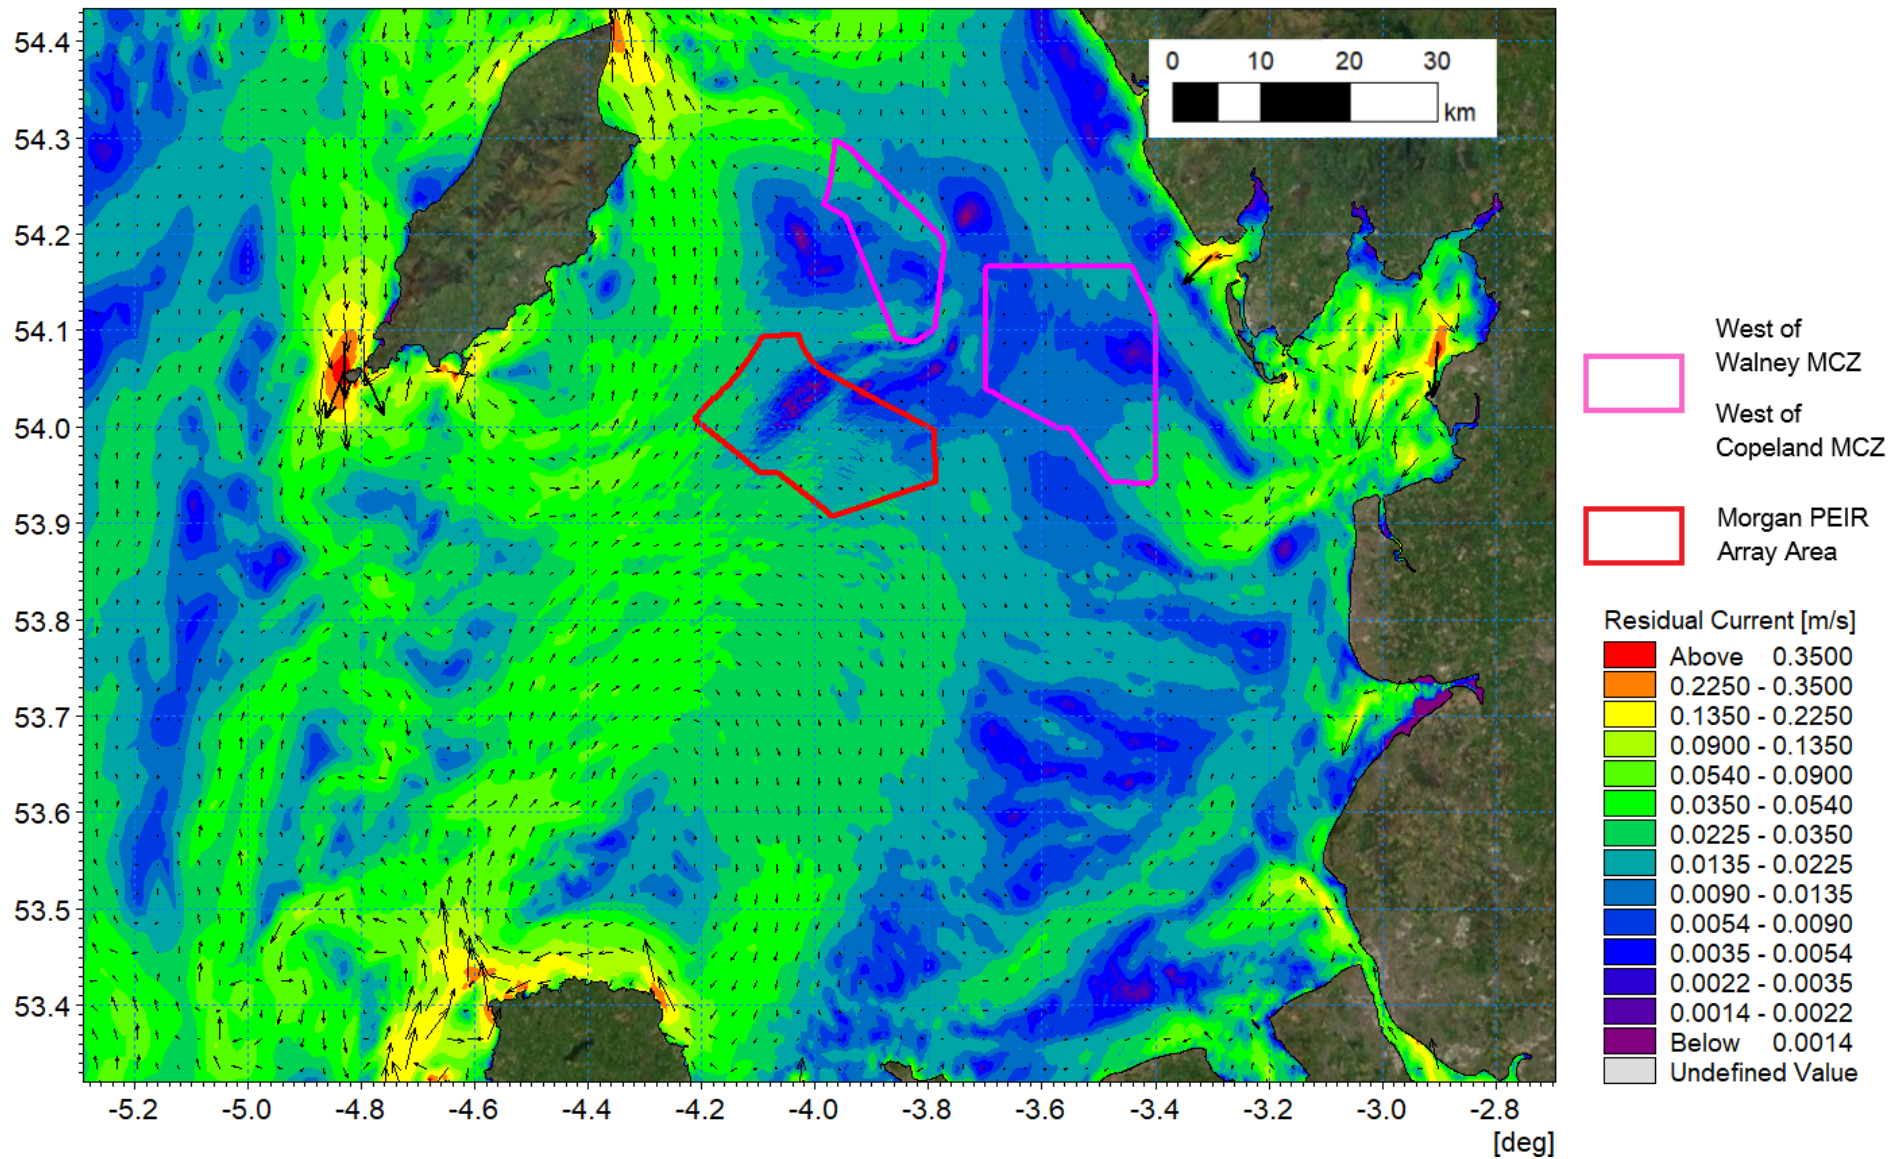


Figure 1.58: Residual current spring tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

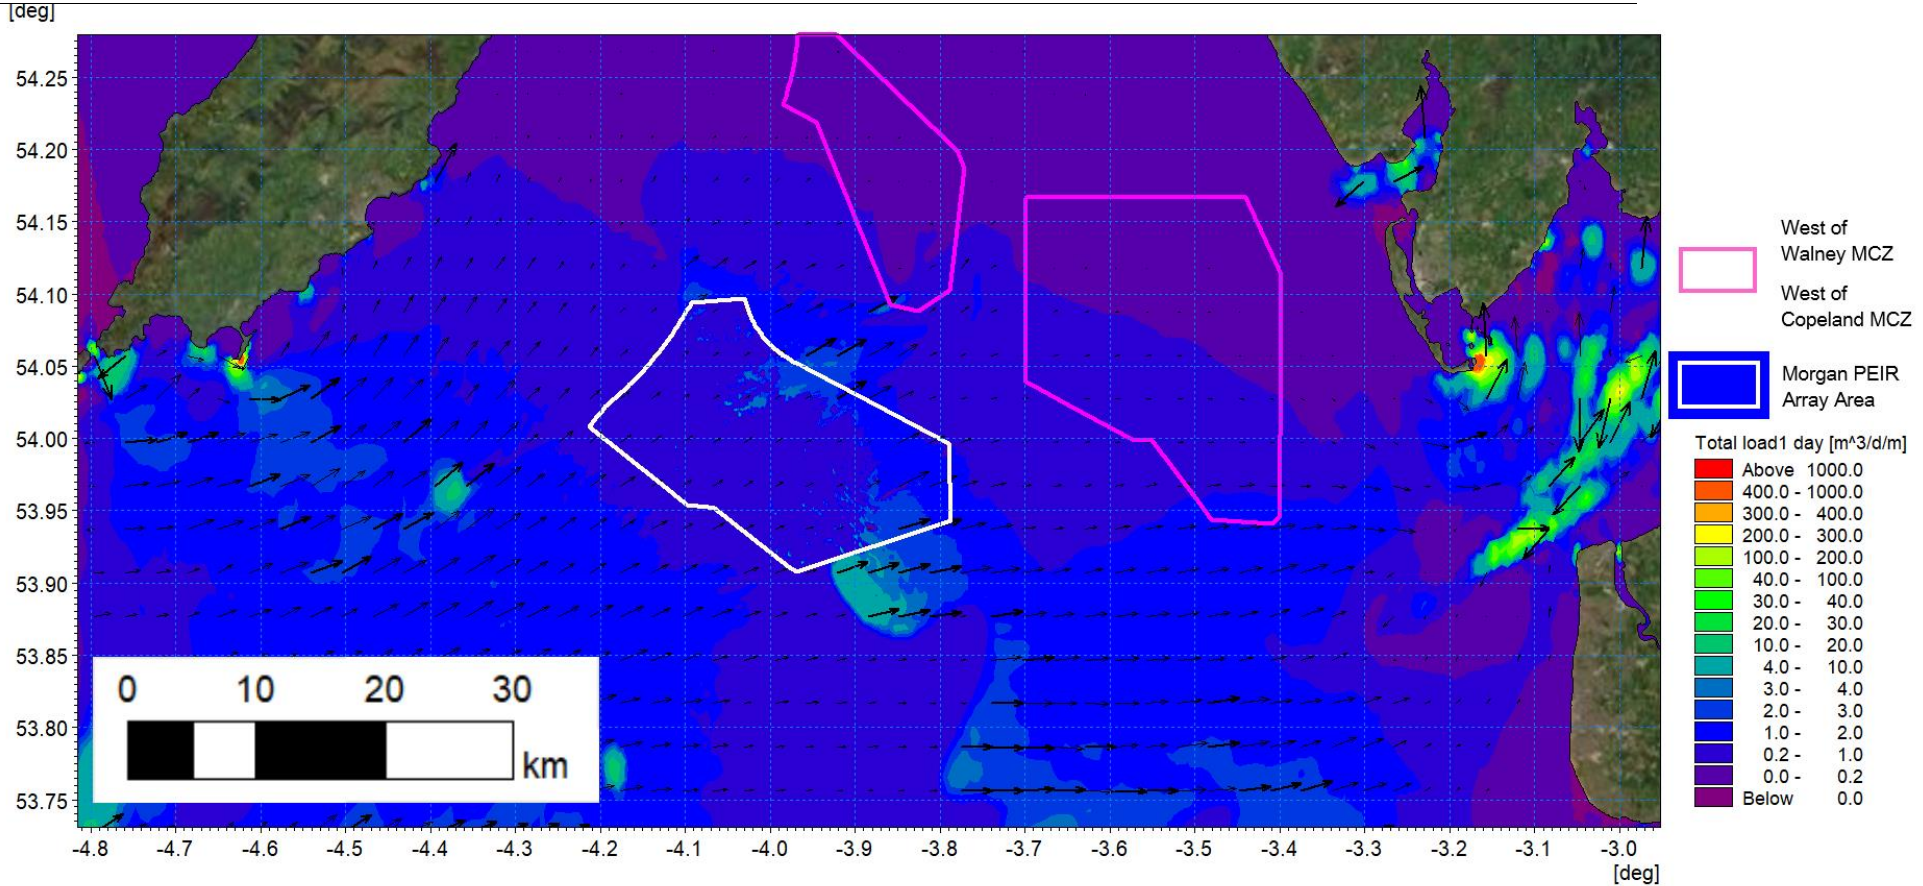


Figure 1.59: Potential sediment transport over the course of one day (two tide cycles).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

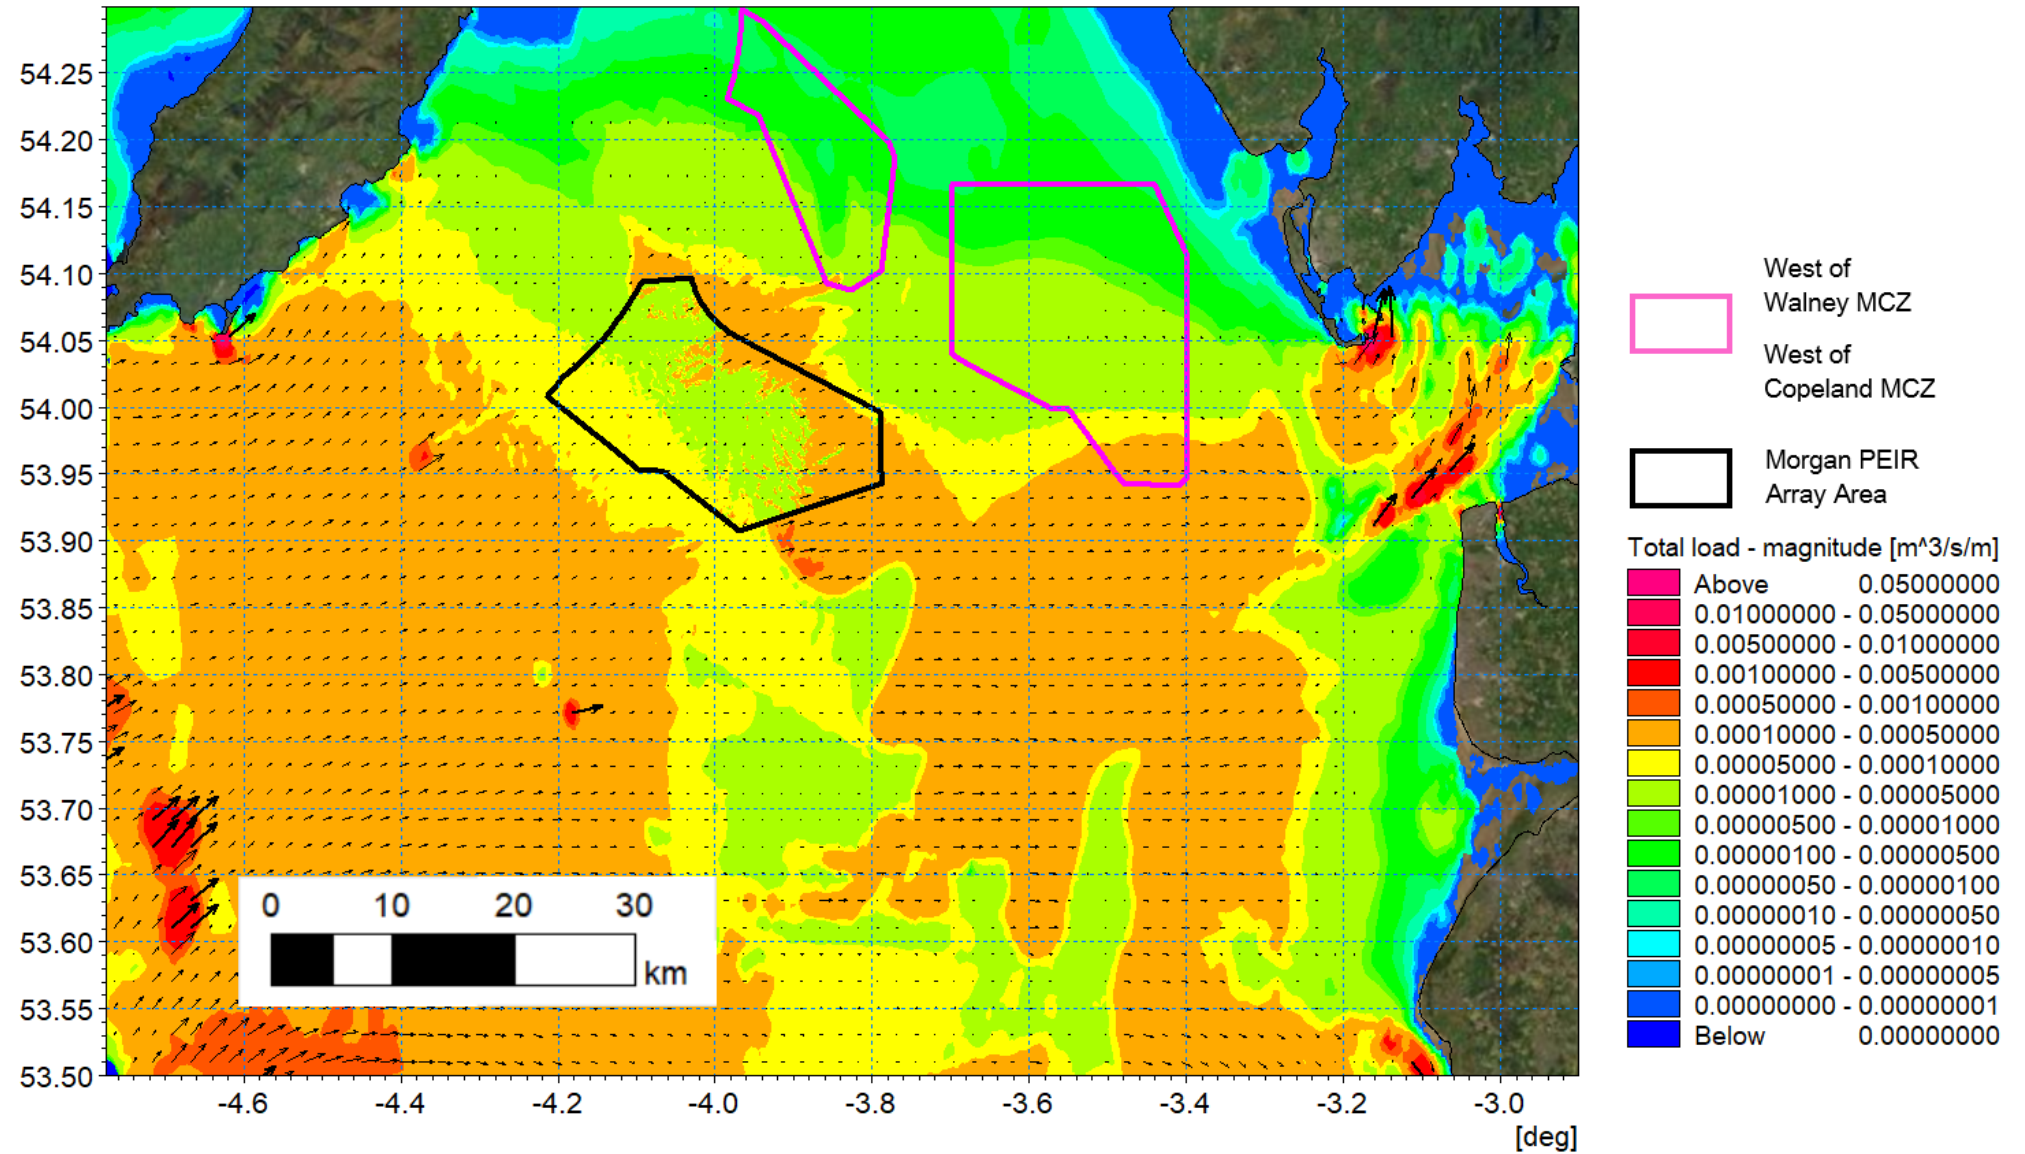


Figure 1.60: Sediment transport – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

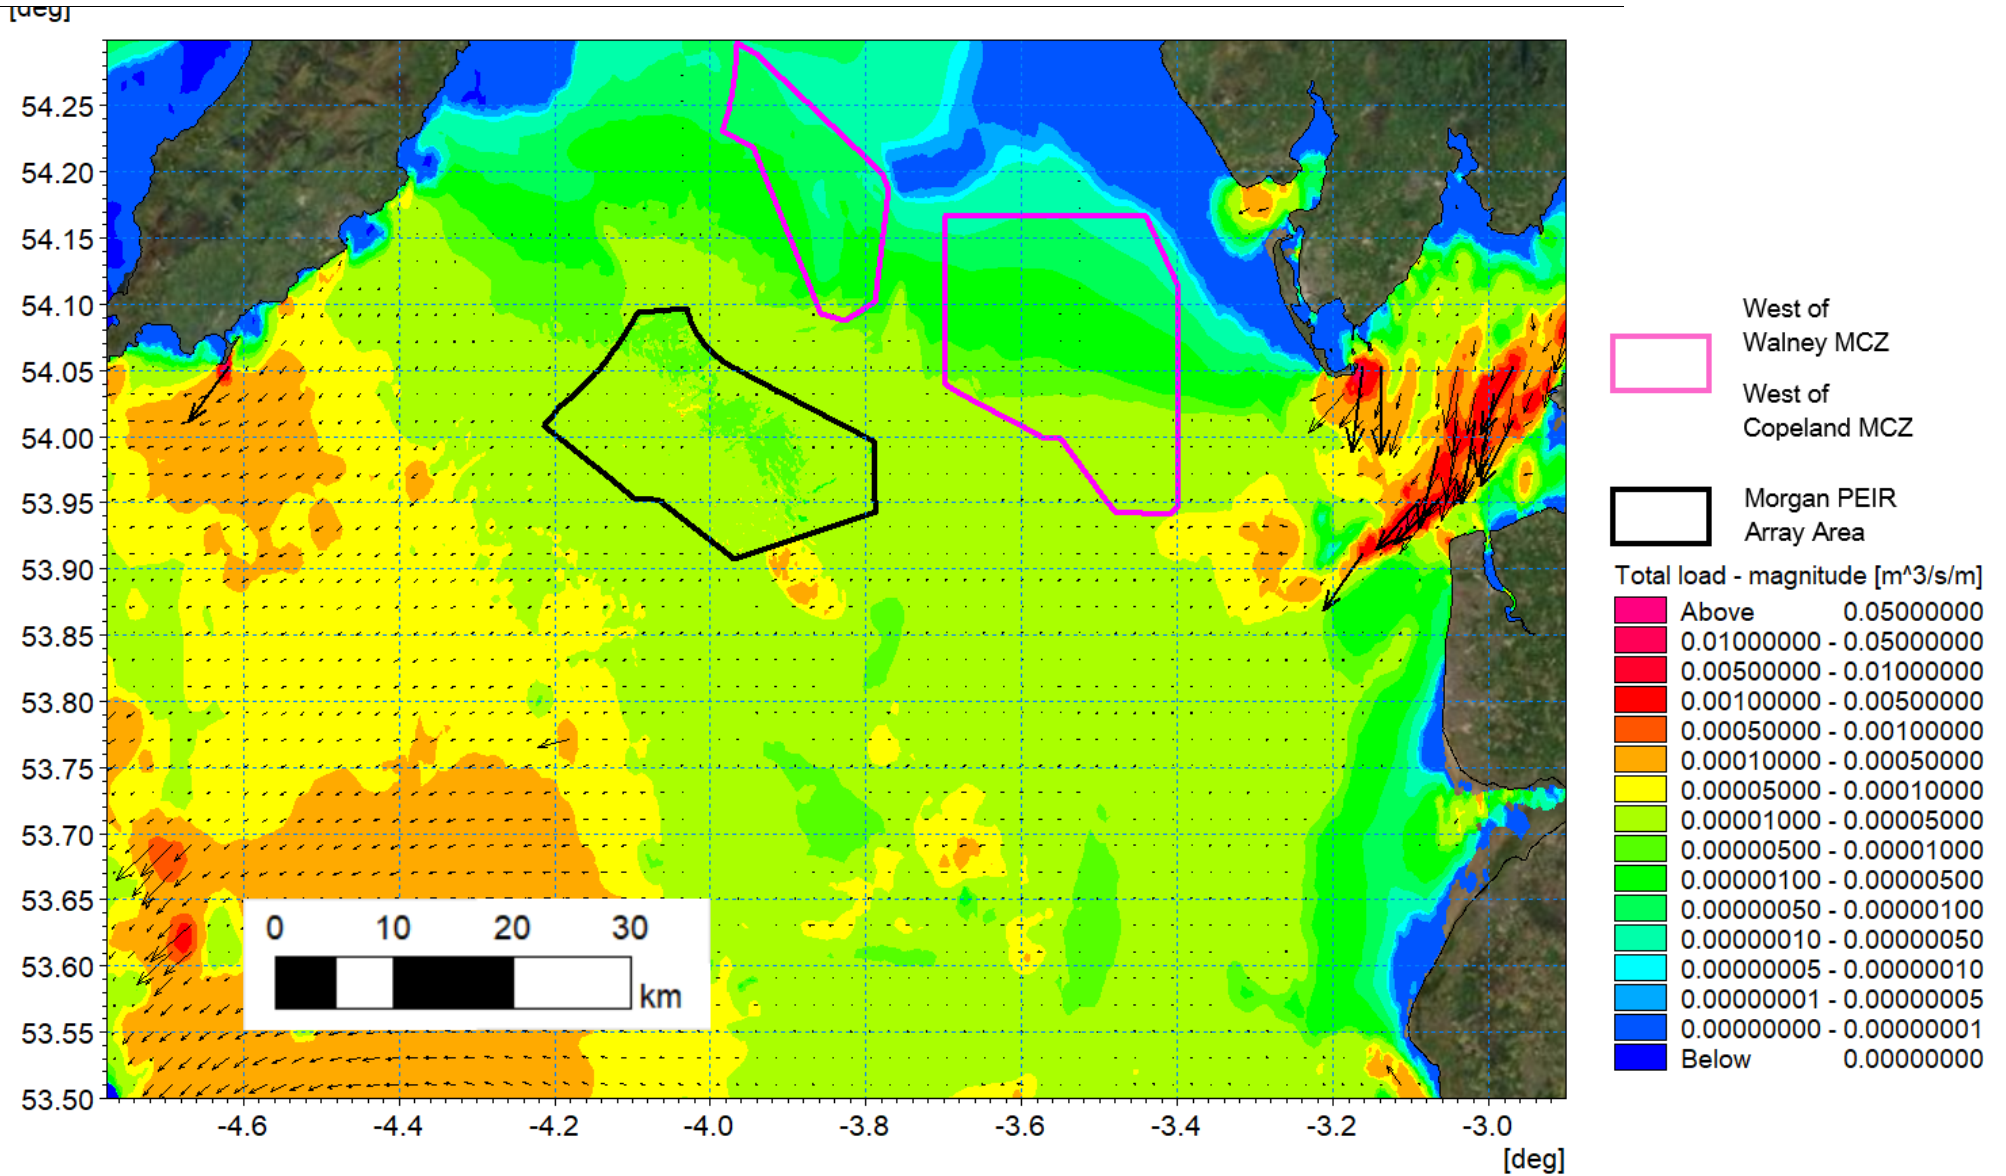


Figure 1.61: Sediment transport – ebb tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

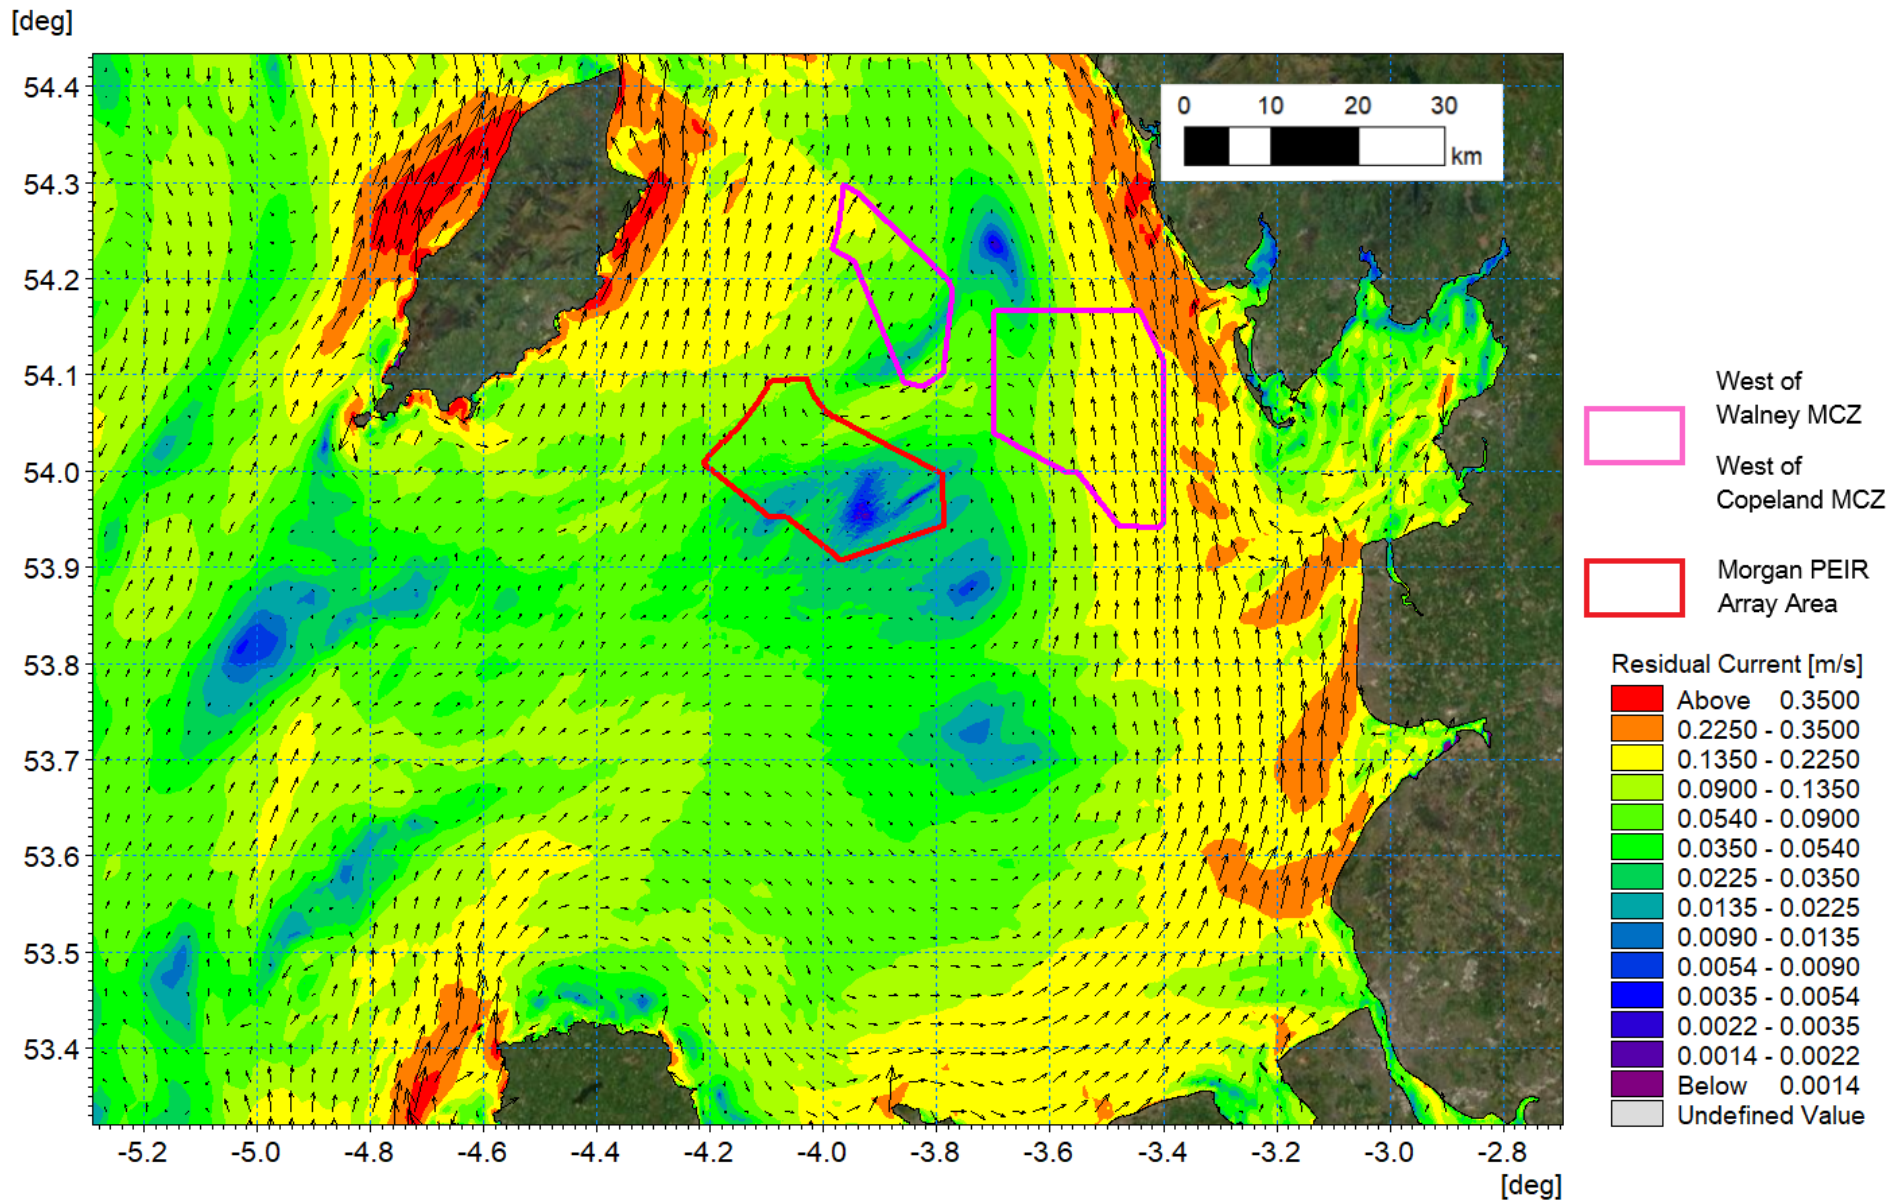


Figure 1.62: Residual current spring tide with 1 in 1 year storm from 210°.

Suspended sediments

- 1.3.5.47 The principal mechanisms governing SSC in the water column are tidal currents, with fluctuations observed across the spring-neap cycle and across the different tidal stages (high water, peak ebb, low water and peak flood) observed throughout both datasets. It is key to note that SSCs can also be temporarily elevated by wave-driven currents during storm events. During high-energy storm events, levels of SSC can rise significantly, both near bed and extending into the water column. Following storm events, SSC levels will gradually decrease to baseline conditions, regulated by the ambient regional tidal regimes. The seasonal nature and frequency of storm events supports a broadly seasonal pattern for SSC levels.
- 1.3.5.48 Based on the data recorded within the Morgan Potential Array Area, the average near bed turbidity associated is circa 2 mg/l. As shown in Figure 1.63, spikes in near surface turbidity correspond with increases in the significant wave height during storm conditions. The data is presented for the November 2021 to March 2022 period with peaks reaching circa 20 mg/l.
- 1.3.5.49 For more generalised conditions the Cefas Climatology Report 2016 (Cefas, 2016) and associated dataset provides the spatial distribution of average non-algal Suspended Particulate Matter (SPM) for the majority of the UK Continental Shelf (UKCS). Between 1998 and 2005, the greatest plumes are associated with large rivers such as those that discharge into the Thames Estuary, The Wash and Liverpool Bay, which show mean values of SPM above 30 mg/l. The levels of SPM reported by CEFAS between 1998 to 2005 of approximately 0.9 mg/l to 3 mg/l are similar to the values recorded at Morgan Potential Array Area. Higher levels of SPM are experienced more commonly in the winter months; however, due to the tidal influence, even during summer months the levels may become elevated. As shown in Figure 1.63 spikes in near surface turbidity correspond with increases in the significant wave height.

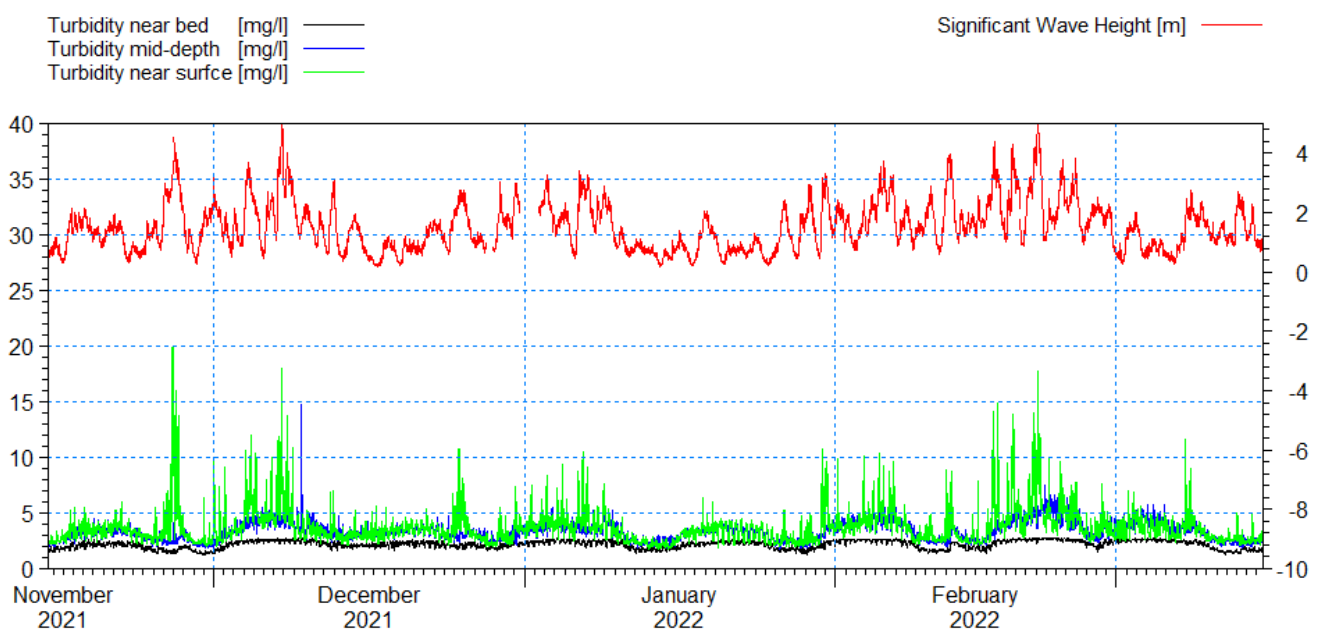


Figure 1.63: Turbidity levels from the Morgan metocean site.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

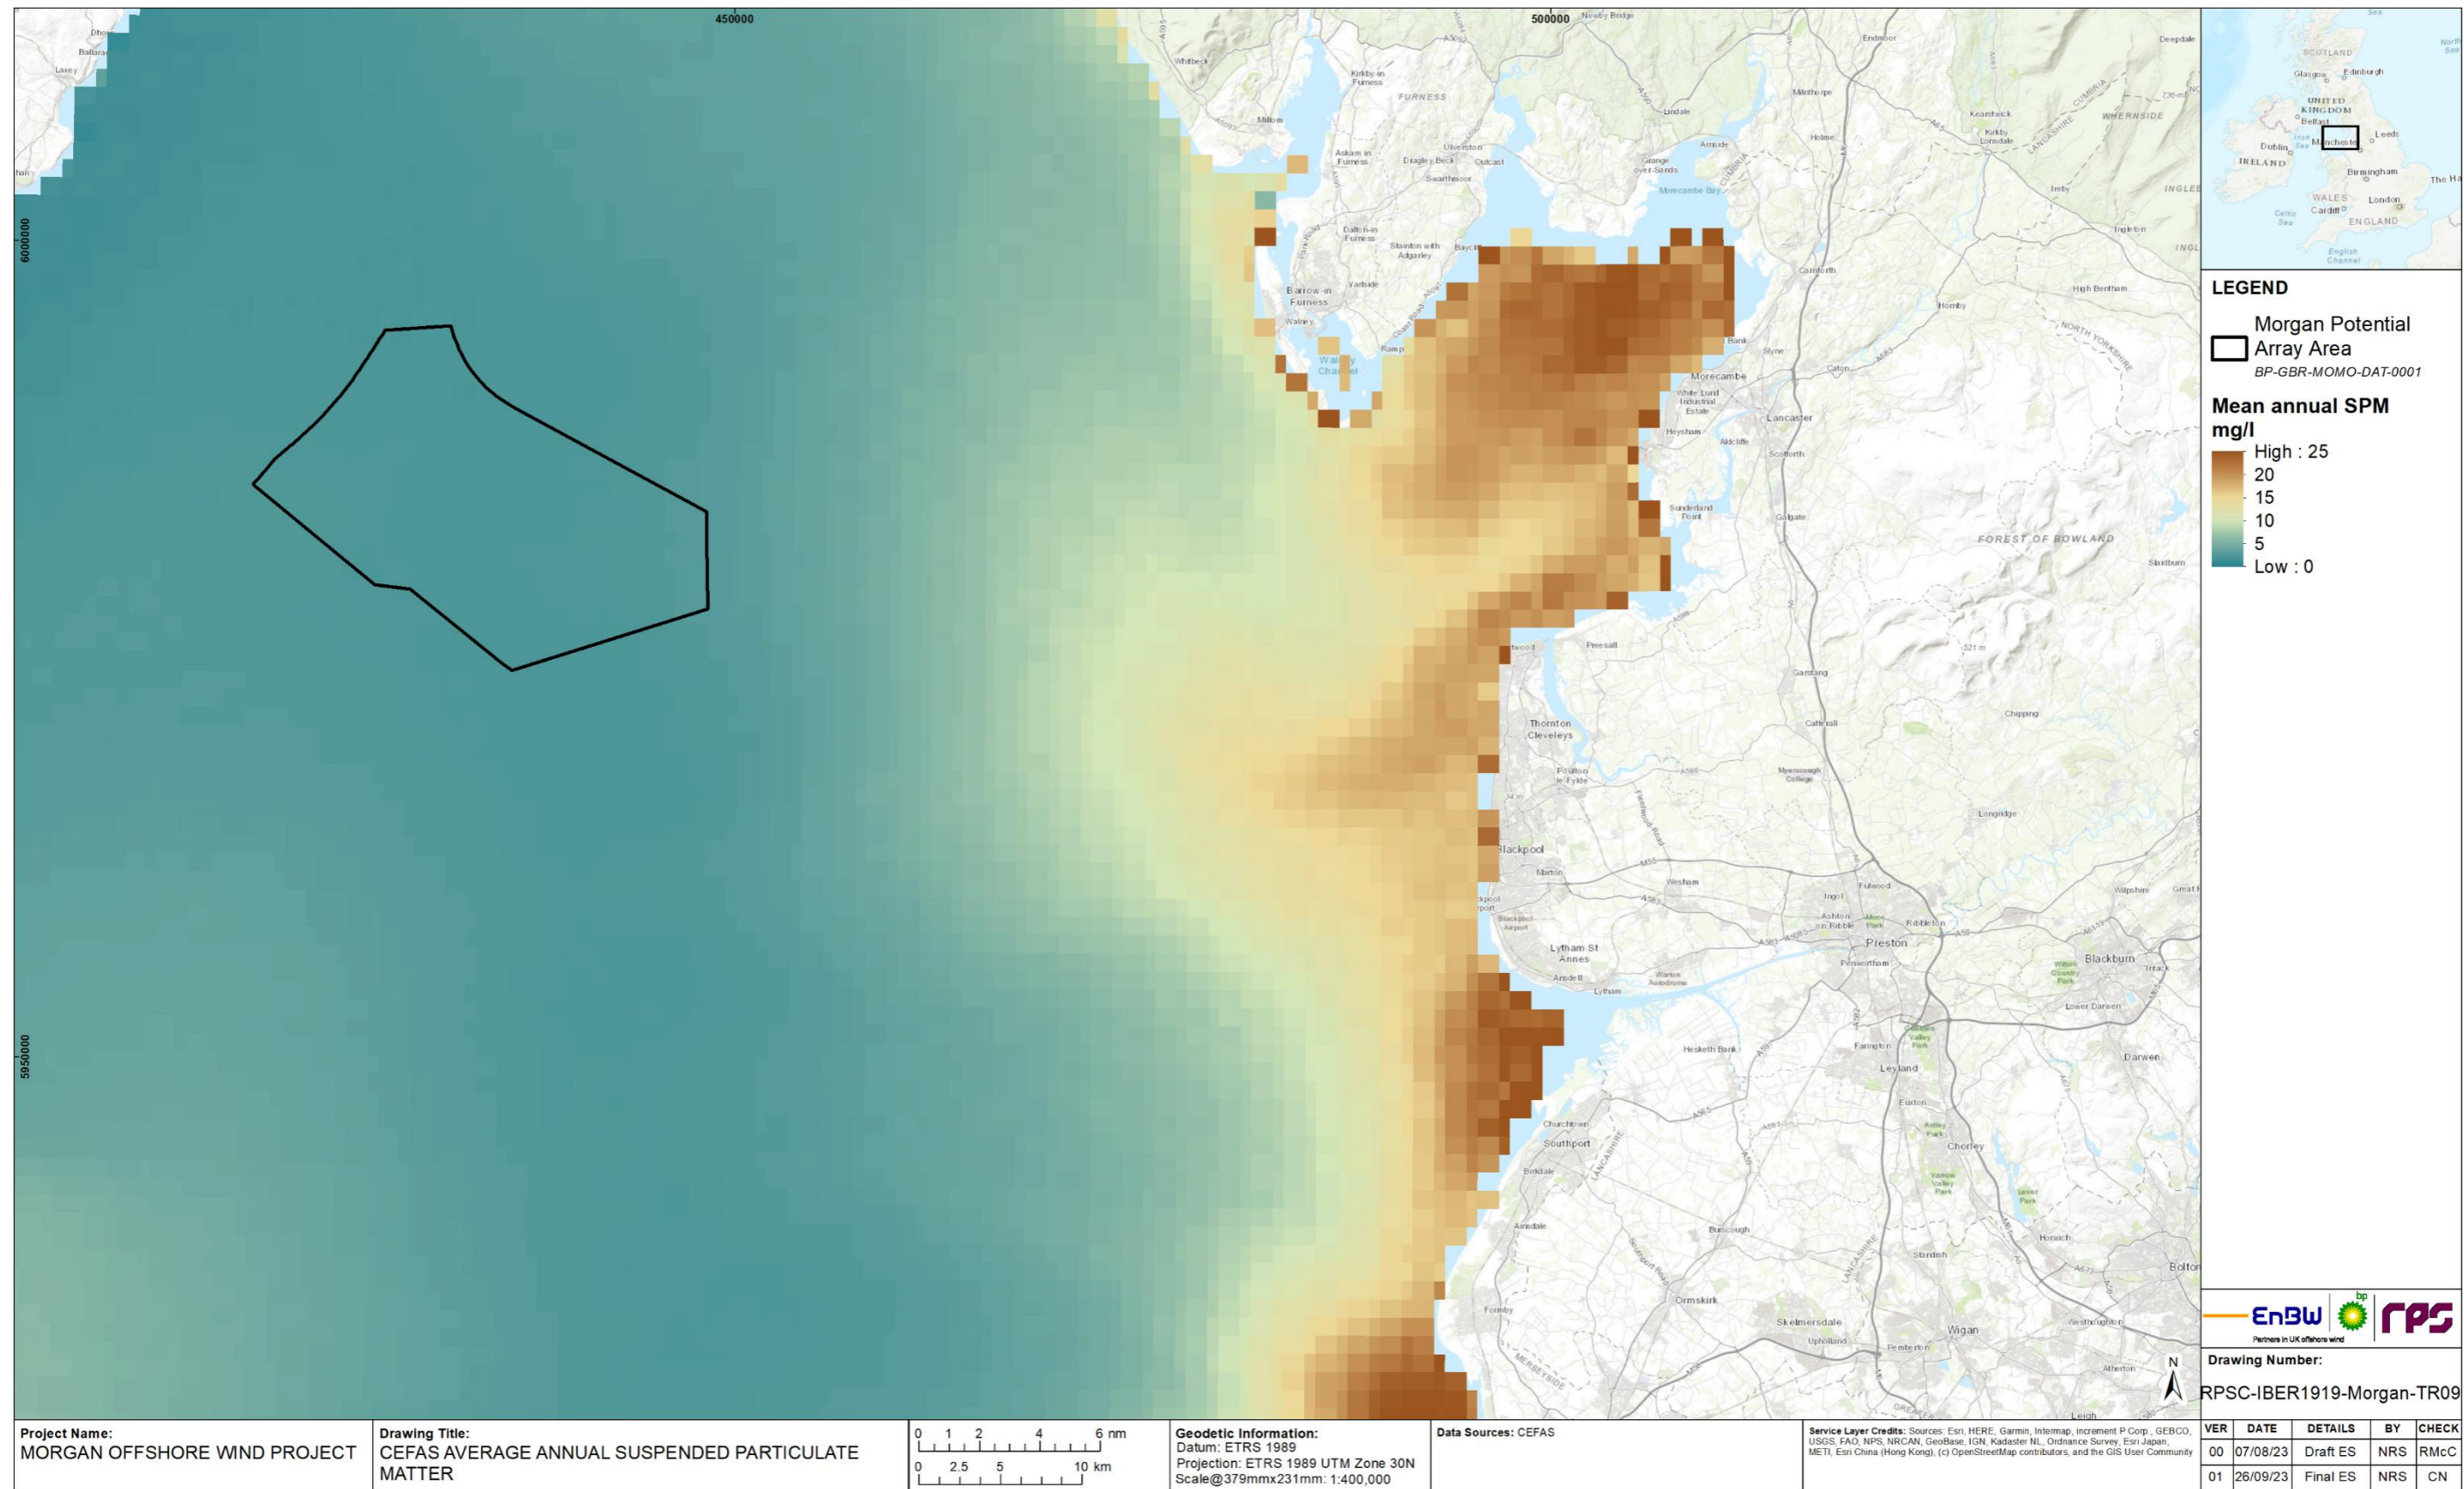


Figure 1.64: Distribution of average non-algal SPM (CEFAS, 2016).

1.3.6 Potential environmental changes (as presented in the PEIR)

Overview

- 1.3.6.1 The potential changes to the baseline hydrographic conditions as a result of the installation and presence of the Morgan Generation Assets, as defined for the PEIR, are quantified in the following sections. These changes relate to the presence of the infrastructure within the water column and seabed and are therefore associated with wind turbine legs along with cable and scour protection. The potential changes to sea state and sediment transport regimes were established by repeating the modelling undertaken in the previous section with the inclusion of the Morgan Generation Assets as defined in the project description for PEIR. The modelling was undertaken using an indicative layout which included the following changes in line with the indicative Maximum Design Scenario (MDS) for physical processes parameters:
- Leg structures 5 m in diameter relating to 68 wind turbines each comprising four legs
 - Scour protection 56 m diameter and 2.5 m in height associated with 16 m suction bucket foundations for each wind turbine leg
 - Leg structures 3 m in diameter relating to 4 OSPs each comprising three legs
 - Scour protection 49 m diameter and 2.5 m in height associated with 14 m suction bucket foundations for each OSP leg
 - Inter-array cable protection to a height of 3 m and 5 m width with cable crossings 4 m in height, 32 m width and 60 m length
 - Interconnector cable protection to a height of 3 m and 10 m width with cable crossings 3 m in height, 20 m width and 50 m length.
- 1.3.6.2 It should be noted that the scale of the model mesh meant that the general flow and sediment patterns around the structures could be observed on the wider scale. The detailed impact of secondary scour is localised, site and design specific in nature. The modelling included the provision of scour protection and a detailed assessment of the effectiveness of the scour protection proposed at each foundation location was not undertaken as this was not the purpose of the computational modelling. The scour protection does not have implications on the global scale and is restricted to reducing sediment erosion in the vicinity of the foundations; there would be larger implications if scour protection were not provided (Whitehouse *et al.*, 2006).
- 1.3.6.3 The methodology implemented for the modelling used parameters selected from the project description associated with the Morgan Generation Assets, as defined in the PEIR, to ascertain the most influential and likely scenario for each physical process aspect under examination. The indicative layout used within the modelling study is presented in Figure 1.65 it applied cable protection in regions where trenching to 3 m depth was unlikely (i.e. in the vicinity of moraines comprised of glacial till) and where inter-array cable connects with generating assets.

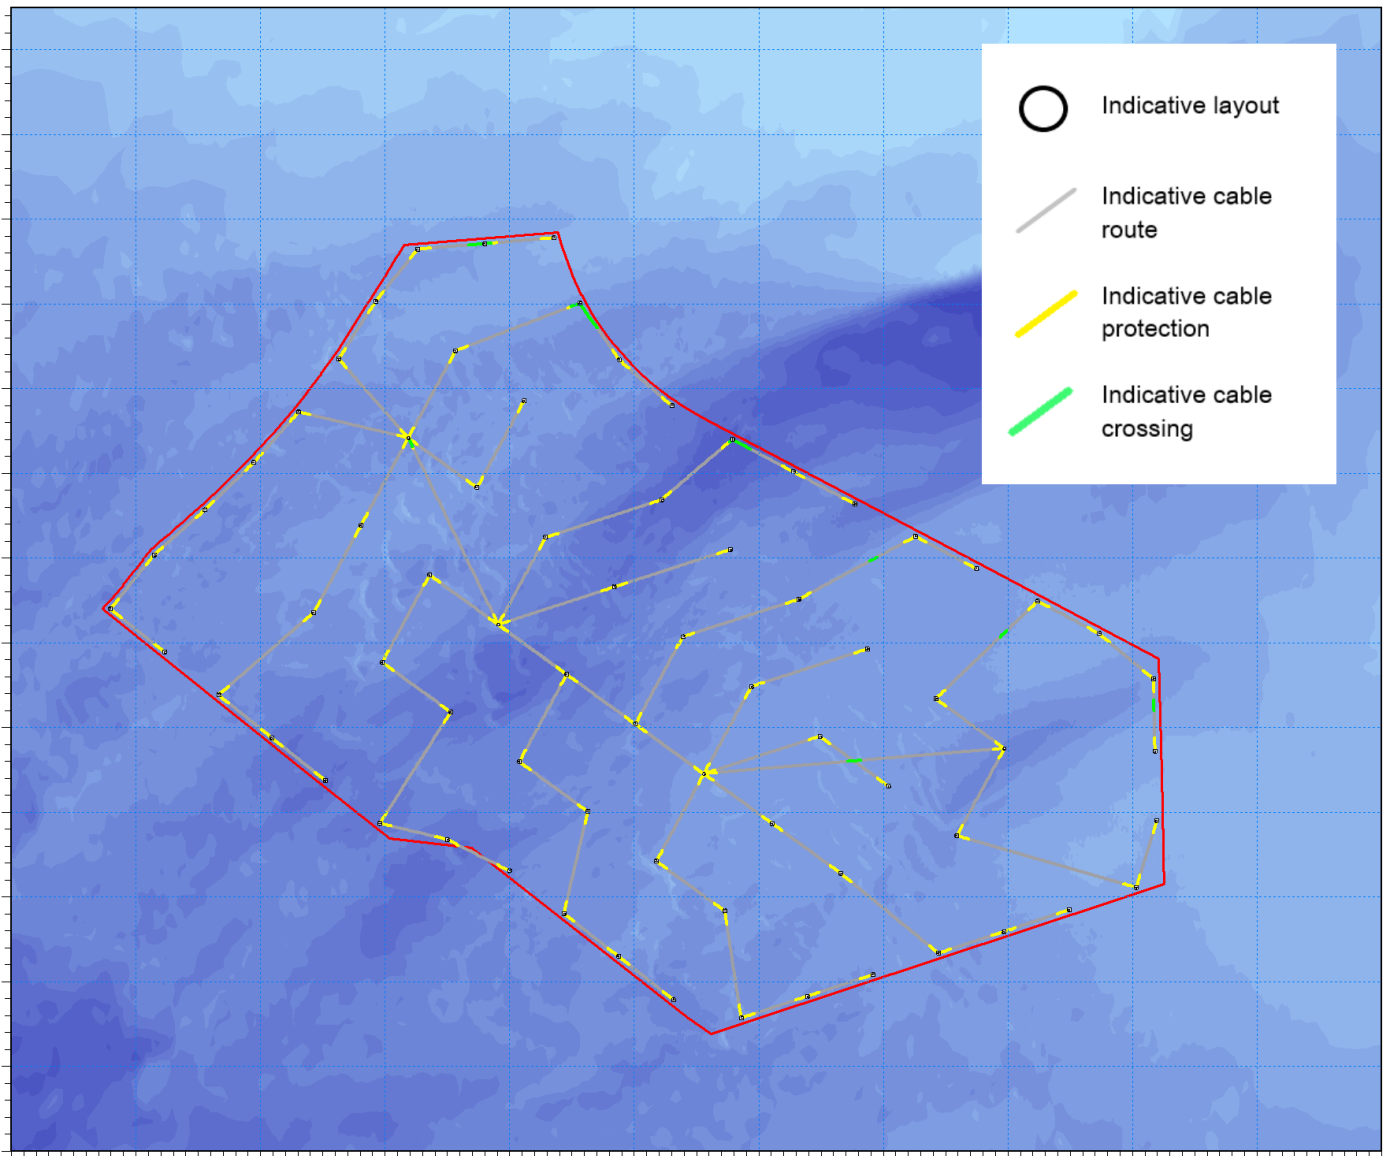


Figure 1.65: Modelled array and trenching route indicative layout for PEIR.

Post-construction hydrography

Tidal flow

1.3.6.4

The hydrodynamic simulations were repeated with the addition of infrastructure as outlined in the previous section. The bathymetry was also amended to take account of scour and cable protection. The following figures show the same mid flood and mid ebb steps from the simulation as were presented in Figure 1.31 and Figure 1.32 respectively, but with the Morgan Generation Assets foundation and structures as defined in the PEIR in place. Additionally, for reference, the designated sites with relevant physical processes features which have been identified for assessment in Volume 2, Chapter 1: Physical processes of the Environmental Statement are shown in each figure with a pink outline denoting the boundary. Due to the limited magnitude of the changes, difference plots have also been provided. These are the proposed minus the baseline condition, therefore increases in current speed will be positive. The same procedure for calculating differences and plotting figures has been implemented throughout this report.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

1.3.6.5 Figure 1.66 shows the post-construction flood tide flow patterns with Figure 1.67 showing the changes, and as the changes are limited to the vicinity of the development a more focused plot is provided in Figure 1.68. In the difference figures a log scale has been introduced to accentuate the values for clarity. Similarly, Figure 1.69, Figure 1.70 and Figure 1.71 show the same information for the ebb tide. During peak current speed the flow is redirected in the immediate vicinity of the structures and cable protection. The variation is a maximum of 4 cm/s in the immediate vicinity of the structure which constitutes less than 3% of the peak flows. This reduces significantly with increased distance from each structure with changes being significantly smaller in the areas where cable protection is present, within 500 m of the installation changes are <2 m/s which would be indiscernible from baseline conditions.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

[deg]

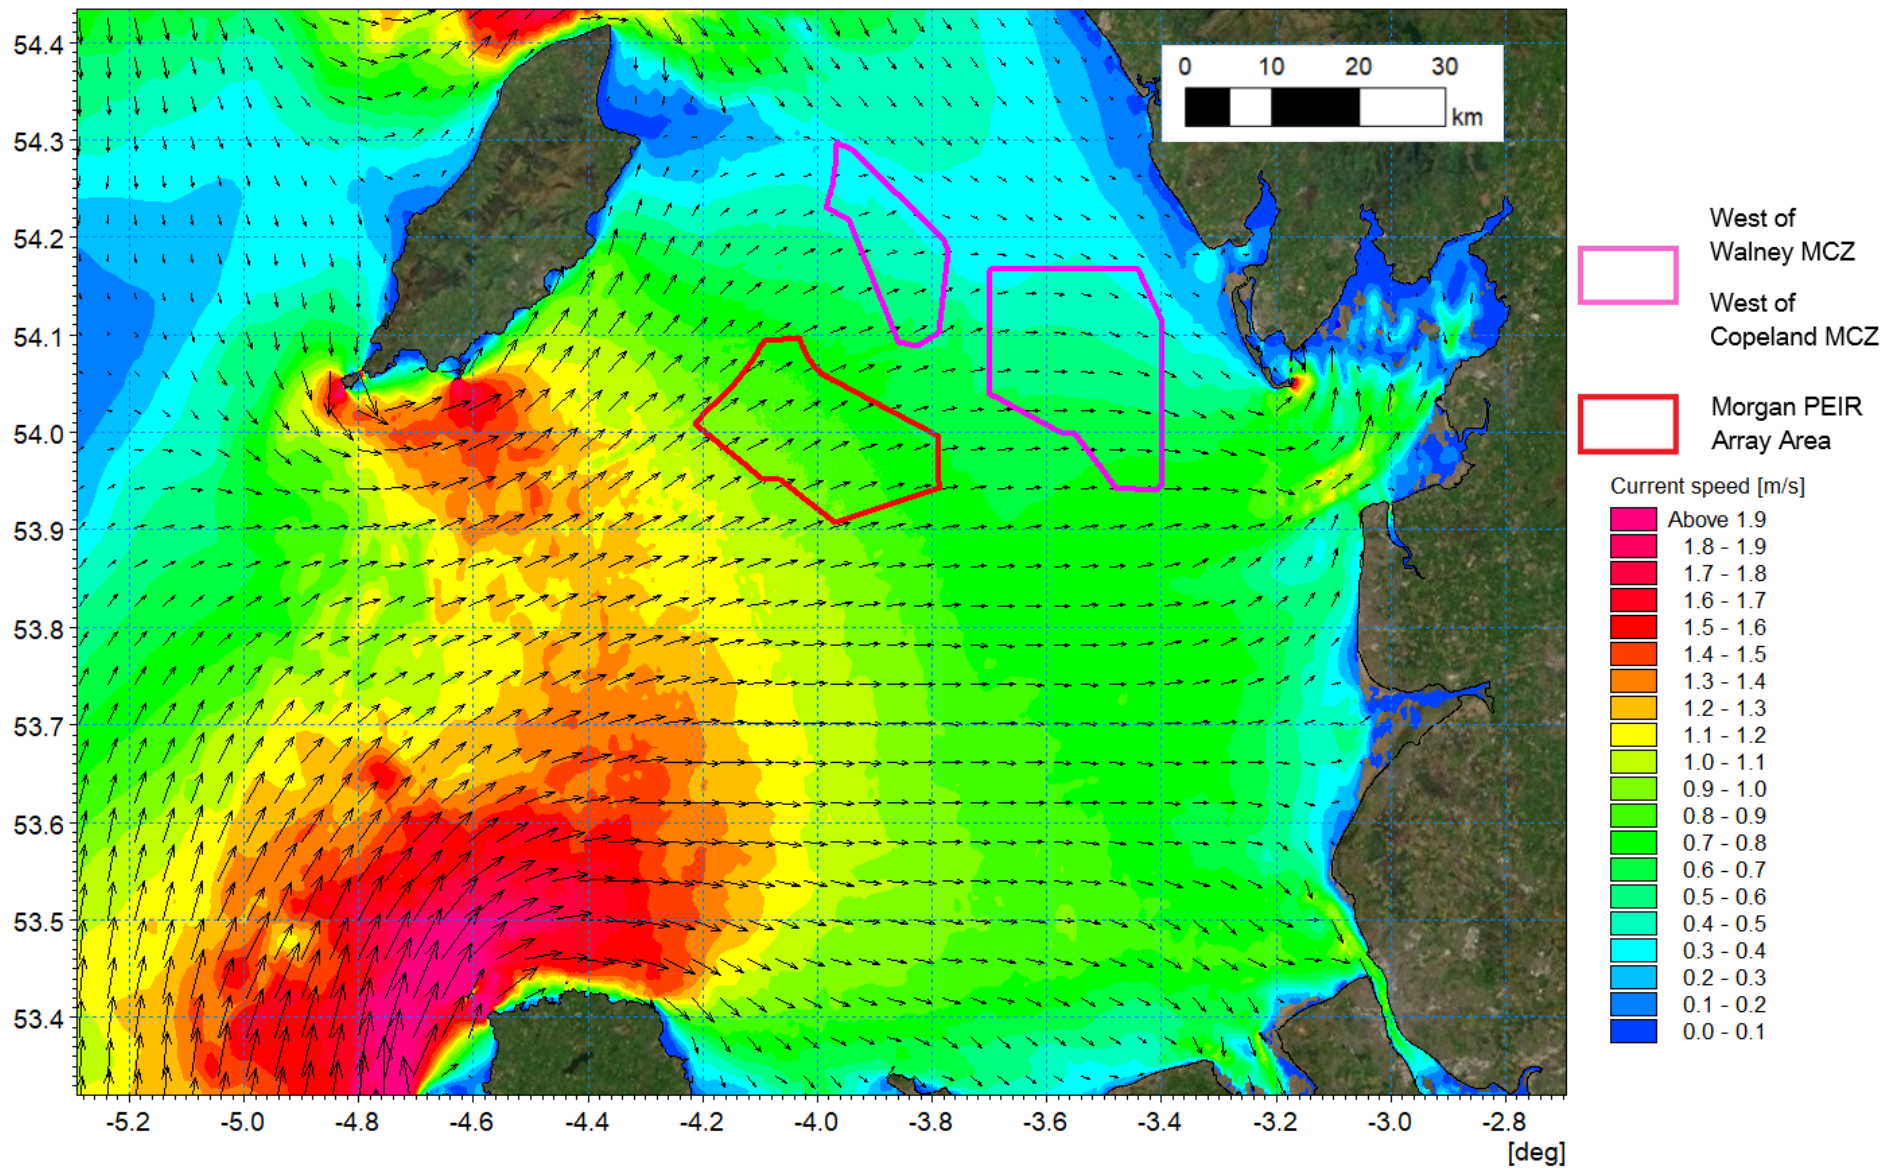


Figure 1.66: Post-construction tidal flow pattern – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

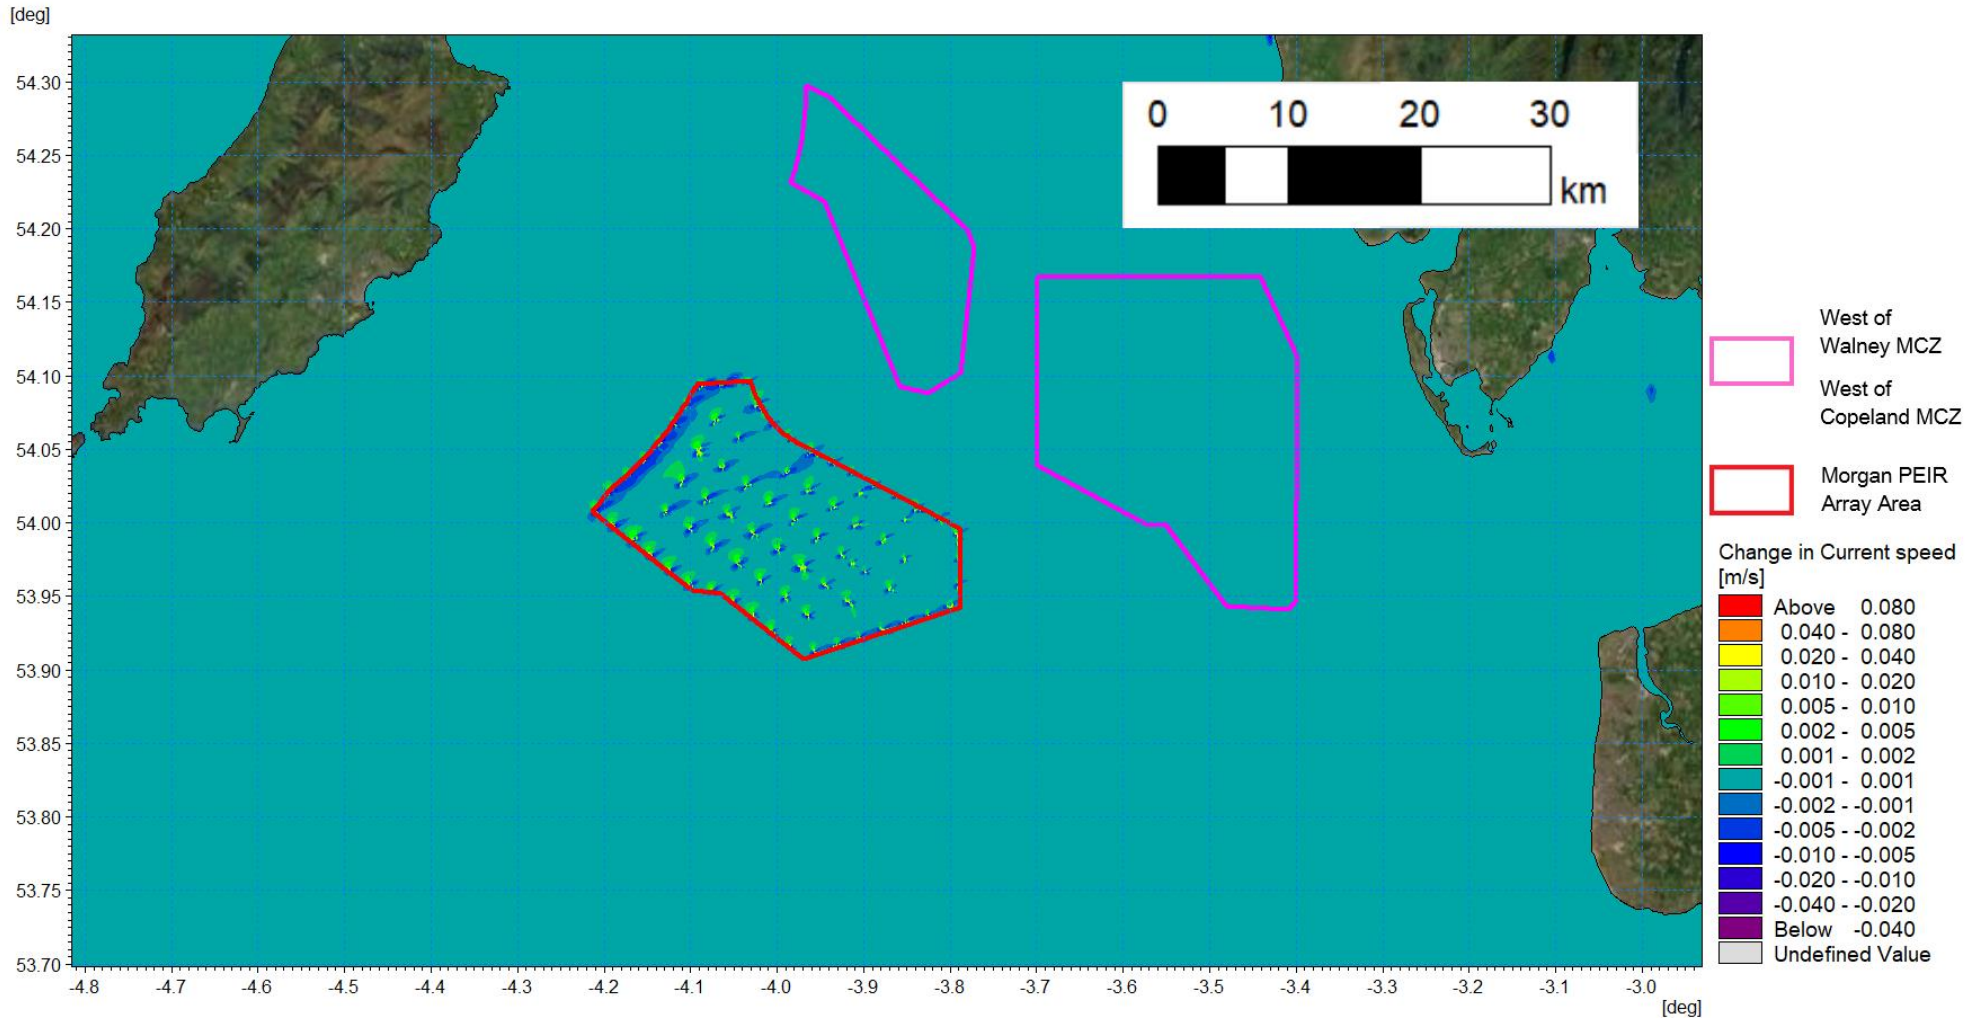


Figure 1.67: Change in tidal flow (post-construction minus baseline) – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

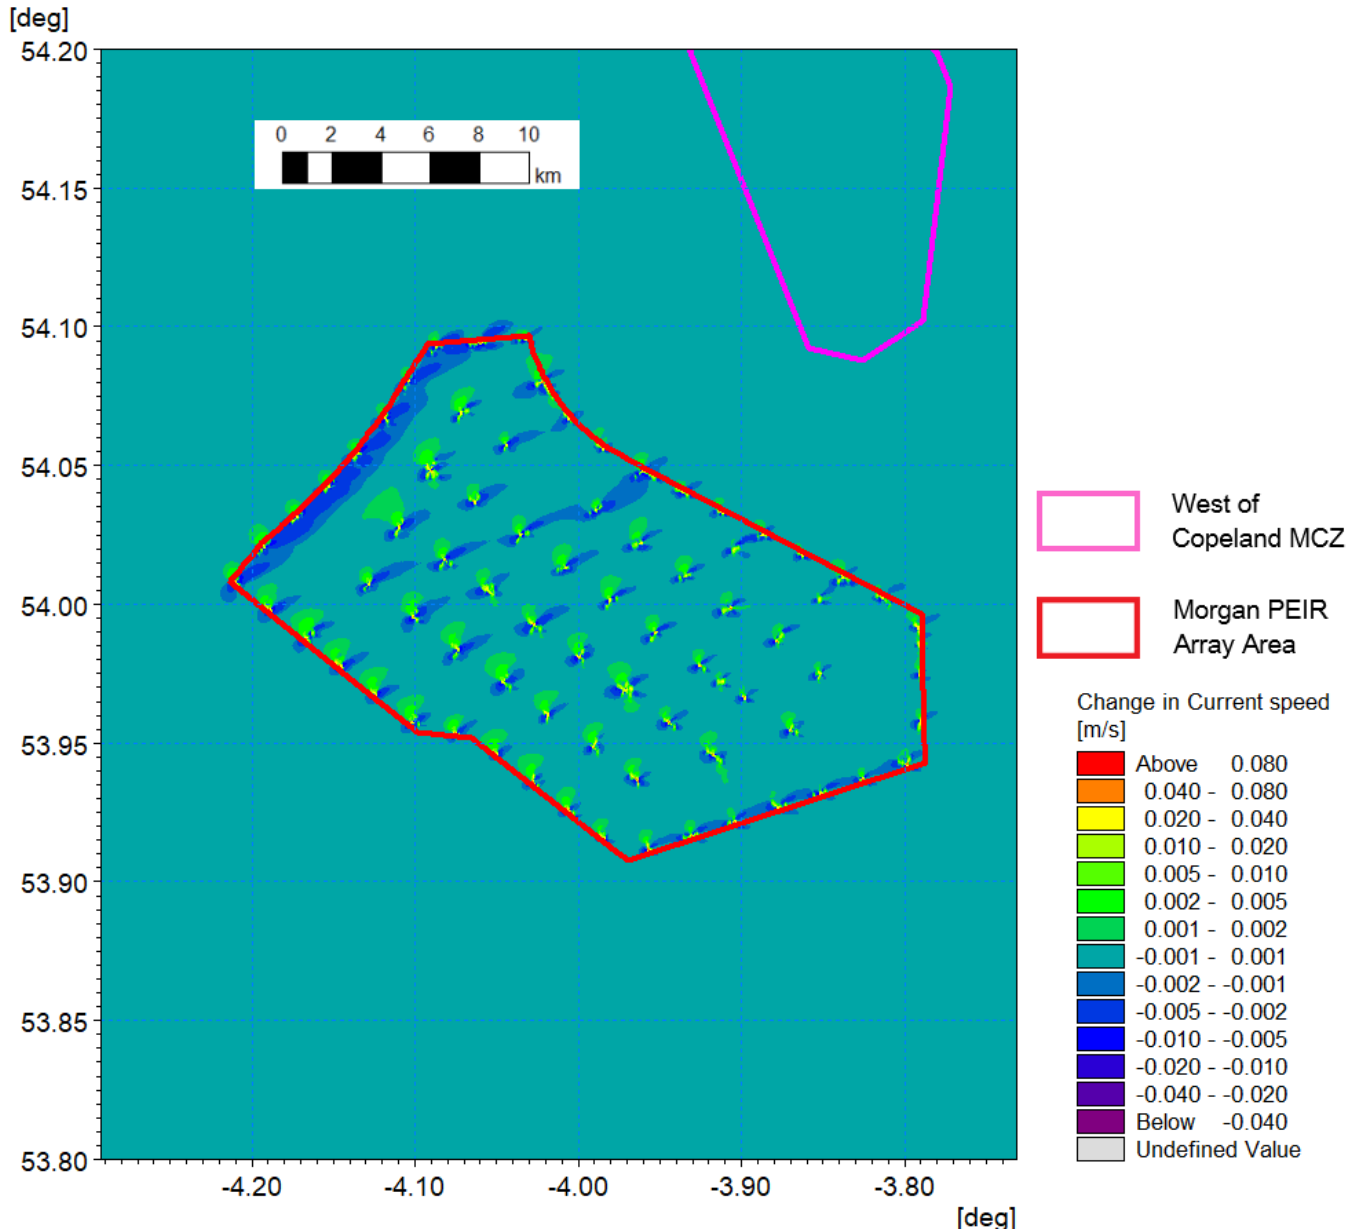


Figure 1.68: Change in tidal flow (post-construction minus baseline) – flood tide detail view.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

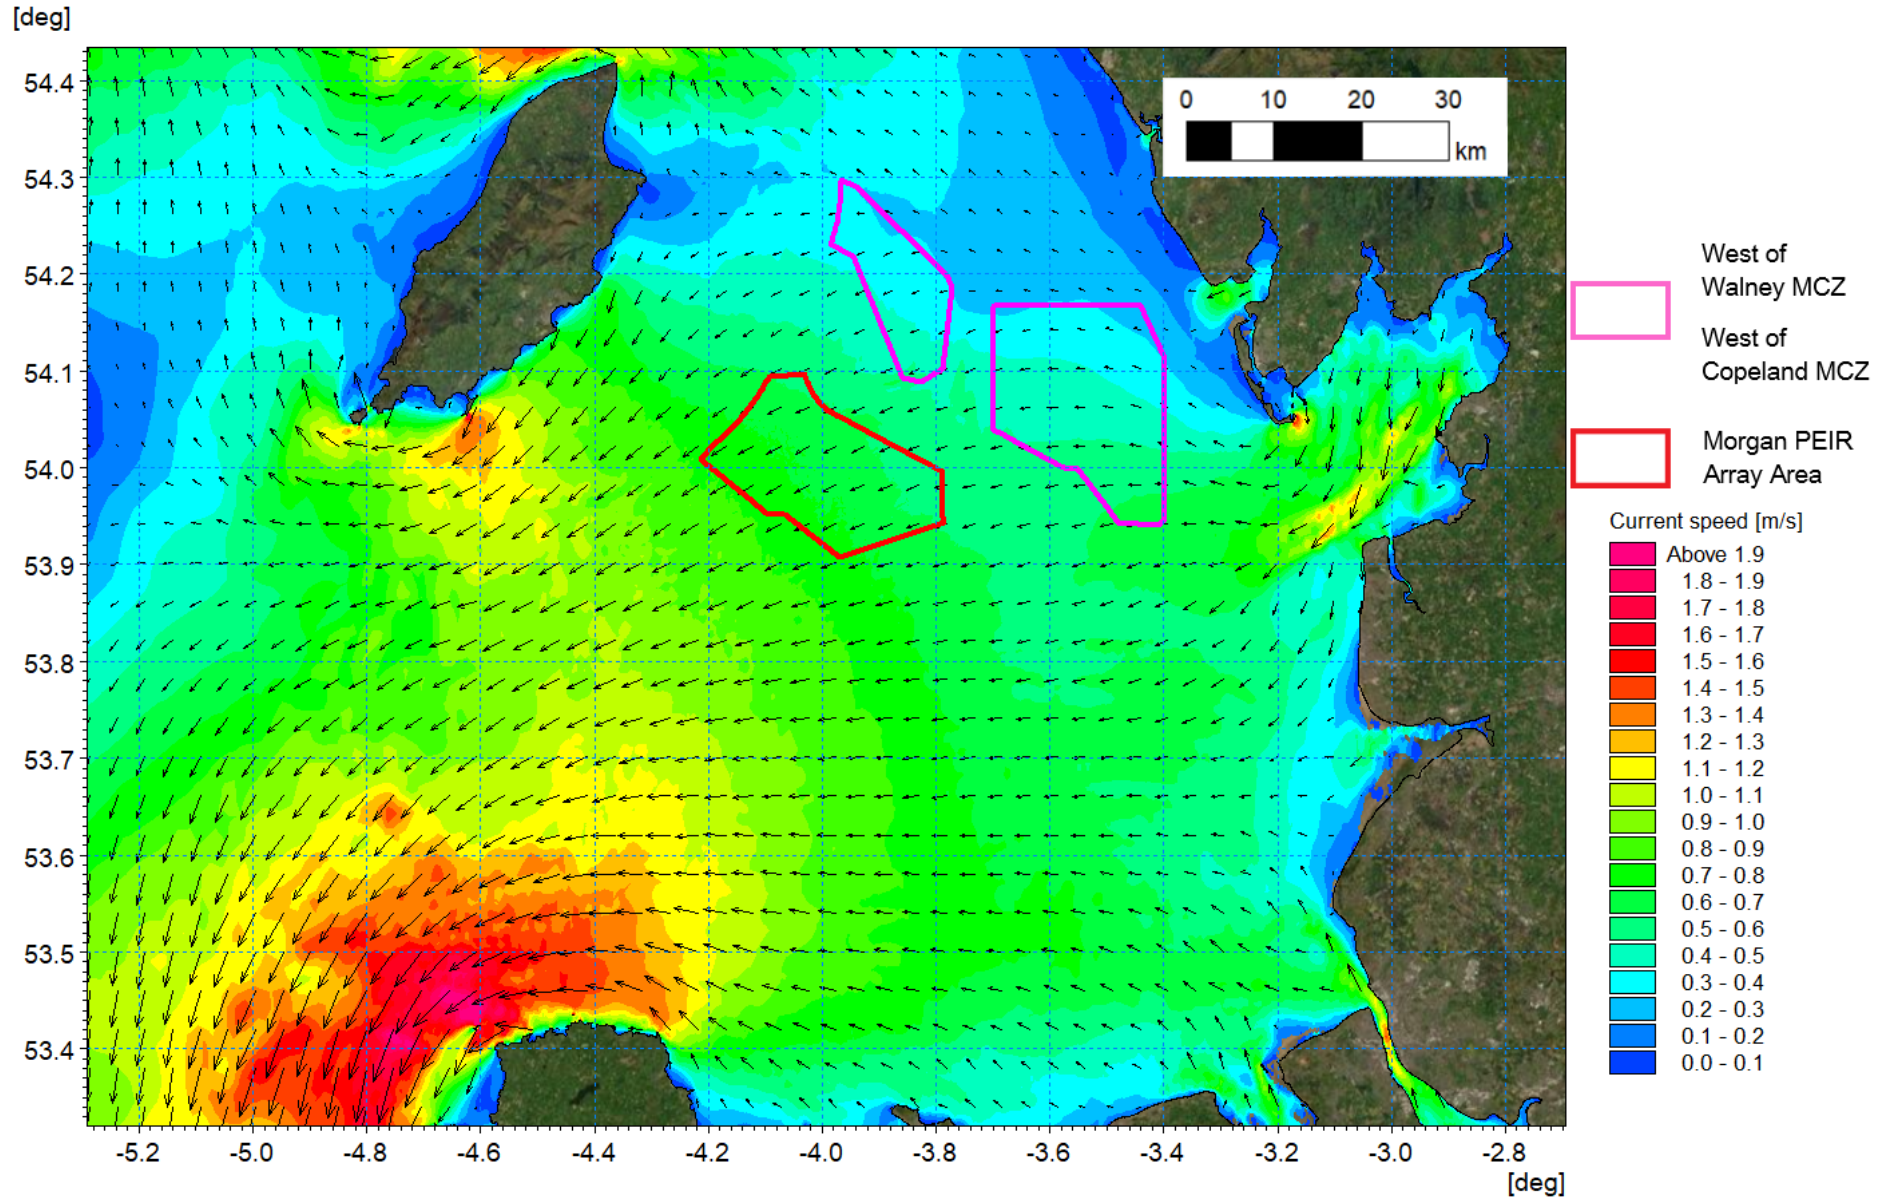


Figure 1.69: Post-construction tidal flow pattern – ebb tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

[deg]

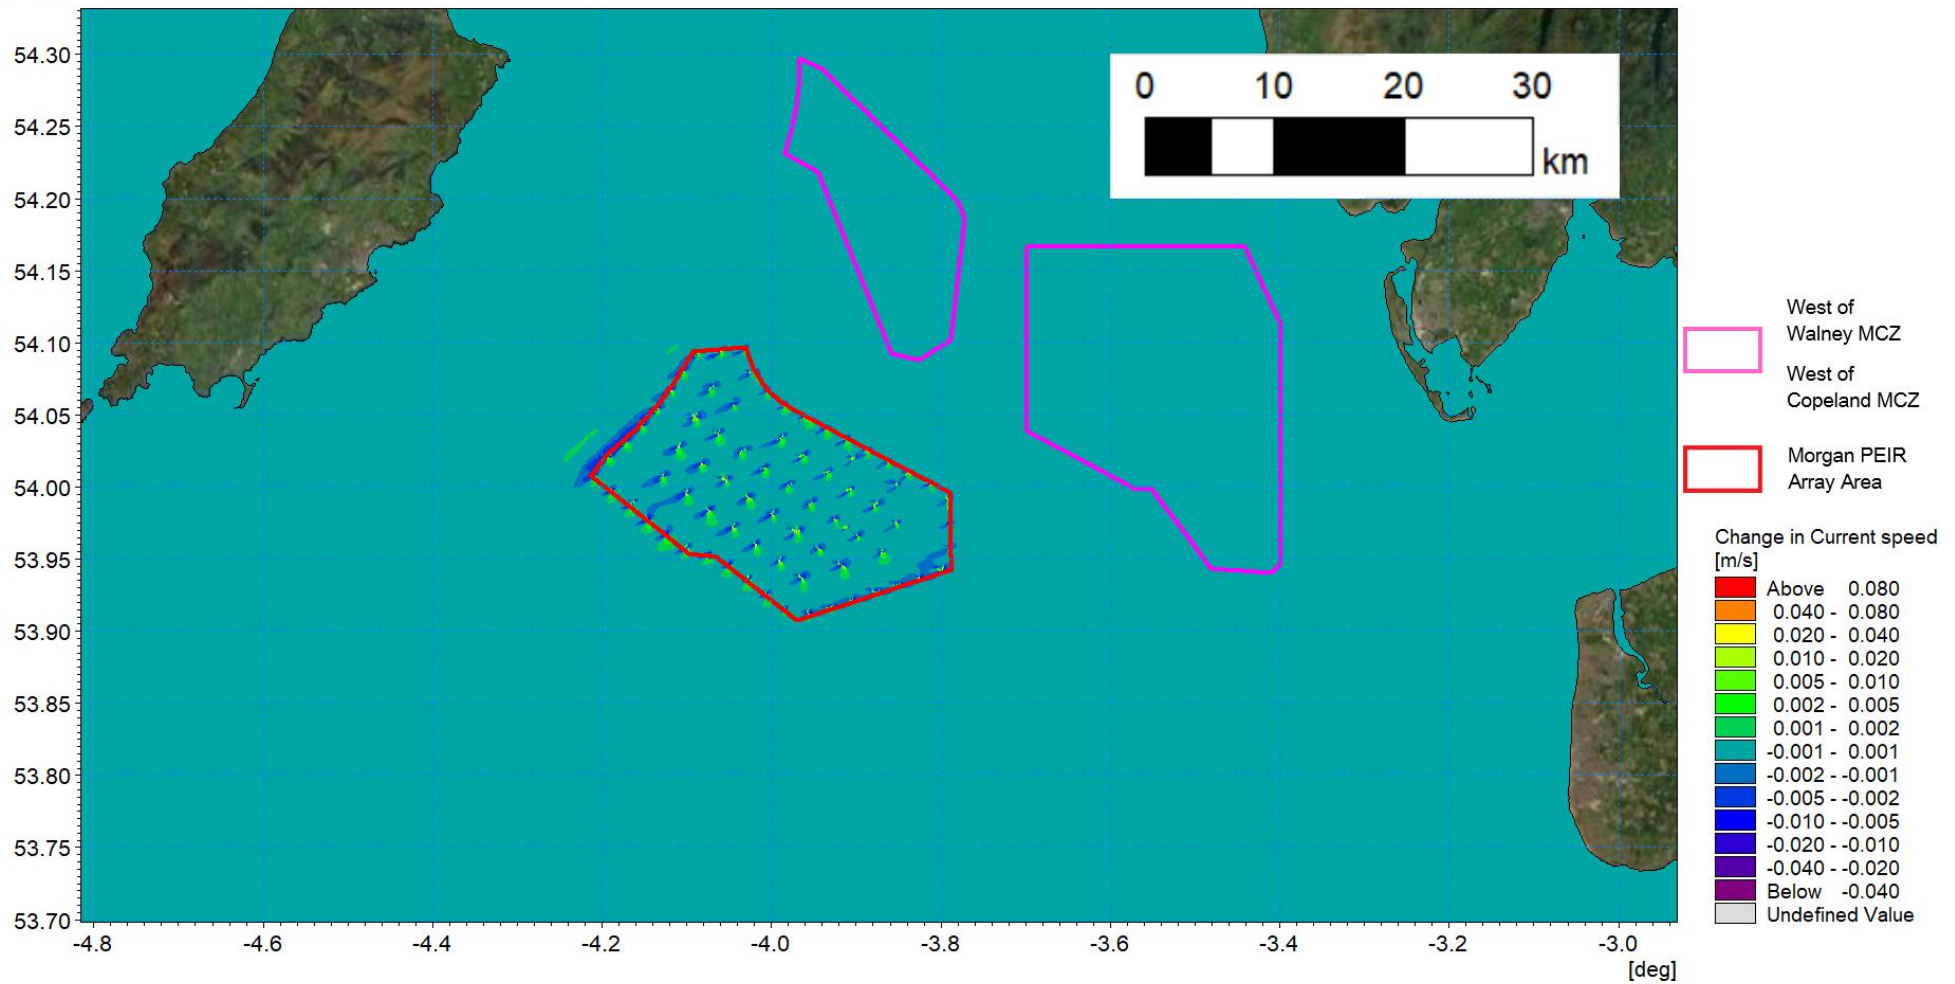


Figure 1.70: Change in tidal flow (post-construction minus baseline) – ebb tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

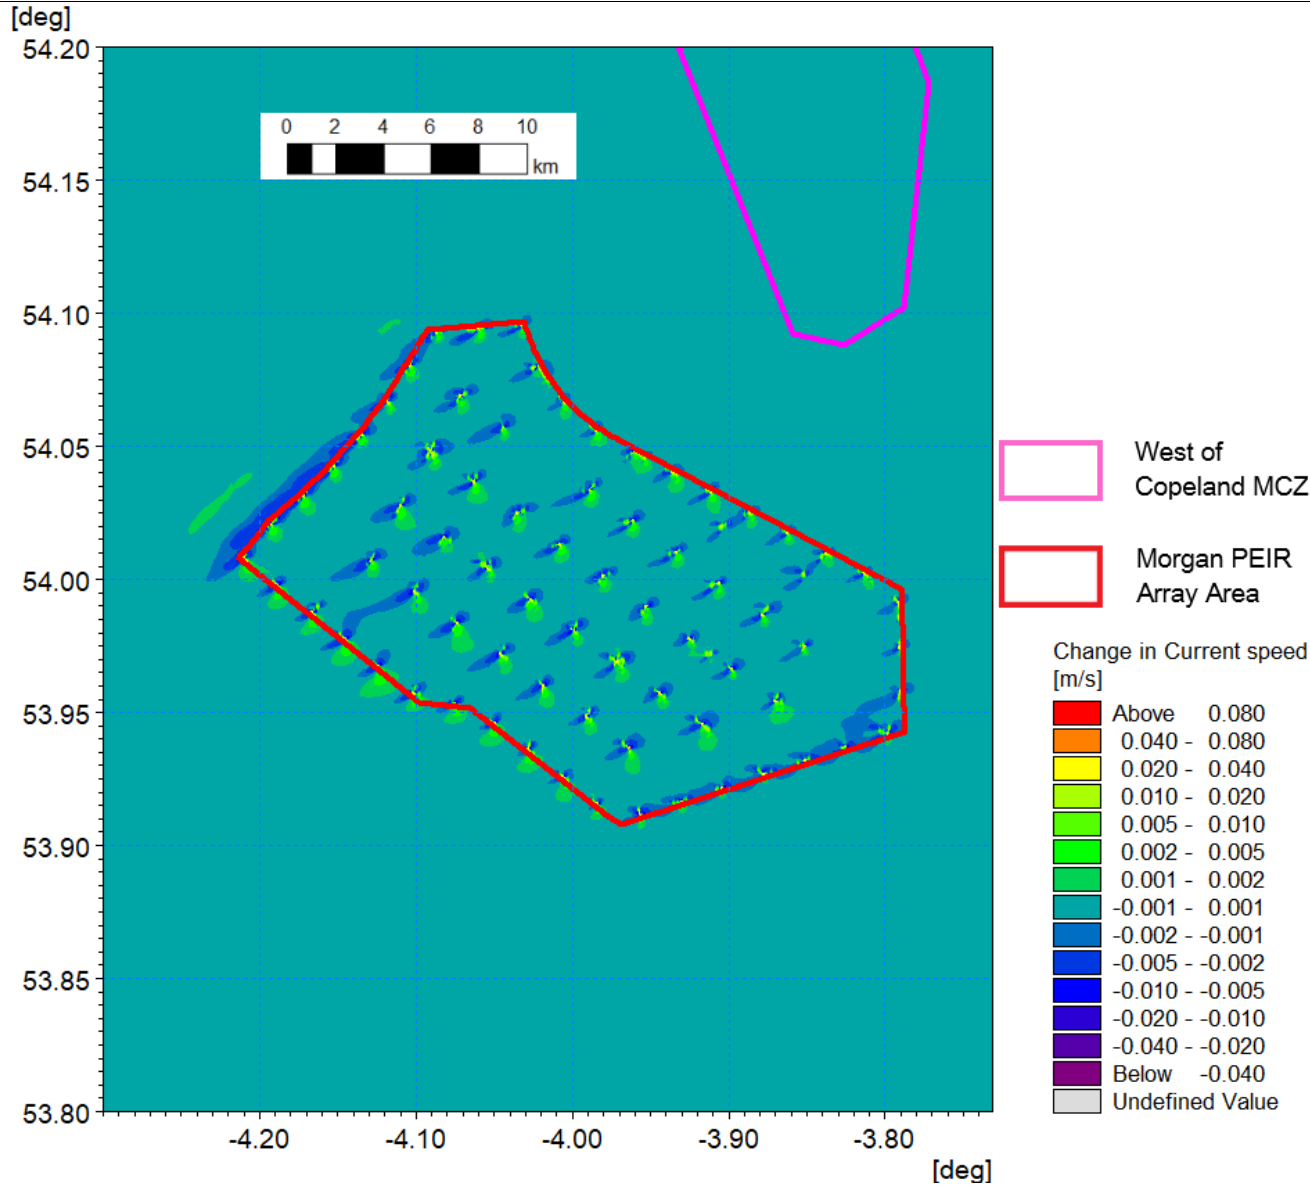


Figure 1.71: Change in tidal flow (post-construction minus baseline) – ebb tide detailed view.

Wave climate

- 1.3.6.6 Using the same principle as for the tidal modelling, the wave climate modelling was repeated with the inclusion of the Morgan Generation Assets structures, foundations and cable protection as defined in the PEIR. Again, changes were found to be indiscernible from the baseline scenario by visual inspection therefore difference plots have been provided and using the same scale for all scenarios. The same principal directions are presented for the 1 in 1 year storm and 1 in 20 year storm as presented for the baseline in section 1.3.5.
- 1.3.6.7 The post construction phase 000° storm is presented for the 1 in 1 year in Figure 1.72 with the difference shown in Figure 1.73. Similarly, the 1 in 20 year storm from this direction is presented in Figure 1.74 and Figure 1.75. The changes are seen as reductions in the lee of the structures. The maximum changes are in the order of 3 cm for the annual event and 3.5 cm for the more extreme storm event which represents less than 1% of the baseline significant wave height. The wave shadow is typically less than one half of this value. These changes would be indiscernible from the baseline wave climate and would not impact on the shoreline or nearshore banks.
- 1.3.6.8 The potential change in wave climate relative to baseline conditions for annual and more extreme storms are of similar proportions so, for brevity, only the 1 in 20 year results are presented for the remain directions. Figure 1.76 depicts the 030° post construction scenario with Figure 1.77 showing the change from baseline conditions. The magnitude of the changes at the location of the structures is a reduction in wave height of 3 cm whilst, once again the shadow if typical less 2 cm which is less than 1% of the baseline condition.
- 1.3.6.9 For the westerly storms from 240° and 270° the incident wave heights are typically twice that of the fetch limited directions. For these scenarios the effect of the presence of the infrastructure is much smaller with changes in wave height typically less than 0.25% as presented in Figure 1.78 to Figure 1.81.
- 1.3.6.10 In summary, the presence of the Morgan Generation Assets as defined in the PEIR was seen to have the greatest influence when storms approached from the north sectors where baseline wave height were smallest. In all cases the changes in wave climate would be imperceptible and would not interact with the shoreline or nearshore banks and morphology.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

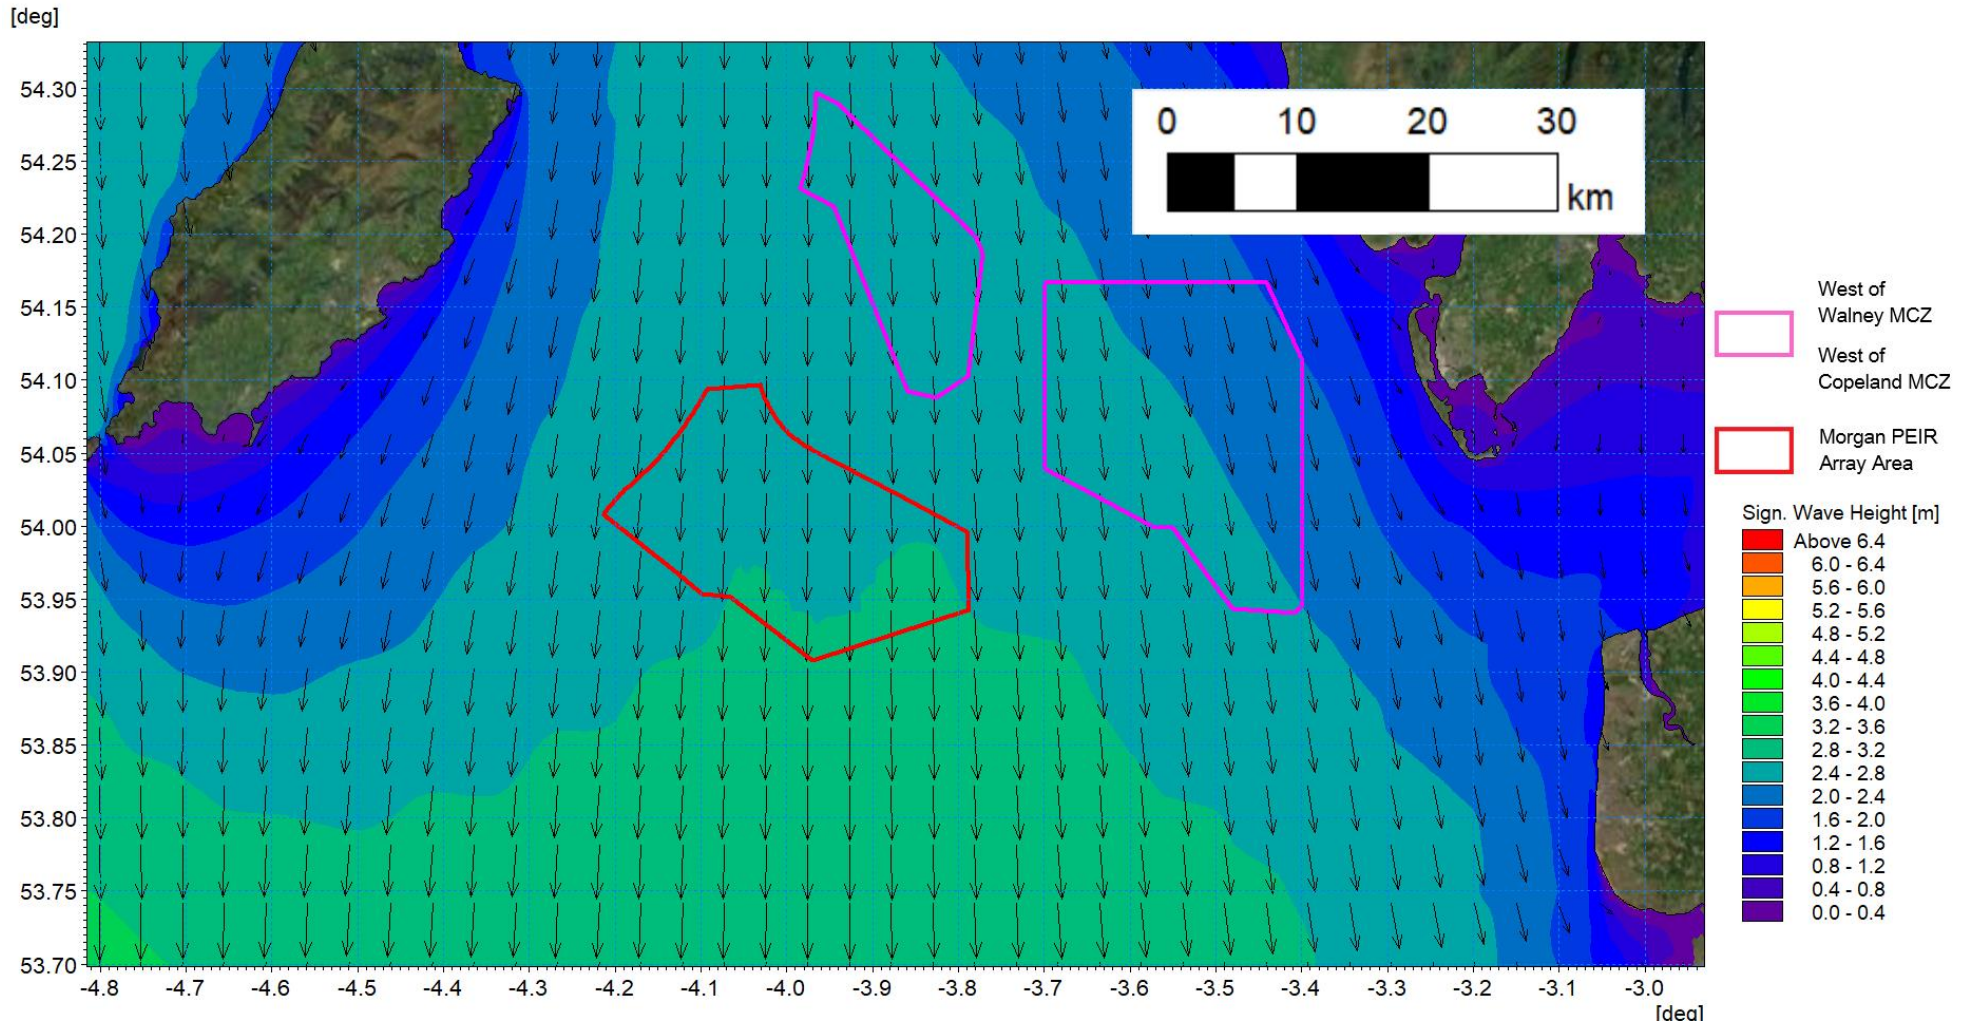


Figure 1.72: Post-construction wave climate 1 in 1 year storm 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

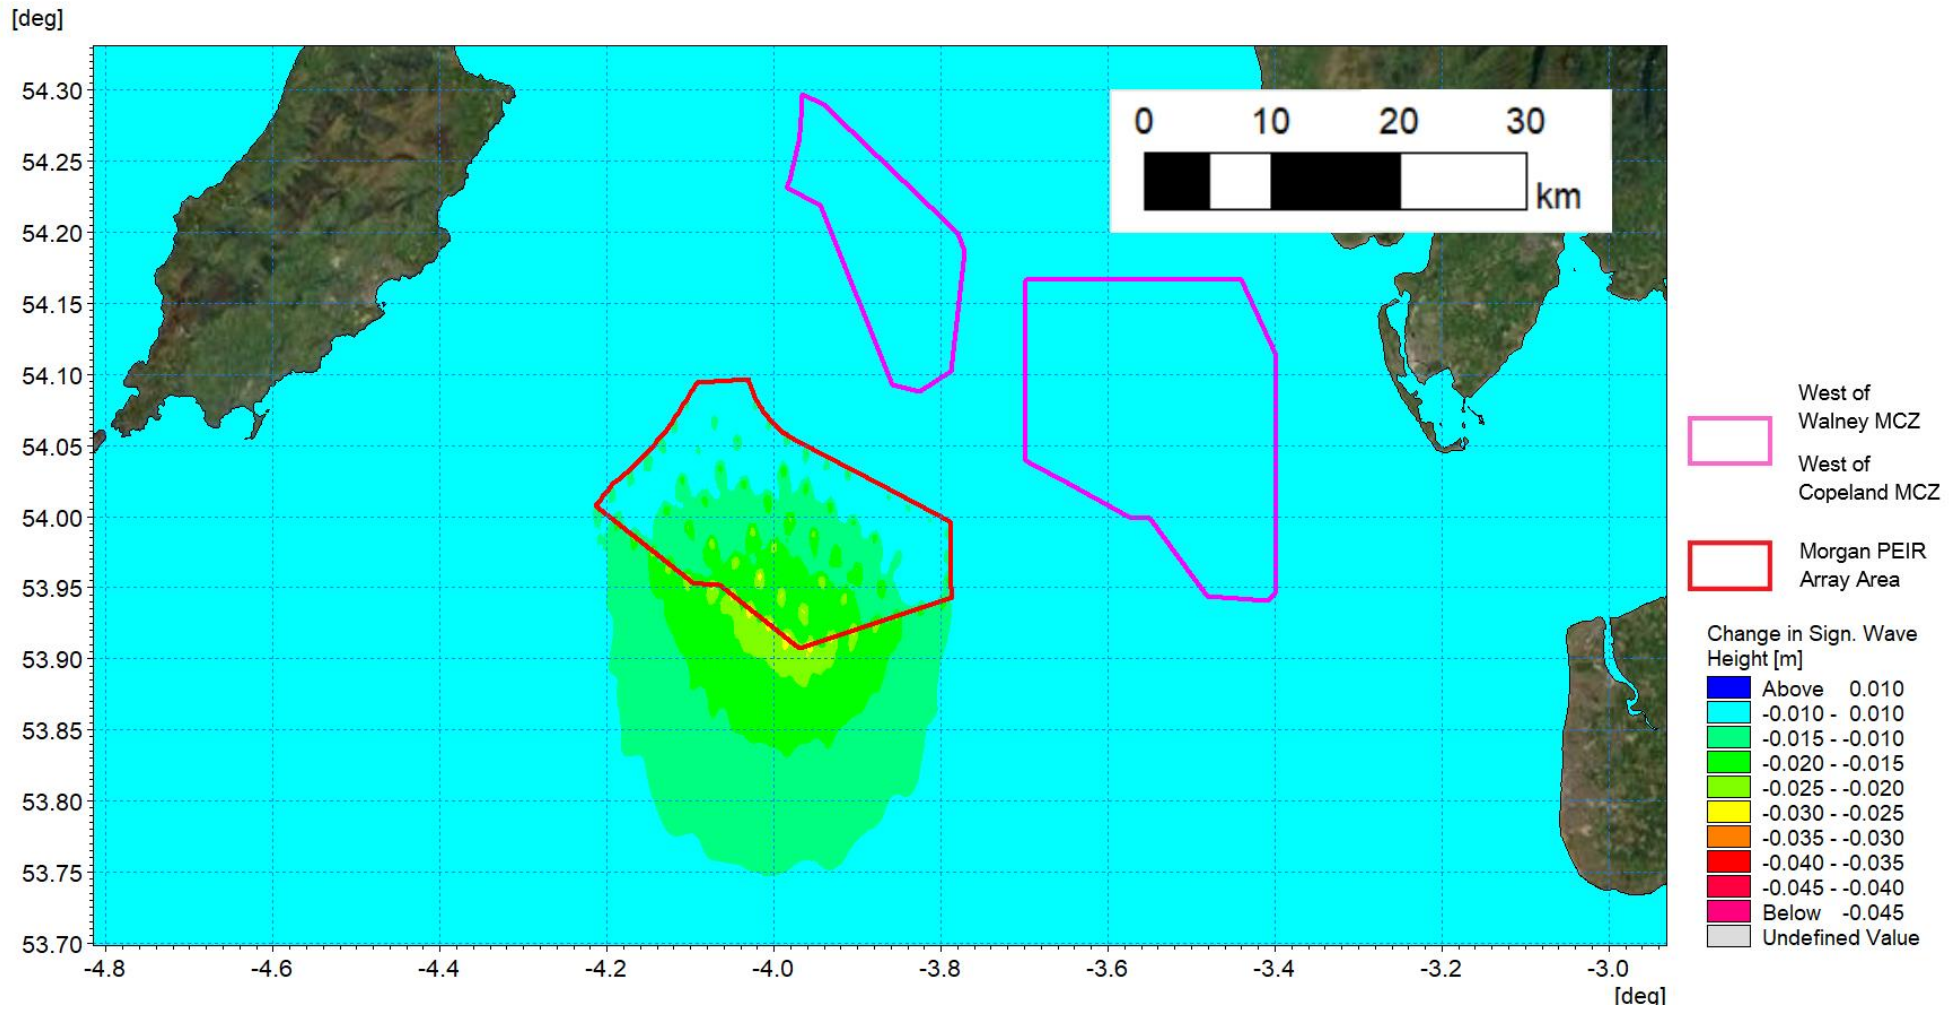


Figure 1.73: Change in wave climate 1 in 1 year storm 000° MHW (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

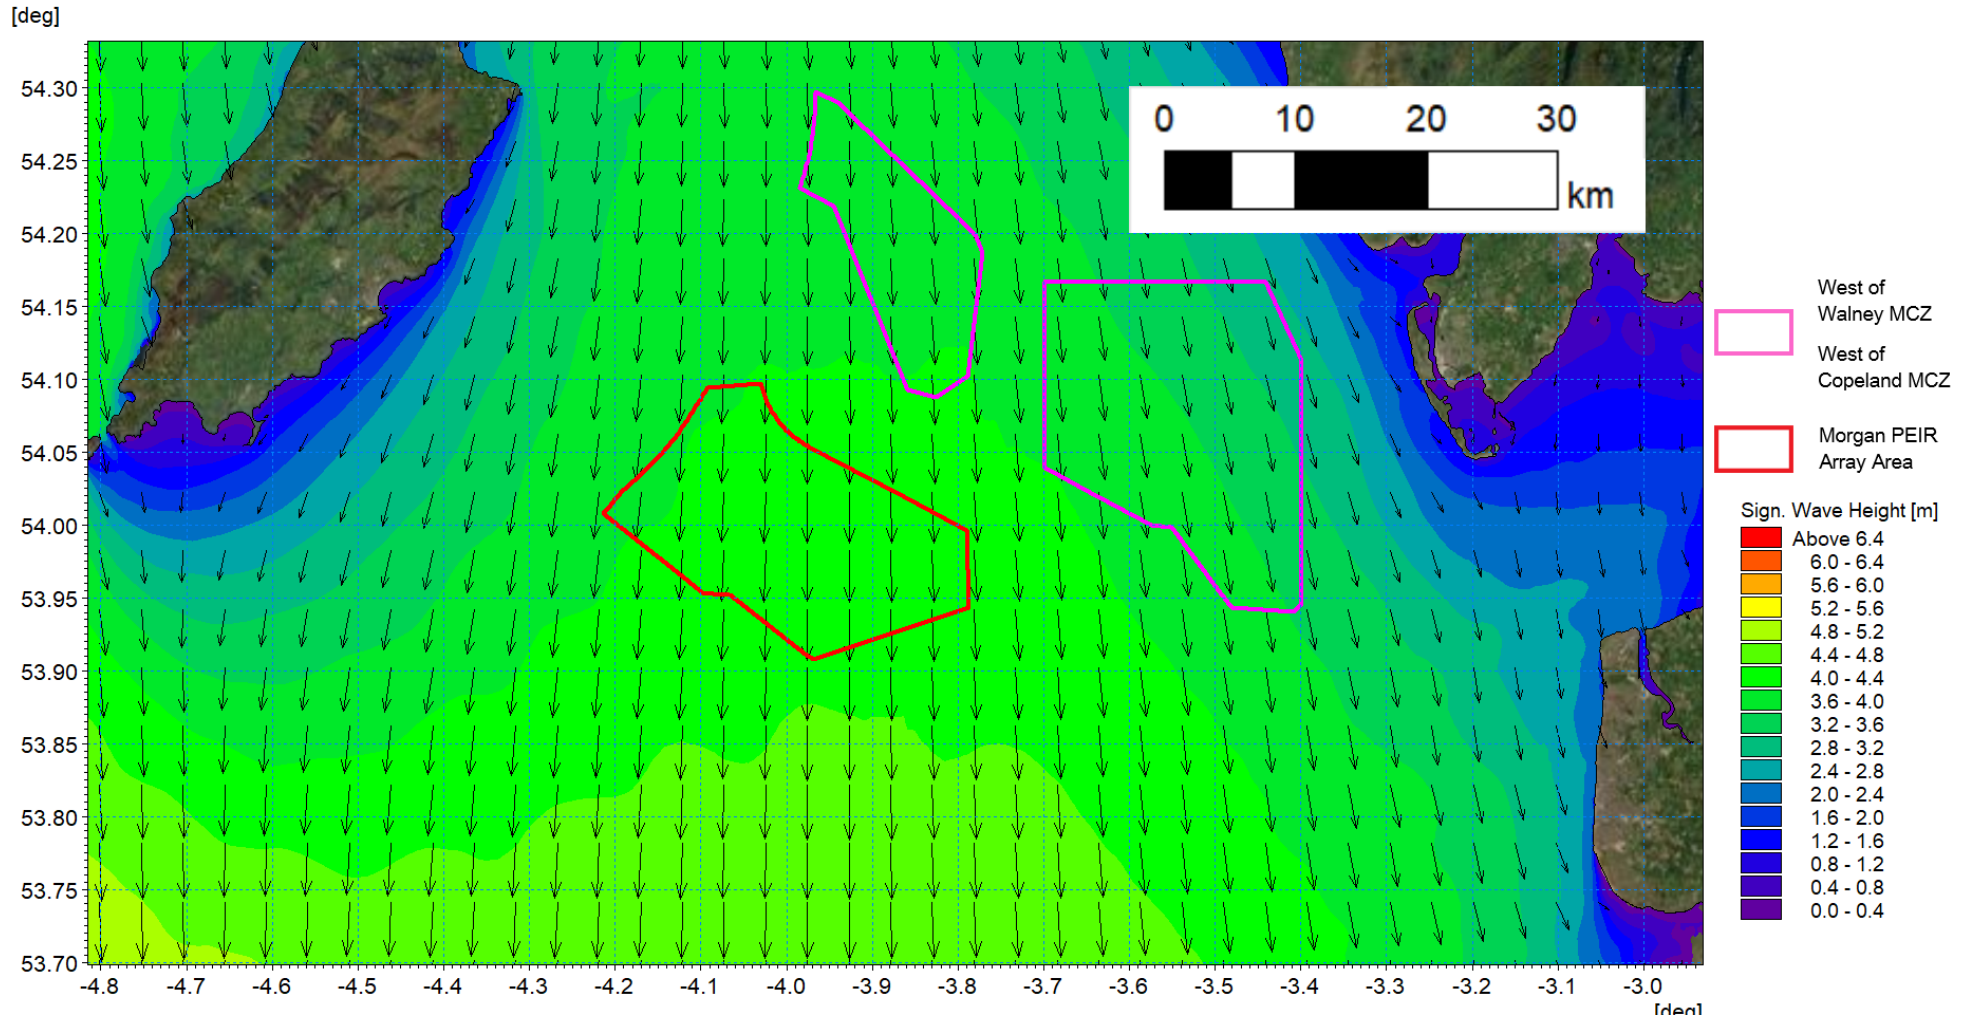


Figure 1.74: Post-construction wave climate 1 in 20 year storm 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

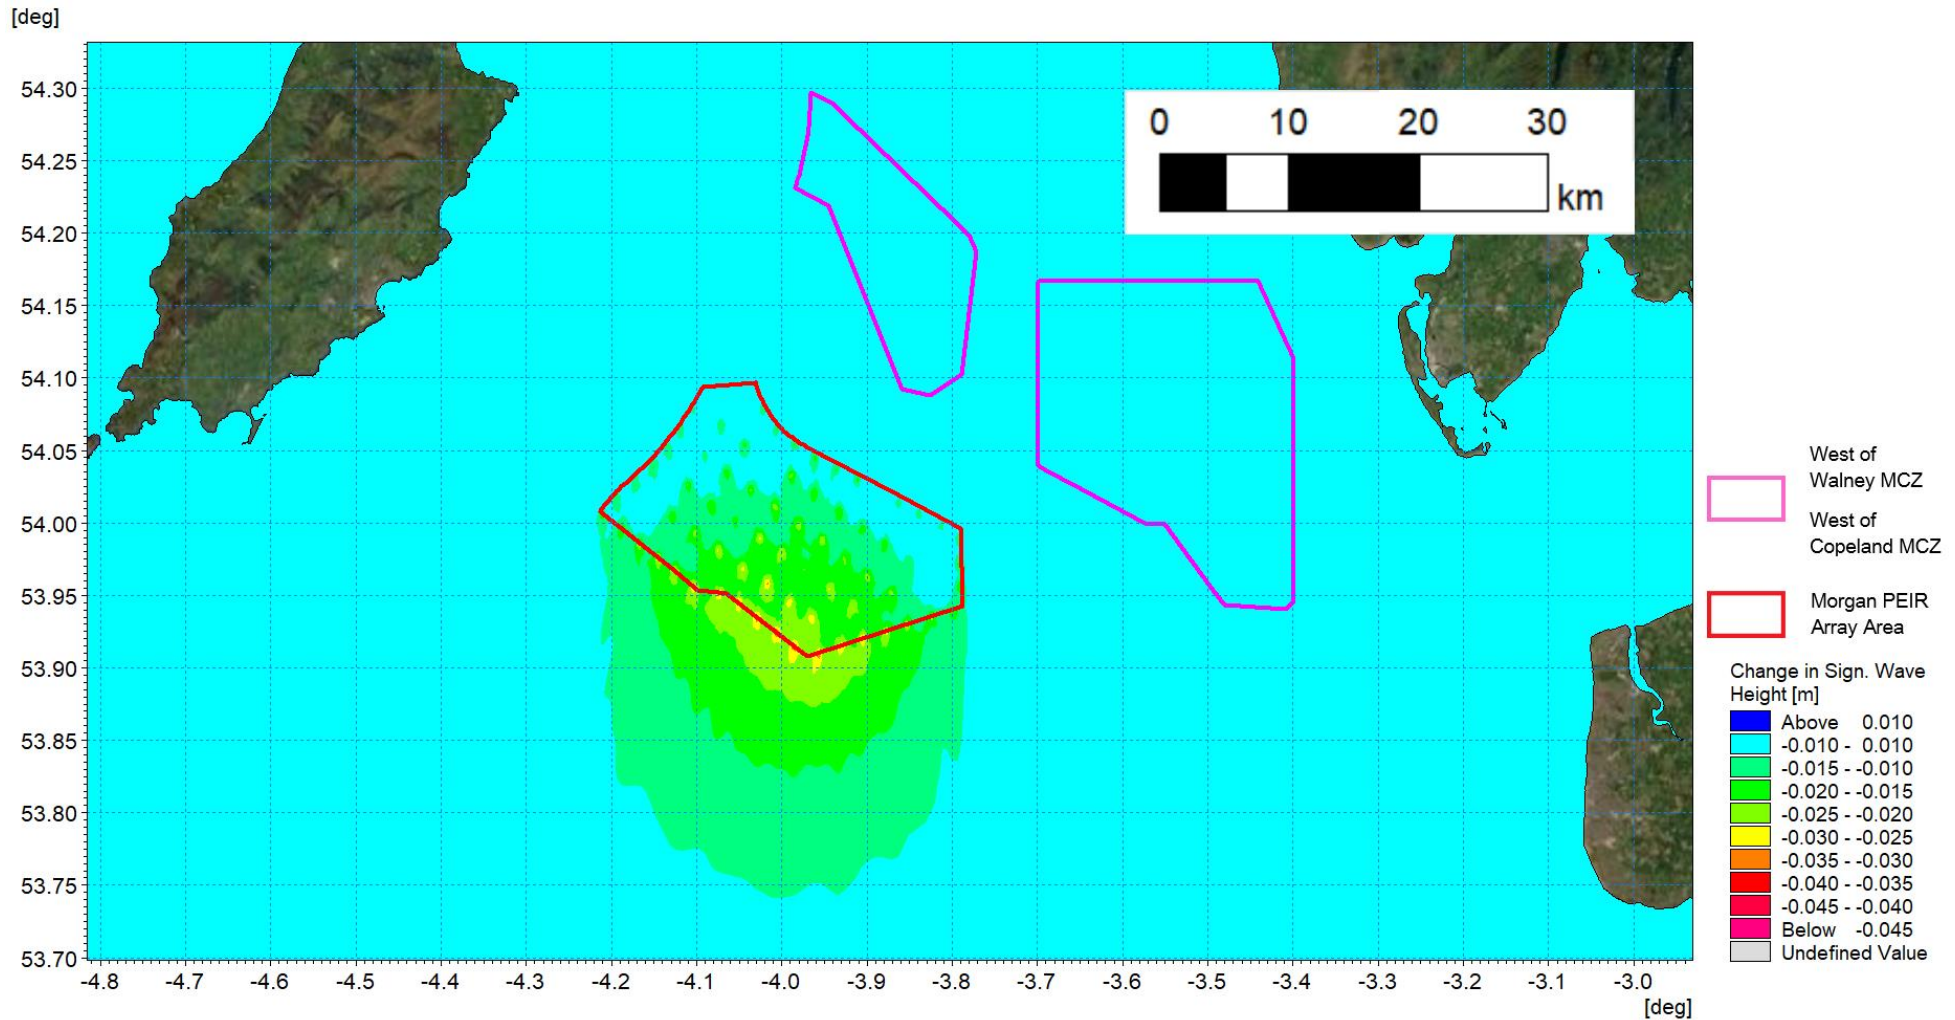


Figure 1.75: Change in wave climate 1 in 20 year storm 000° MHW (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

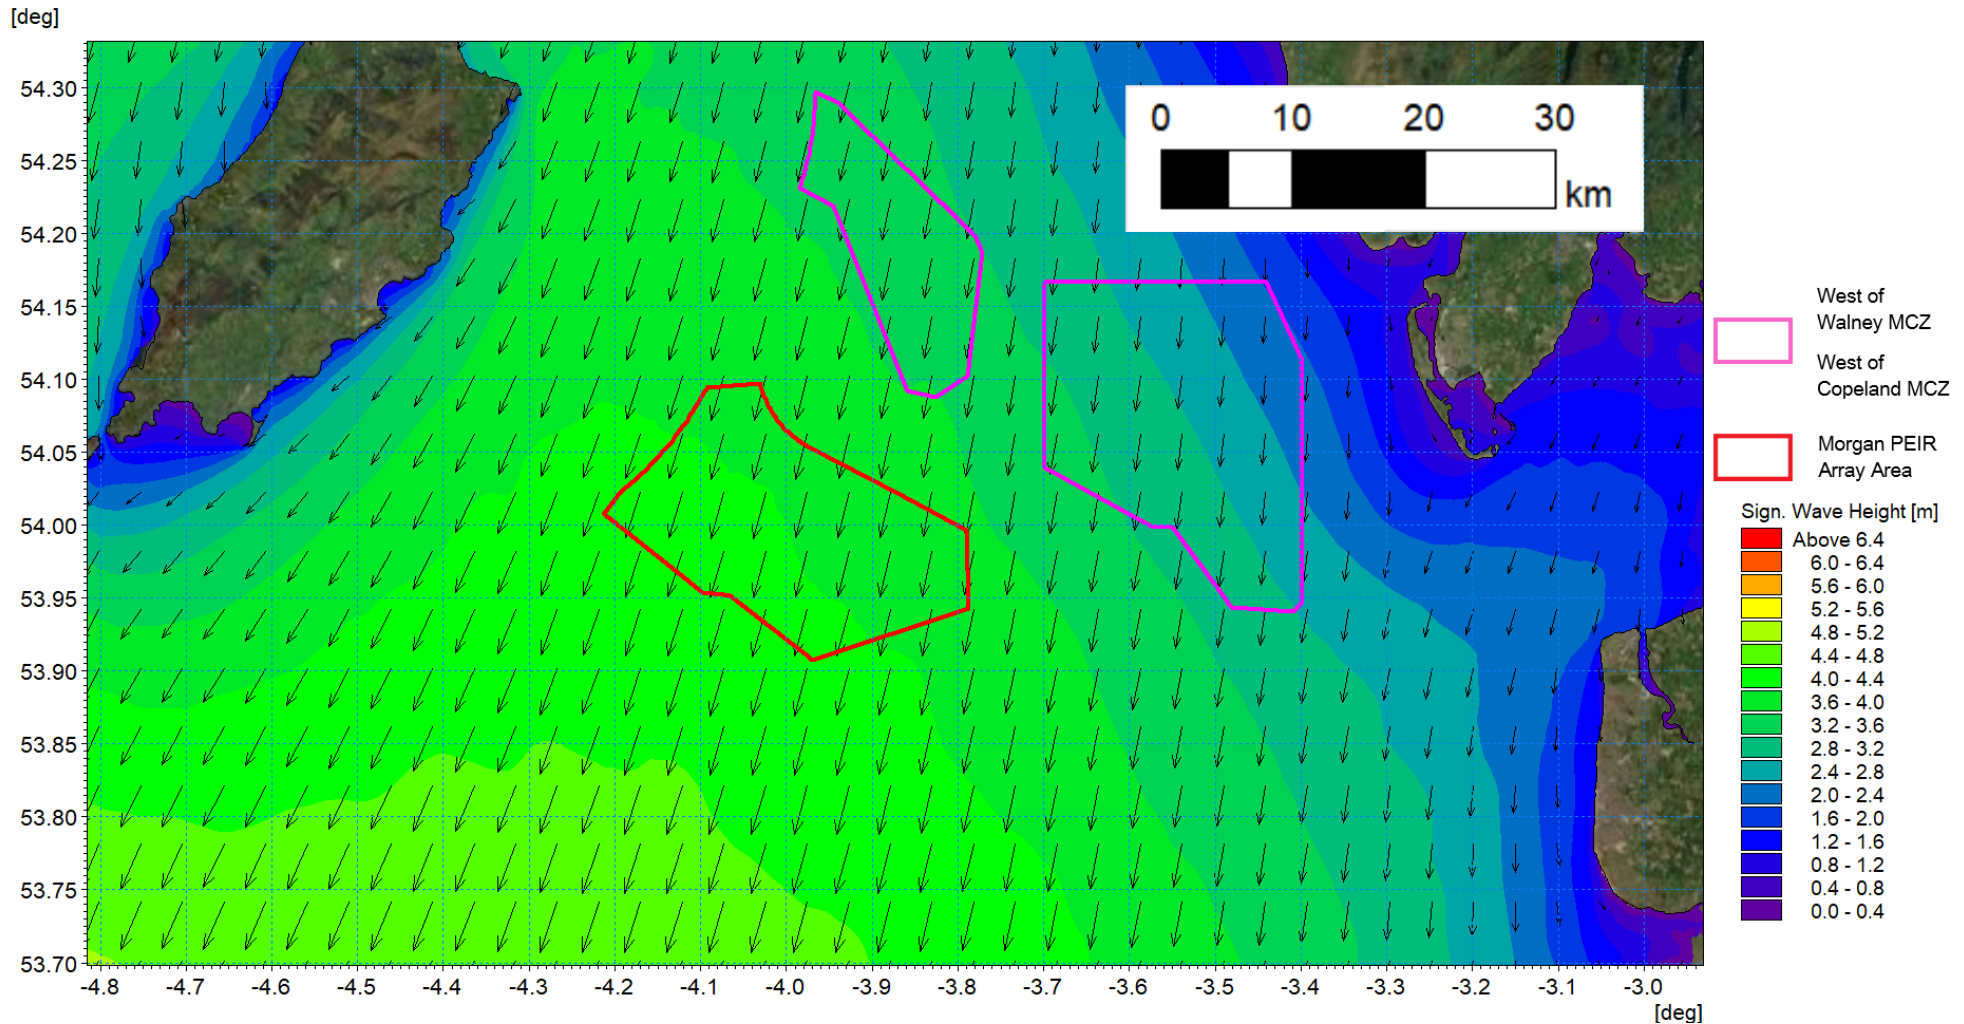


Figure 1.76: Post-construction wave climate 1 in 20 year storm 030° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

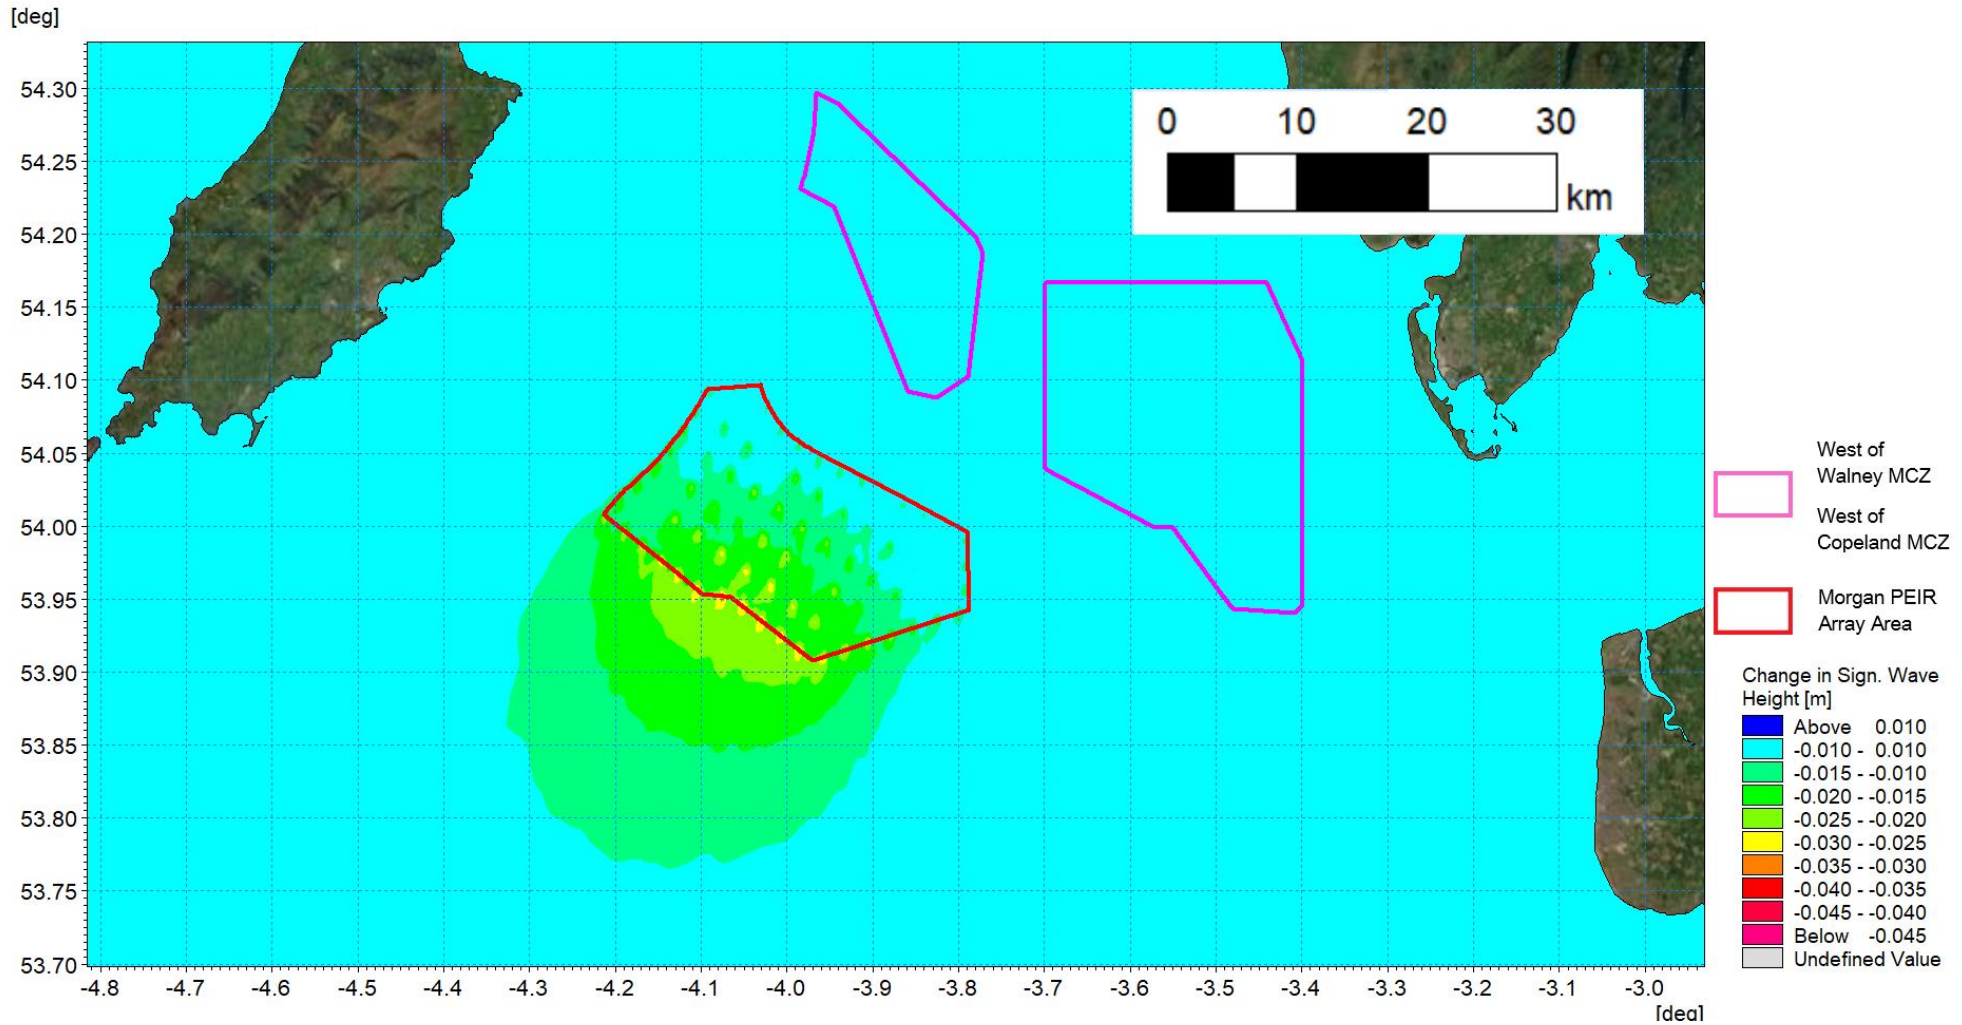


Figure 1.77: Change in wave climate 1 in 20 year storm 030° MHW (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

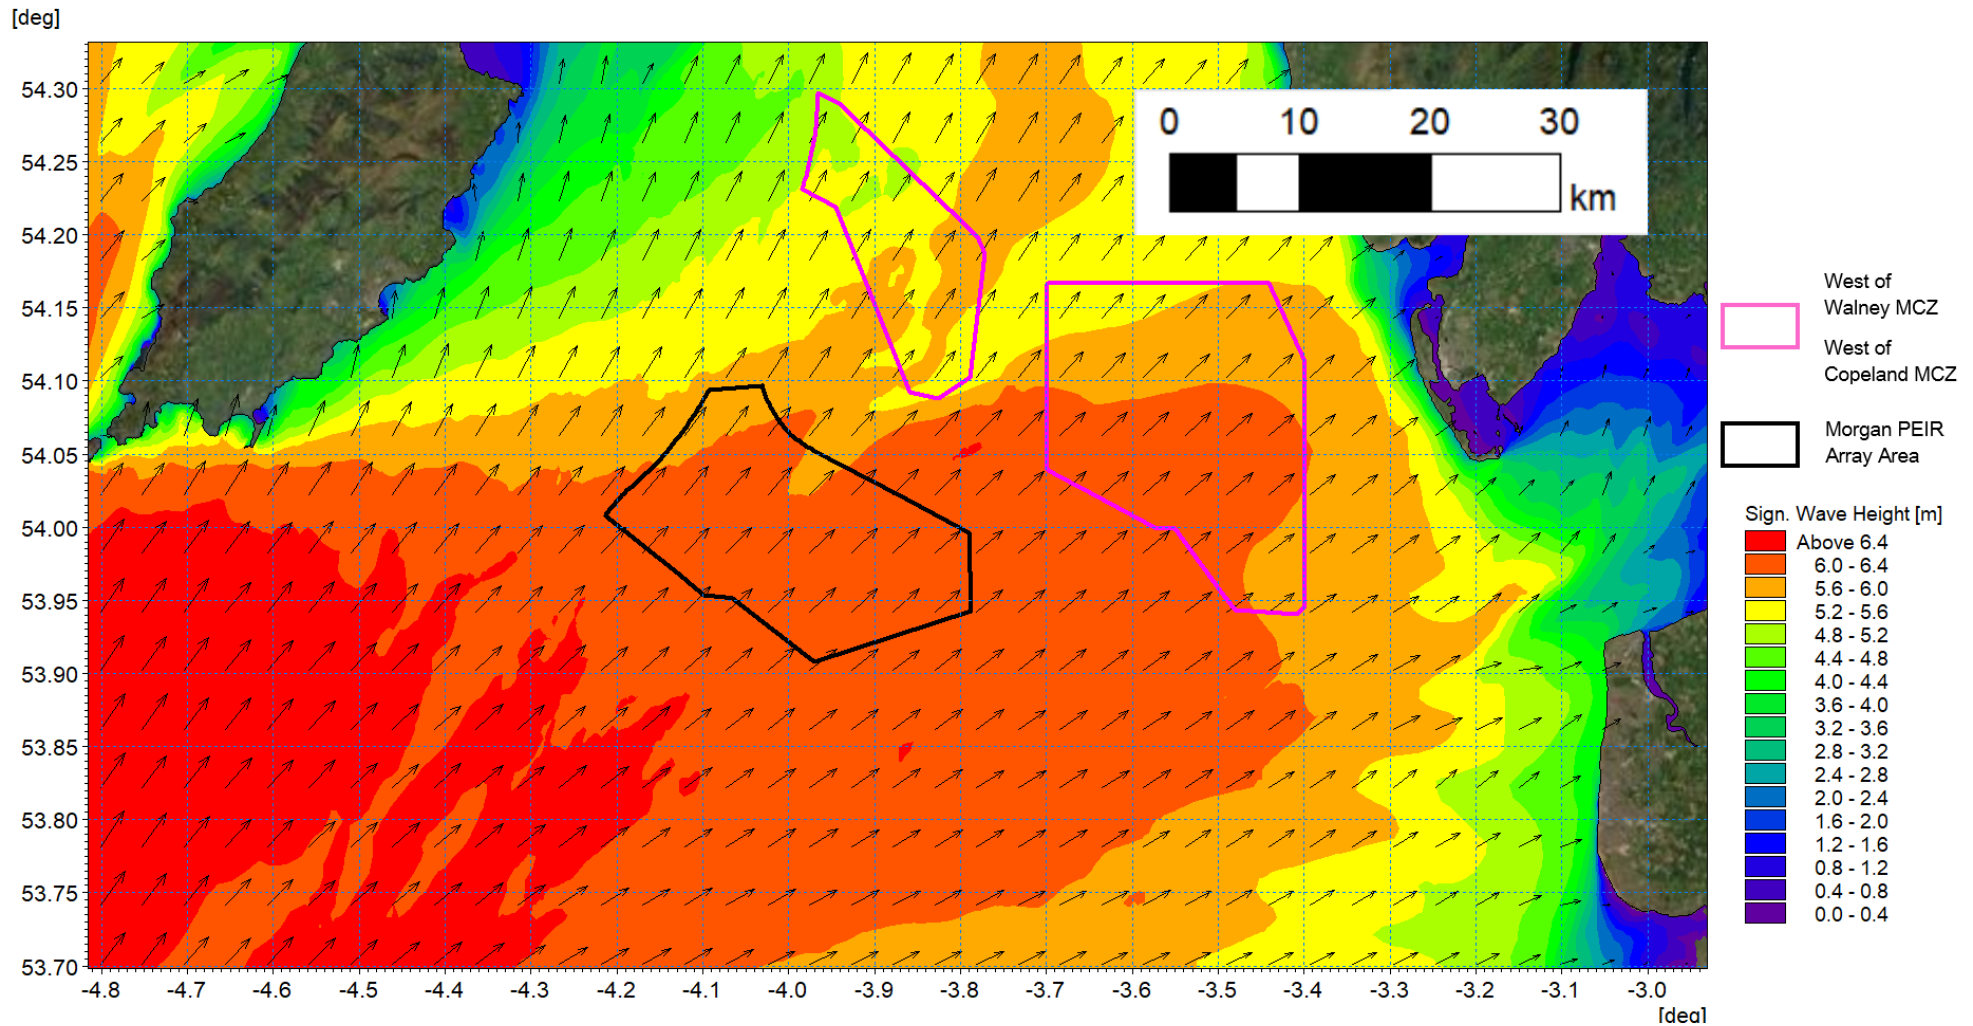


Figure 1.78: Post-construction wave climate 1 in 20 year storm 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

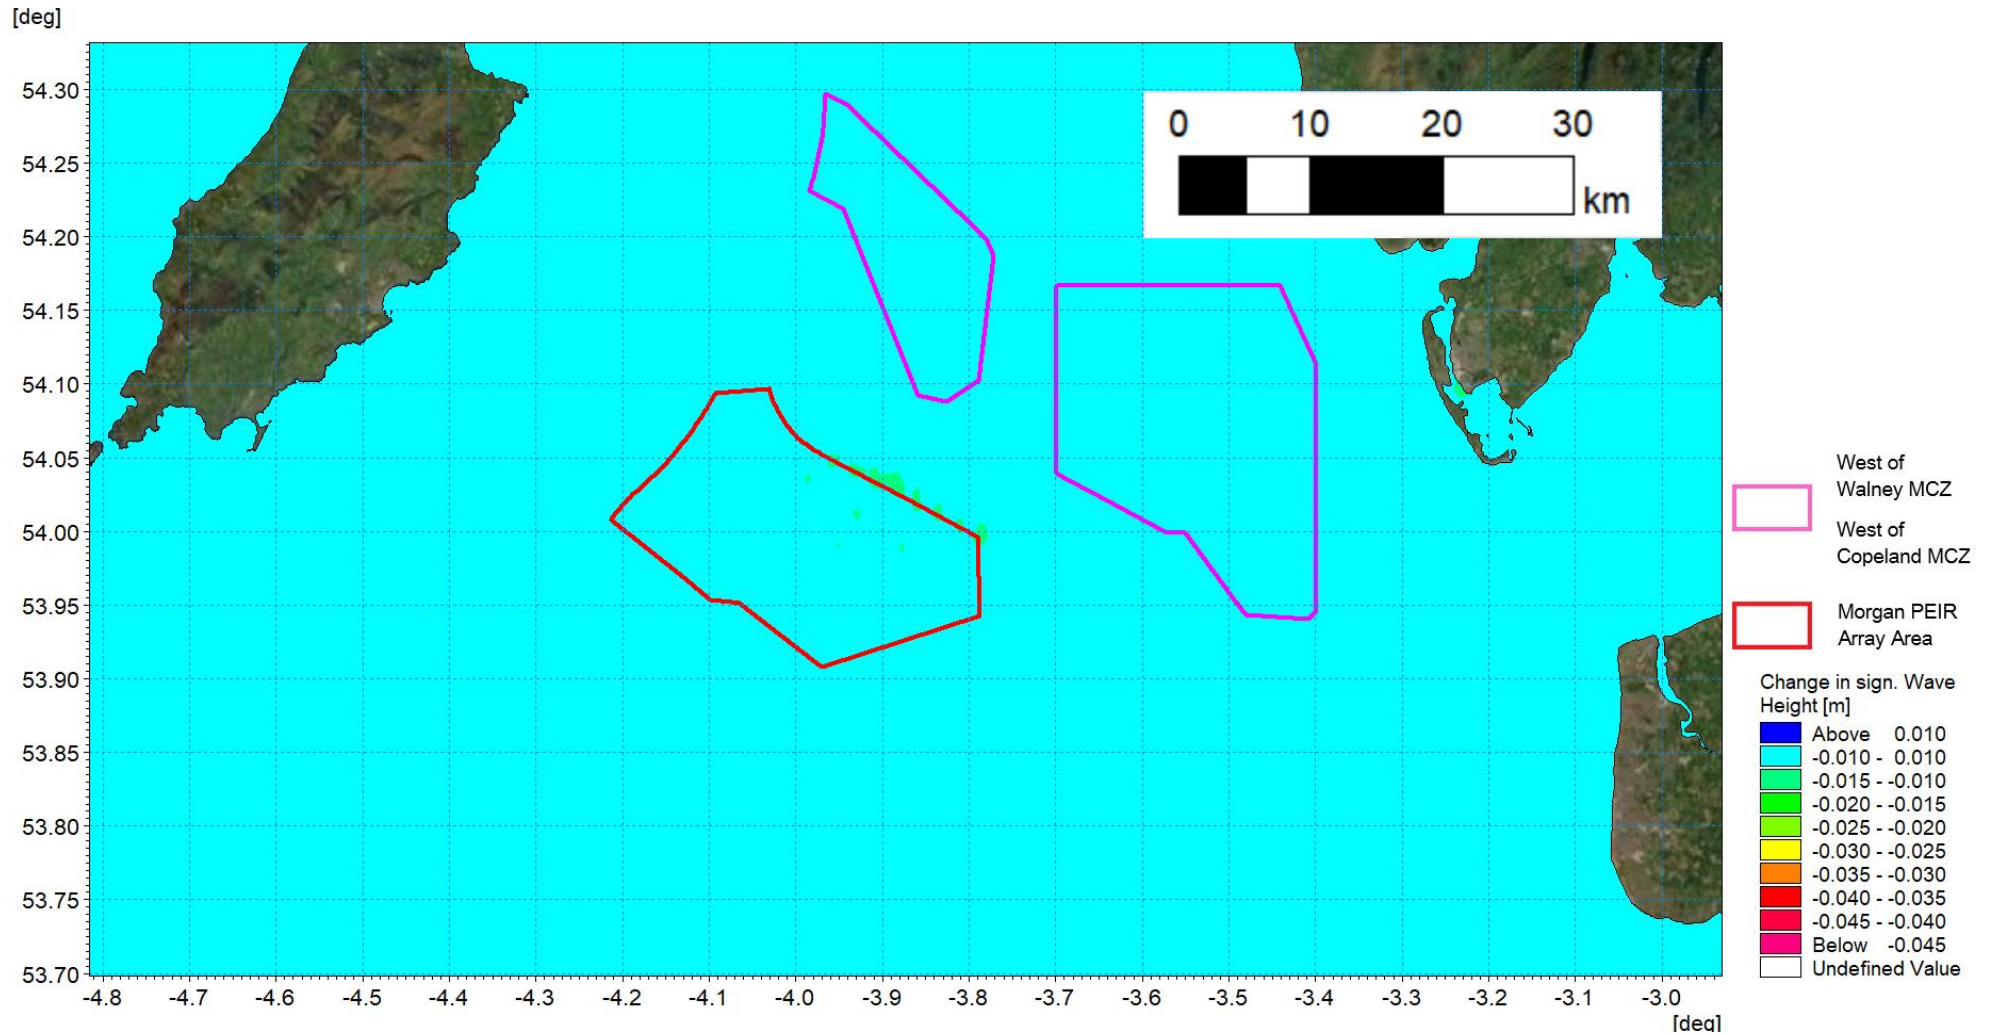


Figure 1.79: Change in wave climate 1 in 20 year storm 240° MHW (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

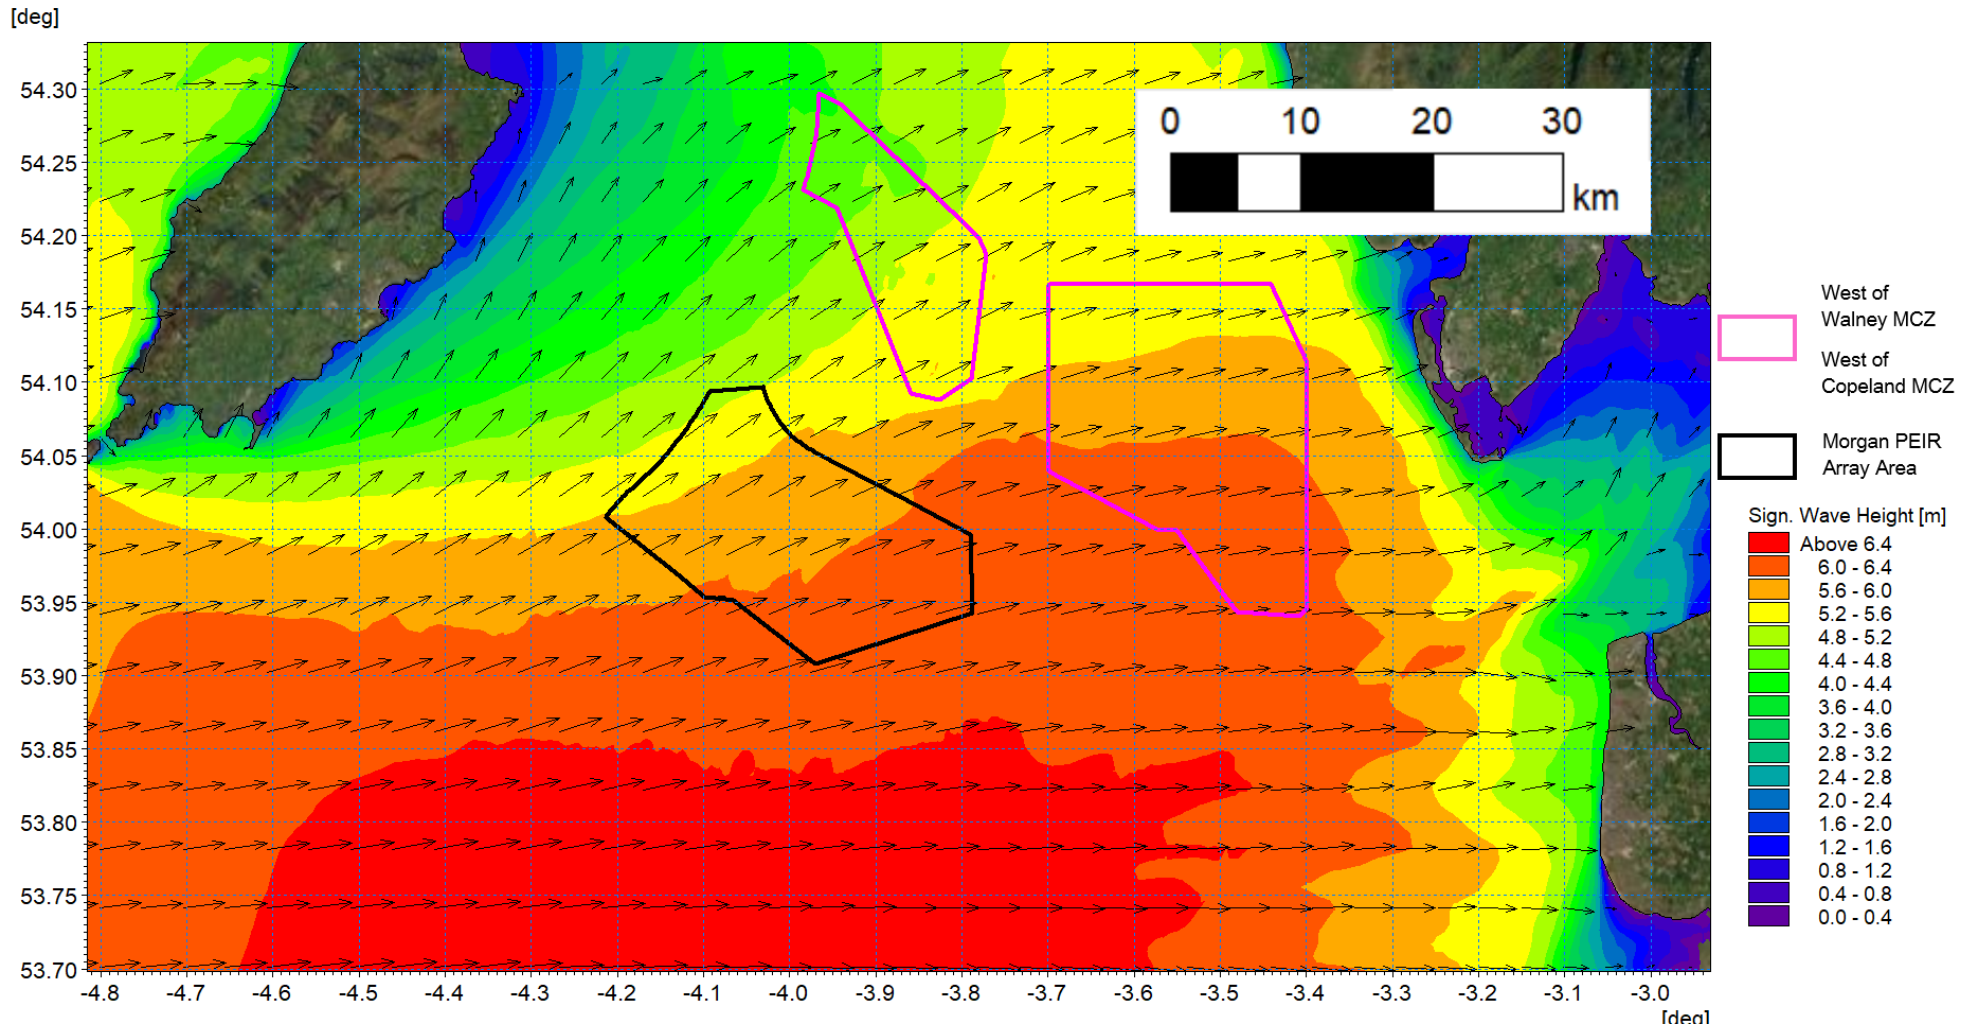


Figure 1.80: Post-construction wave climate 1 in 20 year storm 270° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

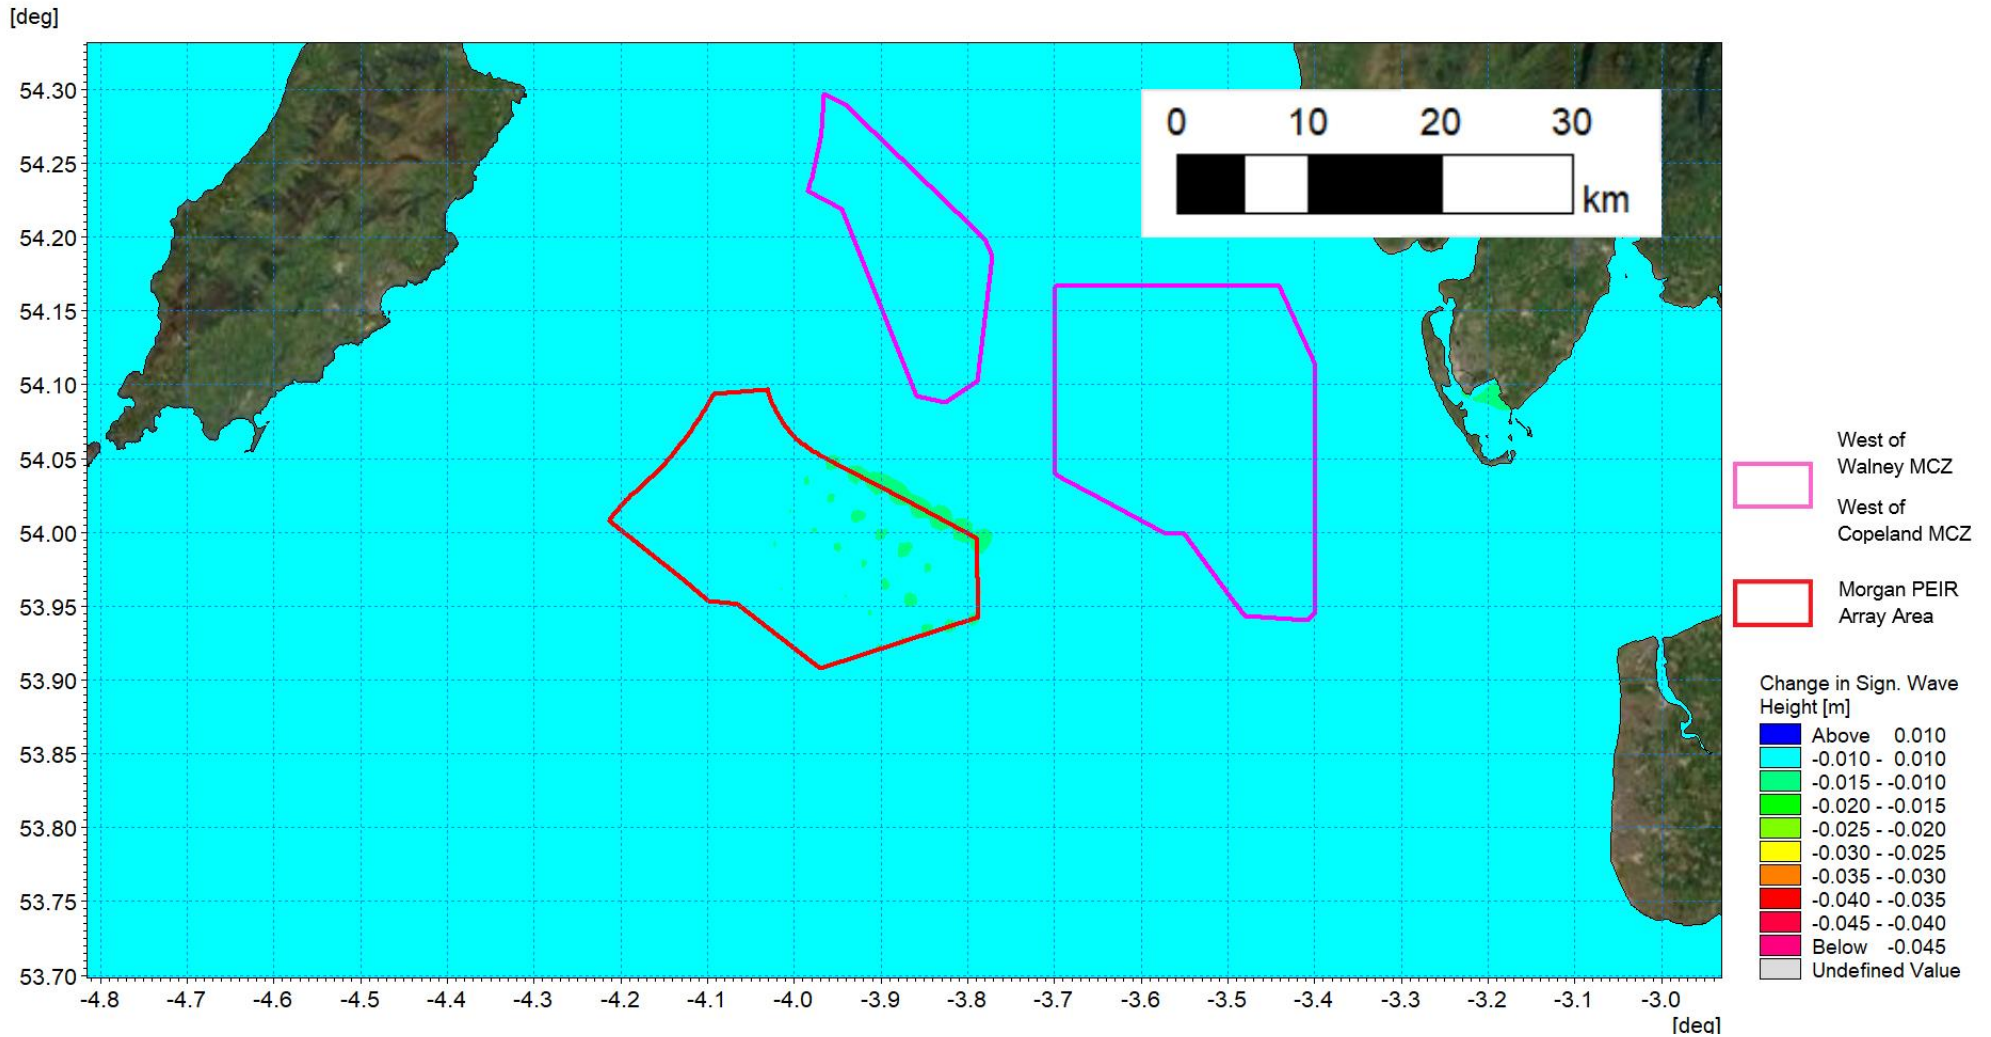


Figure 1.81: Change in wave climate 1 in 20 year storm 270° MHW (post-construction minus baseline).

Littoral currents

- 1.3.6.11 The previous sections established the magnitude of the changes in tidal currents and wave conditions individually, however sediment transport regimes are driven by a combination of these factors. Although the modelling has demonstrated that the Morgan Generation Assets as defined in the PEIR results in minor localised changes for each aspect, for the sake of completeness, the influence on littoral currents was examined.
- 1.3.6.12 The modelling was extended to include the post-construction scenario for the 1 in 1 year storm from 210°. The baseline littoral currents for mid ebb and mid flood were presented in Figure 1.54 and Figure 1.55 respectively. The corresponding post-construction littoral currents are shown in Figure 1.82 and Figure 1.85 for the ebb and flood tides.
- 1.3.6.13 As with the previous difference in current speed post construction, a log plotting scale was necessary to present the changes due to their localised nature. The changes for the flood tide are presented in Figure 1.83 a more detailed plot in Figure 1.84 whilst for the ebb tide Figure 1.86 and Figure 1.87 show the corresponding information.
- 1.3.6.14 During the flood tide the influence of the wave climate is in concert with the tidal current and during the ebb tide, the tidal flow is in opposition to the wave climate and the resultant littoral current is reduced in magnitude. The presence of the structures was seen to have a limited influence on the wave climate and there is little difference between changes in littoral current magnitude and the tidal flows alone due to the installation during the flood tide, Figure 1.68. The extent of the change is larger for the ebb tide condition particularly at the locations where the alignment of the array is in concert with both the tidal flow and wave direction, although it should be noted that these are still <1% of baseline tidal flow. Overall, the magnitude of these changes remains limited to $\pm 6\%$ of the baseline currents at 300 m and reduces significantly with increased distance from each structure.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

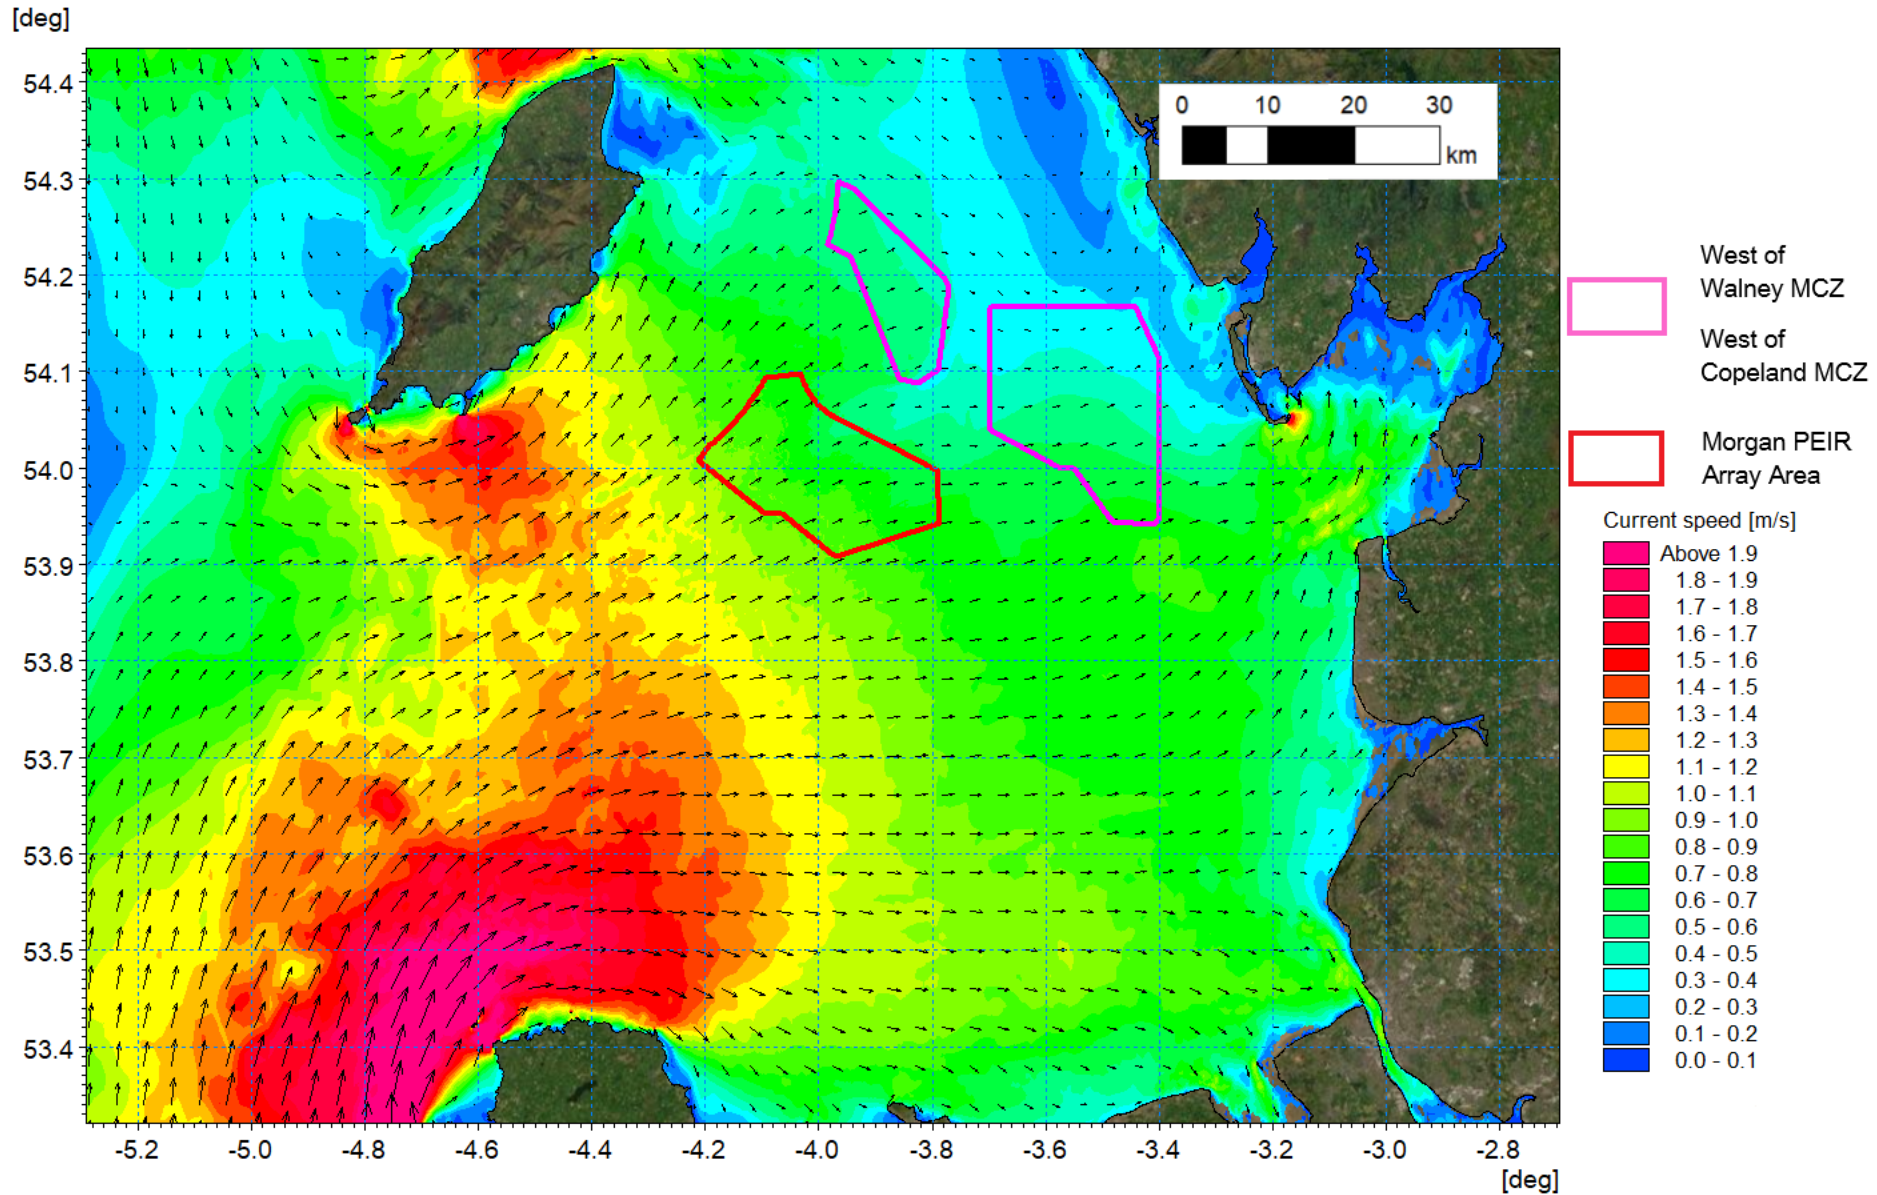


Figure 1.82: Post-construction littoral current 1 in 1 year storm from 210° - flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

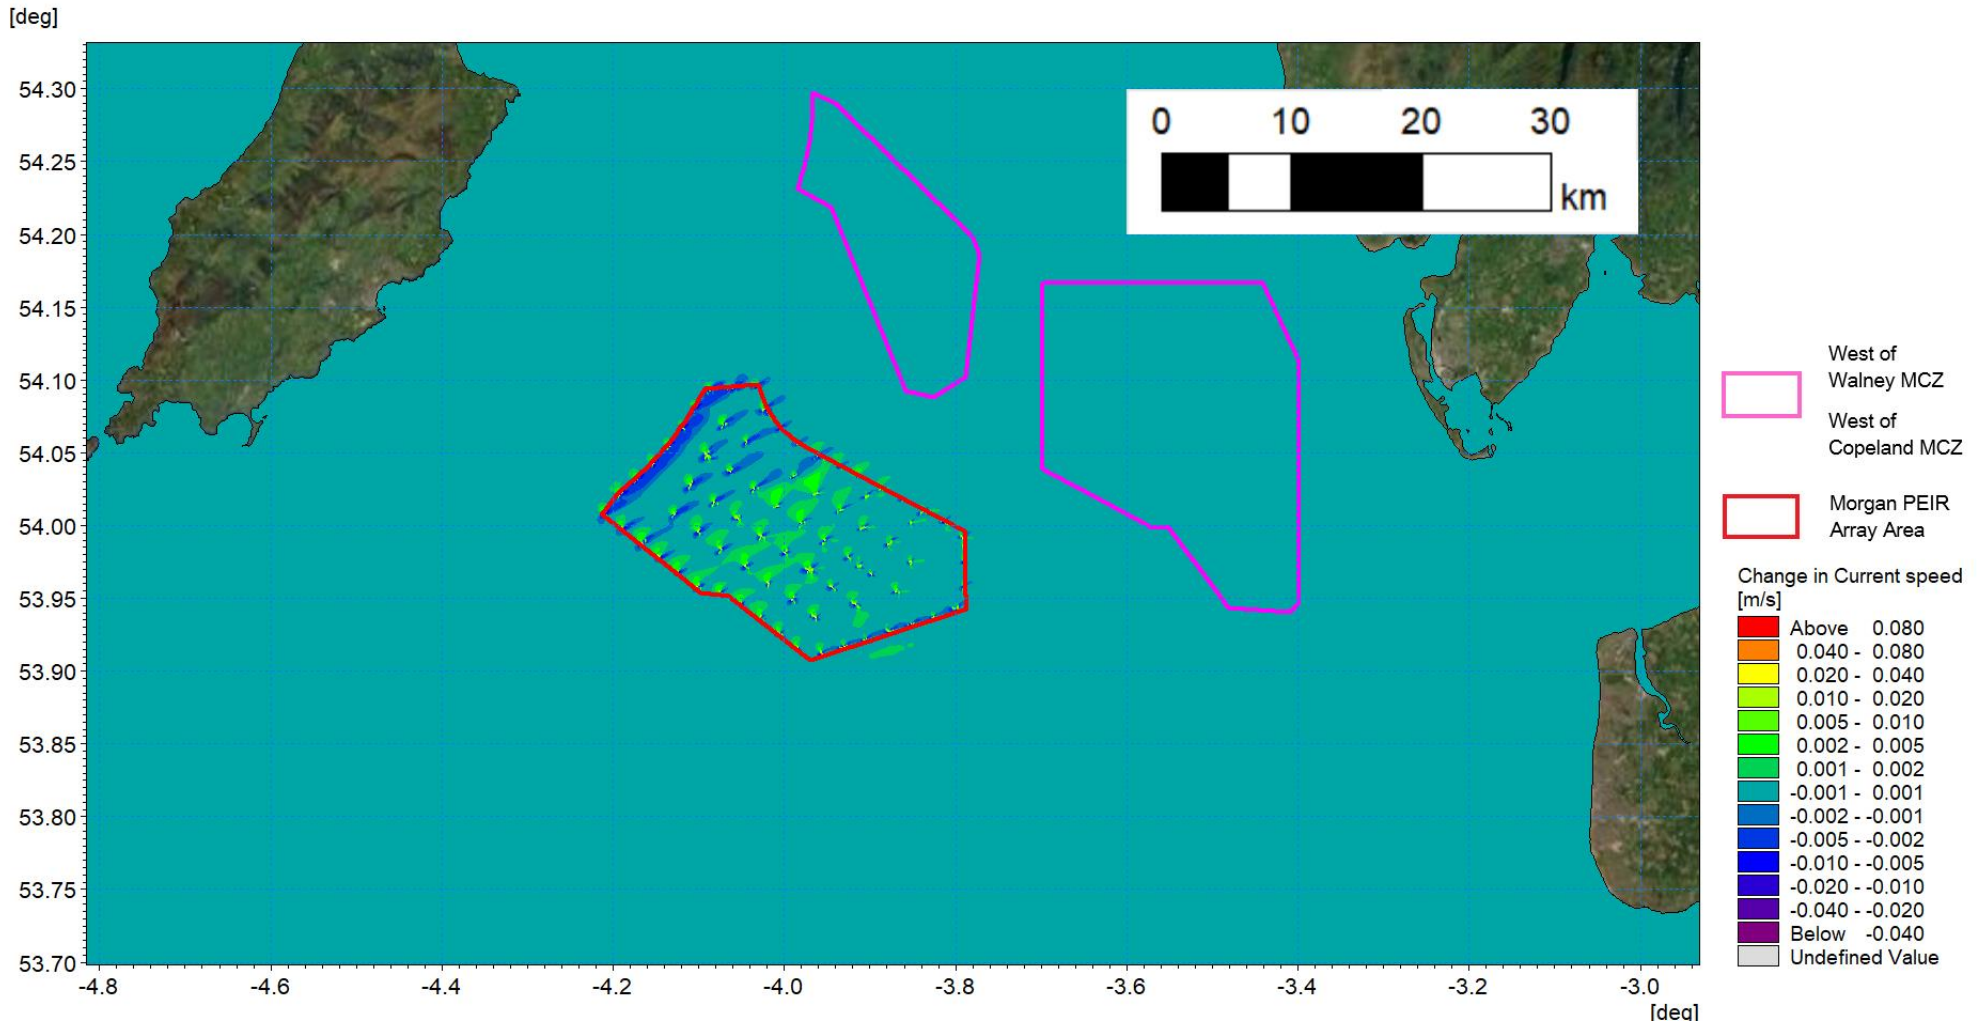


Figure 1.83: Change in littoral current 1 in 1 year storm from 210° - flood tide (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

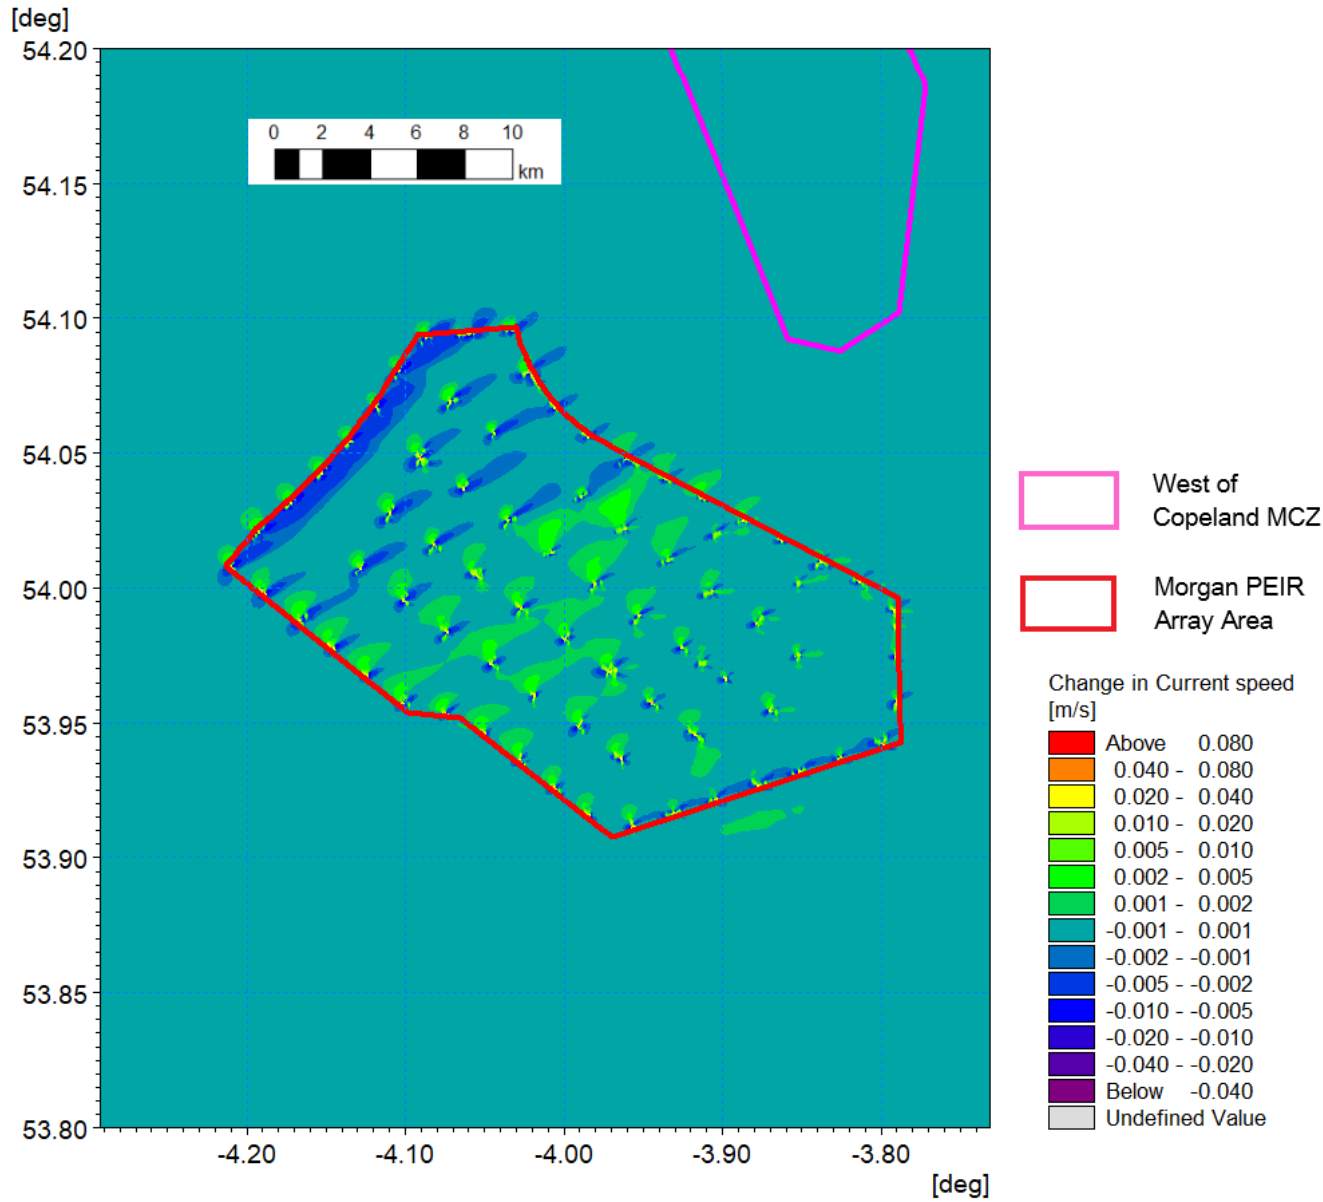


Figure 1.84: Change in littoral current 1 in 1 year storm from 210° - flood tide (post-construction minus baseline) detailed view.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

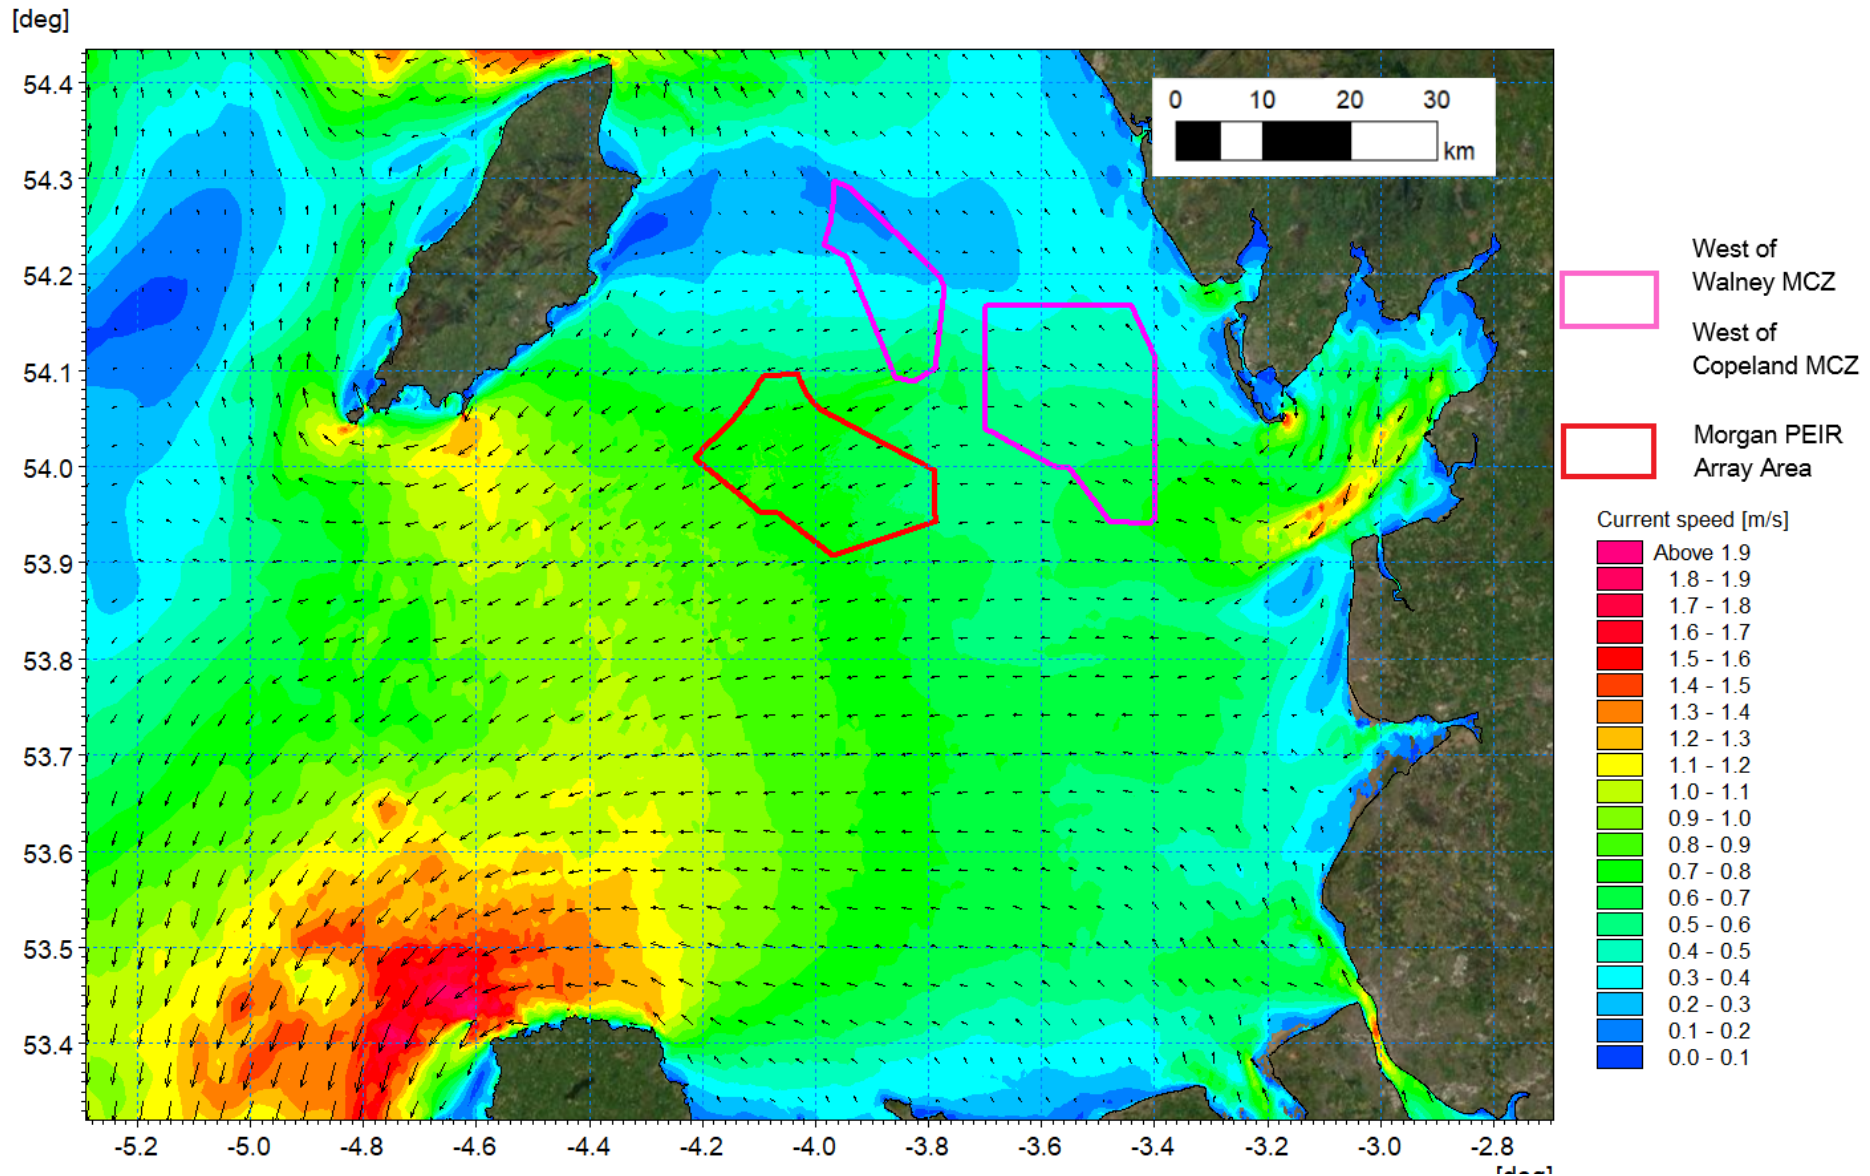


Figure 1.85: Post-construction littoral current 1 in 1 year storm from 210° - ebb tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

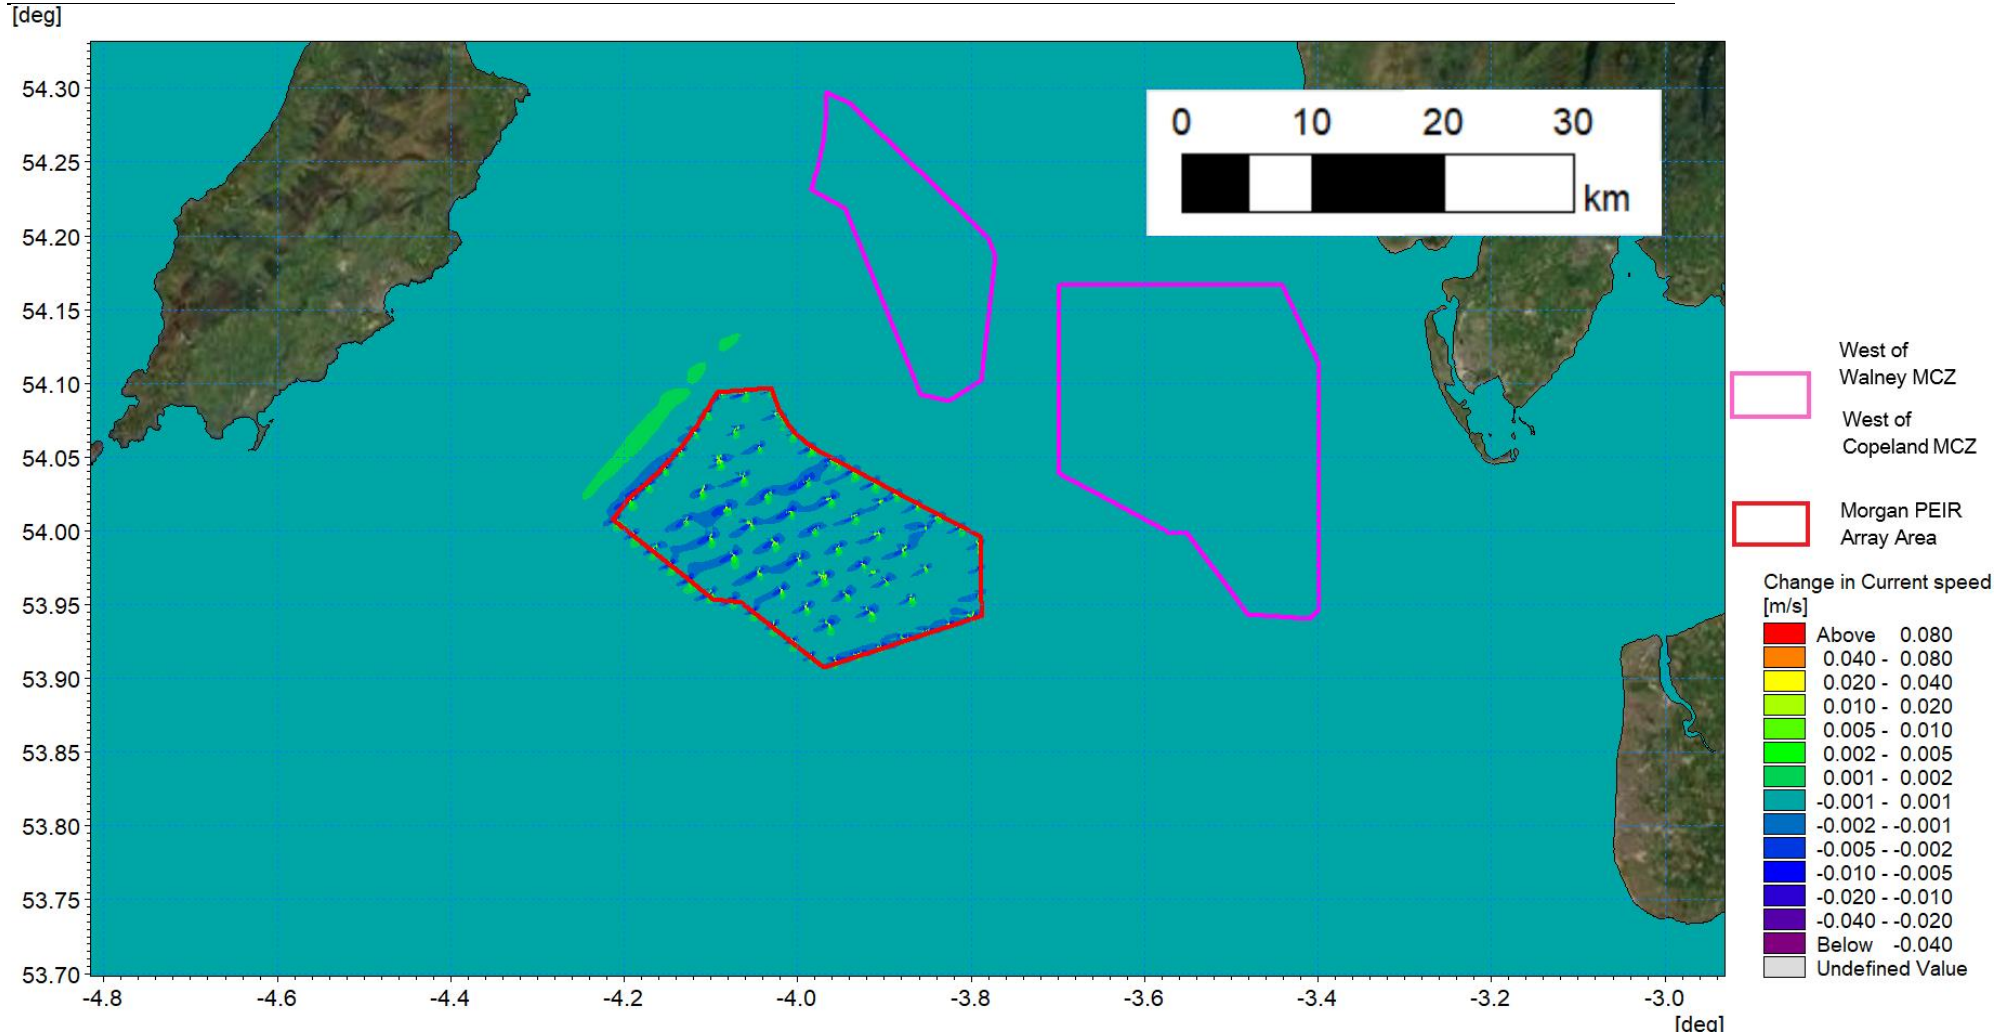


Figure 1.86: Change in littoral current 1 in 1 year storm from 210° - ebb tide (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

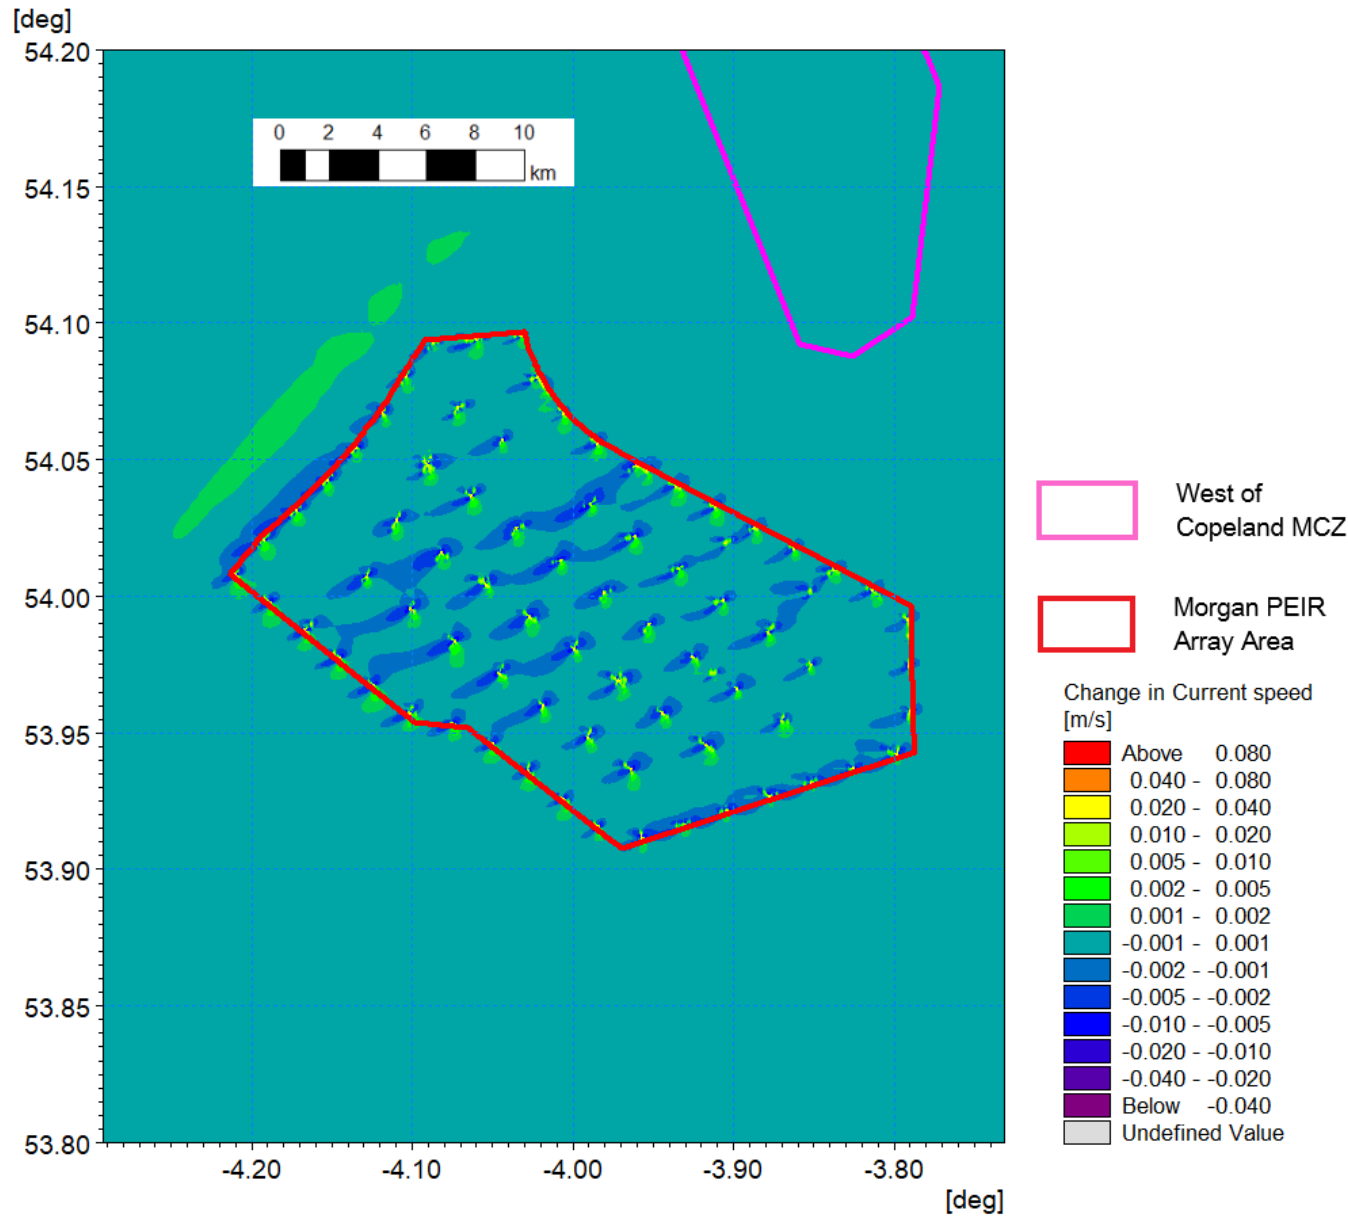


Figure 1.87: Change in littoral current 1 in 1 year storm from 210° - ebb tide (post-construction minus baseline) detailed view.

Post-construction sedimentology

Sediment transport

- 1.3.6.15 The numerical modelling methodology for sediment transport was described in section 1.3.2, which indicated how the baseline information was discretised to form the basis of the modelled scenarios. For the post-construction scenario, in addition to the Morgan Generation Assets infrastructure, as defined in the PEIR, being included in the tide and wave models, the bed material map was edited to represent the areas of cable protection and scour protection where sediment supply is restricted. In each case an area of fixed bed was applied overlain with a thin layer of sand to initialise the model and avoid instabilities. The scour protection was defined as 56 m diameter for each wind turbine structure leg and 49 m diameter for each OSP leg. The models were then re-run for a spring tide under calm conditions.
- 1.3.6.16 There are a number of approaches for quantifying potential sediment transport, given that transport rates vary both across the area and due to tidal state and climate conditions. For this analysis, the residual current was calculated over the course of two tidal cycles (one day) with the structures in place and compared with that for the baseline (Figure 1.58) for the calm condition as this is effectively the driver for sediment transport. The post-construction residual current and changes are shown in Figure 1.88 and Figure 1.89 respectively. As with previous results a more detailed plot is presented in Figure 1.90.
- 1.3.6.17 The corresponding sediment transport was simulated over the course of one day where the equivalent baseline daily sediment transport rate was shown in Figure 1.59. The post-construction daily sediment transport rate and differences are shown in Figure 1.91 and Figure 1.92 respectively. It should be noted that both the sediment transport and difference plots use a log palette as there is a large range in sediment transport potential across the domain.
- 1.3.6.18 This analysis shows that although there are changes as a result of the installation of the Morgan Generation Assets PEIR structures and associated scour and cable protection, the extent and magnitude is limited. As anticipated, in areas of reduced residual current in the lee of structures the sediment transport rate is also reduced and vice versa. Within the context of this comparative study there is a maximum change in residual current of circa $\pm 10\%$ which is largely sited within very close proximity to the wind turbine foundation structures (less than 10 m elongated in the direction of principle tidal currents). It is noted that areas of reduced residual current and sediment transport are often accompanied by a similar increase in close proximity. This indicates that the residual current and resulting sediment transport paths are adjusted to accommodate the structures rather than transport pathways being cut off.
- 1.3.6.19 This process was repeated for the 1 in 1 year storm. The baseline residual current (Figure 1.62) was compared with the equivalent post-construction residual current pattern as shown in Figure 1.93; with the difference in Figure 1.94 and in more detail in Figure 1.95. The pattern of changes is similar to the previous scenario but with a wider area of influence. It should however be noted that although the absolute values of these changes are increased from the purely tidal condition the underlying baseline residual currents are of greater magnitude under storm conditions and are proportionately smaller than those exhibited under calm conditions.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

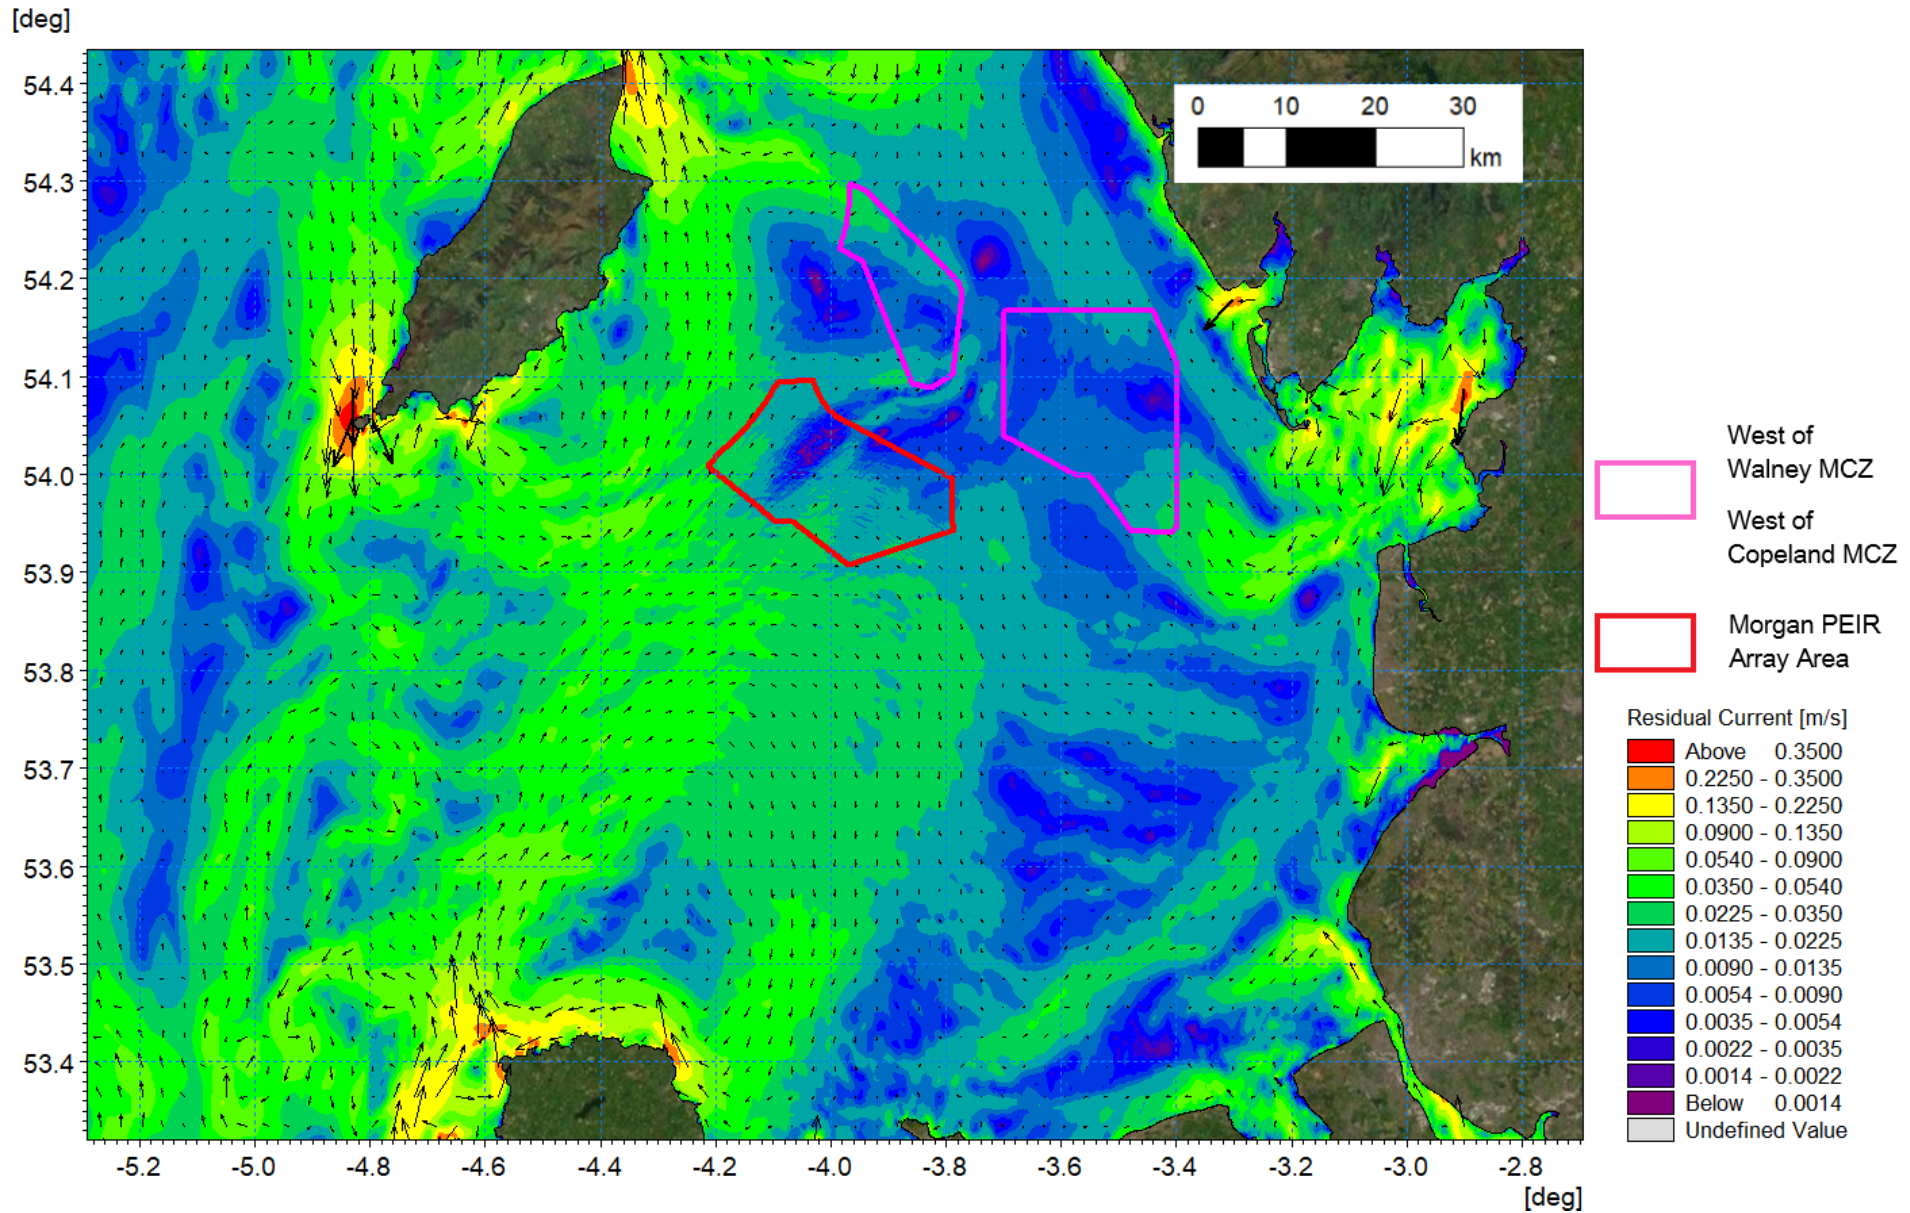


Figure 1.88: Post-construction residual current spring tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

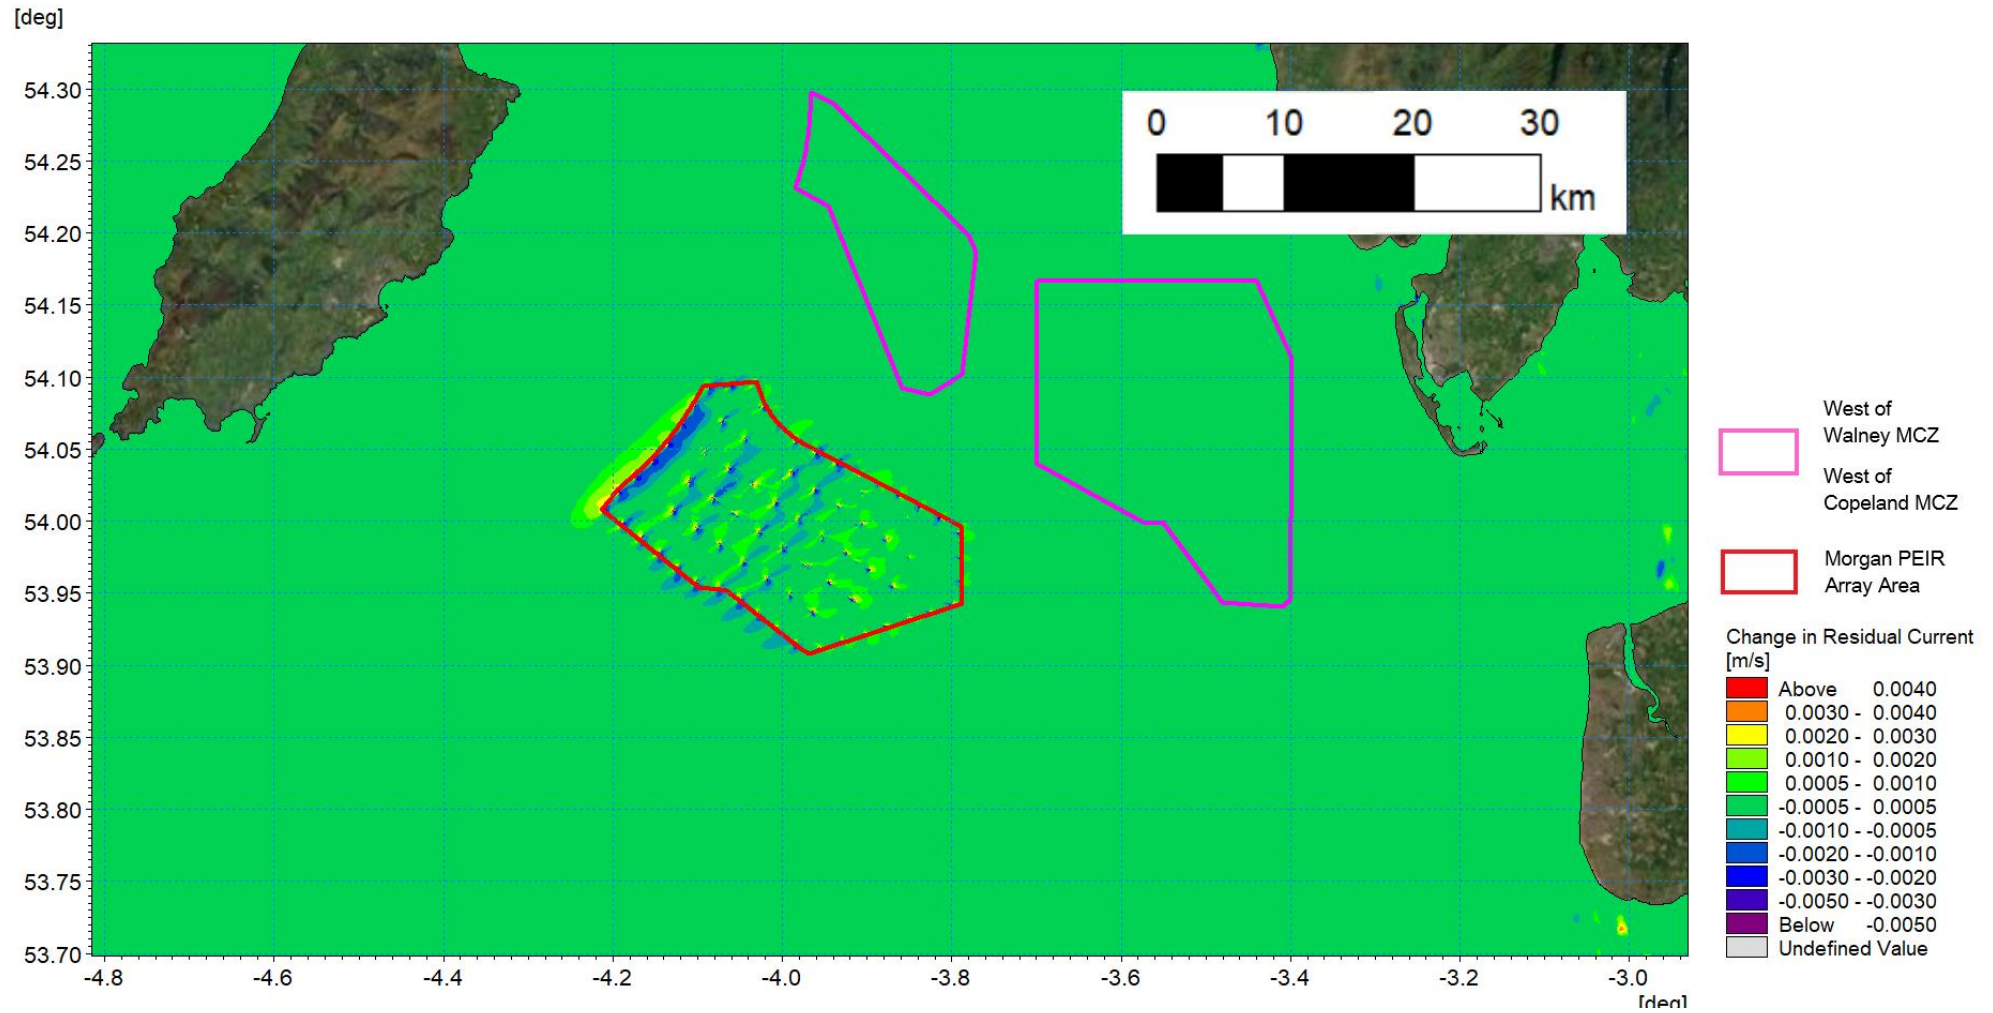


Figure 1.89: Change in residual current spring tide (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

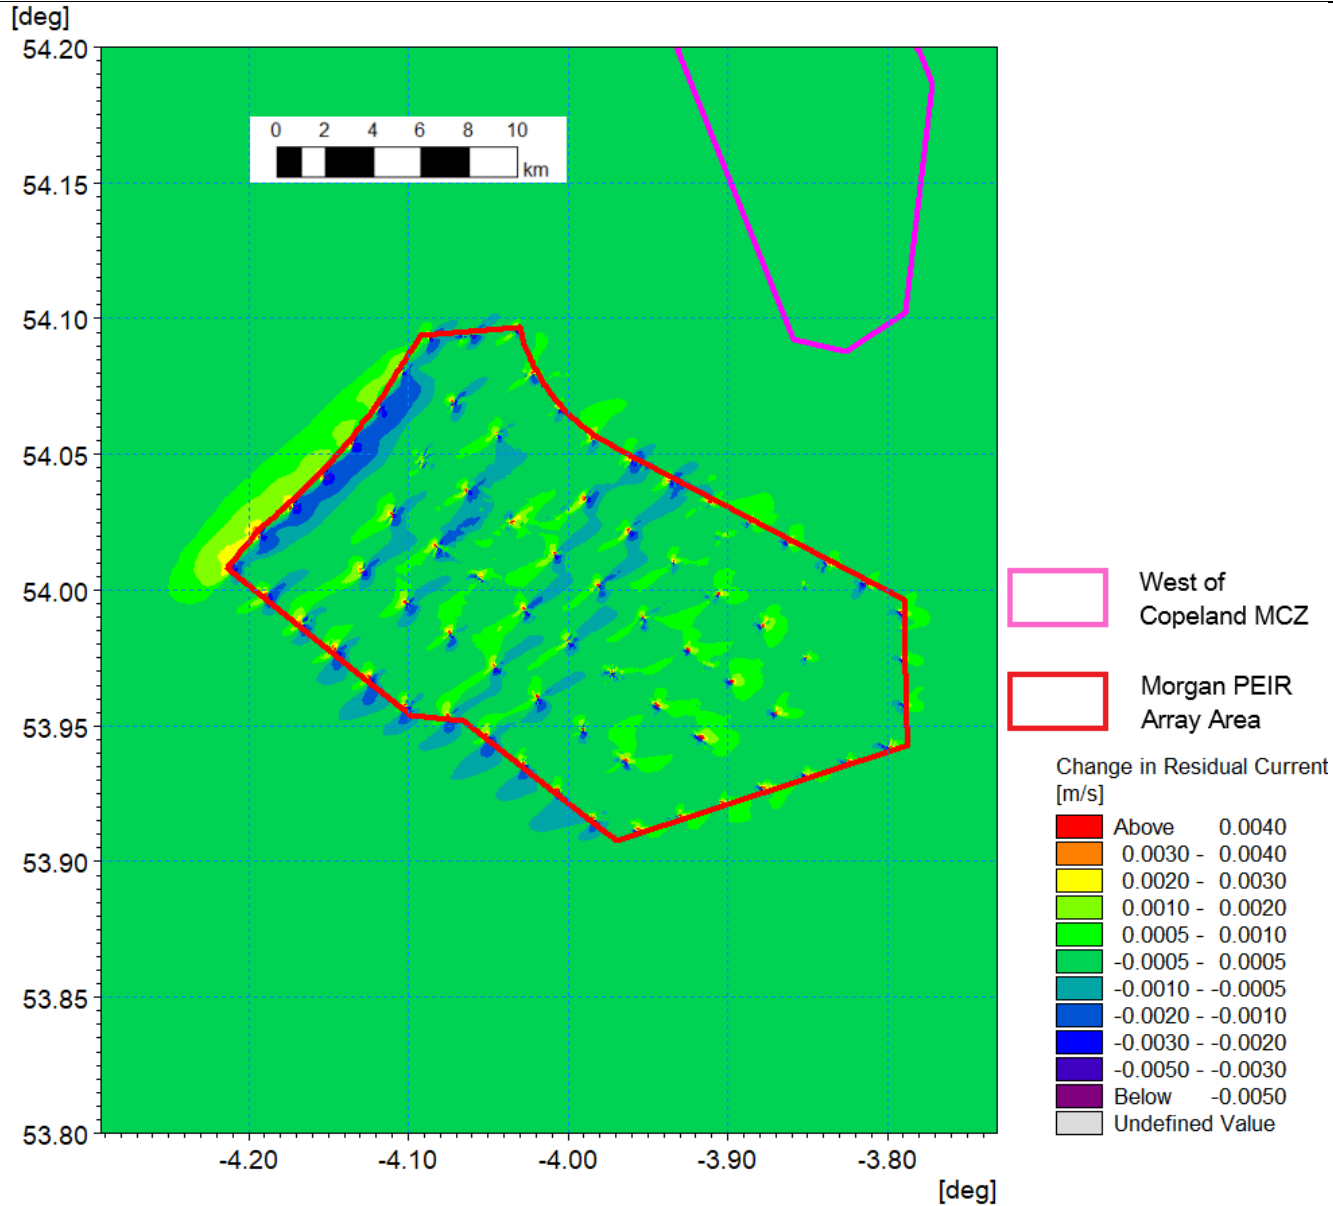


Figure 1.90: Change in residual current spring tide (post-construction minus baseline) detailed view.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

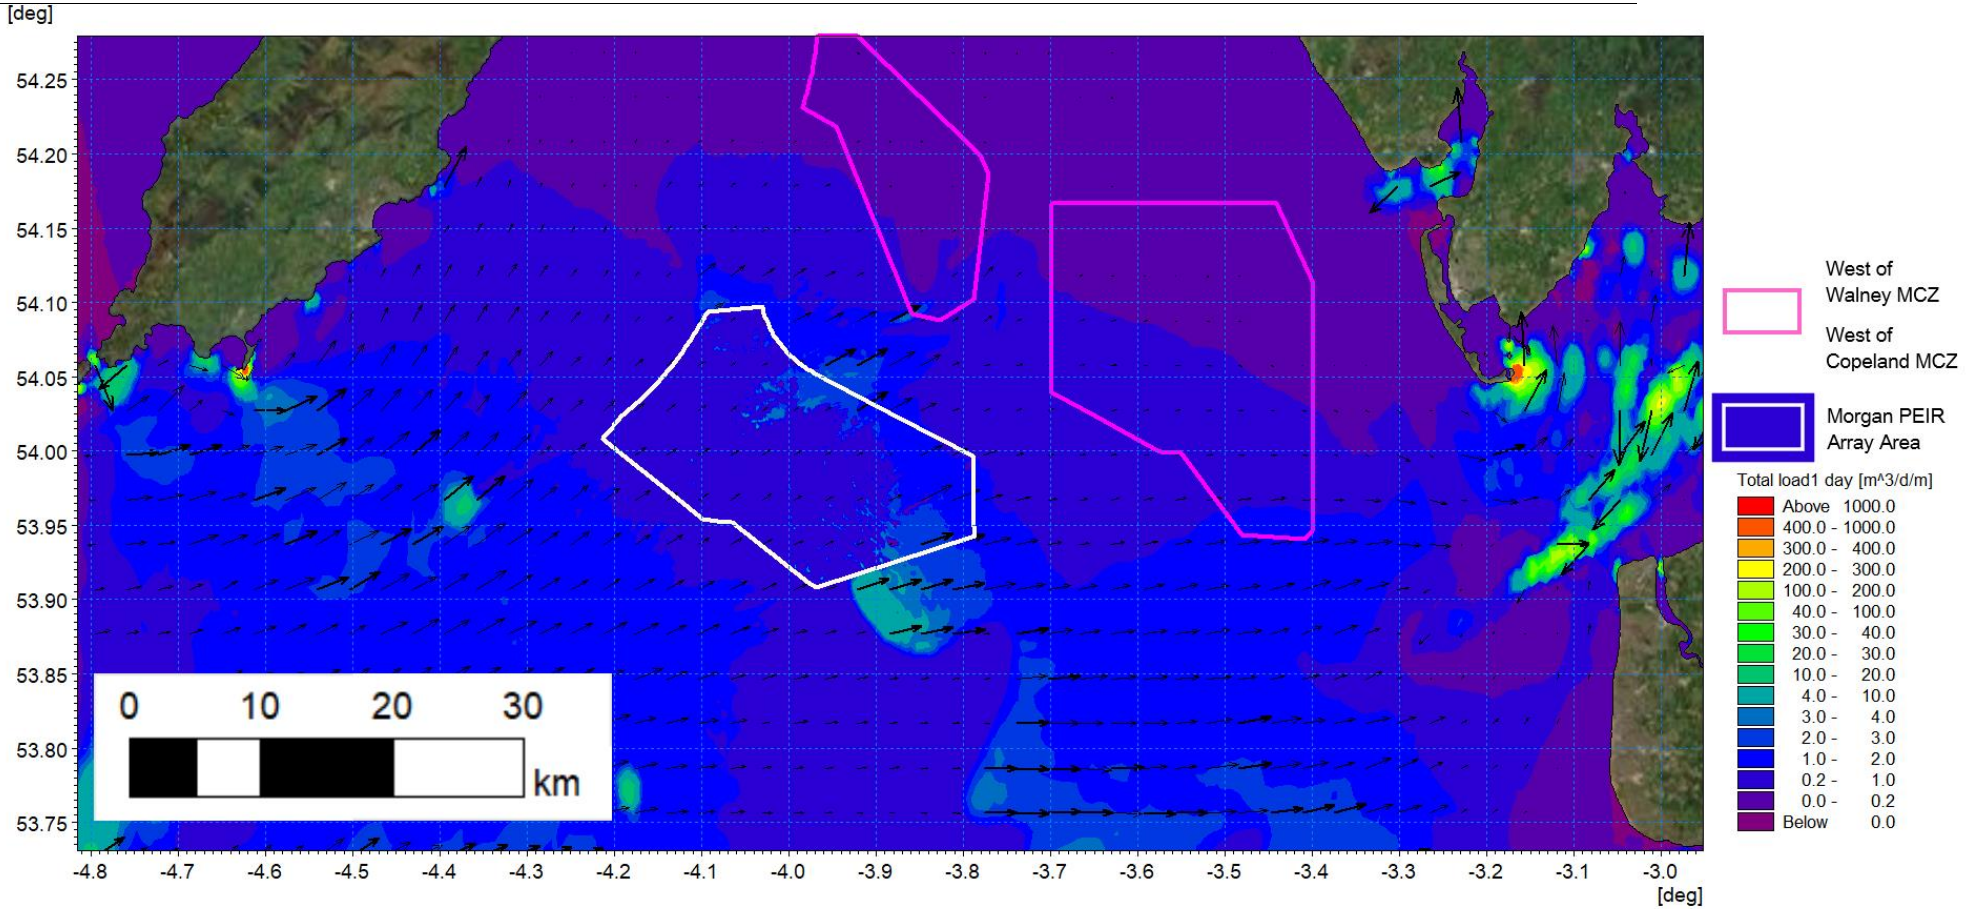


Figure 1.91: Post-construction potential sediment over the course of one day (two tide cycles).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

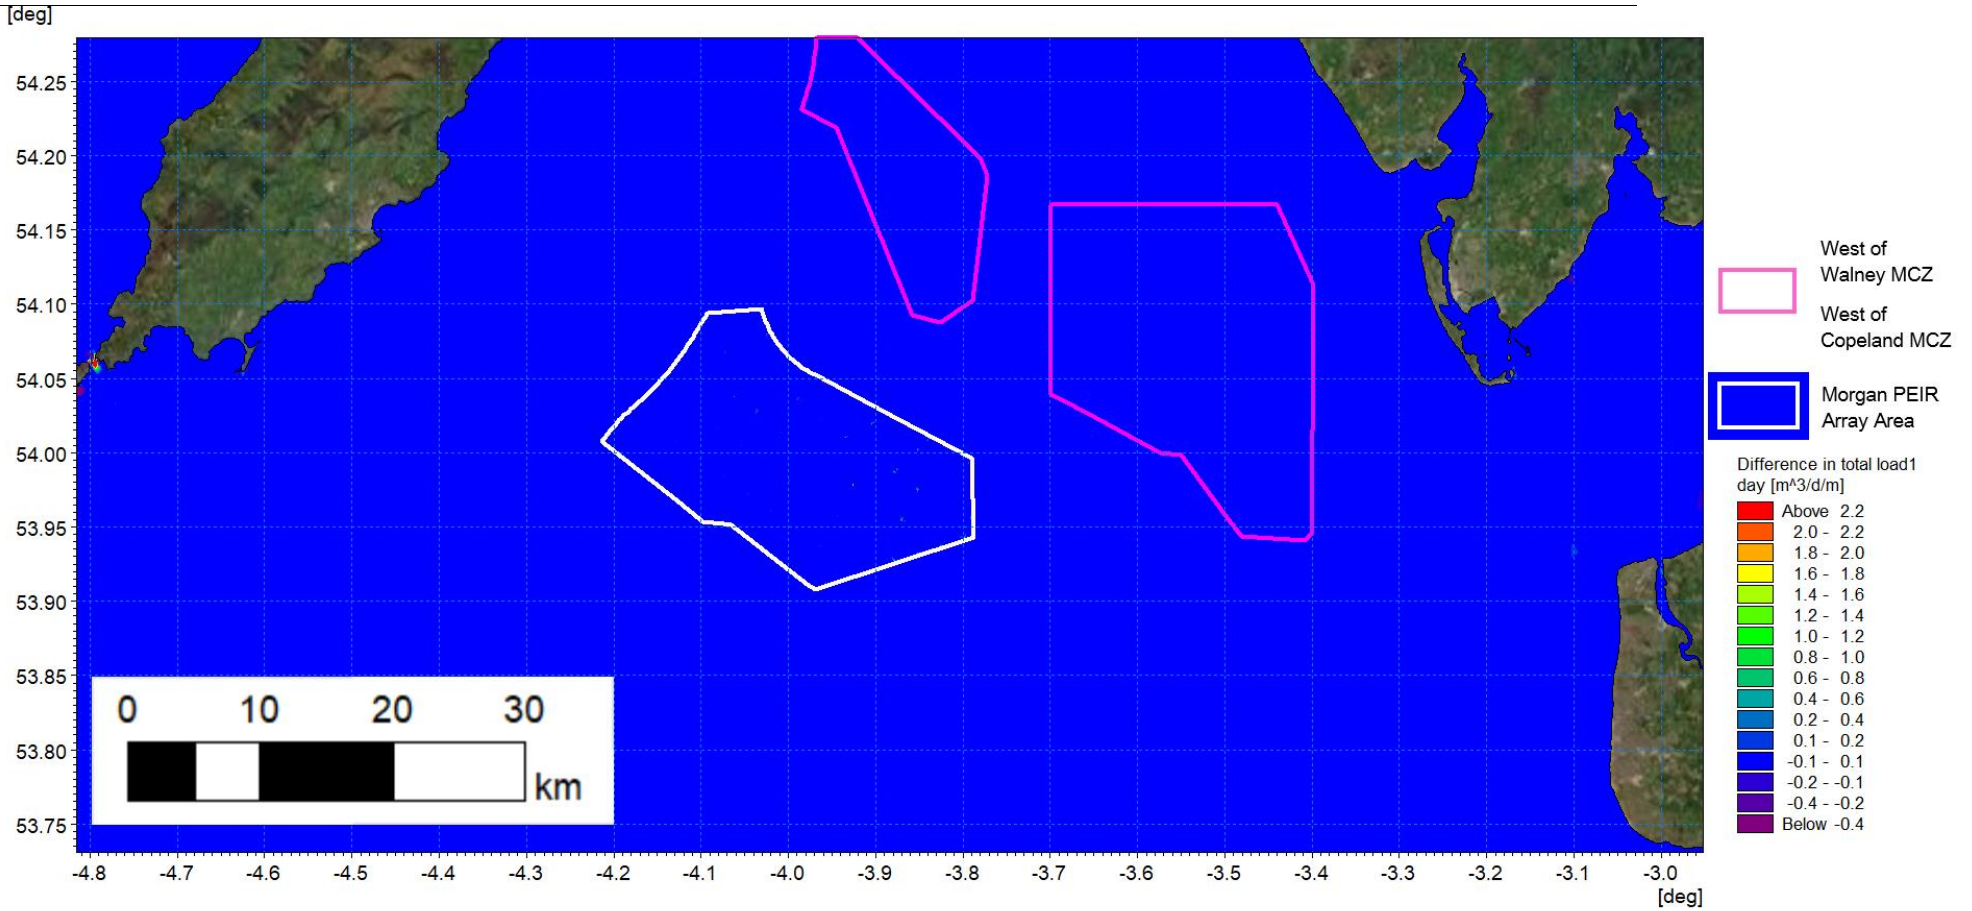


Figure 1.92: Difference in potential sediment transport over the course of one day (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

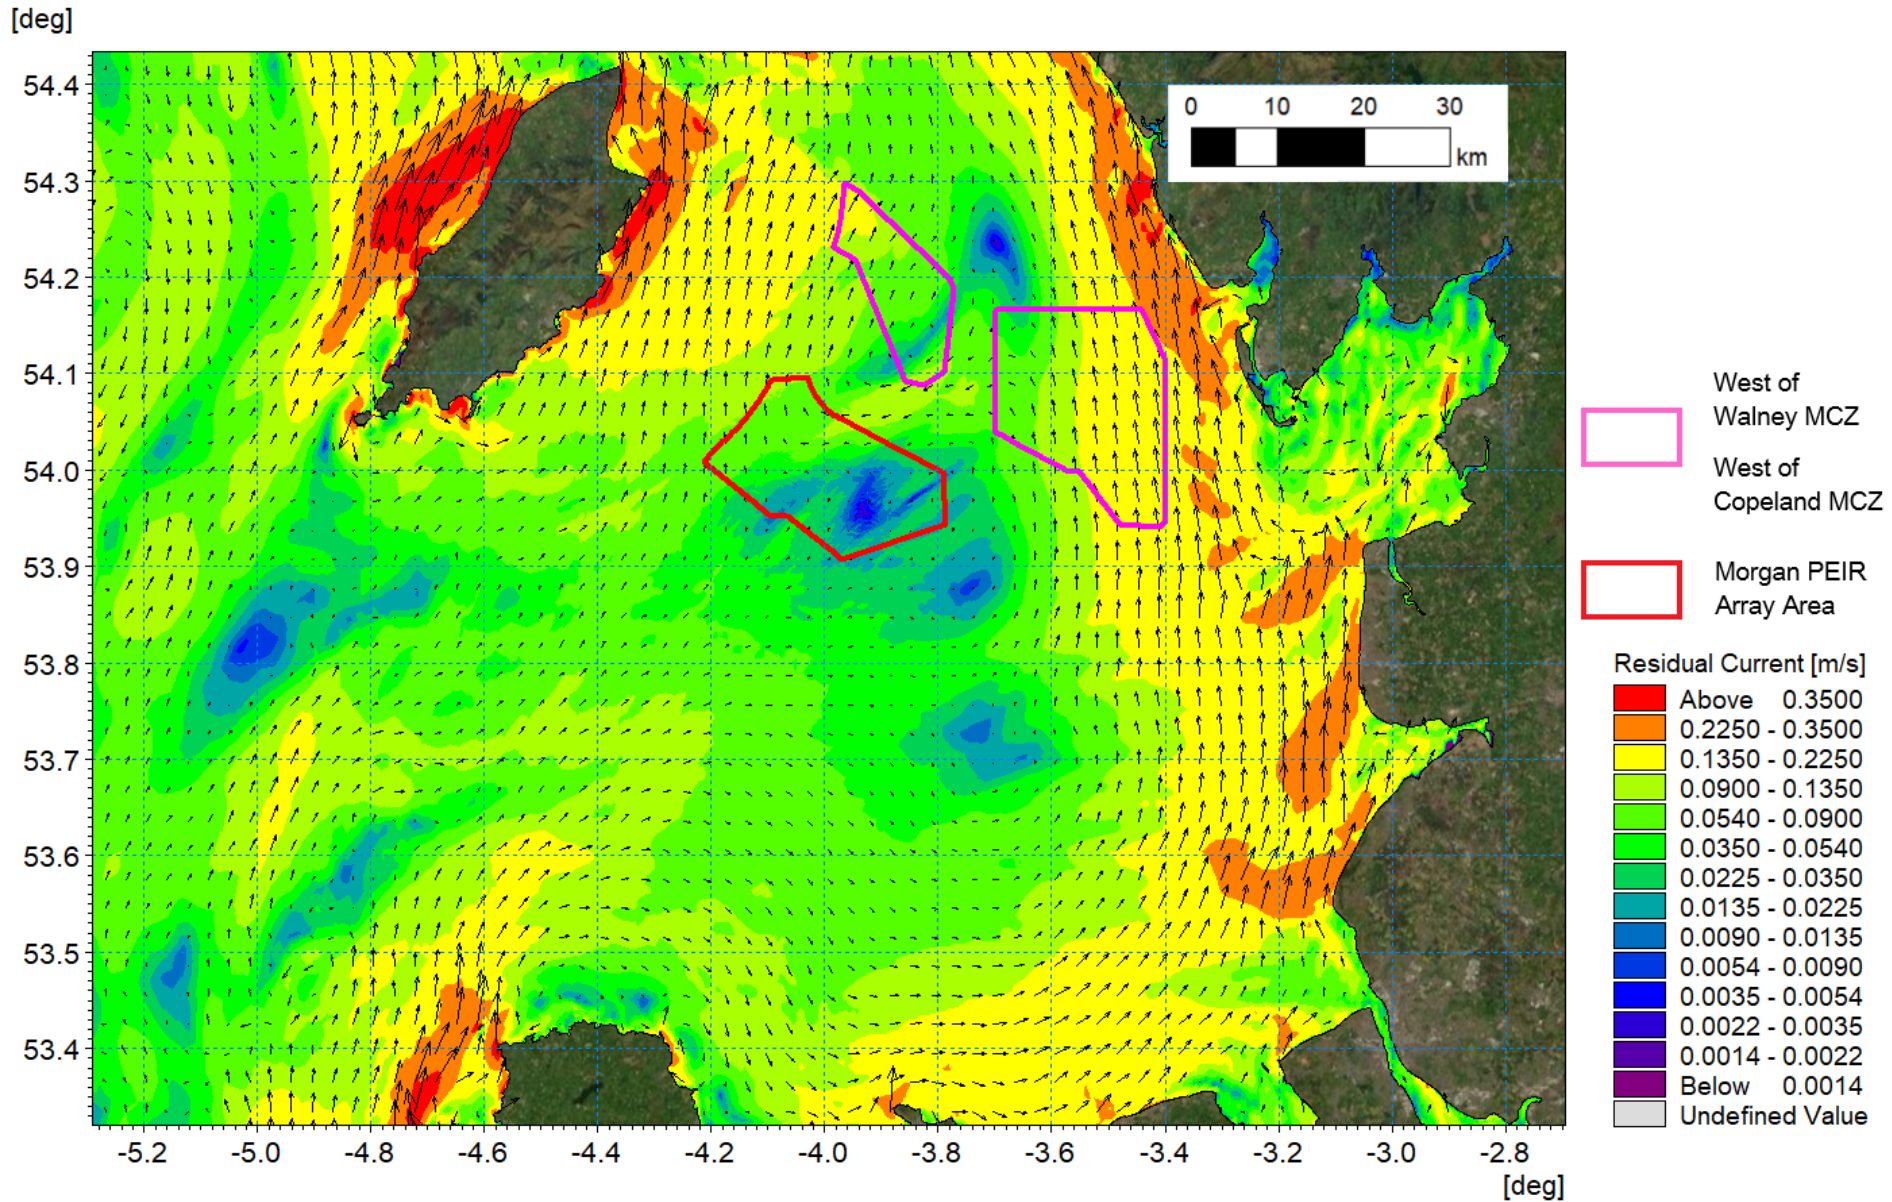


Figure 1.93: Post-construction residual current 1 in 1 year storm from 210° spring tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

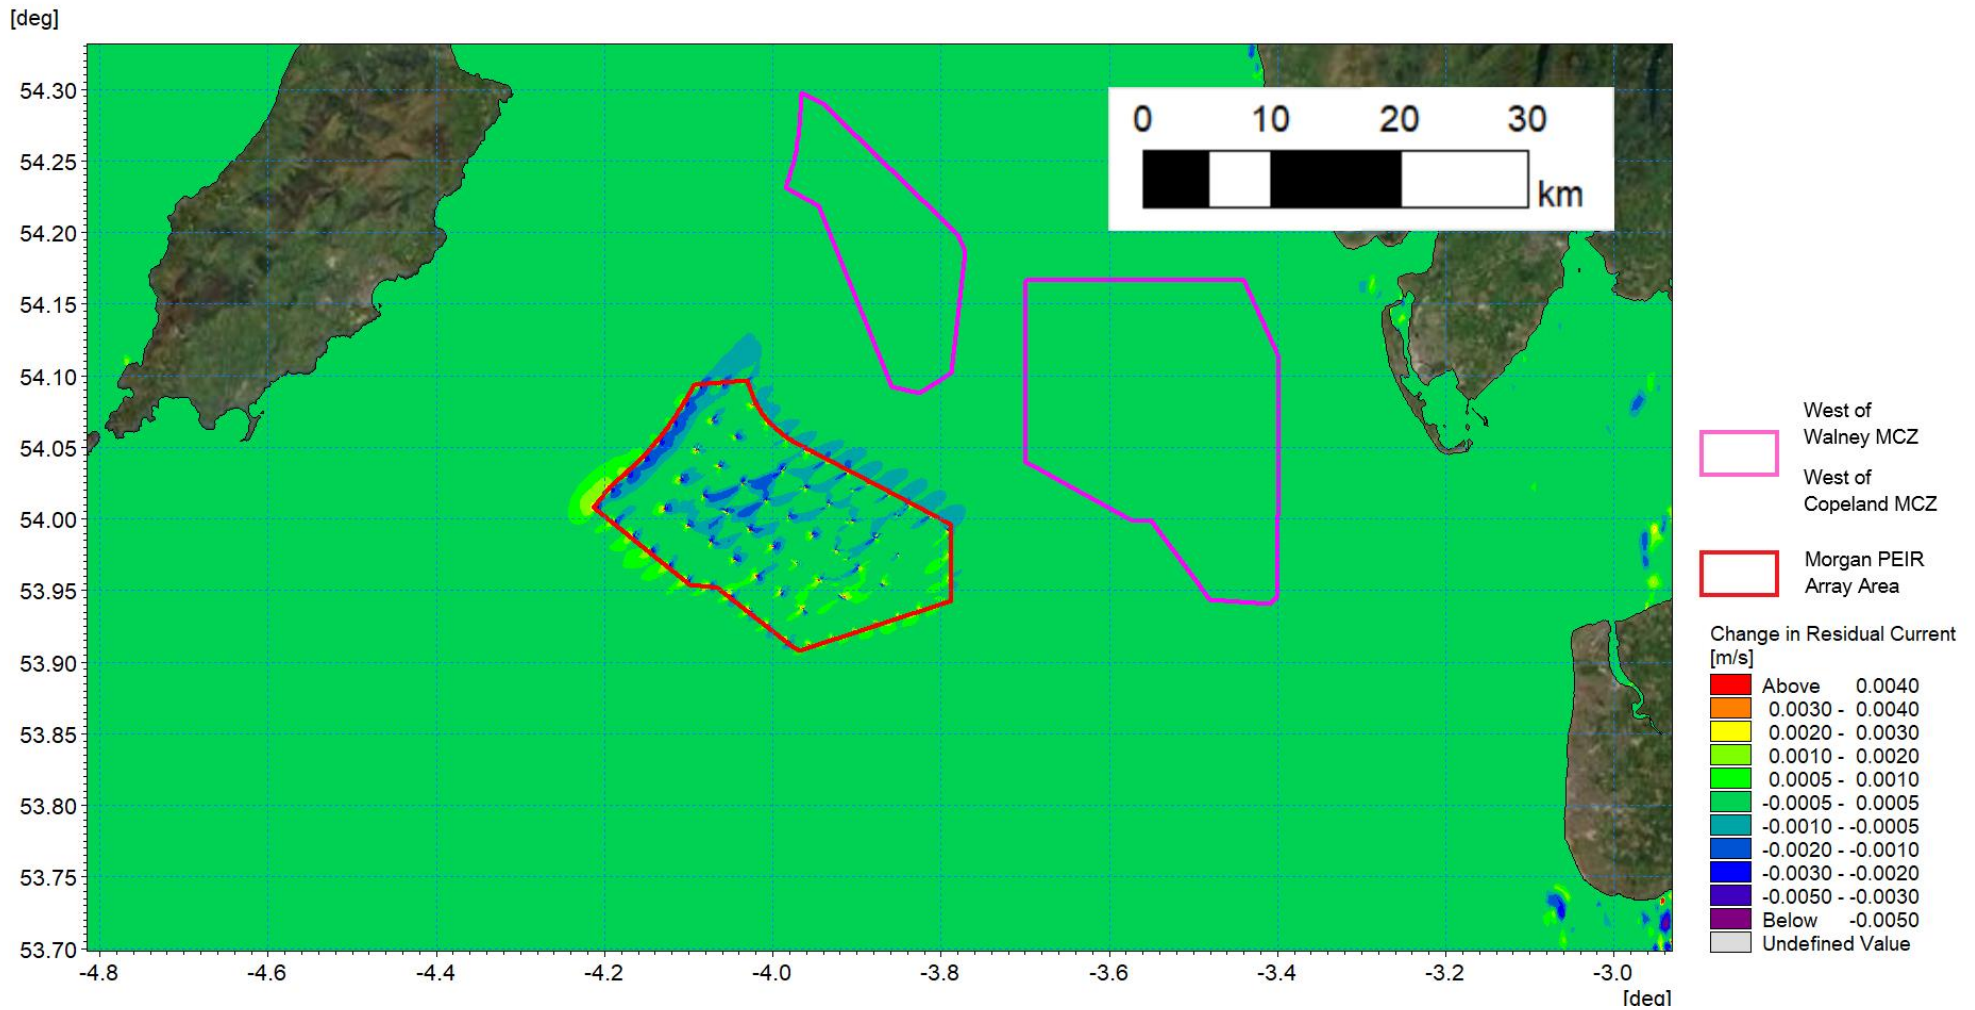


Figure 1.94: Change in residual current 1 in 1 year storm from 210° spring tide (post-construction minus baseline).

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

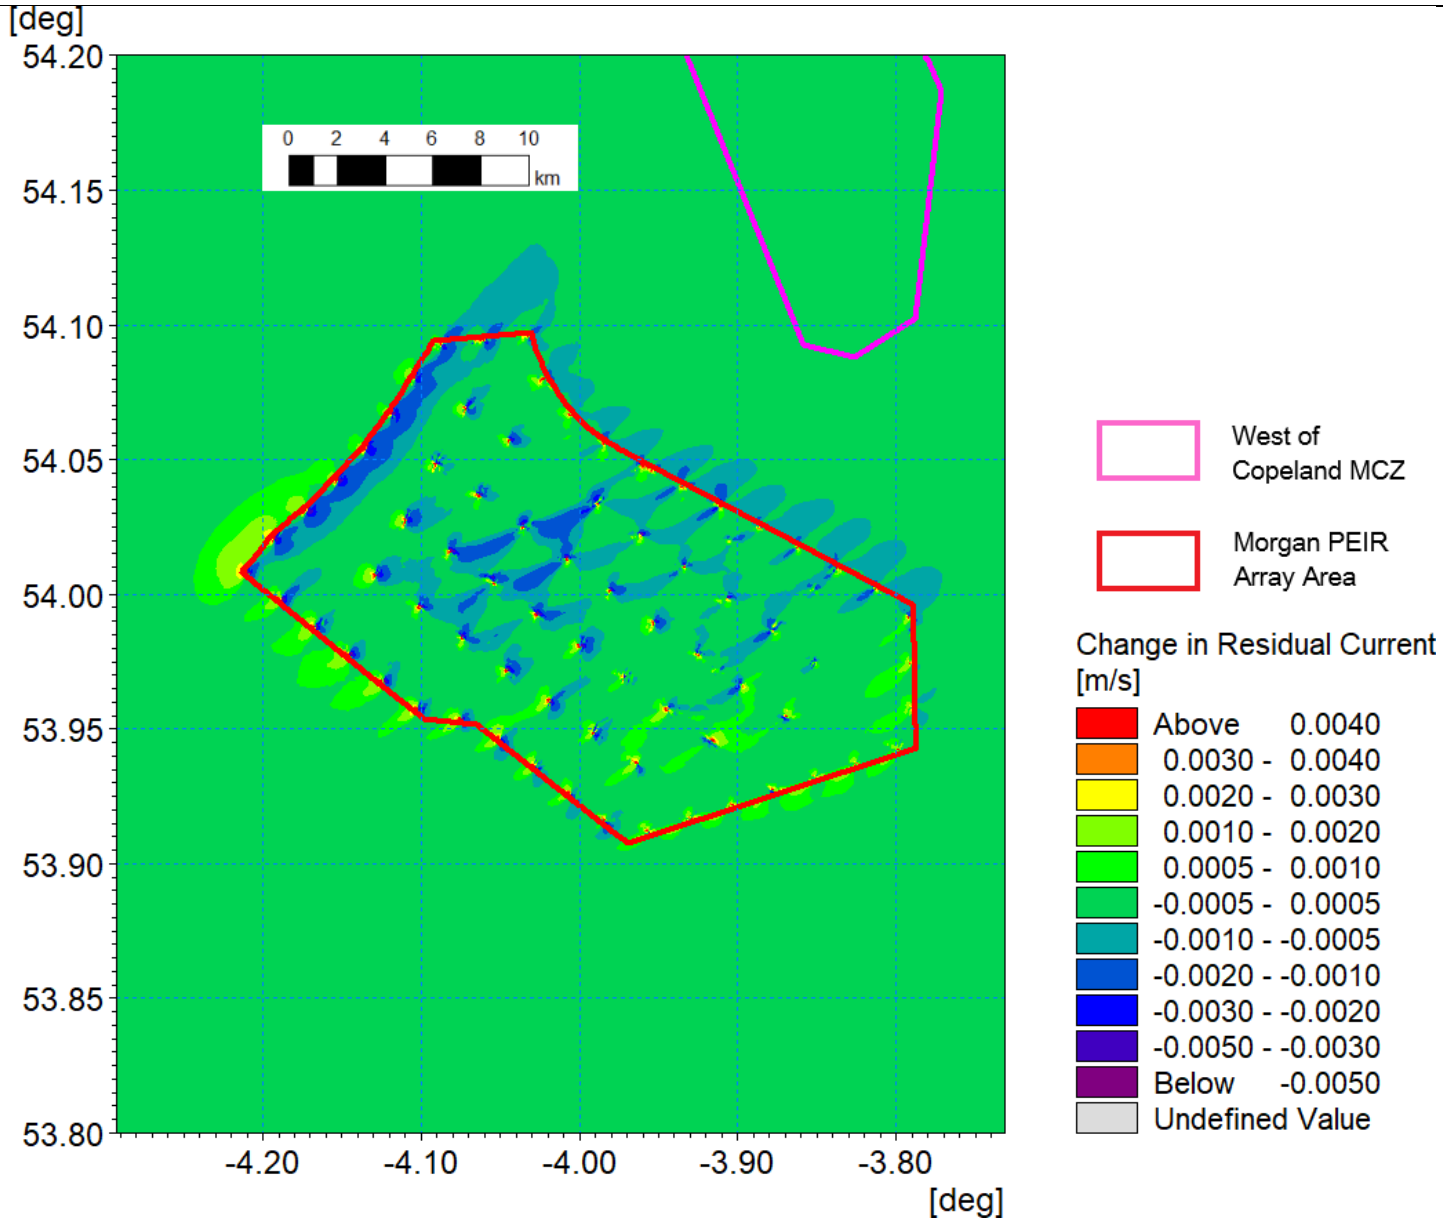


Figure 1.95: Change in residual current 1 in 1 year storm from 210° spring tide (post-construction minus baseline) detailed view.

1.3.7 Potential changes during construction (as presented in the PEIR)

- 1.3.7.1 In addition to the changes in physical process resulting from the presence of the Morgan Generation Assets infrastructure, as defined in the PEIR, the construction phase influences were quantified. The principal construction elements relate to the transport and fate of sediment brought into suspension due to seabed preparation, the installation of the foundation structures and the laying of inter-array and interconnector cables between the wind turbines and OSPs. An overview of the modelling techniques implemented is provide in Table 1.1.
- 1.3.7.2 As with the post-construction aspects, the approach was to examine the construction technique which represents the MDS in terms of coastal processes. In practice, these changes are therefore likely to be of lesser magnitude. In each scenario the modelling examined excess SSC arising from the proposed activities (i.e. ambient SSC were not included). Baseline studies outlined in section 1.3.5 indicate that turbidity levels vary greatly across the domain and throughout the year, being relatively low in deep water areas compared with active sediment transport mechanisms within the estuaries. Therefore, the excess SSC data presented would be applicable independent of the season in which the operations are undertaken.
- 1.3.7.3 The baseline residual currents and sediment transport modelling has corroborated the knowledge that the east Irish Sea is a sediment sink with active sediment transport processes. Sedimented material arising from the construction phase activities would therefore be amalgamated into the sediment transport regime. The numerical modelling provides depth averaged SSC values and do not therefore differentiate between bed load and water column suspended sediment.
- 1.3.7.4 During each phase of the assessment the transport of suspended sediment was modelled by undertaking simulations which released sediment at a rate and location appropriate to each type of construction. It is recognised that the dispersion and subsequent deposition may be affected by a range of factors including tidal phase and meteorological conditions. Significant wind and/or wave driven currents have the potential to increase the size of a sediment plume produced by seabed preparation or installation operations. However, these conditions would also inherently decrease SSC and deposition levels as a direct consequence of increased dispersion. It is noted that during adverse weather background turbidity levels would be increased and it is also unlikely that marine based works would be undertaken for operational safety reasons. The modelling of sediment release was therefore undertaken under tide only conditions using a variety of tidal ranges to provide an indication of potential SSC and deposition levels.
- 1.3.7.5 The sediment released for each of the modelled scenarios was defined according to the characteristics derived from the BGS datasets, by examining the available data and mapping of seabed sediment type at each of the modelled locations. The sediment sample locations for which detailed sediment grading information was available from BGS are presented in Figure 1.56. For simulation of sediment mobilisation along dredging paths a representative sediment grading was applied.

Seabed preparation

- 1.3.7.6 Due to the nature of the seabed in the Morgan Potential Array Area, the cable installation is likely to require seabed preparation in the form of seabed features clearance. The project description for PEIR indicated that sand waves may be cleared for the inter-array and interconnector cabling along up to a 104 m wide corridor.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Clearance activities may extend along 50% of the inter-array cable route and 60% of interconnector route with an average clearance depth up to 5.1 m.

1.3.7.7 The modelling undertaken to quantify the potential increases in suspended sediment concentration and sedimentation simulated the use of a suction hopper dredger to undertake sand wave clearance. Material from sandwave crests would be side-cast and therefore be available for sandwave reformation and to provide additional coverage for cables in trough areas following redistribution of the mobilised material. In practice plough dredging may be undertaken however this type of operation would have less impact in terms of both suspended sediment concentrations and sedimentation footprint as material is moved across the seabed rather than bringing it fully into suspension, making it a more conservative approach.

1.3.7.8 A representative clearance operation was assessed for the inter-array cables which has the same characteristics as clearance for the inter-connector cables. The geophysical survey data was used to identify areas of sandwaves where the operations are most likely to be required. Figure 1.96 indicates the sand areas by yellow shading and the clearance route modelled is specified in green. The clearance was undertaken in a north to south direction with a dredging rate of 10,000 m³/h with a spill of 3%.

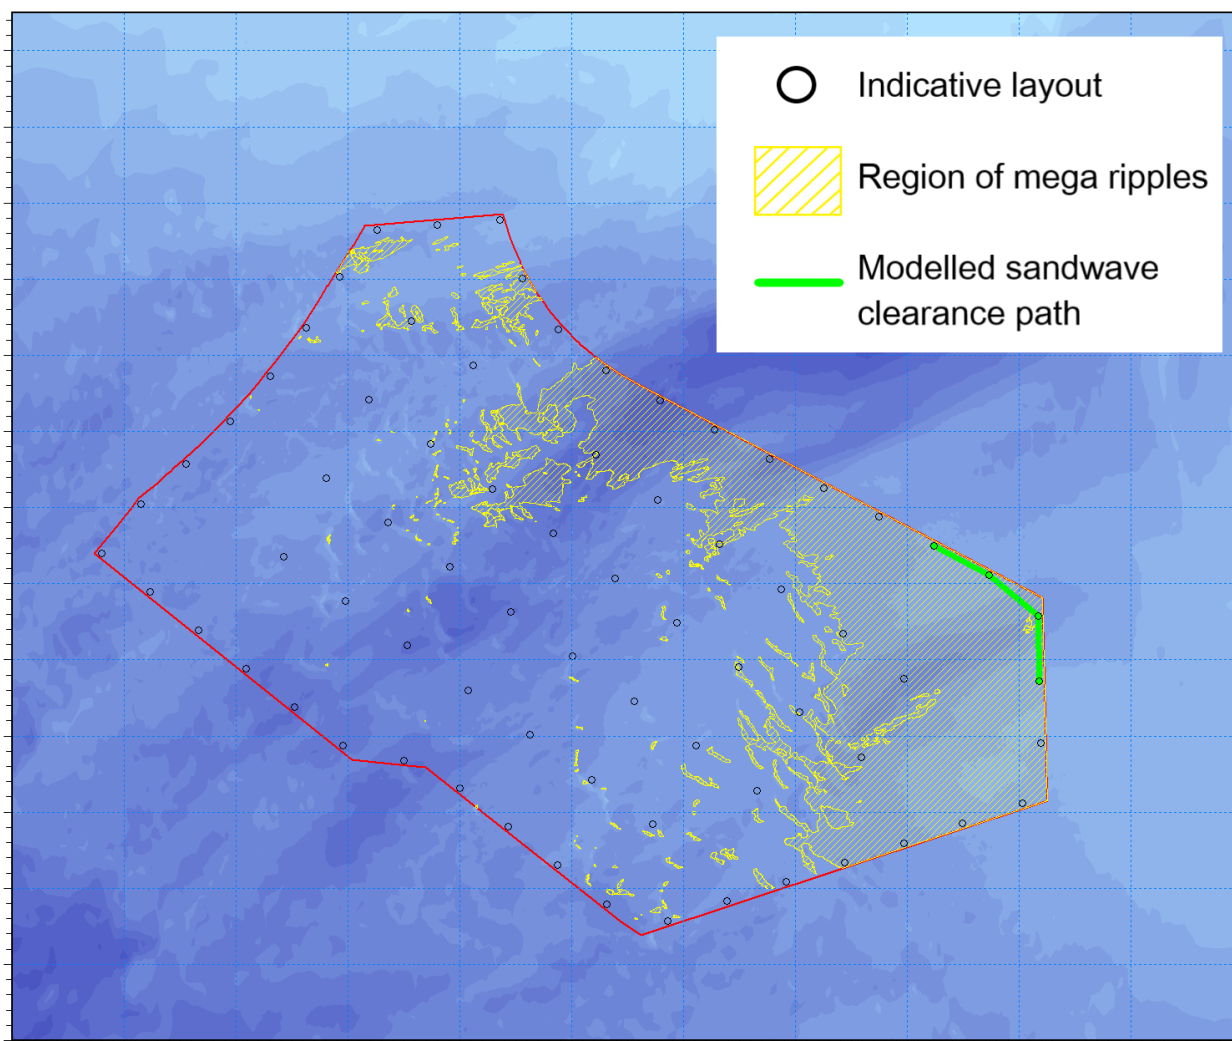


Figure 1.96: Sand wave clearance path modelled for PEIR.

Inter-array cable sandwave clearance

- 1.3.7.9 The inter-array cable route was cleared at 100 m/h along the 104 m wide route for a period of four hours, in line with the dredging rate and removal depth. The material was then deposited over a 45 minute period from the hopper with the 5.6 km modelled route taking just over two days to prepare with mean tidal conditions. The redistributed material was classified using the properties identified from the sampling undertaken along the route simulated:
- Coarse sand: 28.6%
 - Medium sand: 0.5%
 - Fine sand: 6.1%
 - Very fine sand: 60.2%
 - Mud: 4.6%.
- 1.3.7.10 The suspended sediment concentrations vary greatly during the course of the operation. During the dredging phase, when 3% of the material is spilled at the seabed, the sediment plumes exhibit much lower concentrations. These are typically <50 mg/l along the clearance route as shown in Figure 1.97. Similarly, the release phase plume extent is slightly larger than the dredging plume with concentrations reaching 3000 mg/l at the dumping site, Figure 1.98. At this site the greatest area of increased SSC, extending a tidal excursion circa 20 km from the site, is also associated with re-mobilisation of the deposited material on subsequent tides with concentrations of 500 mg/l to 1000 mg/l whilst average levels <500 mg/l as illustrated in Figure 1.99 and Figure 1.100 respectively.
- 1.3.7.11 The average sedimentation depth, shown in Figure 1.101 and in detail in Figure 1.102, is up to 0.5 mm. The sedimentation one day following the cessation of the clearance operation is presented in Figure 1.103 and Figure 1.104 and shows deposited material at the site of release with depth 0.3 mm whilst in the locality lower depths, typically <0.01 mm, are present at circa 100 m distance from the release with the formation of sandwaves being visible.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

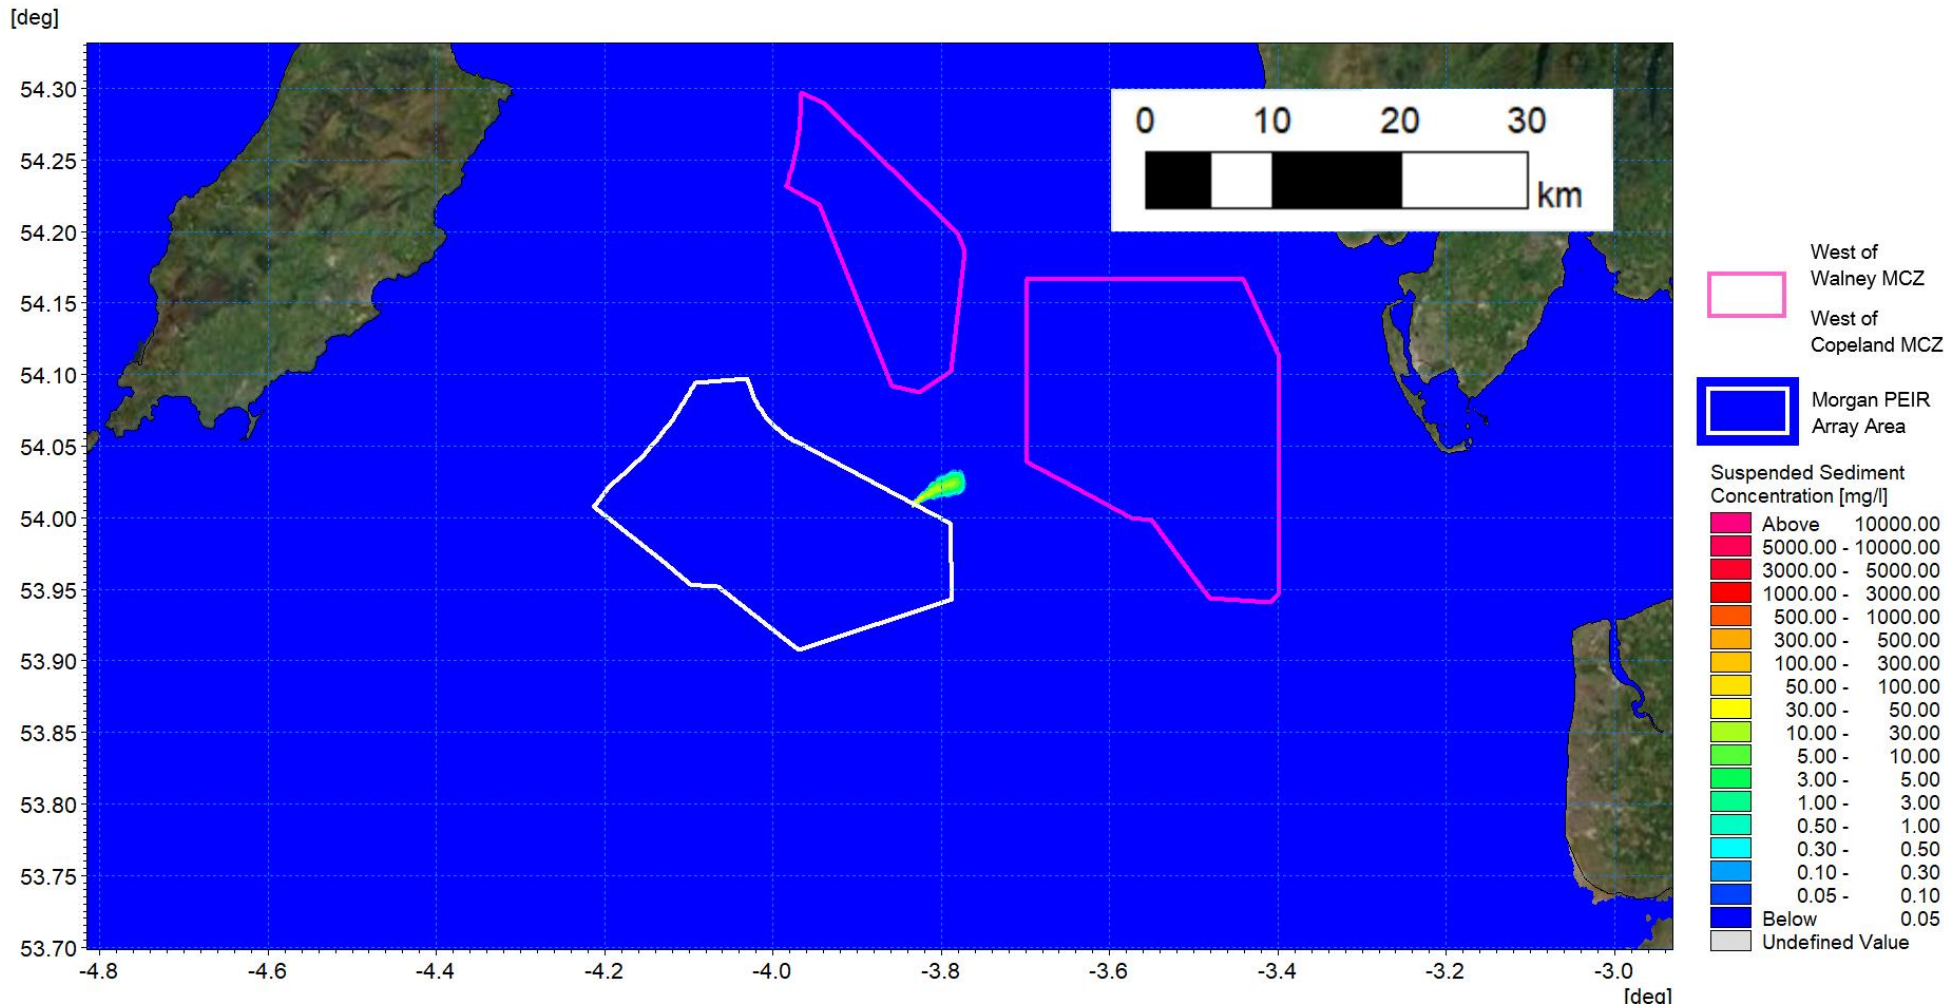


Figure 1.97: SSC during dredging phase – inter-array cable path.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

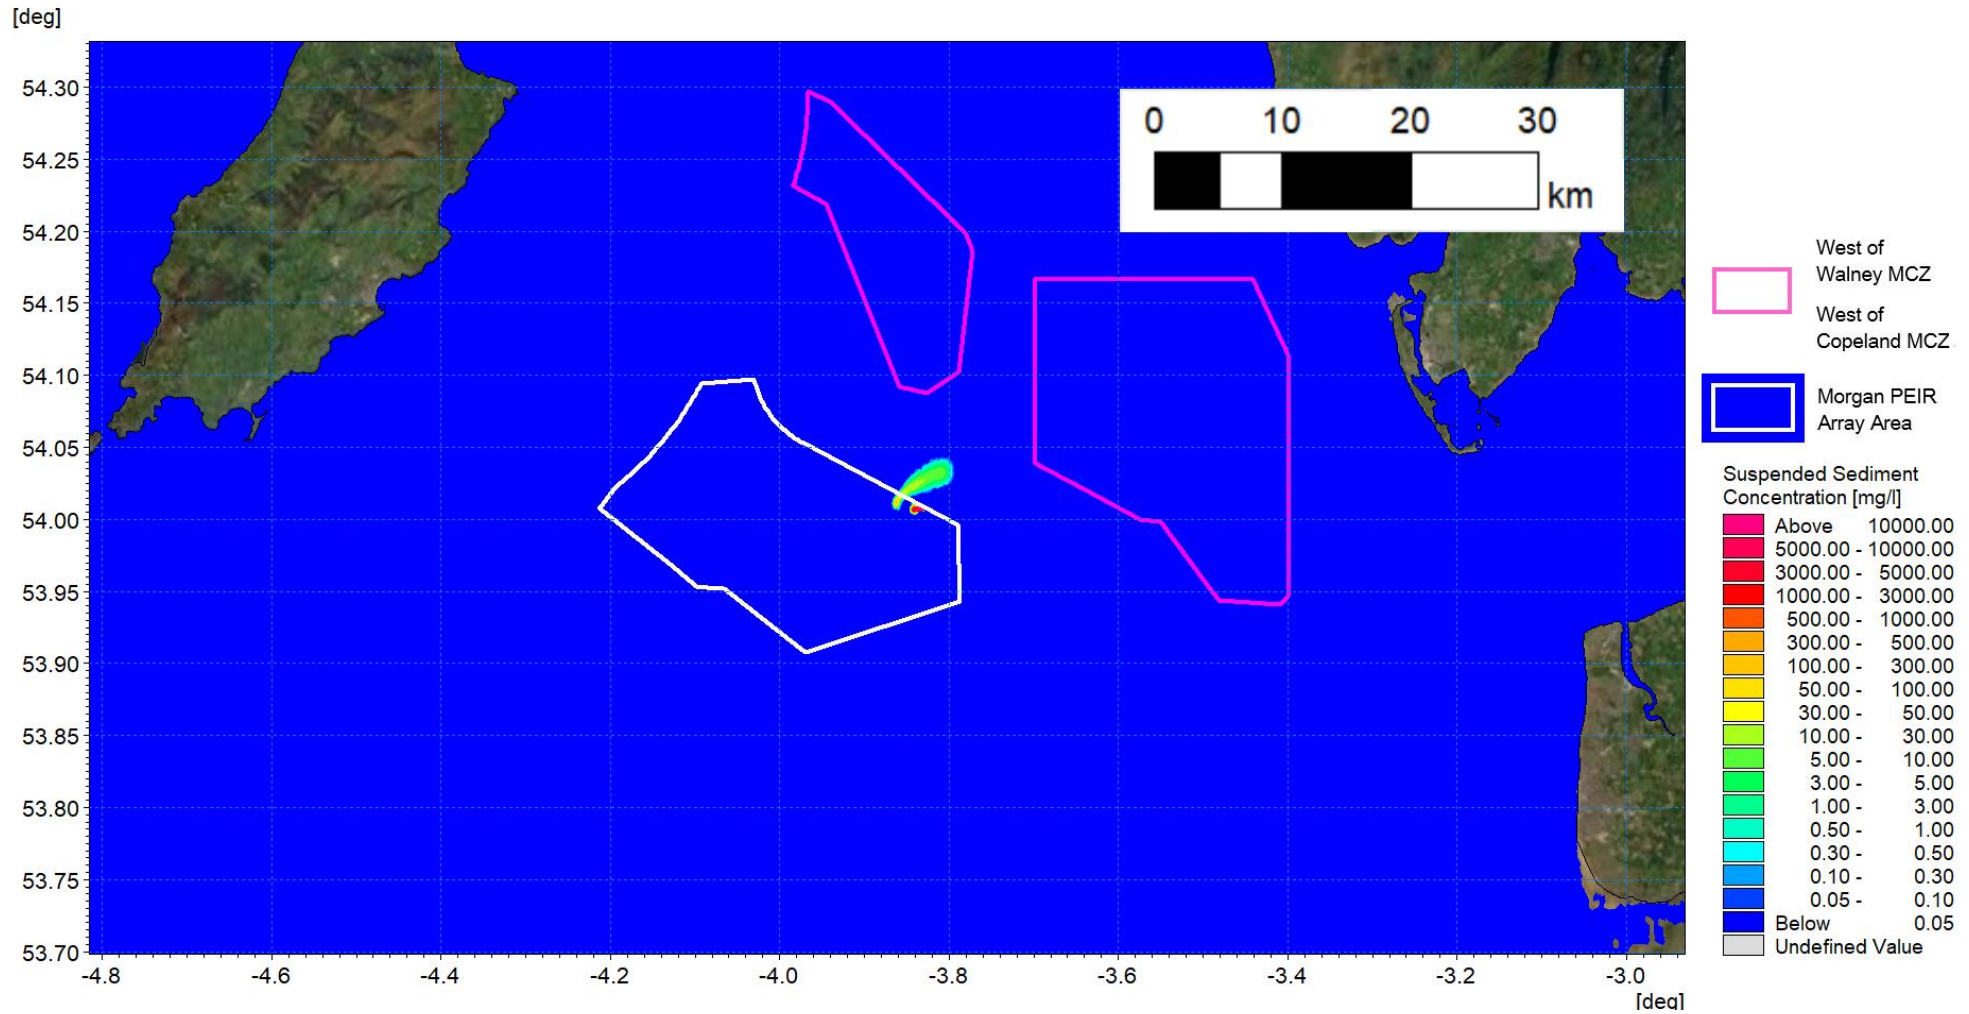


Figure 1.98: SSC during dumping phase – inter-array cable path.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

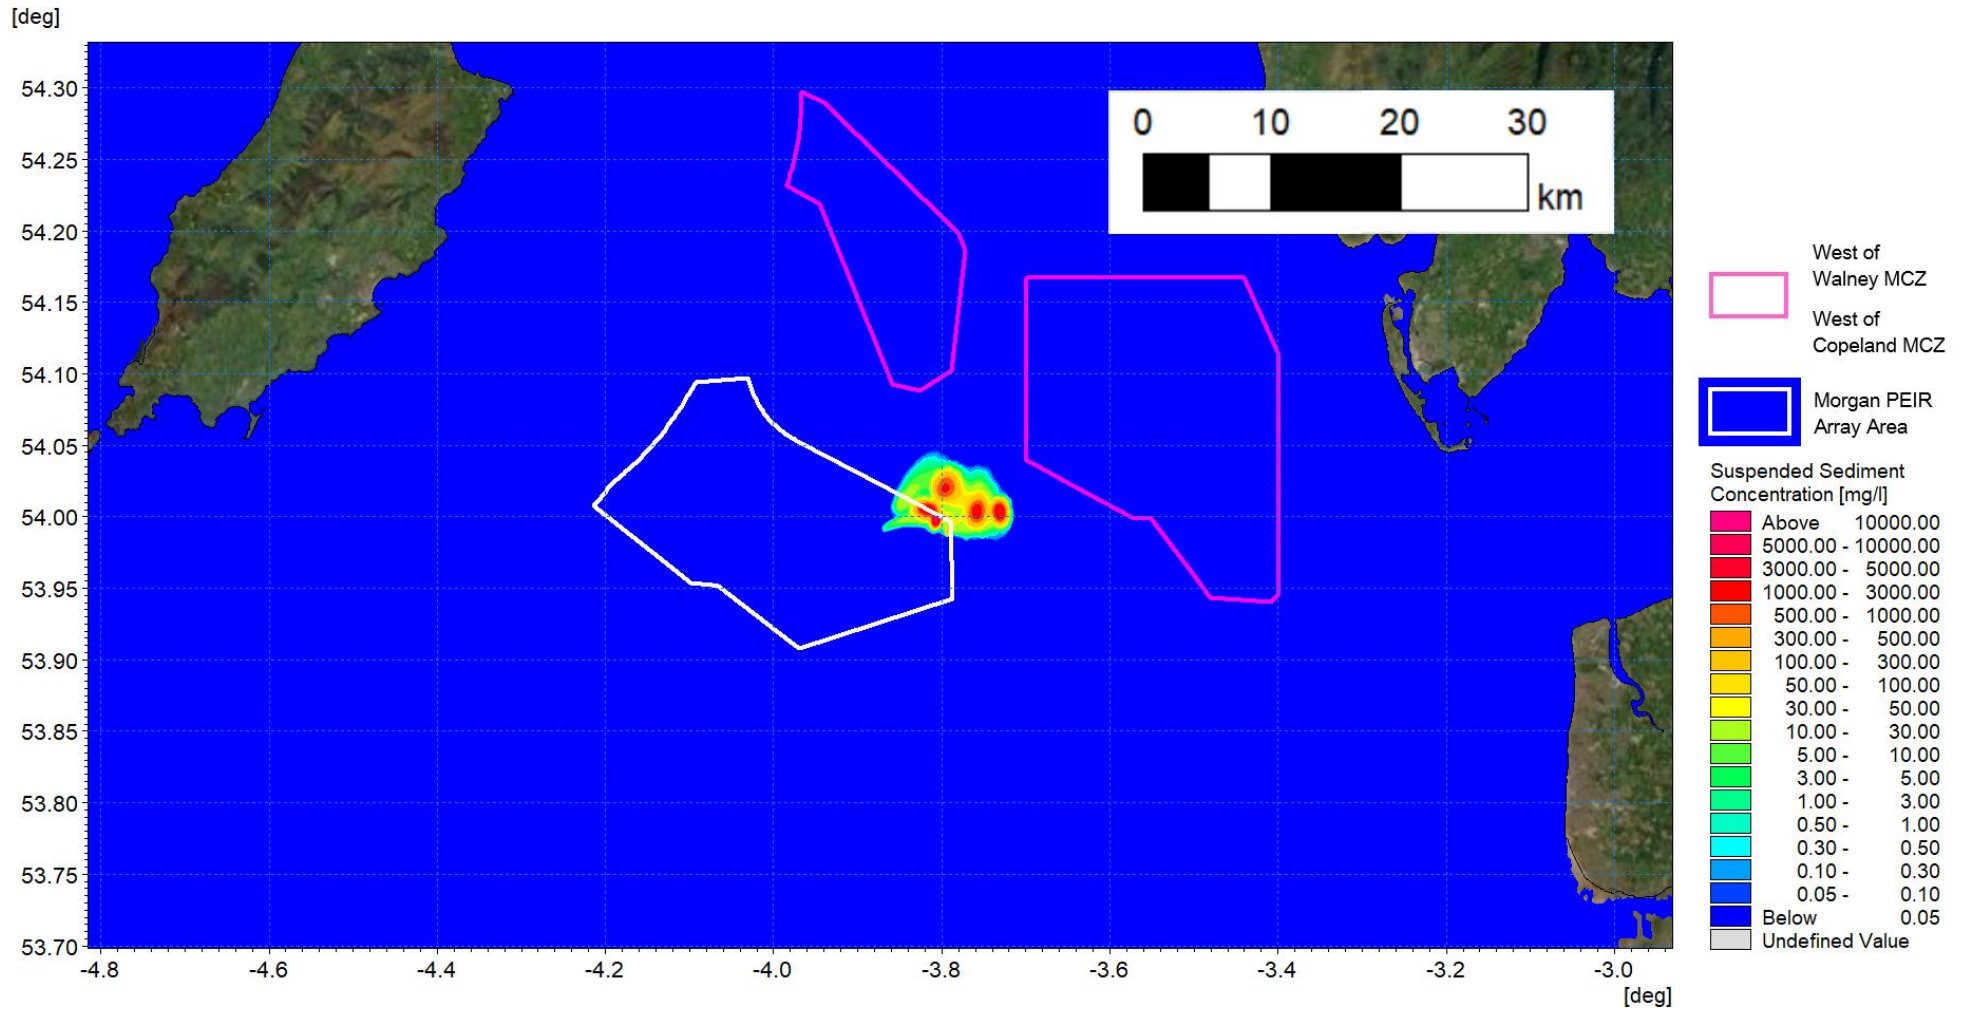


Figure 1.99: SSC with sediment re-mobilisation – inter-array cable path.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

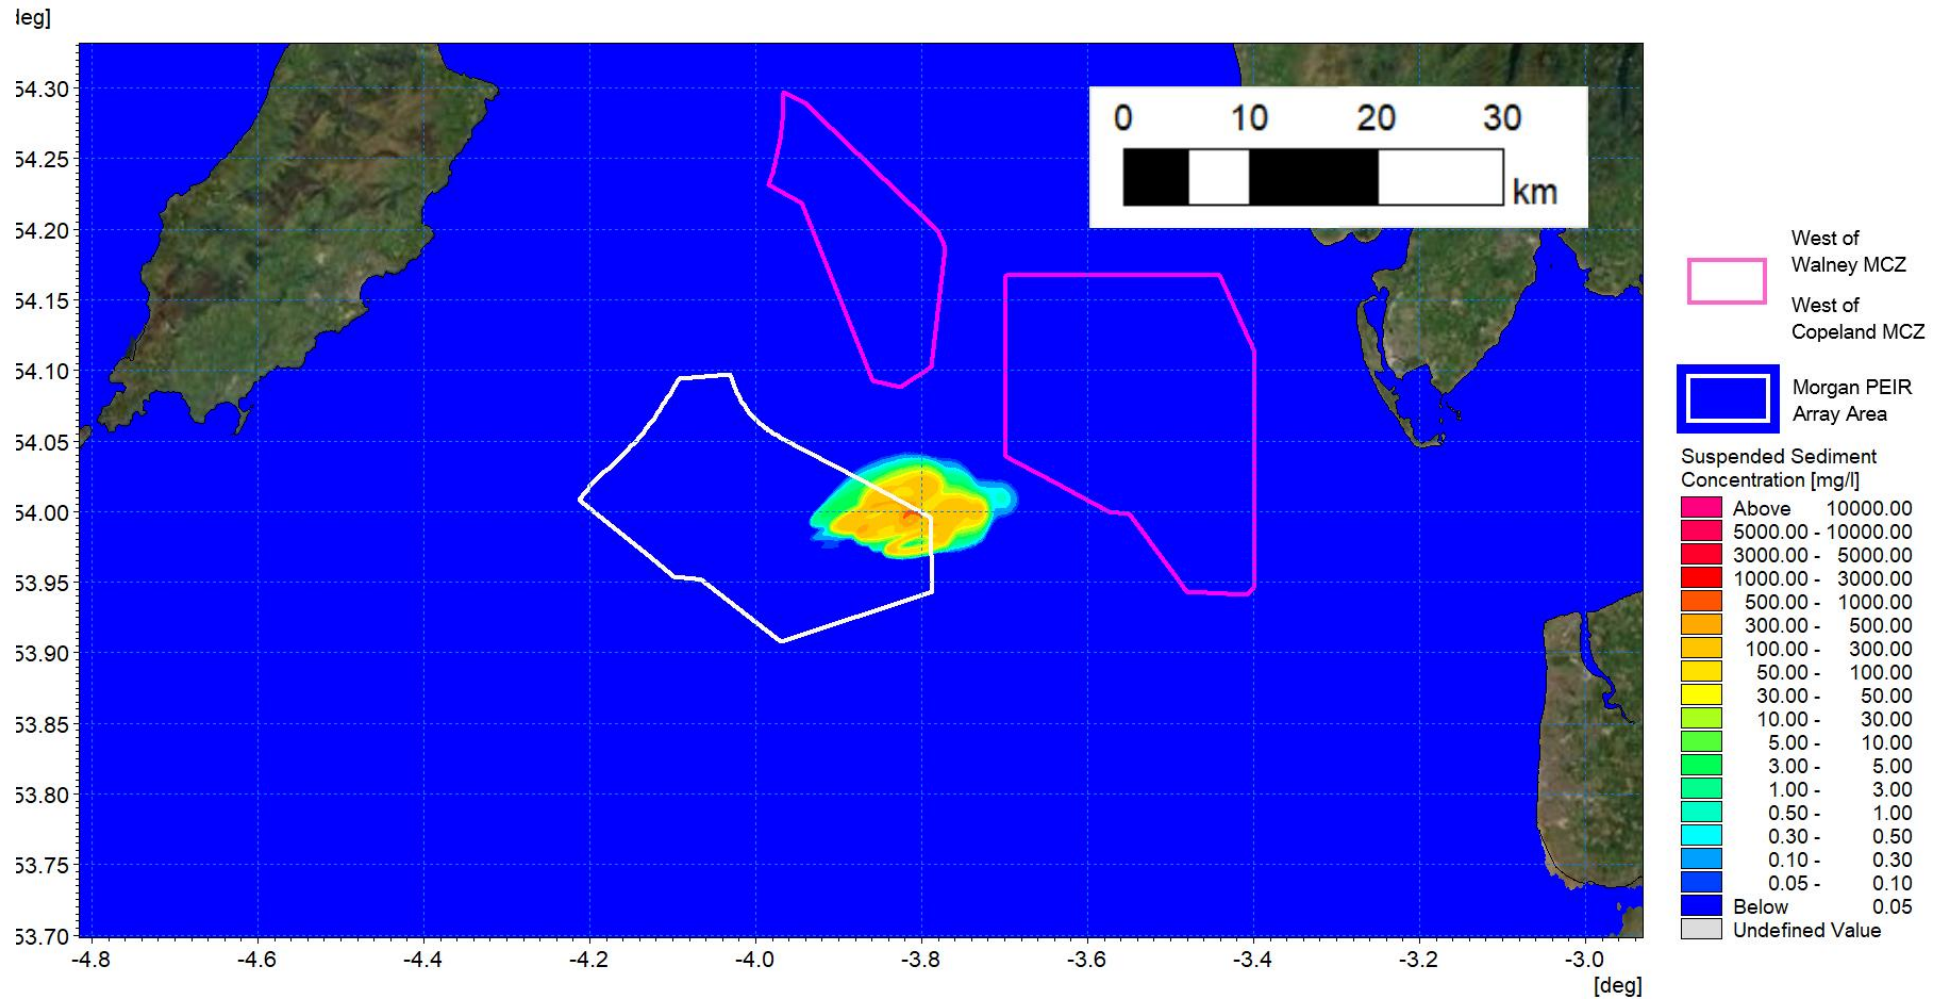


Figure 1.100: Average SSC during operation – inter-array cable path.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

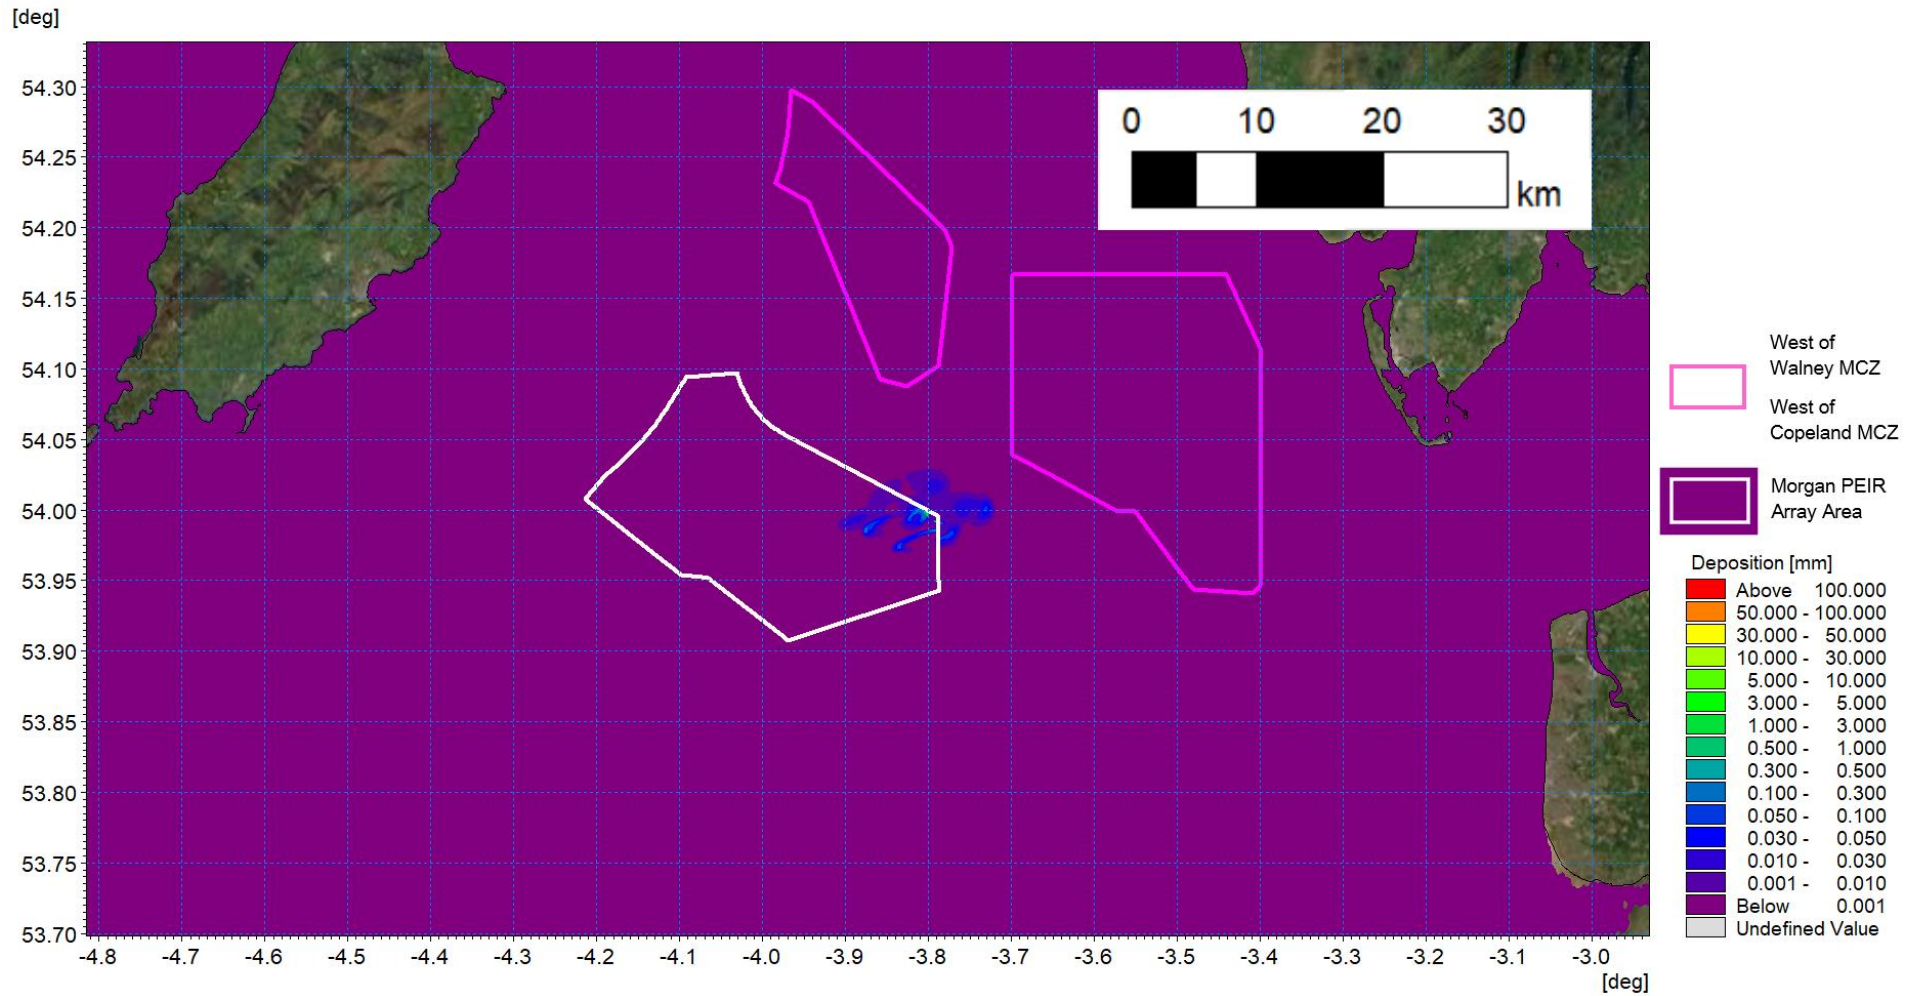


Figure 1.101: Average sedimentation during operation – inter-array cable path.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

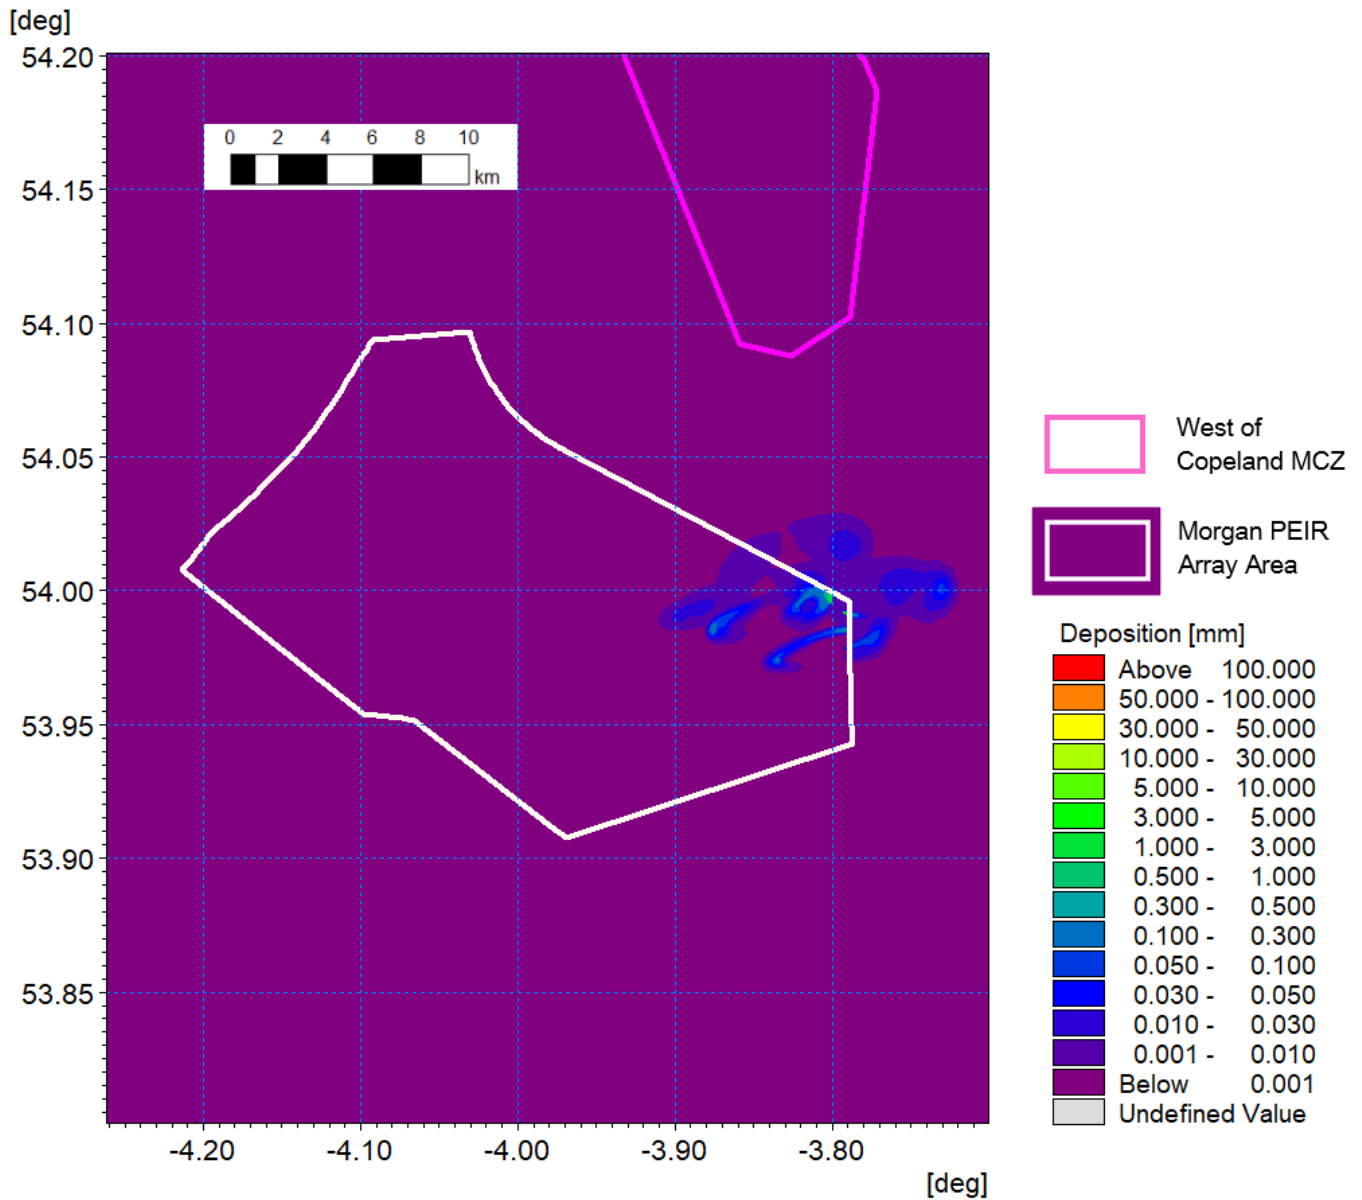


Figure 1.102: Average sedimentation during operation – inter-array cable path detailed view.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

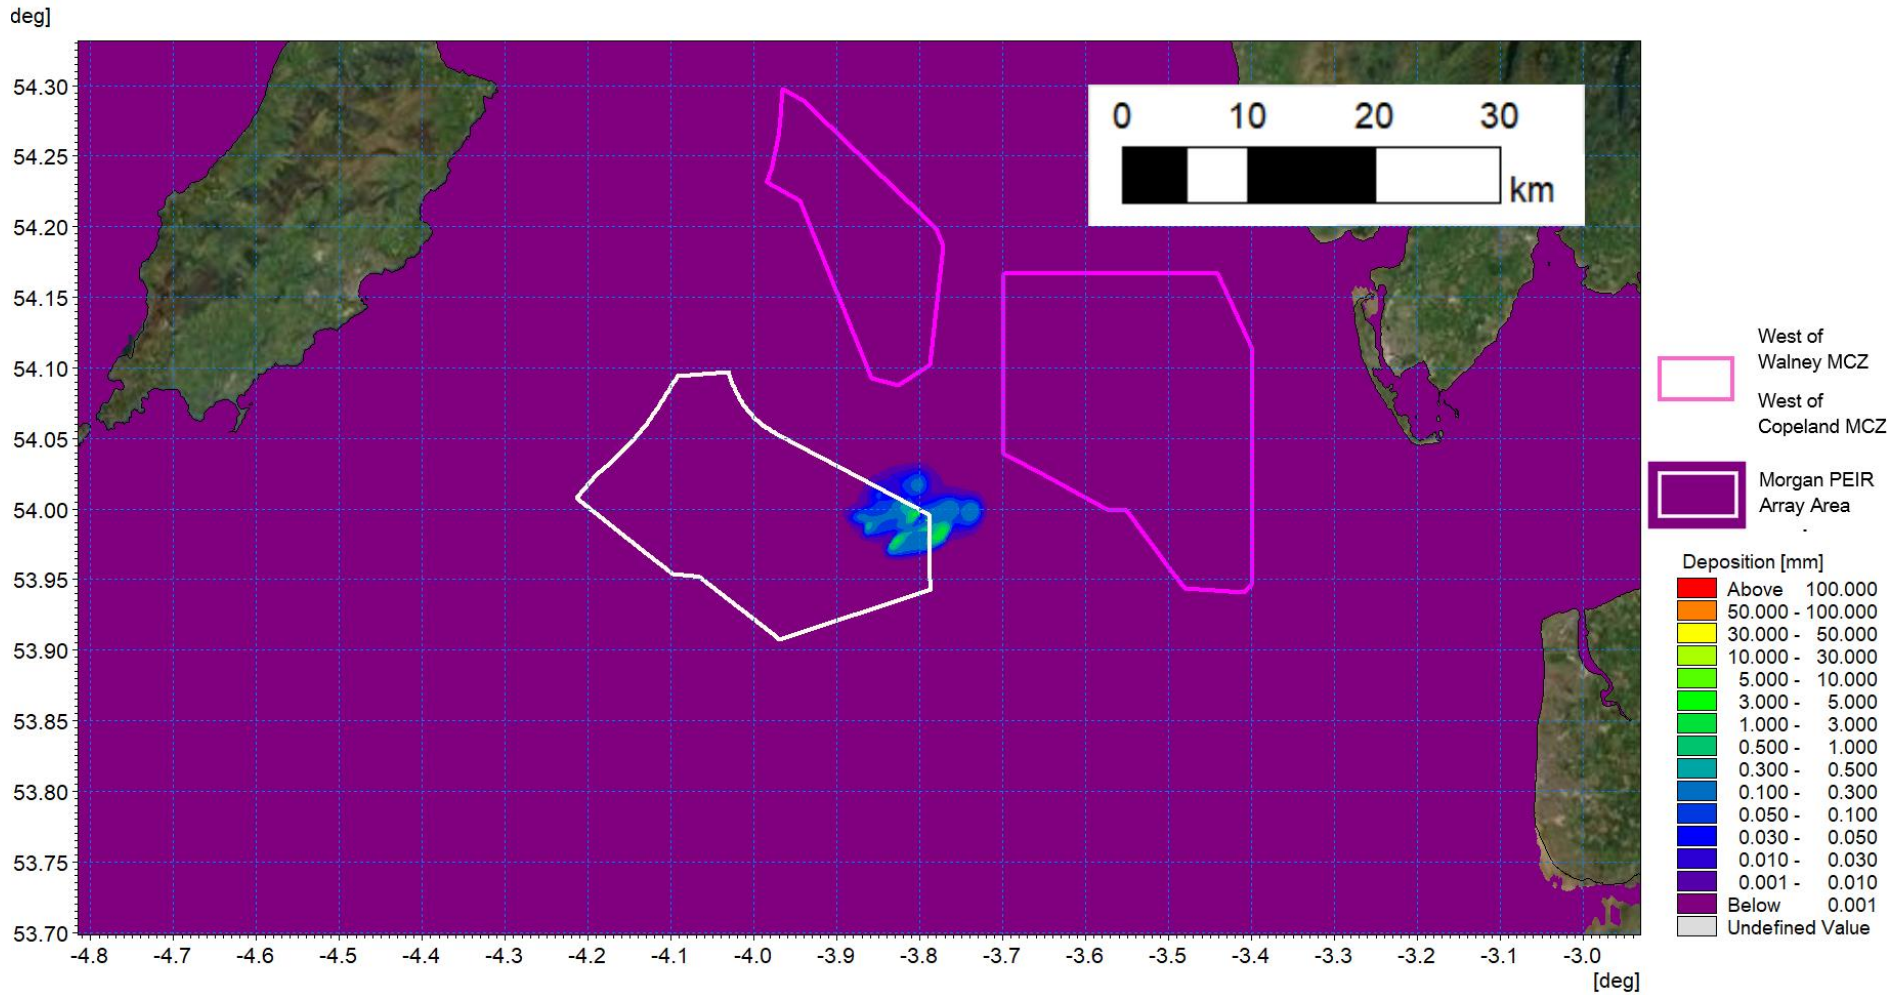


Figure 1.103: Sedimentation one day following cessation of operation – inter-array cable path.

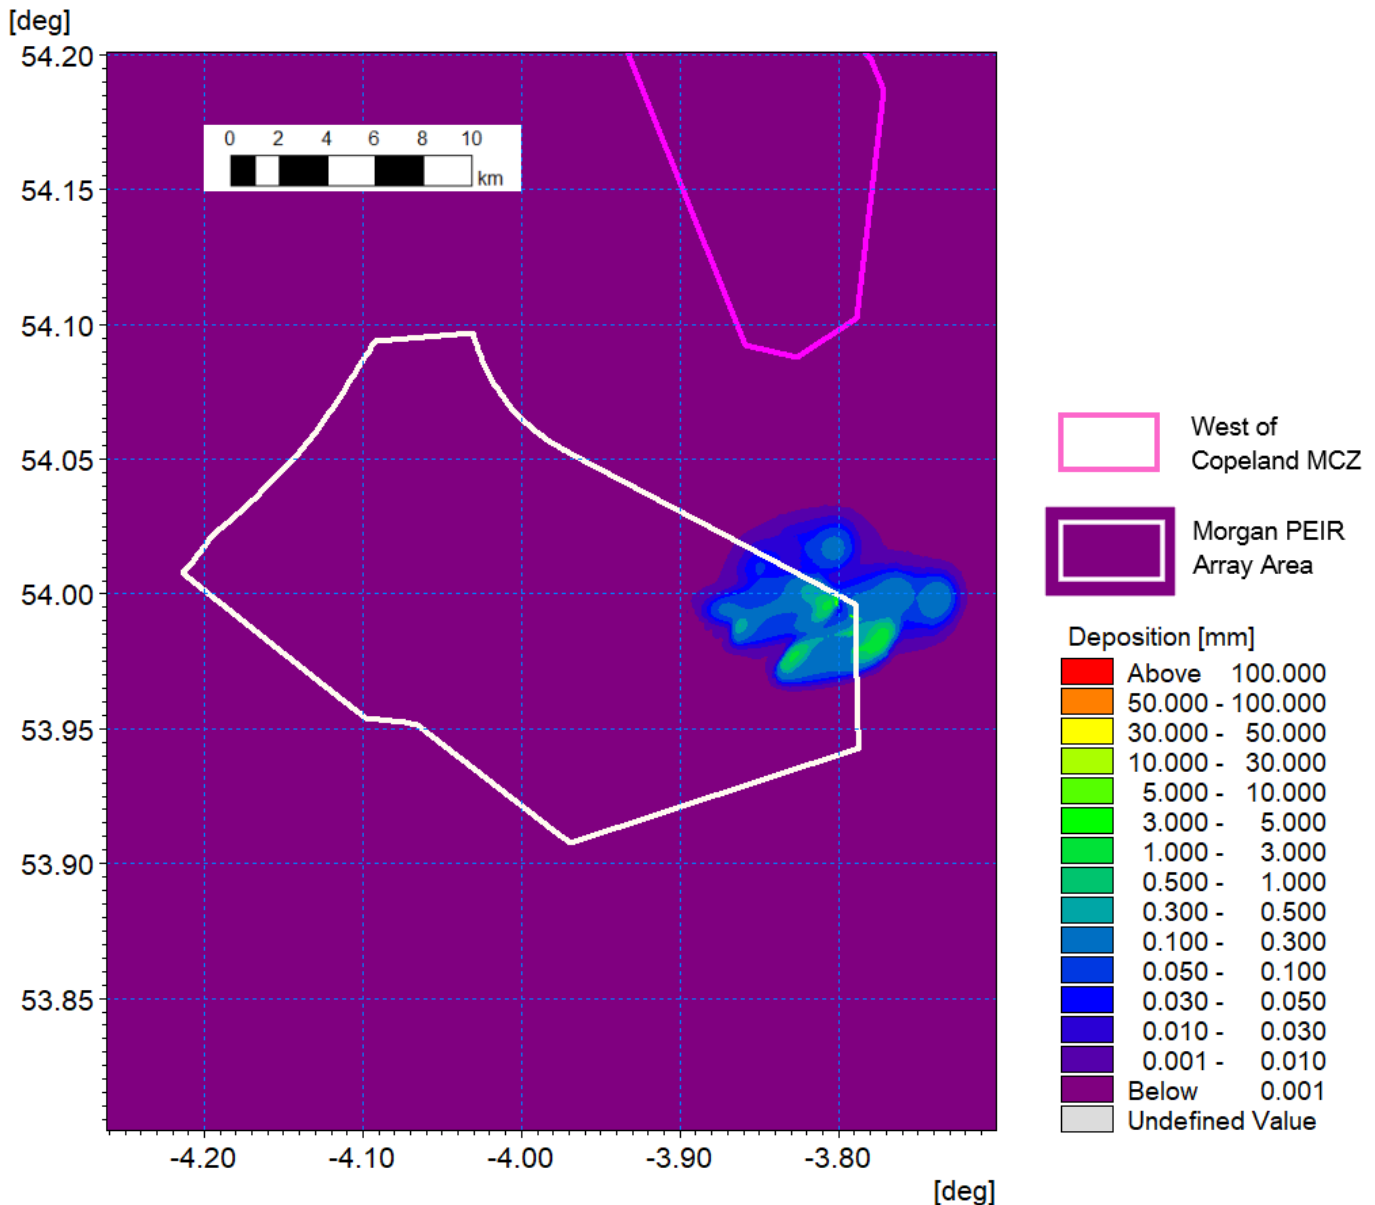


Figure 1.104: Sedimentation one day following cessation of operation – inter-array cable path detail view.

Foundation installation

1.3.7.12 The Project Design Envelope (PDE) for the PEIR included a number of potential foundation types including piled and suction caissons foundations. The caissons were applied in the hydrographic assessments as they created the largest potential obstruction to tidal flow and sediment transport however the installation produces much less seabed disturbance than installation of piled foundations. Therefore, the piled structures were assessed in terms of potential increases in suspended sediment concentrations.

1.3.7.13 The PDE presented in the PEIR included monopile foundations, however these have since been removed from the project description (see Volume 1, Chapter 3: Project description of the Environmental Statement). As monopiles formed the maximum design scenario for the modelling of increases in suspended sediment concentrations undertaken and presented in the PEIR, the results of this modelling is presented below

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

to inform the conclusions made in the Environmental Statement. The modelling of the larger monopile installation encompassed the release of a greater volume of material than is now considered within the Environment Statement parameters and therefore the modelling outcomes add further conservatism and over-estimate the potential impacts.

- 1.3.7.14 The largest potential release would be from augured (drilled) piles, where the material would be jetted and released to the water column as a plume. It was anticipated that all piles across the site may require drilling up to the full pile depth. The modelling assumed that at each site the material which is released has a similar composition to the sampled sediment. In reality, to require drilling (rather than driving) the sediments are generally less granular and augured material would be less easily brought into suspension therefore the modelled scenario provides a conservative assessment in terms of suspended sediment concentration.
- 1.3.7.15 A sample of three representative pile installation scenarios were simulated to cover the range of conditions in terms of water depth, tidal currents and sediment grading. It also took account of the proximity of piling where two concurrent events may take place. The modelling was undertaken using the MIKE MT module which allows the modelling of erosion, transport and deposition of cohesive and non-cohesive/granular sediments. This model is suited to sediment releases in the water column and allows sediment sources which may vary spatially and temporally. In this case, the cohesive functions were not utilised as the material released comprised of sand. The sediment grading was defined for each location and assumed two concurrent drilling operations located at adjacent wind turbine or offshore platform locations to provide the largest augmented sediment plume concentration.
- 1.3.7.16 At each location it was assumed that the auguring was required to the 60 m pile depth for an assumed 16 m diameter pile with 0.9 m casing as a worst-case scenario (i.e. 13,460 m³ per pile). The drilling rate was taken as 0.89 m/h which was both prescribed which was both prescribed in the project description for PEIR and also allowed the release to cover the full range of tidal conditions. The auguring was undertaken continuously over a 67 hour period with material released throughout the water column.
- 1.3.7.17 For each location a set of results are presented. Firstly, the average suspended sediment plume during the course of the installation is shown. Due to the variation in suspended sediment levels, instantaneous plots of the sediment plumes are also presented during peak flood and ebb tides on two installation days. It should be noted that all the plots require the use of a log scale to cover this range of values whilst providing clarity and during slack water suspended sediment concentrations decrease significantly to values in the order of background levels.
- 1.3.7.18 The final set of plots relates to sedimentation. Due to the fine sandy nature of the material, it is clear that the sediment will be dispersed. It will be transported mid-tide, settle on slack water and be re-suspended and further dispersed on the resumption of tidal flow. For all simulations, sediment levels after the cessation of construction are presented, using the same contour palette for both the wider extent and detailed figures. The piling activities do not remove any material from the immediate vicinity of the site and the released material returns the native sediment back into the existing sediment transport regime.

Piling scenario A

- 1.3.7.19 The two piles locations are illustrated in Figure 1.105. They are located on the northwest boundary of the Morgan Potential Array Area. The sediment release was modelled over successive neap tidal cycles and at the location coarser material is present with the following composition being implemented within the simulation:
- Gravel: 17%
 - Coarse sand: 10.6%
 - Medium sand: 63.8%
 - Fine sand: 5.2%
 - Very fine sand: 3.4%.
- 1.3.7.20 This location exhibits slightly coarser graded material than at other locations and current speeds are lower during neap tides therefore this presents a scenario with a reduced plume envelope and higher SSC for the range of potential operations. The average suspended sediment plot shown in Figure 1.106 illustrates the effect of the dominant flood tide with the plume envelope extending further to the east. Average concentrations are typically <30 mg/l at the sites and reduce rapidly with distance from the two discharge locations. Where the plumes converge concentrations are <1 mg/l.
- 1.3.7.21 Figure 1.107 and Figure 1.108 illustrate the instantaneous concentrations on the flood and ebb tide of the first day of the drilling whilst Figure 1.109 and Figure 1.110 correspond with the same information for the third day. Areas of increased suspended sediment are evident on the latter plots where material has been deposited on slack tide and subsequently re-suspended. Typically, the plume concentration is <50 mg/l, and reduces with the distance from the site as the sediment is dispersed.
- 1.3.7.22 Figure 1.111 and Figure 1.112 show the average sedimentation, with the latter providing a more detailed view. It is evident that sedimentation depths are particularly low with sedimentation values of <0.1 mm. This corresponds with the immediate settlement of coarser material fractions, the lower neap current speed and also for the portion of work undertaken on slack tide. Figure 1.113 and Figure 1.114 present sedimentation one day following cessation of the drilling operation. The resulting sedimentation depths are typically <0.1 mm one day following the end of drilling demonstrates that the settlement of sediment would be imperceptible to background sediment transport activity.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

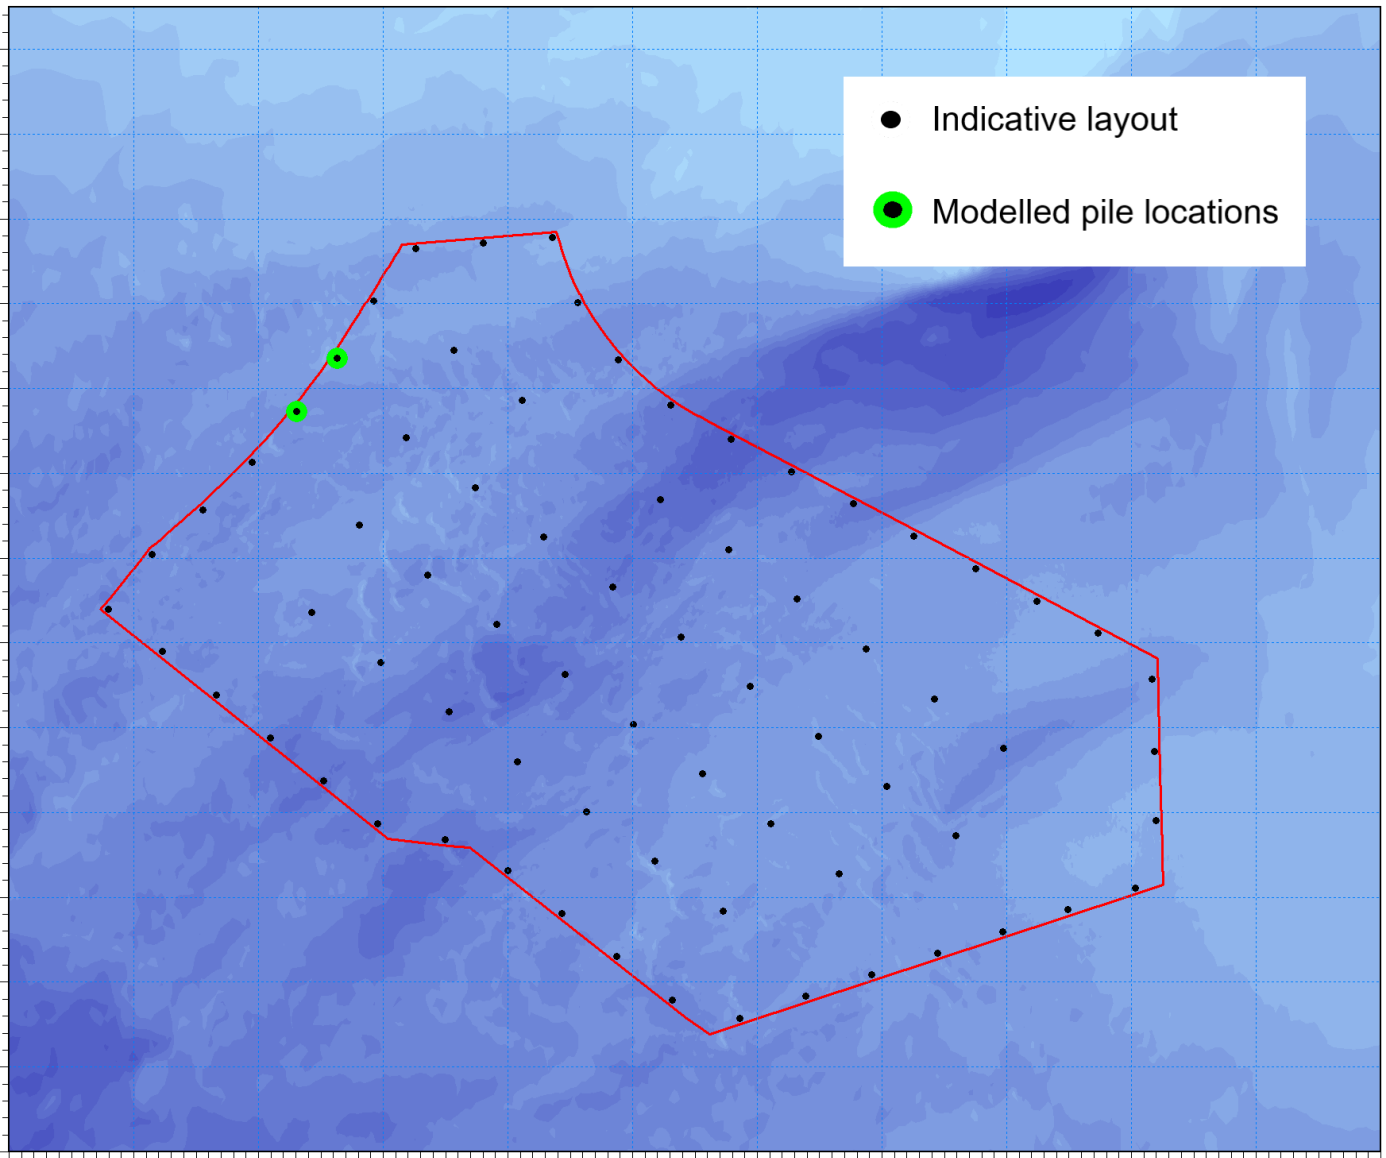


Figure 1.105: Location of modelled piled installation for piling – PEIR scenario A.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

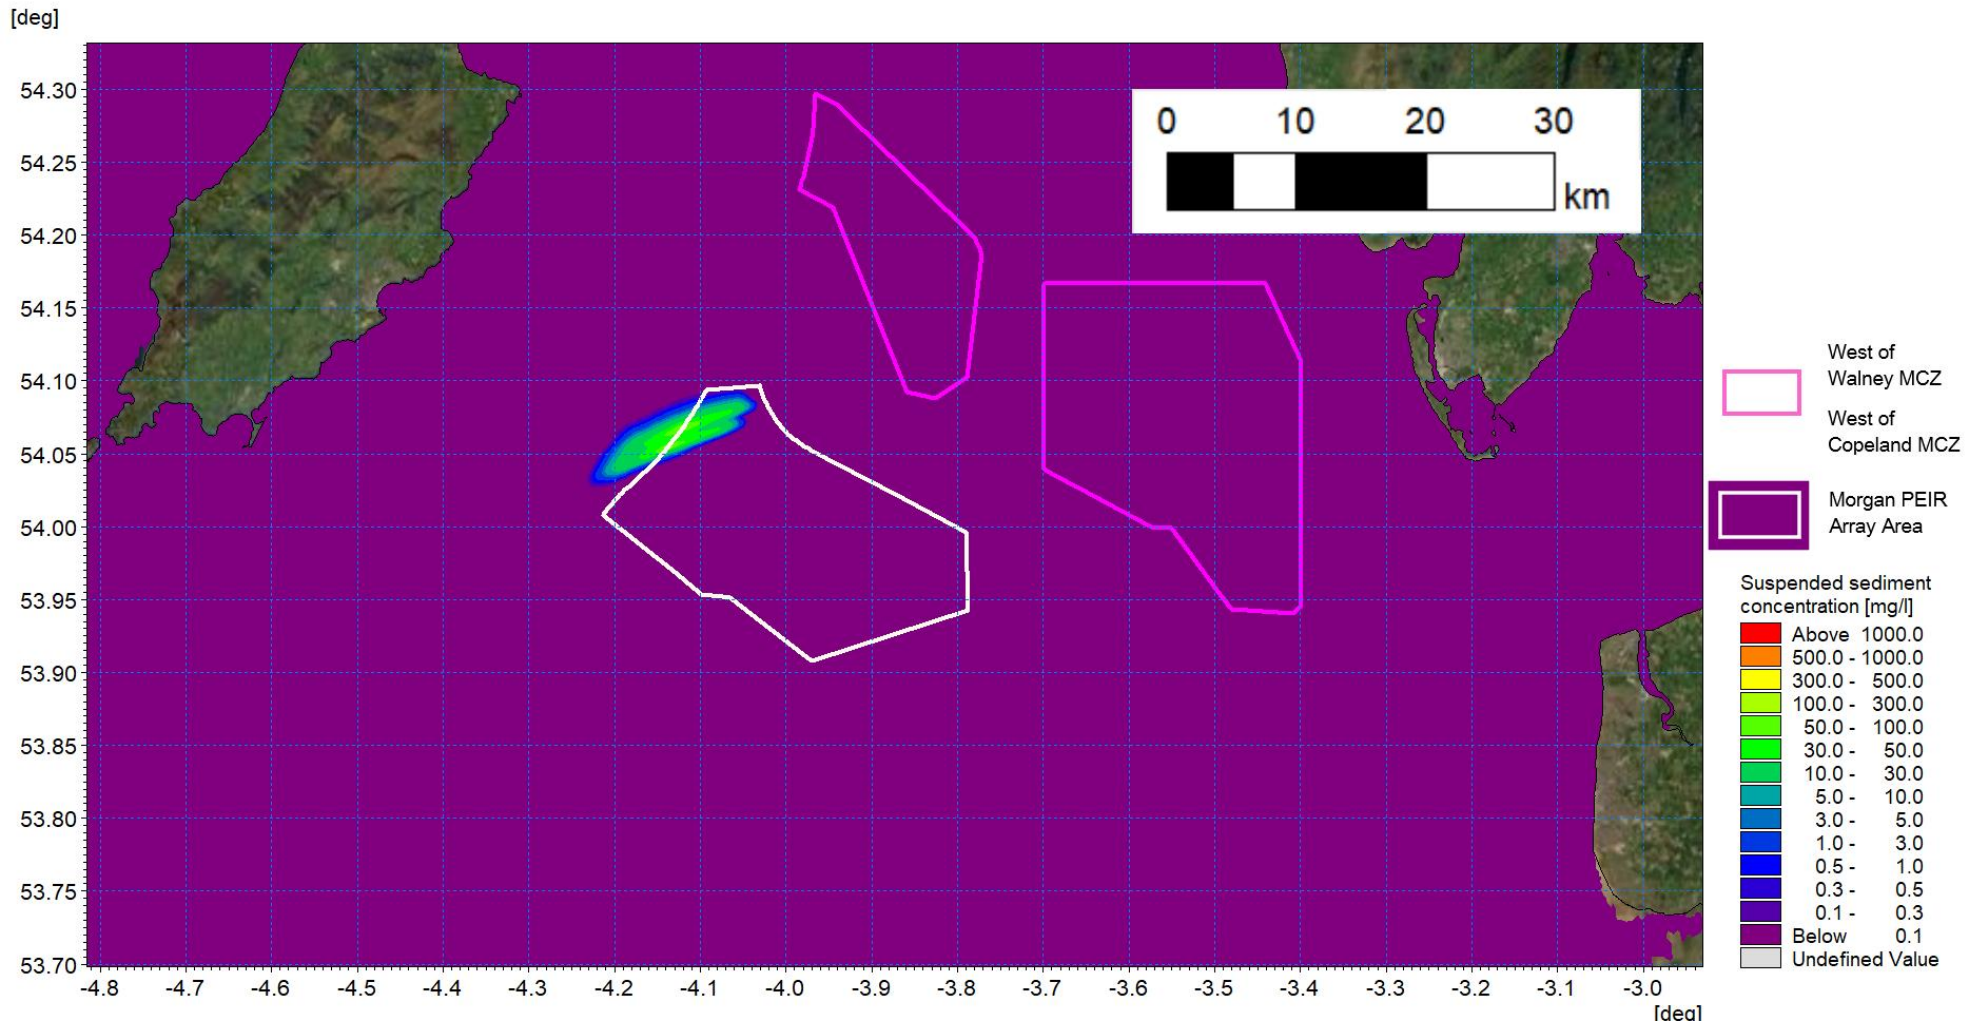


Figure 1.106: Average SSC – pile installation scenario A.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

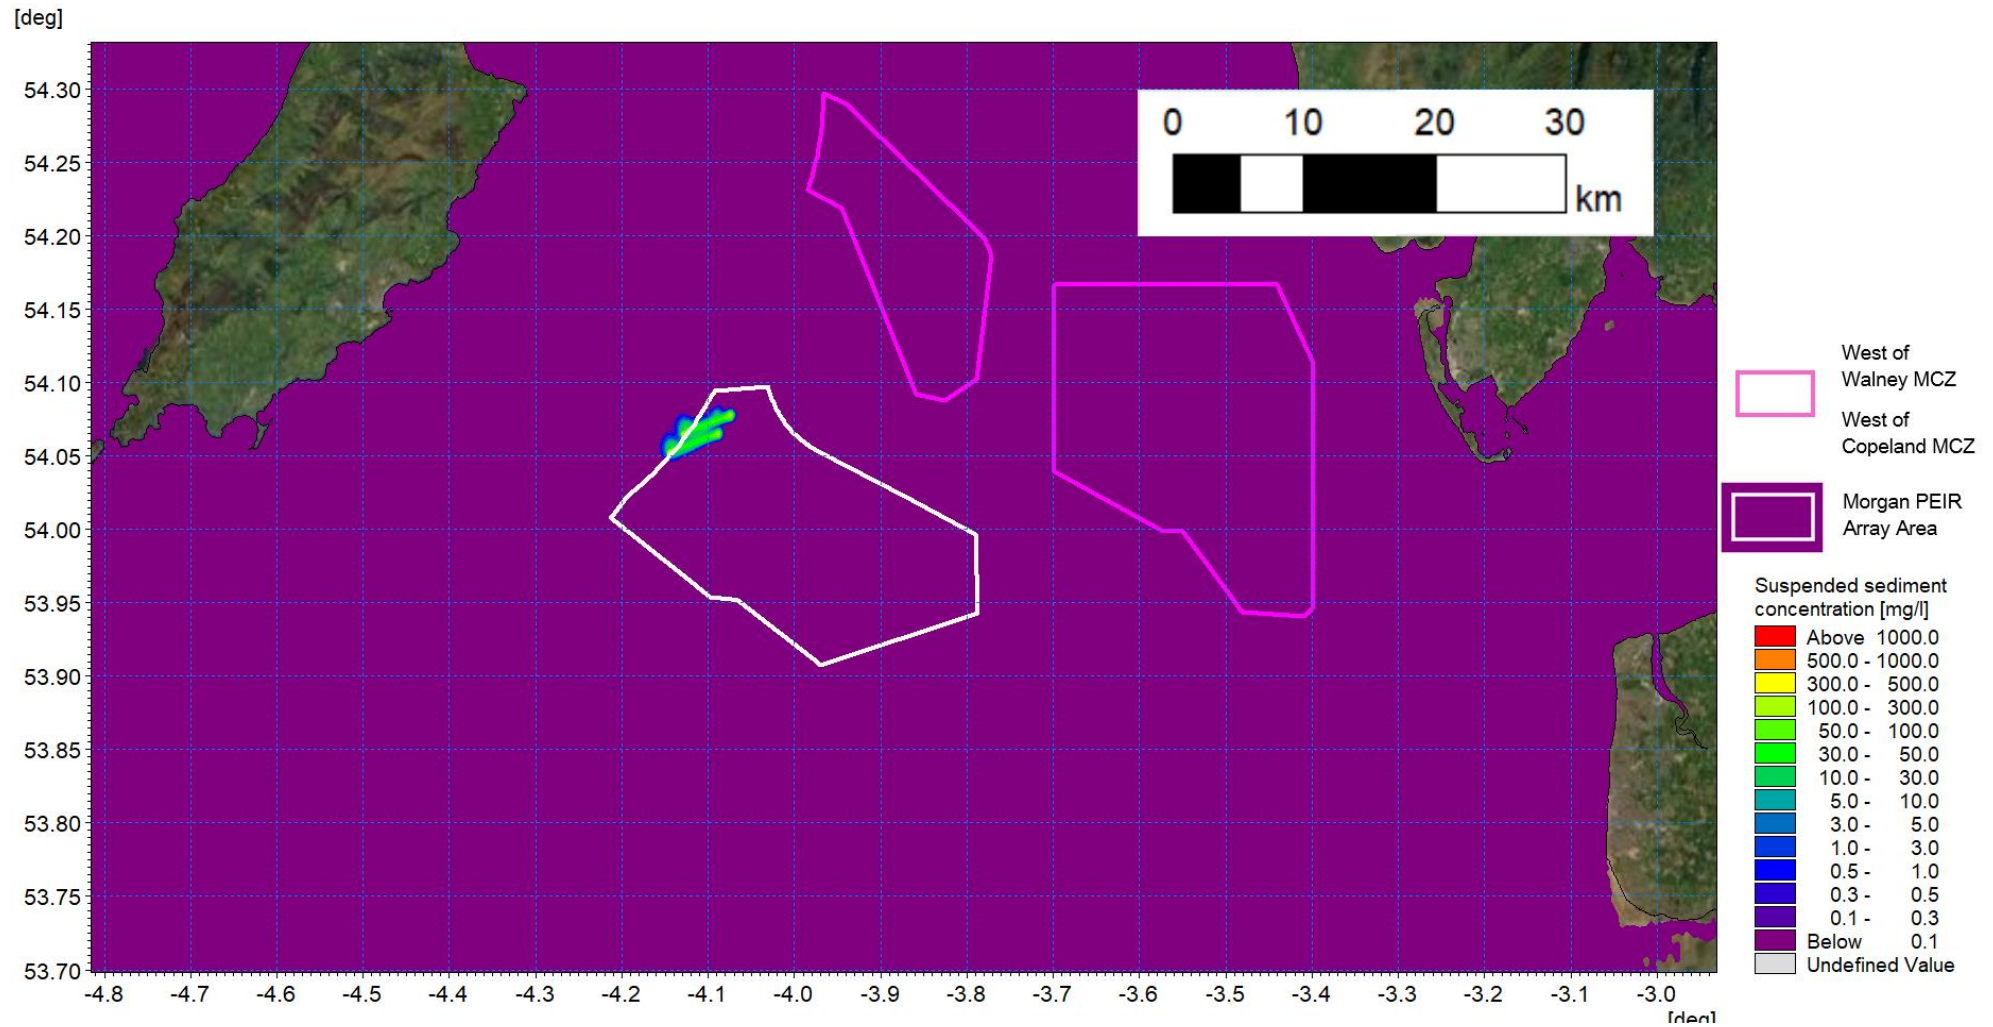


Figure 1.107: SSC day one flood - pile installation scenario A.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

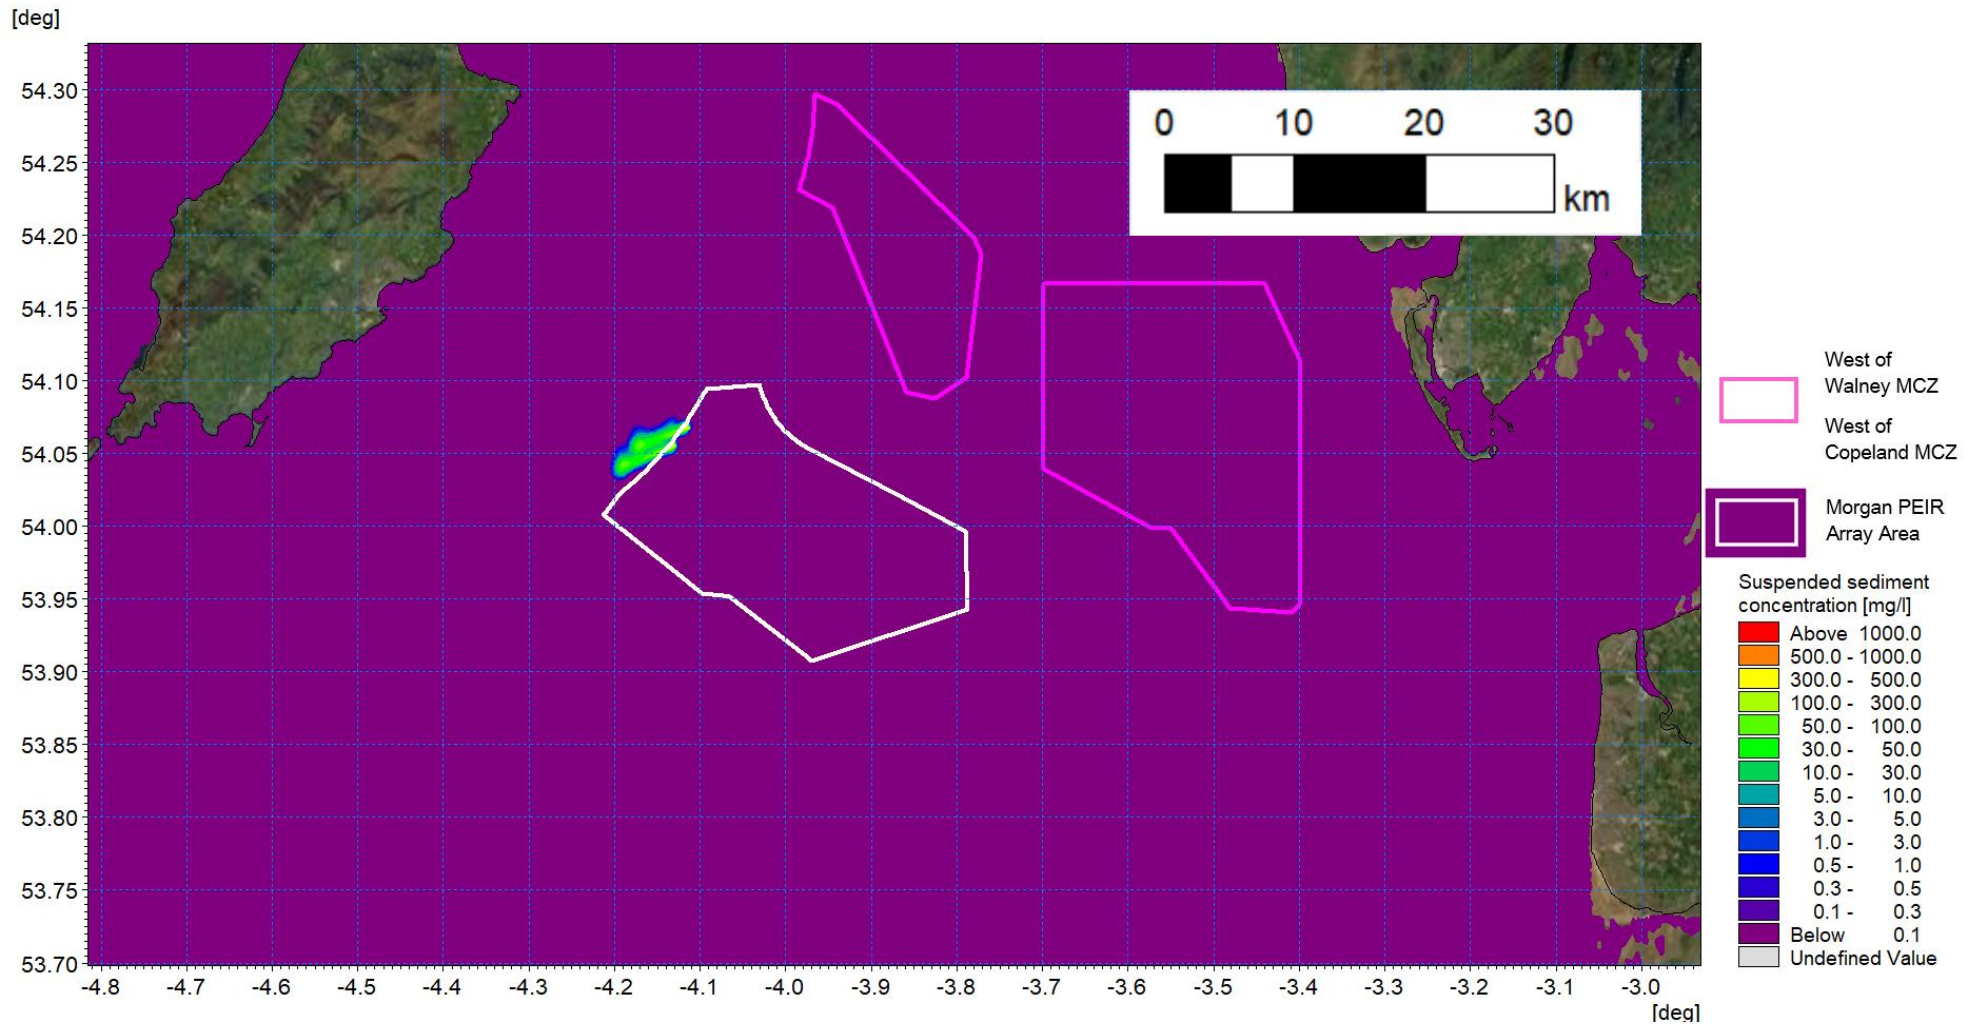


Figure 1.108: SSC day one ebb - pile installation scenario A.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

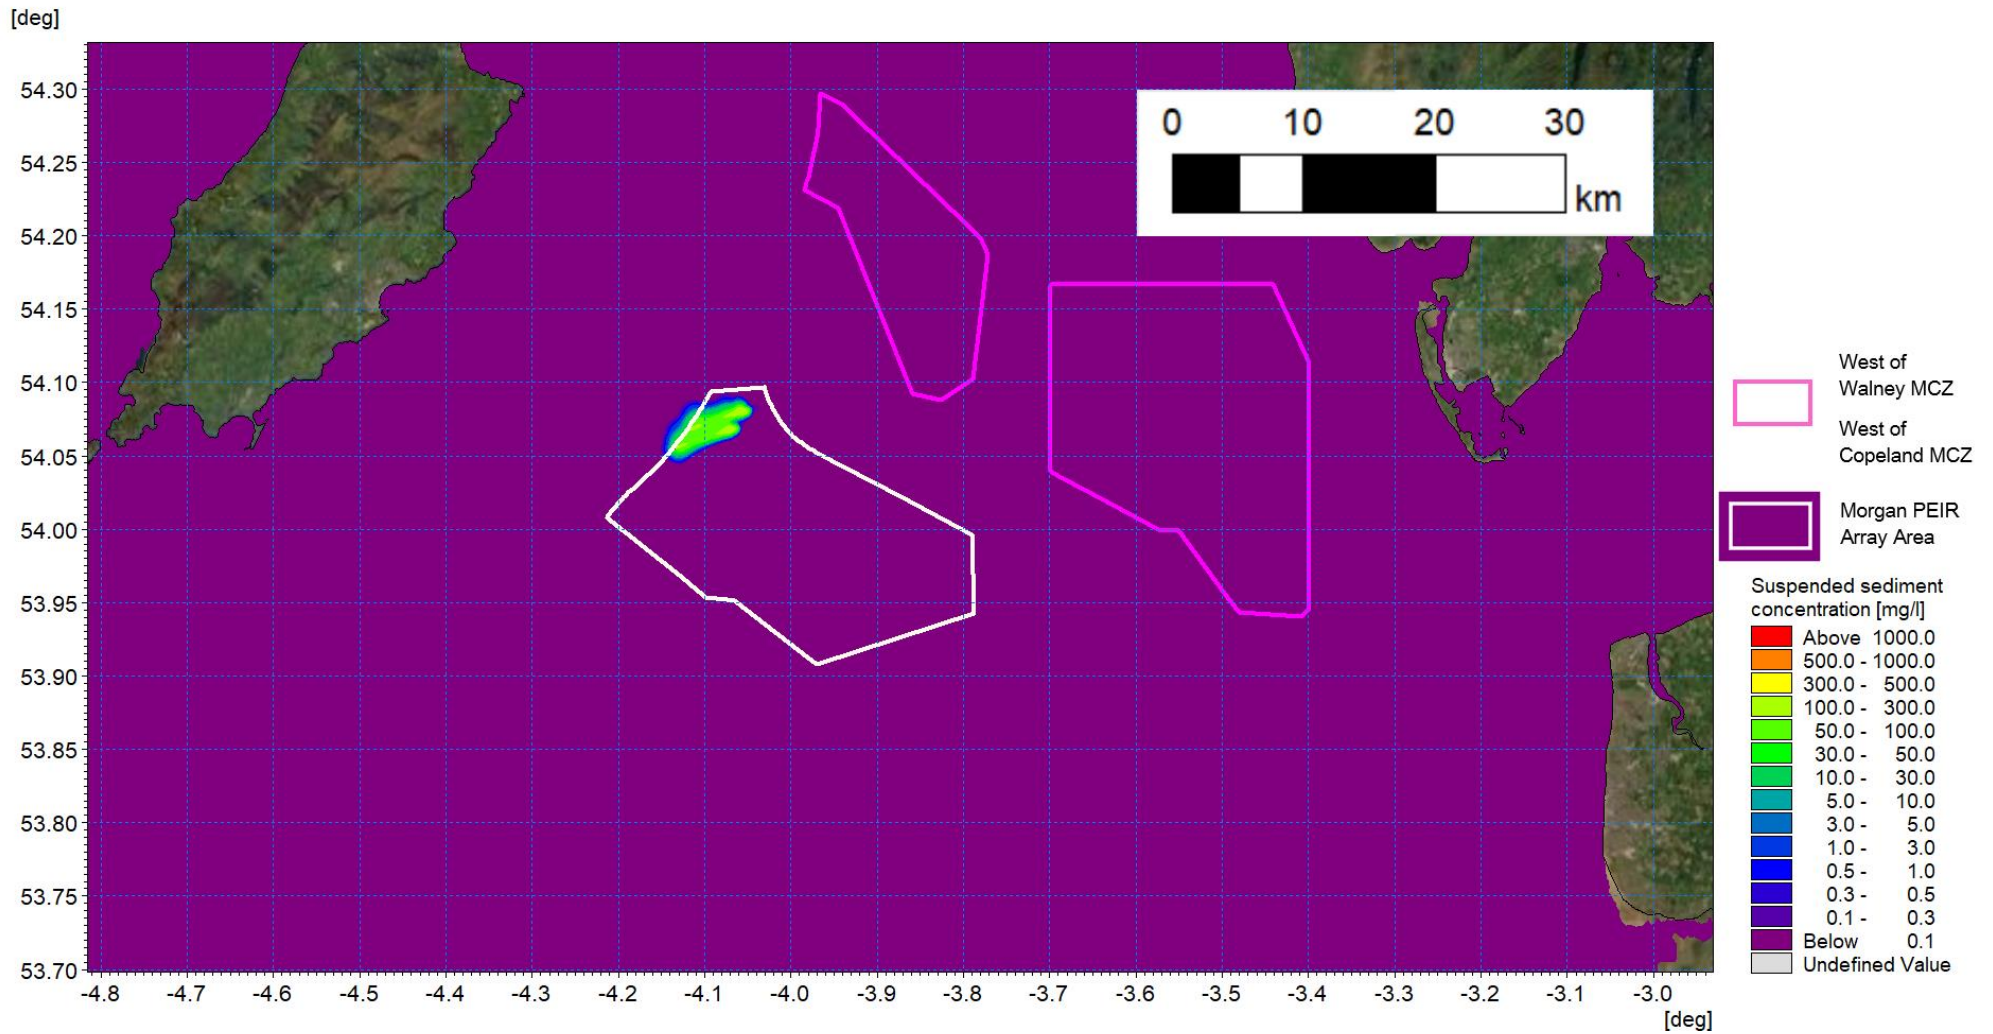


Figure 1.109: SSC day three flood - pile installation scenario A.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

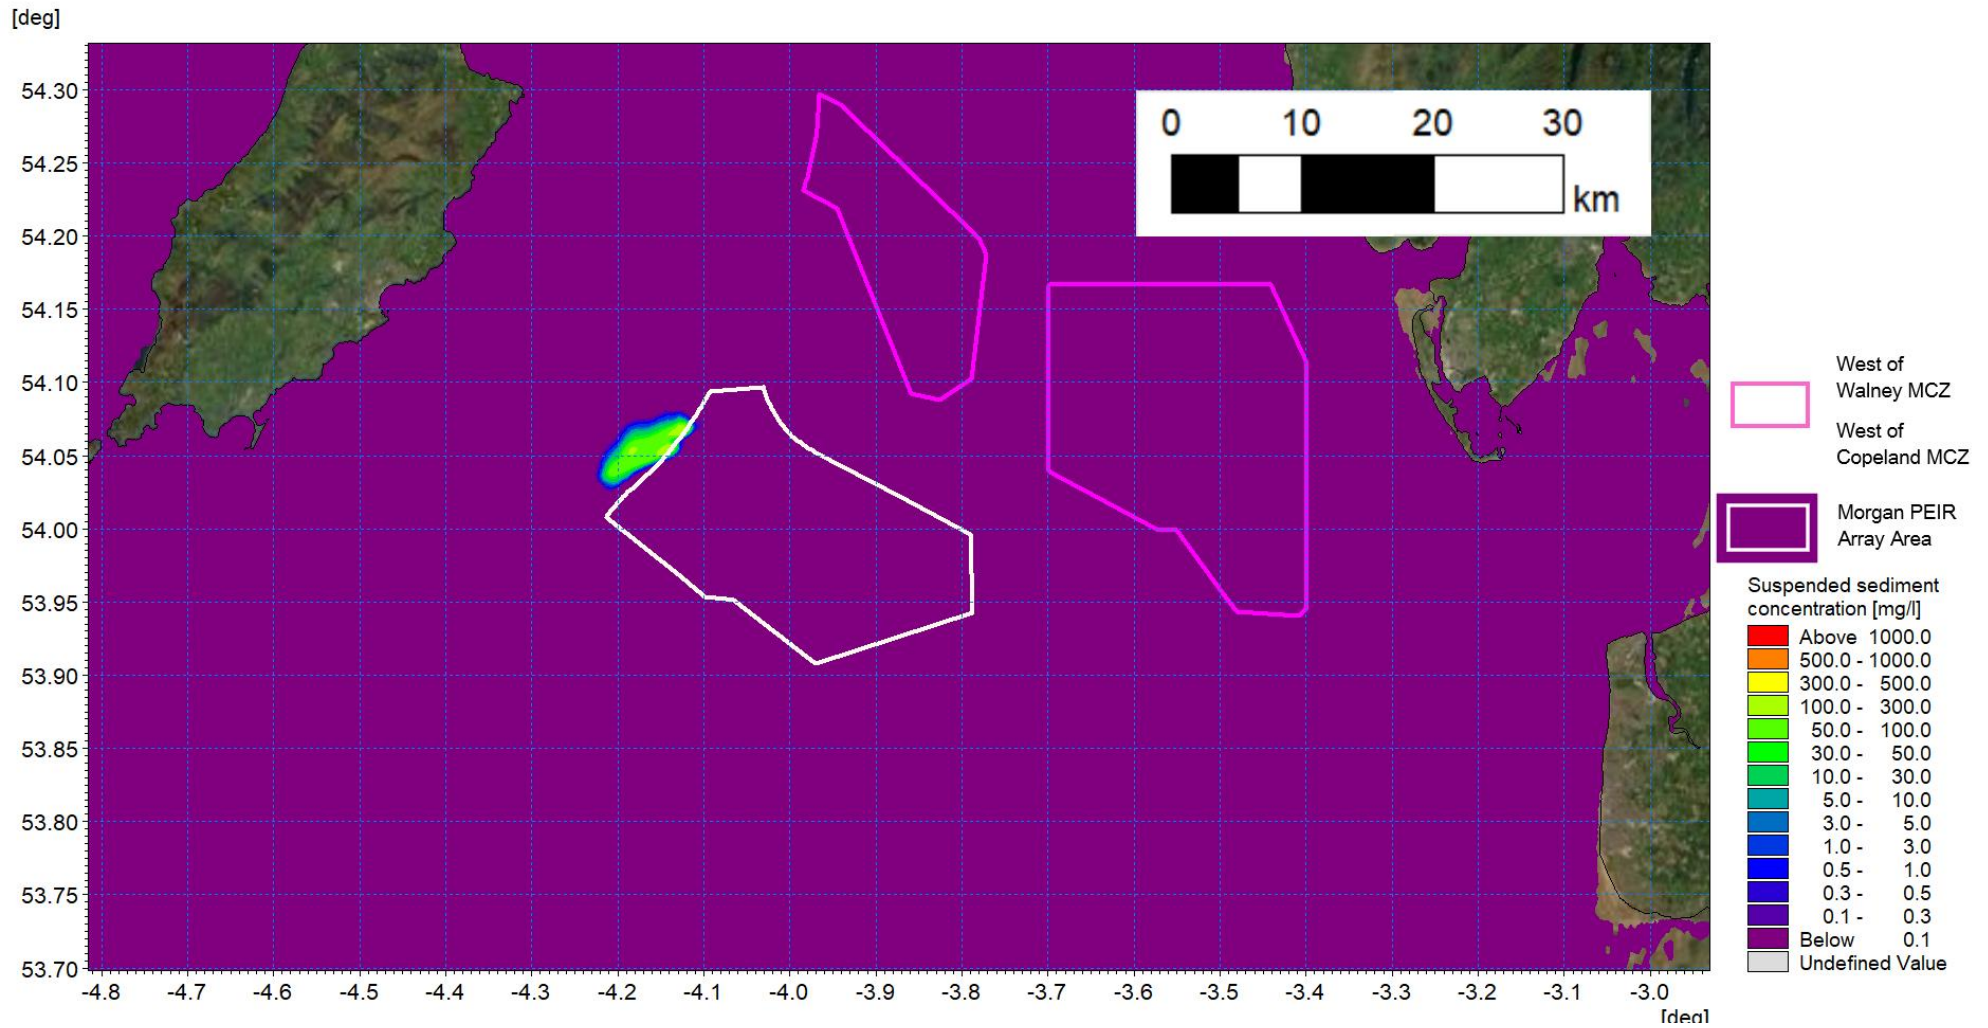


Figure 1.110: SSC day three ebb - pile installation scenario A.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

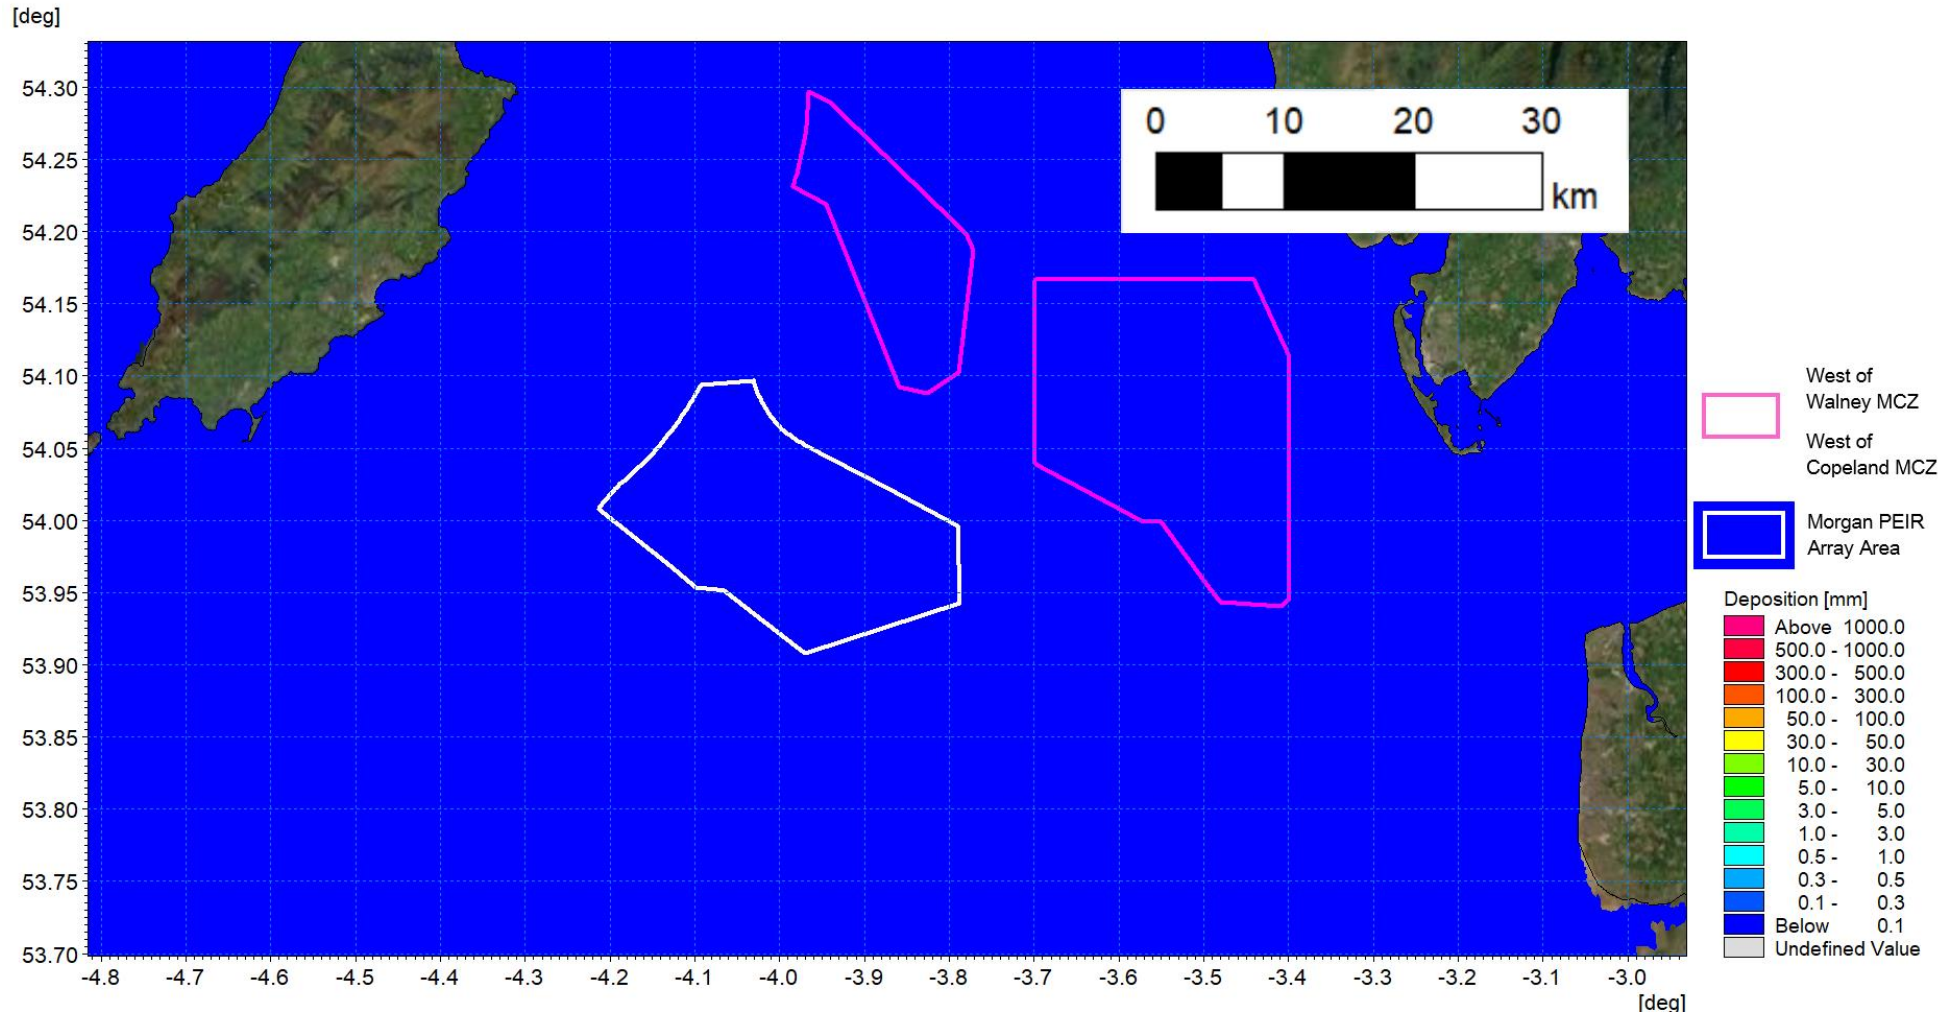


Figure 1.111: Average sedimentation during pile installation – scenario A.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

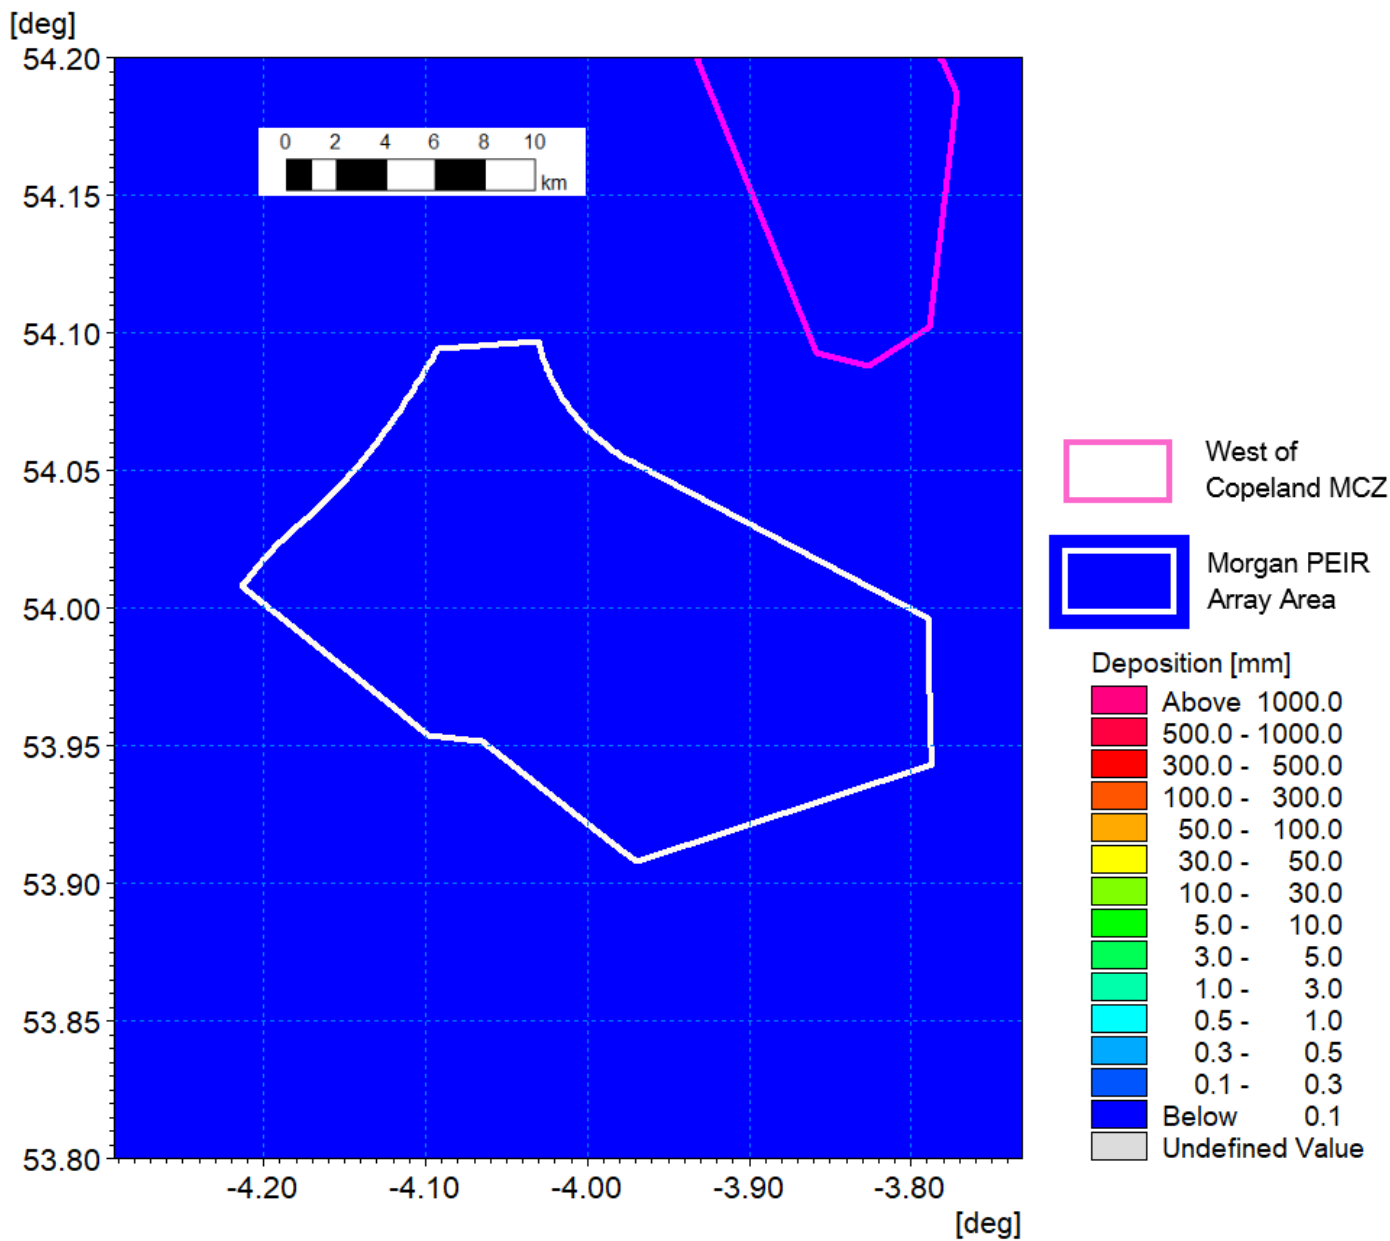


Figure 1.112: Average sedimentation during pile installation – scenario A detail view.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

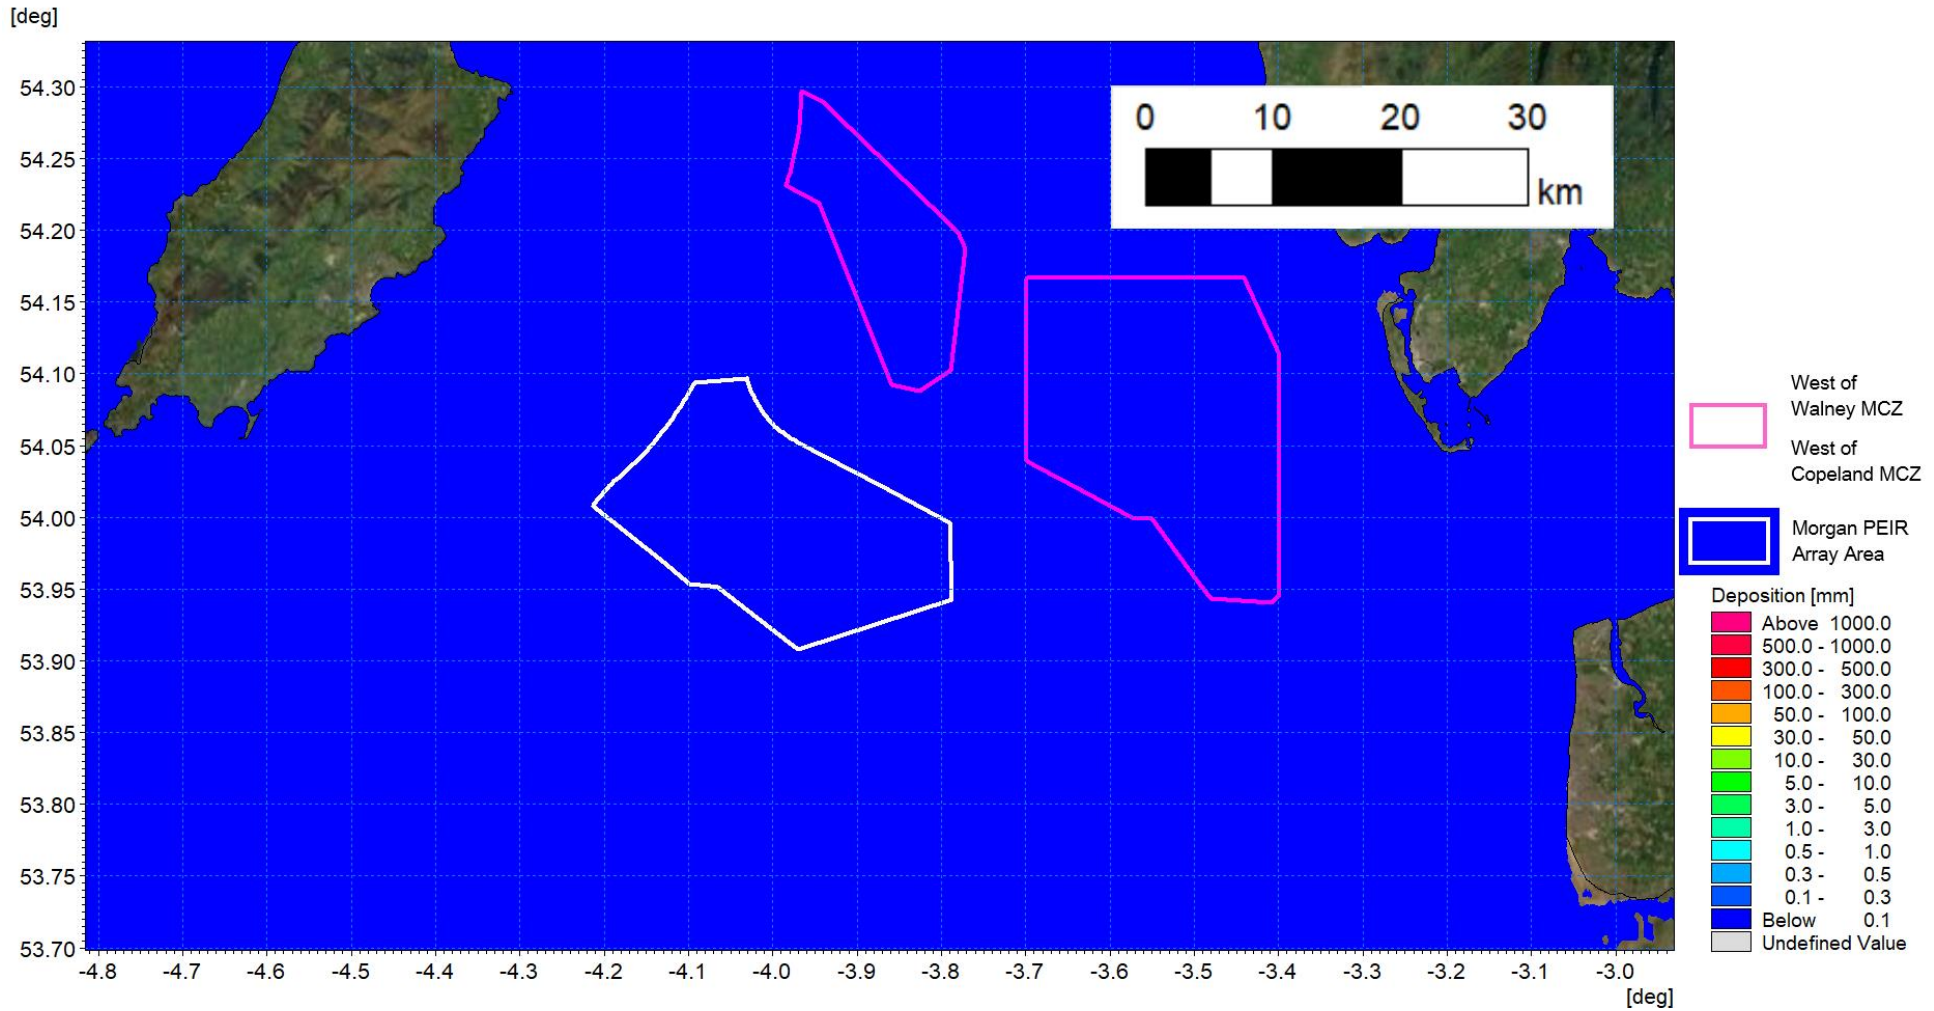


Figure 1.113: Sedimentation one day following cessation of pile installation – scenario A.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

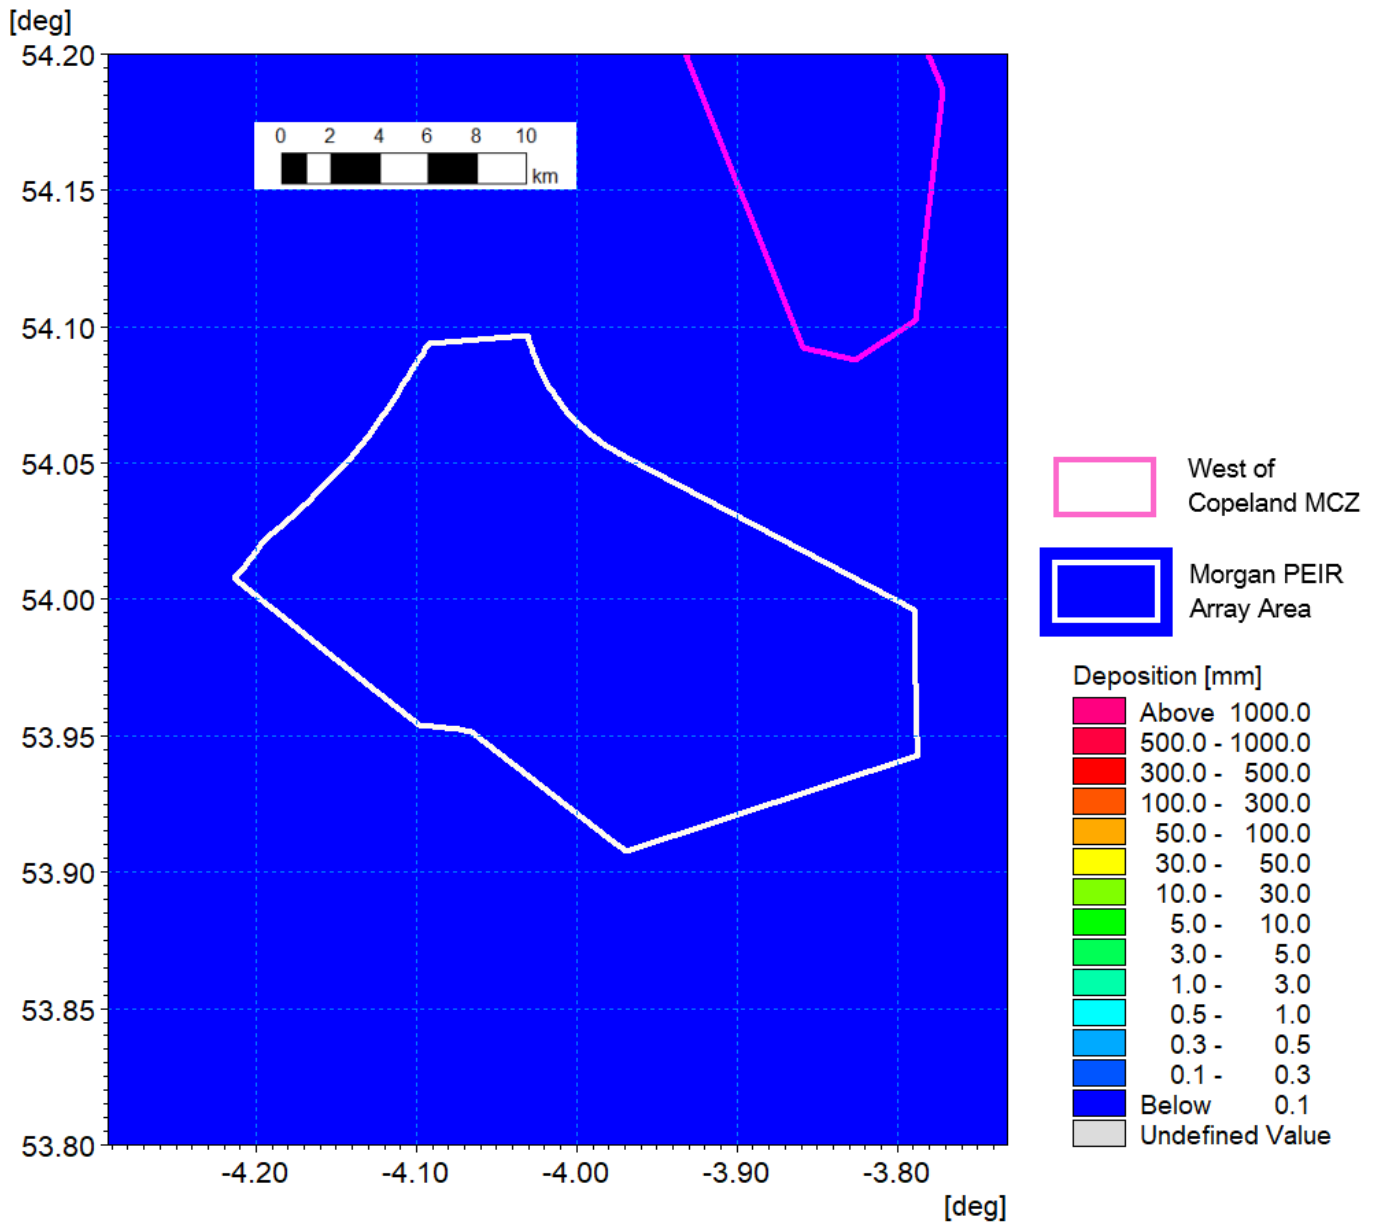


Figure 1.114: Sedimentation one day following cessation of pile installation – scenario A detail view.

Piling scenario B

- 1.3.7.23 The piling locations are sited in the centre of the Morgan Potential Array Area at the north boundary as shown in Figure 1.115. The simulation was undertaken during spring tides and at this location finer sediment and sandwaves are present. The following composition was implemented within the modelling:
- Coarse sand: 28.6%
 - Medium sand: 0.5%
 - Fine sand: 6.1%
 - Very fine sand: 60.2%
 - Mud: 4.6%.
- 1.3.7.24 The average suspended sediment plume envelope is shown in Figure 1.116. As anticipated the extent of the envelope is greater than that for the previous scenario as it was undertaken during spring tides when peak currents are typically double that of neap tides. It may be expected that the subsequent concentrations would be lower as the water depths are similar at the two locations however the stronger currents and finer material means that a greater proportion of the material is in suspension. The instantaneous figures for day one and three, ebb and flood tides are presented in Figure 1.117 to Figure 1.120, where peak concentrations are circa 50 mg/l and average values are typically less than one fifth of this magnitude. At this location the transport cycle is also evident with material settling out on slack tides and becoming re-suspended with increasing current speeds.
- 1.3.7.25 The highly dispersive nature of spring tidal currents coupled with a portion of work undertaken on slack tide and the finer material located at this site results in average sedimentation levels <0.1 mm as illustrated in Figure 1.121 and Figure 1.122. The resulting sedimentation depths after one day following cessation of the two drilling operations is shown in Figure 1.123 and Figure 1.124 and are typically less than 0.1 mm and demonstrate that this settlement would be imperceptible from the background sediment transport activity.

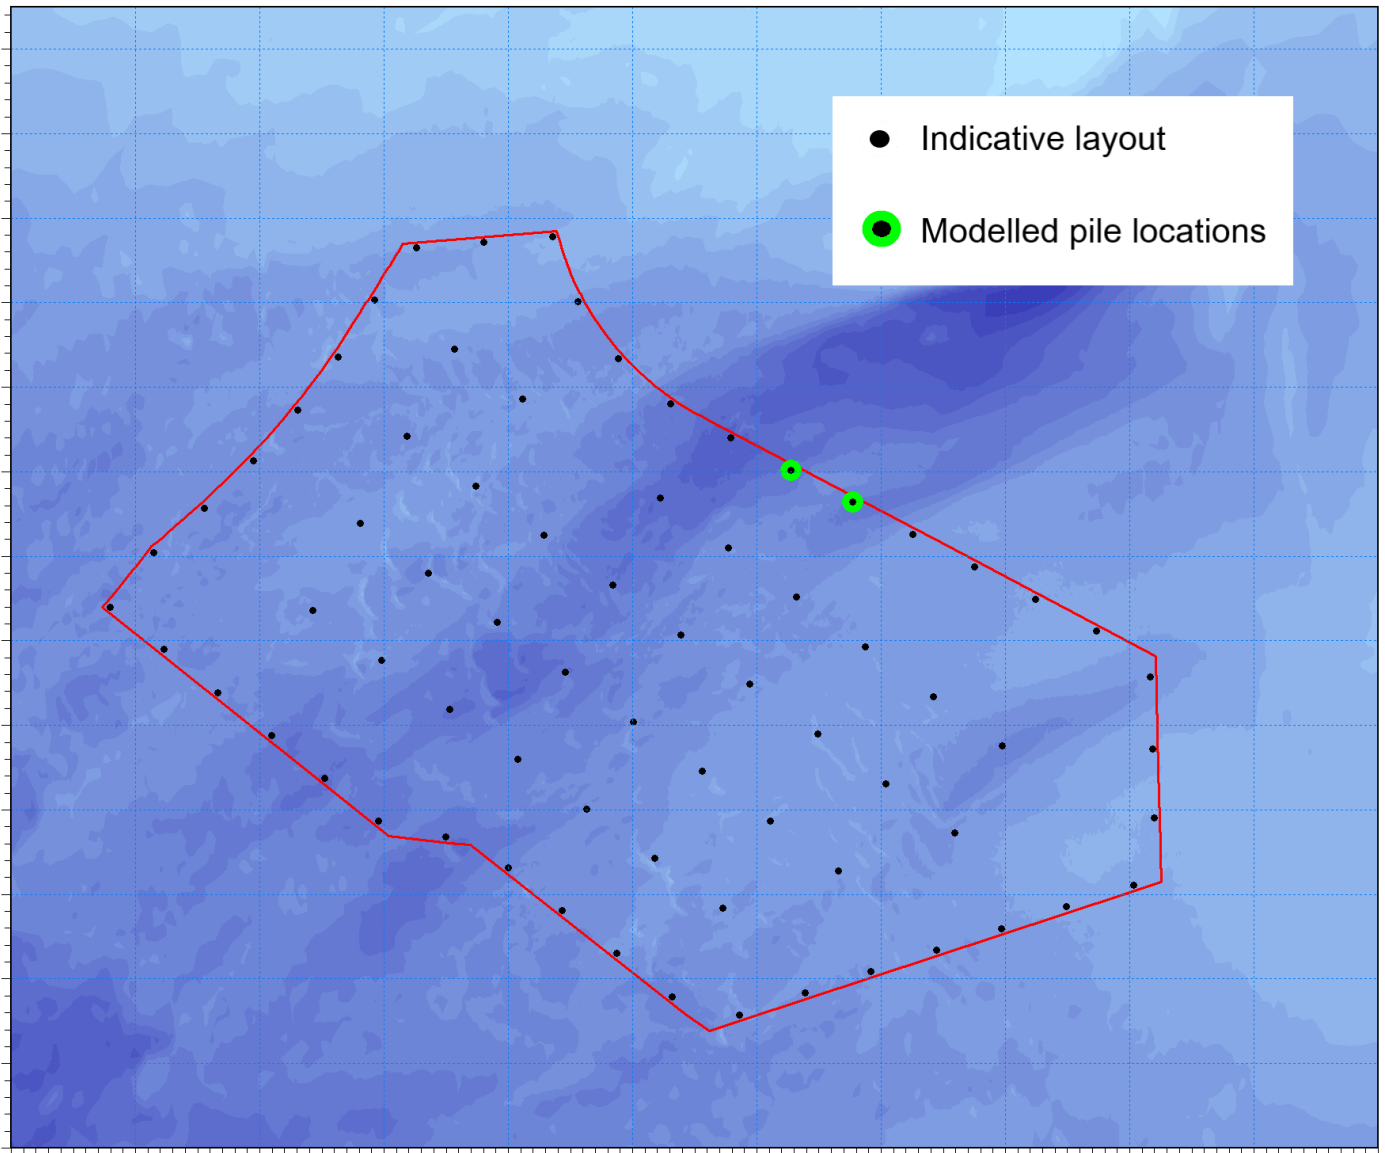


Figure 1.115: Location of modelled piled installation for piling – PEIR scenario B.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

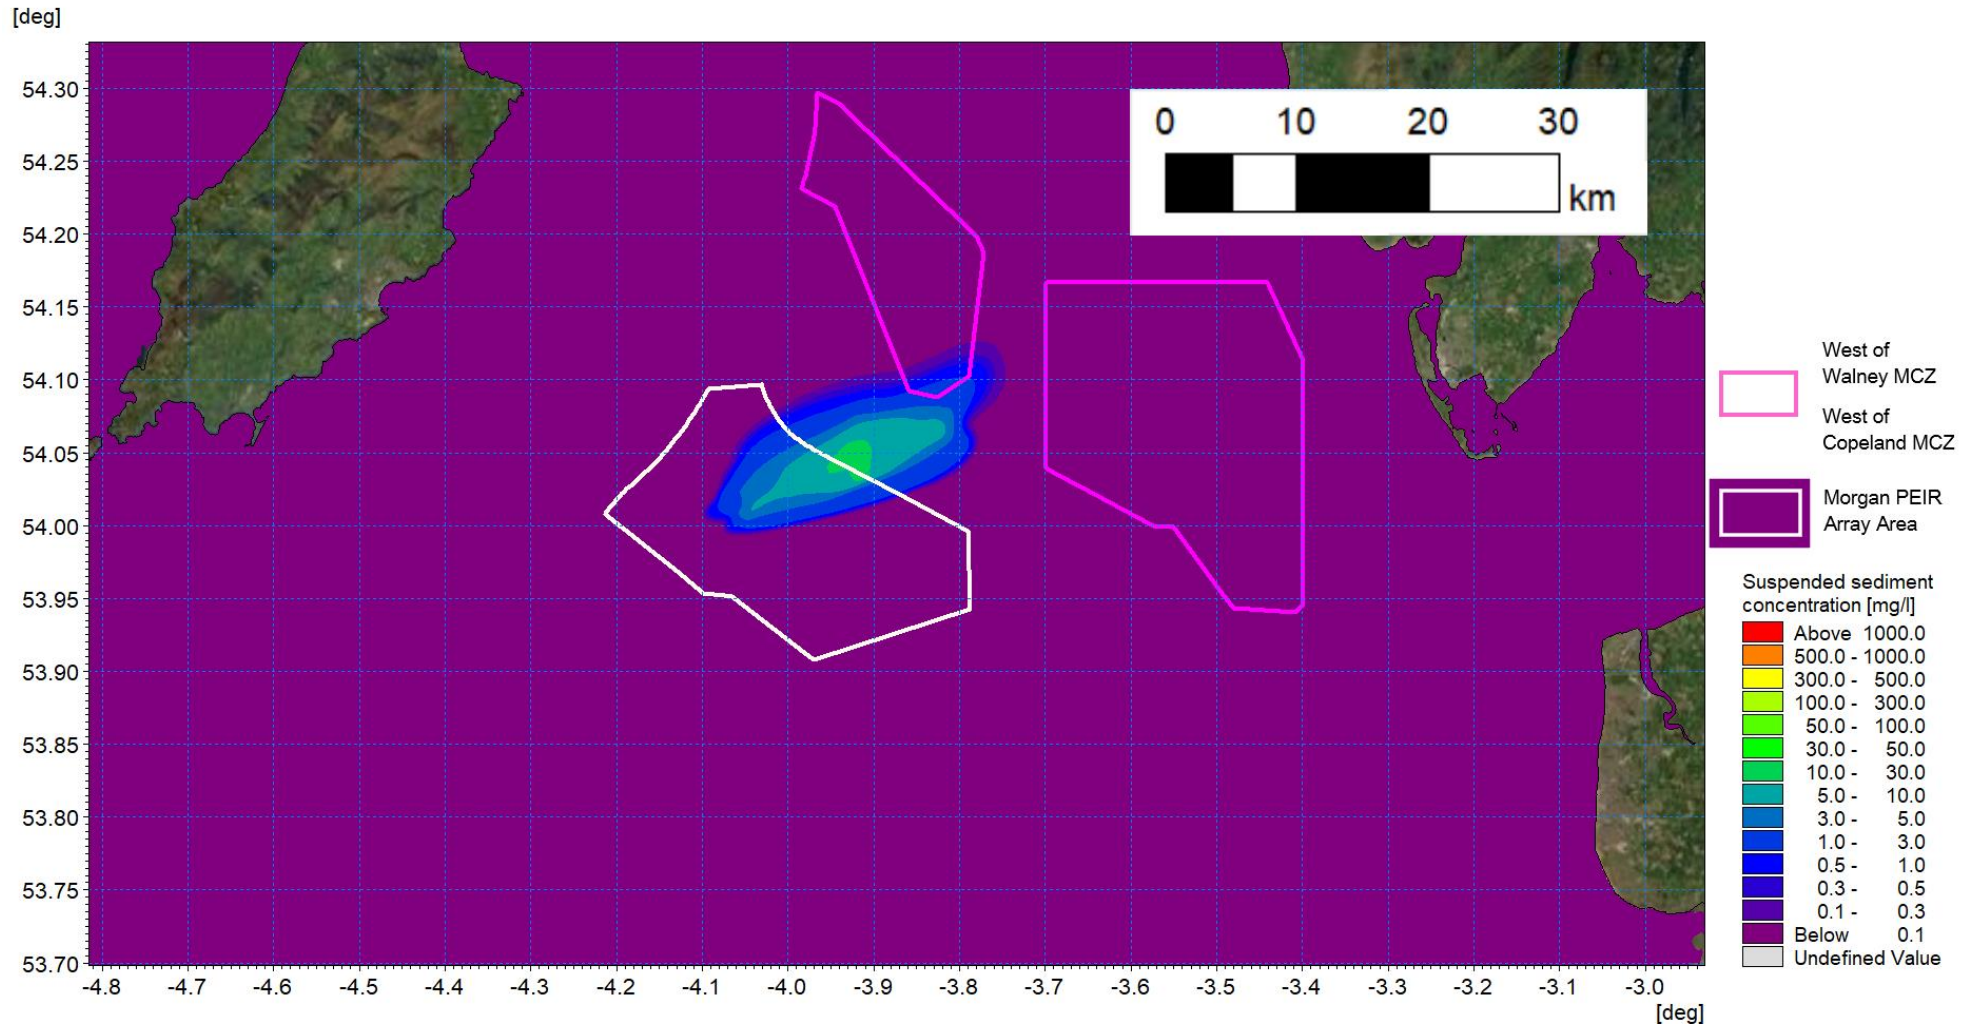


Figure 1.116: Average SSC – pile installation scenario B.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

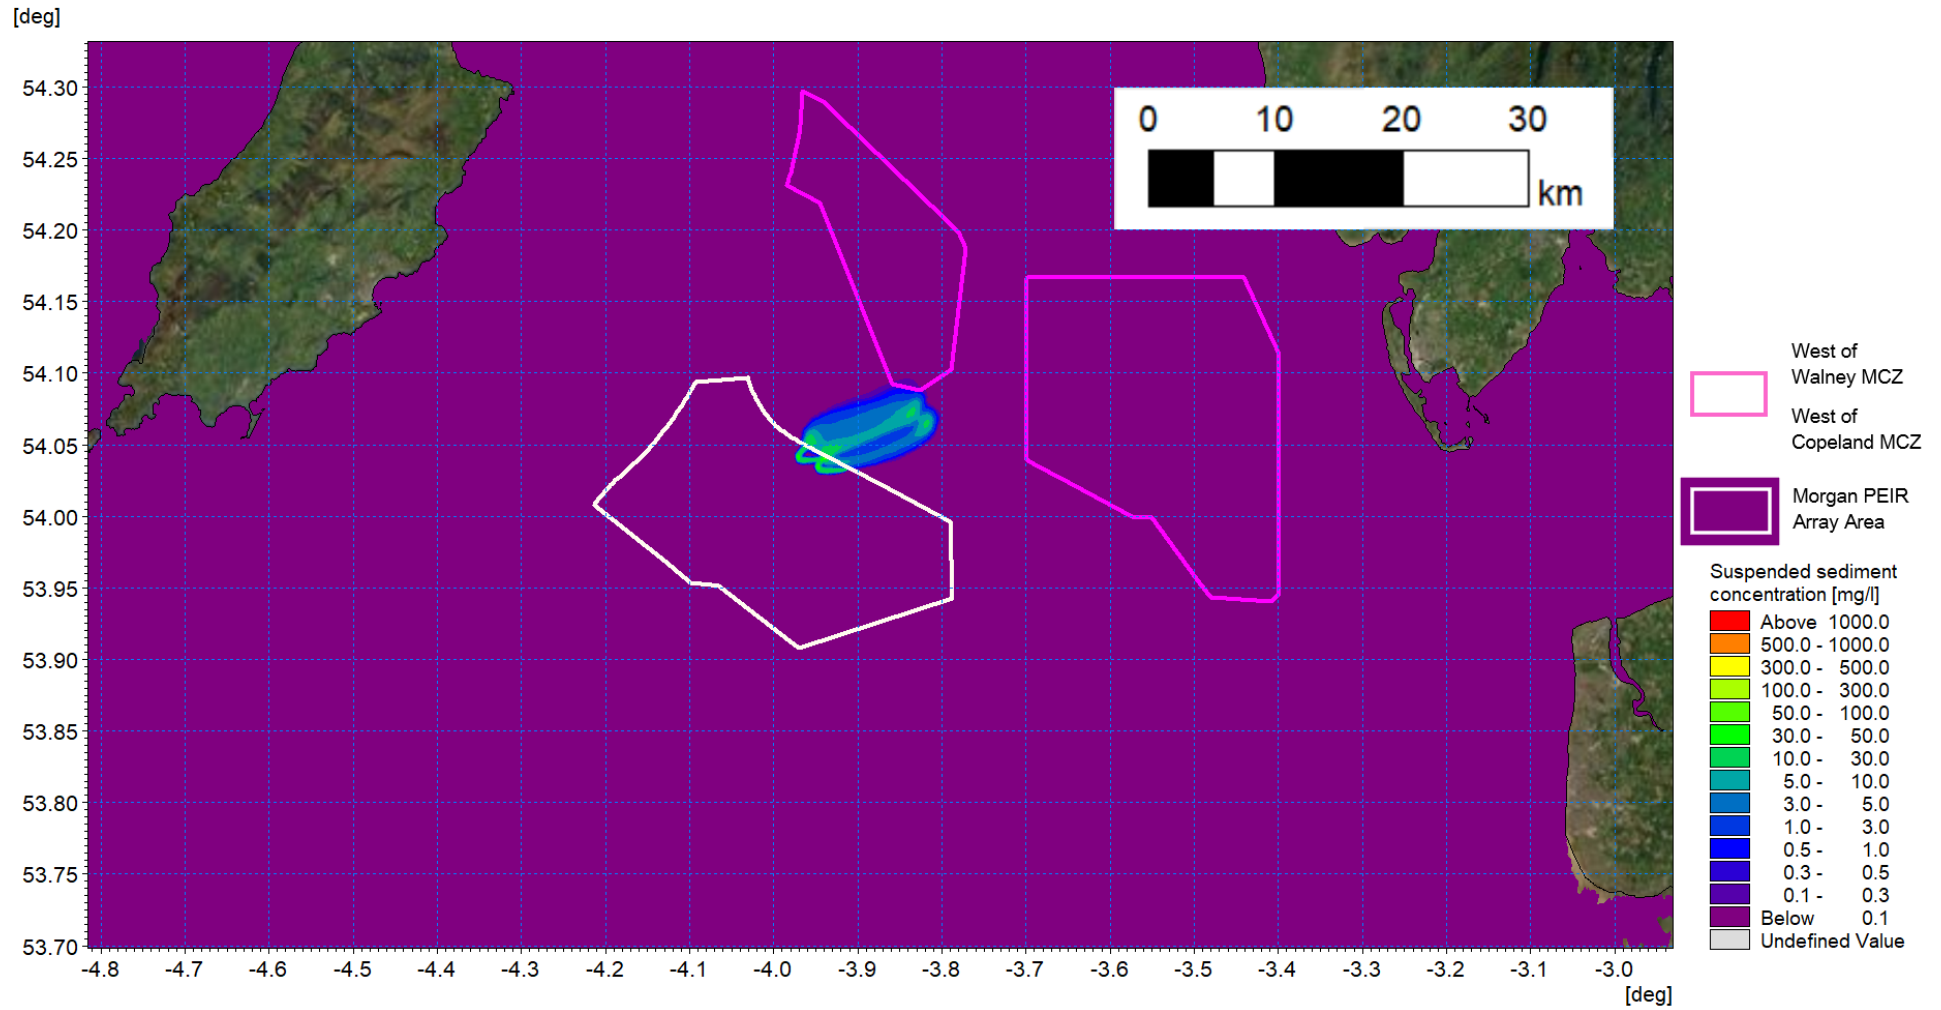


Figure 1.117: SSC day one flood - pile installation scenario B.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

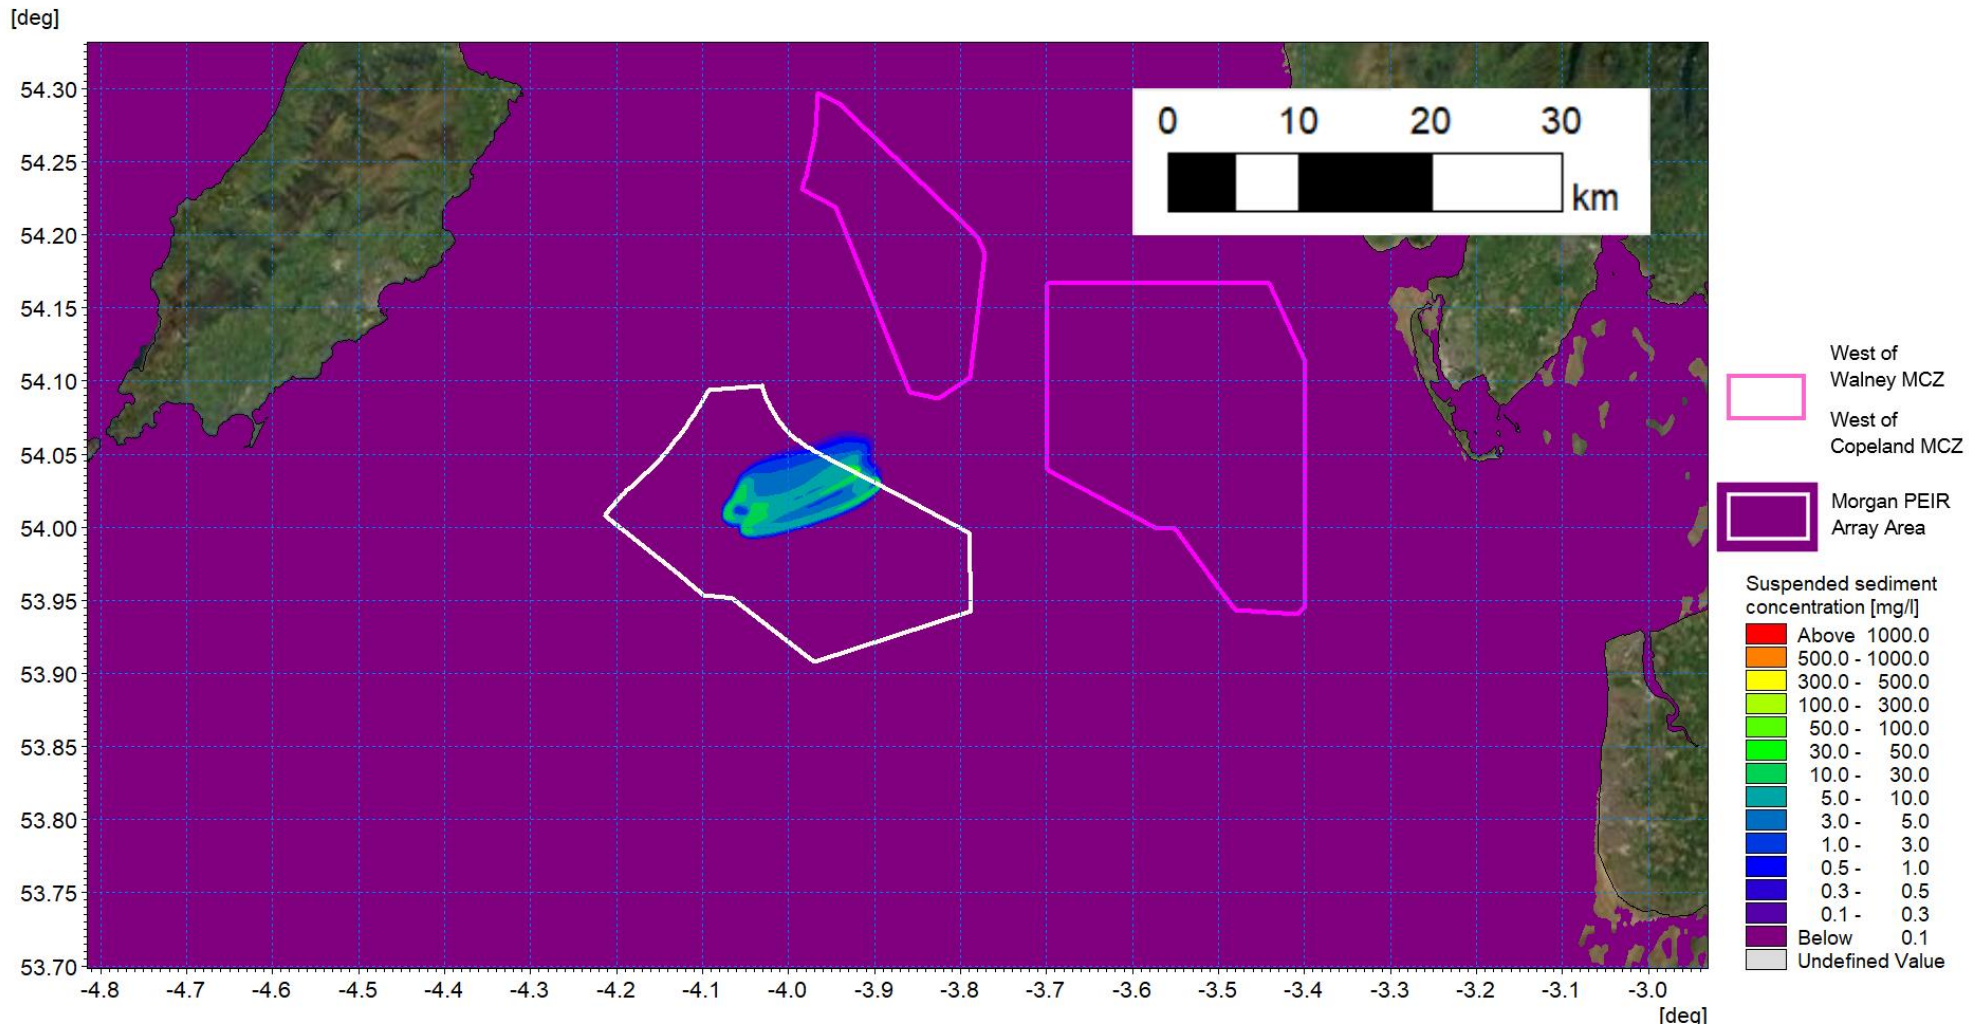


Figure 1.118: SSC day one ebb - pile installation scenario B.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

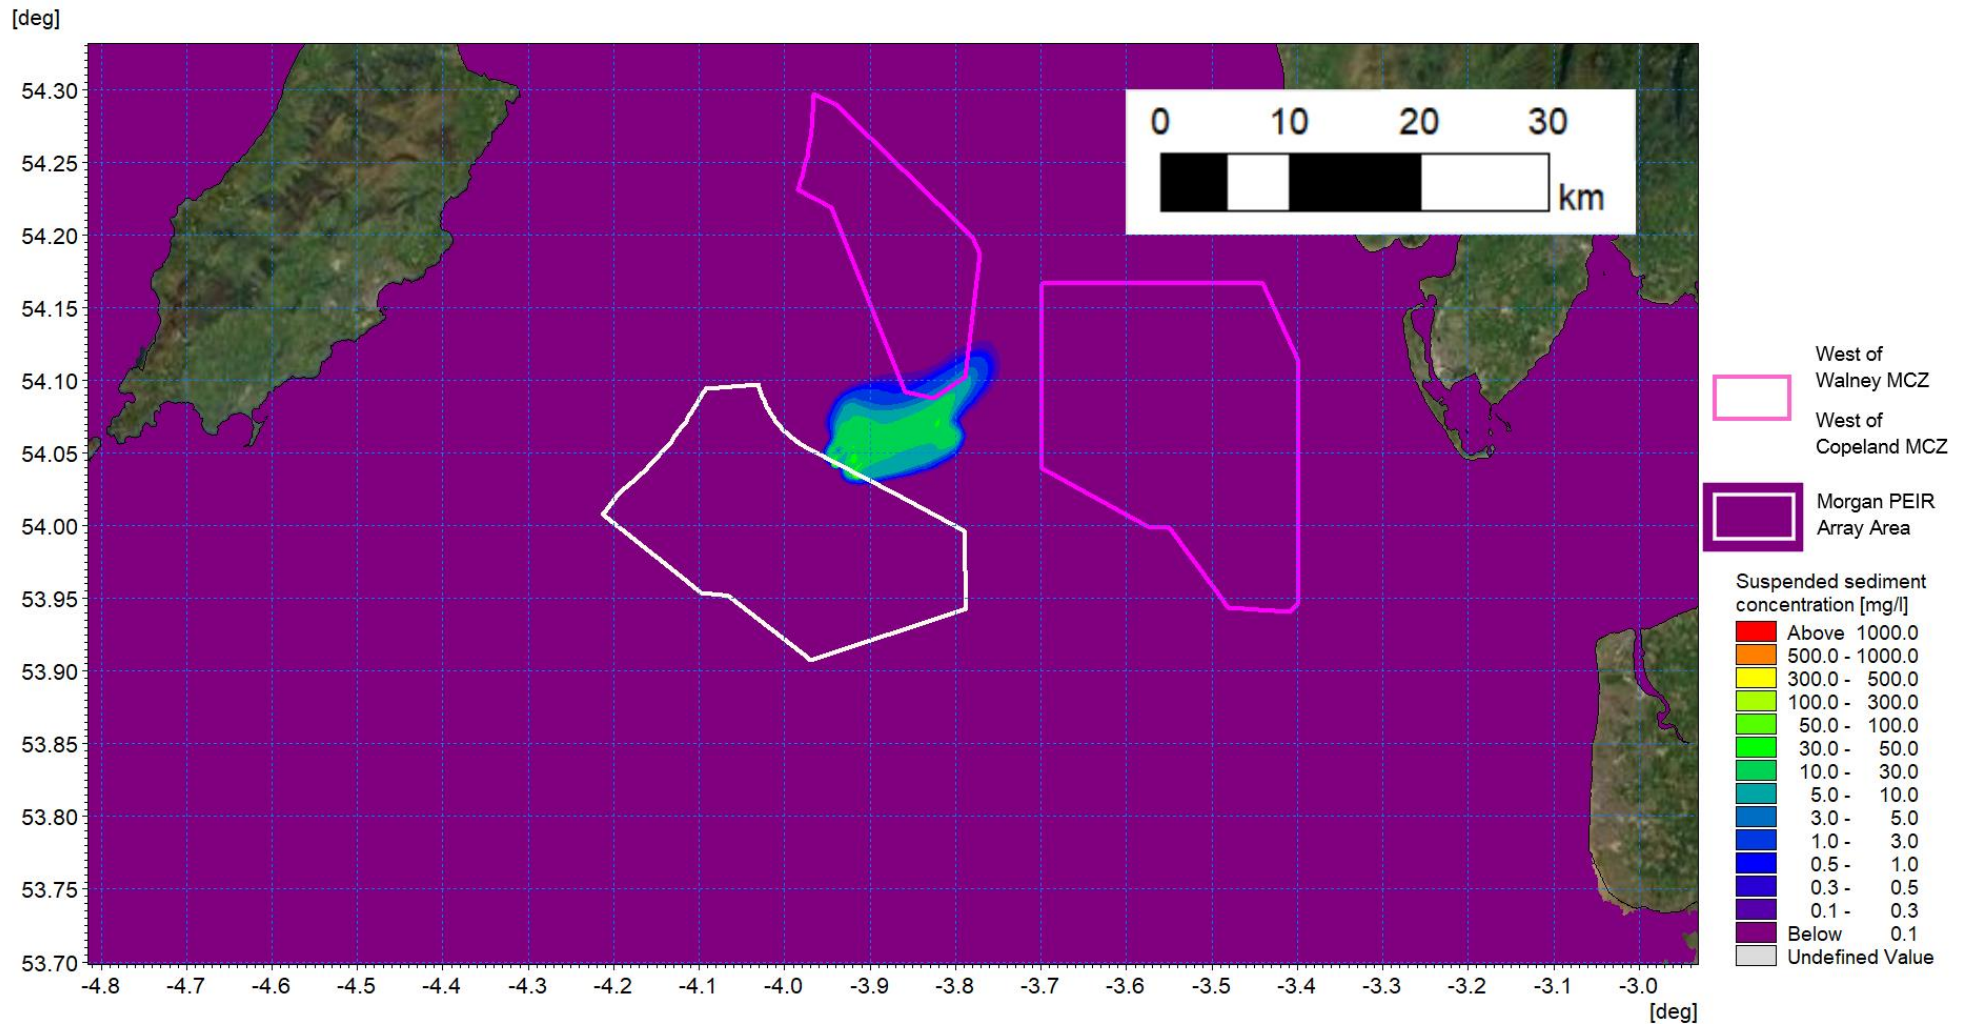


Figure 1.119: SSC day three flood - pile installation scenario B.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

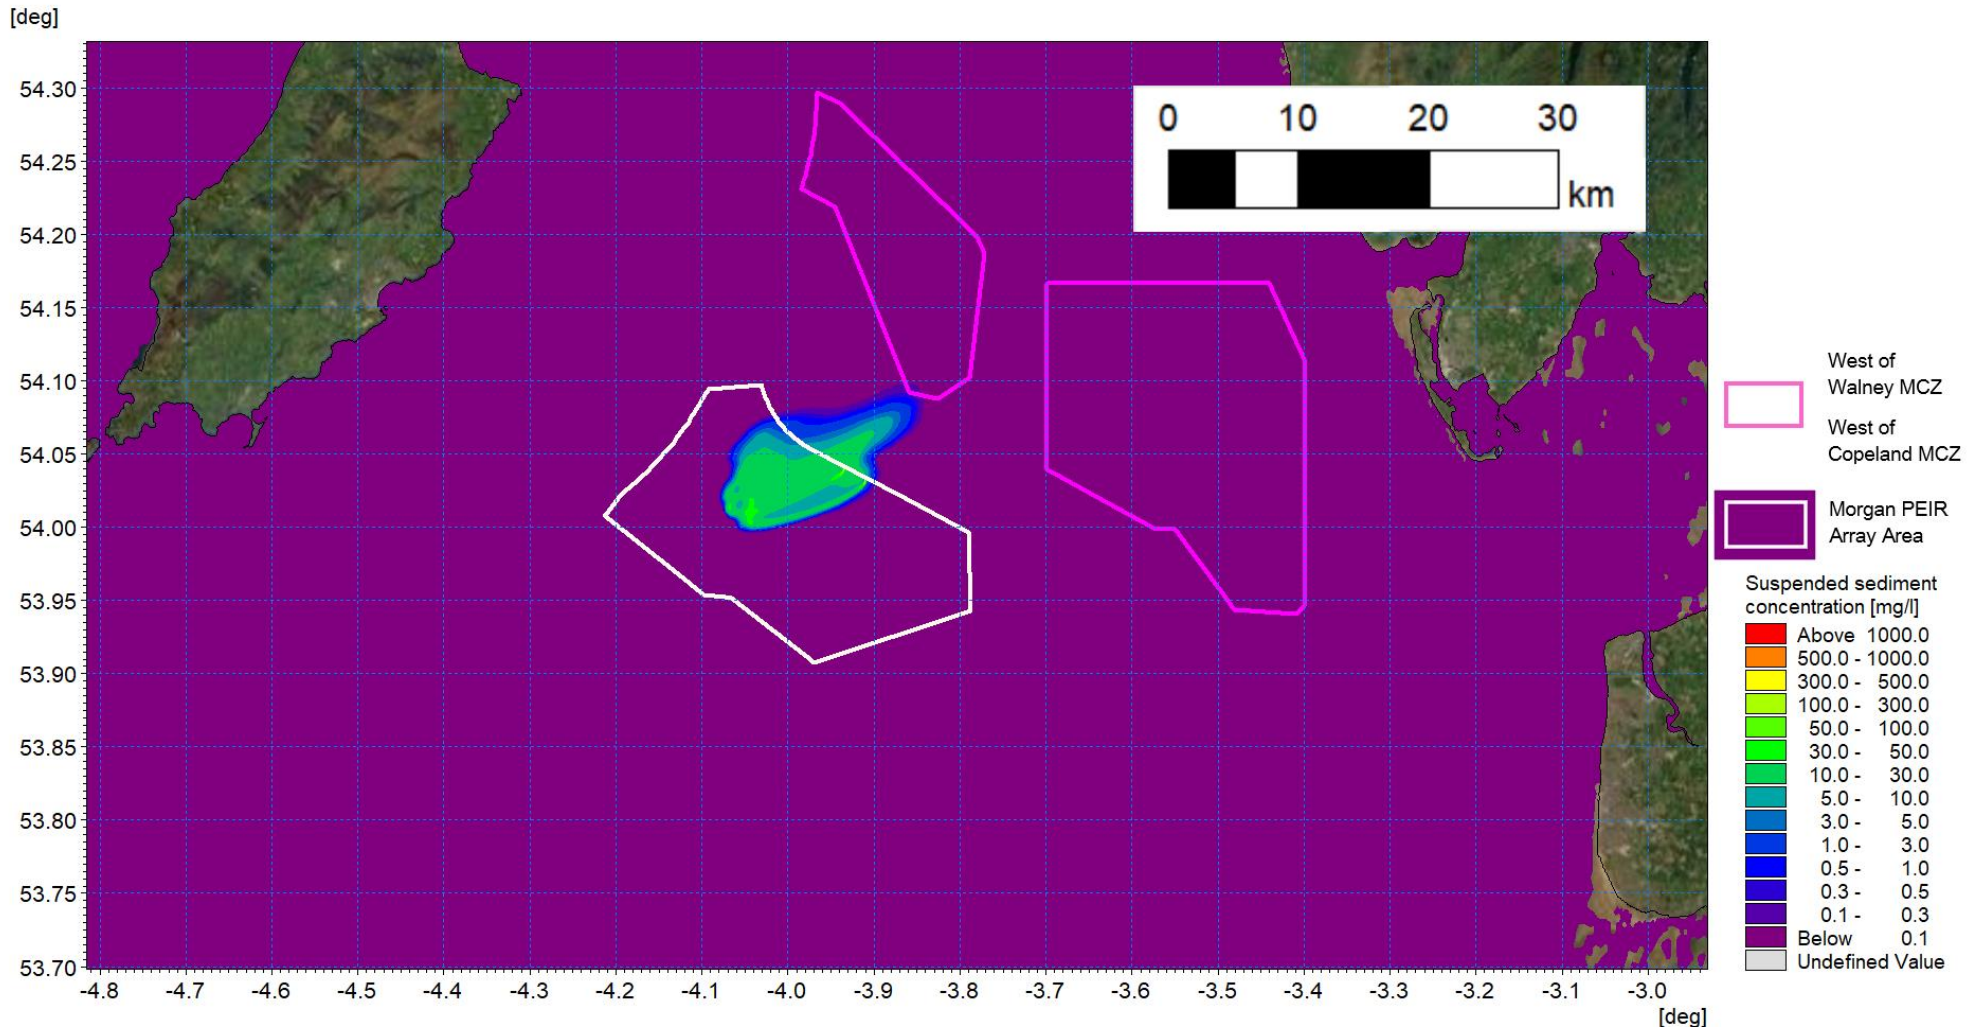


Figure 1.120: SSC day three ebb - pile installation scenario B.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

[deg]

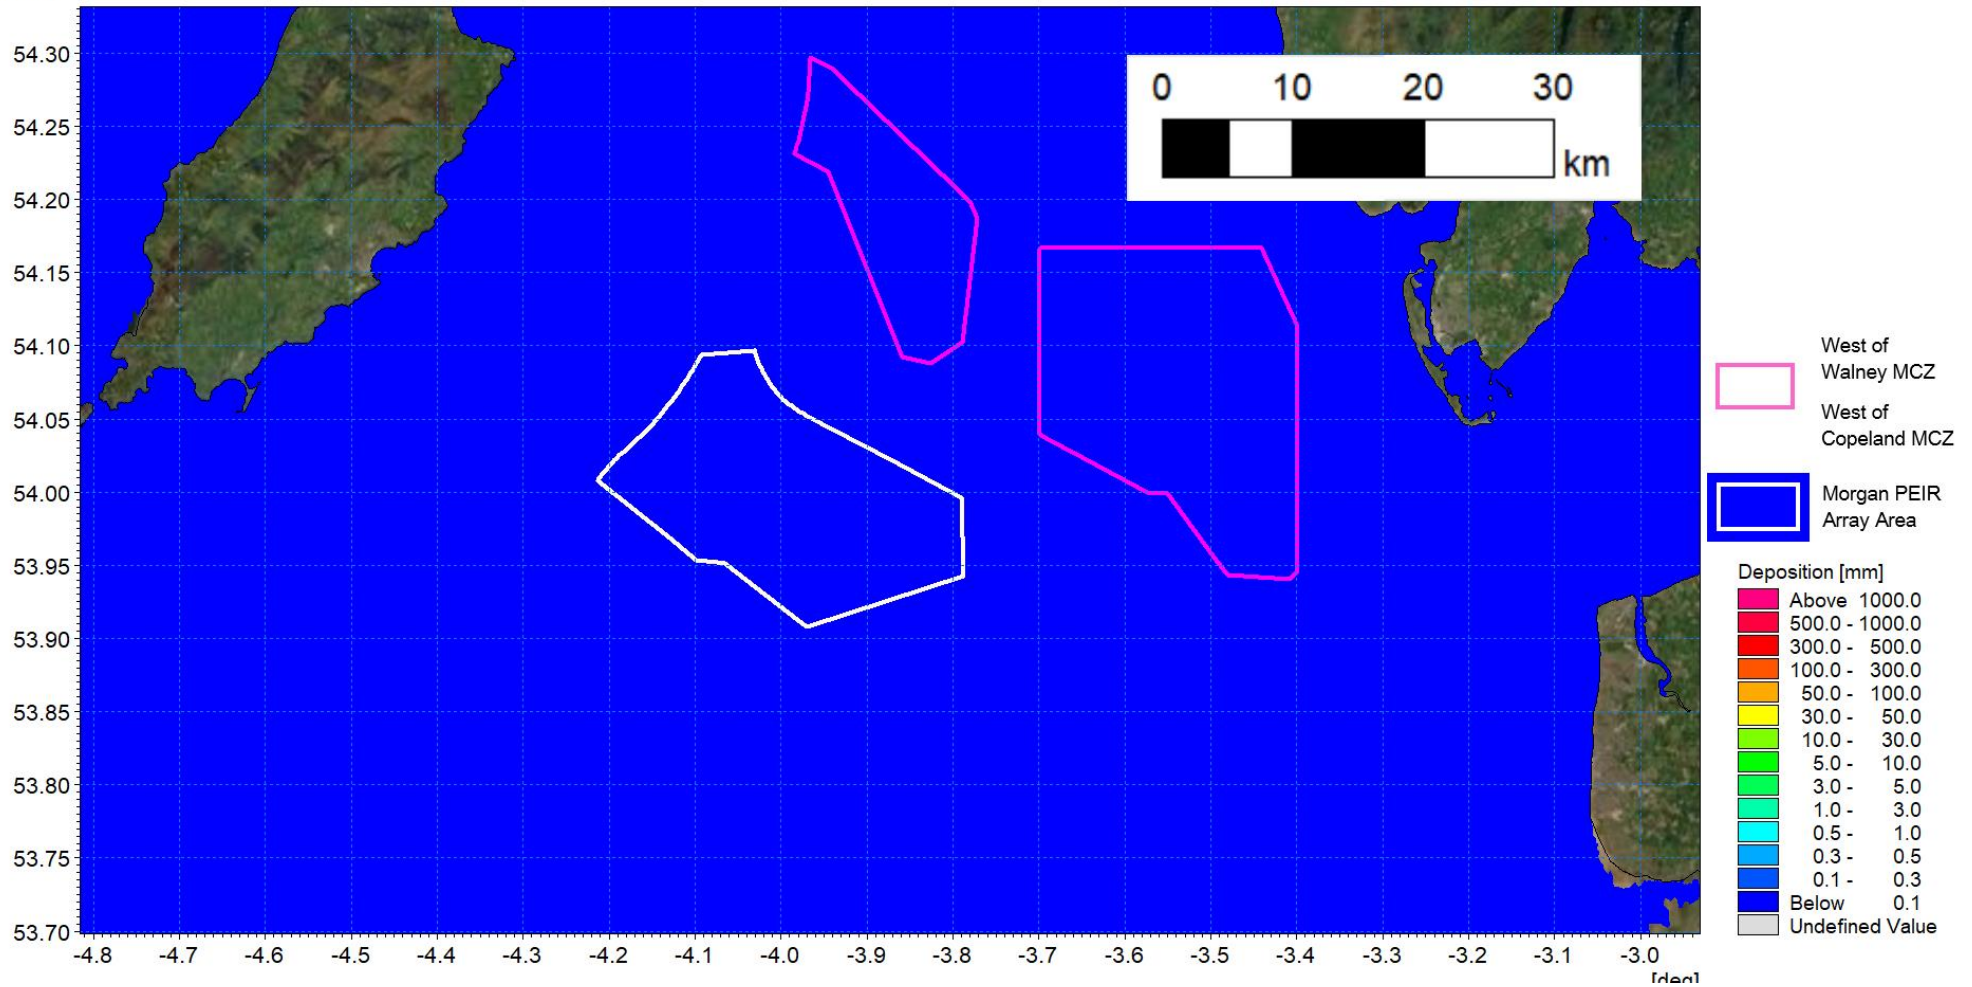


Figure 1.121: Average sedimentation during pile installation – scenario B.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

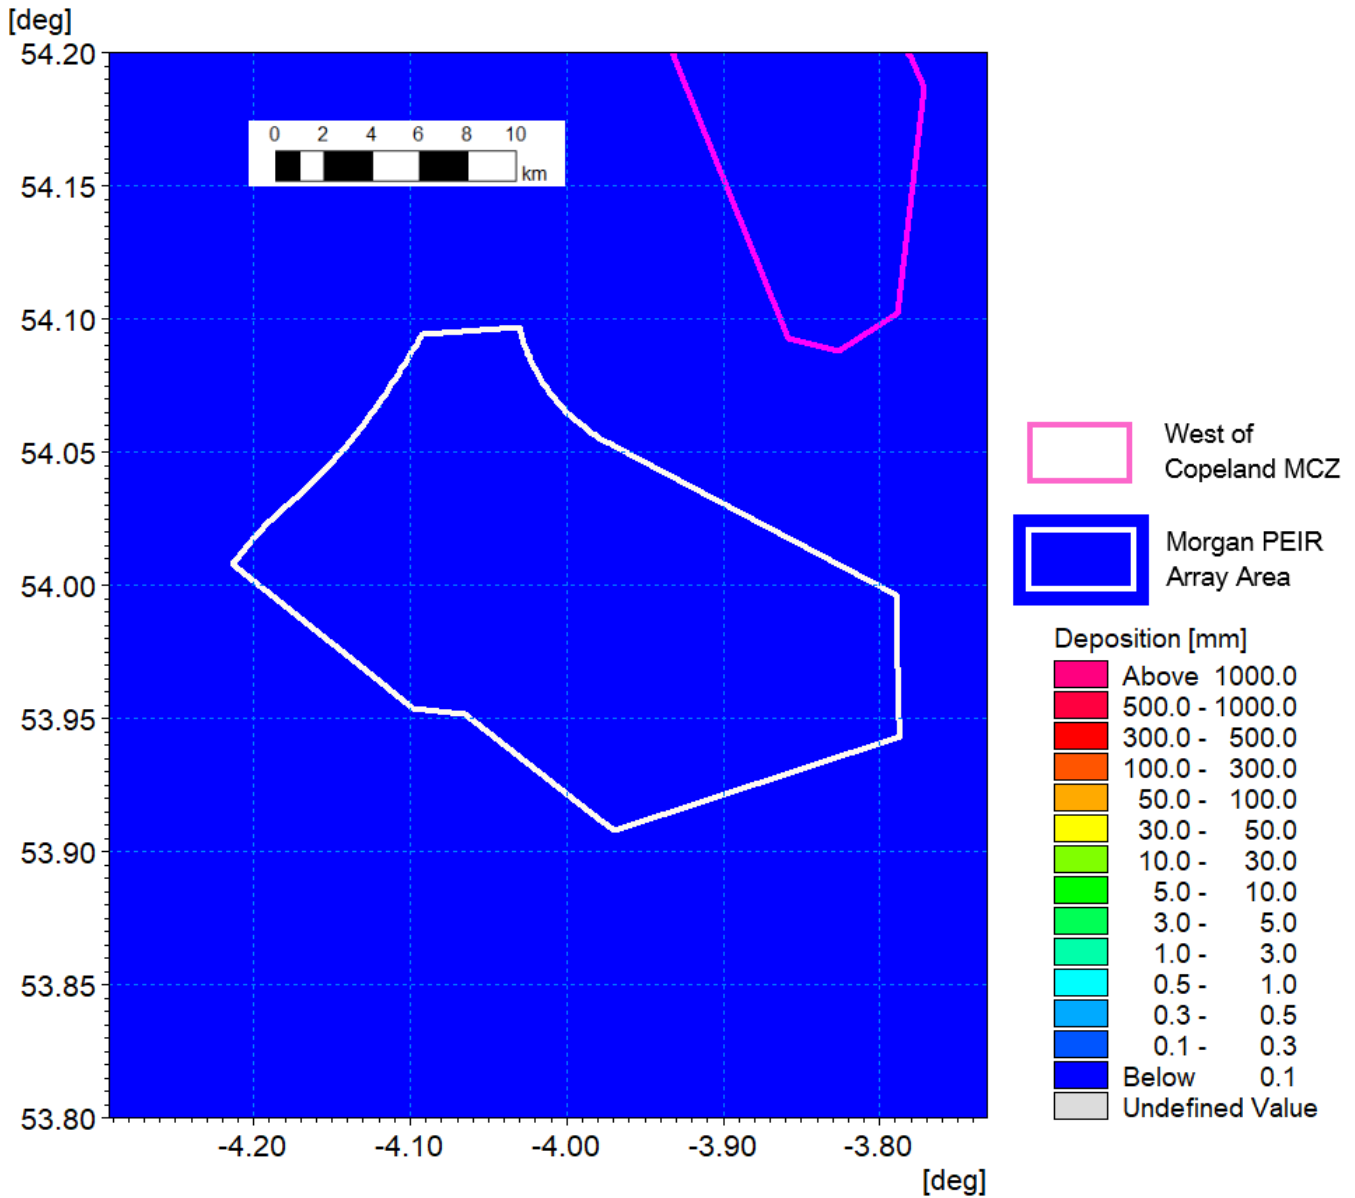


Figure 1.122: Average sedimentation during pile installation – scenario B detail view.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

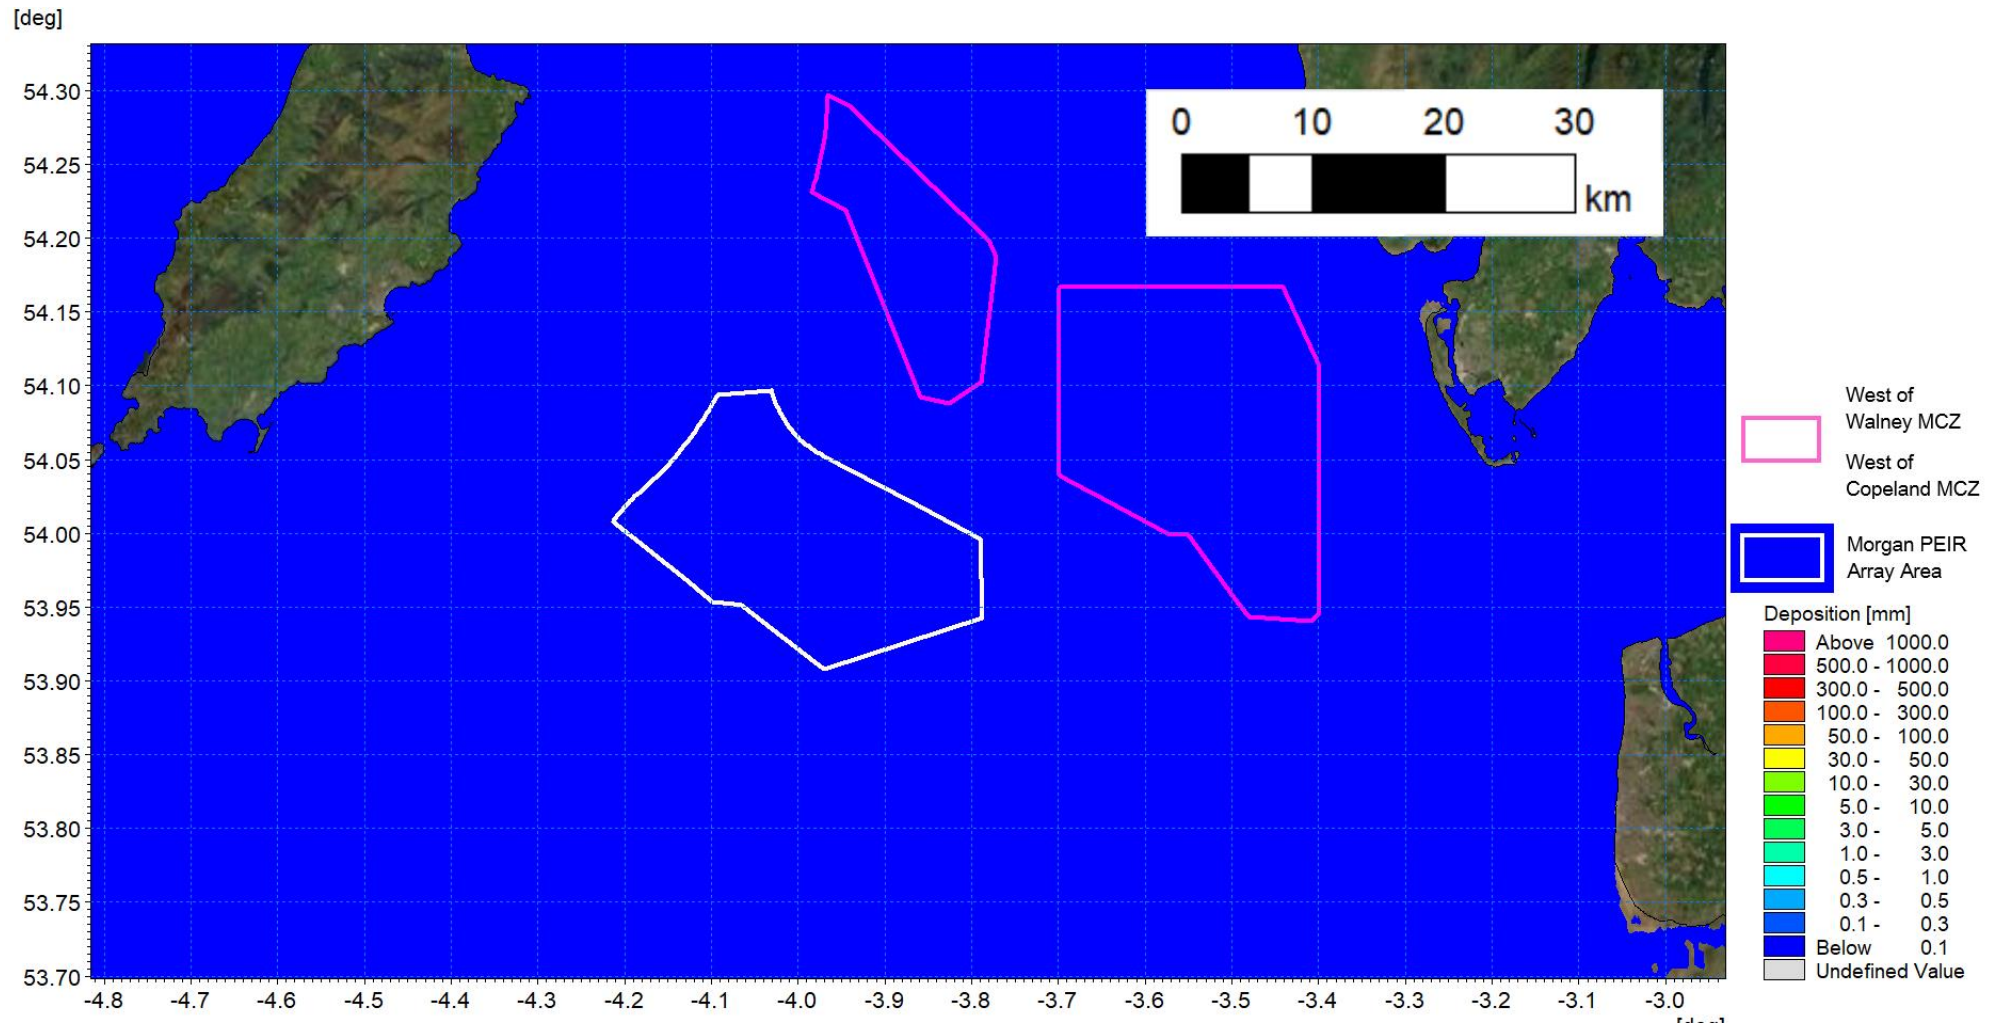


Figure 1.123: Sedimentation one day following cessation of pile installation – scenario B.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

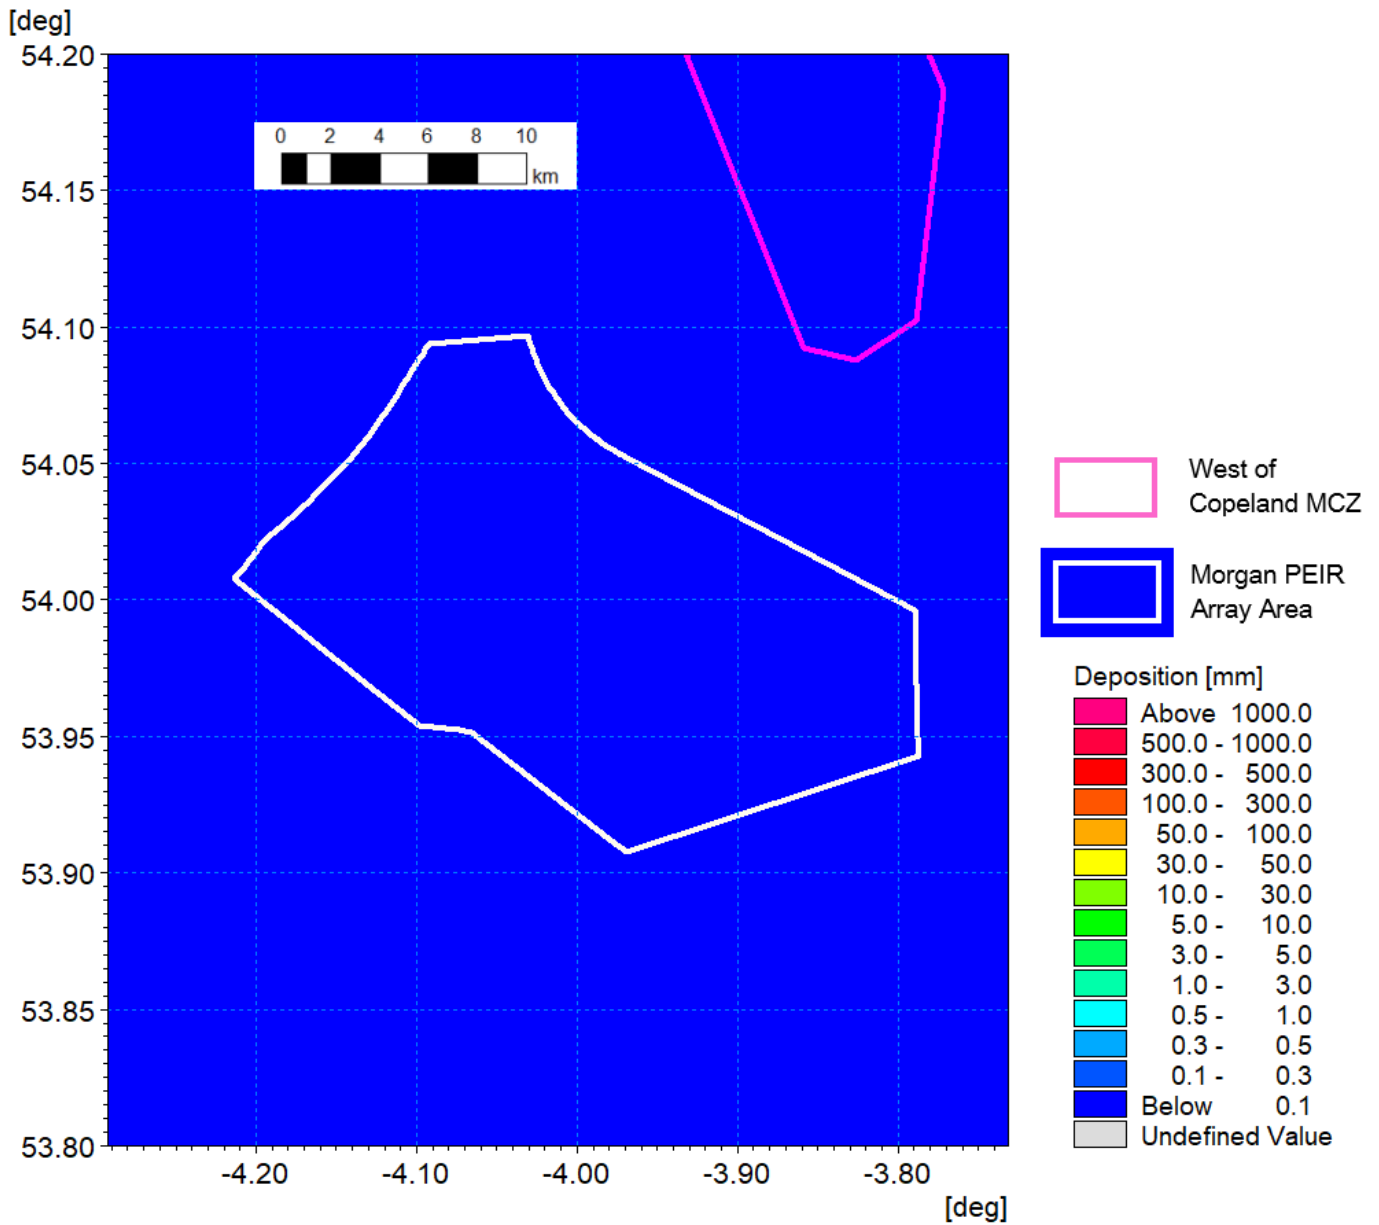


Figure 1.124: Sedimentation one day following cessation of pile Installation – scenario B detail view.

Piling scenario C

- 1.3.7.26 The piling locations are illustrated in Figure 1.125 and they are orientated in alignment with the tidal current to provide an augmented plume scenario under mean tidal currents. The sediment composition at this location comprised sandy sediments similar to those at scenario B as follows:
- Coarse sand: 28.6%
 - Medium sand: 0.5%
 - Fine sand: 6.1%
 - Very fine sand: 60.2%
 - Mud: 4.6%.
- 1.3.7.27 The average plume envelope shown in Figure 1.126 has a similar extent to the circa 25 km shown in the spring tide scenario B; this is accounted for by the average tidal range coupled with the orientation of the releases. Average concentrations of circa 50 mg/l are evident where the plumes coalesce. This is similar to the unmerged values as the plumes are travelling in concert with the tide (and not towards one another) and at the point that the plume reaches the adjacent discharge it is highly dispersed.
- 1.3.7.28 The suspended sediments for peak flood and ebb tides on the first day are shown in Figure 1.127 and Figure 1.128 respectively. At the centre of the plume envelope peak values are circa 50 mg/l. The plots for day three tides (Figure 1.129 and Figure 1.130) have been selected to illustrate the settlement and mobilisation patterns. With decreased current speed, sediment concentrations reduce as material settles and, as current speed increase through the tidal cycle, settled material is mobilised and concentration increase once again. Under these circumstances peak concentrations are circa 50 mg/l and average values are typically one tenth of this value, with the peaks centred on areas of remobilised material.
- 1.3.7.29 The accumulated deposition from the two operations is not evident in the sedimentation plots Figure 1.131 to Figure 1.134 due to the low levels of sedimentation <0.1 mm. Similar to the piling scenarios A and B, native material from the sediment cell would be entrained into the baseline sediment transport patterns.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

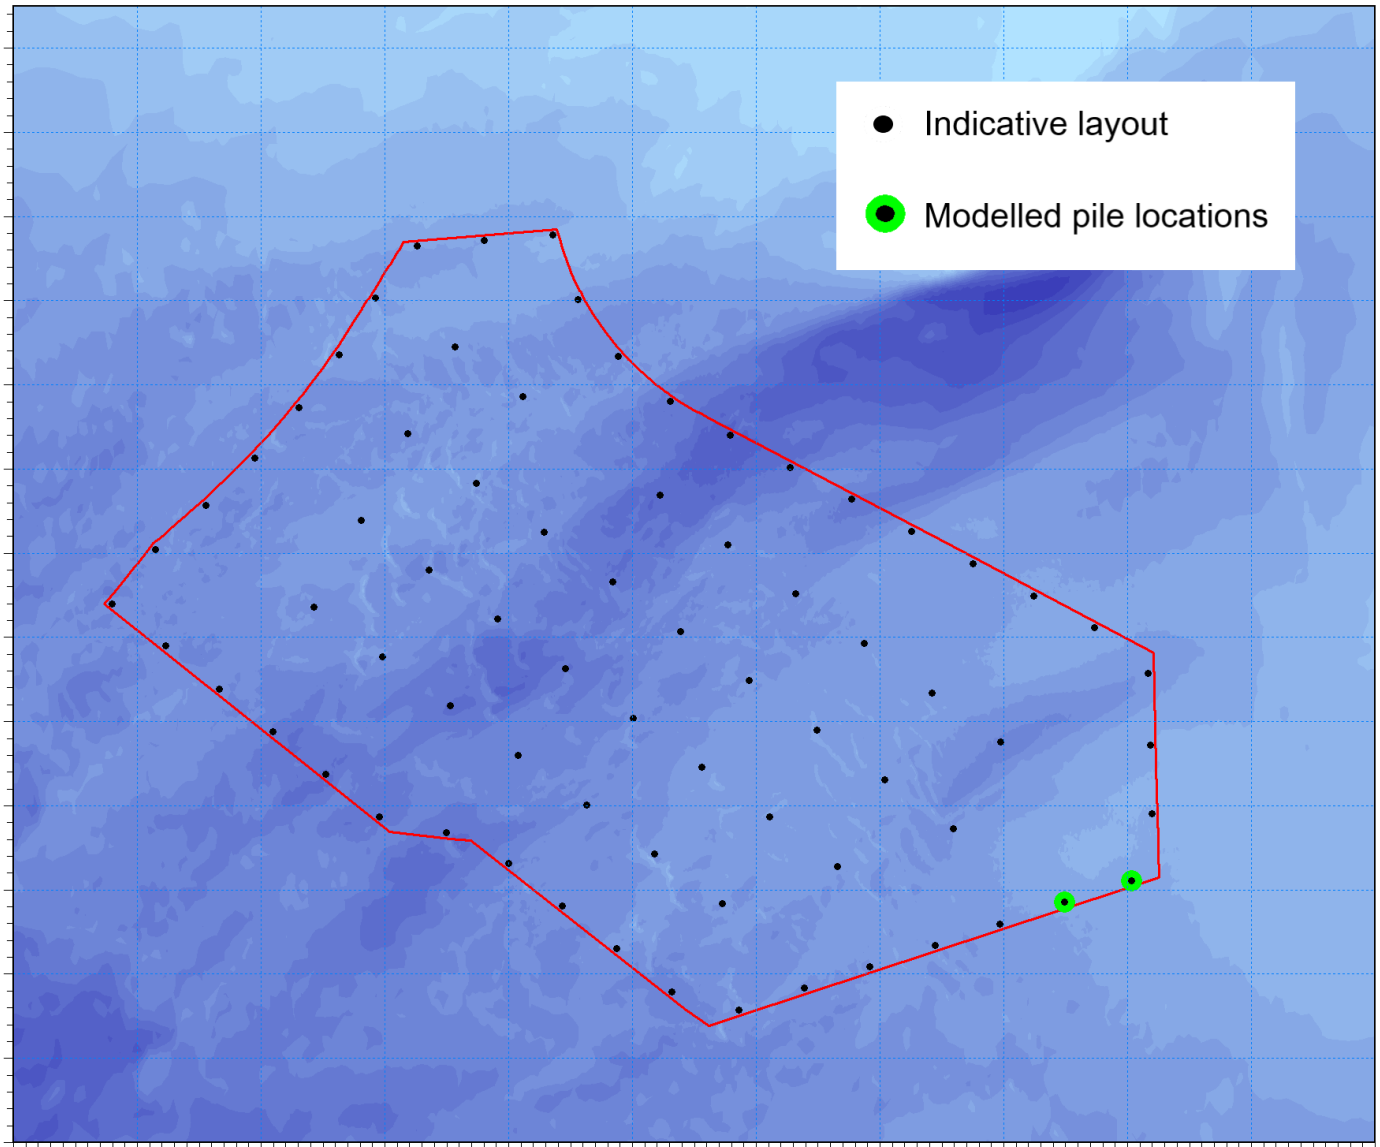


Figure 1.125: Location of modelled piled installation for piling – PEIR scenario C.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

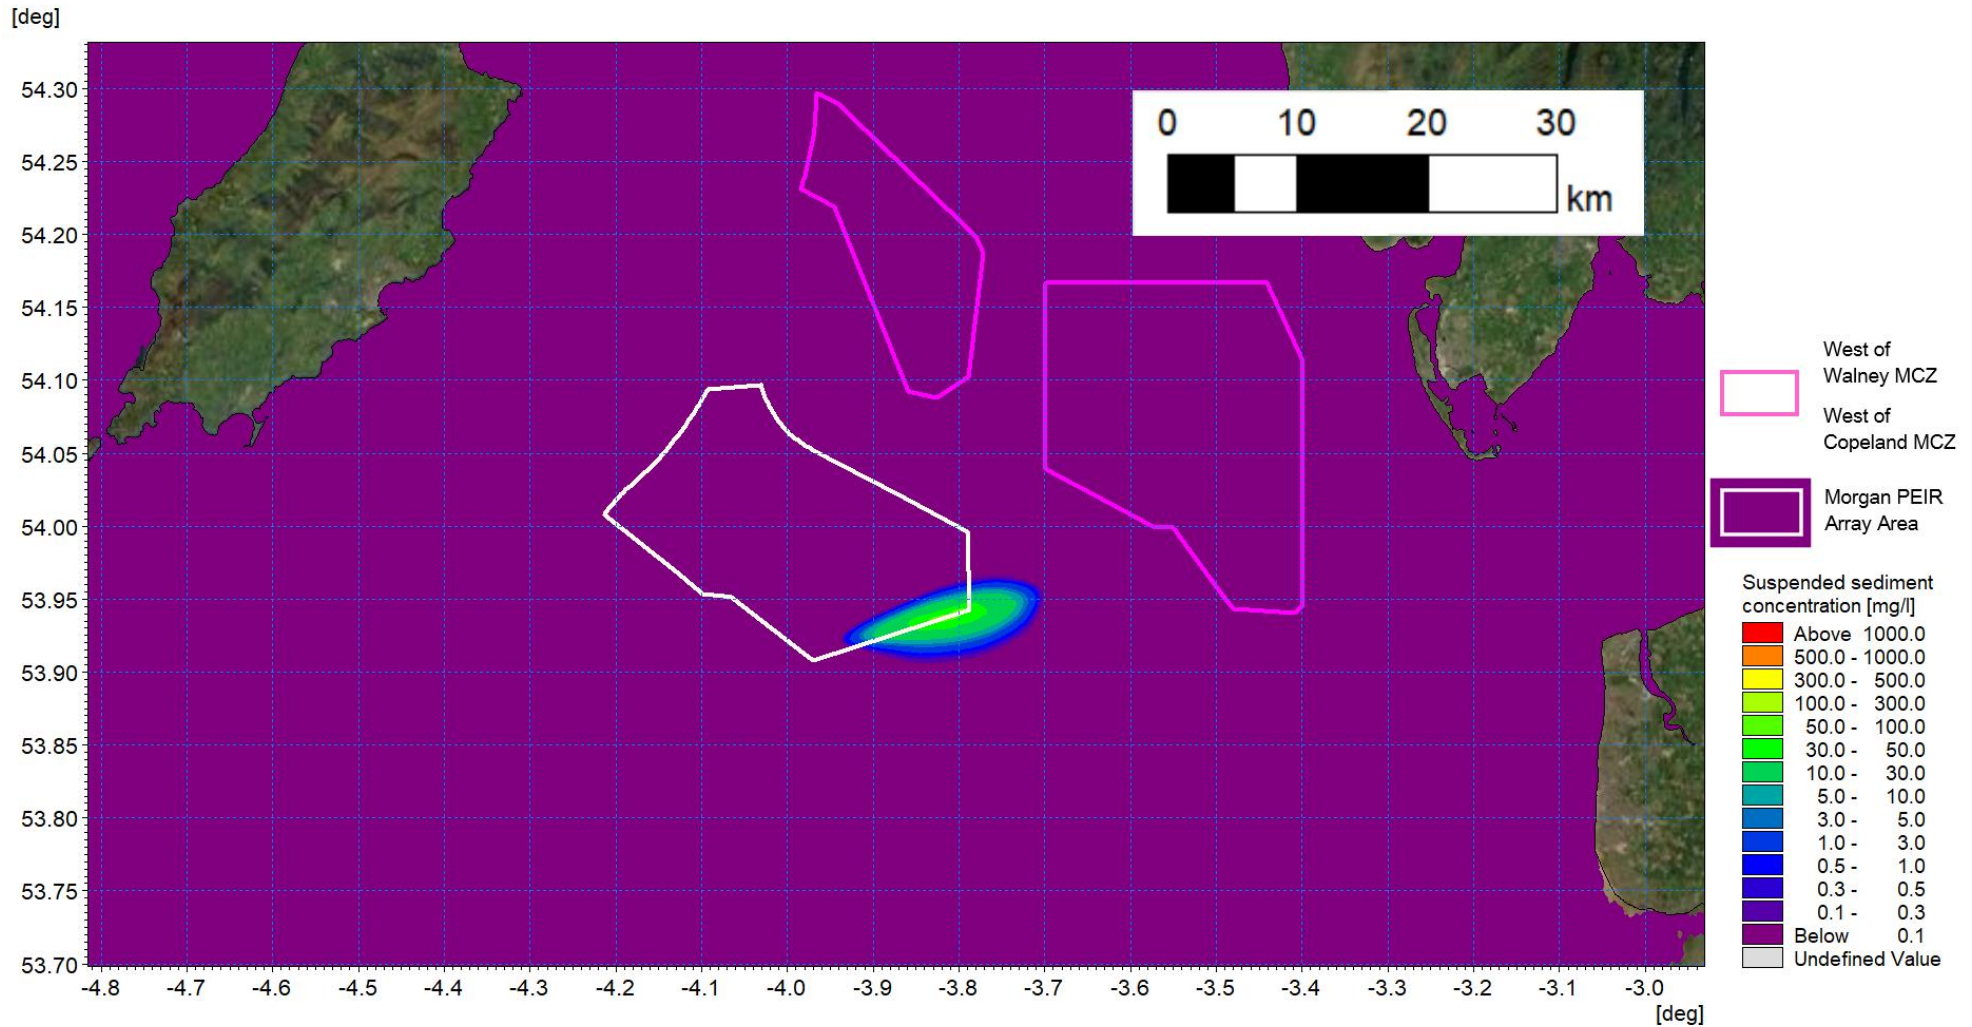


Figure 1.126: Average SSC – pile installation scenario C.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

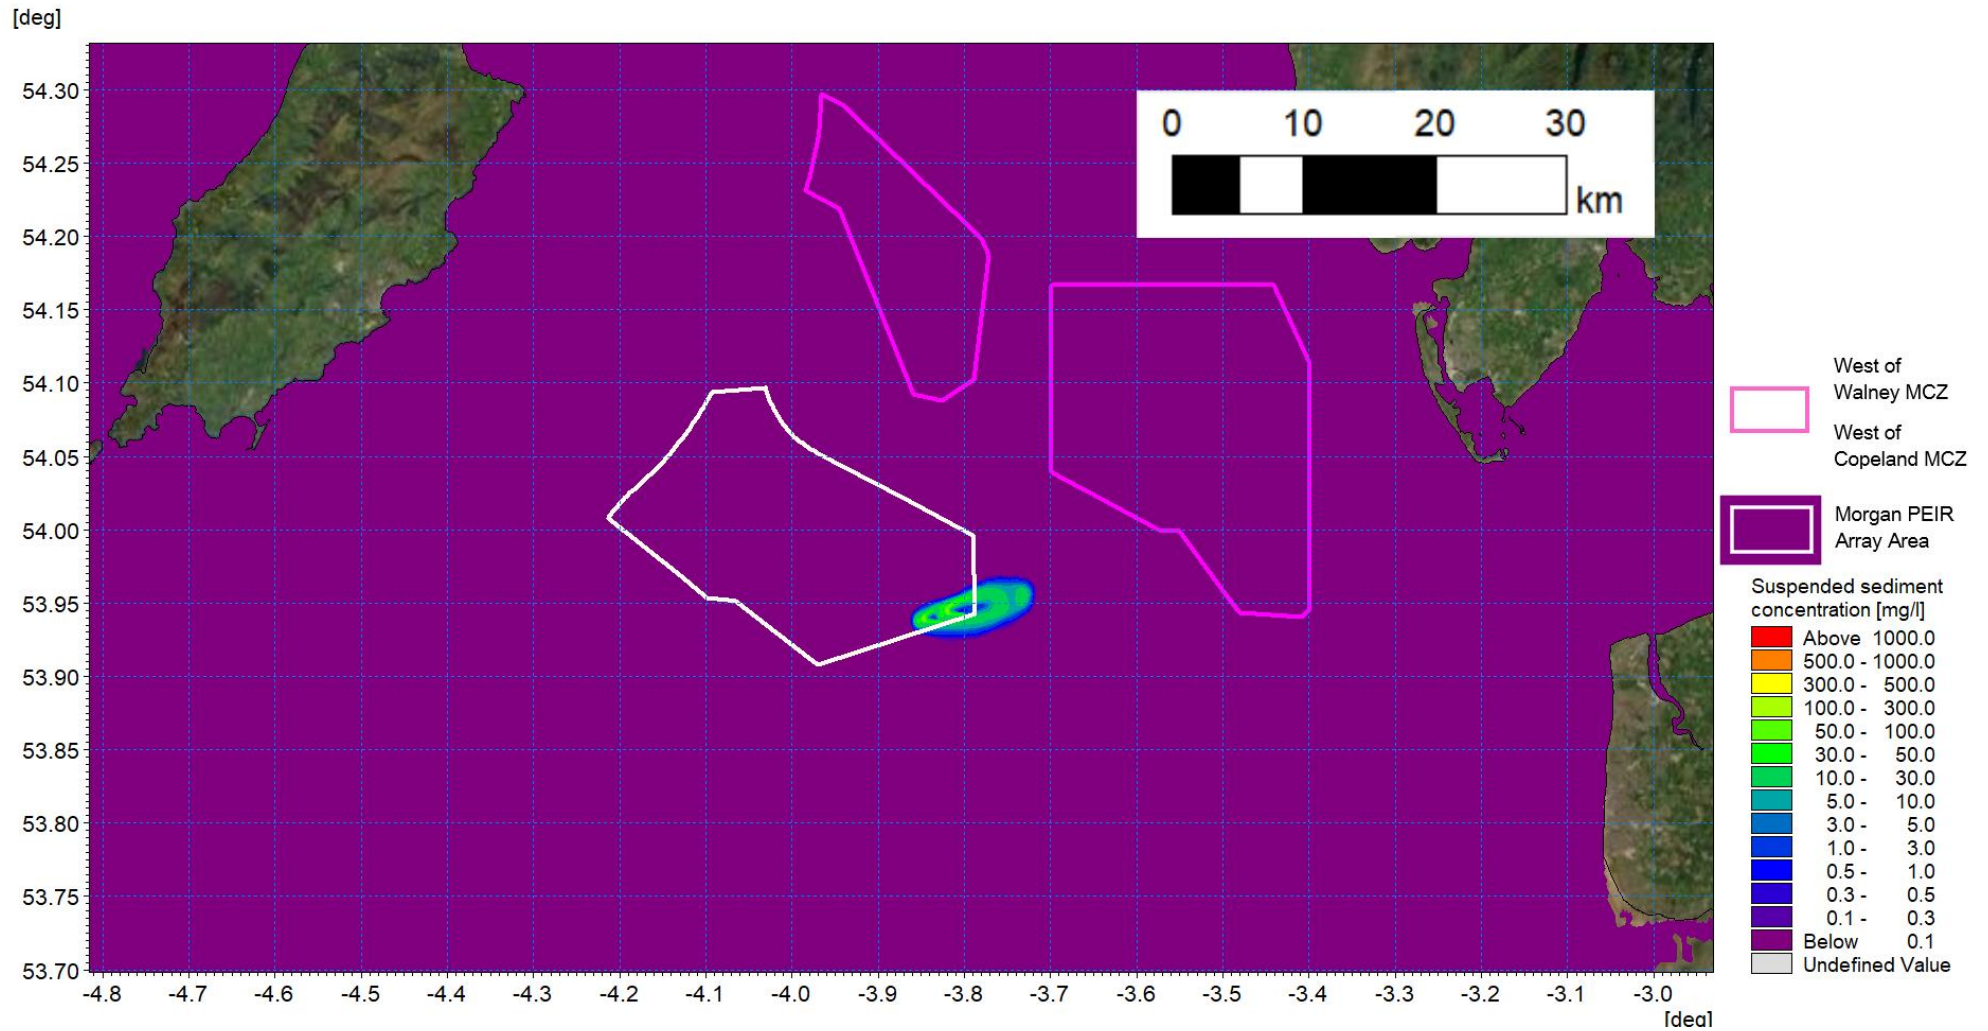


Figure 1.127: SSC day one flood - pile installation scenario C.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

[deg]

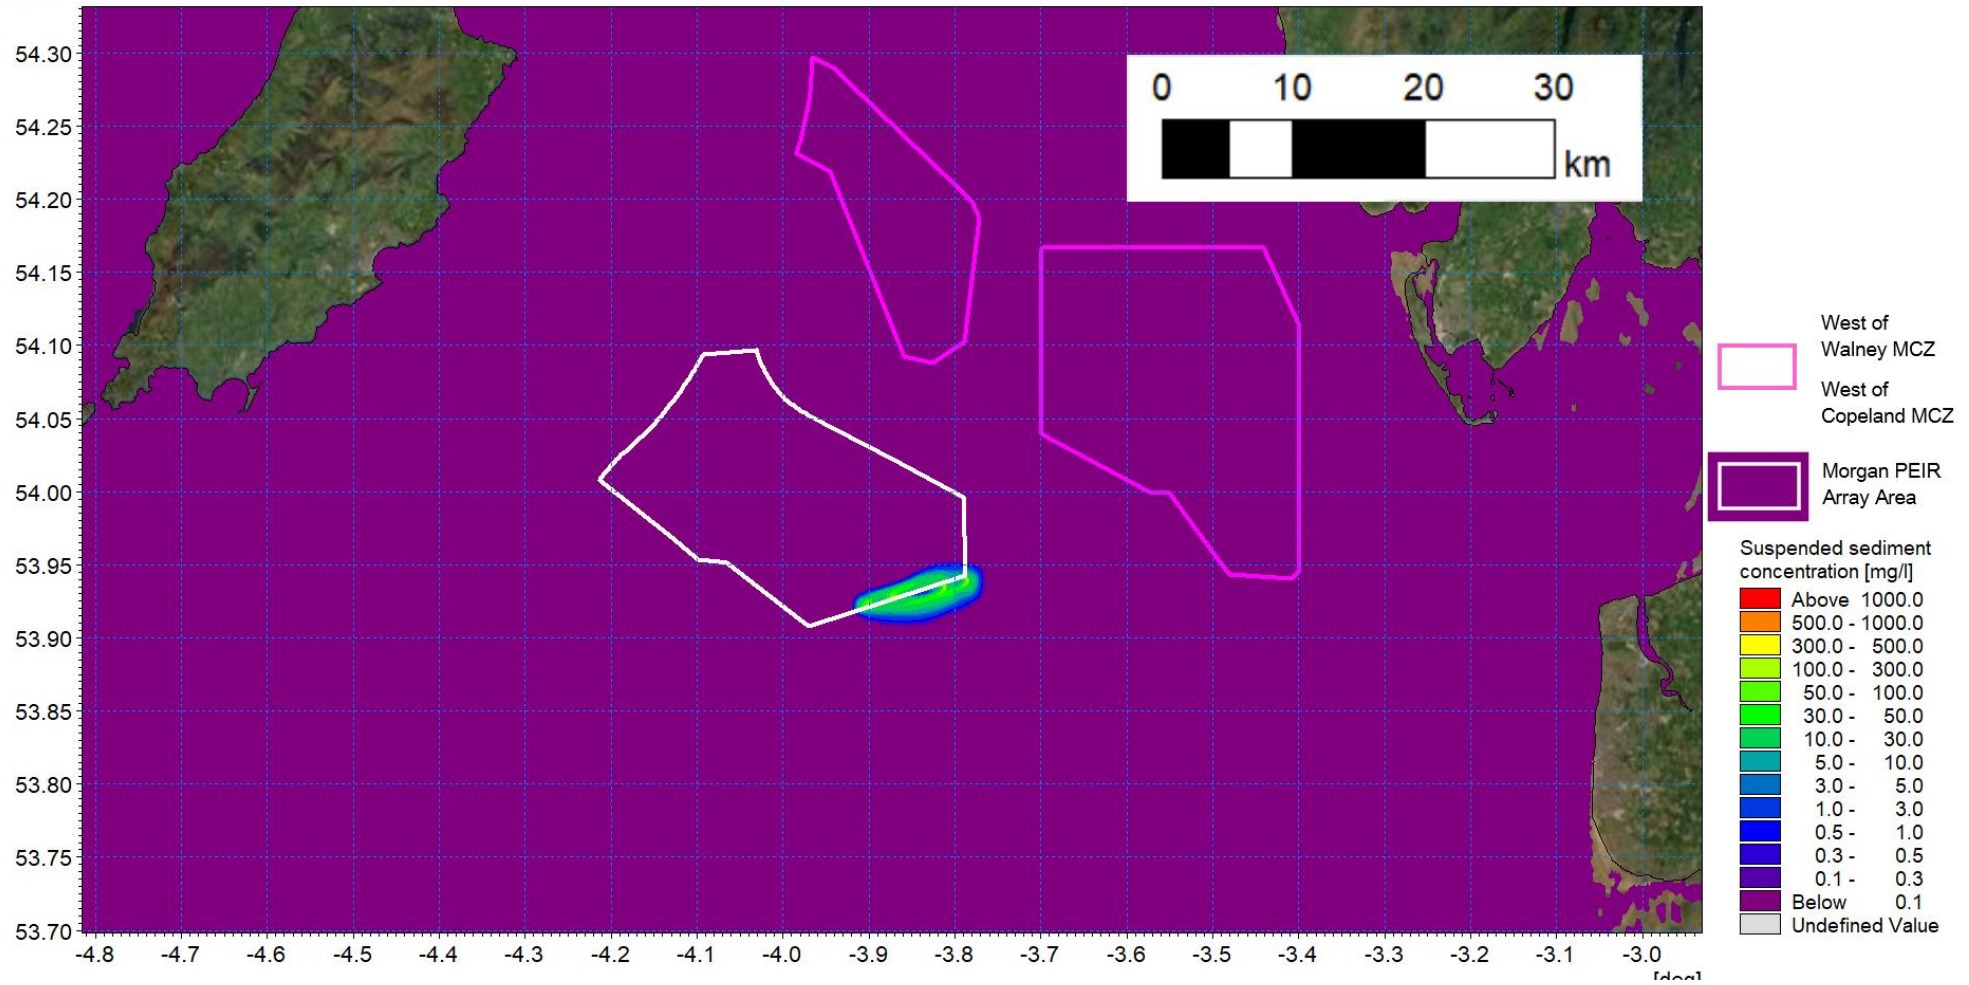


Figure 1.128: SSC day one ebb - pile installation scenario C.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

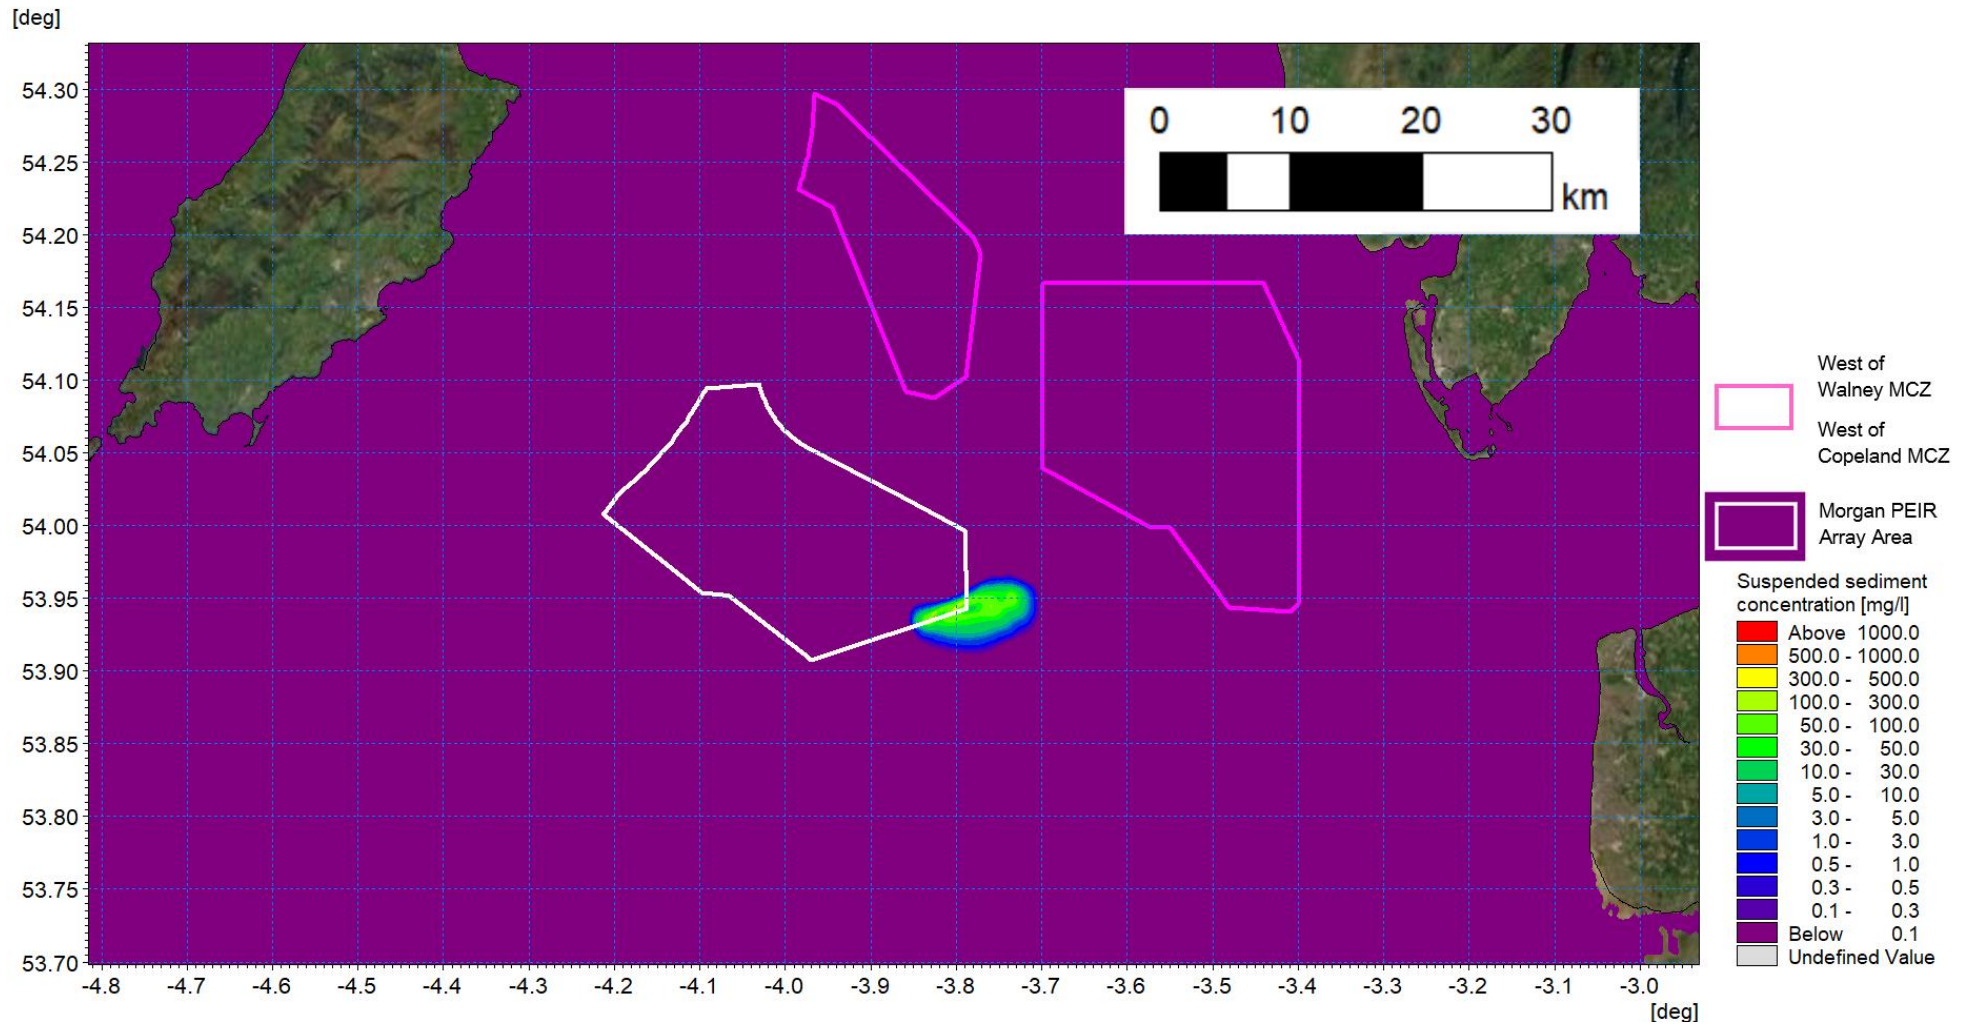


Figure 1.129: SSC day three flood - pile installation scenario C.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

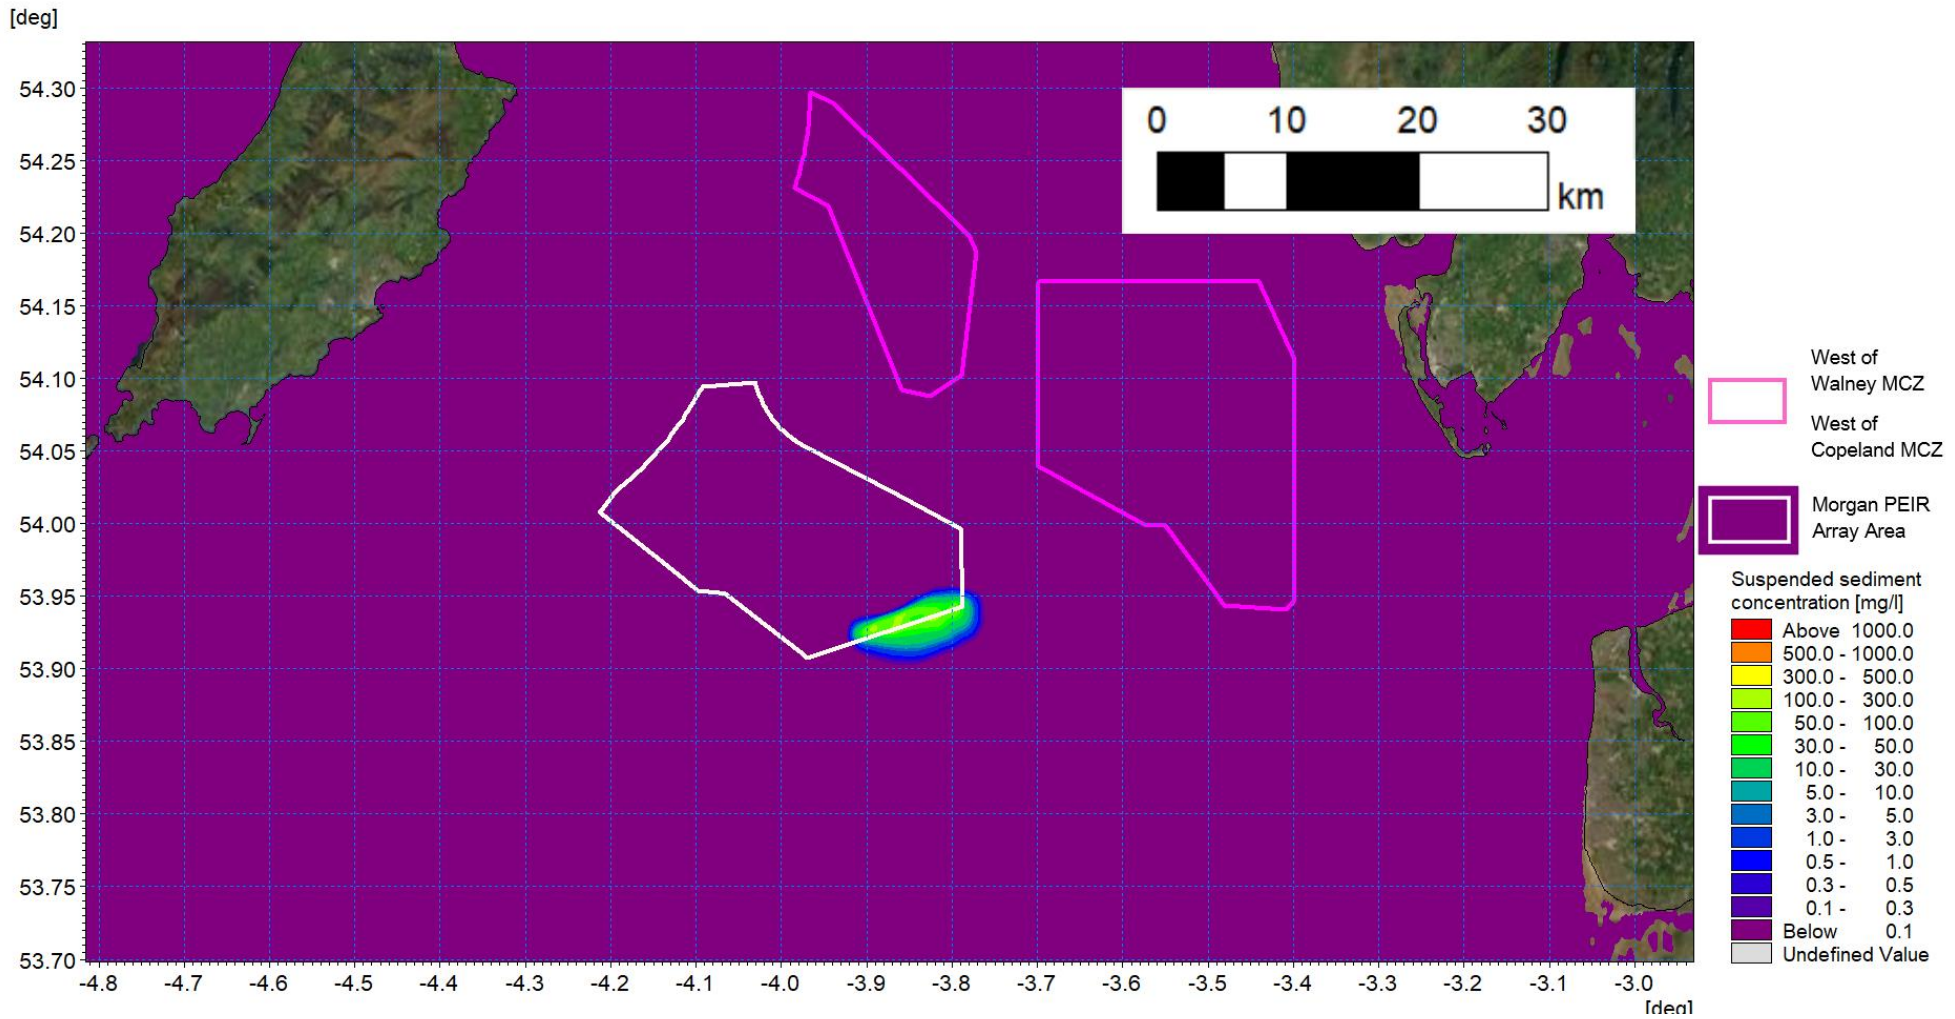


Figure 1.130: SSC day three ebb - pile installation scenario C.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

[deg]

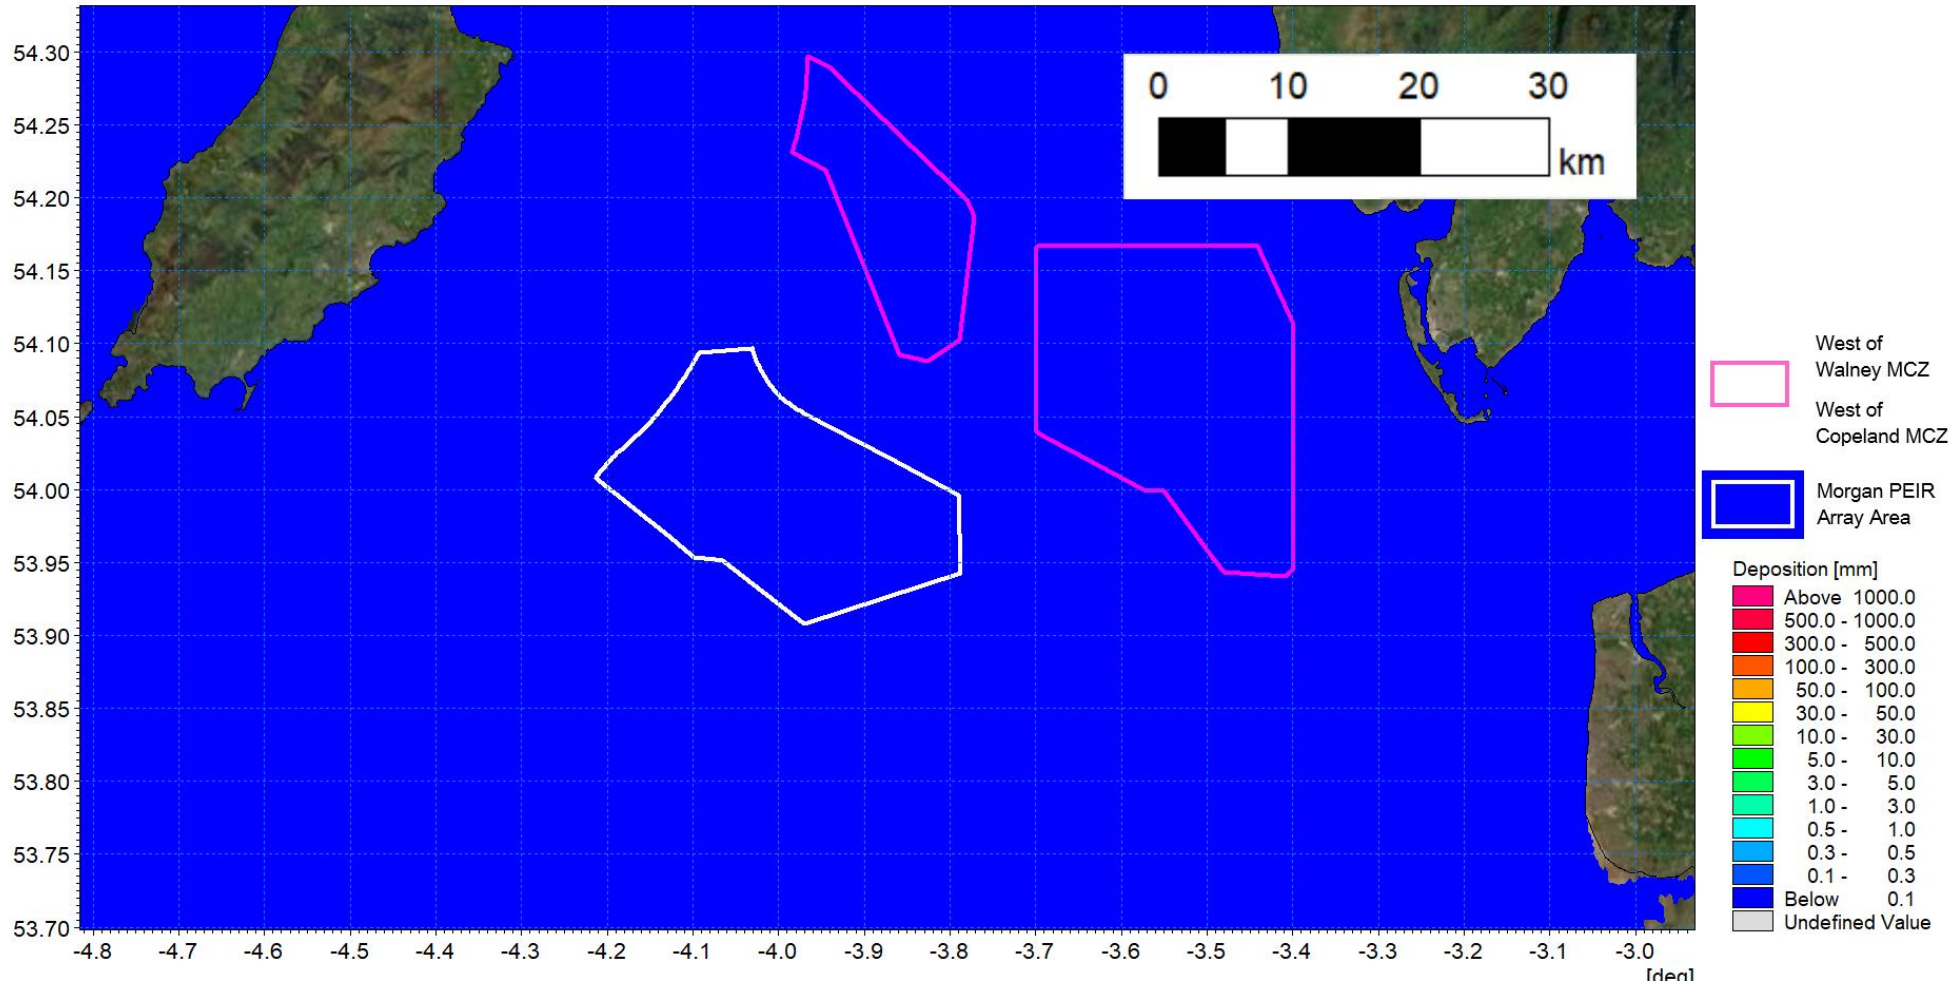


Figure 1.131: Average sedimentation during pile installation – scenario C.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

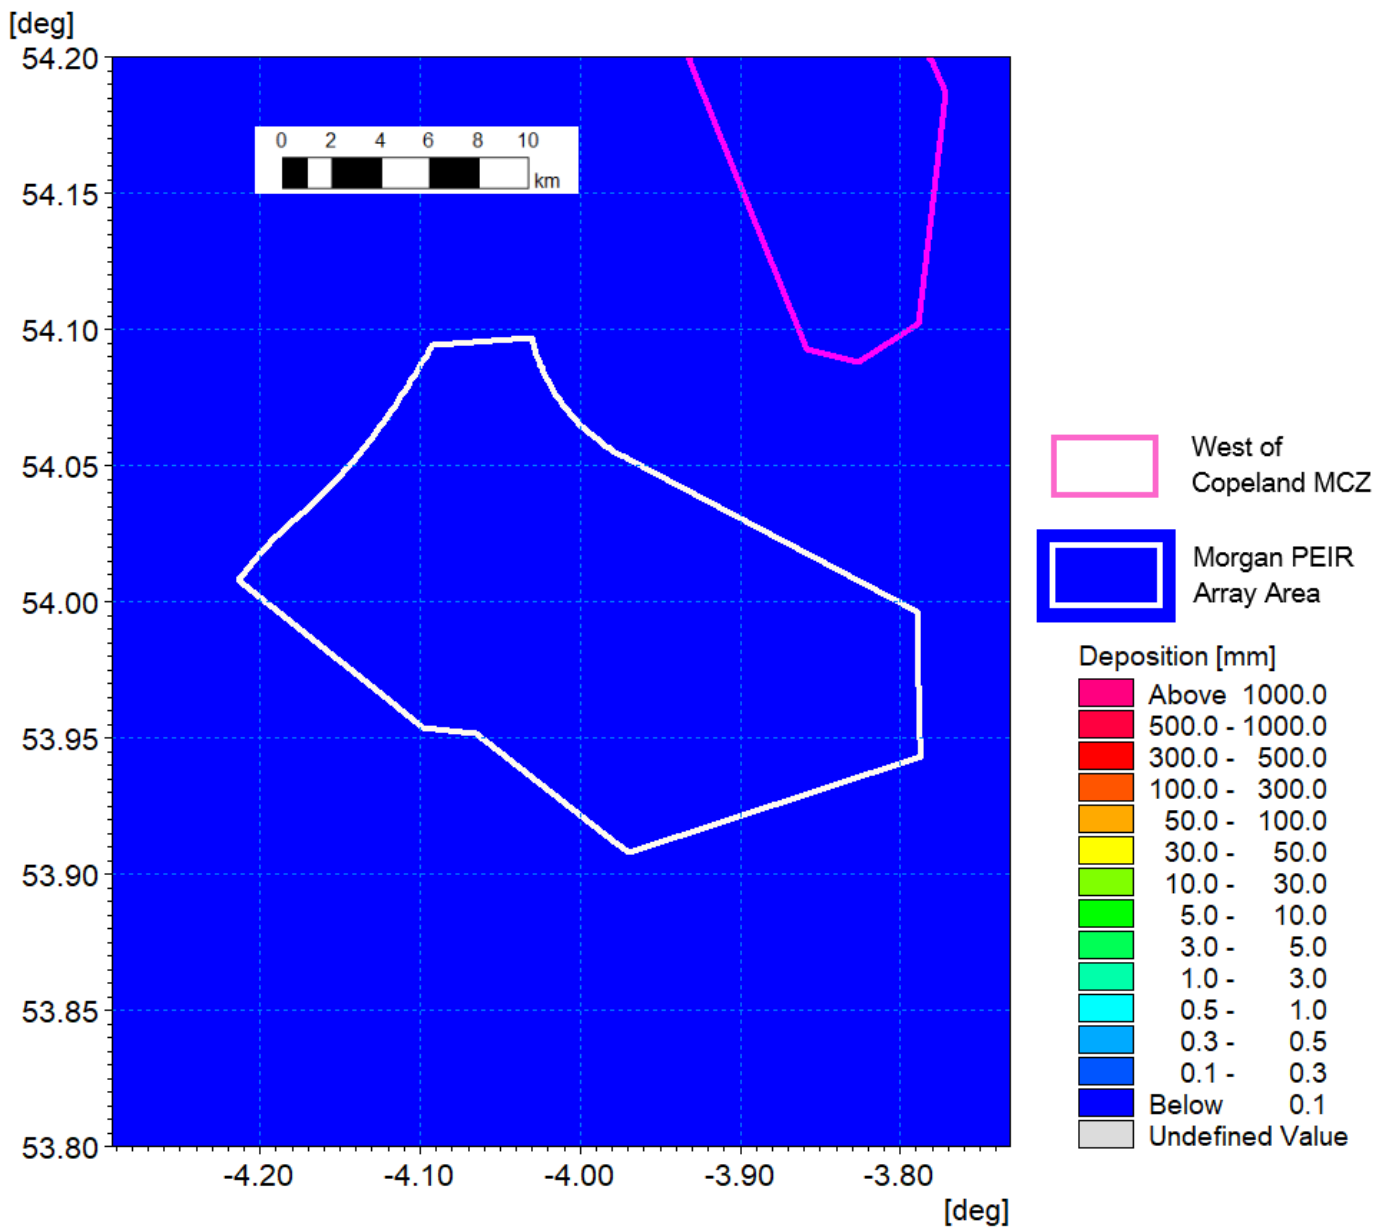


Figure 1.132: Average sedimentation during pile installation – scenario C detail view.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

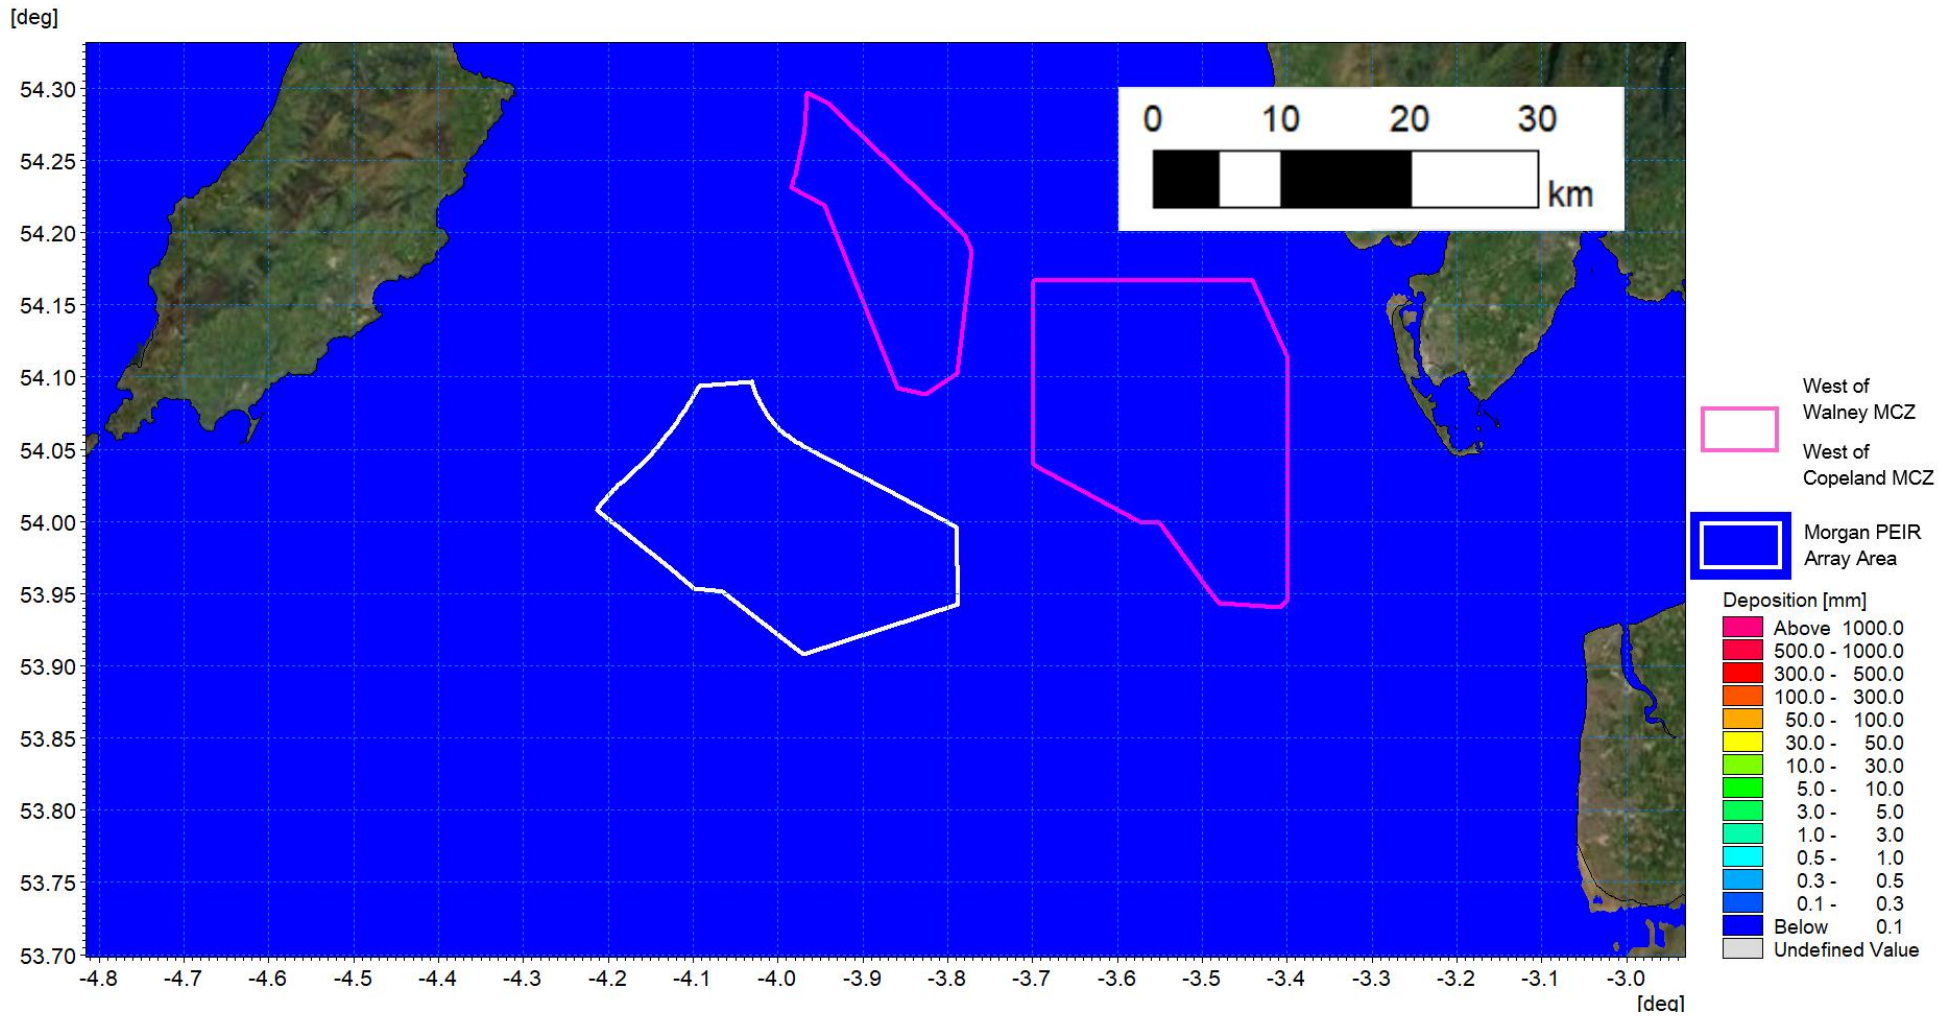


Figure 1.133: Sedimentation one day following cessation of pile installation – scenario C.

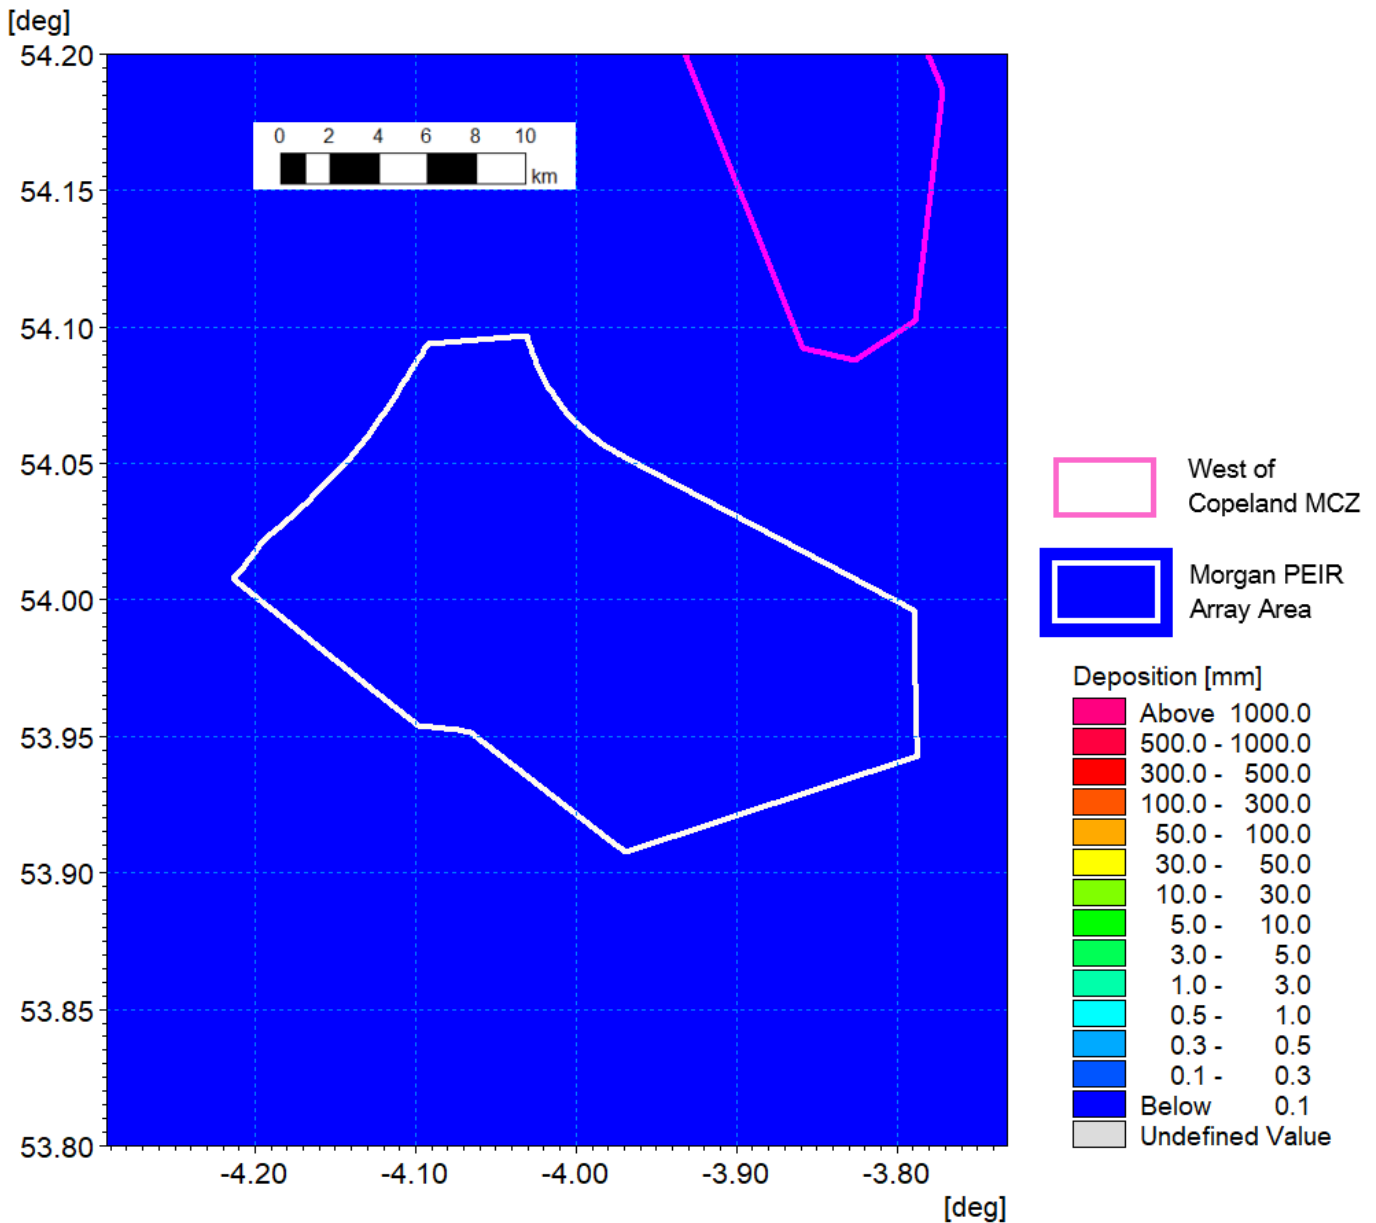


Figure 1.134: Sedimentation one day following cessation of pile installation – scenario C detail view.

Cable installation

1.3.7.30

The third aspect of the construction phase is cable installation, including the inter-array cables and interconnector cables. For the MDS in terms of release of sediment into the water column, cables were assumed to be trenched. A number of trenching techniques may be suited to the ground conditions; however, it was assumed within the modelling that a trench of material of the maximum depth of 3 m as presented in Volume 1, Chapter 3: Project description for the PEIR was mobilised into the lower water column as a result of the burial process, in line with the Business Enterprise and Regulatory Reform (BERR) guidelines (BERR, 2008). In reality the final installation technique may result in less sediment being mobilised and the maximum depth may not always be achieved with a corresponding reduction in the amount of material disturbed.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

- 1.3.7.31 Similar to the pile installation, the model simulations used the sediment grading determined from BGS sediment sampling data. However, the modelling was undertaken using the MIKE PT module. This module was implemented as it had the advantage that it could be used to describe the transport of material released in a specific part of the water column. In this way, the dispersion would not be over-estimated or the corresponding sedimentation under-estimated by the application of a current profile through the water column.
- 1.3.7.32 Trenching rates can vary widely depending on the bed material and equipment used; typically, rates are between 25 m/h and 780 m/h. For the simulation, a relatively high rate of 450 m/h was used over an extensive sample route ensuring that material was released at all tidal states over a number of tides and ensuring initial concentrations were not underestimated.

Inter-array cables

- 1.3.7.33 Inter-array and interconnector cable installation will be undertaken along a number of paths which connect groups of wind turbines to a local hub (i.e. an OSP) or which connect two OSPs to each other. Each route would be undertaken as a separate operation and thus a single example has been selected to quantify the potential suspended sediment levels during the installation. Figure 1.135 shows an indicative wind turbine layout with the modelled inter-array cable route shown in green. This route was run from the north of the site, perpendicular to the tidal flow, then in line with tidal flows in an easterly direction. This ensured that the full extent of the site and neap tidal conditions were incorporated into the simulation.
- 1.3.7.34 The inter-array cabling was undertaken along the indicated route with a trench 3 m wide at the bed and 3 m in depth with a triangular cross-section in accordance with a trenching plough. Thus circa 98,400 m³ of material was mobilised during the 2-day simulation along the 21.9 km route. The sediment grading characteristics were derived from sediment sampling along the route and defined by the following sand fractions:
- Gravel: 17%
 - Coarse sand: 10.6%
 - Medium sand: 63.8%
 - Fine sand: 5.2%
 - Very fine sand: 3.4%.
- 1.3.7.35 The model results presented follow the same format as those for the piled foundation installation described in the previous section. Figure 1.136 shows the average SSC over the course of the trenching phase. It is clear that the sediment is dispersed on subsequent tides as the plume envelope illustrates the flood and ebb tidal excursions with peak values of 300 mg/l to 500 mg/l.
- 1.3.7.36 Figure 1.137 to Figure 1.142 show the suspended sediment patterns over the course of this operation, day two, three and four mid flood and ebb tides respectively. The volume of material mobilised is relatively large, and elevated tidal currents disperse the material giving rise to concentrations of up to 500 mg/l. As was evident in the previous operations, the material settles during slack water and then is re-suspended to form a secondary plume which becomes amalgamated. This is further illustrated in Figure 1.143 and Figure 1.144 which show the average sedimentation and the sedimentation one day following cessation at slack water. The sedimentation is greatest at the location of the trenching and may be up to 50 mm in depth where the

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

coarser material has settled within close proximity, circa 100 m. The depths reduce significantly with distance to <0.5 mm which is indicated by the use of a log scale in all figures. Although the material is dispersed, it remains within the sediment cell and is therefore retained within the transport system.

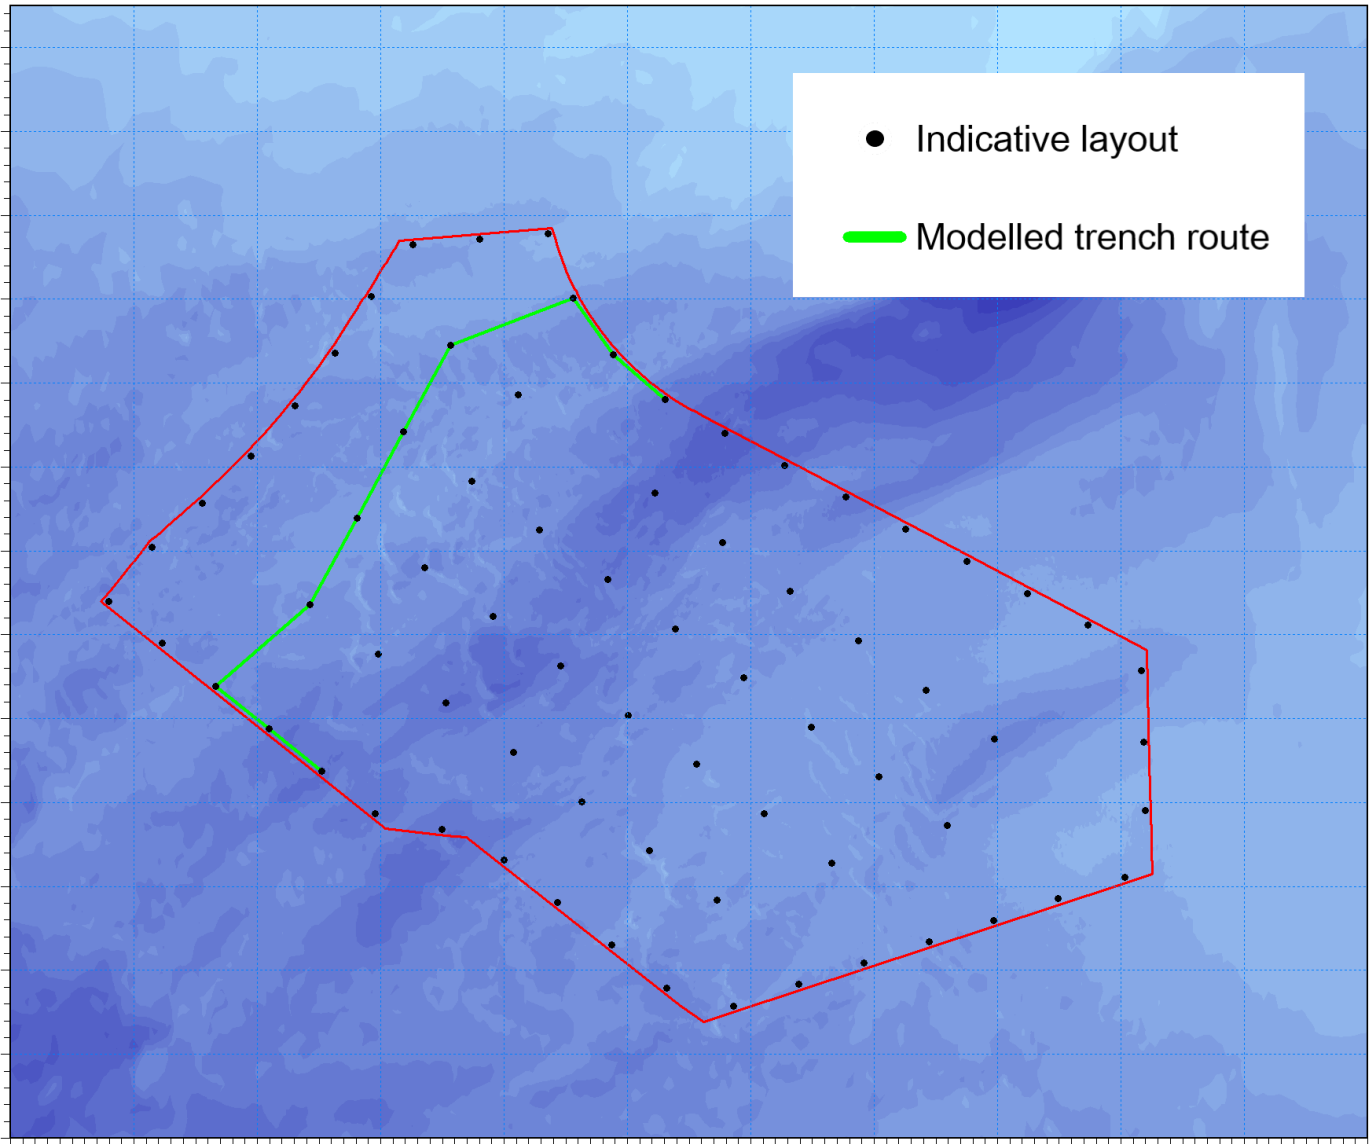


Figure 1.135: Modelled inter-array cable route for PEIR.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

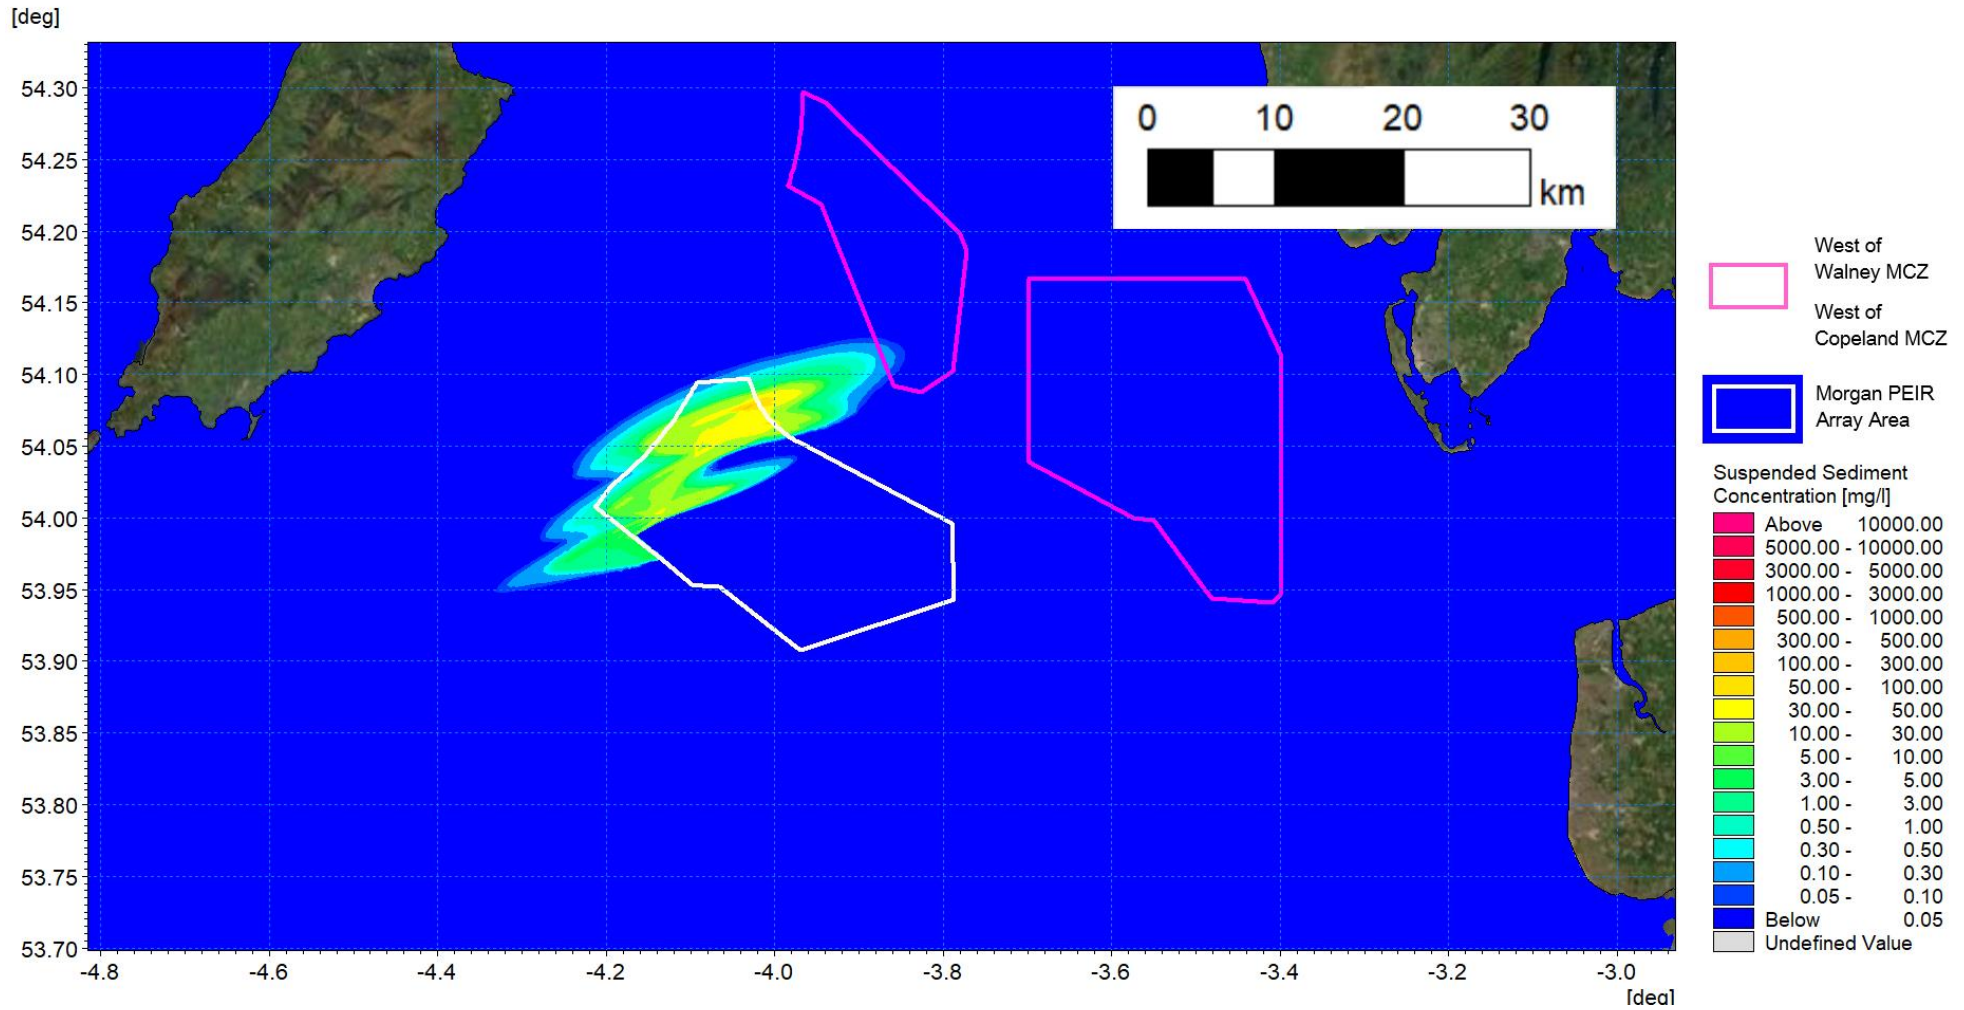


Figure 1.136: Average SSC during inter-array cable trenching.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

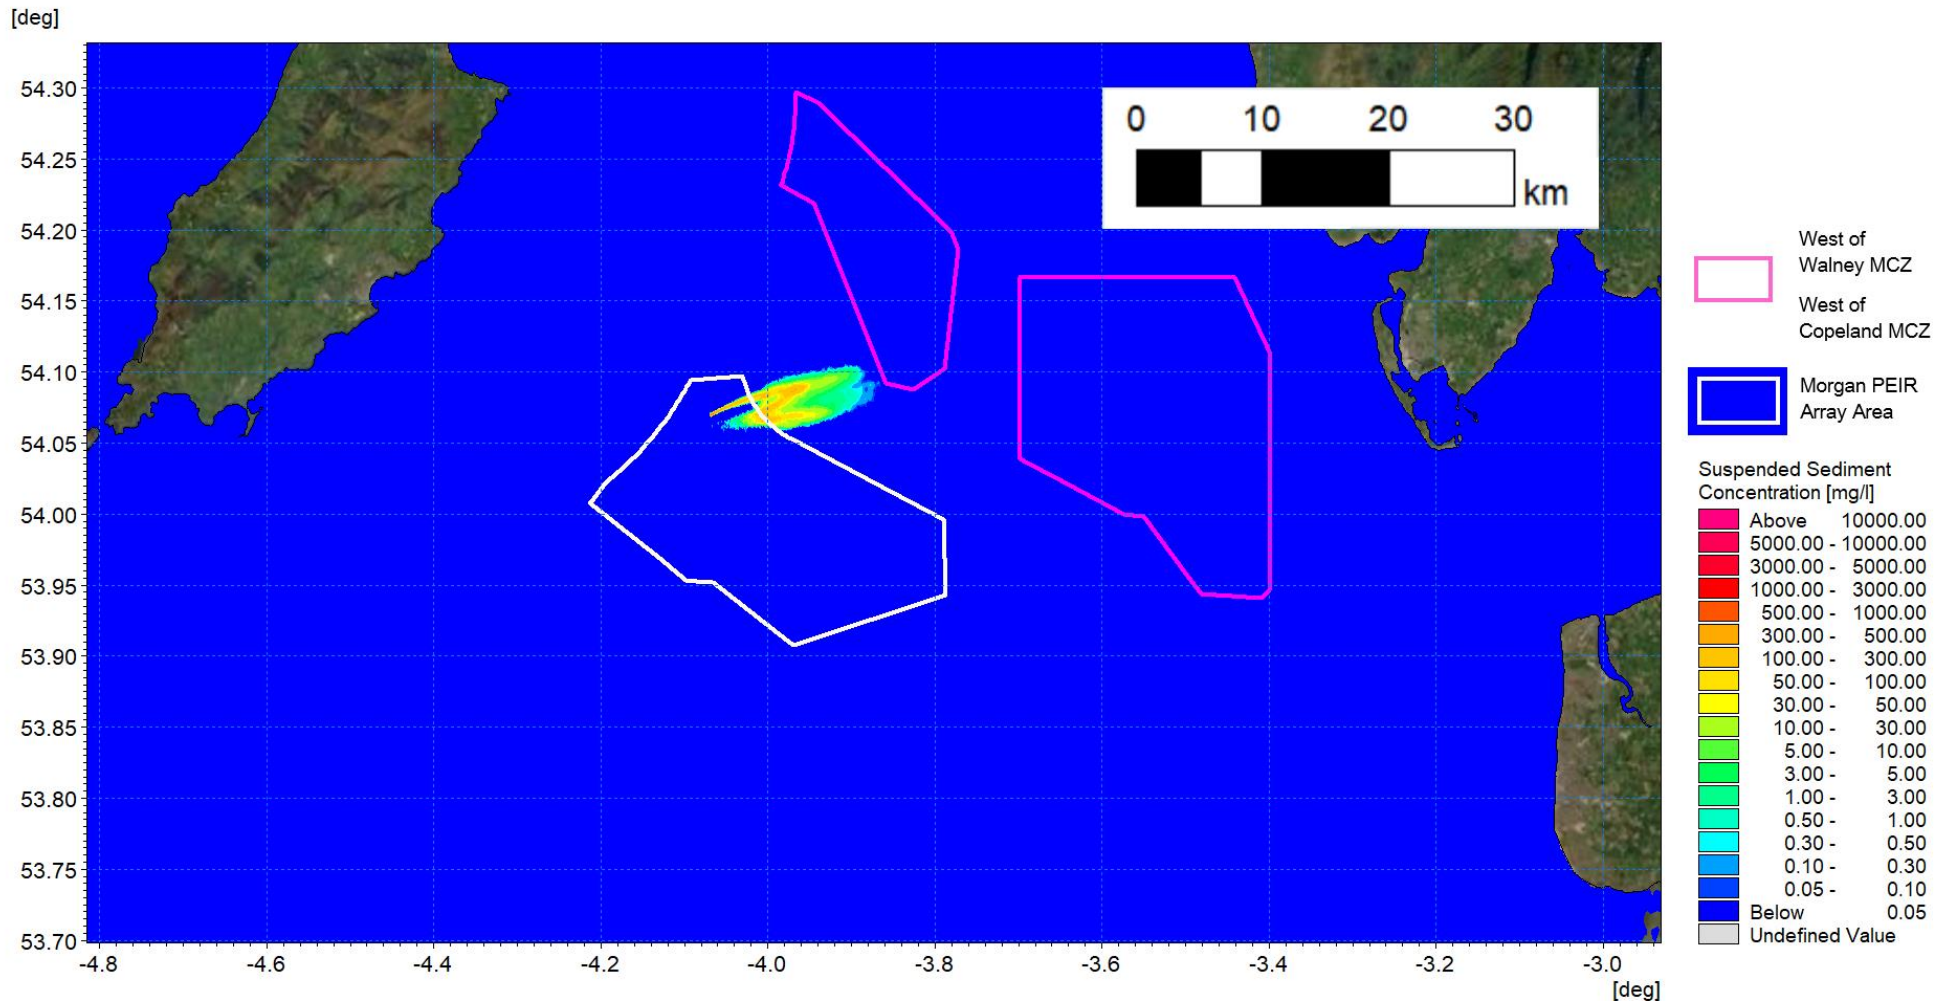


Figure 1.137: SSC day two flood – inter-array cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

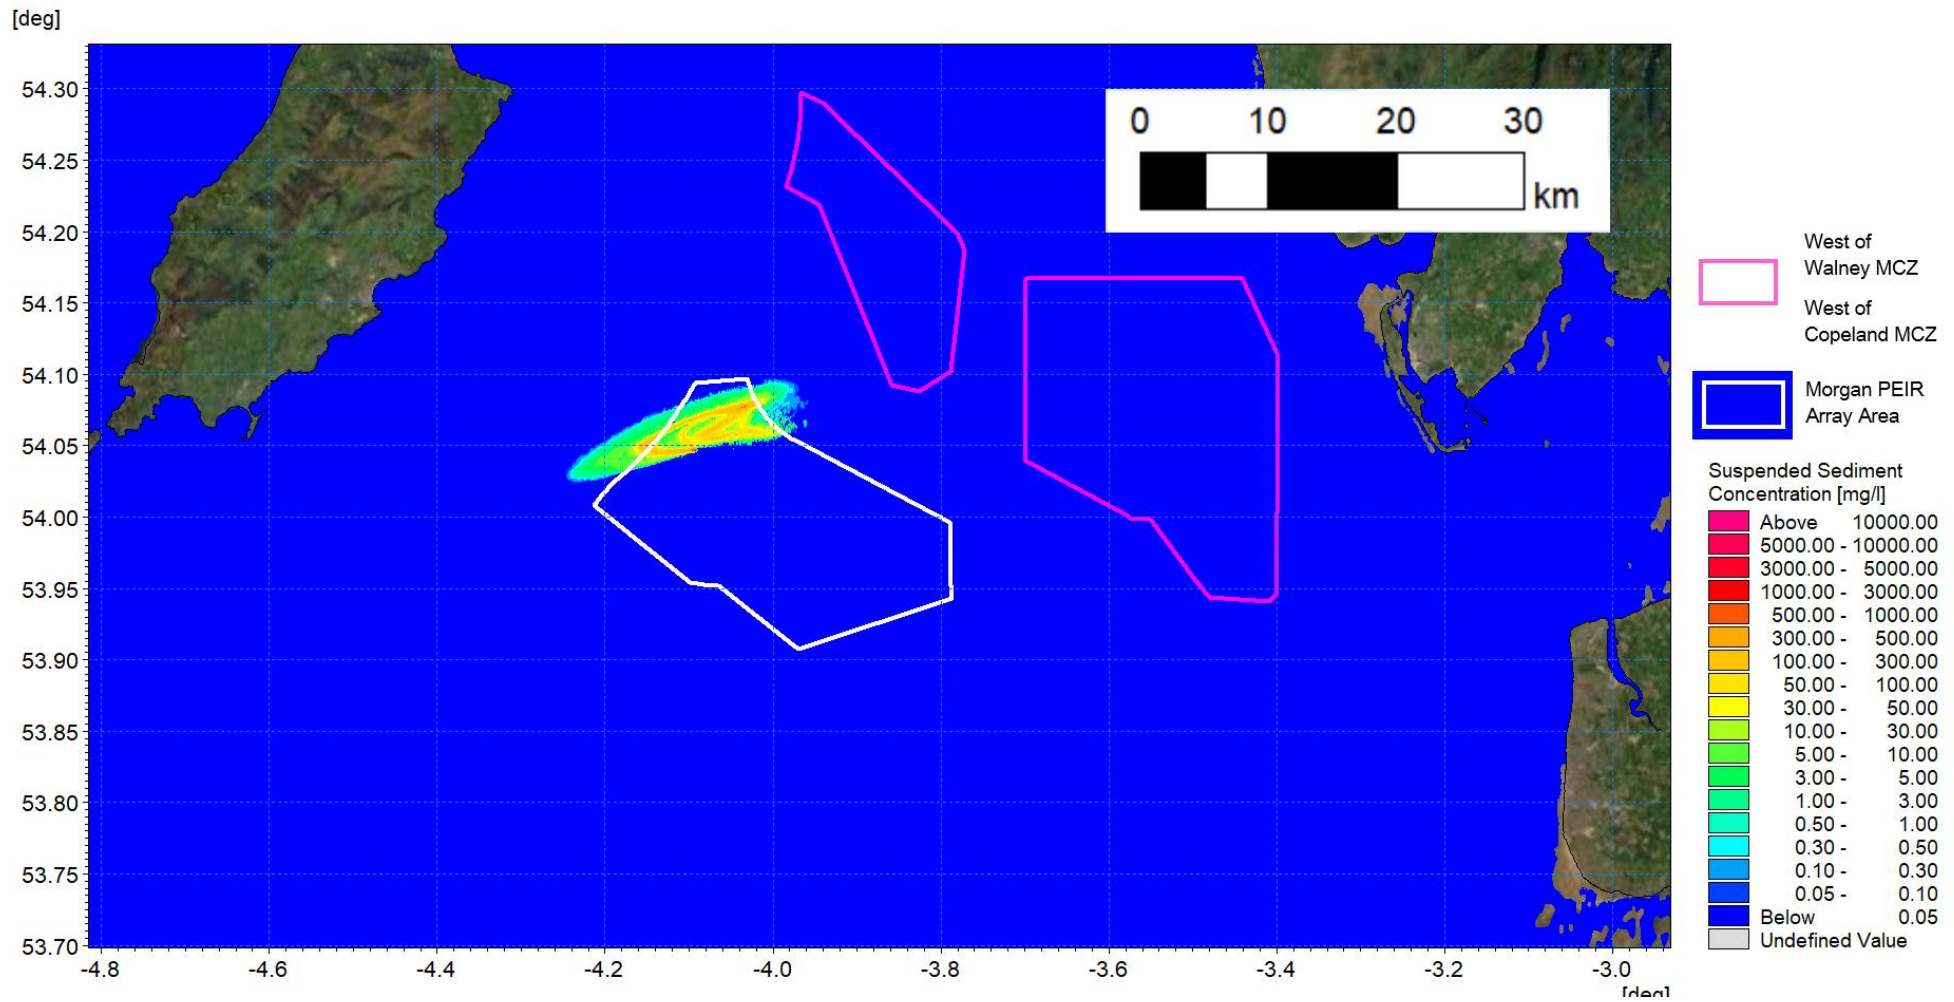


Figure 1.138: SSC day two ebb – inter-array cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

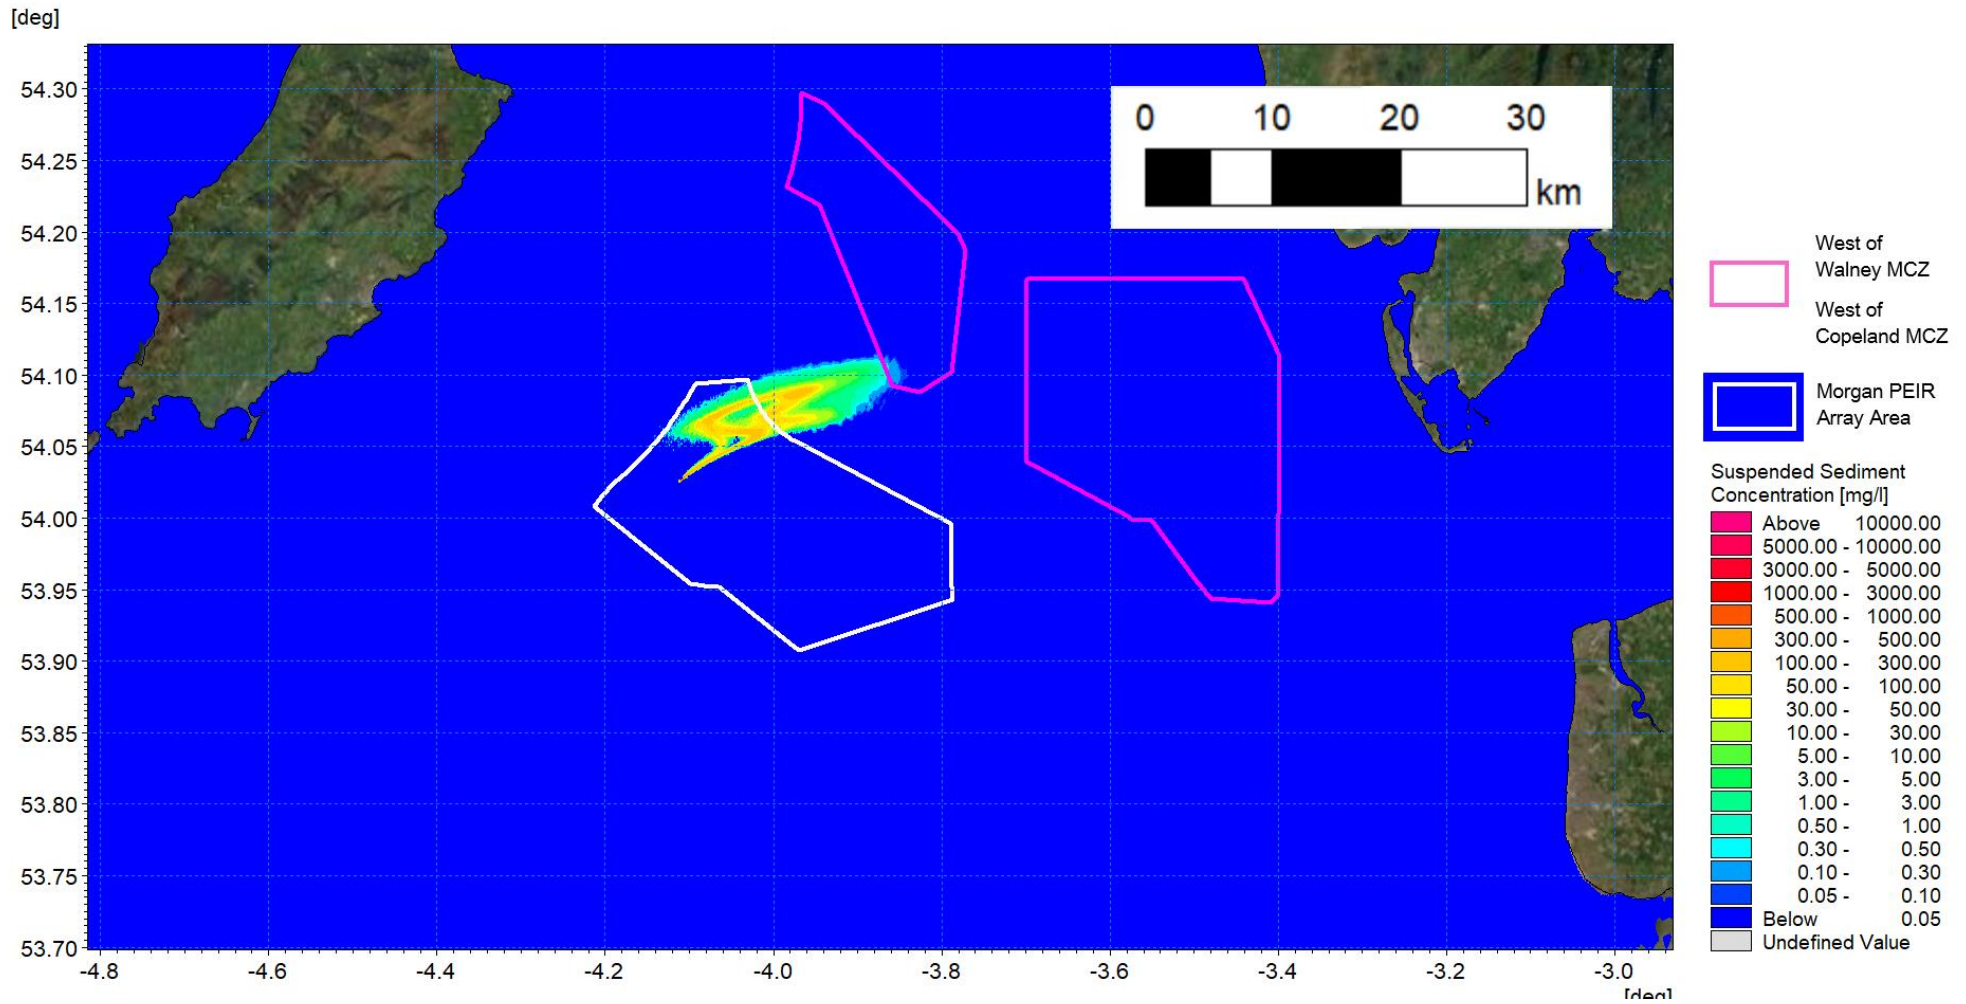


Figure 1.139: SSC day three flood – inter-array cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

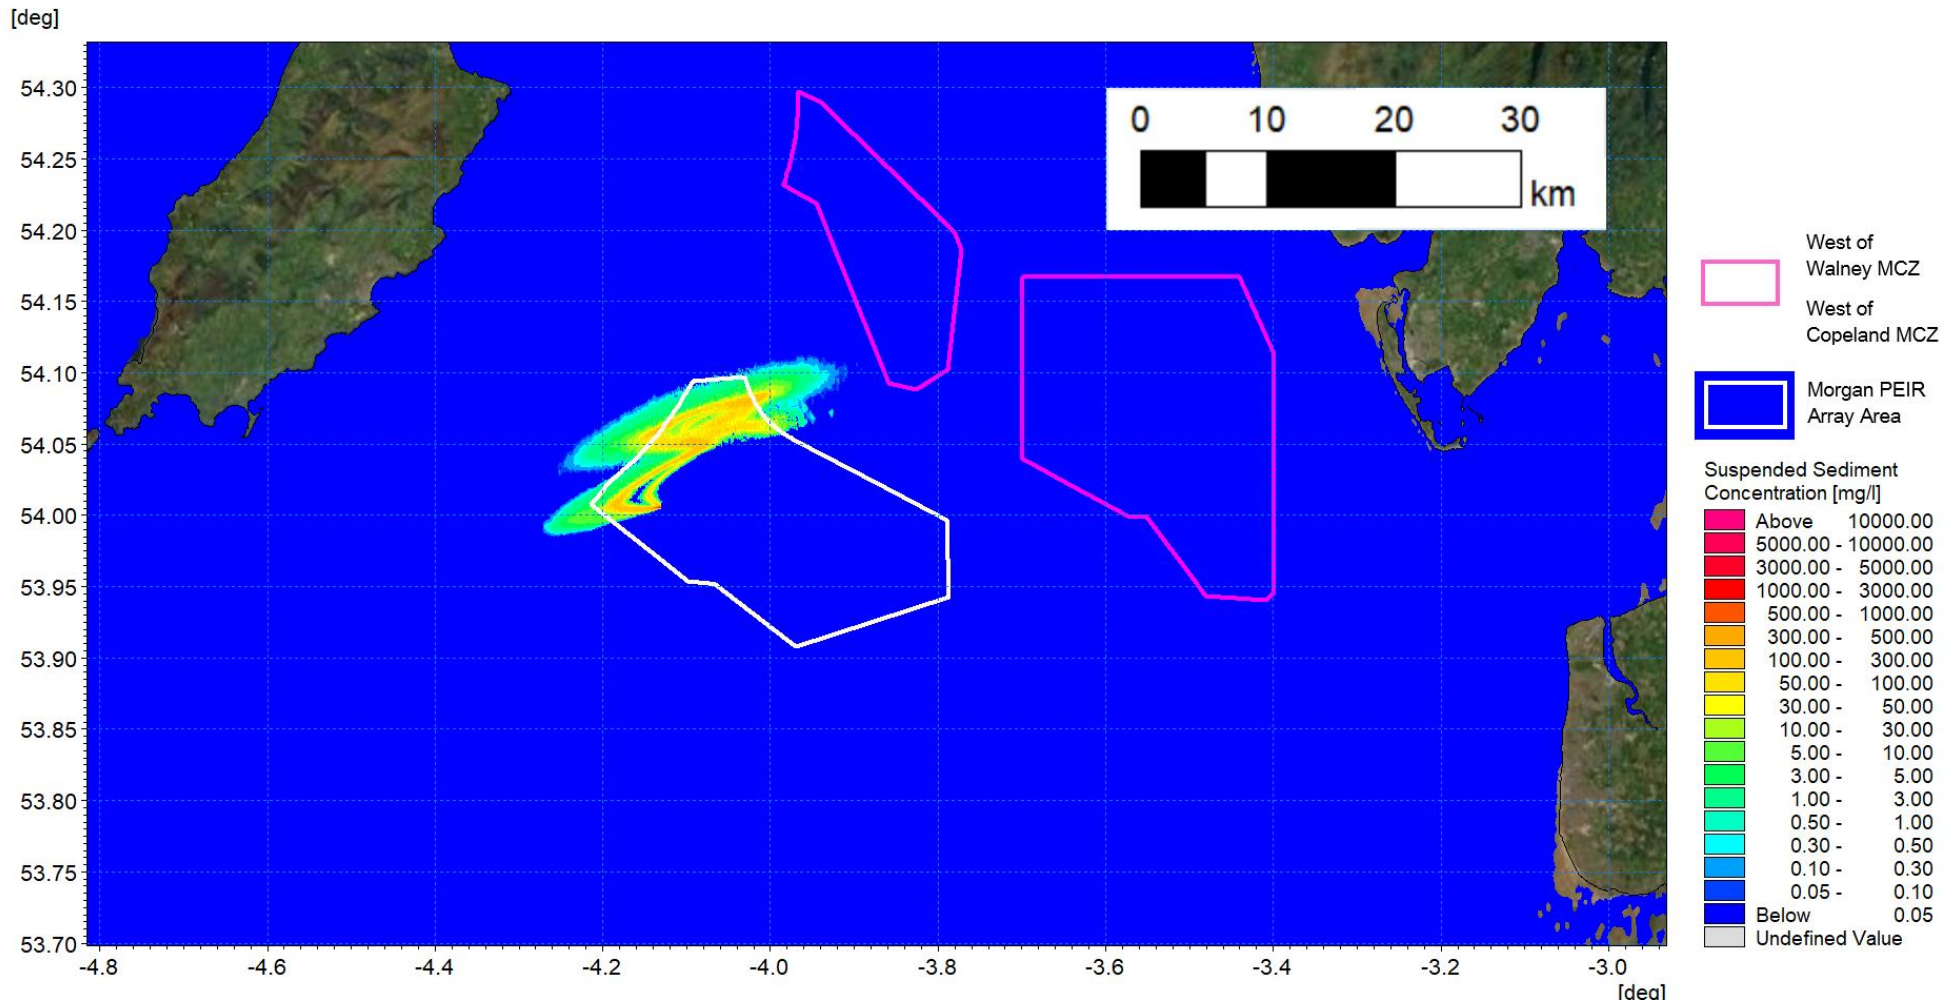


Figure 1.140: SSC day three ebb – inter-array cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

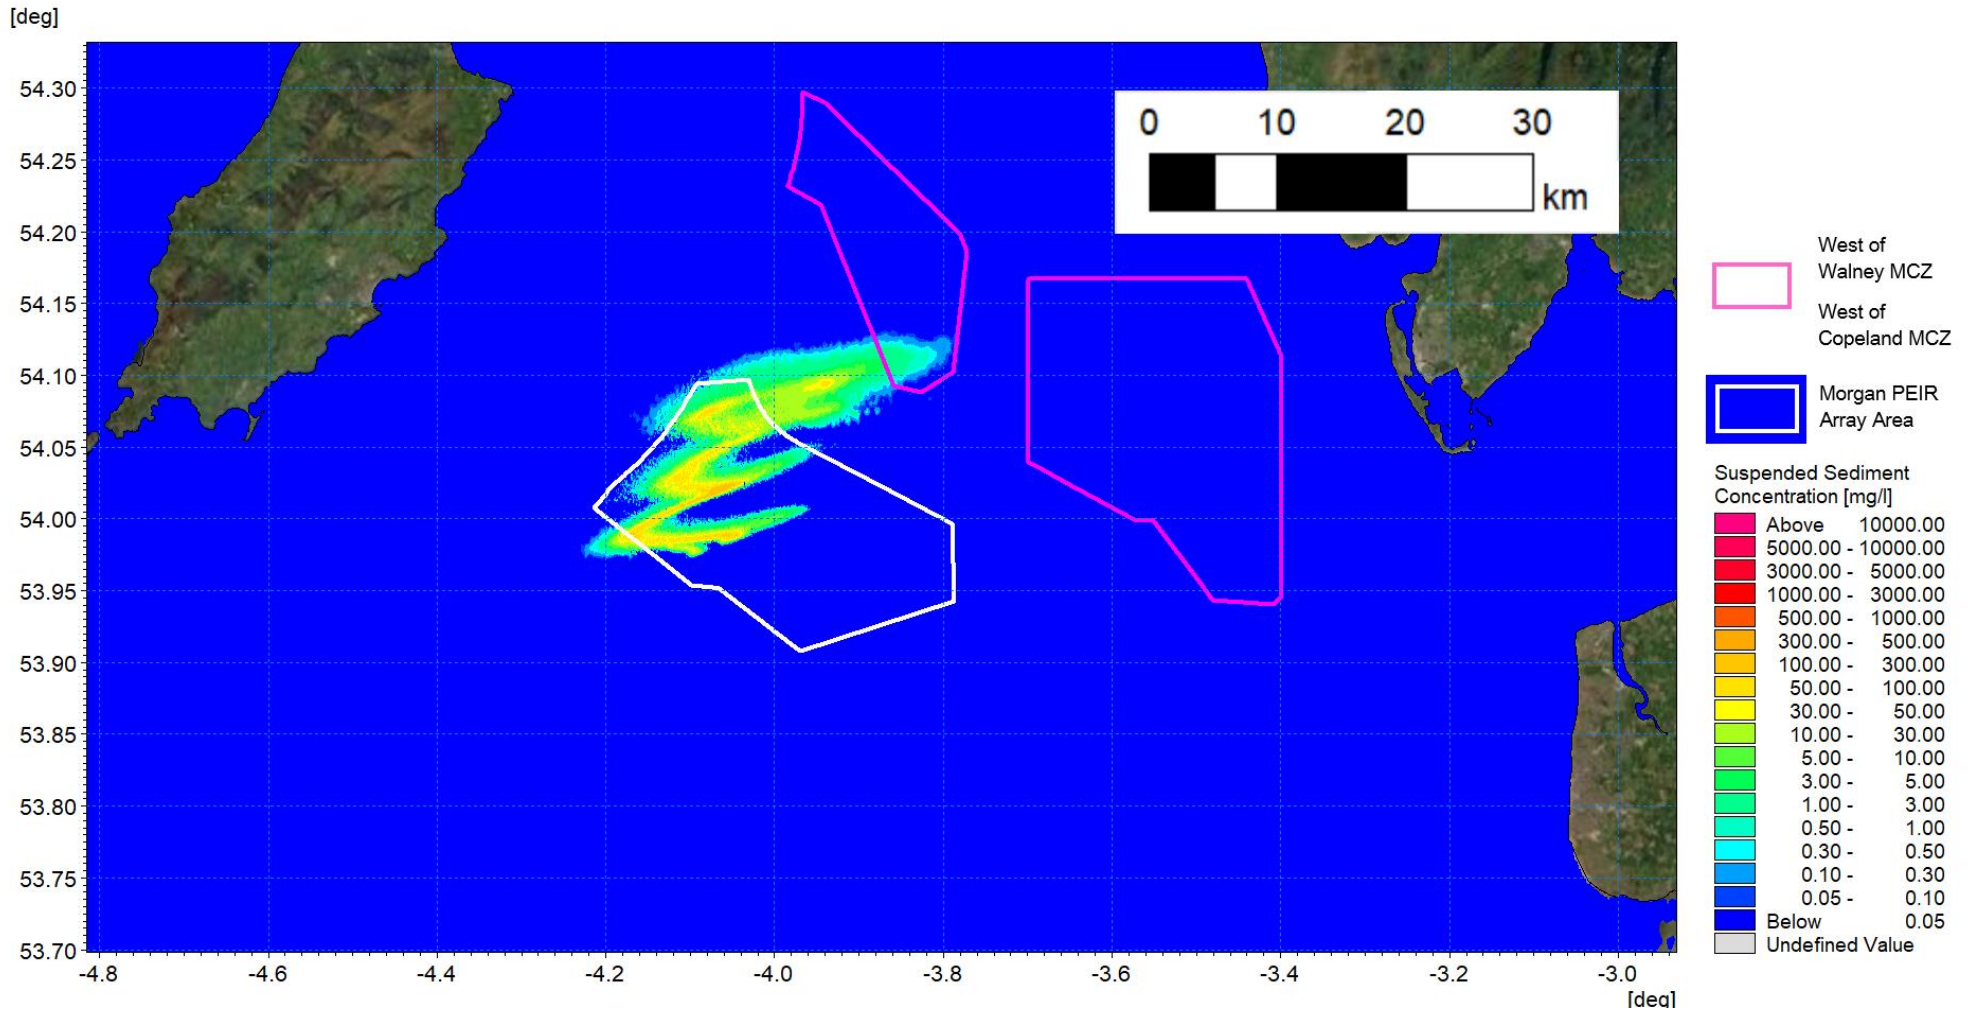


Figure 1.141: SSC day four flood – inter-array cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

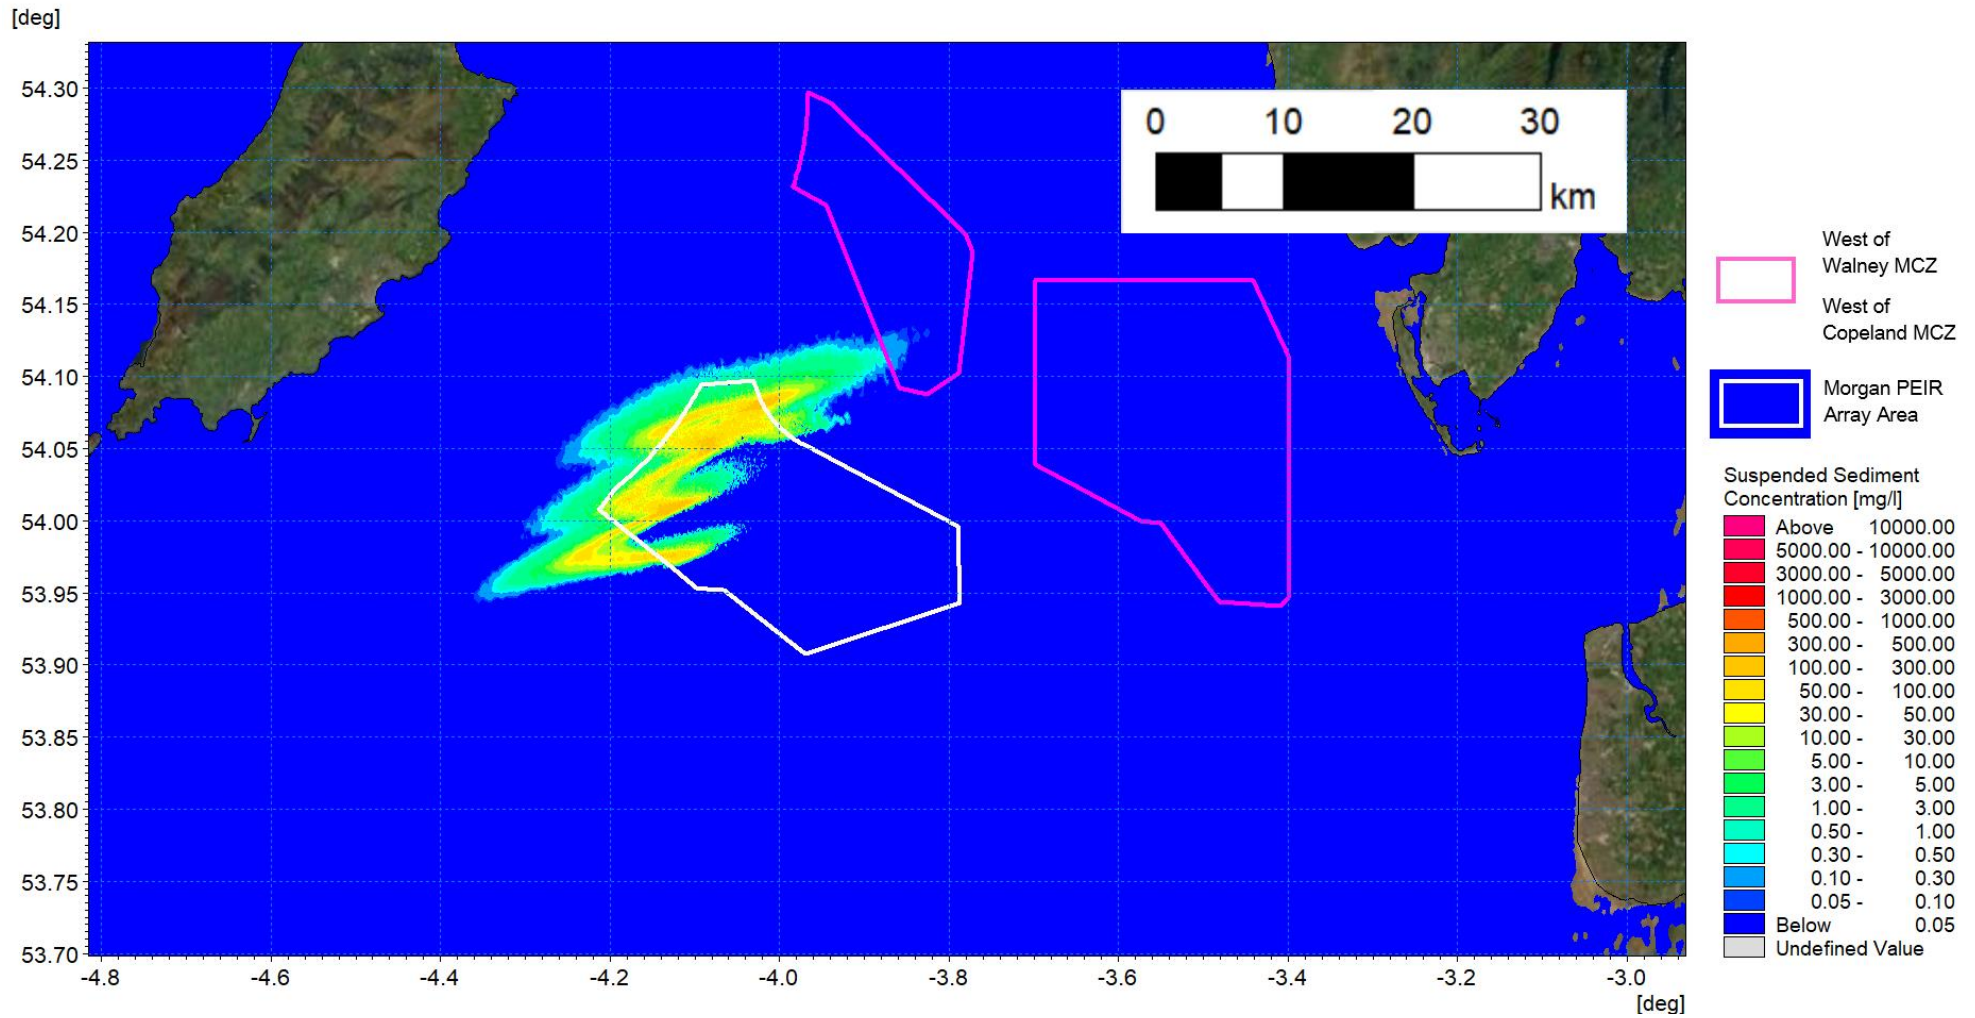


Figure 1.142: SSC day four ebb – inter-array cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

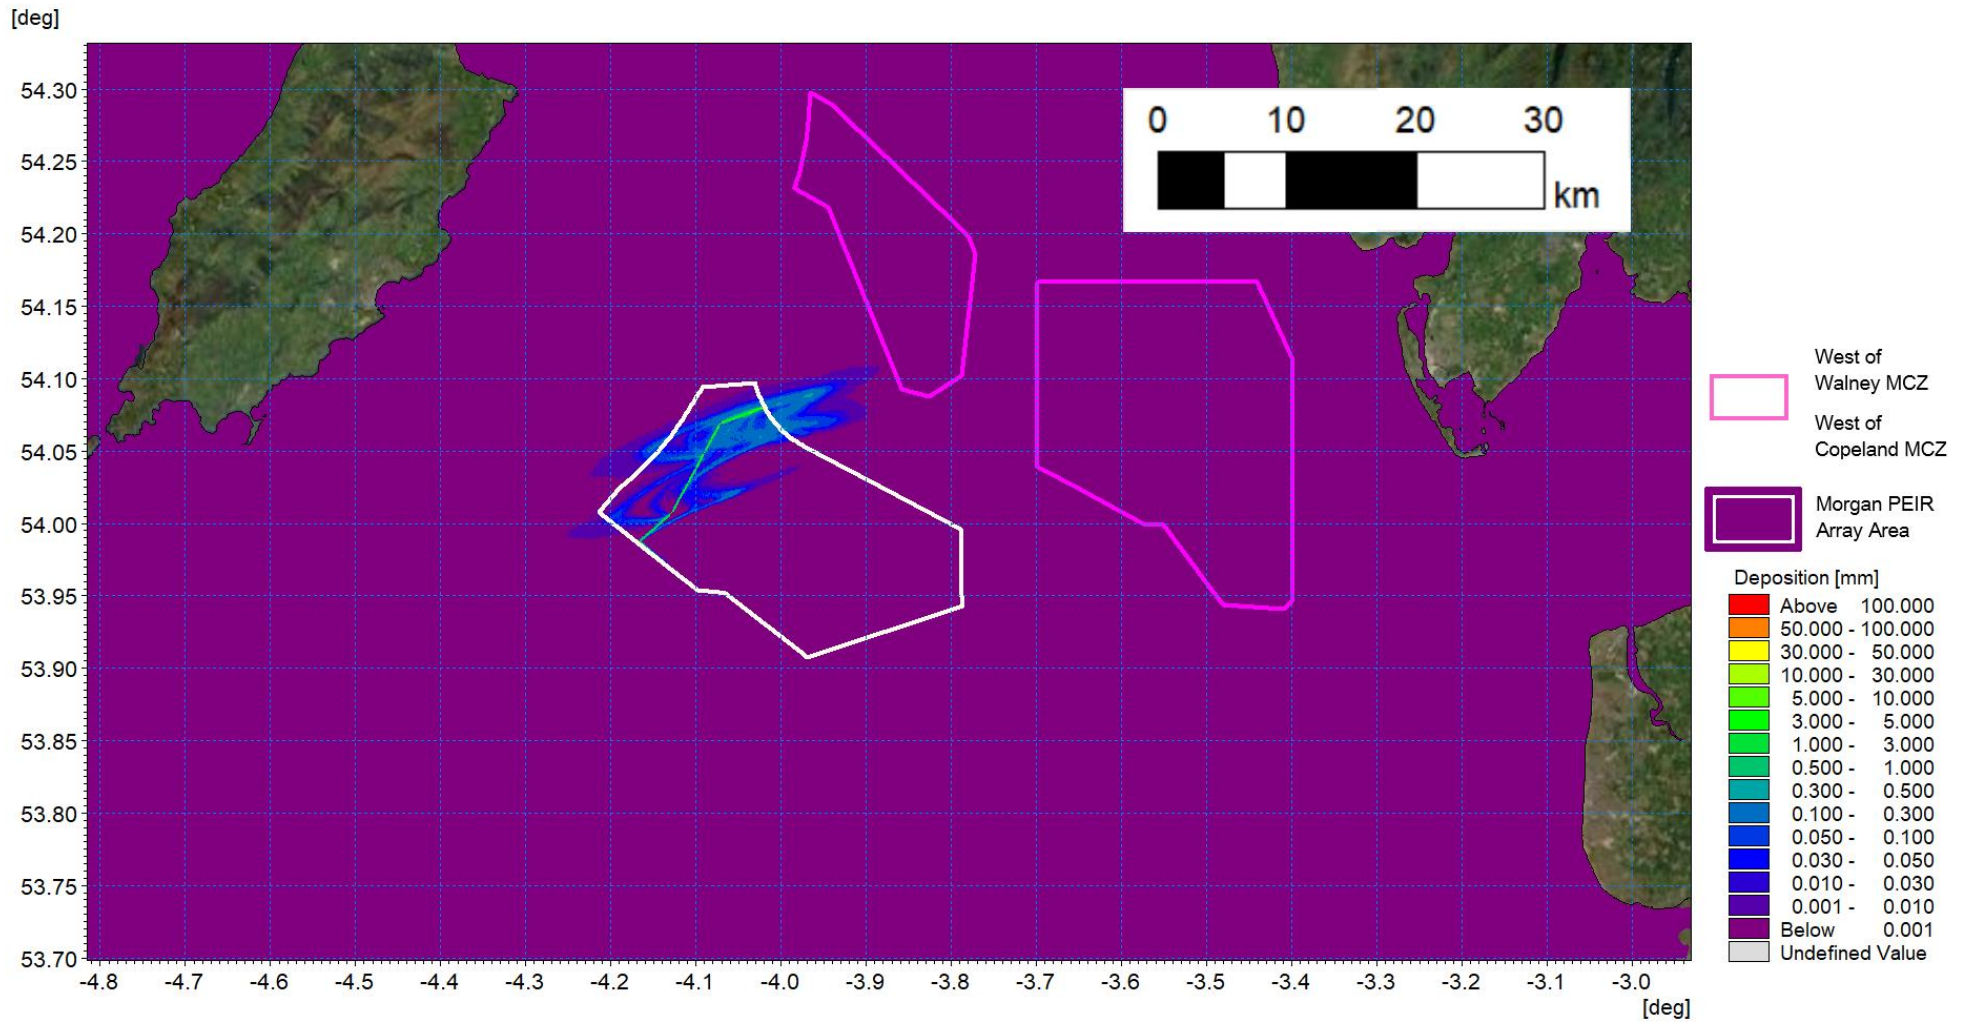


Figure 1.143: Average sedimentation during inter-array cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

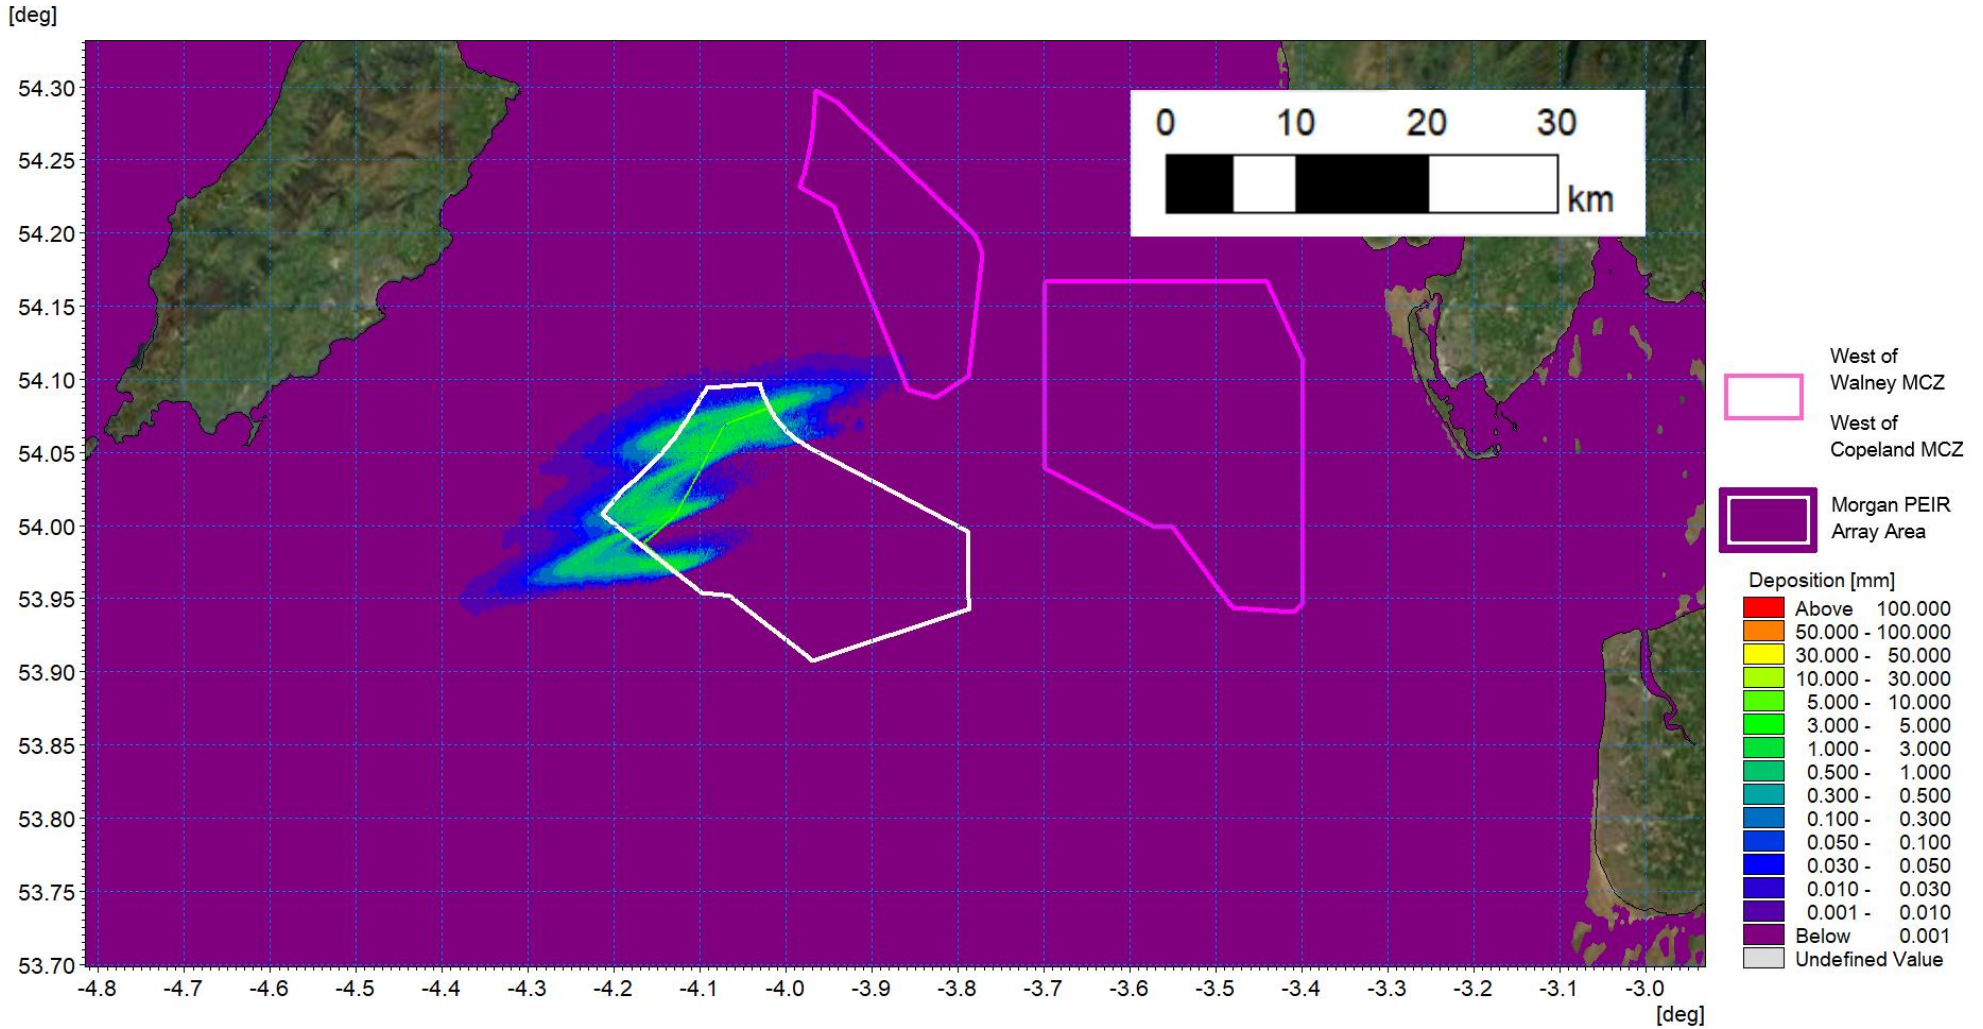


Figure 1.144: Sedimentation one day following cessation of inter-array cable installation.

Interconnector cables

- 1.3.7.37 The Morgan Generation Assets interconnector cable route, as defined in the PEIR, was examined using numerical modelling. The simulation assumed the same trenching rate as with the inter-array cables (i.e. 450 m/h), and that installation began from north and continued southeast of the modelled route. Each trench was 3 m at the surface extending to a depth of 3 m (i.e. the greatest burial depth proposed), with a triangular profile. The operation took approximately one day to complete encompassing a range of tidal conditions and mobilised 54,570 m³ of material. The composition was determined from the sampling data and was similar the inter-array route material:
- Gravel: 17%
 - Coarse sand: 10.6%
 - Medium sand: 63.8%
 - Fine sand: 5.2%
 - Very fine sand: 3.4%.
- 1.3.7.38 The trenching route modelled is illustrated by the green trace in Figure 1.145 and the average suspended sediment plume during the course of the operation is shown in Figure 1.146. The figure shows how the plume travels east and west on the tide as the release progresses along the route perpendicular to the tidal flow. This gives rise to average SSCs <50 mg/l offshore.
- 1.3.7.39 The instantaneous SSCs for mid flood and ebb tides are presented for day two, day three and day four in Figure 1.147 to Figure 1.152 respectively. They show increases where sediment is released at the cable location but also at the extent of each tidal cycle as material is re-suspended. The plume travels east and west on the tide as the release progresses along the route perpendicular to the tidal flow and sediment concentrations reduce to background levels on slack tides. SSCs along the route range between 50 mg/l and 1000 mg/l where the greatest levels are located at the source of the sediment release.
- 1.3.7.40 Finally, Figure 1.153 shows the average sedimentation whilst Figure 1.154 illustrates sedimentation levels one day following cessation of the sediment release. Tidal patterns indicate that although the released material migrates both east and west by settling and being re-suspended on successive tides, the sedimentation level is small typically <0.5 mm and the greatest levels of deposition occur along the trenching route as coarser material settles. Although the material is widely dispersed, sediment remains within the cell and would be drawn into the baseline transport regime with small increases in bed sediment levels.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

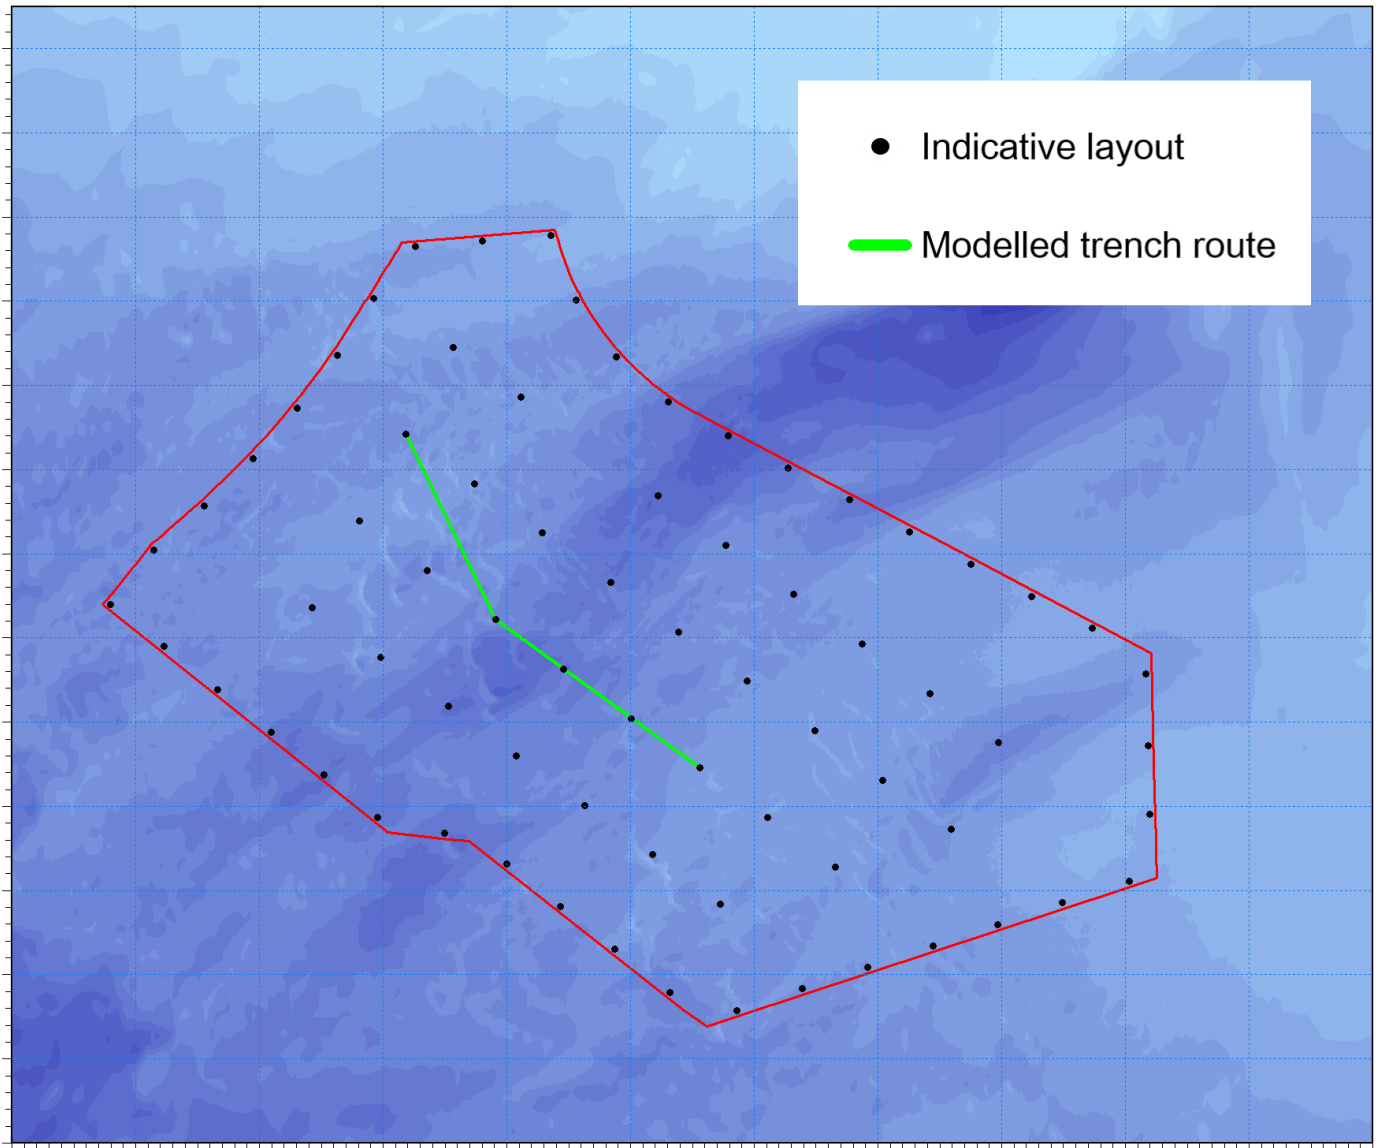


Figure 1.145: Modelled export cable route for PEIR.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

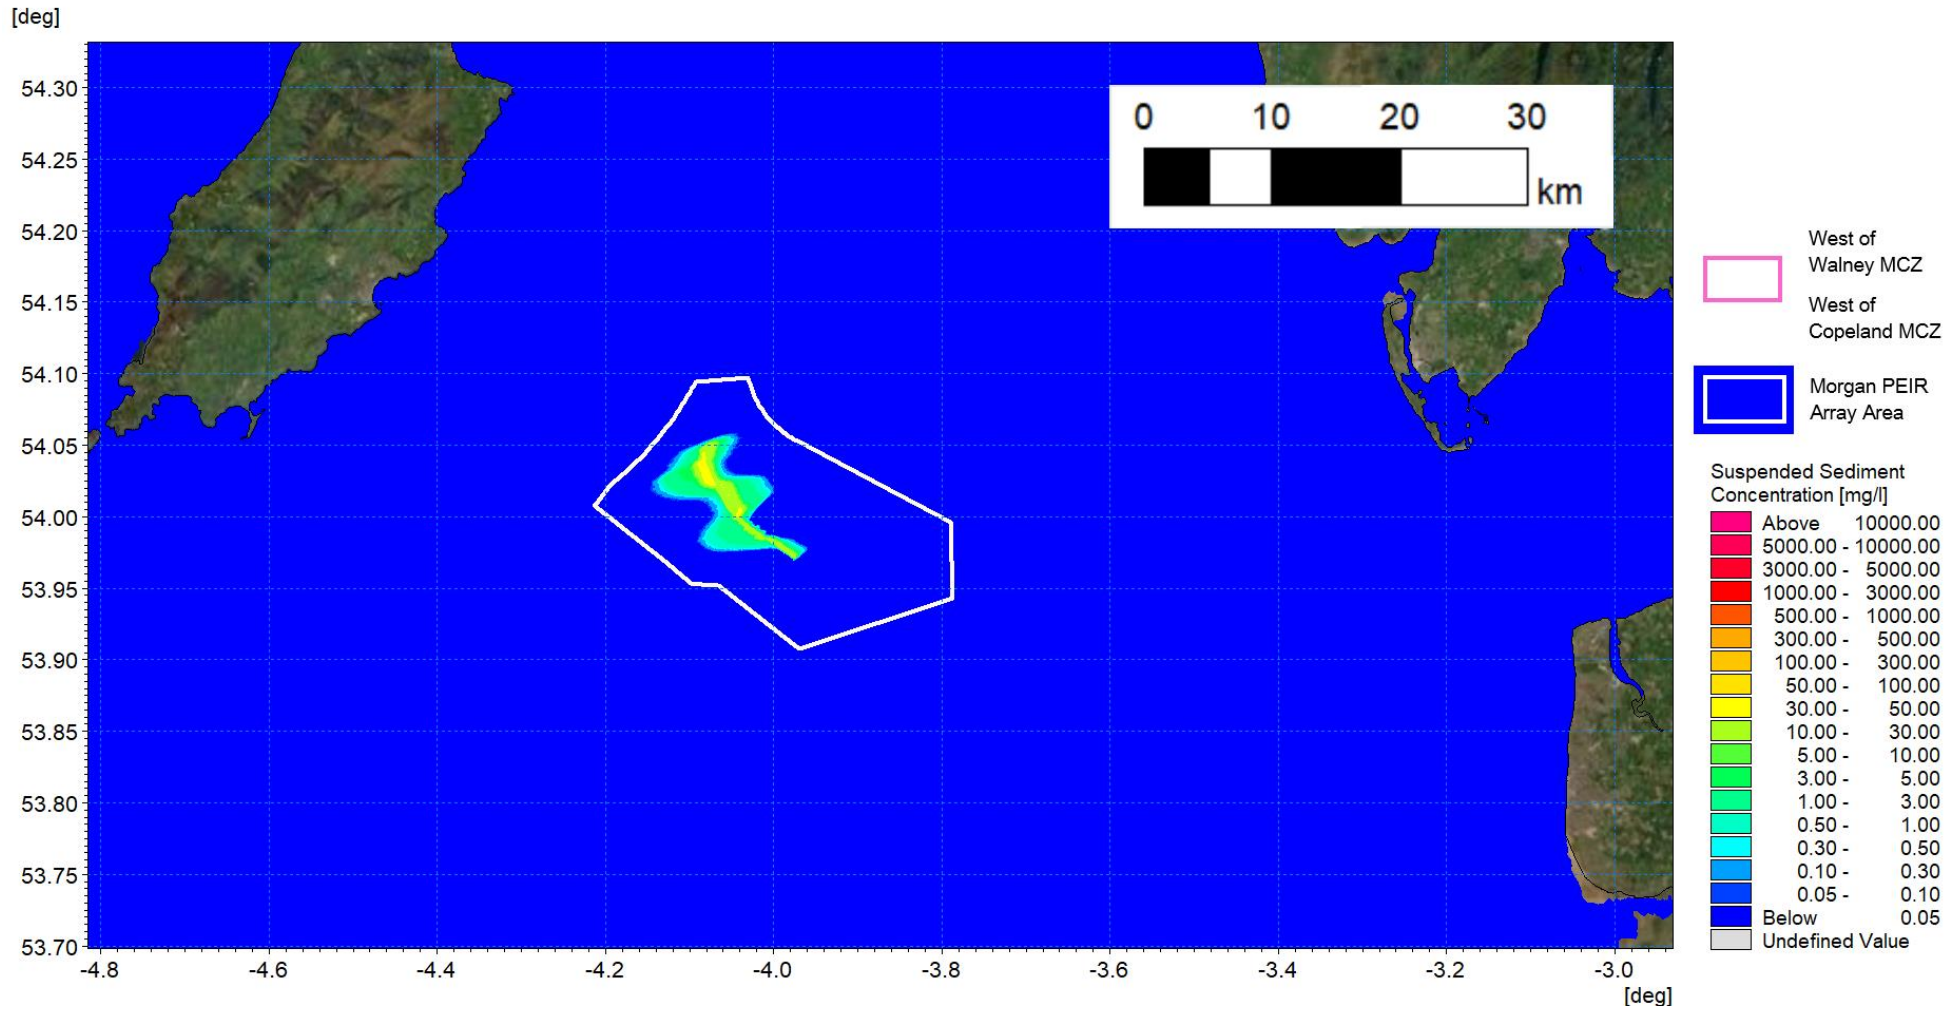


Figure 1.146: Average SSC during interconnector cable trenching.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

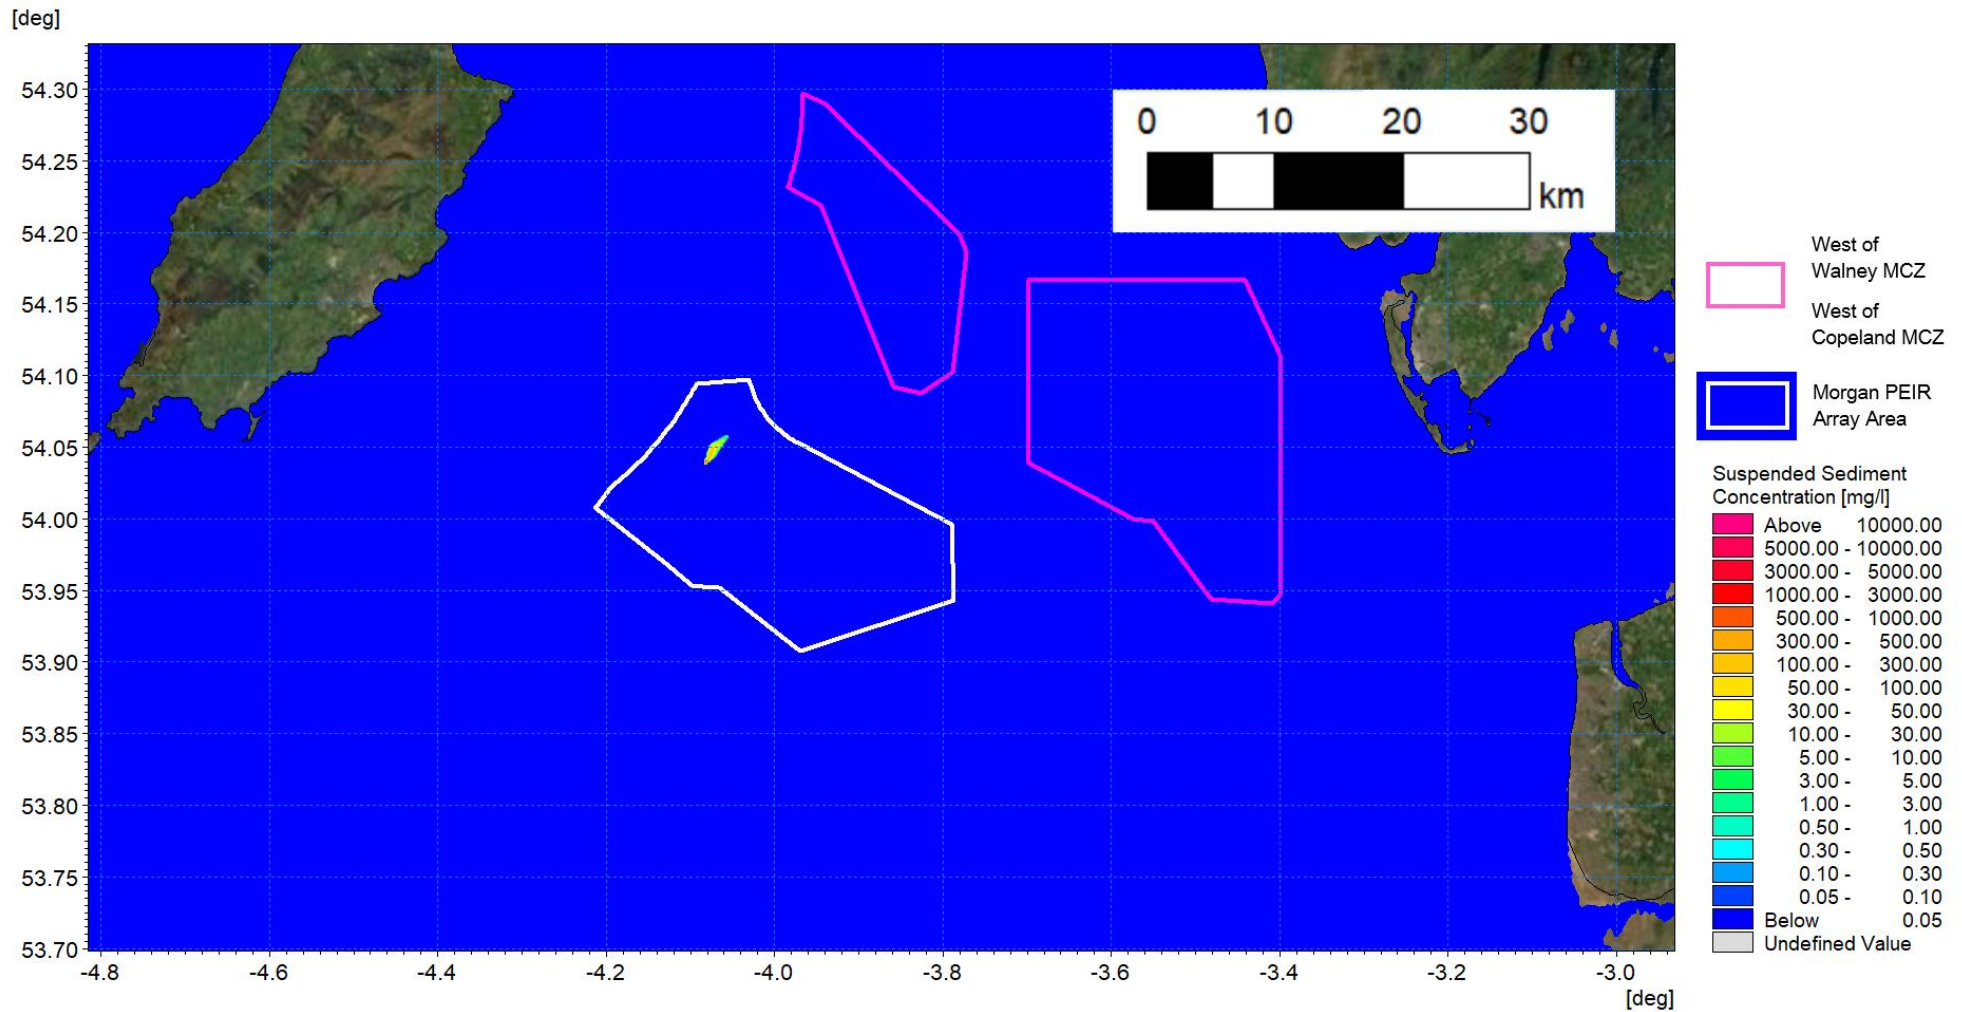


Figure 1.147: SSC day two peak flood – interconnector cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

[deg]

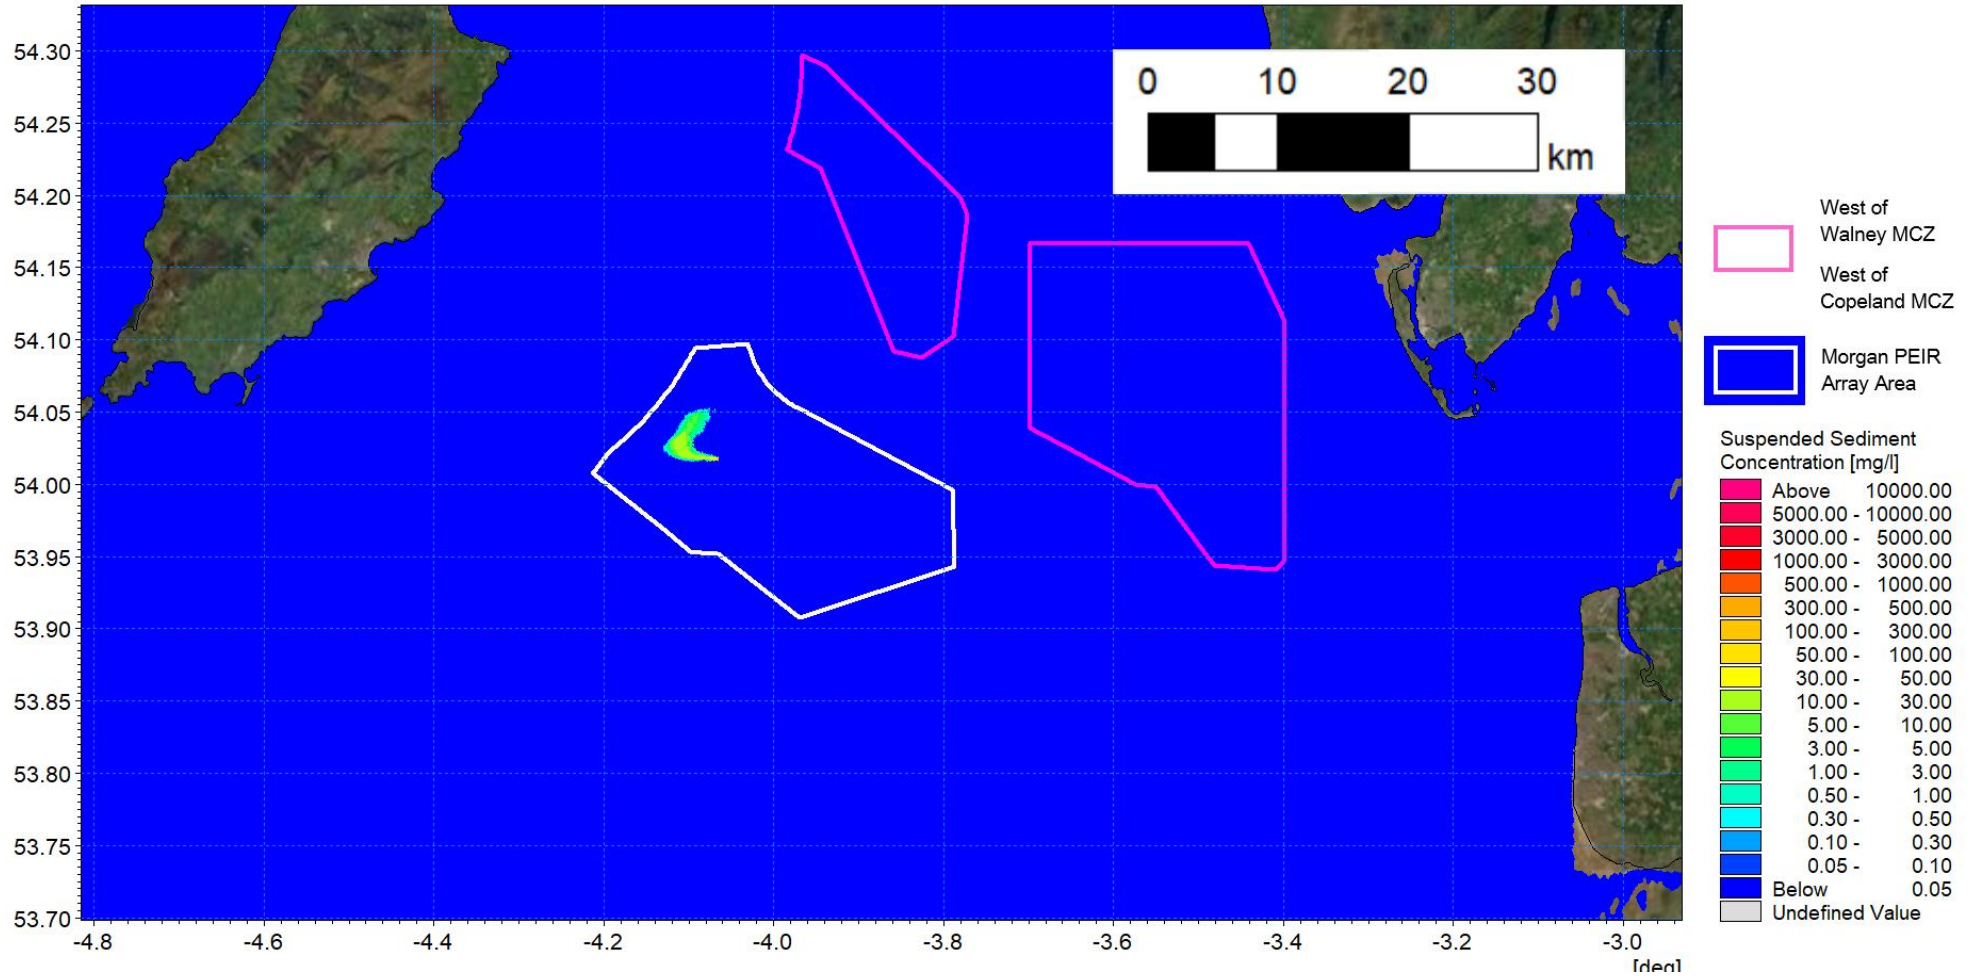


Figure 1.148: SSC day two peak ebb – interconnector cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

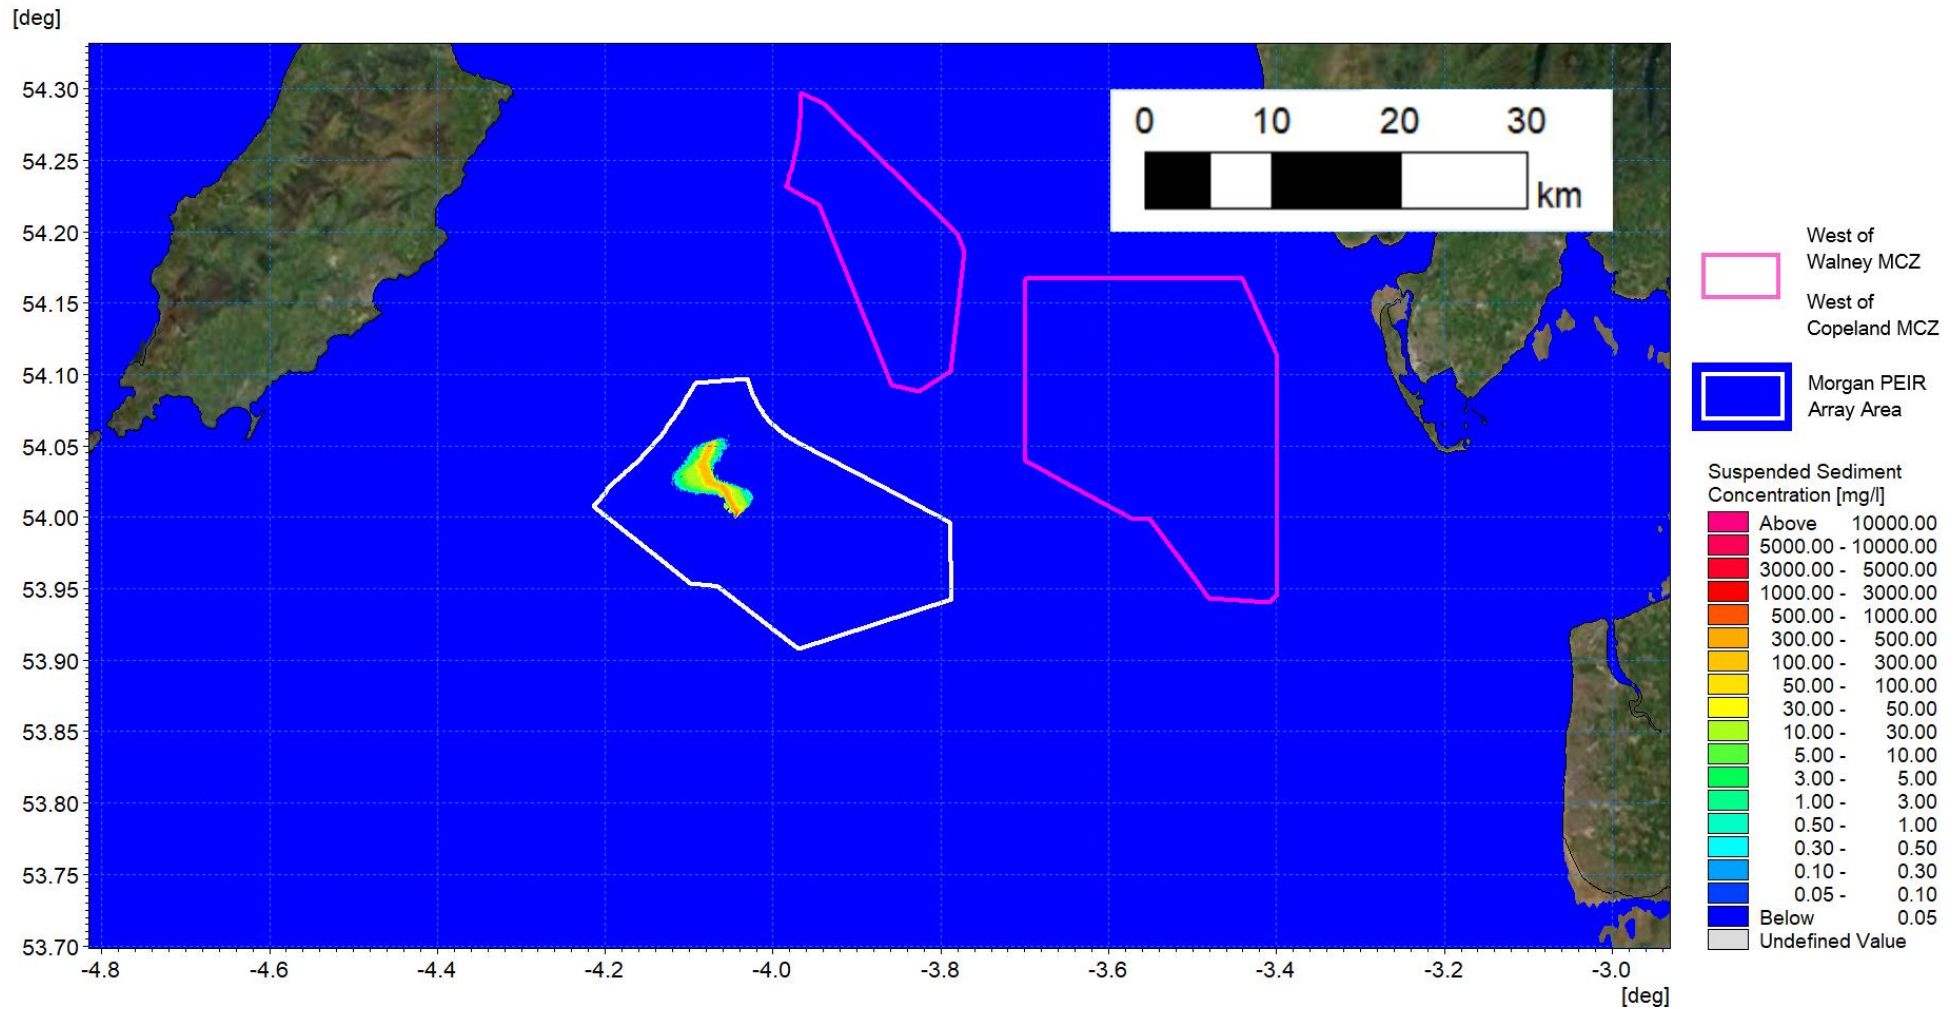


Figure 1.149: SSC day three peak flood – interconnector cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

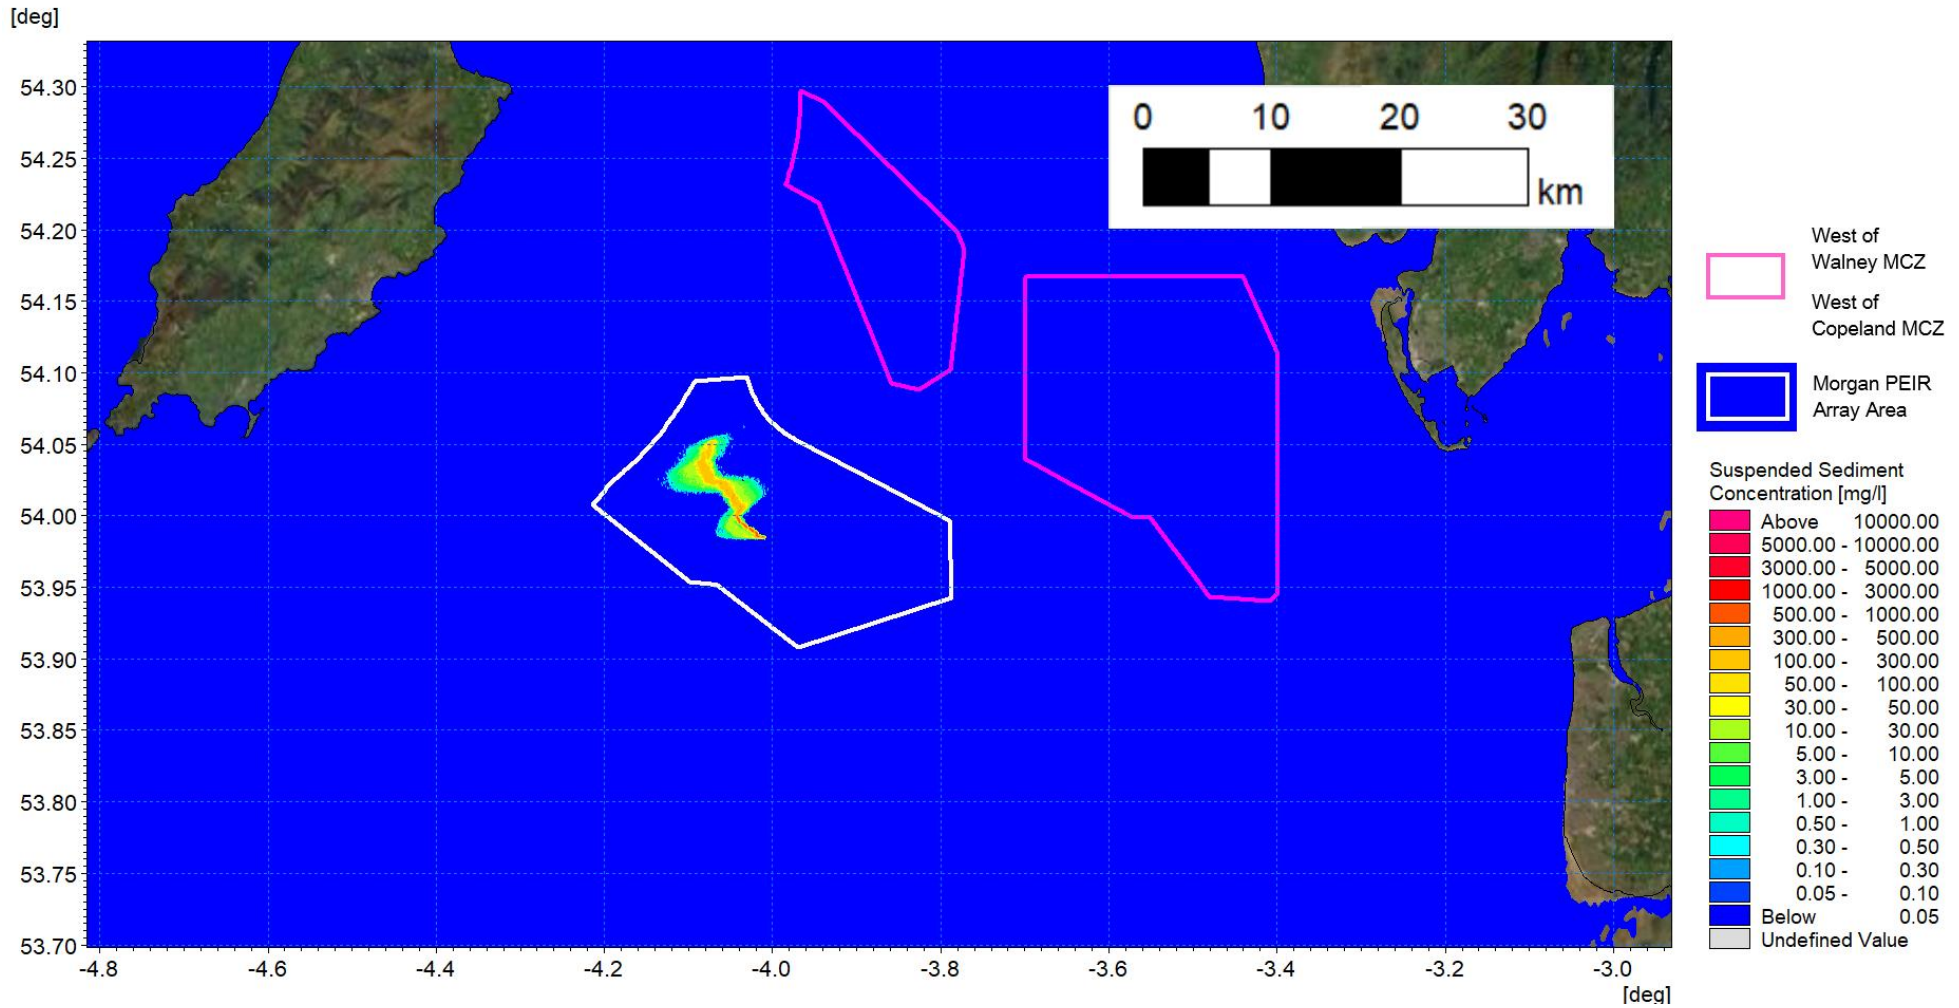


Figure 1.150: SSC day three peak ebb – interconnector cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

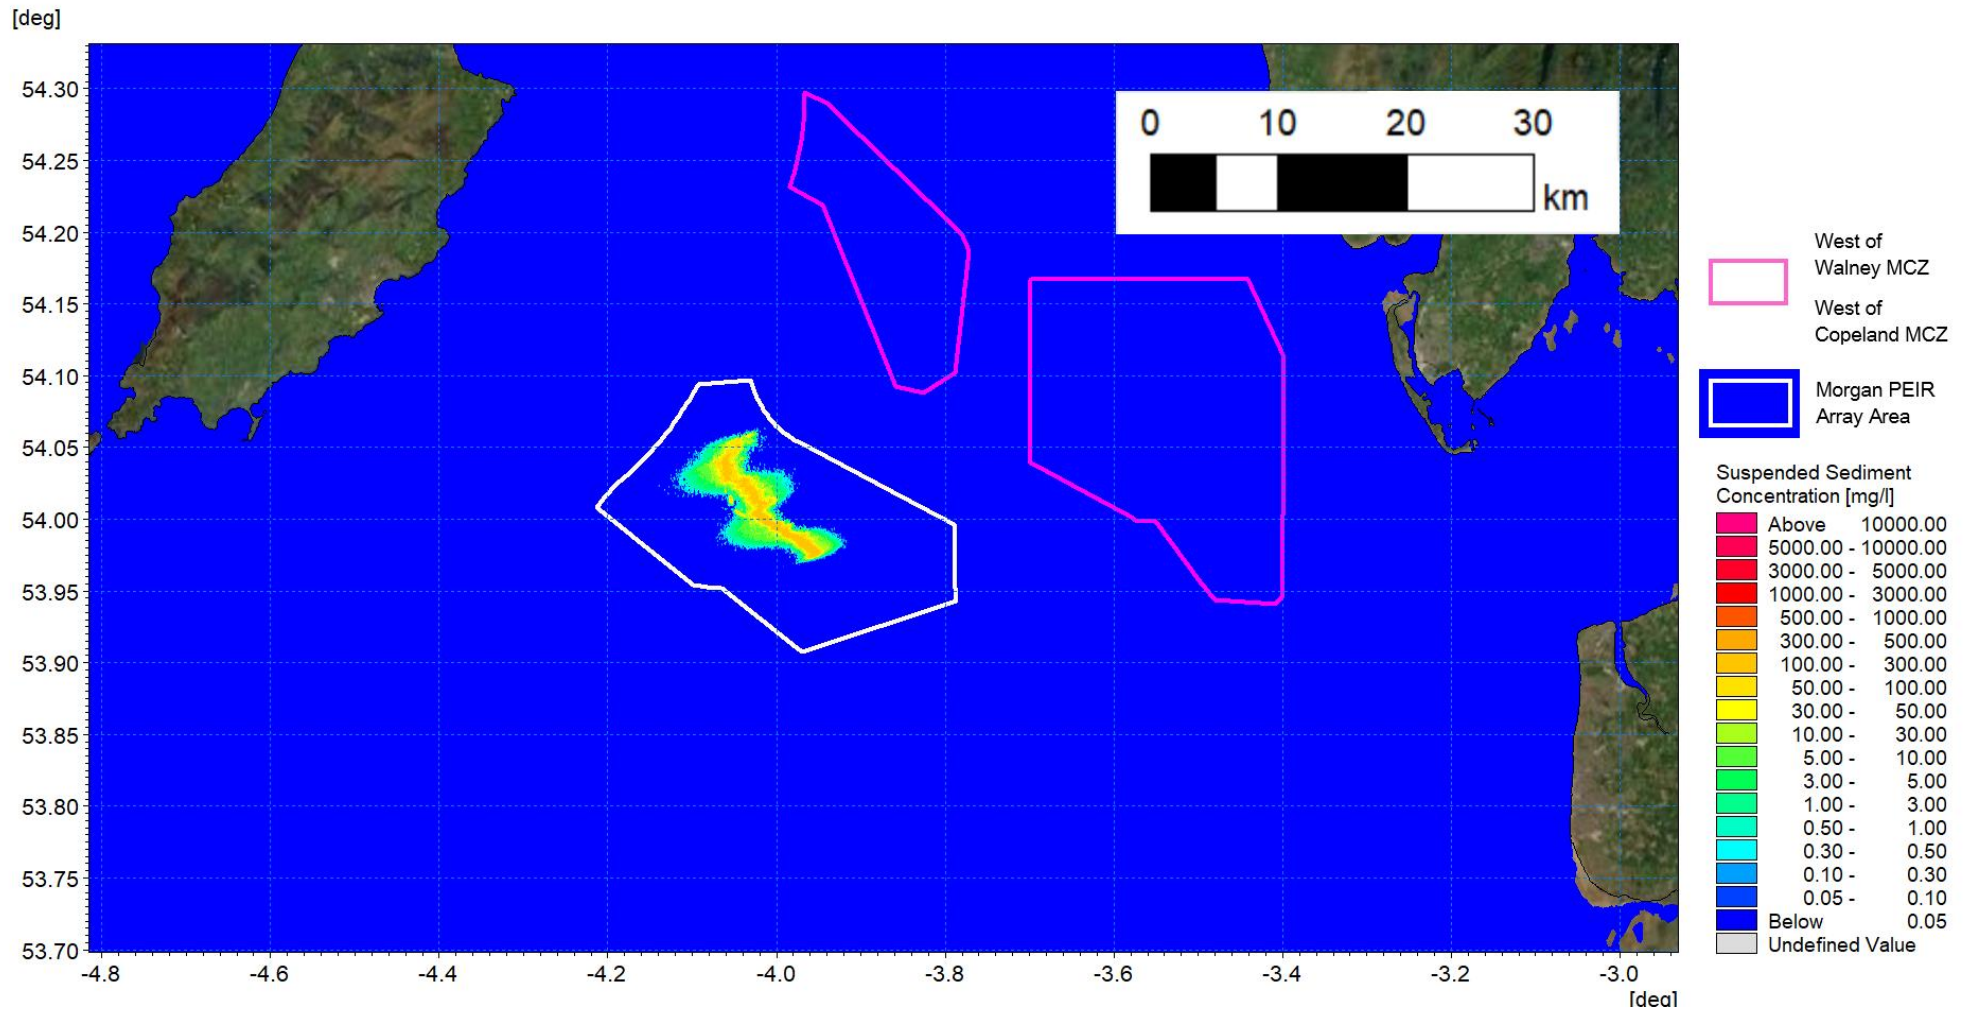


Figure 1.151: SSC day four peak flood – interconnector cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

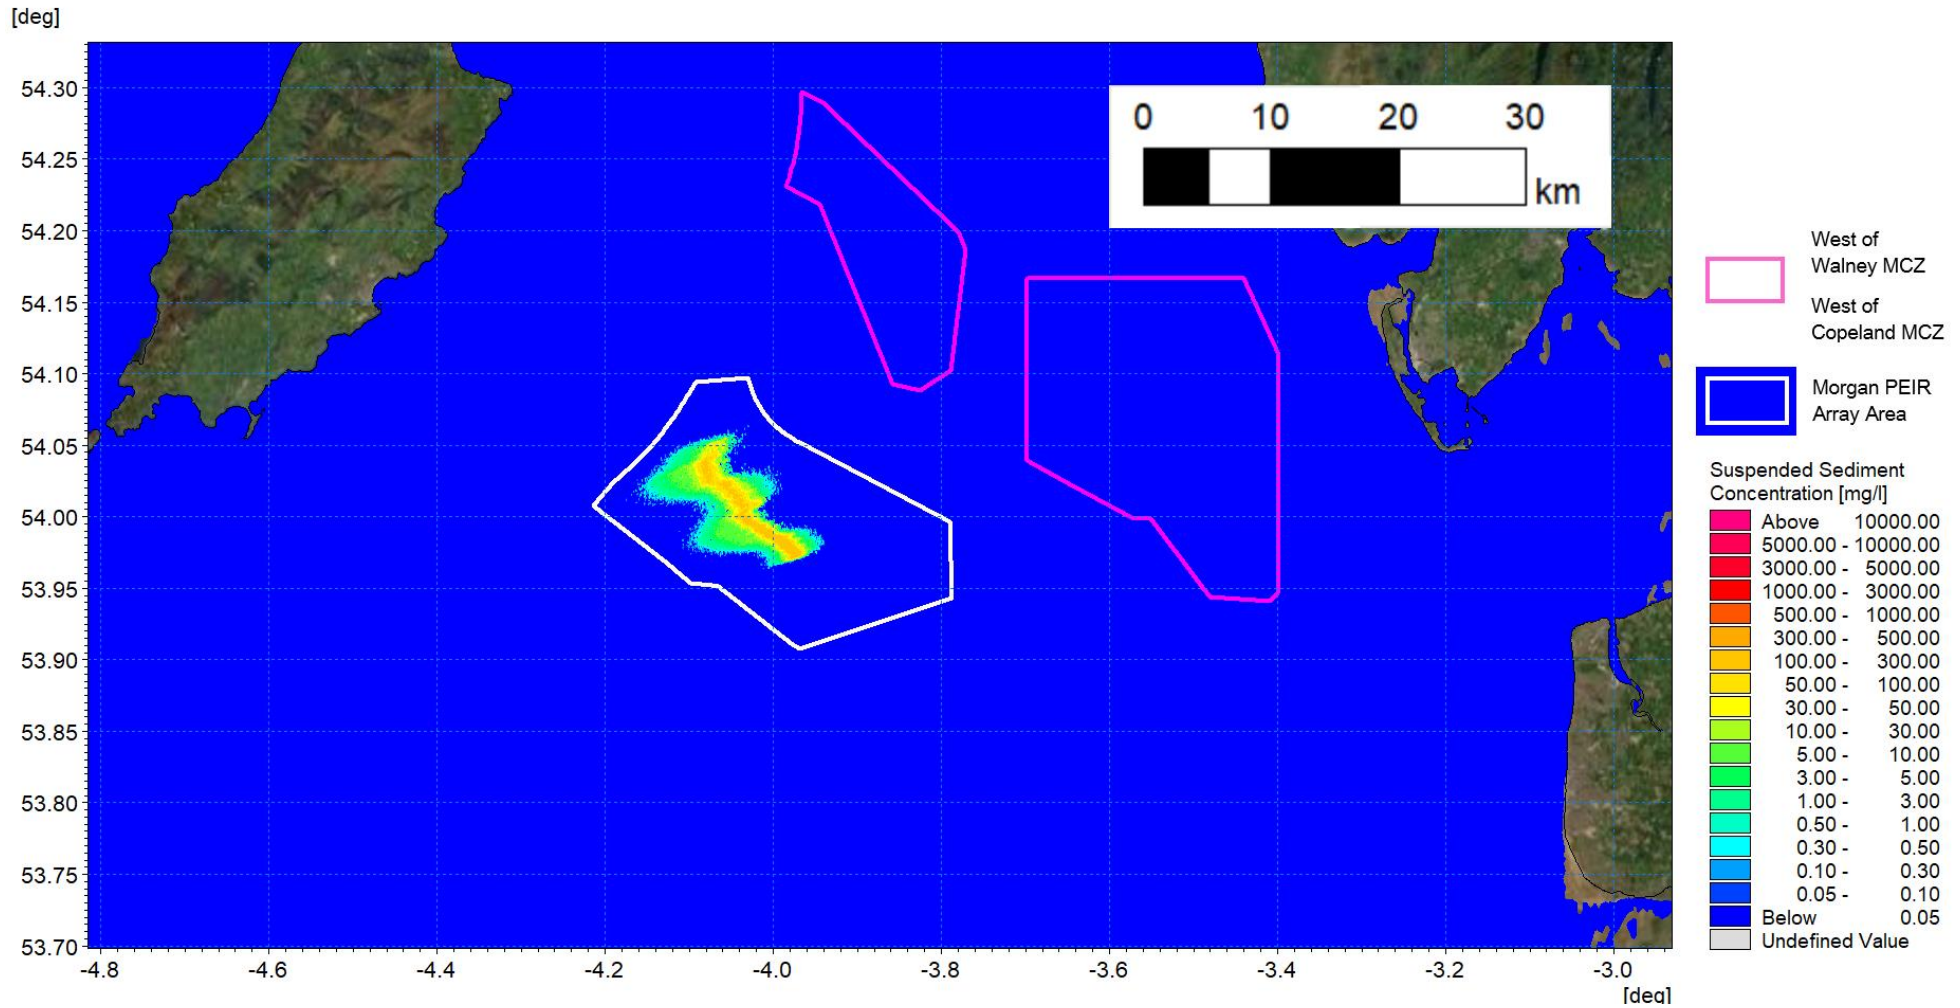


Figure 1.152: SSC day four peak ebb – interconnector cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

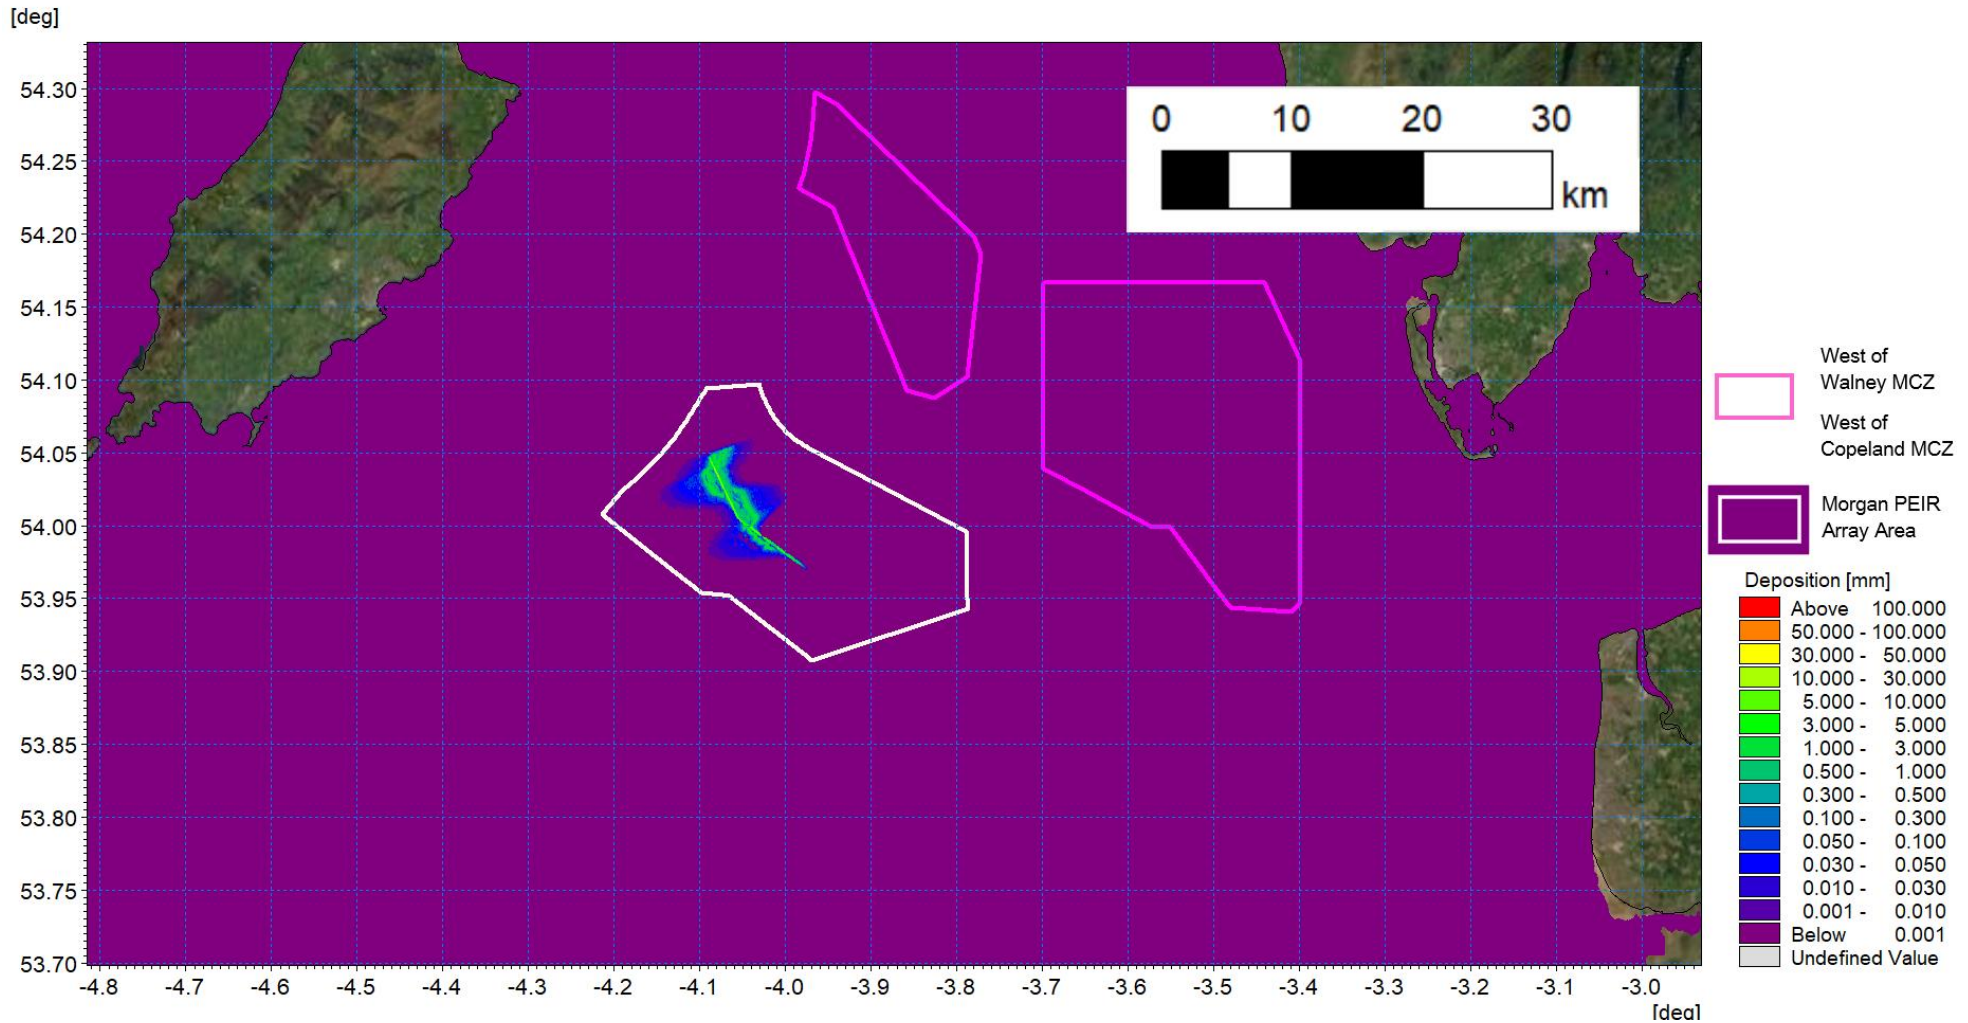


Figure 1.153: Average sedimentation during interconnector cable installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

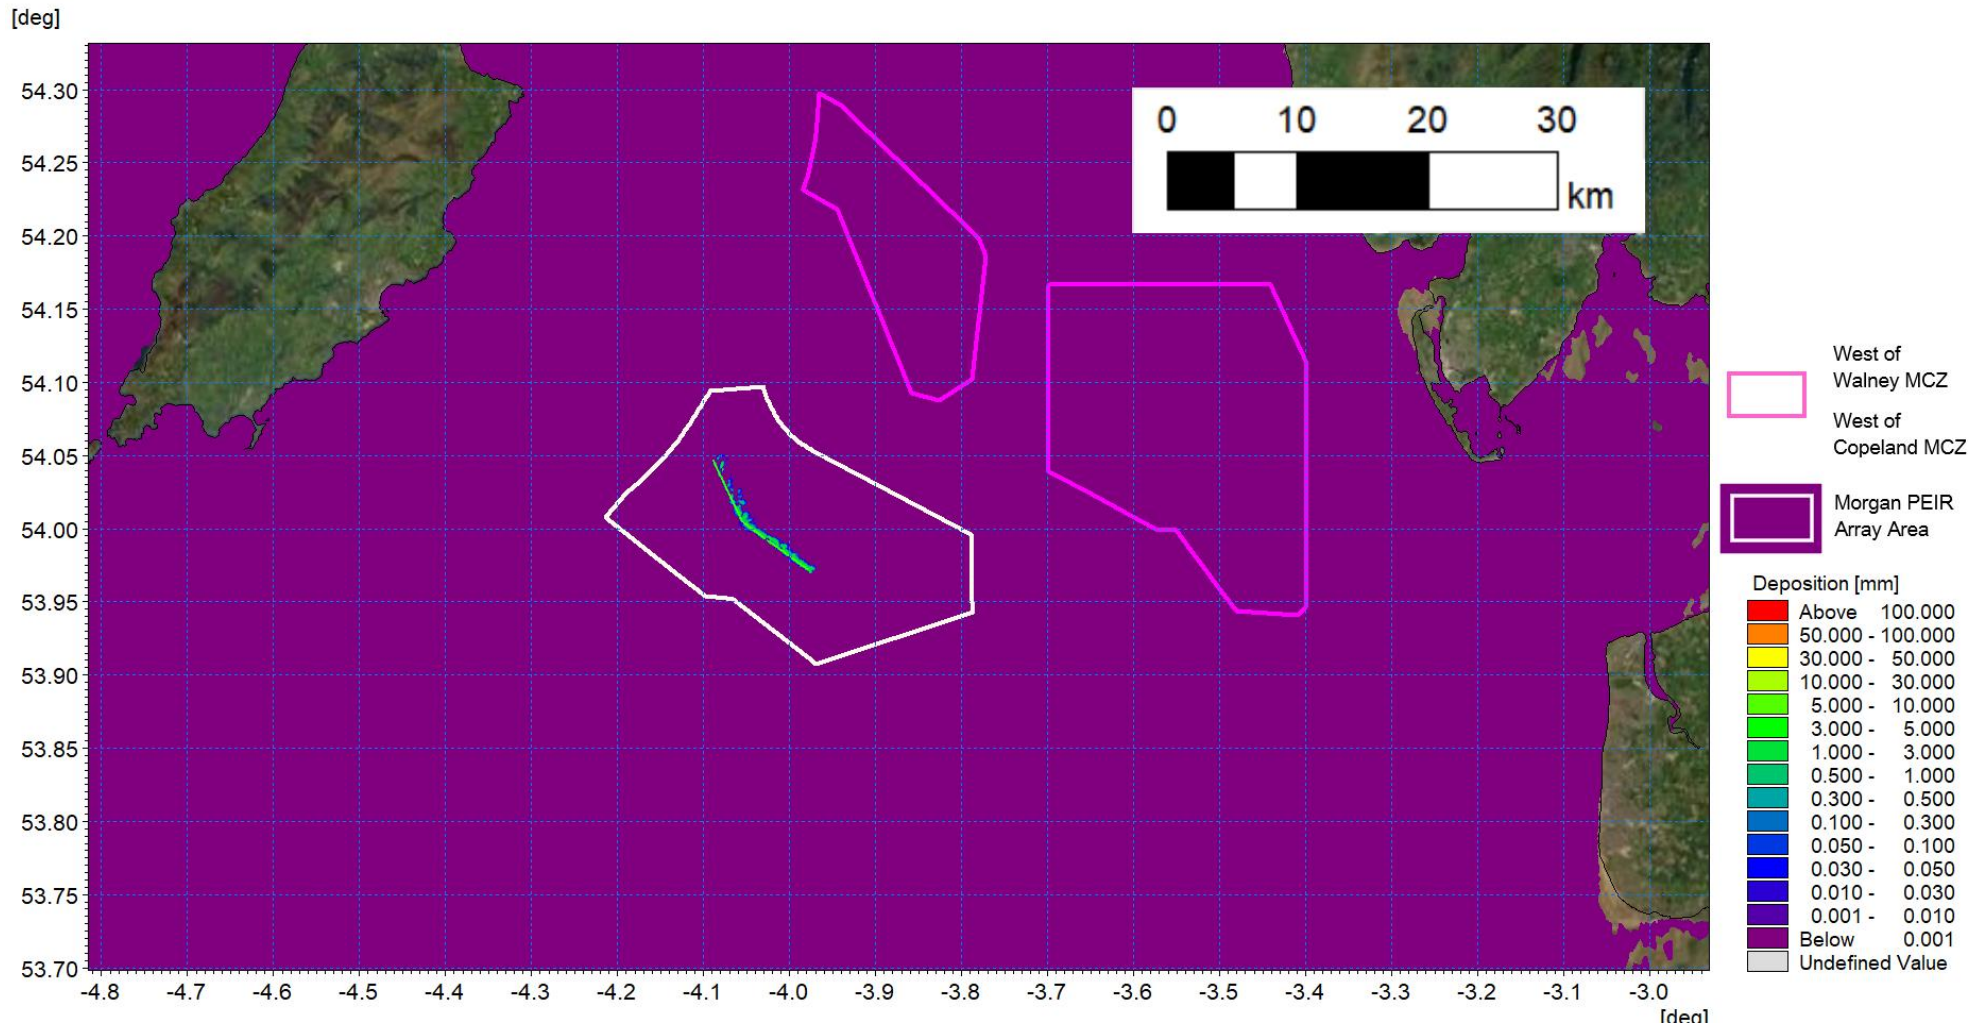


Figure 1.154: Sedimentation one day following cessation of interconnector cable installation.

1.4 Modelling to support the Environmental Statement

1.4.1 Overview

- 1.4.1.1 As described in sections 1.1 and 1.3, the application process is an iterative process and design parameters have been revised between the publication of the Morgan Generation Assets PEIR and the Environmental Statement. This has occurred in the form of updates to the Morgan Potential Array Area (Morgan Offshore Wind Limited, 2023) since the publication of the PEIR and associated revisions to the project parameters. As such it was considered appropriate that additional sensitivity modelling may be required in line with these changes. This would not only provide additional information to support the environmental assessment but also investigate the assumptions taken in the selection of scenarios modelled in the context of the PEIR study to ensure they are appropriate to inform the Environmental Statement.
- 1.4.1.2 The modelling study undertaken for PEIR and presented in the preceding sections of this document was based on a holistic approach. An assessment of the PDE was used to develop an MDS from which a range of scenarios were modelled. The aim was to provide supporting information for a robust assessment for physical processes which comprise a number of integrated parameters, each of which may be influenced differently from a range of design aspects. For example, suction bucket foundations may provide the greatest impediment to both water flow at the surface (influencing waves) and sediment movement at the seabed (influencing sediment transport pathways), but a gravity base foundation may present a greater water column blockage (influencing tides). Physical processes parameters do not occur in isolation, for example, sediment transport is influenced by littoral currents (both tides and waves) along with available transport pathways. Therefore, for the additional modelling to support the Environmental Statement, it was prudent to examine sensitivity testing for different foundation types.
- 1.4.1.3 The purpose of the sensitivity testing was to examine the impact of a range of foundation types on physical processes, i.e. tidal currents and wave climates. The modelling undertaken for PEIR presented in section 1.3 demonstrated that wake interactions between adjacent structures were limited; indicating that analysis of single units would be appropriate for sensitivity testing. For application within the environmental assessment the parameters required were magnitude and extent of the influence of the structure on the environment. For example, during a given tidal current or incident wave height how much is the parameter altered by and to what spatial extent? These impacts are then assessed in terms of baseline and distance to designated receptors. Therefore, these parameters may be quantified independently of directionality within the model provided the baseline conditions are representative.
- 1.4.1.4 The Morgan Generation Assets is located less than 12 km to the north of the Mona Offshore Wind Project, as illustrated in Figure 1.155. This project proposes the same range of infrastructure both in terms of type and dimension (Mona Offshore Wind Limited, 2024). Therefore, due to proximity, the Mona Array Area exhibits a comparable range of tidal flow and wave climates, if not marginally more extreme than that experienced within the Morgan Array Area.
- 1.4.1.5 Tidal currents in the southwest of the Morgan Array Area are of a similar magnitude to those across the Mona Array area, whilst those to the northeast are circa 10% lower. Although the alignment of tidal flow differs between the two sites, the similarity of water depth and infrastructure means that the magnitude and scale of alterations in flow patterns determined from the Mona Offshore Wind Project modelling may be applied

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

to the Morgan Generation Assets. Similarly, for wave climate, the significant wave heights are of similar magnitude, but the wave directions may differ. Therefore the resultant wake for a specific incident wave height observed in the Mona Array may be applied to a similar wave height within the Morgan Array Area when the alignment of wave direction is considered with respect to the location of the designated receptors.

1.4.1.6 The sensitivity testing undertaken for Mona Offshore Wind Project may therefore be used to support the Morgan Generation Assets Environmental Statement and is presented within this document.

1.4.1.7 The three types of single unit installations presented in Table 1.6 and located at the centre of the Mona Array Area for the Environmental Statement were examined, the site of which is displayed in green in Figure 1.155. The model mesh was adapted to enable all sensitivity tests to be undertaken with the same cell arrangement, with bed levels adjusted to represent the scour protection associated with each foundation type. Modelling outcomes were adapted to describe the potential impact within the setting of the Morgan Array Area.

1.4.1.8 The three selected foundation types and scales were selected to be representative of the range of installations proposed within the context of the Environmental Statement, as outlined in Table 1.6. The suction bucket foundation scenario echoed that used in the array modelling presented in the Morgan Generation Assets PEIR (applying the holistic approach which takes account of the range of integrated parameters which may affect the different aspects of physical processes which do not exist in isolation, as discussed in 1.4.1.2). The conical gravity base is that of the largest wind turbine units proposed and a typical size relating to OSP foundations. Finally, the rectangular gravity base relates to the much larger single semi-submersible OSP structure.

1.4.1.9 As with the modelling presented in the Morgan Generation Assets PEIR, any deviation from the additional modelled scenarios for the Environmental Statement will be noted in the context of the assessment.

Table 1.6: Summary of modelled environmental variation scenarios for the Environmental Statement.

Variation/operation	Description	Parameter modelled
Sensitivity testing	<p>Models updated to examine the effect of a single installation to quantify:</p> <ul style="list-style-type: none"> Changes to tidal currents Changes to wave climate. 	<p>Four-legged suction bucket foundation:</p> <ul style="list-style-type: none"> Each jacket leg with a diameter of 5 m, spaced 48 m apart, and each bucket with a diameter of 16 m Scour protection to a height of 2.5 m extending 20 m from the bucket. <p>Conical gravity base foundation:</p> <ul style="list-style-type: none"> Caisson diameter of 37 m and 15 m diameter at sea surface Scour protection average depth of 2.6 m extending 24 m from the foundation. <p>Rectangular gravity base foundation:</p> <ul style="list-style-type: none"> 60 m by 80 m dimension at the surface, a slab base diameter dimension of 80 m by 100 m Scour protection to a height of 2.6 m extending 25 m from the slab.

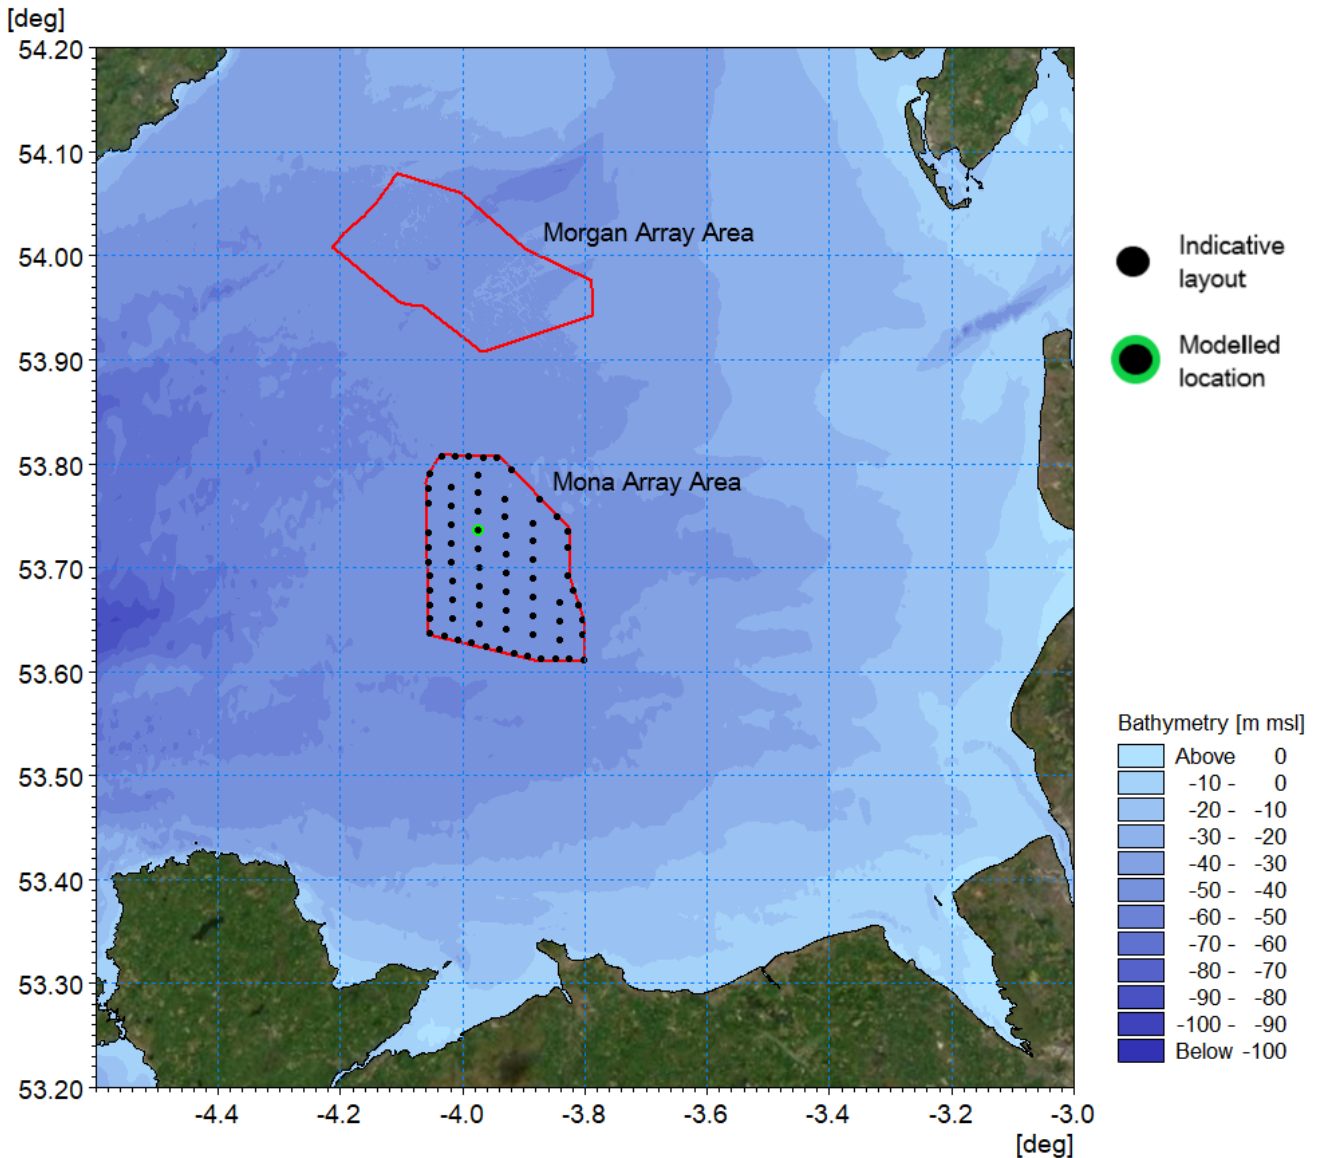


Figure 1.155: Location of foundation used for sensitivity modelling.

1.4.2 Suction bucket foundations

1.4.2.1 The suction bucket foundation scenario echoed that used in the array modelling presented in the Morgan Generation Assets PEIR, applying the holistic approach which takes account of the range of integrated parameters which may affect the different aspects of physical processes which do not exist in isolation, as discussed in 1.4.1.2. This was applied to select the foundation with the greatest overall influence on physical processes to be used for turbine foundations (i.e. greatest seabed footprint and water column obstruction for each unit). The suction bucket scenario comprised the following:

- Four-legged suction bucket foundations
- Each jacket leg with a diameter of 5 m, spaced 48 m apart
- Each bucket with a diameter of 16 m
- Scour protection to a height of 2.5 m extending 20 m from the bucket.

Tidal flow

- 1.4.2.2 A sensitivity test for the single test foundation located within the Mona Array Area was performed by repeating the hydrodynamic simulations used to describe the baseline, with the addition of one four-legged suction bucket foundation. The difference between the post-installation and baseline tidal currents was then determined to quantify the magnitude and spatial extent of the change. The suction bucket foundation was included in the sensitivity modelling based on a holistic selection process as applied previously in section 1.3.6. The bathymetry was also amended to take account of scour protection.
- 1.4.2.3 The following figures show reference mid flood and mid ebb steps, using the same approach as the PEIR modelling presented in section 1.3. Due to the limited magnitude of the changes, difference plots have been provided. These are the proposed minus the baseline condition, therefore increases in current speed will be positive. The same procedure for calculating differences and plotting figures has been implemented throughout this report. For context, an indicative wind turbine layout is shown on each plot indicating the proximity of the nearest installation (black circles) with the modelled infrastructure at the central location within each figure.
- 1.4.2.4 Figure 1.156 presents the baseline flood tide flow patterns with Figure 1.157 showing a focussed plot of the post-construction changes which are limited to the vicinity of the foundation. In the difference figures a log scale has been introduced to accentuate the values for clarity. Similarly, Figure 1.158 and Figure 1.159 show the same information for the ebb tide. During peak current speed the flow is redirected in the immediate vicinity of the structure. The variation is a maximum of 2 cm/s in the immediate vicinity (50 m) of the structure which constitutes less than 2% of the peak flows. This reduces significantly with increased distance from each structure falling to a maximum of 1 cm/s, just 100 m from the structure.
- 1.4.2.5 These modelling results for the test unit located within the Mona Array Area are expected to be applicable to those for the Morgan Generation Assets, given a slightly reduced peak current speed, c. 0.1 m/s smaller than within the Morgan Array Area. The change in peak currents due to the presence of the test foundation can be expected to be slightly smaller for the Morgan Generation Assets than for the Mona Offshore Wind Project, therefore the percentage change in current speed is likely to remain at c. 2%.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

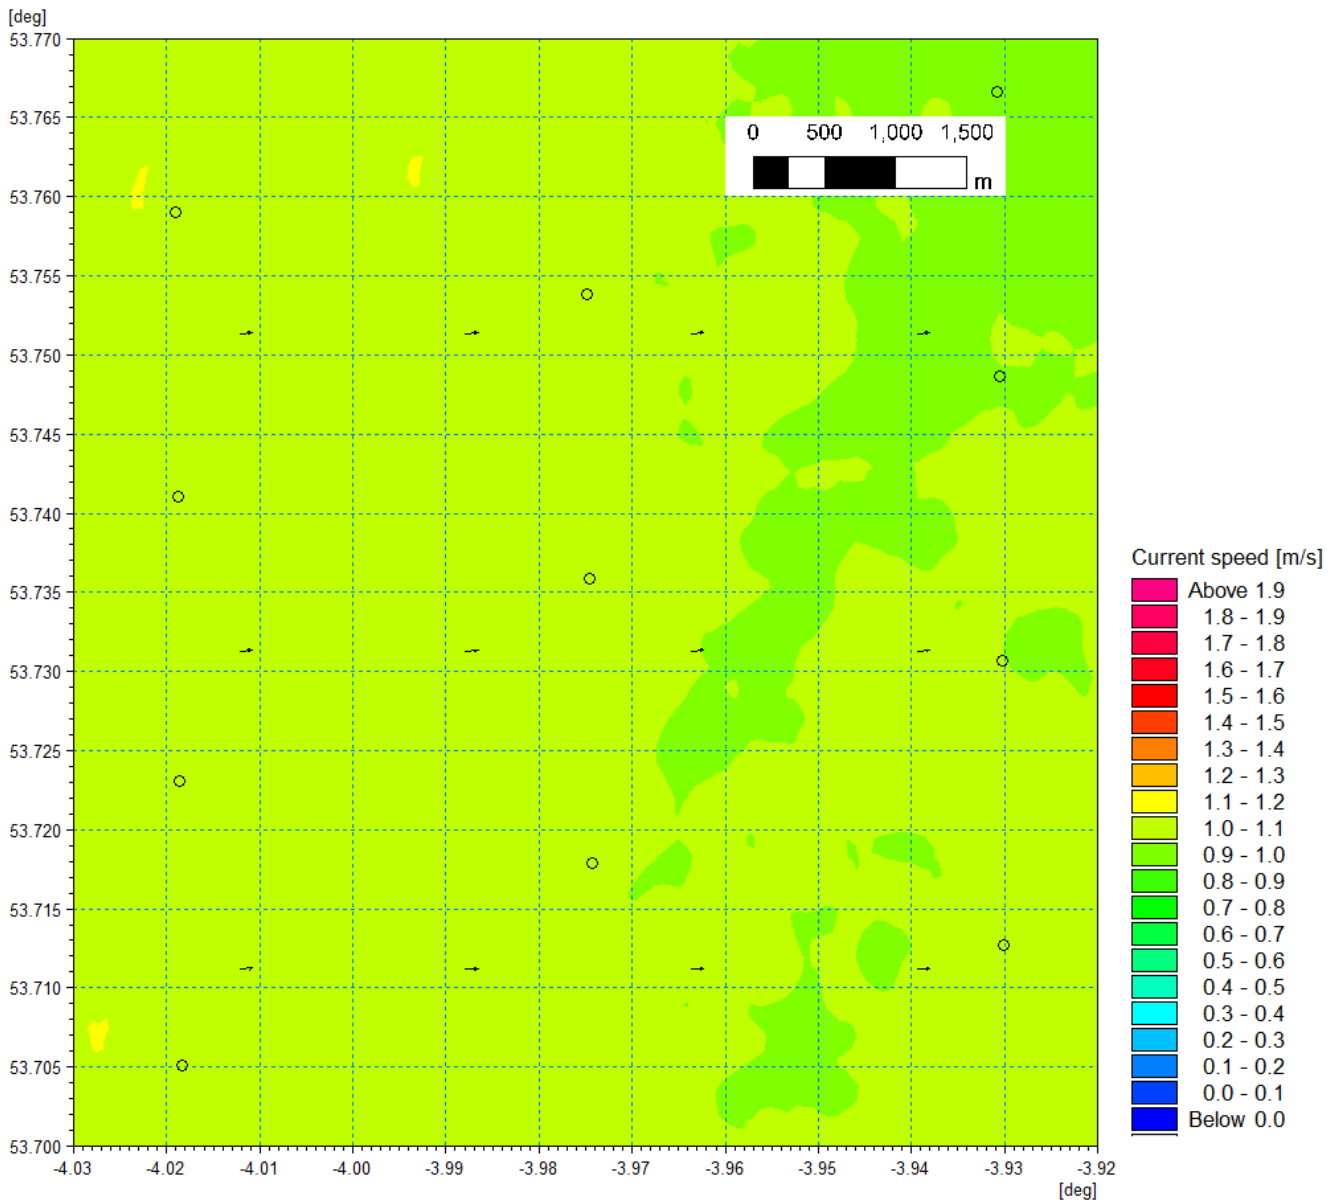


Figure 1.156: Baseline tidal flow pattern – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

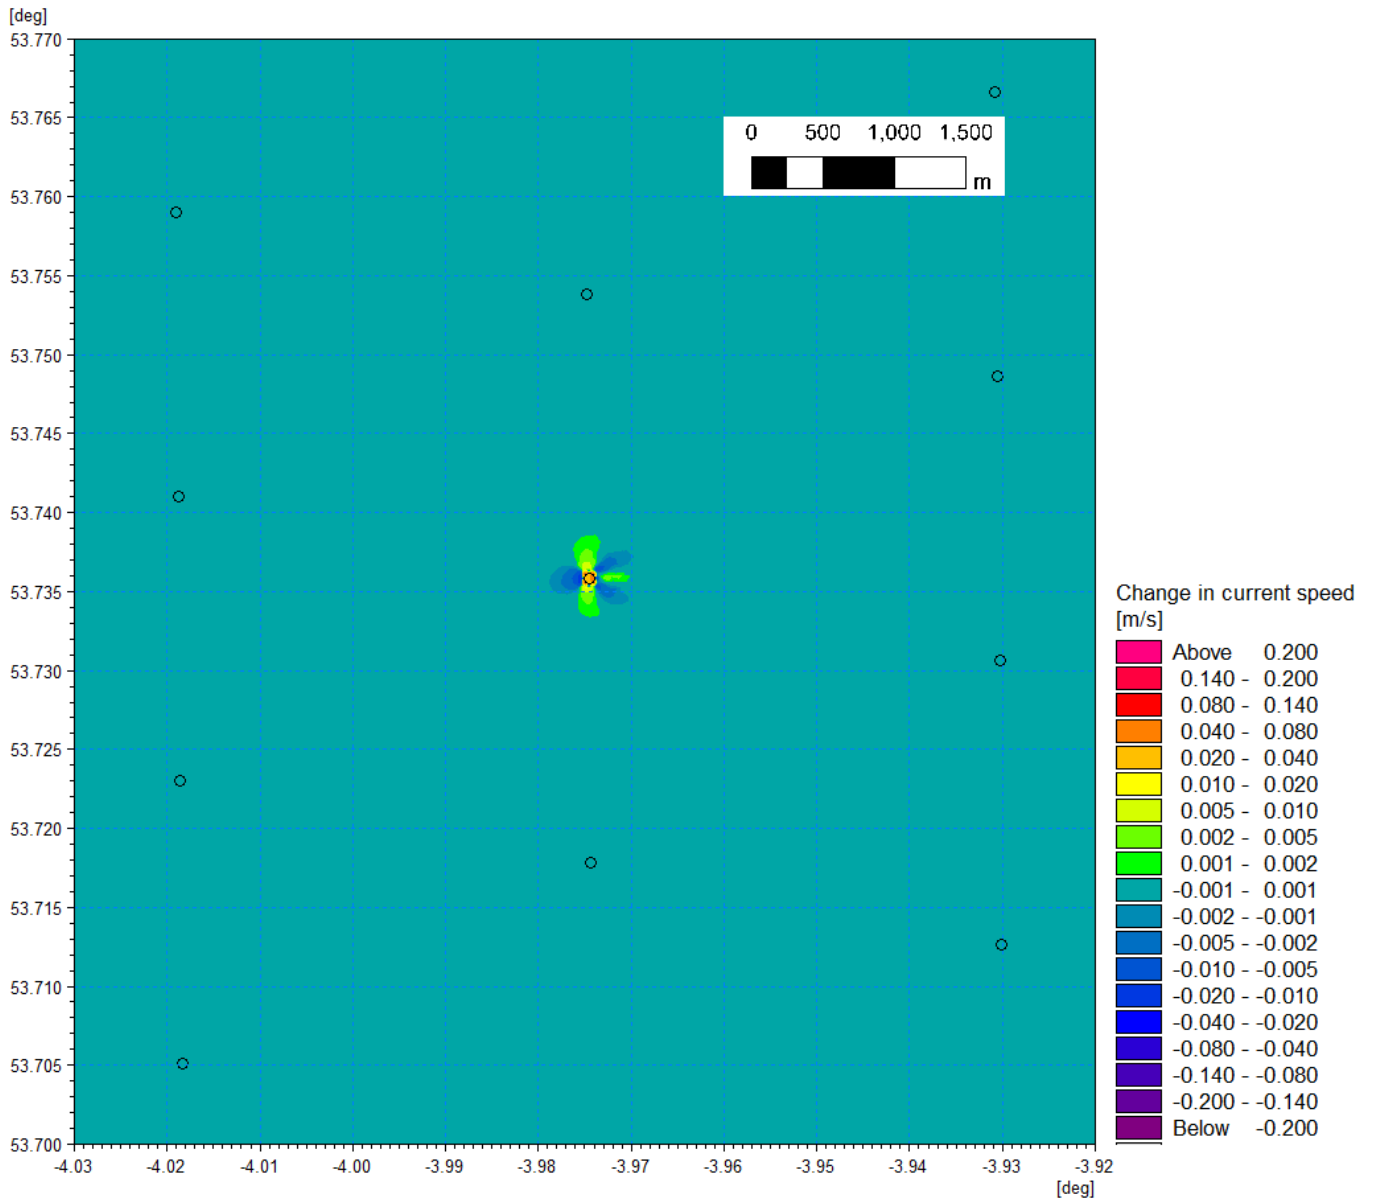


Figure 1.157: Change in tidal flow (post-construction minus baseline) suction bucket foundation – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

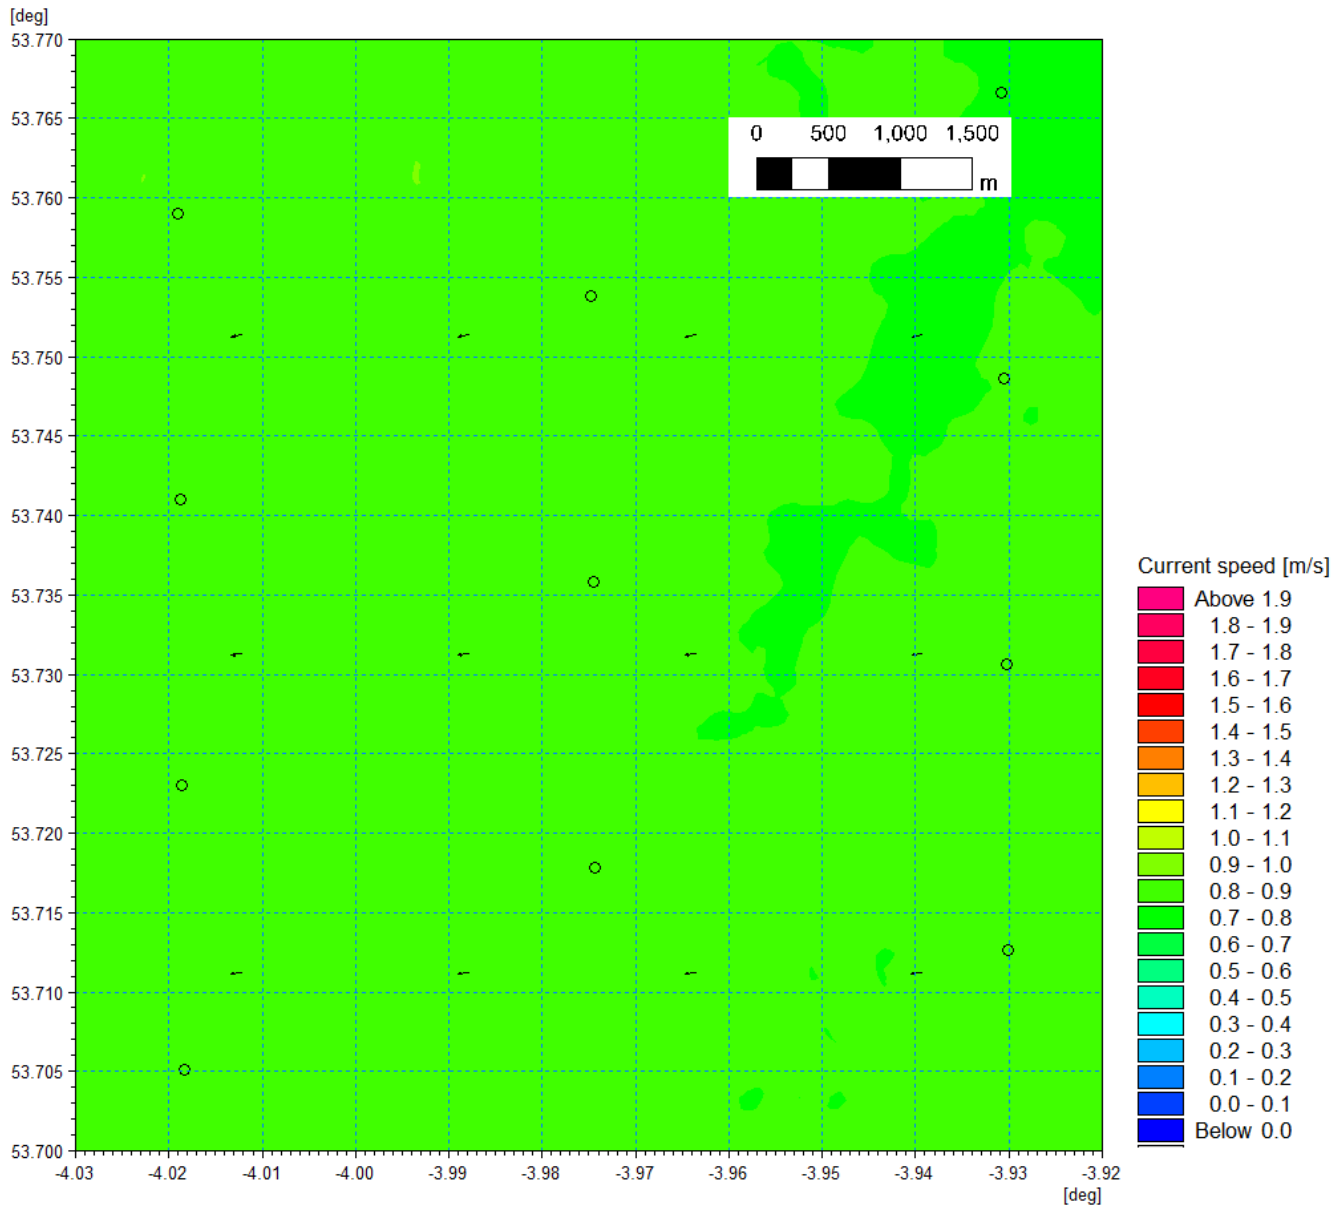


Figure 1.158: Baseline tidal flow pattern – ebb tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

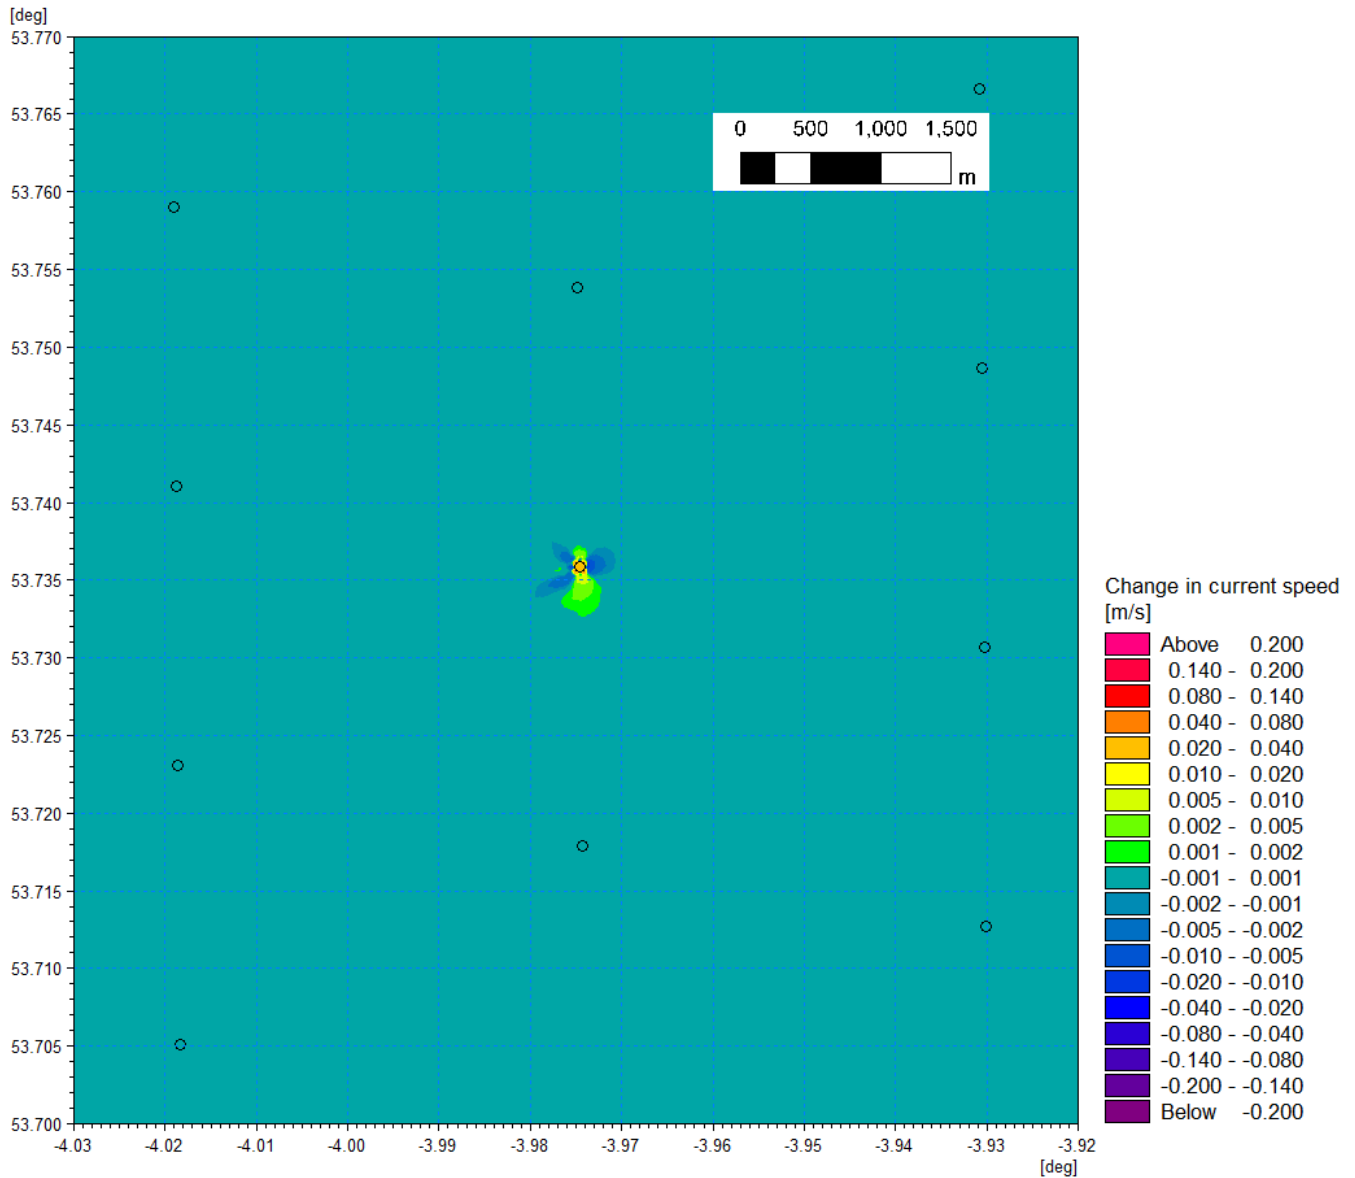


Figure 1.159: Change in tidal flow (post-construction minus baseline) suction bucket foundation – ebb tide.

Wave climate

- 1.4.2.6 Using the same principle as the tidal modelling, the wave climate modelling was repeated with the inclusion of the suction bucket foundations and scour protection. Again, changes were found to be indiscernible from the baseline scenario by visual inspection therefore difference plots have been provided using the same scale for all scenarios.
- 1.4.2.7 The baseline 000° storm for the Mona Array Area is presented for the 1 in 1 year in Figure 1.160 with the difference shown in Figure 1.161. Similarly, the 1 in 20 year storm from this direction is presented in Figure 1.168 and Figure 1.169. The changes are seen as reductions in the lee of the foundation. The maximum changes observed in the immediate vicinity (50 m) were limited to a maximum of 6 cm which represents c. 1.25% of the baseline significant wave height (4.8 m). The wave shadow is typically less than one half of this value. These changes would be indiscernible from the baseline wave climate.
- 1.4.2.8 The changes to waves originating from 090° sector are shown in Figure 1.162 and Figure 1.171, both 1 in 1 and 1 in 20 year storm waves are of similar magnitudes to those experienced from the 000° sector, limited to c. 2% of the baseline wave height (3.8 m) within 50 m of the structure. These changes fall to around half of this value 100 m from the foundation.
- 1.4.2.9 In the Morgan Array Area, for both the 000° and 030° directions, significant wave heights are 4.0 m to 4.4 m for 1 in 20 year events, thus the changes experienced are likely to fall in between those of the modelled results for 000° and 090° directions for the Mona Offshore Wind Project. With changes in wave heights likely in the range of 1% to 2% and limited to 50 m to the south of the structures.
- 1.4.2.10 For the westerly storms from 240° and 270° the incident wave heights are typically twice that of the fetch limited directions. For these scenarios the effect of the presence of the infrastructure is much smaller with changes in wave height typically less than 1% (6 cm) during the more onerous 1 in 20 year storms, as presented in Figure 1.173 and Figure 1.175. Positive changes to wave height are also observed within the wave shadow with a similar magnitude as the increases described above. Both positive and negative changes to wave height fall below 0.5% within 100 m of the foundation, and to indiscernible levels of change within 200 m.
- 1.4.2.11 In the Morgan Array Area, for both the 240° and 270° directions, baseline significant wave heights lie between 6.0 m and 6.4 m for 1 in 20 year events, thus the changes in wave height from baseline levels experienced due to the installation of the foundation structure are likely to fall in between those of the modelled results for 240° directions for the installation within the Mona Array Area. With changes in wave heights likely around 1% (6 cm). Again, these changes would fall to < 0.5% within 100 m of the foundations, and would be indiscernible beyond 200 m. These changes from baseline conditions would extend in the north east and easterly directions.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

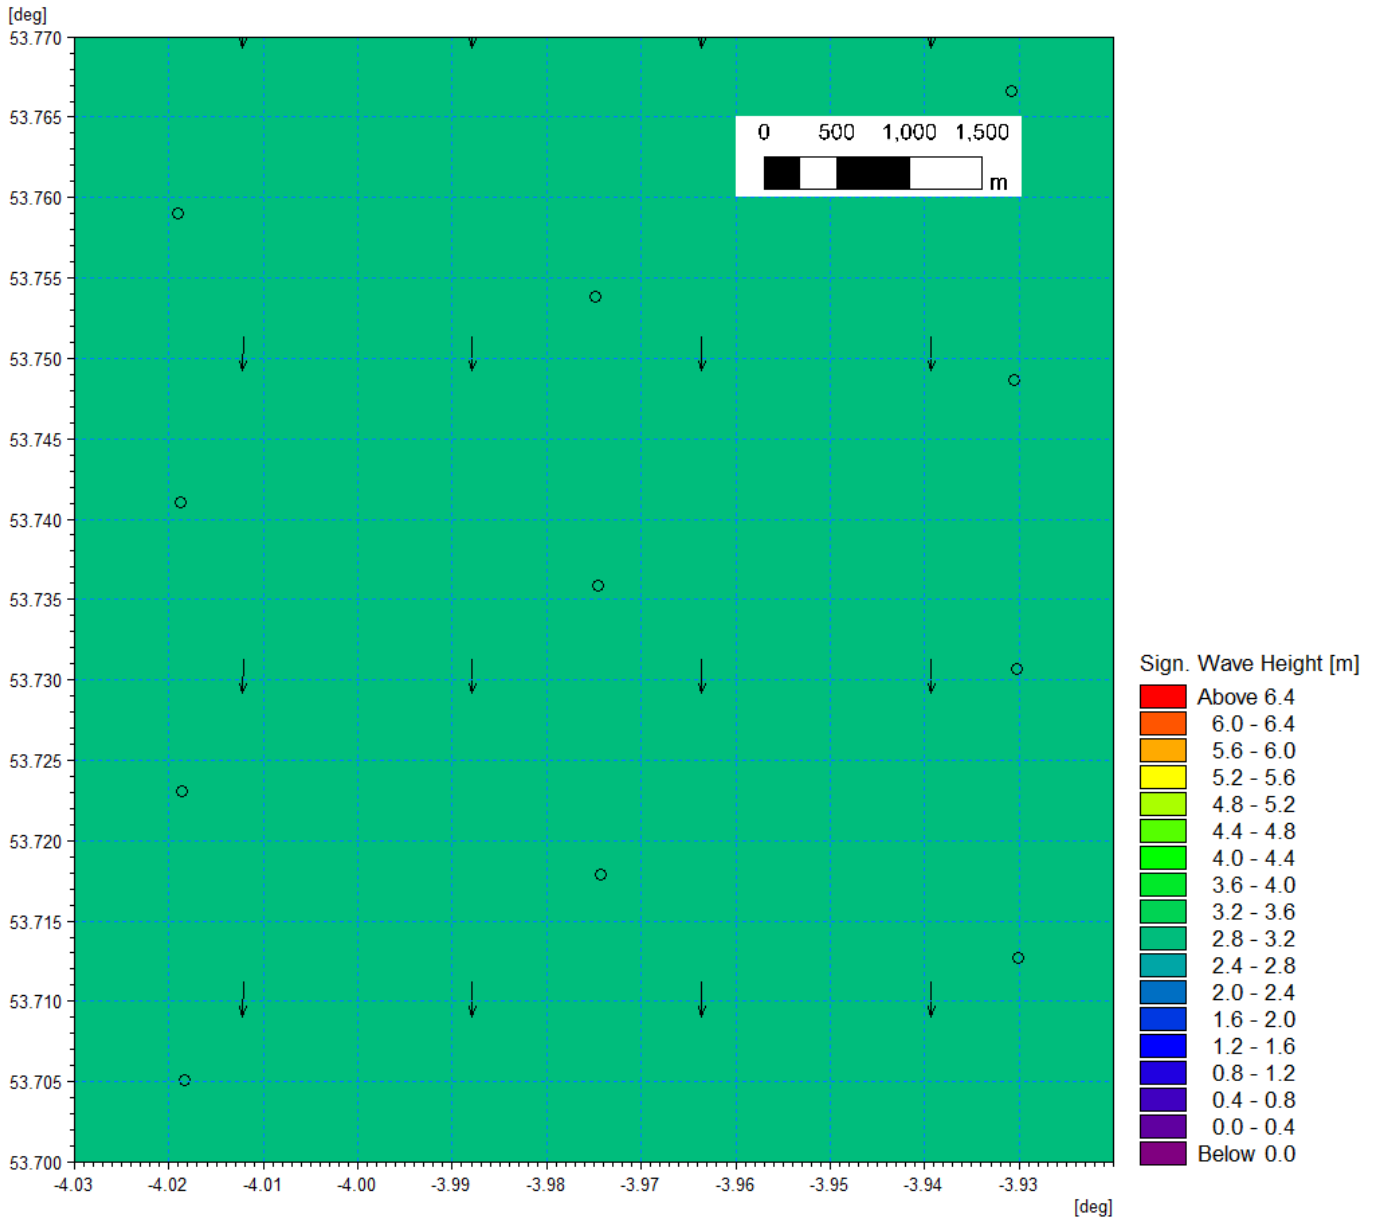


Figure 1.160: Baseline wave climate 1 in 1 year storm 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

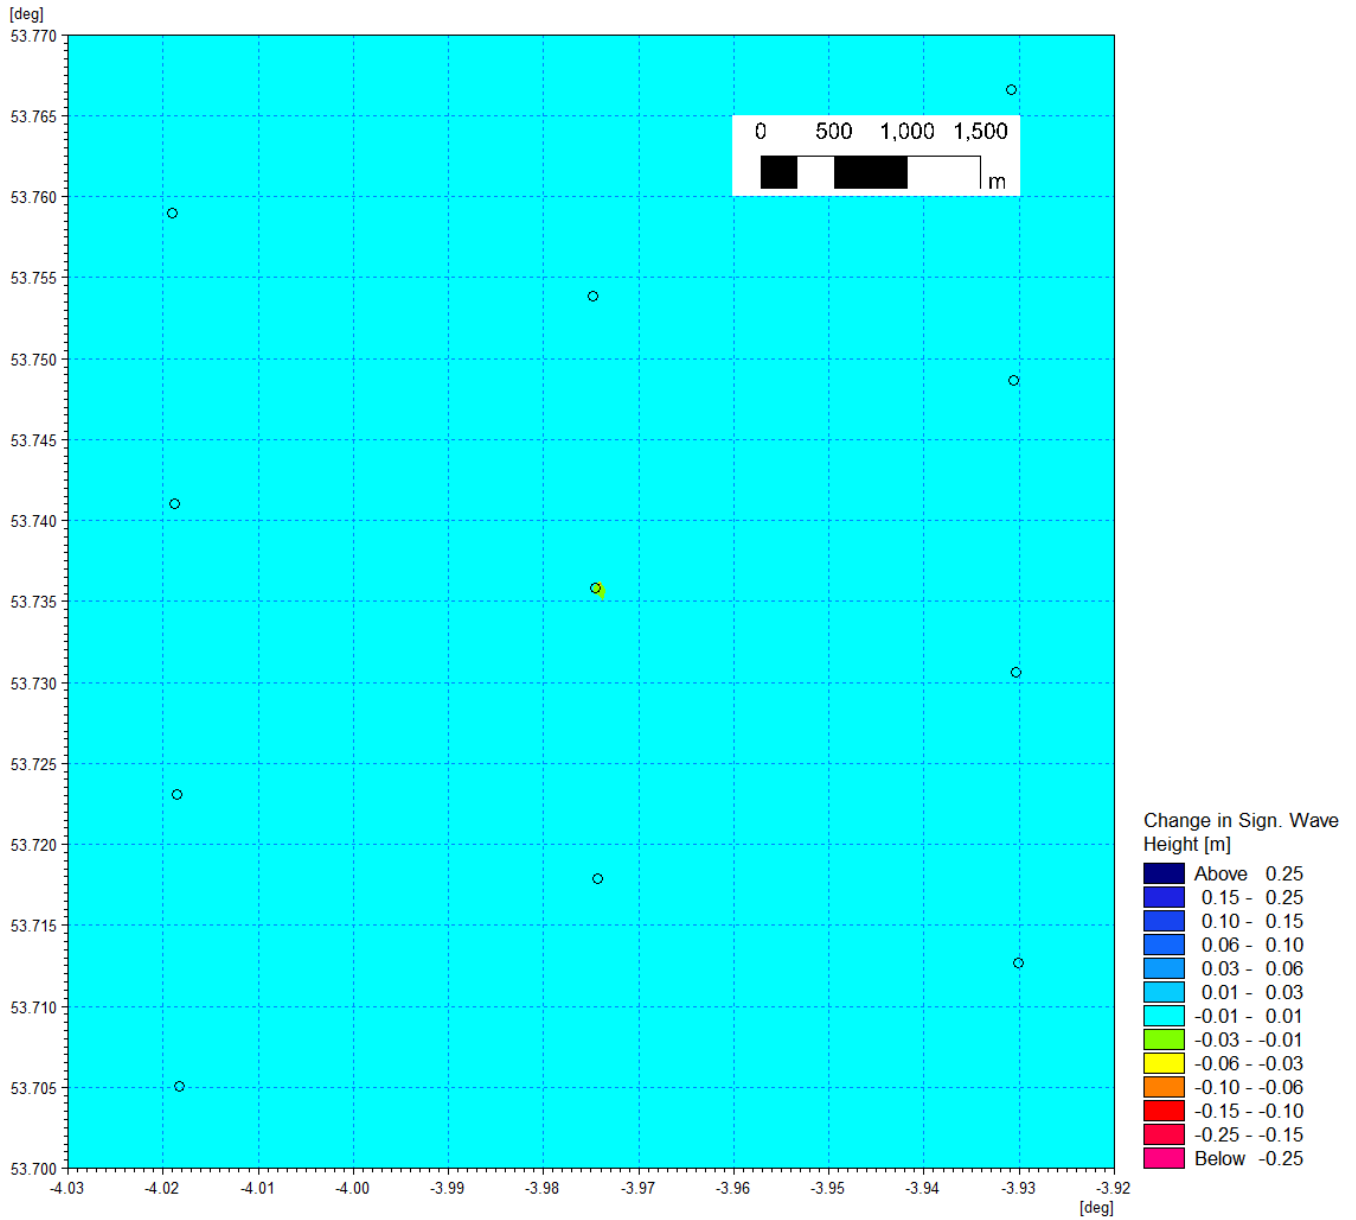


Figure 1.161: Change in wave climate 1 in 1 year storm 000° MHW (post-construction minus baseline) – suction bucket foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

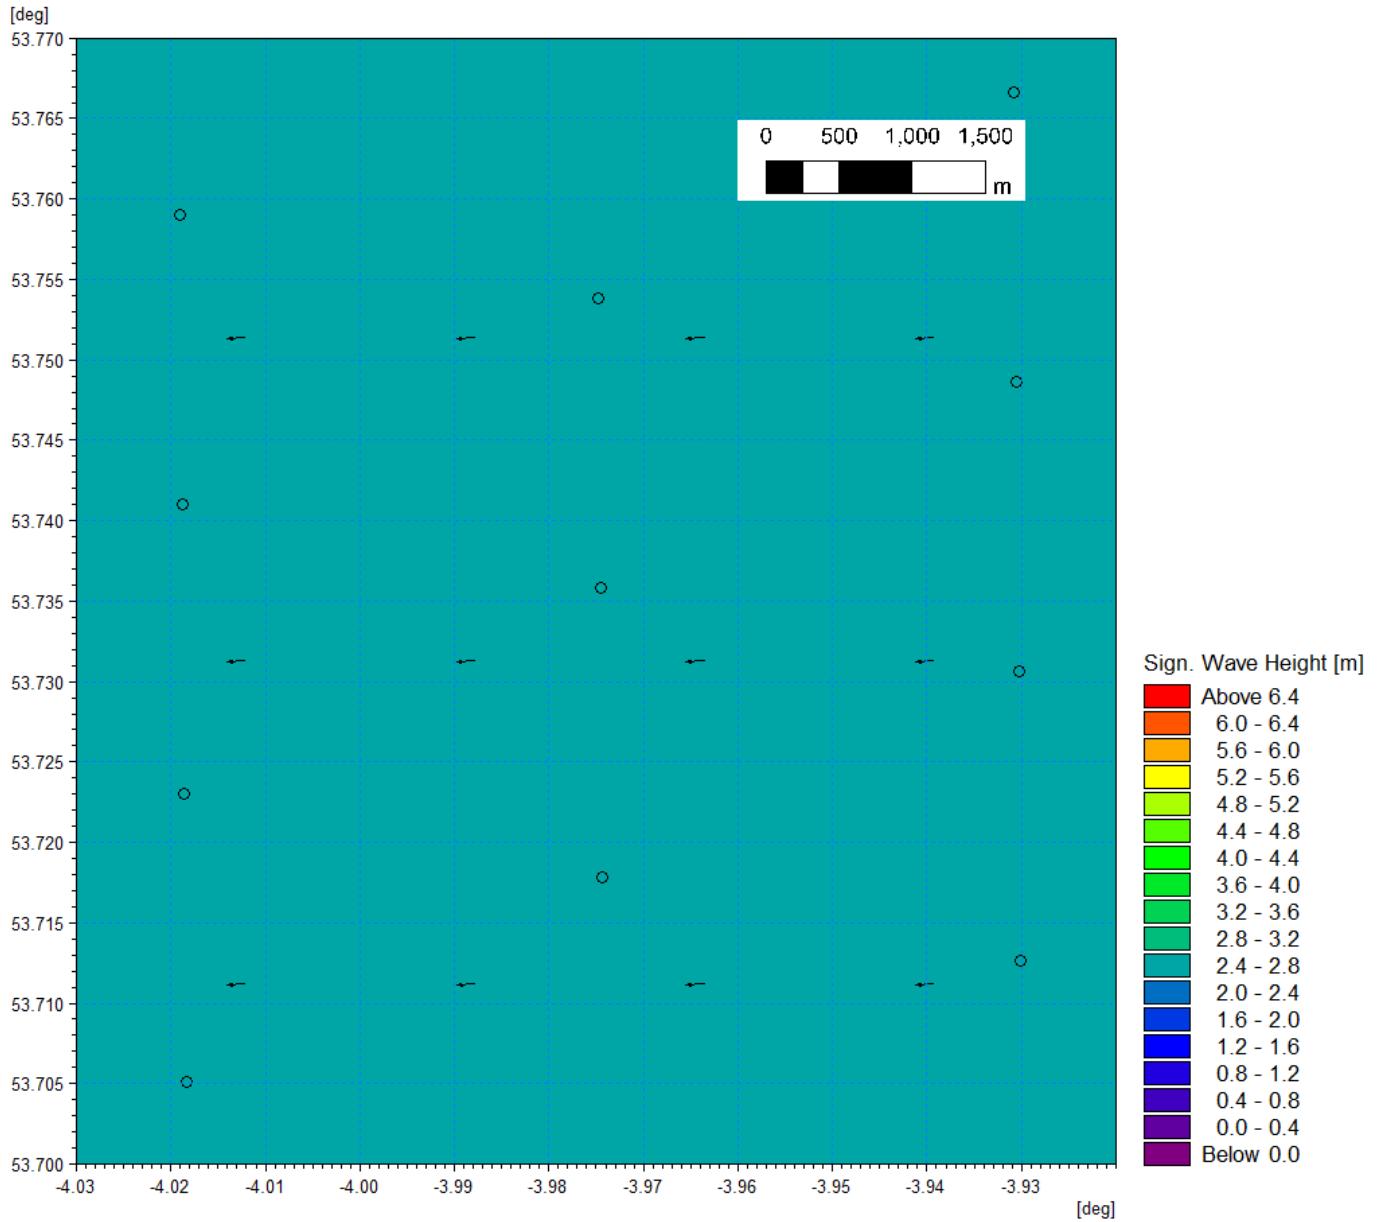


Figure 1.162: Baseline wave climate 1 in 1 year storm 090° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

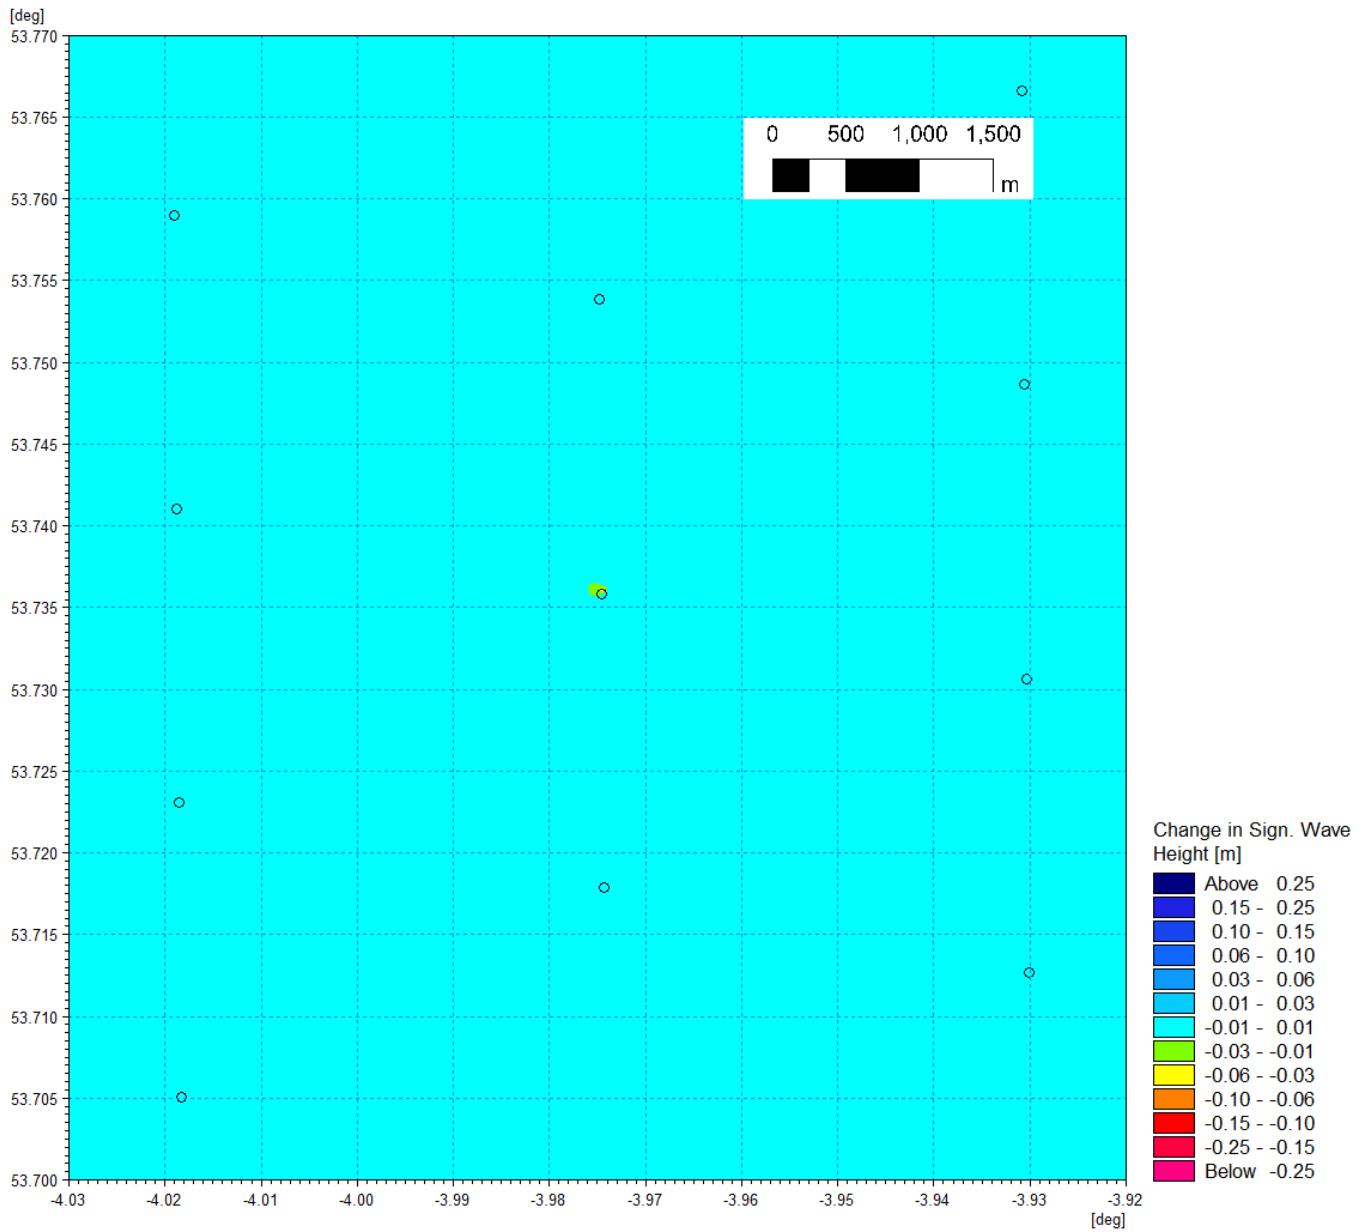


Figure 1.163: Change in wave climate 1 in 1 year storm 090° MHW (post-construction minus baseline) – suction bucket foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

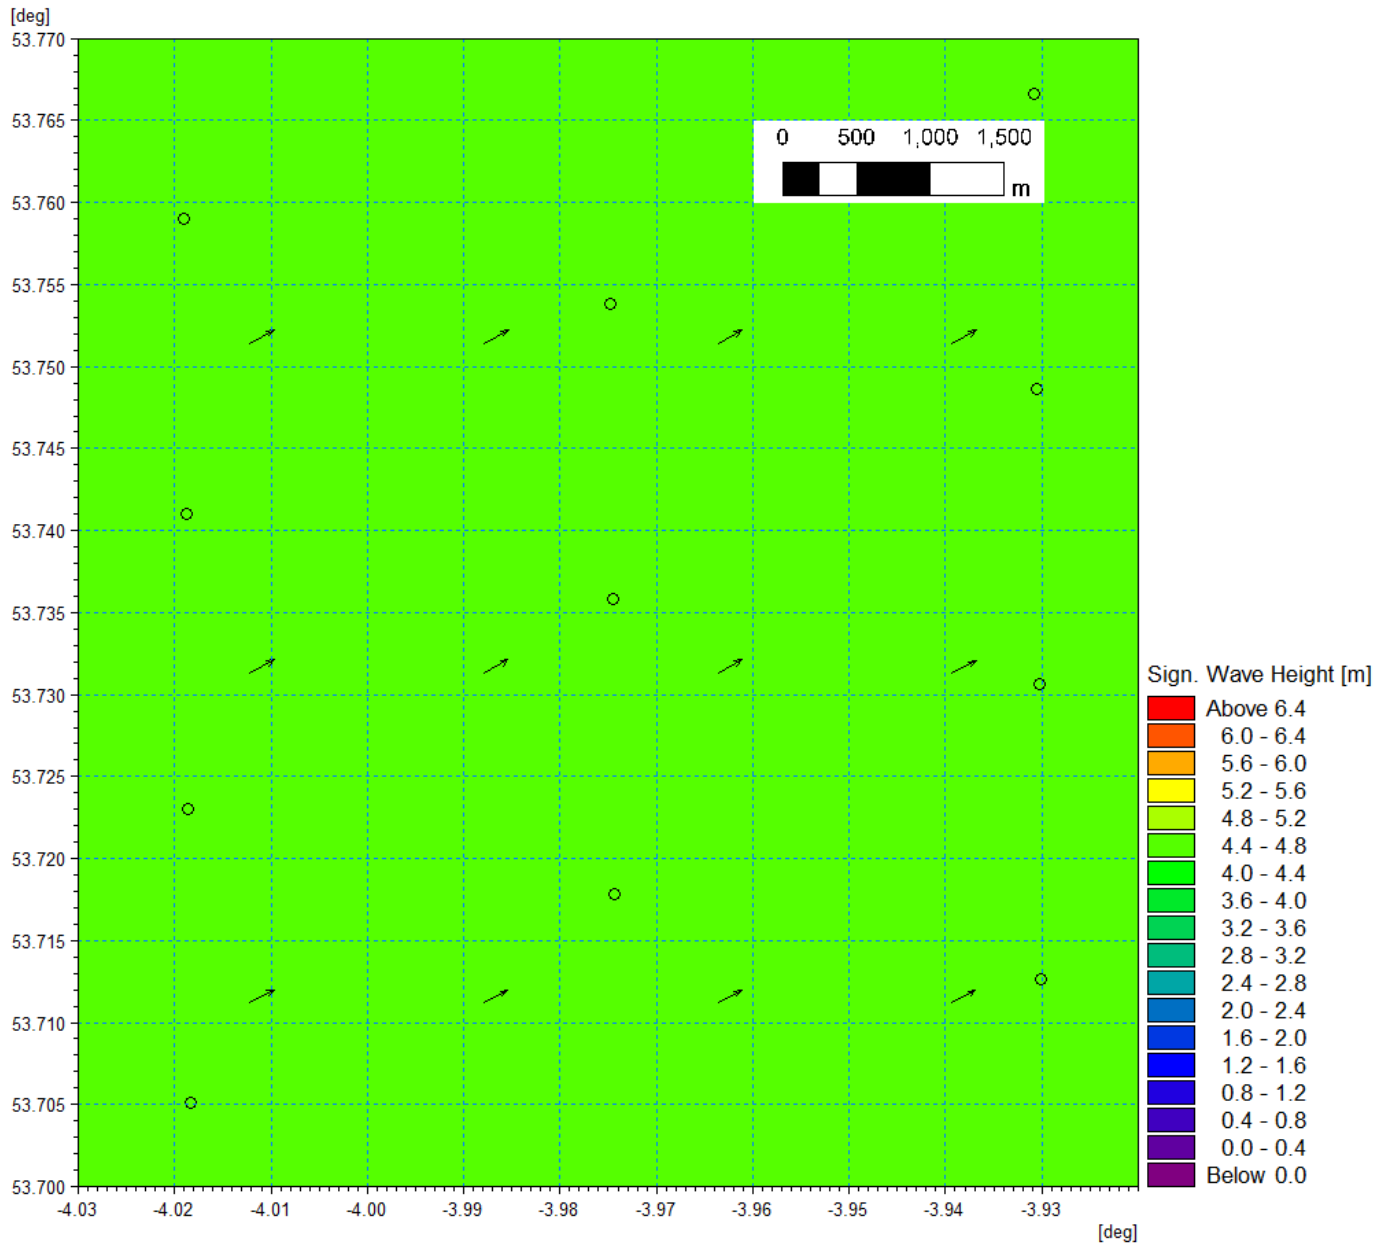


Figure 1.164: Baseline wave climate 1 in 1 year storm 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

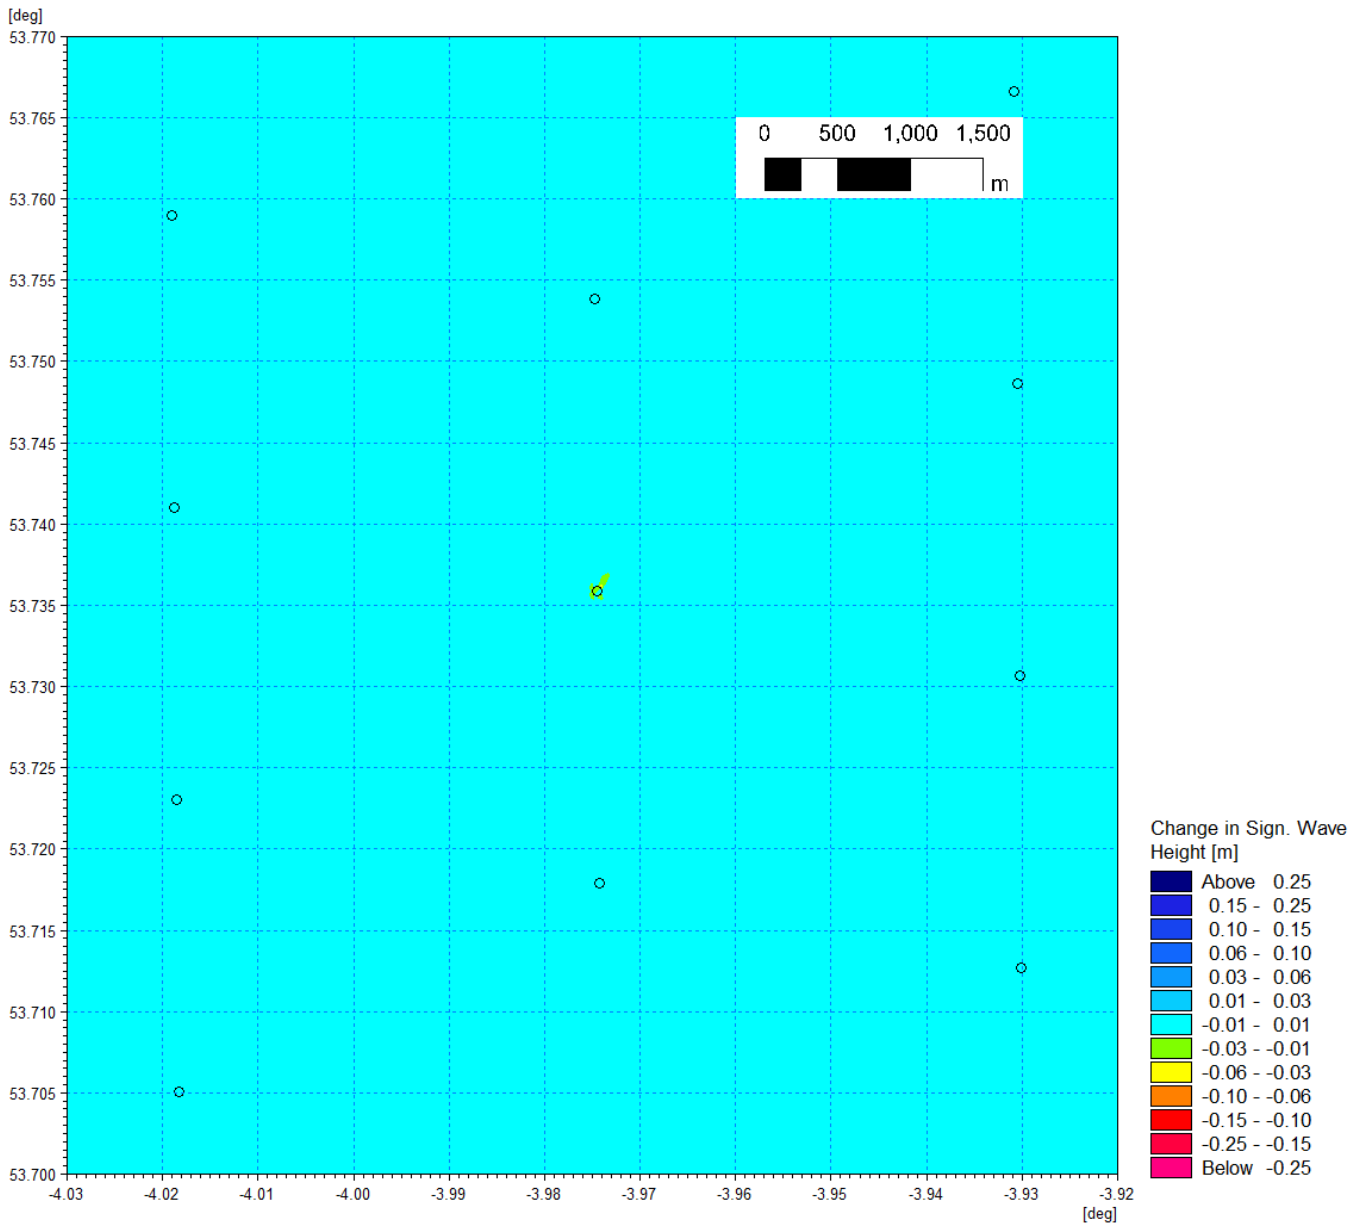


Figure 1.165: Change in wave climate 1 in 1 year storm 240° MHW (post-construction minus baseline) – suction bucket foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

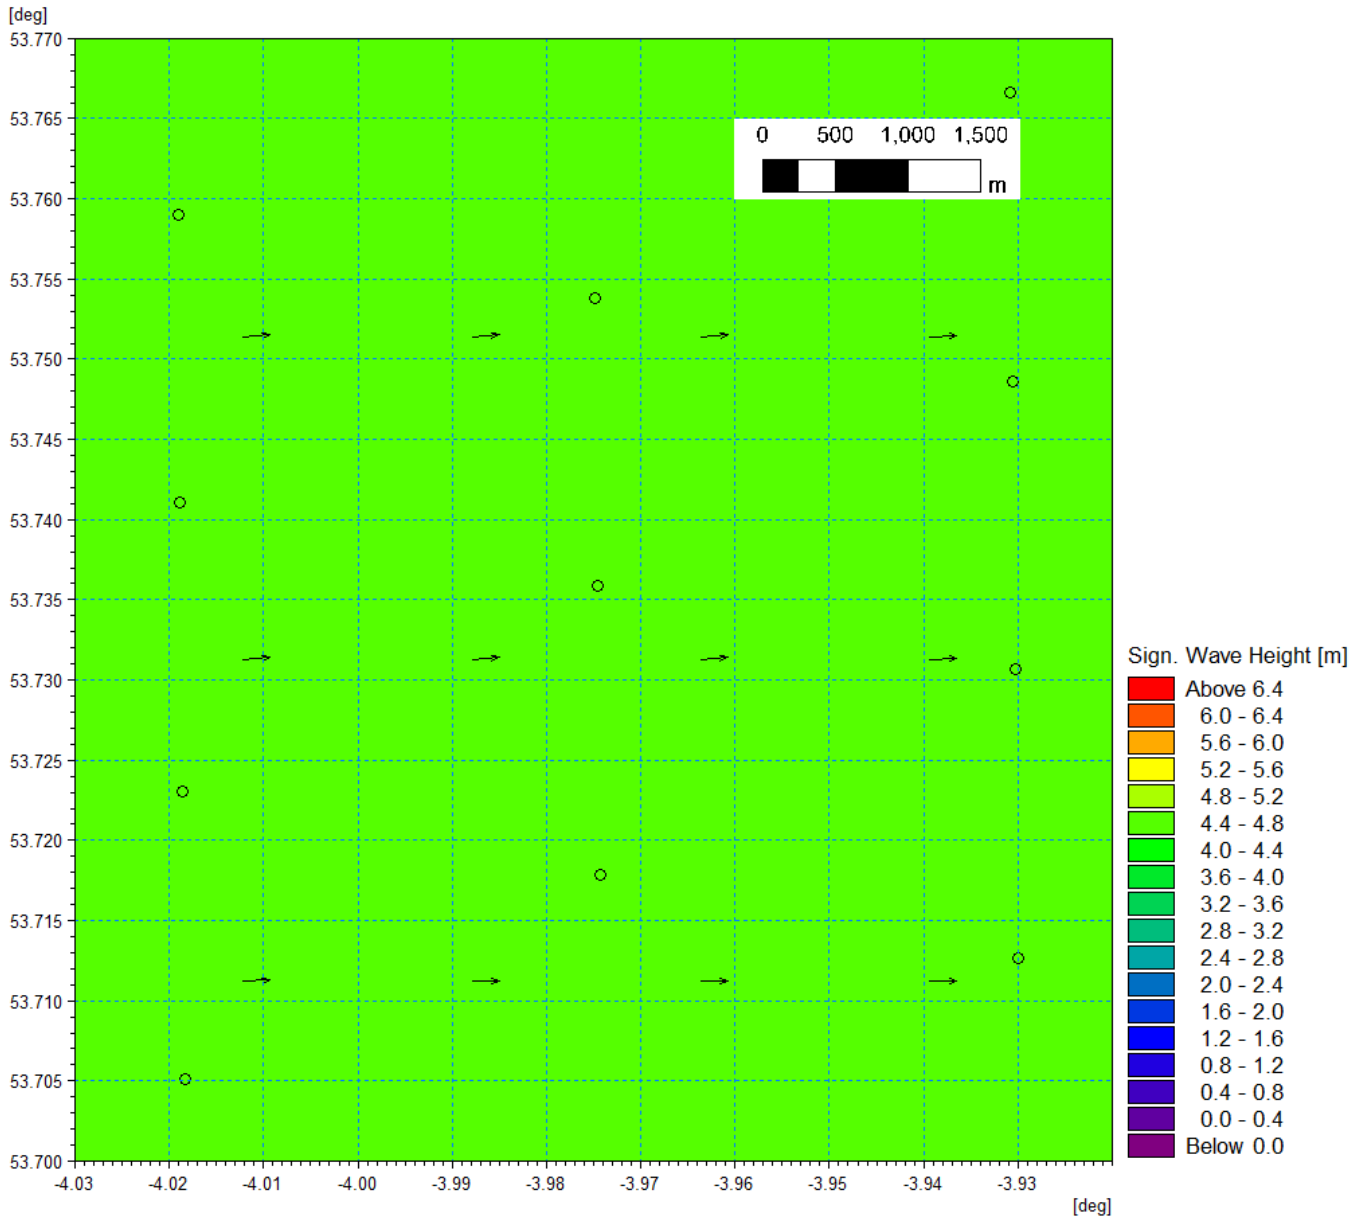


Figure 1.166: Baseline wave climate 1 in 1 year storm 270° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

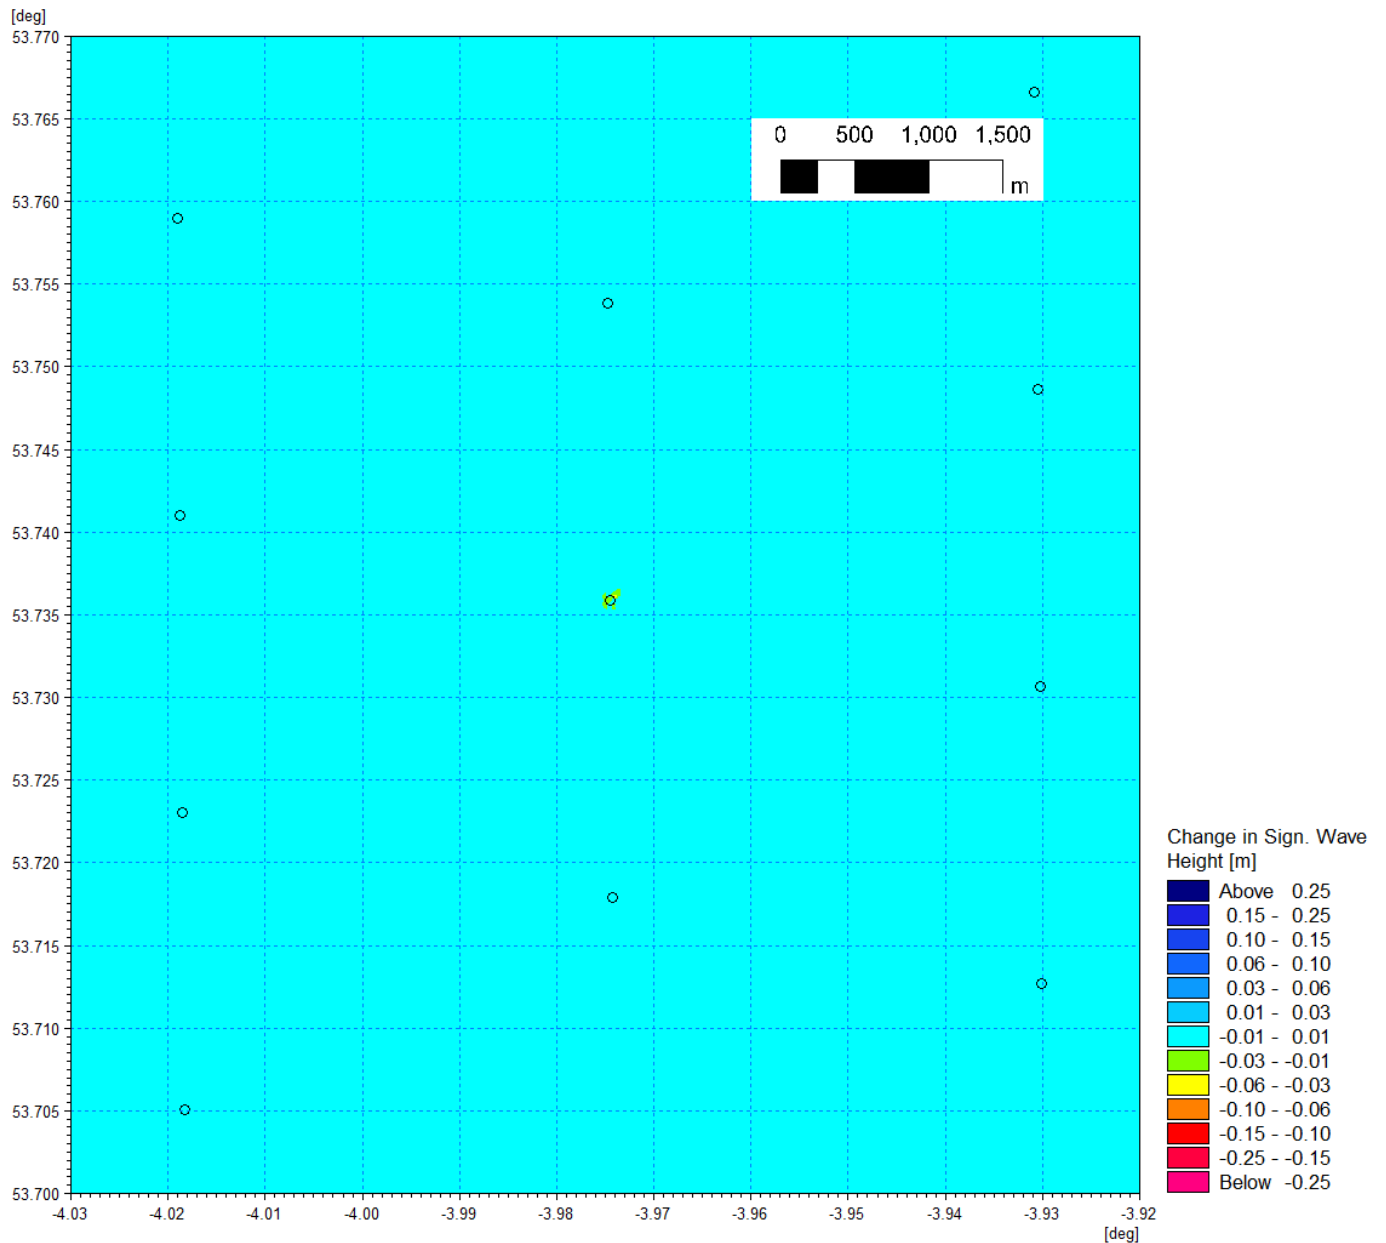


Figure 1.167: Change in wave climate 1 in 1 year storm 270° MHW (post-construction minus baseline) – suction bucket foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

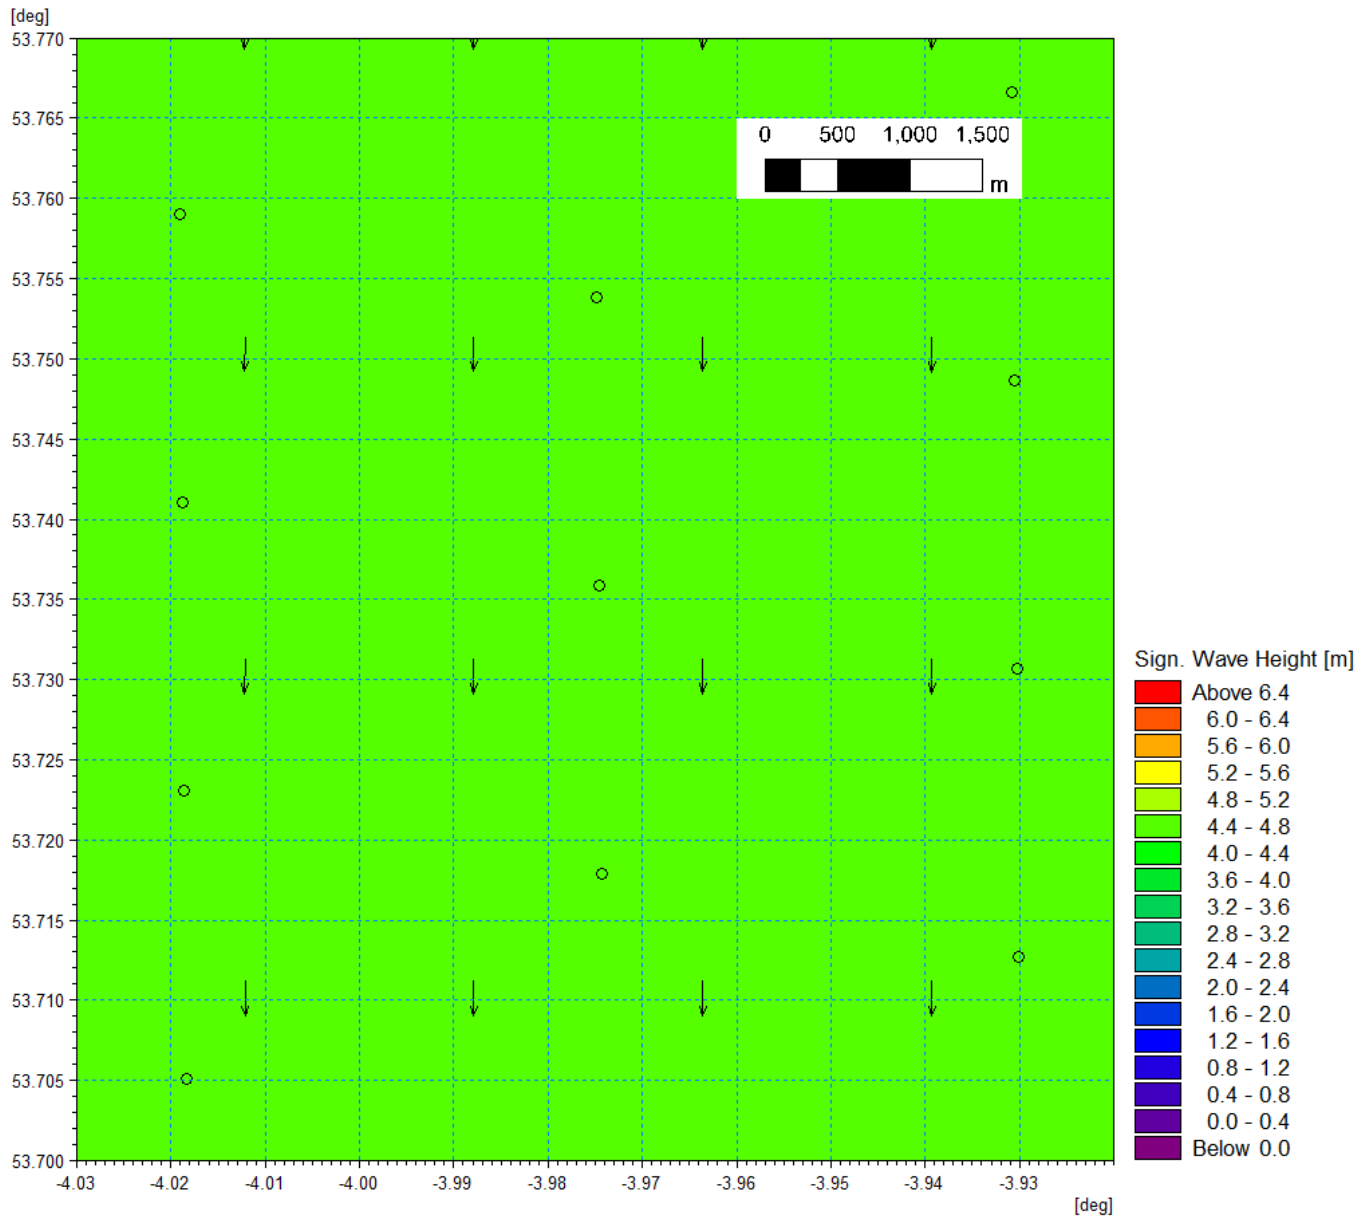


Figure 1.168: Baseline wave climate 1 in 20 year storm 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

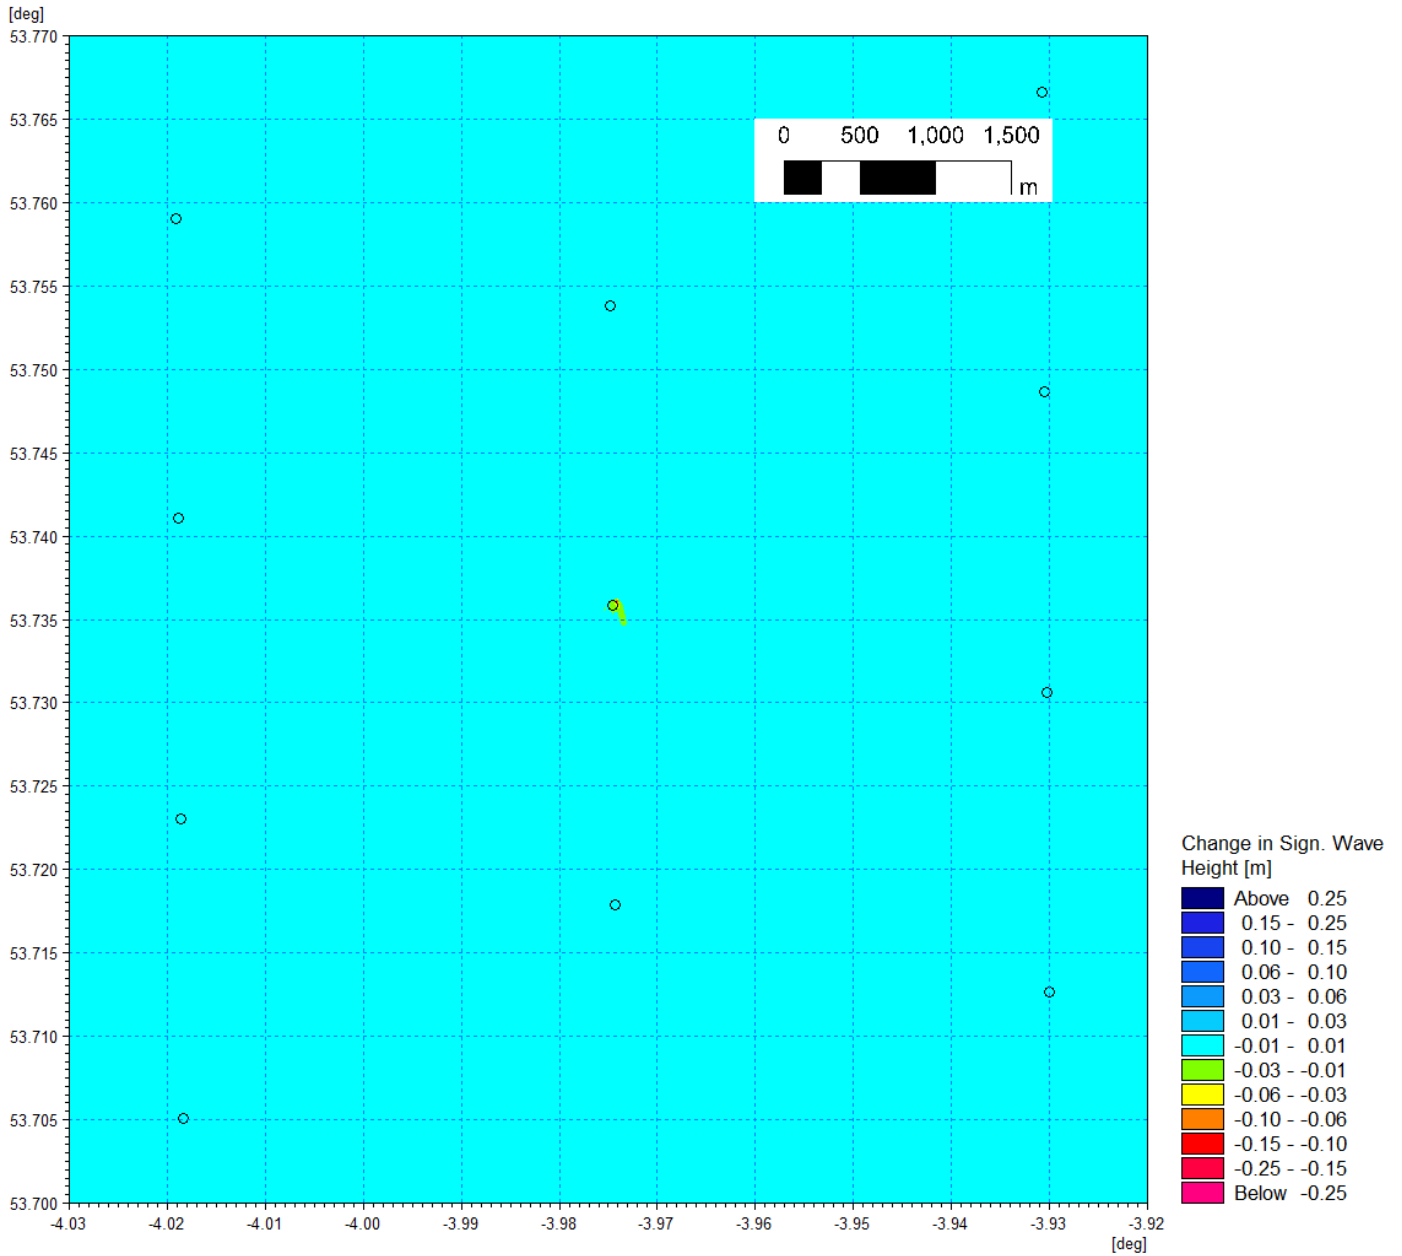


Figure 1.169: Change in wave climate 1 in 20 year storm 000° MHW (post-construction minus baseline) – suction bucket foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

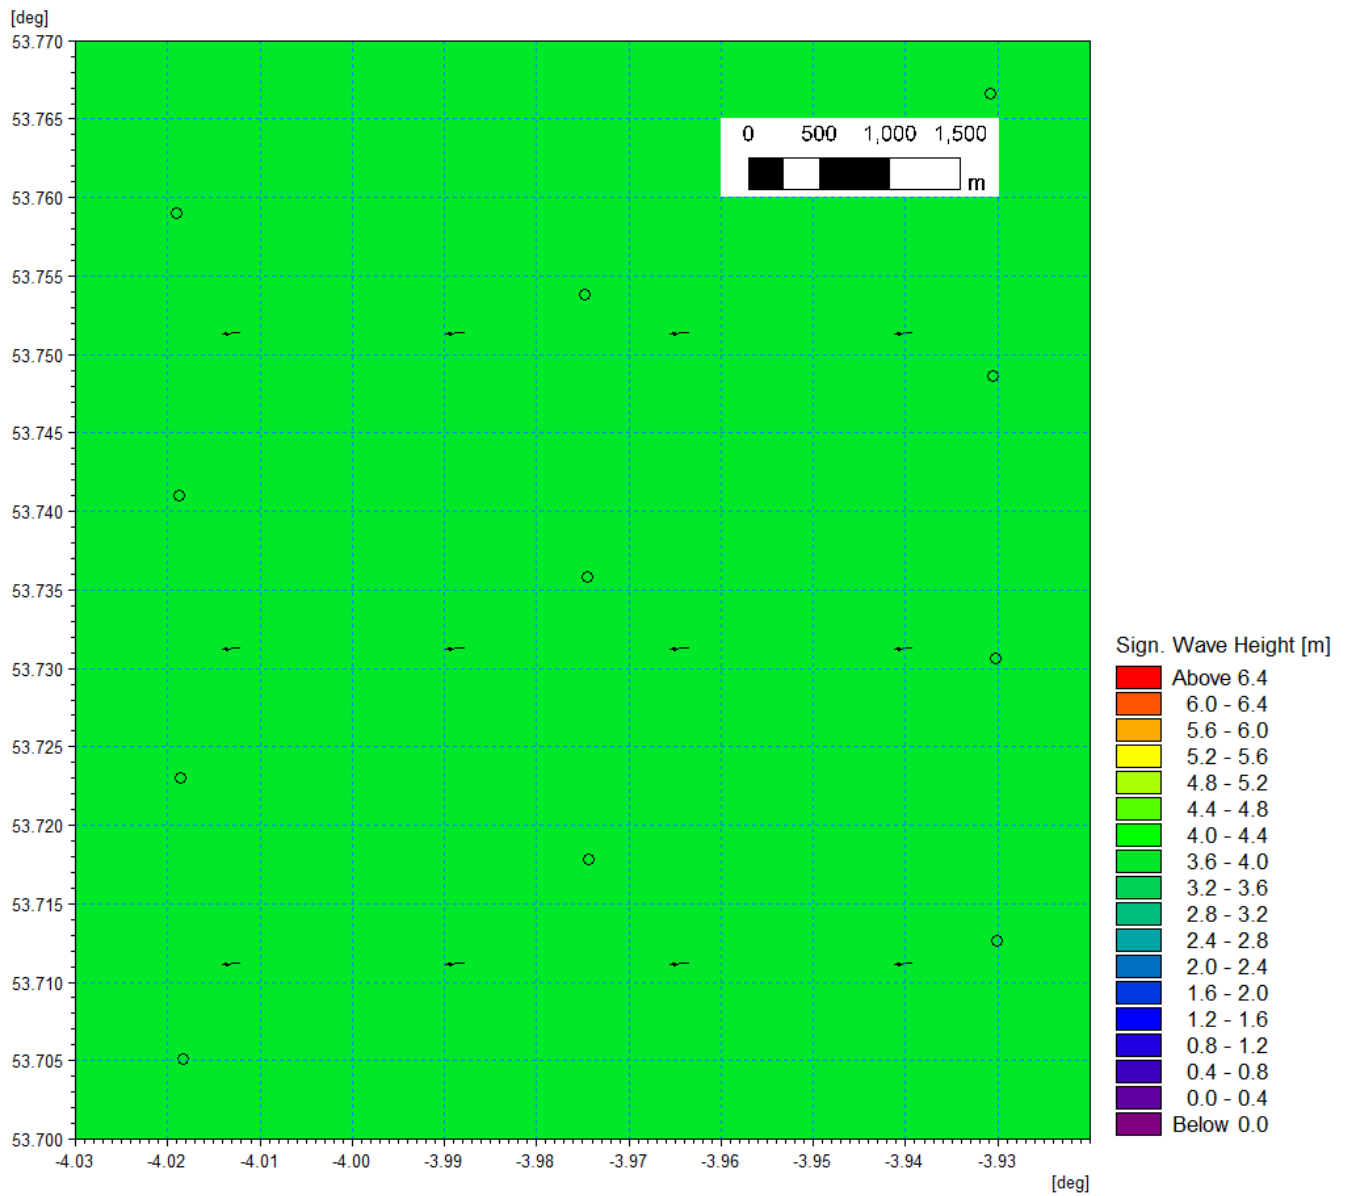


Figure 1.170: Baseline wave climate 1 in 20 year storm 090° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

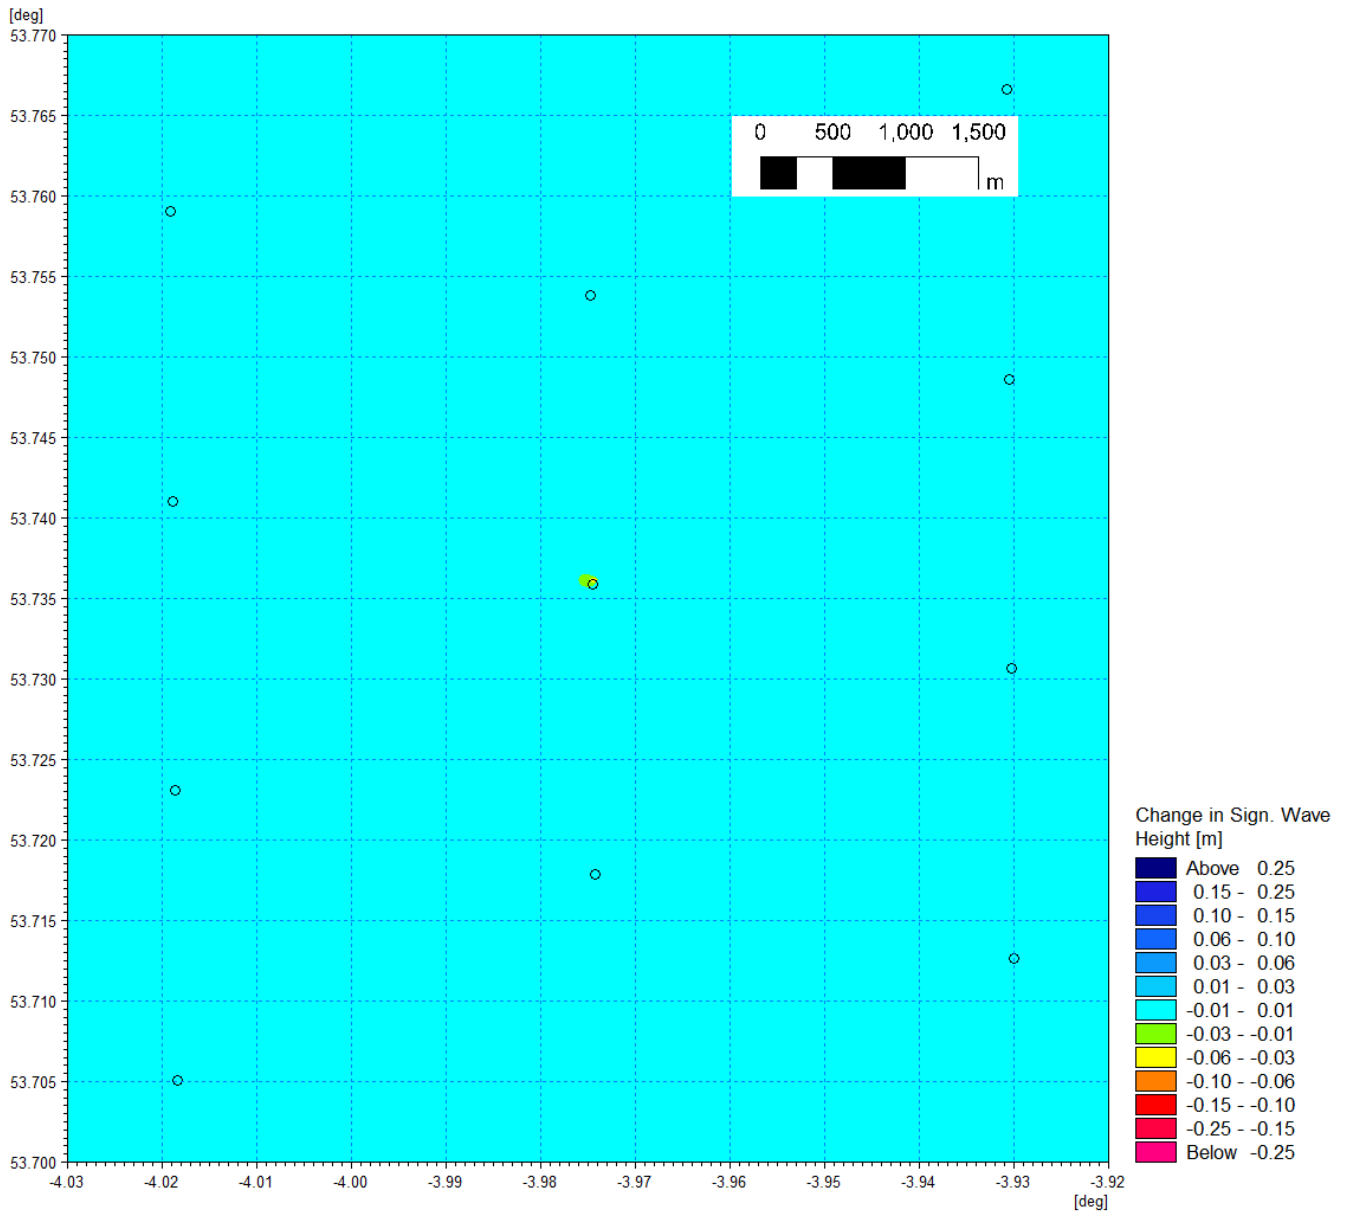


Figure 1.171: Change in wave climate 1 in 20 year storm 090° MHW (post-construction minus baseline) – suction bucket foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

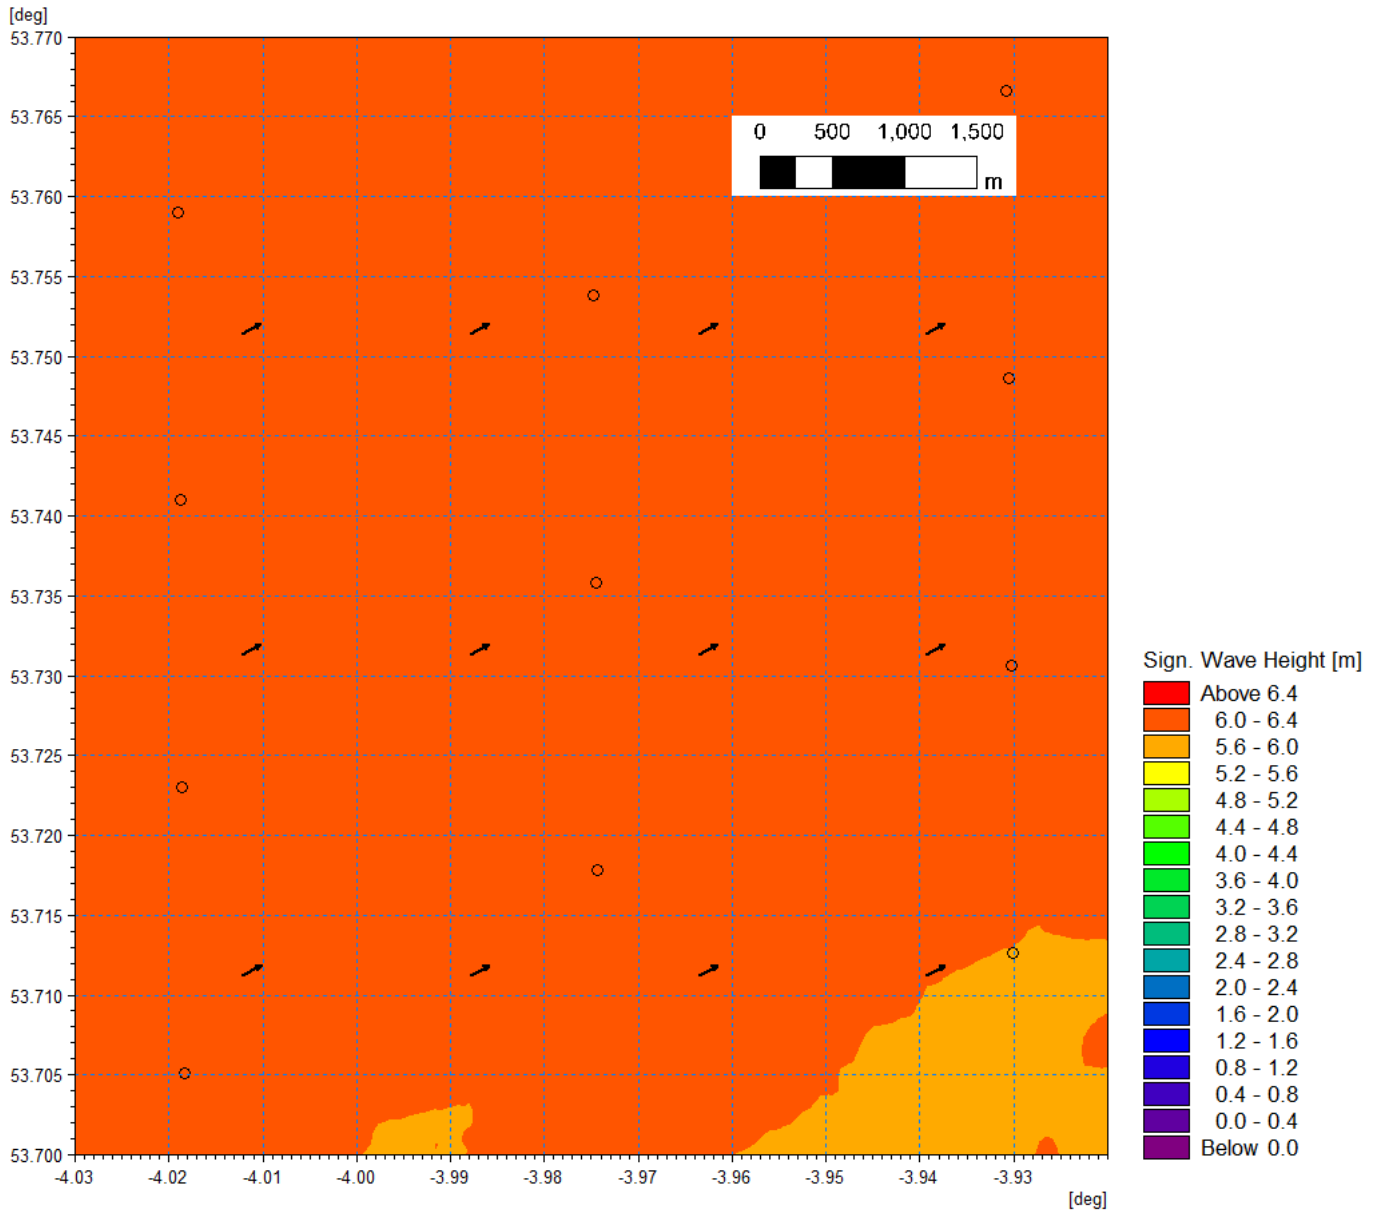


Figure 1.172: Baseline wave climate 1 in 20 year storm 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

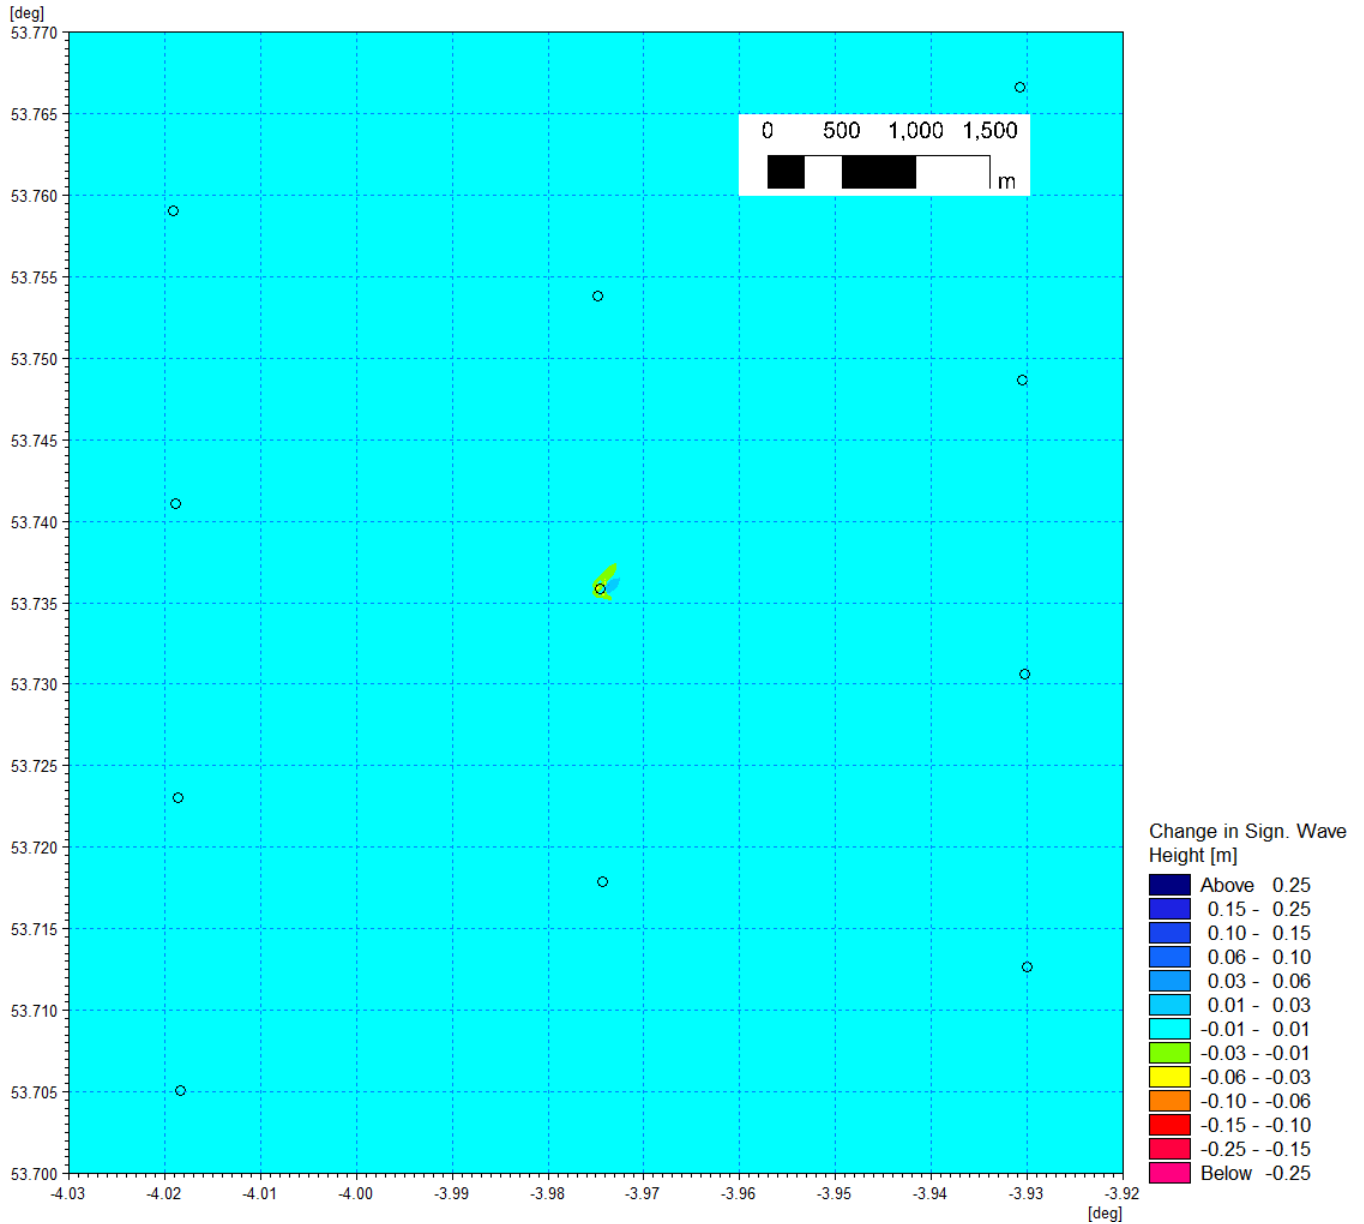


Figure 1.173: Change in wave climate 1 in 20 year storm 240° MHW (post-construction minus baseline) – suction bucket foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

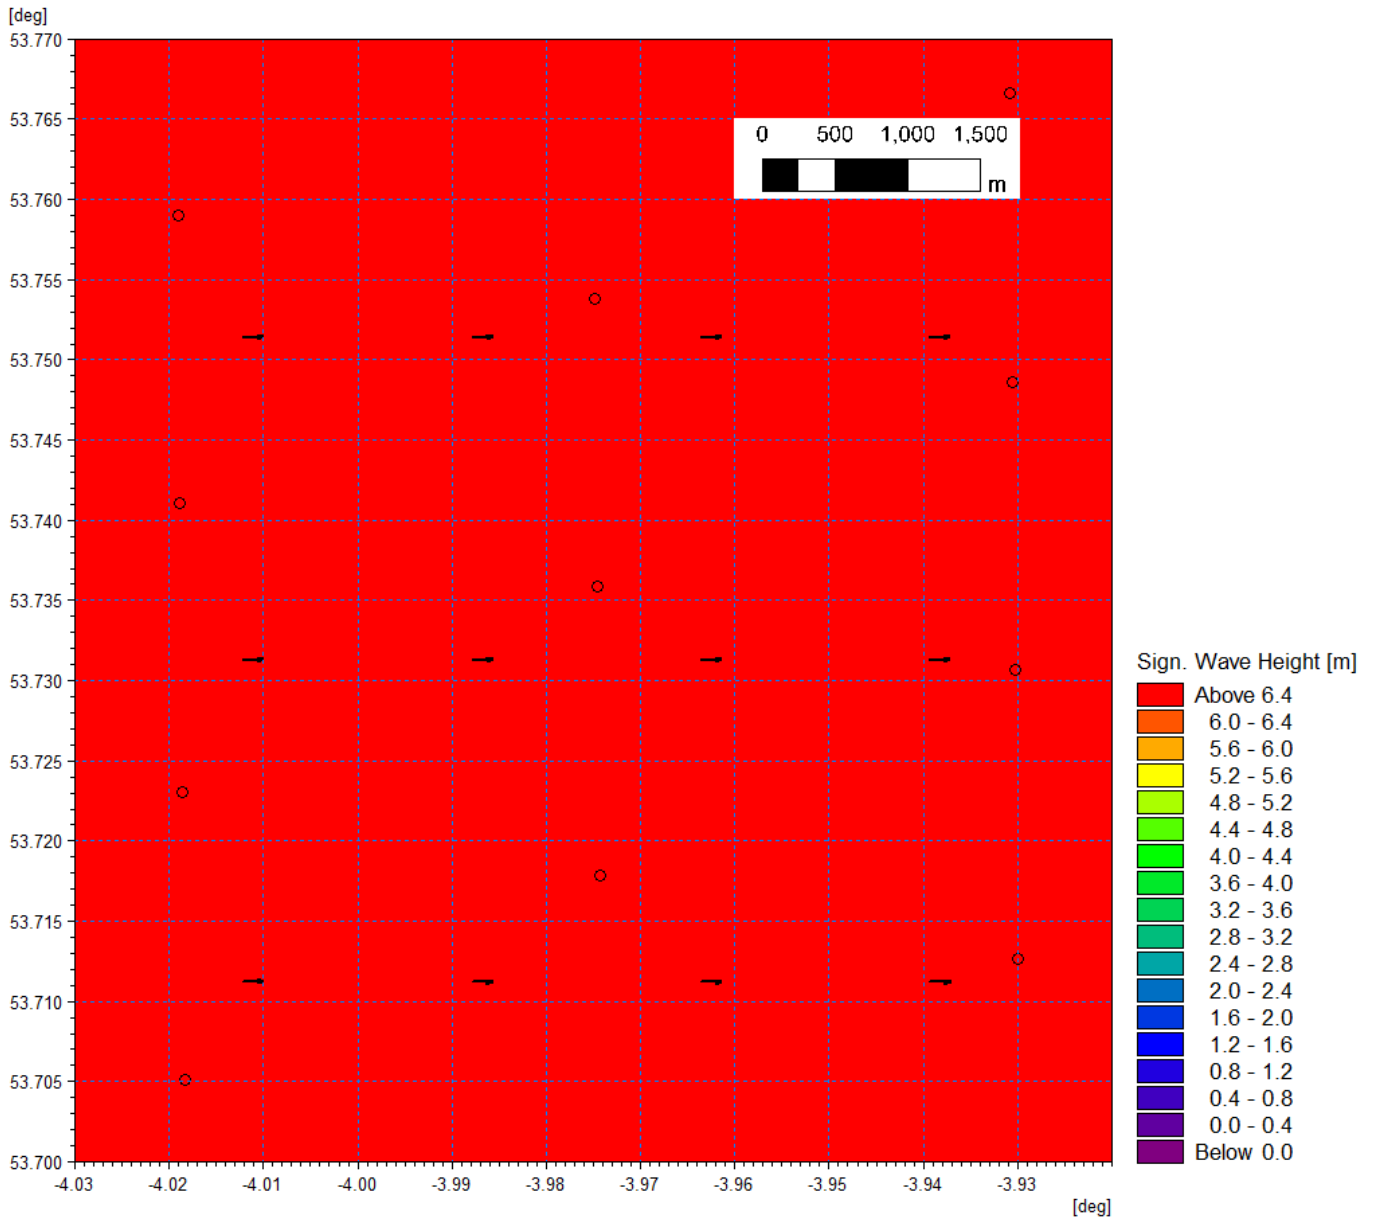


Figure 1.174: Baseline wave climate 1 in 20 year storm 270° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

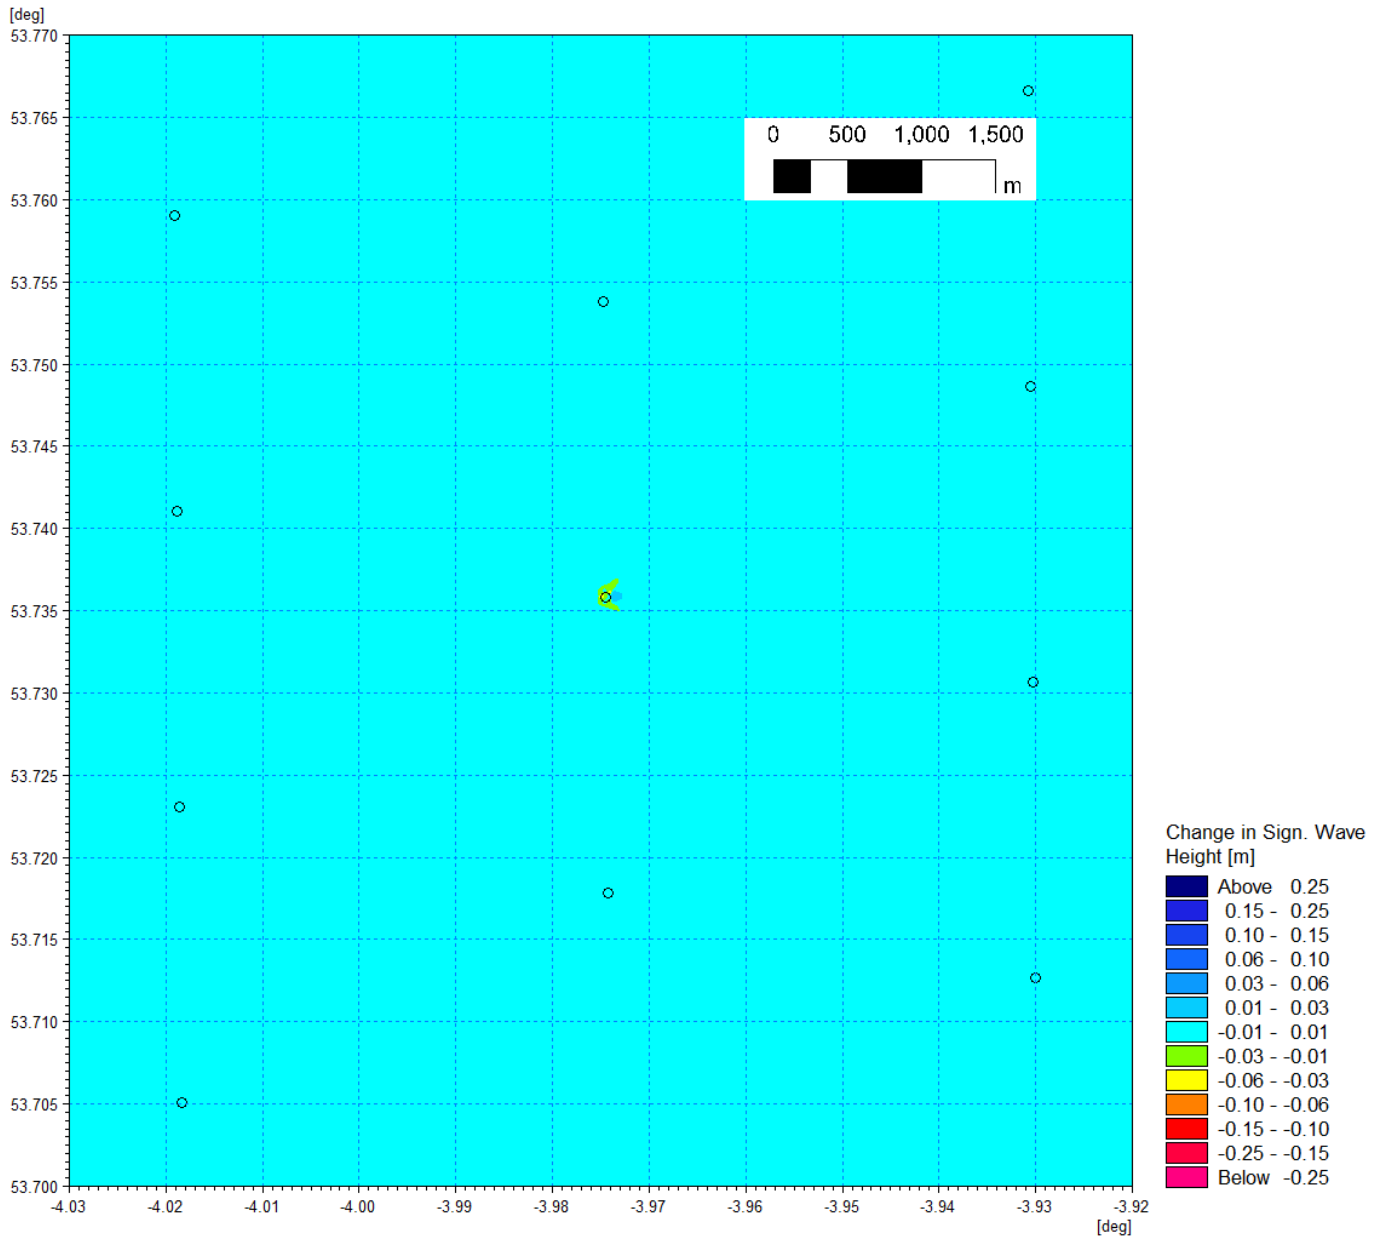


Figure 1.175: Change in wave climate 1 in 20 year storm 270° MHW (post-construction minus baseline) – suction bucket foundation.

1.4.3 Conical gravity base foundations

1.4.3.1 The conical gravity base is that of the largest wind turbine units proposed. The conical gravity base comprised the following:

- Caisson diameter of 37 m and 15 m diameter at sea surface
- Scour protection average height of 2.6 m extending 24 m from the foundation.

Tidal flow

- 1.4.3.2 Again, sensitivity testing was performed for a single test foundation located within the Mona Array Area by repeating the hydrodynamic simulations used to describe the baseline, with the addition of one conical gravity base foundation. The post-installation results were subtracted from the baseline conditions to quantify the potential change in tidal flow. The conical gravity base foundation was included in the sensitivity modelling as it represents the largest potential wind turbine foundation. The bathymetry was also amended to take account of scour protection. The following figures show the mid flood and mid ebb steps from the simulation respectively, but with one conical gravity base foundation in place.
- 1.4.3.3 Figure 1.176 shows the baseline flood tide flow patterns with Figure 1.177 showing a focussed plot of the post-construction changes which are limited to the vicinity of the development. In the difference figures a log scale has been introduced to accentuate the values for clarity. Similarly, Figure 1.178 and Figure 1.179 show the same information for the ebb tide. During peak current speed the flow is redirected in the immediate vicinity of the structure. The variation is a maximum of 4 cm/s (decrease in current speed) in the immediate vicinity (50 m) of the structure which constitutes 4% of flows on the flood and c. 4.7% on the ebb tide. This reduces significantly with increased distance from each structure falling to a maximum of 2 cm/s, just 100 m from the structure.
- 1.4.3.4 These modelling outcomes for the single structure located within the Mona Array Area are applicable to the Morgan Generation Assets. given a slightly reduced peak current speed within the Morgan Array Area (c. 0.1 m/s smaller than the Mona Array Area). The change in peak flows can be expected to be slightly smaller, therefore the percentage change in current speed from the baseline is likely to remain at c. 4% to 4.7% on the peak flood and the ebb respectively and oriented in line with tidal currents in the Morgan Array Area.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

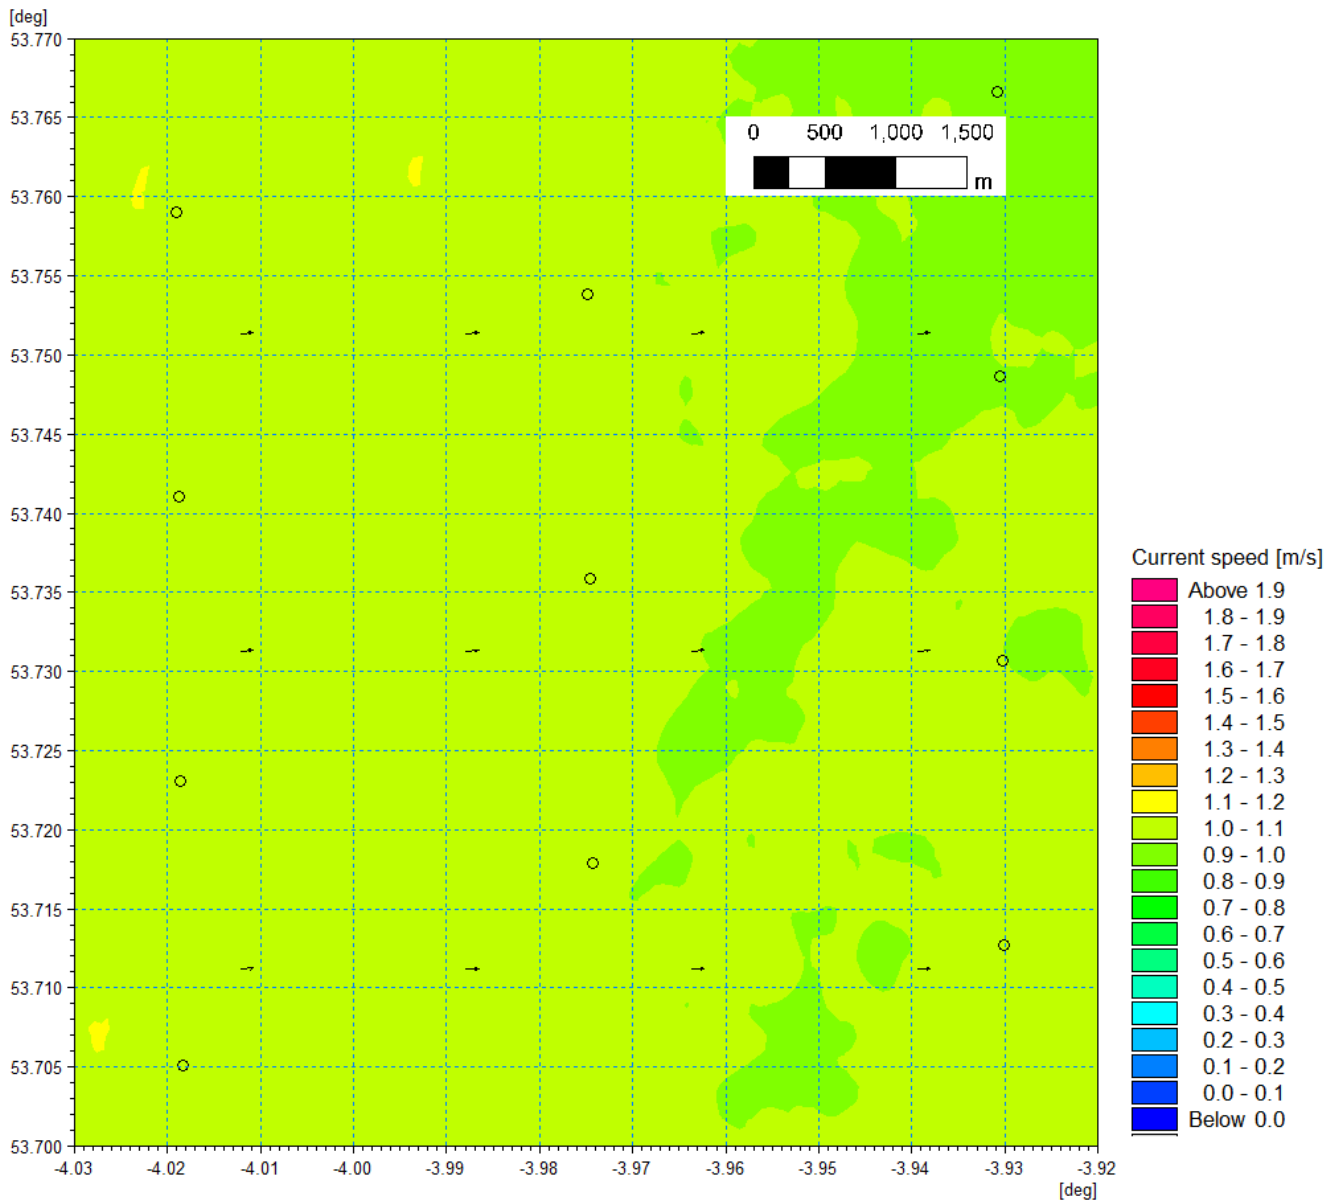


Figure 1.176: Baseline tidal flow pattern – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

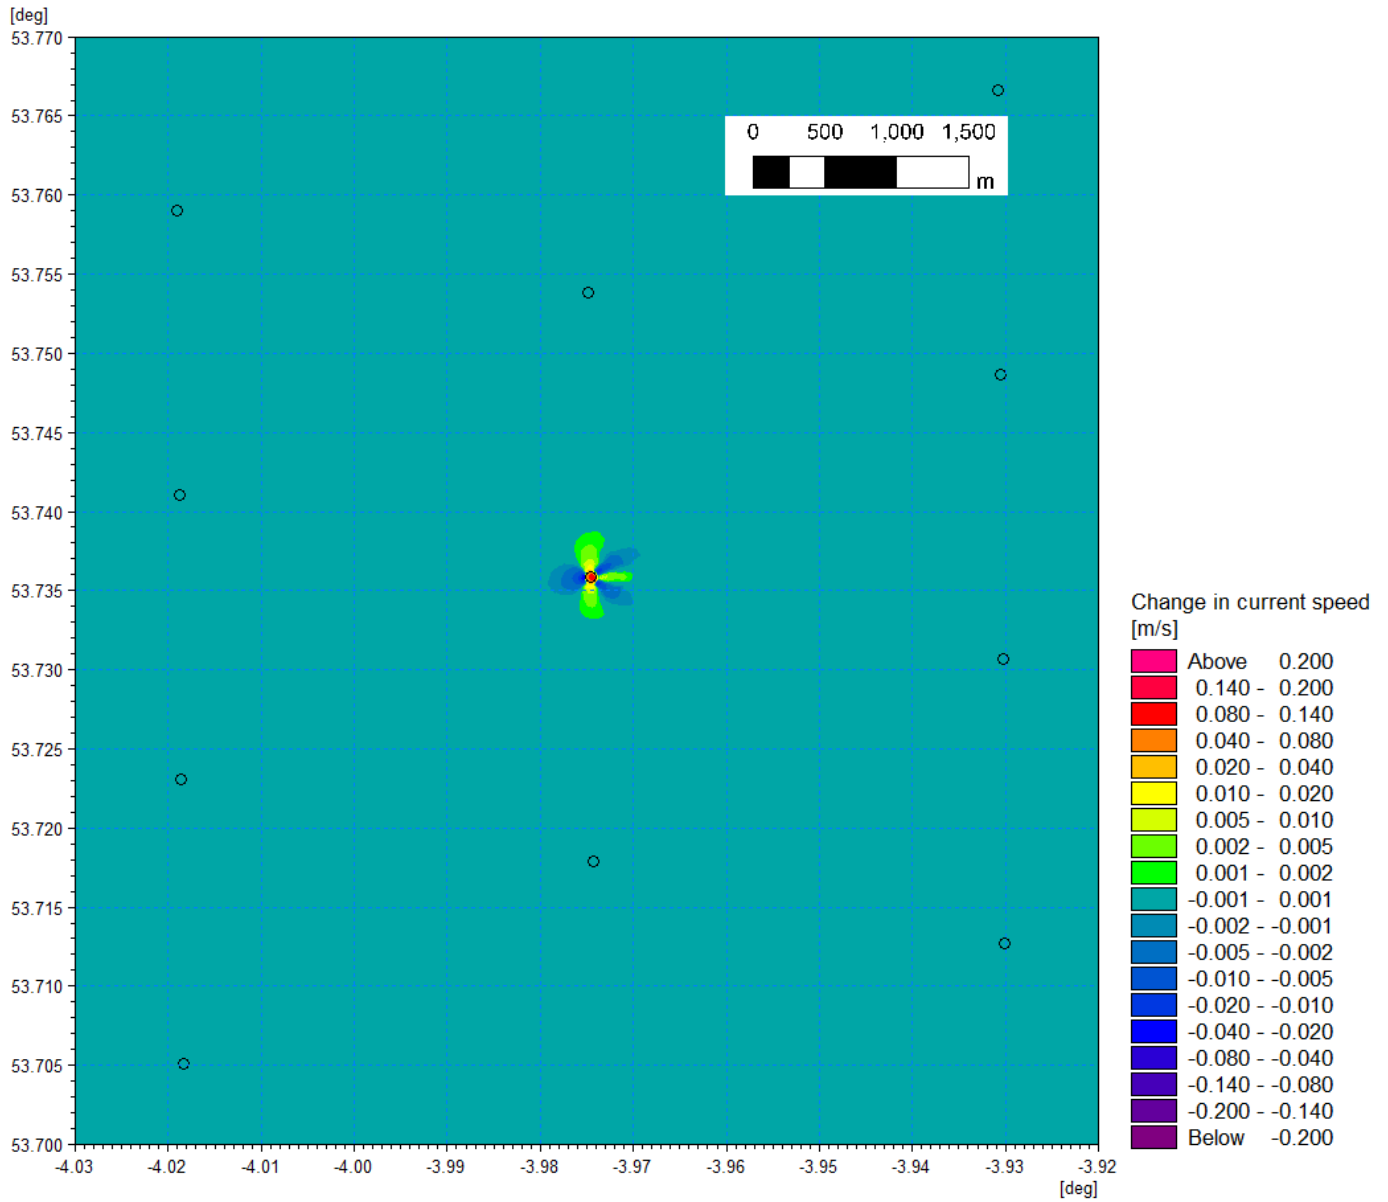


Figure 1.177: Change in tidal flow (post-construction minus baseline) conical gravity base foundation – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

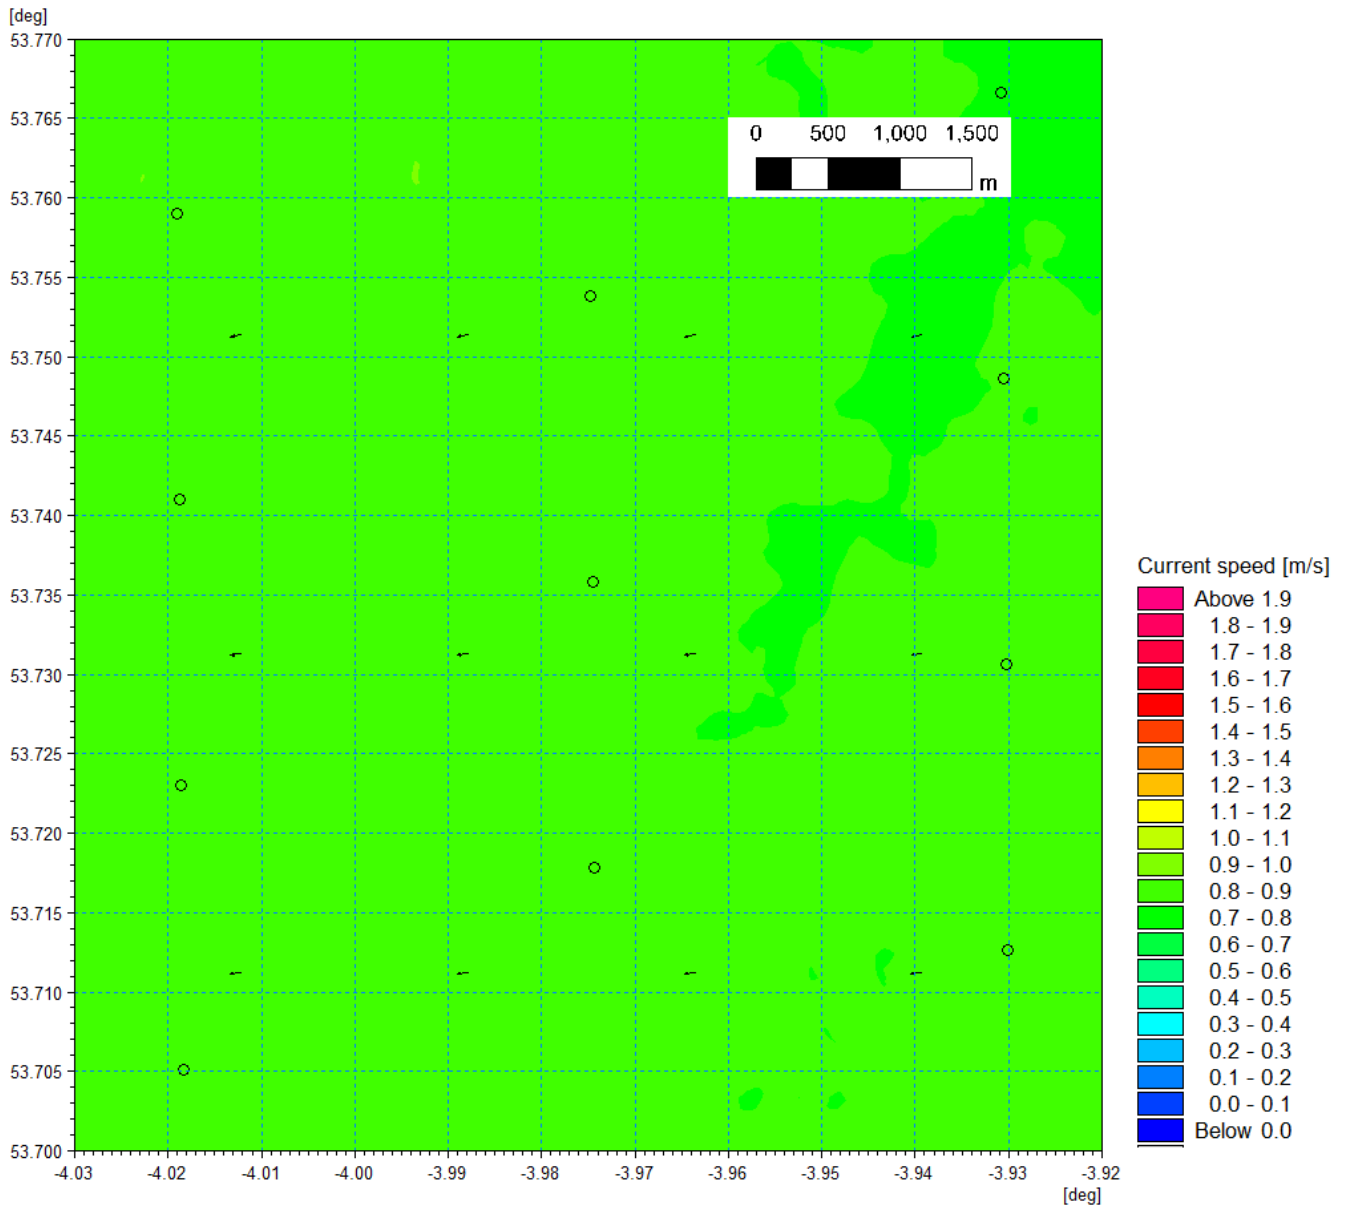


Figure 1.178: Baseline tidal flow pattern – ebb tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

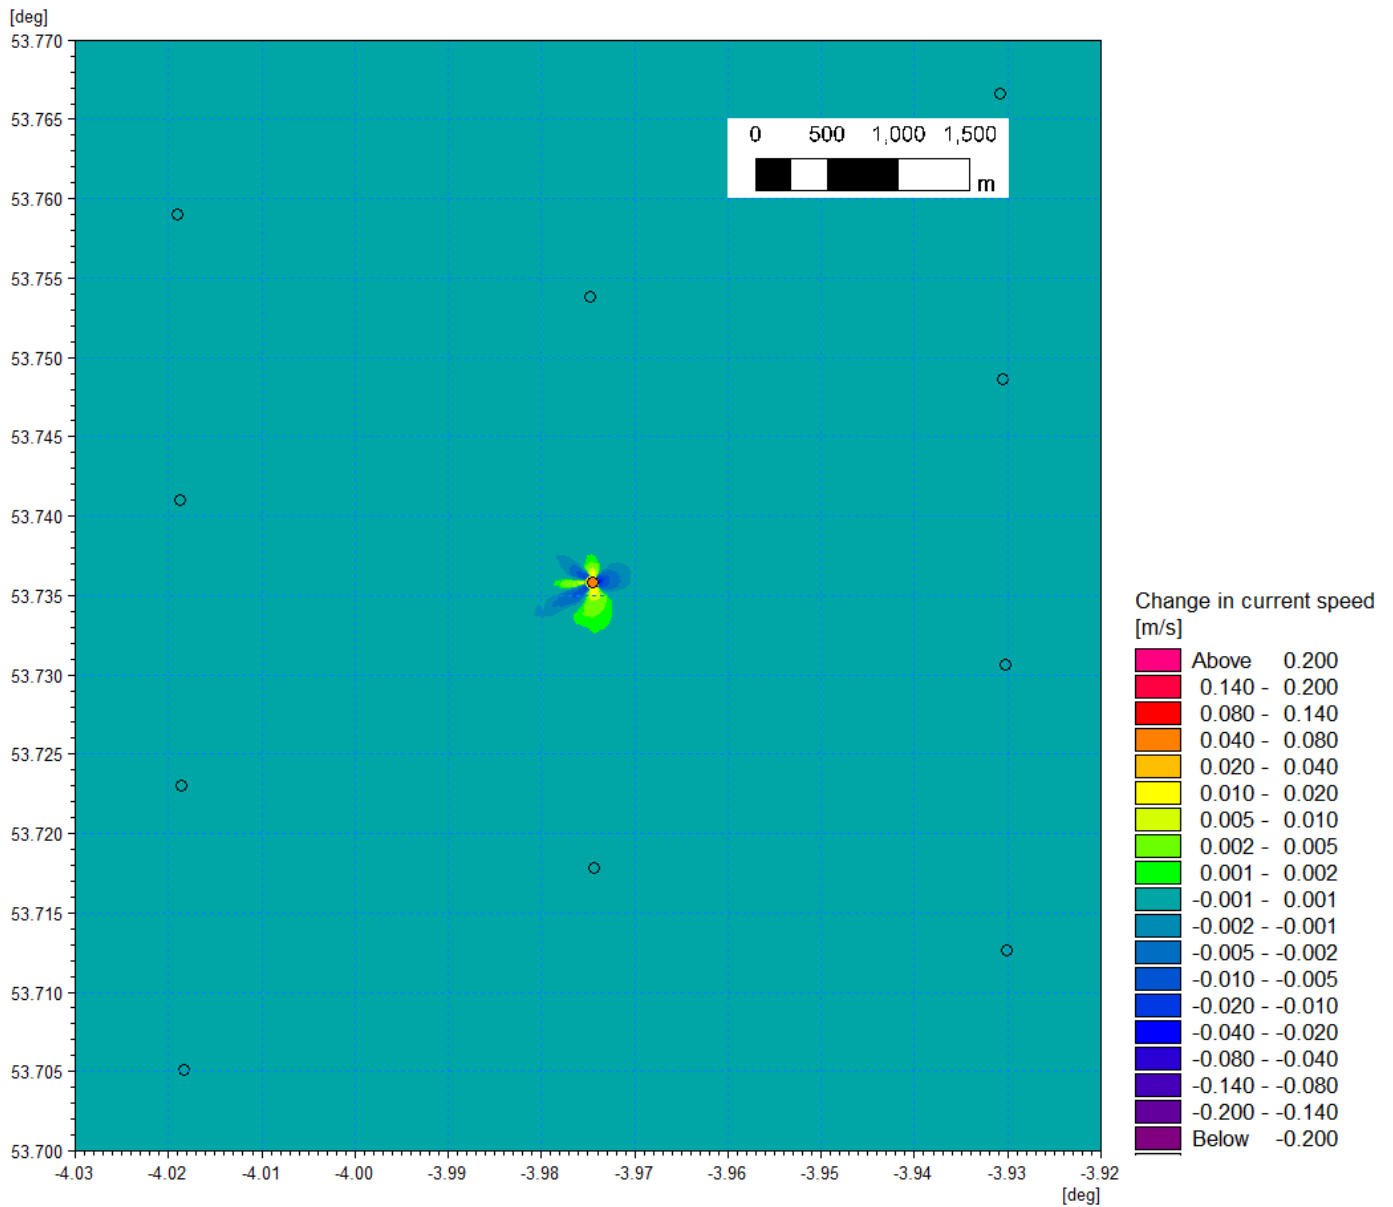


Figure 1.179: Change in tidal flow (post-construction minus baseline) conical gravity base foundation – ebb tide.

Wave climate

- 1.4.3.5 The baseline phase 000° storm for the single test foundation located in the Mona Array Area is presented for the 1 in 1 year in Figure 1.180 with the difference shown in Figure 1.181. Similarly, the 1 in 20 year storm from this direction is presented in Figure 1.182 and Figure 1.189. The changes are seen as reductions in the lee of the conical gravity base foundation. The maximum changes from baseline wave climate are observed in the immediate vicinity (50 m) were limited to a maximum of 10 cm which represents c. 2% of the baseline significant wave height (4.8 m). The wave shadow is typically less than one half of this value. These changes would be indiscernible from the baseline wave climate.
- 1.4.3.6 The changes to waves originating from 090° sector are shown in Figure 1.183 and Figure 1.191, both 1 in 1 and 1 in 20 year storm waves are of similar magnitudes to those experienced from the seen from 000° sector, falling within c. 2.5% of the baseline wave height (3.8 m) within 50 m of the structure. These changes reduce in magnitude with distance from the structure, 100 m and 200m from the foundation changes are limited to 6 cm (c. 1.5%) and 3 cm (c. 1%) respectively.
- 1.4.3.7 In the Morgan Array Area, for both the 000° and 030° directions, significant wave heights fall around 4.0 m to 4.4 m for 1 in 20 year events, thus the magnitude and extent of changes experienced are likely to lie between those of the modelled results for 000° and 090° directions for the foundation located within the Mona Array Area. With changes in wave heights likely in the range of 1% to 2.5%, these being limited to within 50 m of the structures, falling to around half this value 100 m from the foundations and extending to the south and south south west of the foundation structure.
- 1.4.3.8 Within the Mona Array Area, storm waves originating from 240° and 270° are of a greater magnitude than those discussed above, with significant wave heights in excess of 6.2 m in the vicinity of the modelled foundation. During a 1 in 20 year storm post construction waves may experience a change up to a maximum of 25 cm or c. 4% in the immediate vicinity of the conical gravity base foundation. These changes reduce in magnitude with distance from the structure, 200 m from the foundation changes are limited to 6 cm (<1%).
- 1.4.3.9 In the Morgan Array Area, for both the 240° and 270° directions, significant wave heights are 6.0 m to 6.4 m for the 1 in 20 year event, thus the changes experienced are to the modelled results for 240° directions for the foundation located in the Mona Array Area. With changes in wave heights likely around 4% (c. 25 cm) in the immediate vicinity of the foundation. These changes would fall to < 1% within 200 m of the foundations and extend to the north east and east of the installation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

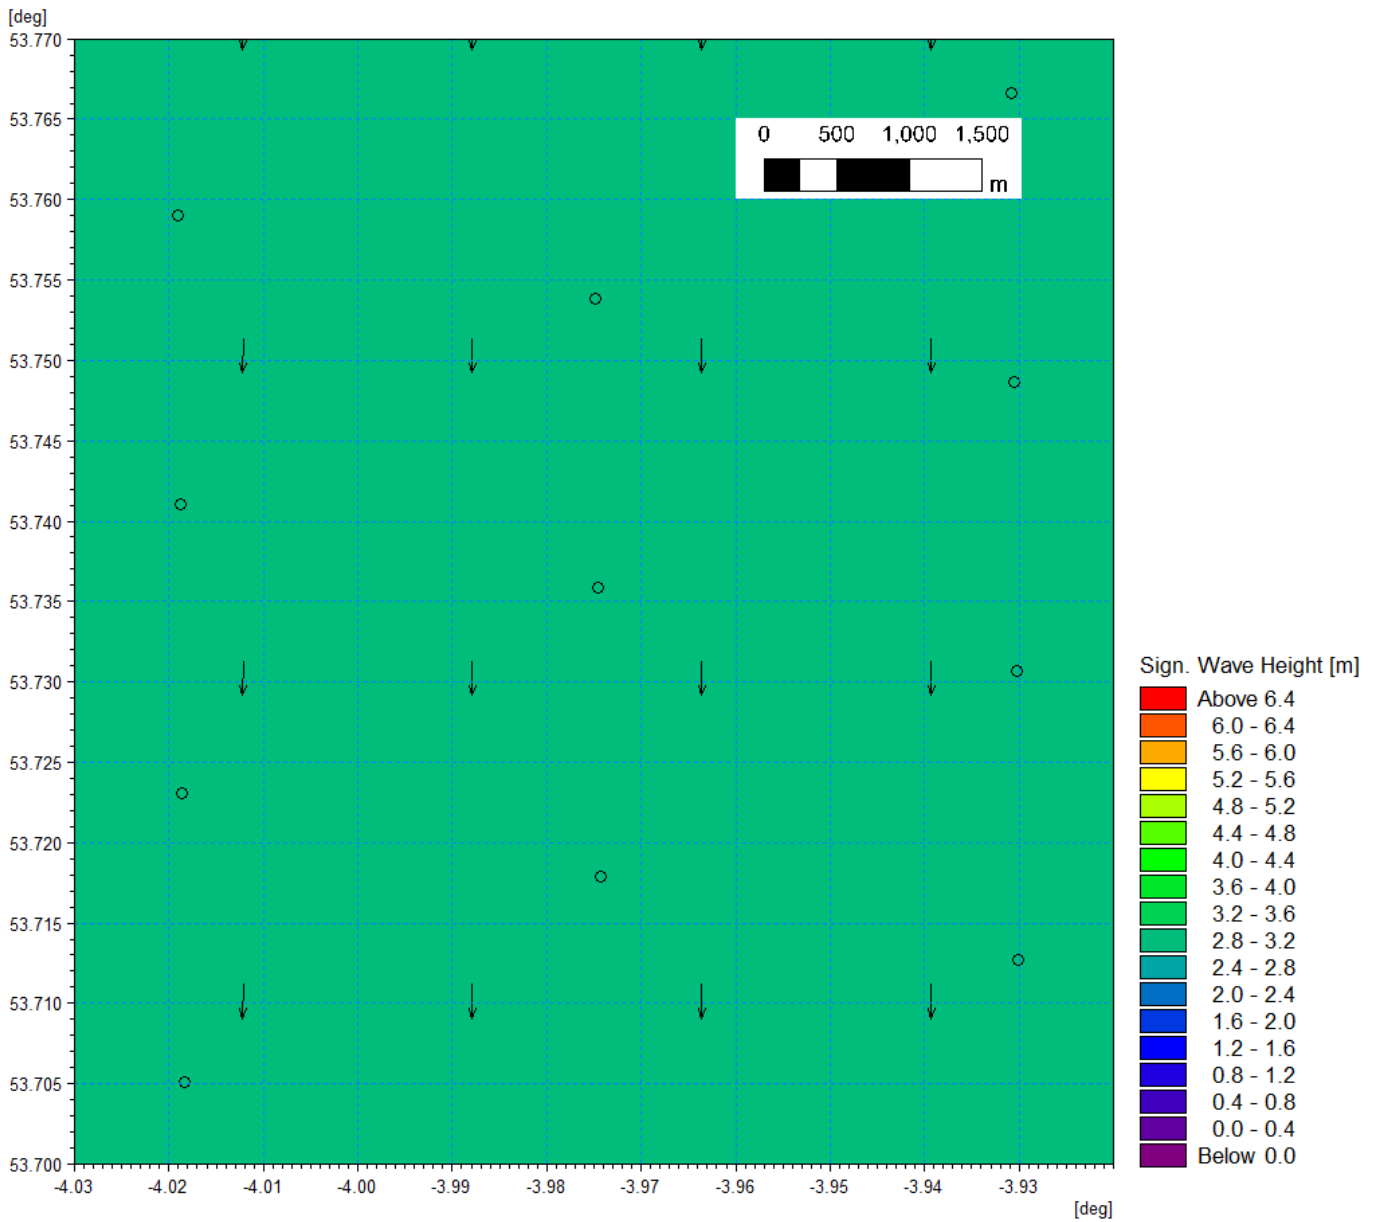


Figure 1.180: Baseline wave climate 1 in 1 year storm 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

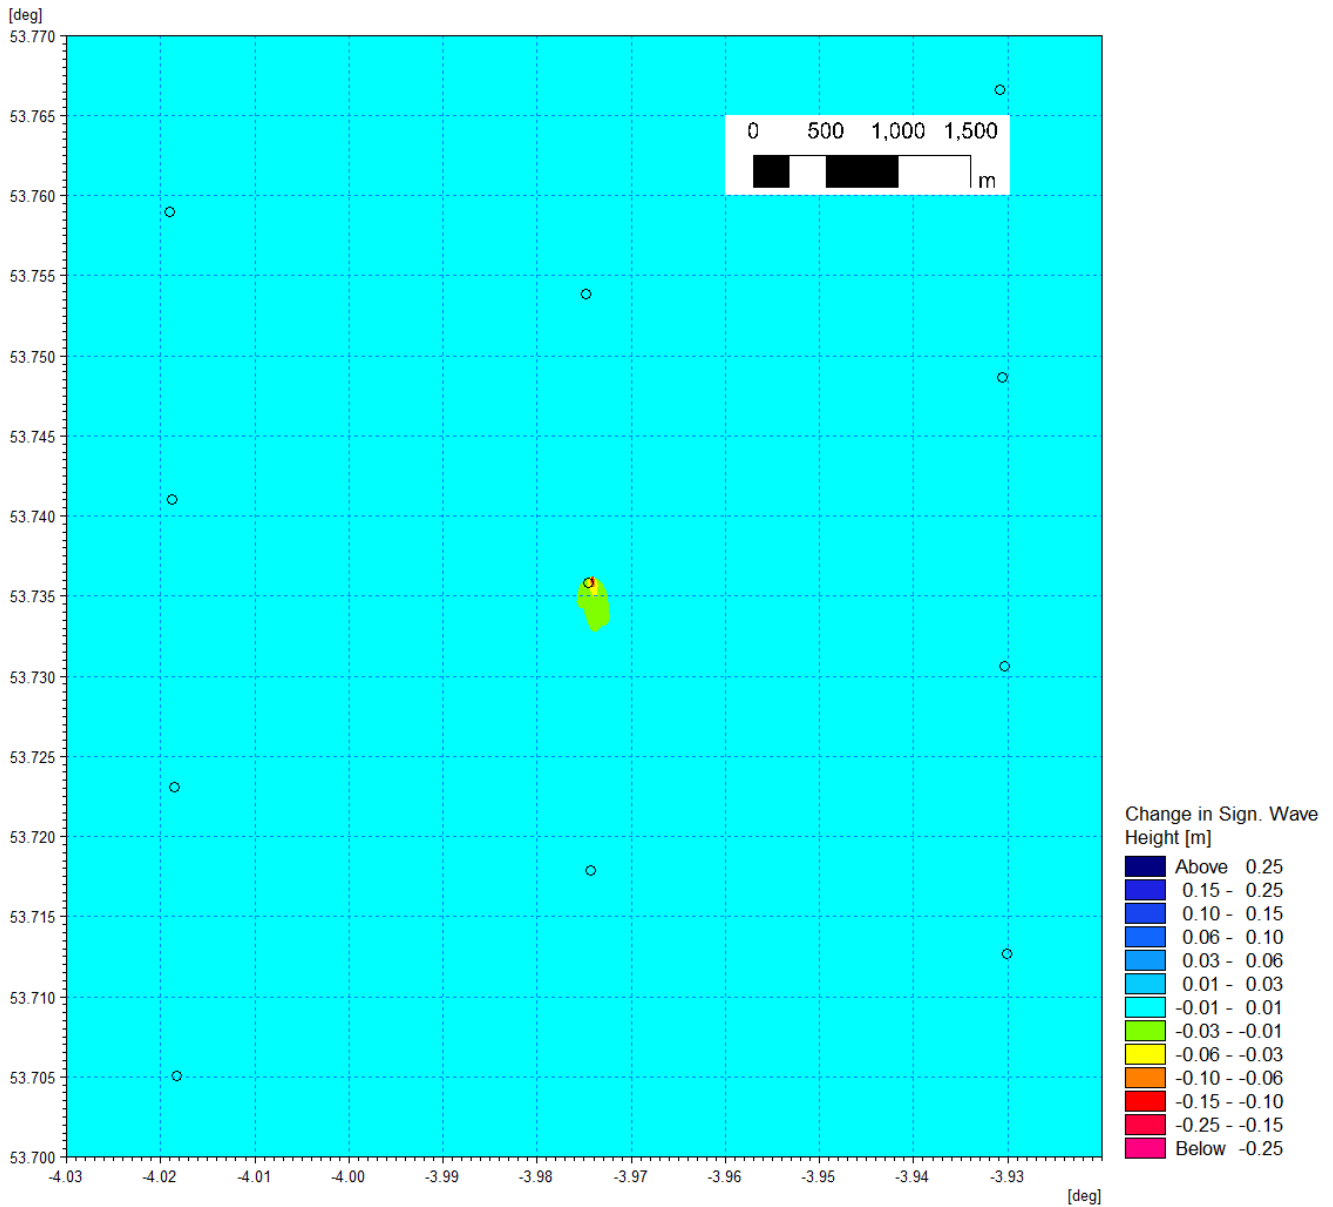


Figure 1.181: Change in wave climate 1 in 1 year storm 000° MHW (post-construction minus baseline) – conical gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

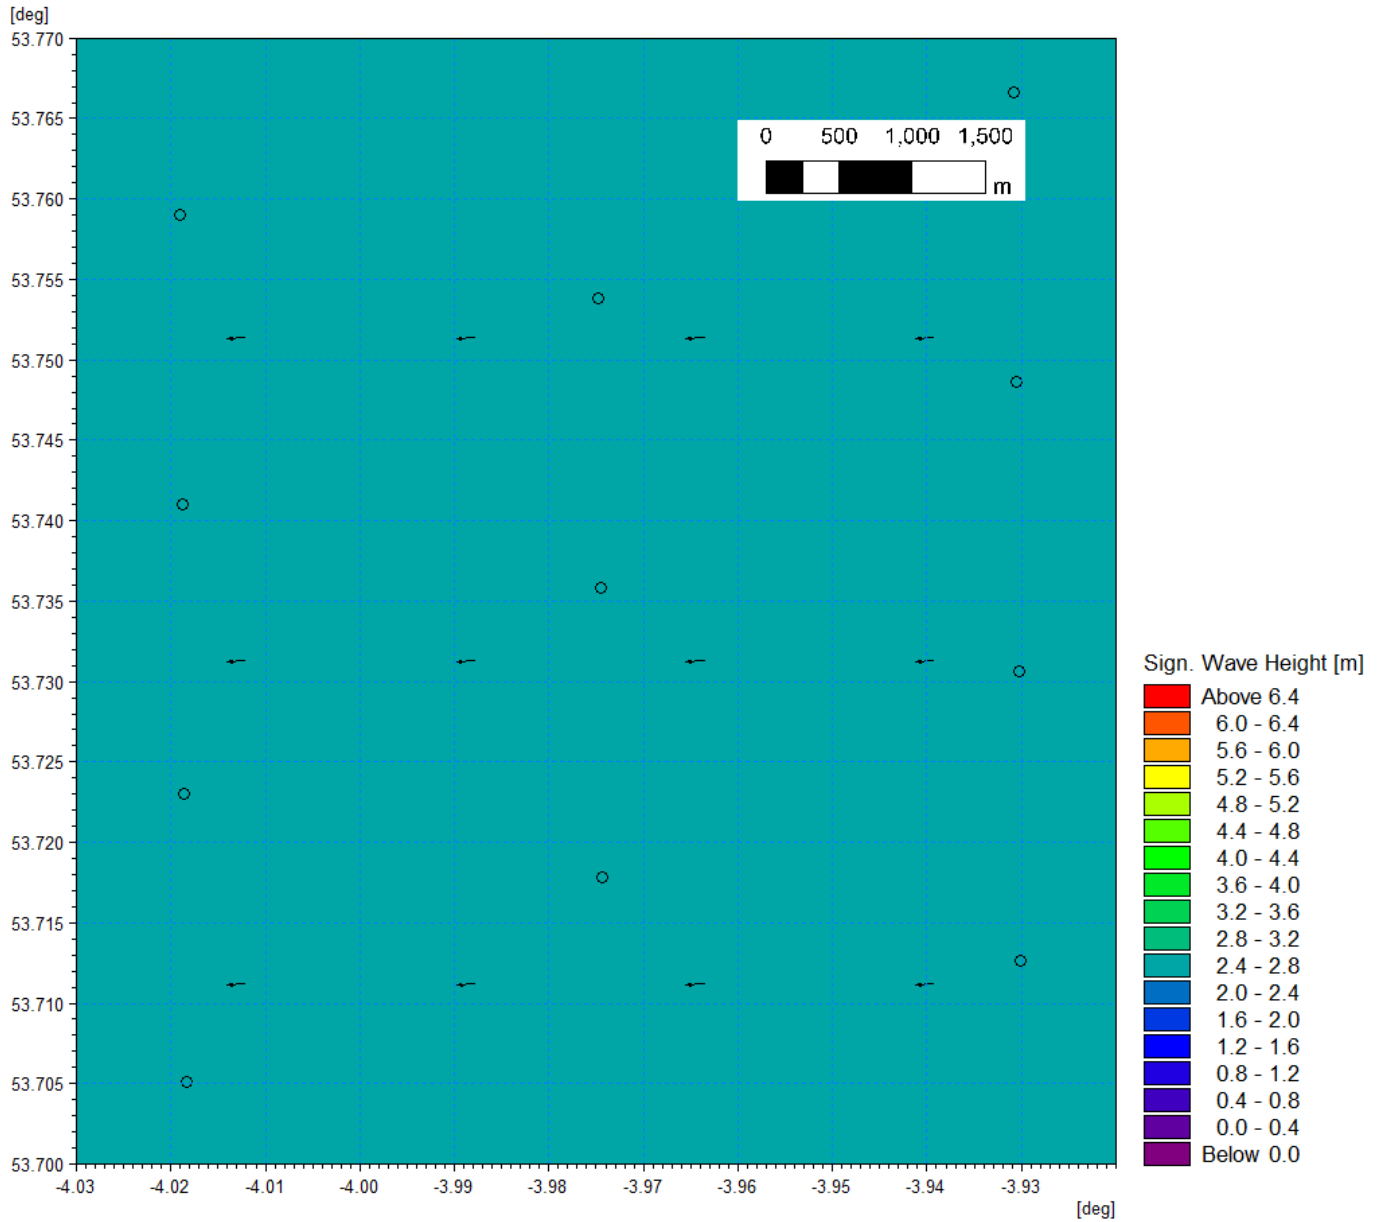


Figure 1.182: Baseline wave climate 1 in 1 year storm 090° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

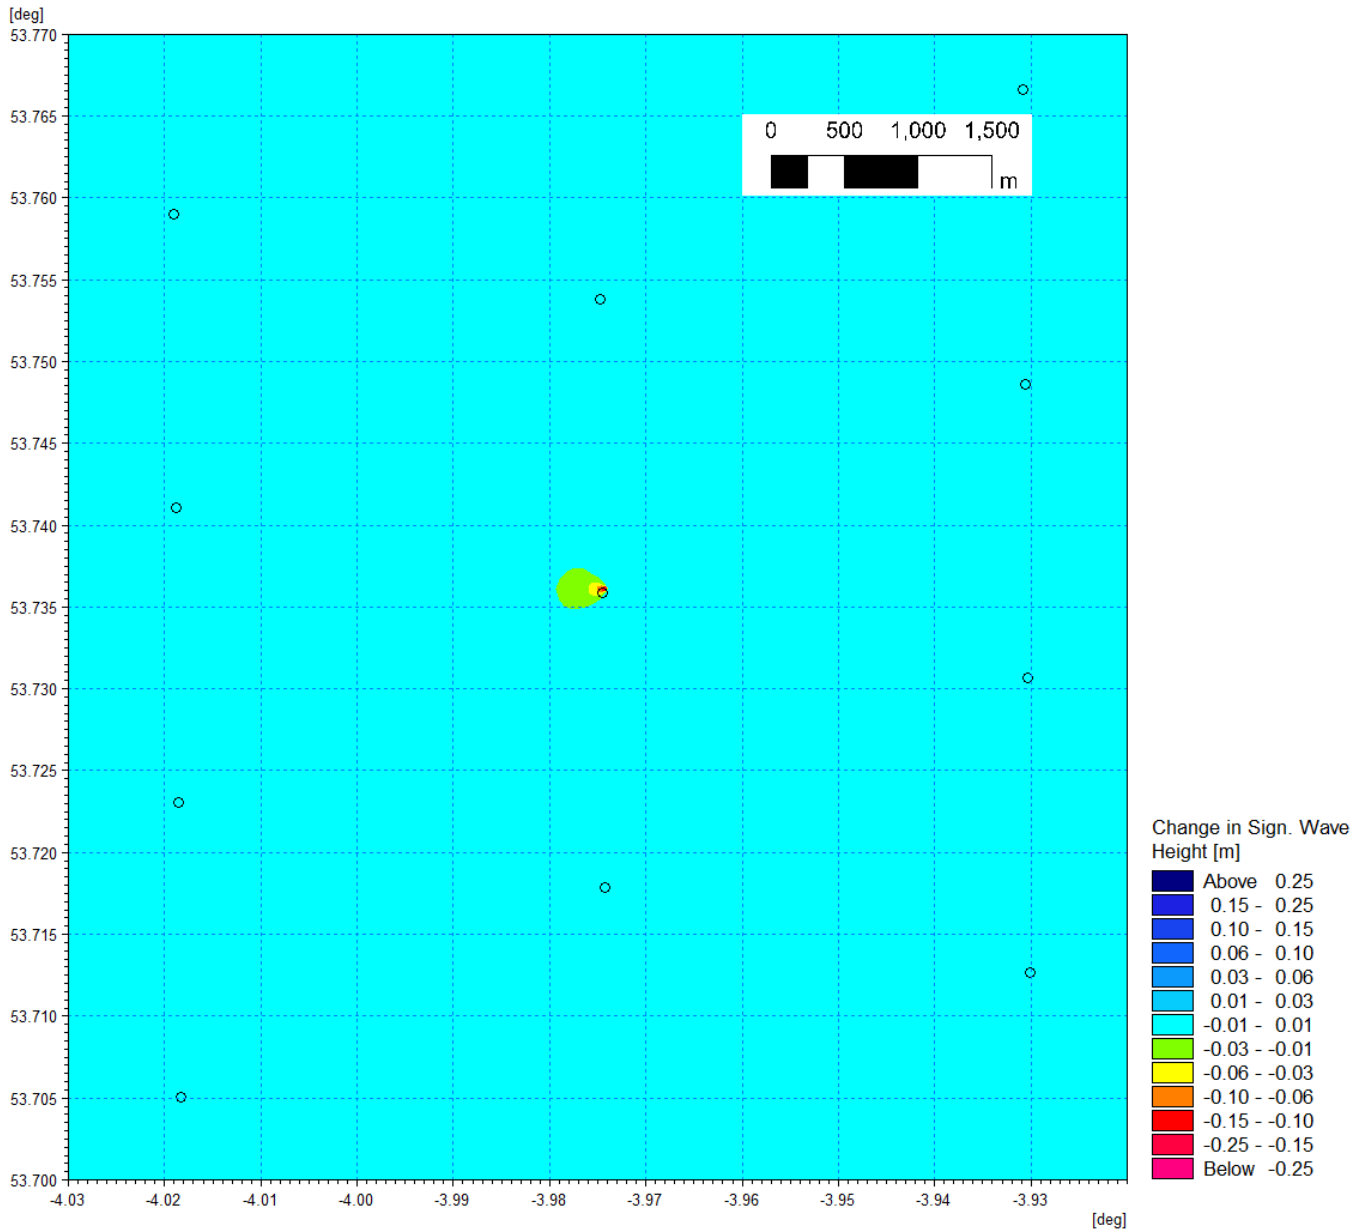


Figure 1.183: Change in wave climate 1 in 1 year storm 090° MHW (post-construction minus baseline) – conical gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

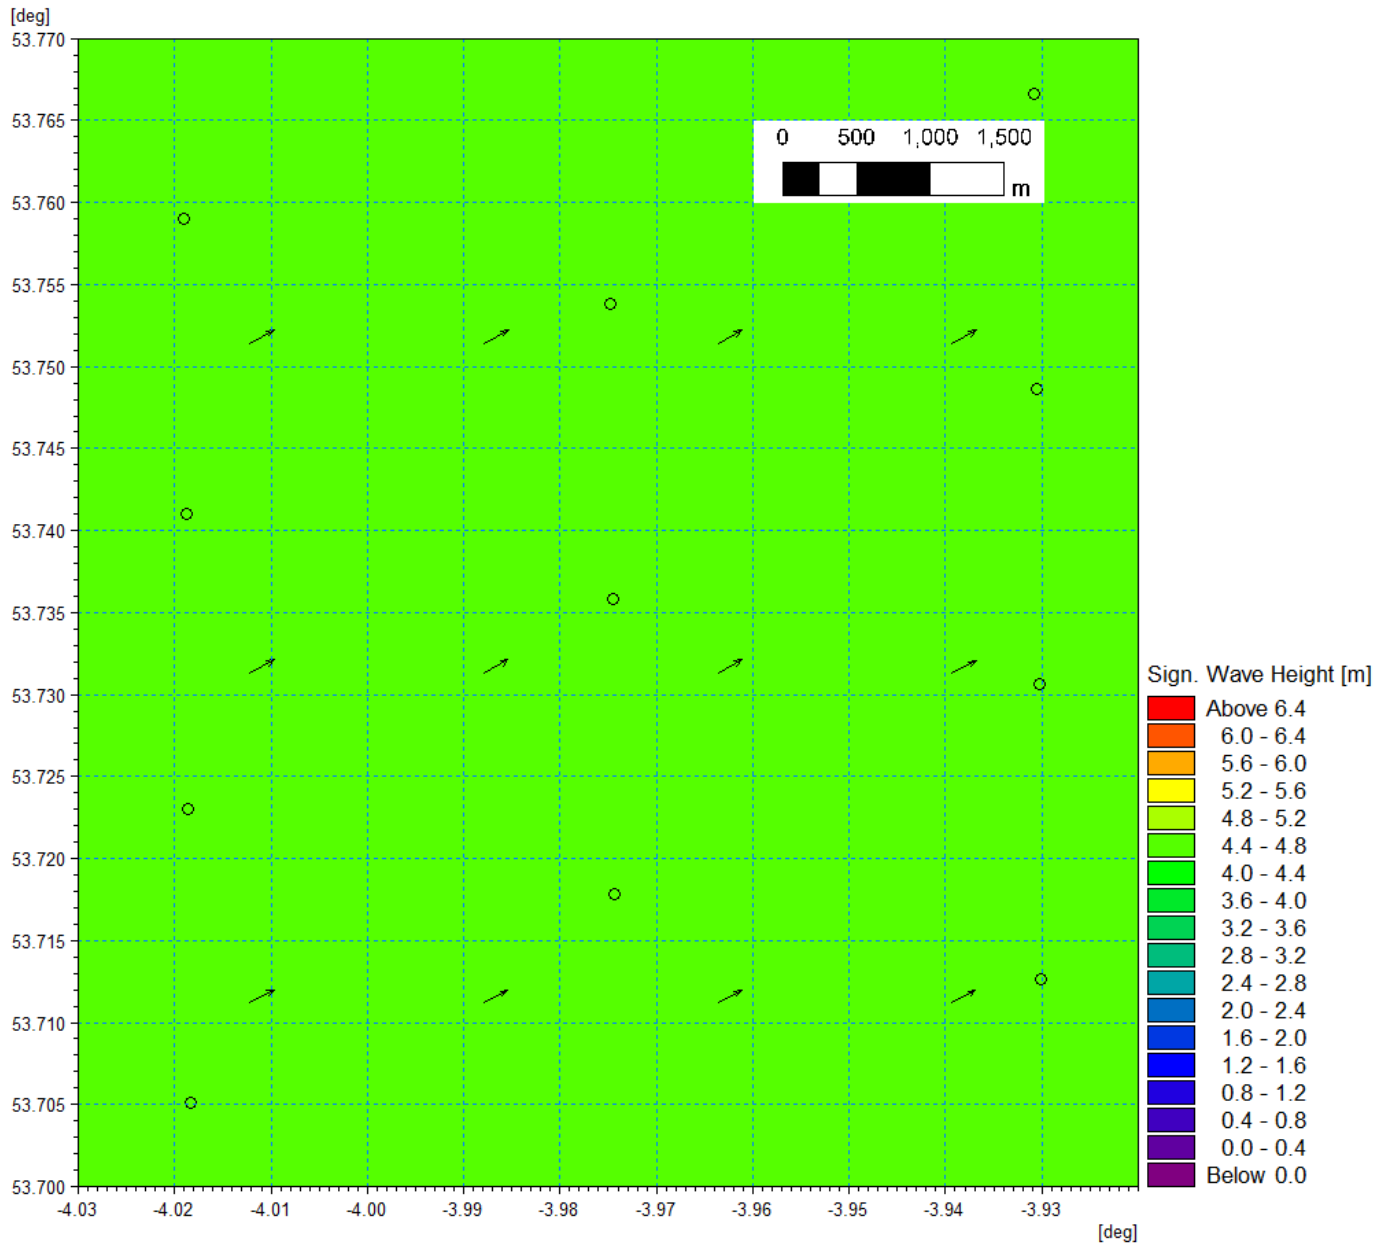


Figure 1.184: Baseline wave climate 1 in 1 year storm 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

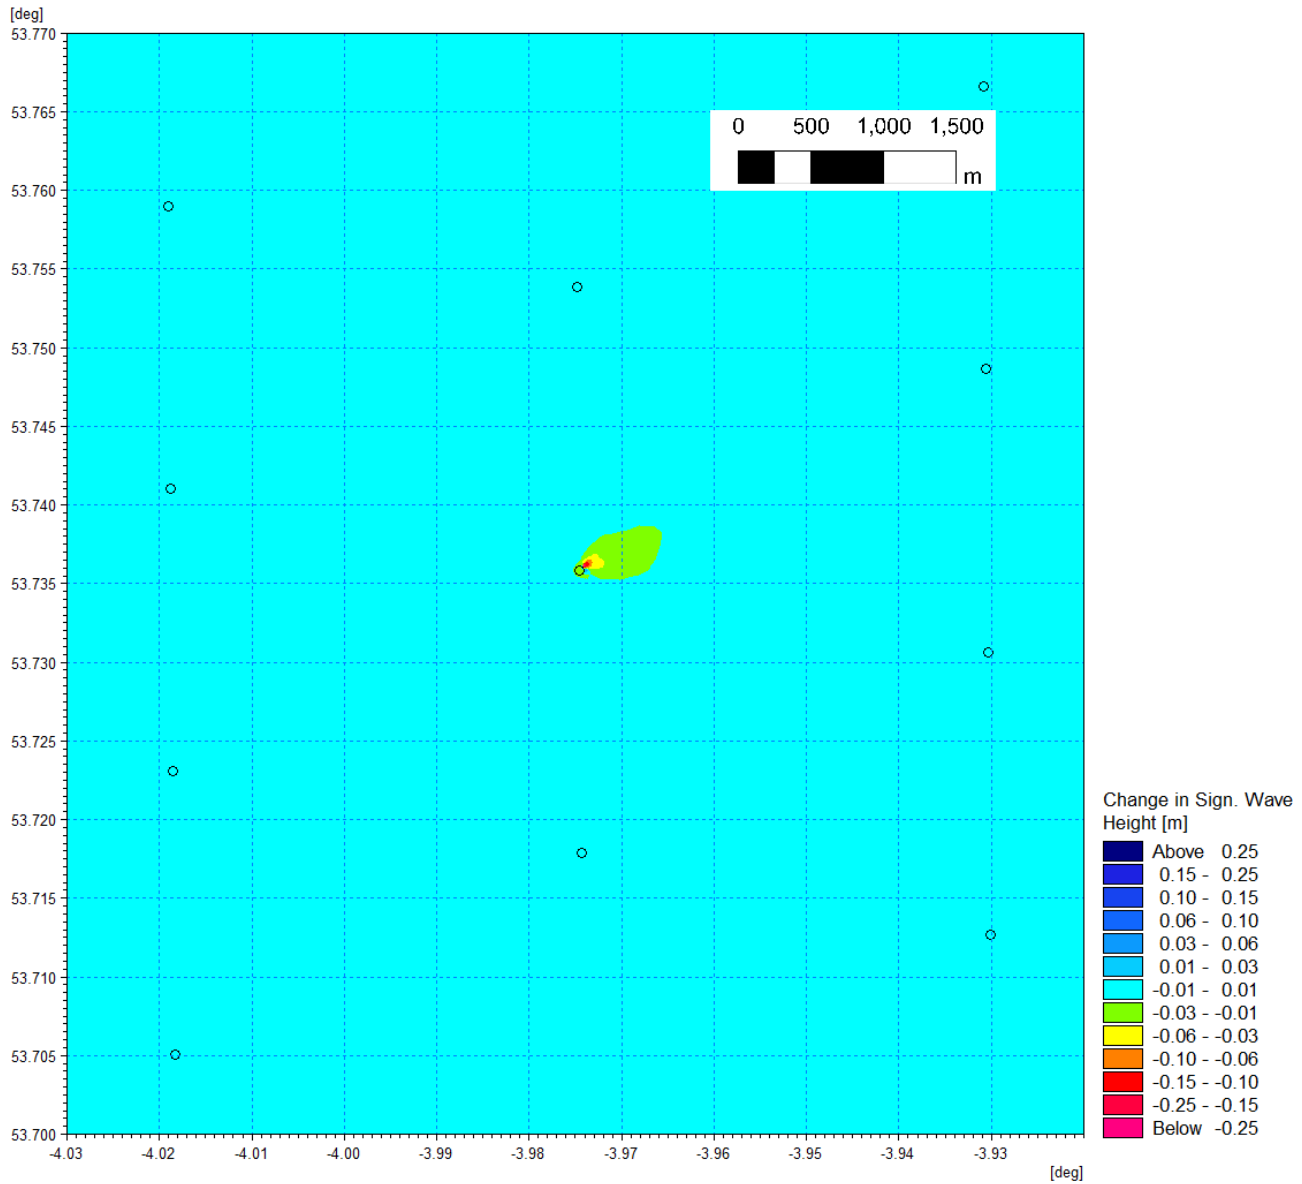


Figure 1.185: Change in wave climate 1 in 1 year storm 240° MHW (post-construction minus baseline) – conical gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

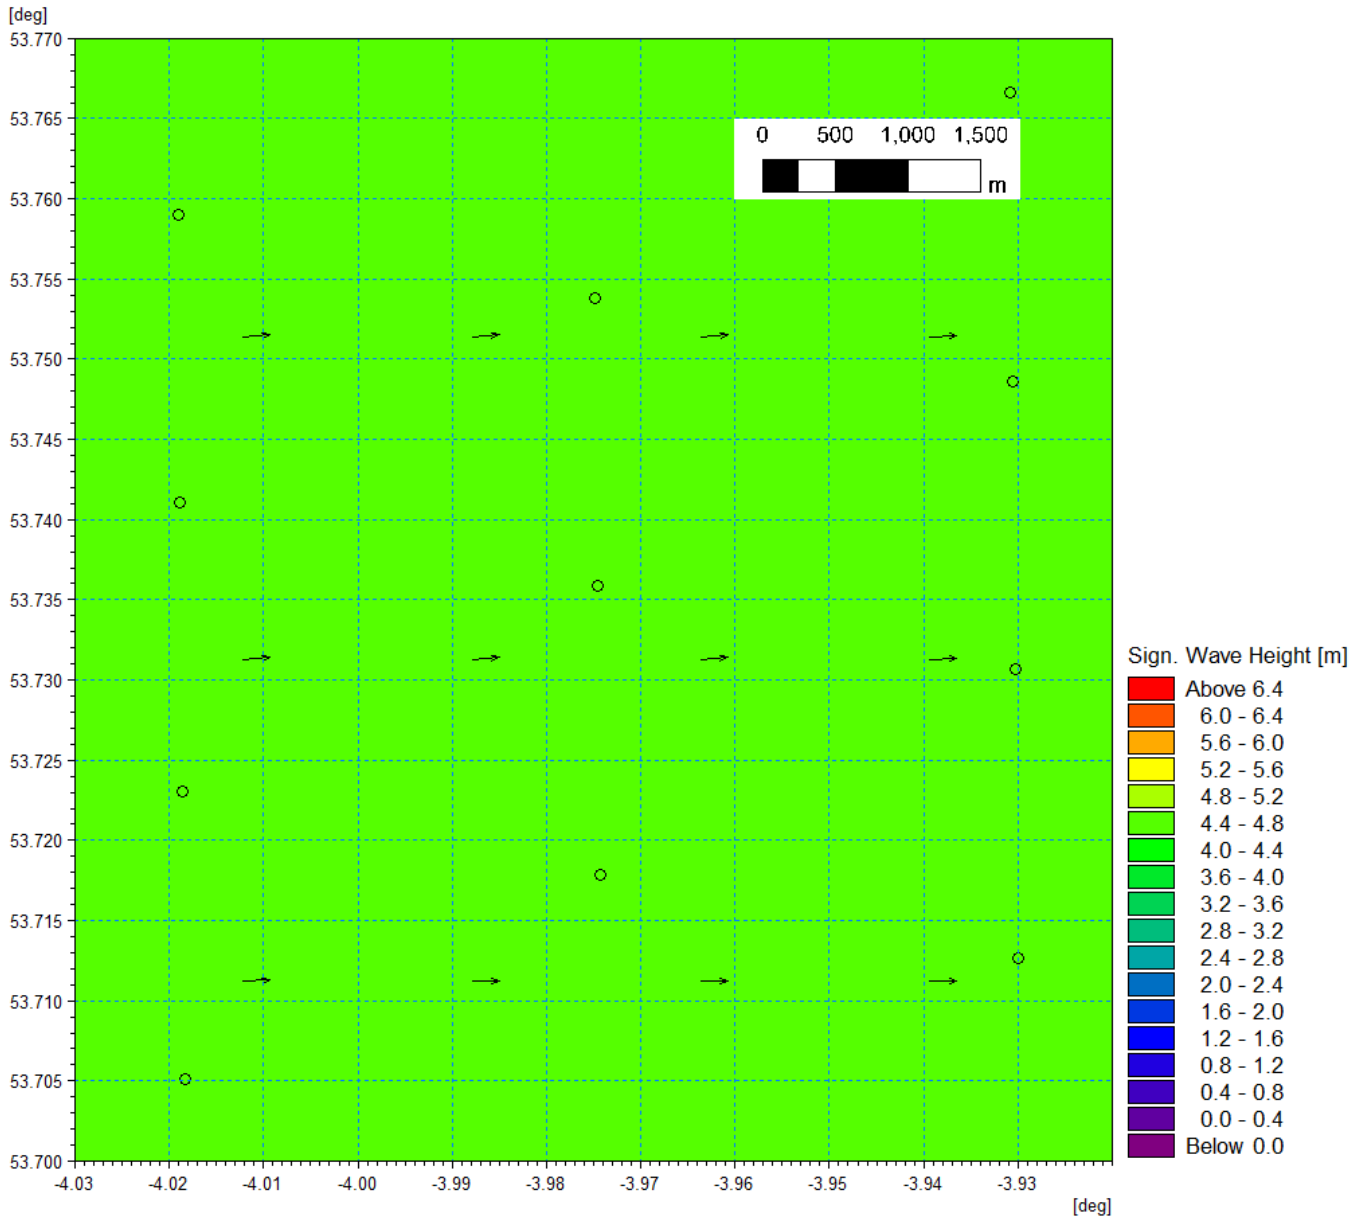


Figure 1.186: Baseline wave climate 1 in 1 year storm 270° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

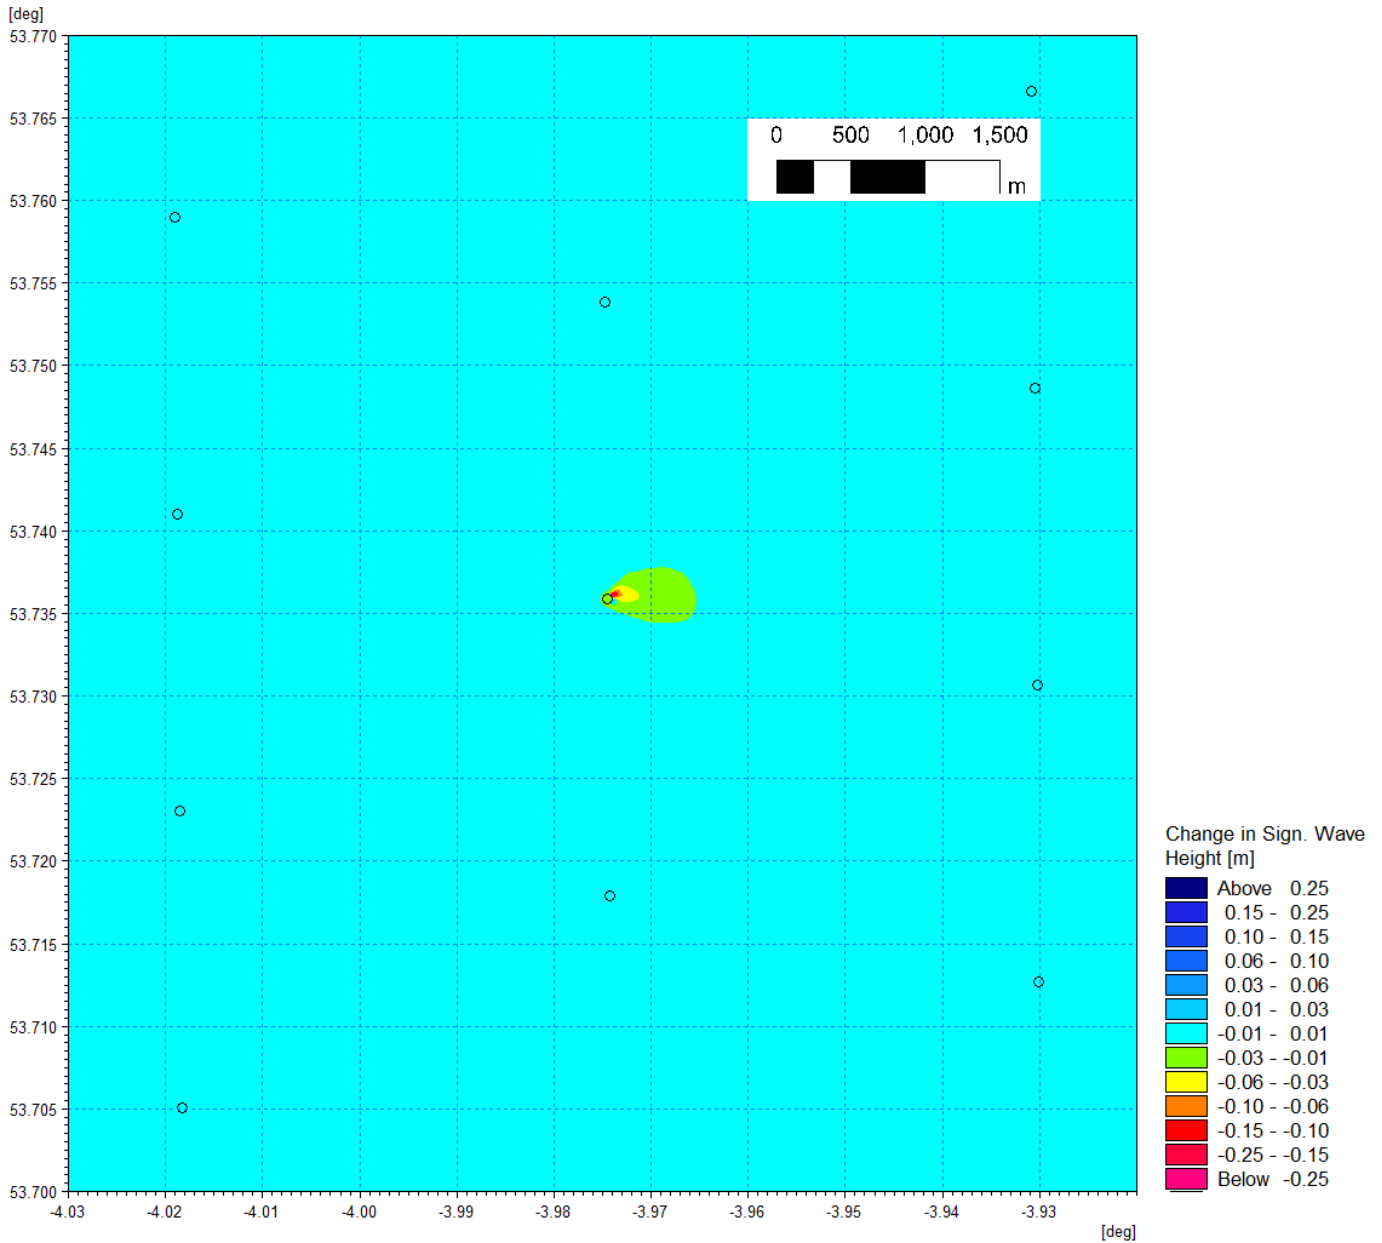


Figure 1.187: Change in wave climate 1 in 1 year storm 270° MHW (post-construction minus baseline) – conical gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

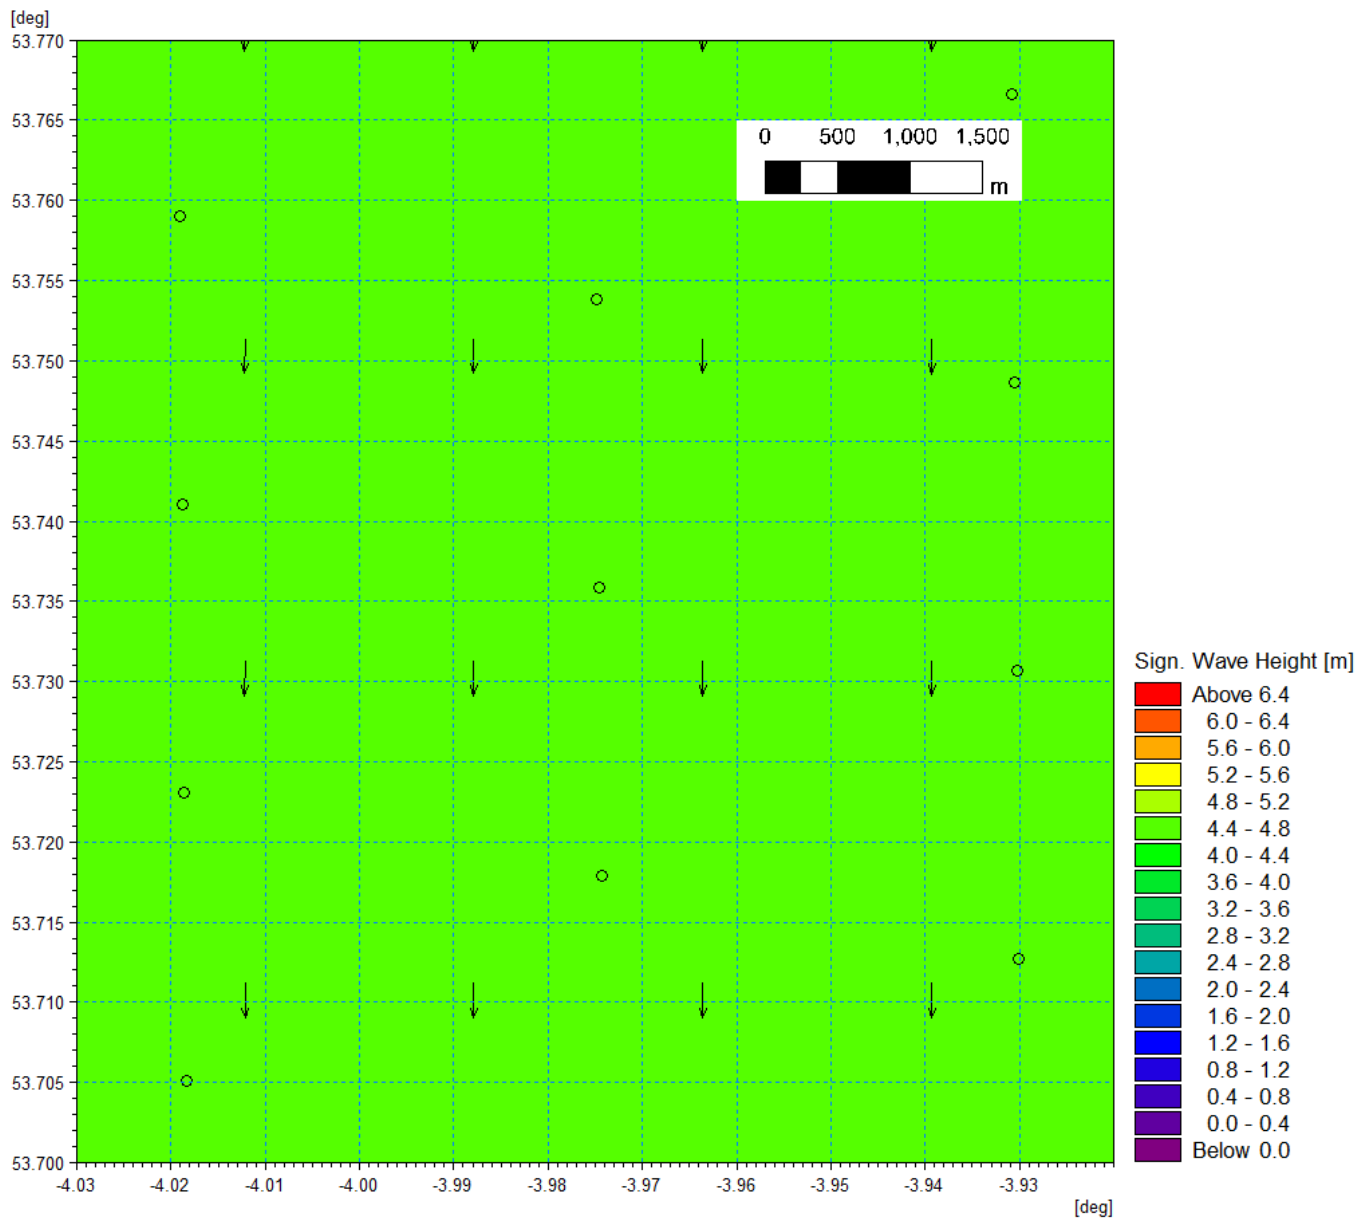


Figure 1.188: Baseline wave climate 1 in 20 year storm 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

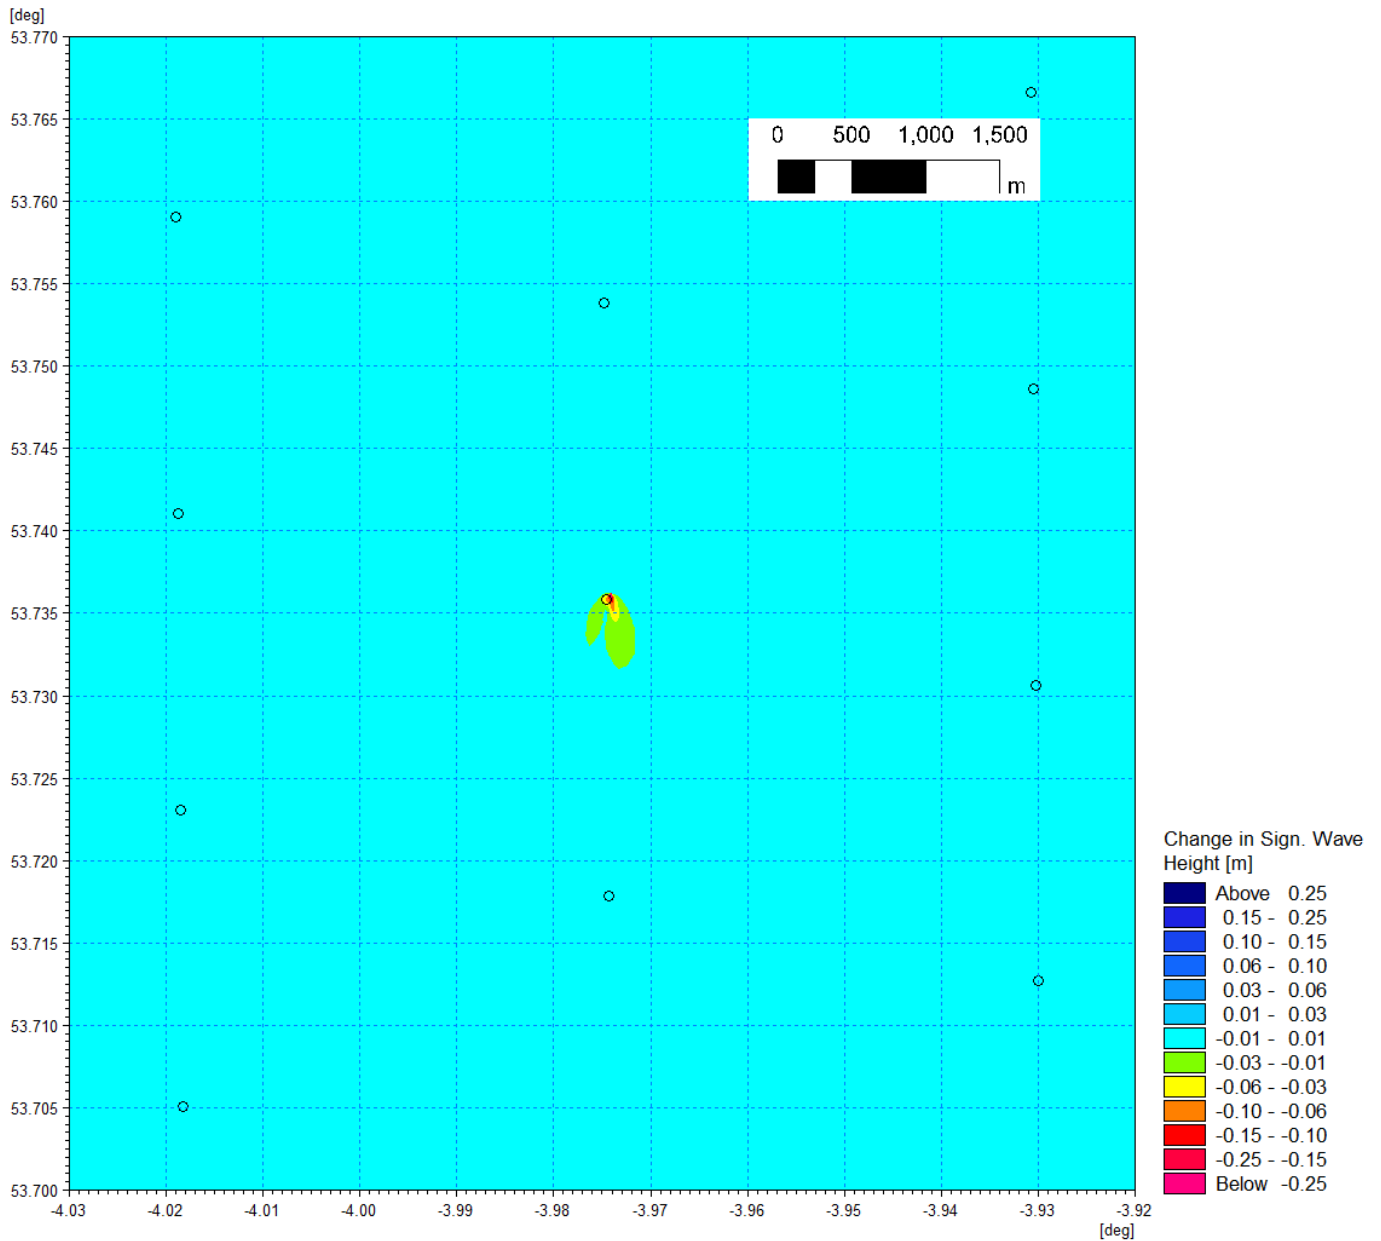


Figure 1.189: Change in wave climate 1 in 20 year storm 000° MHW (post-construction minus baseline) – conical gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

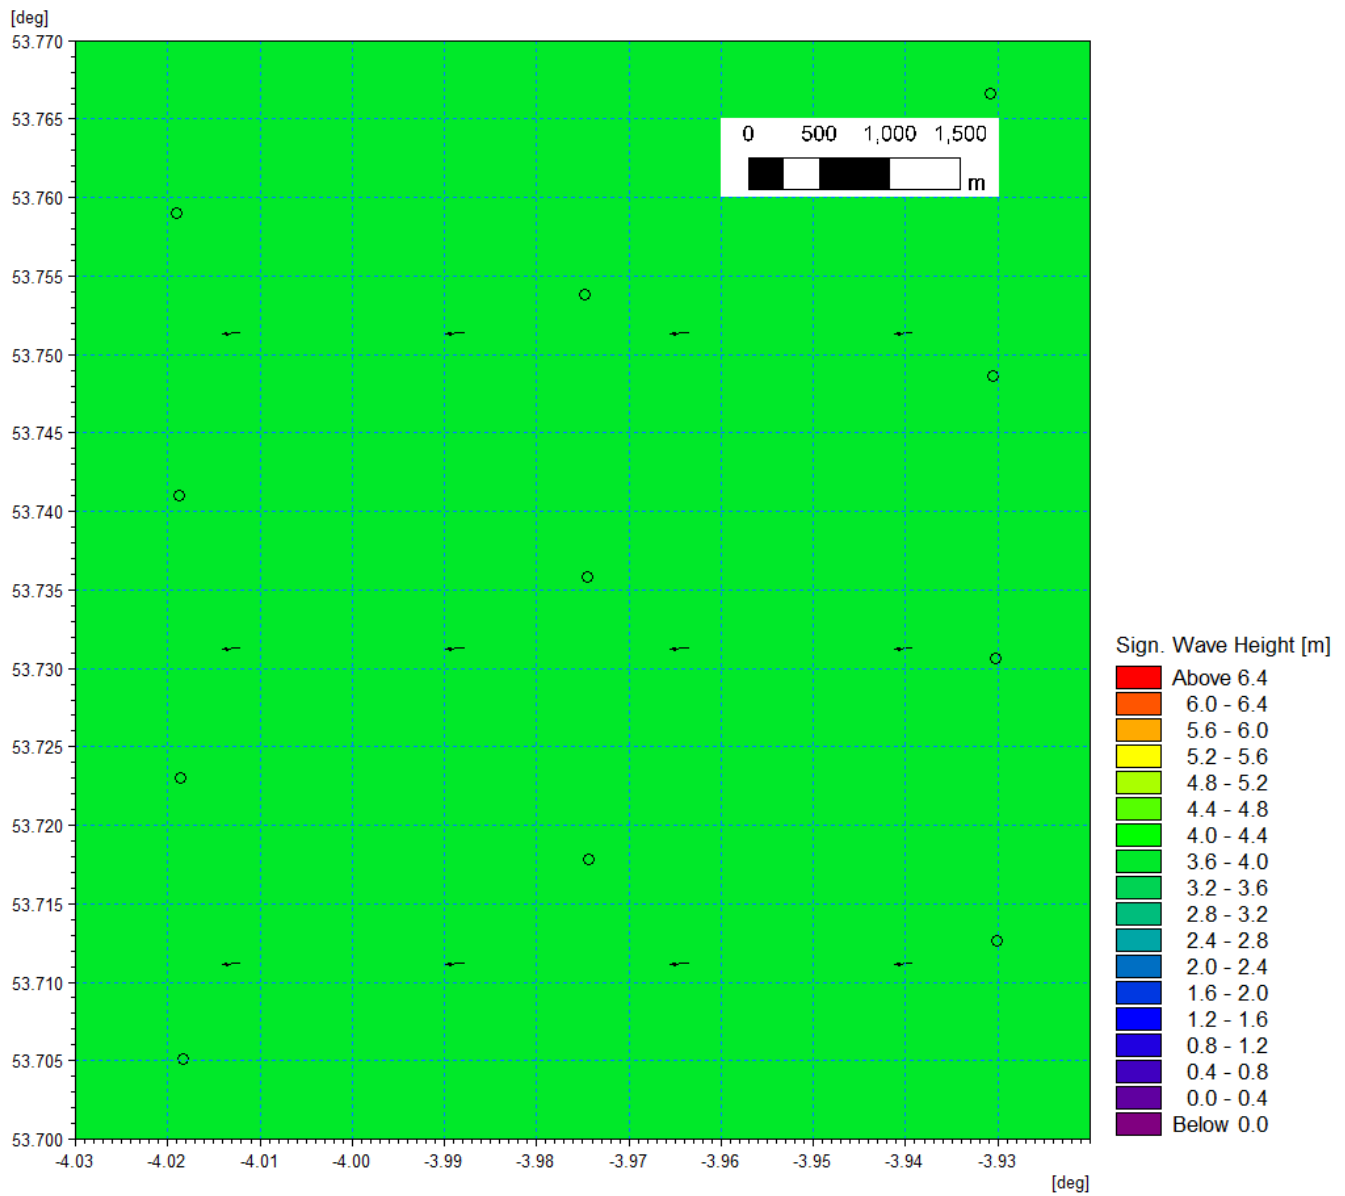


Figure 1.190: Baseline wave climate 1 in 20 year storm 090° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

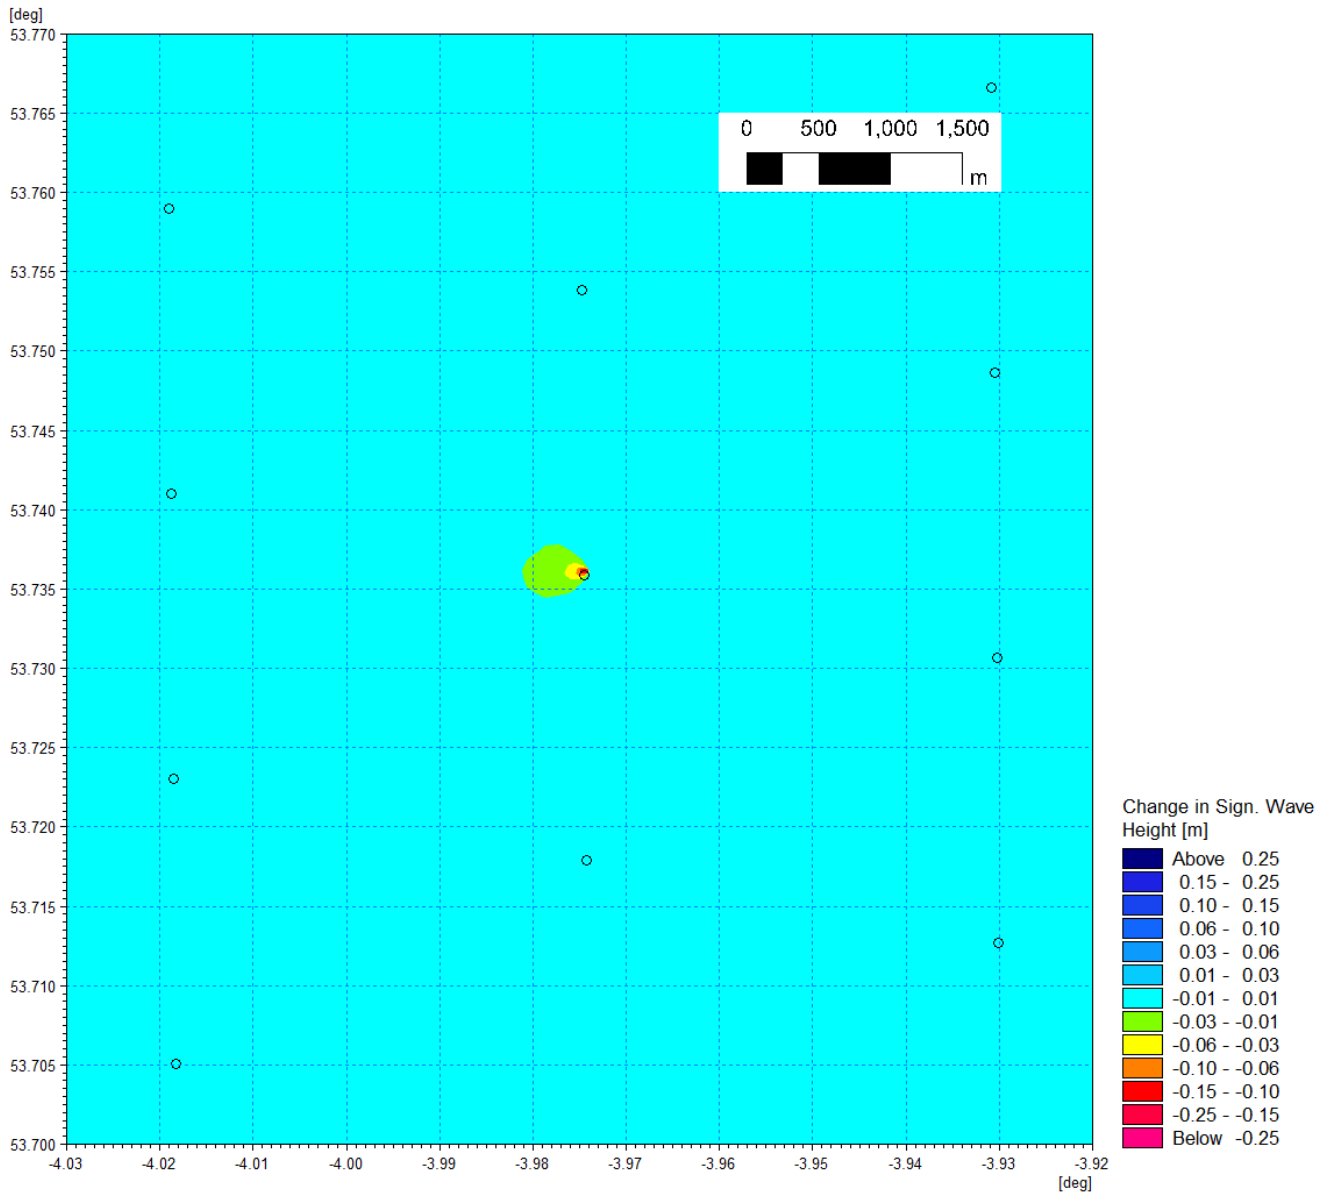


Figure 1.191: Change in wave climate 1 in 20 year storm 090° MHW (post-construction minus baseline) – conical gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

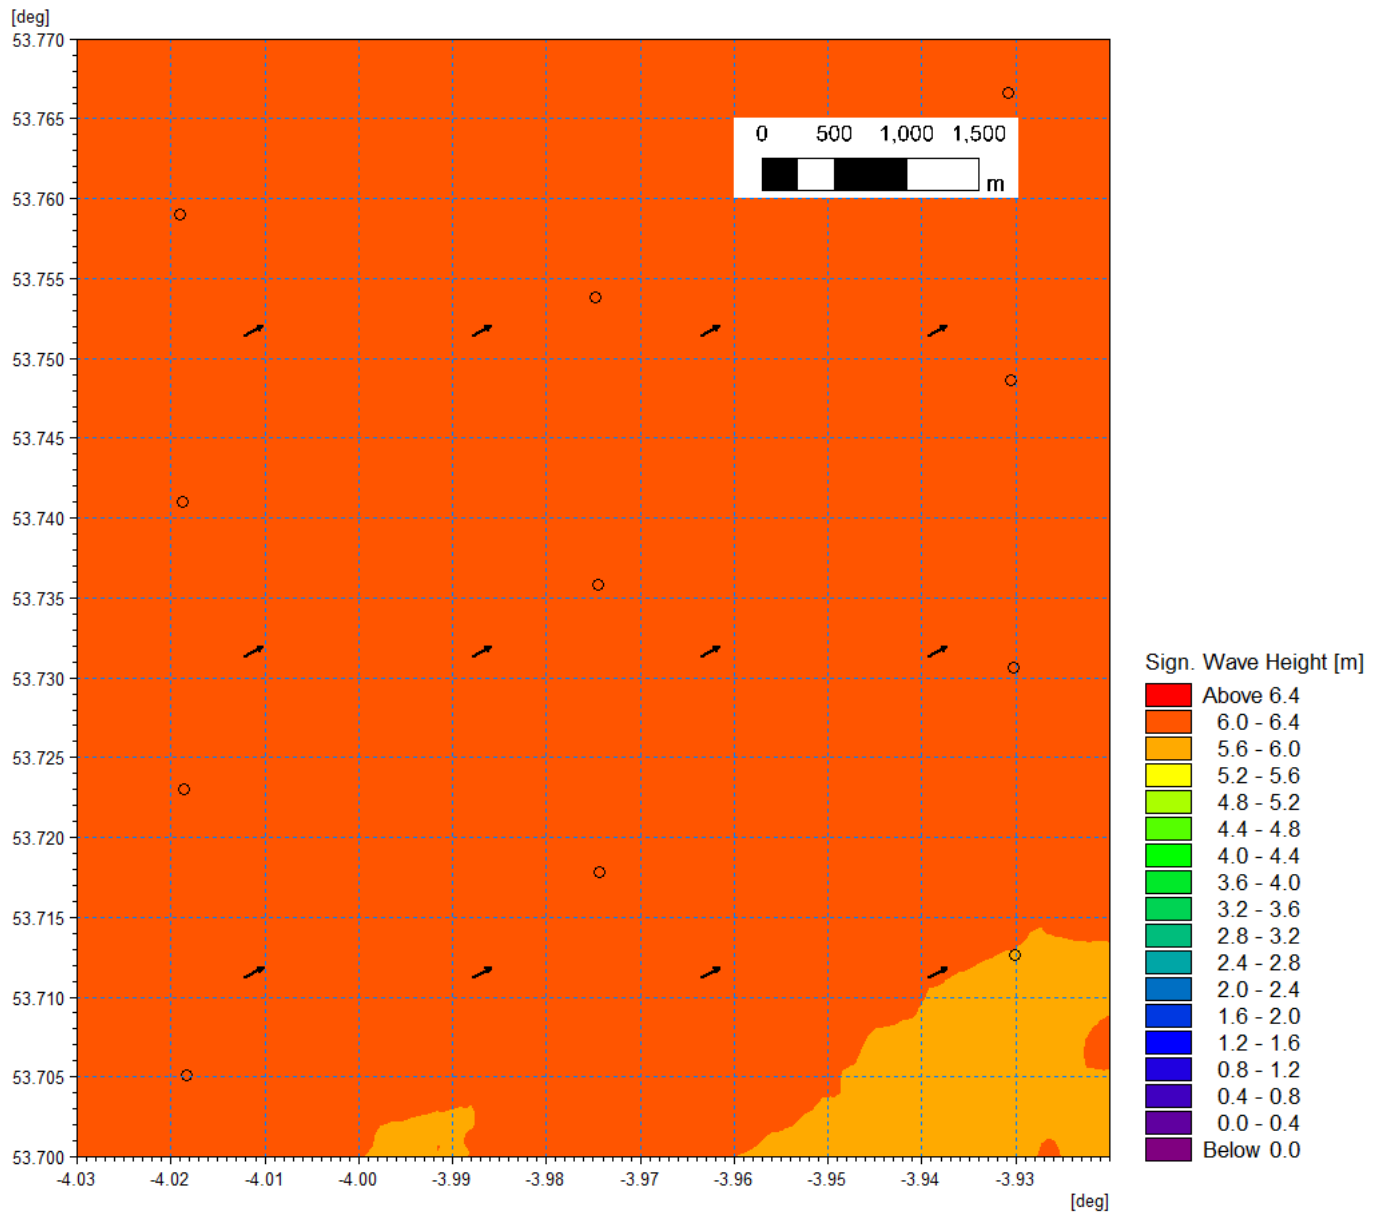


Figure 1.192: Baseline wave climate 1 in 20 year storm 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

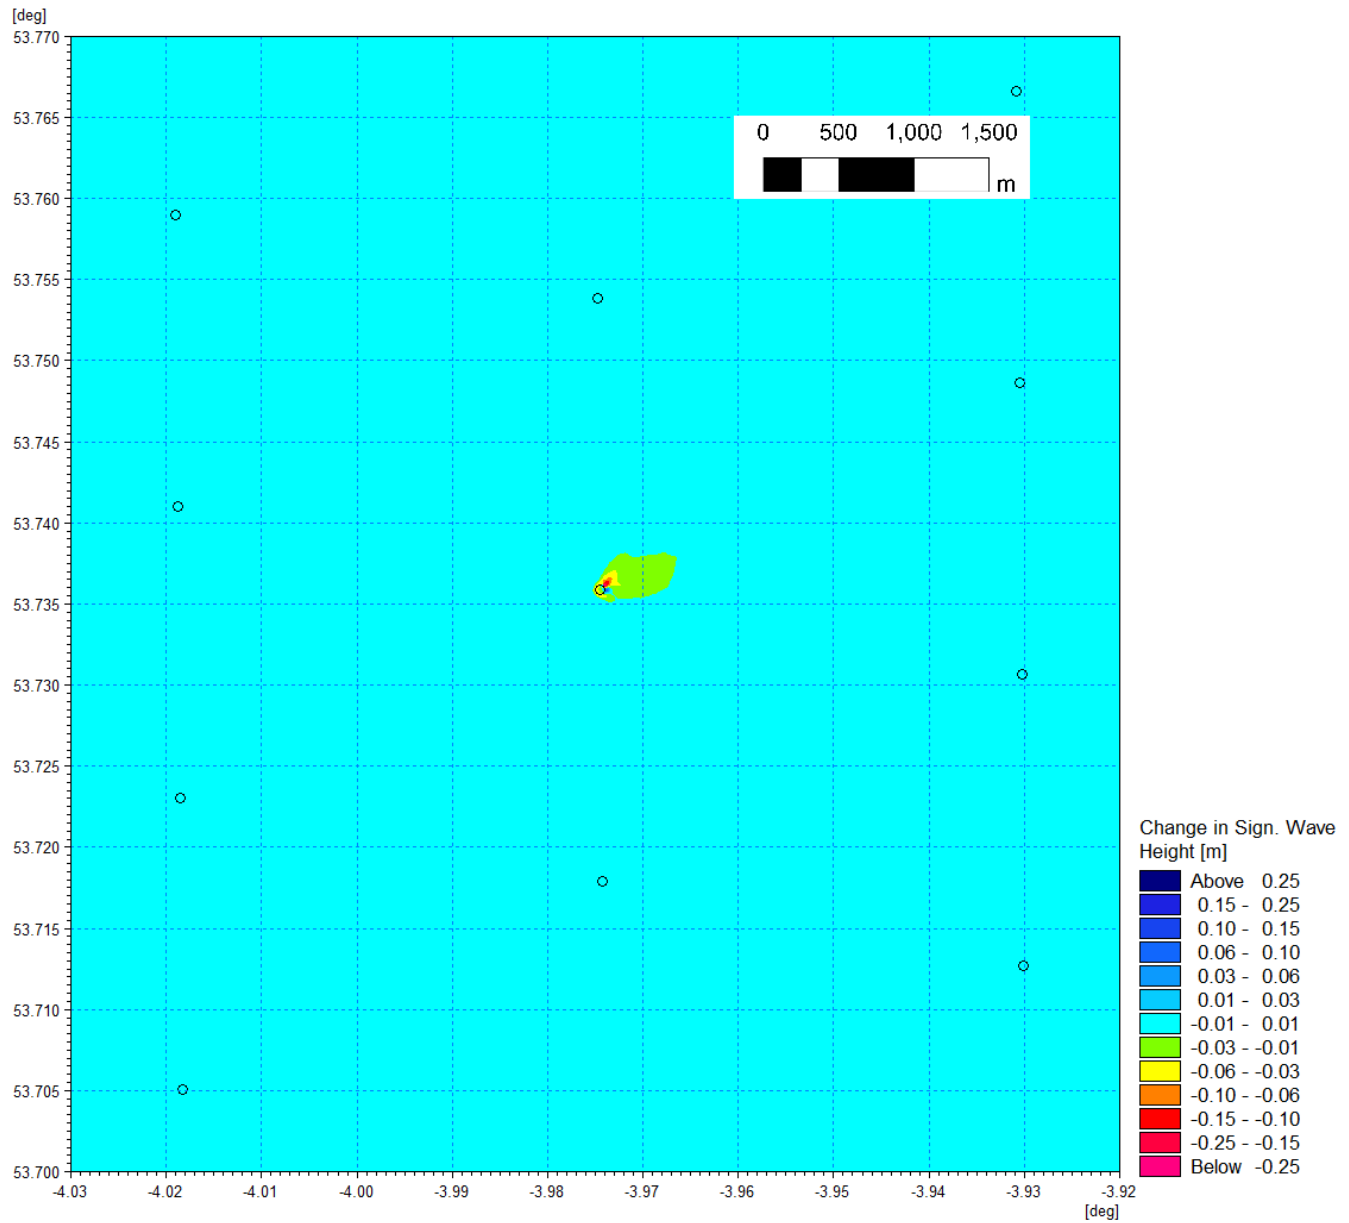


Figure 1.193: Change in wave climate 1 in 20 year storm 240° MHW (post-construction minus baseline) – conical gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

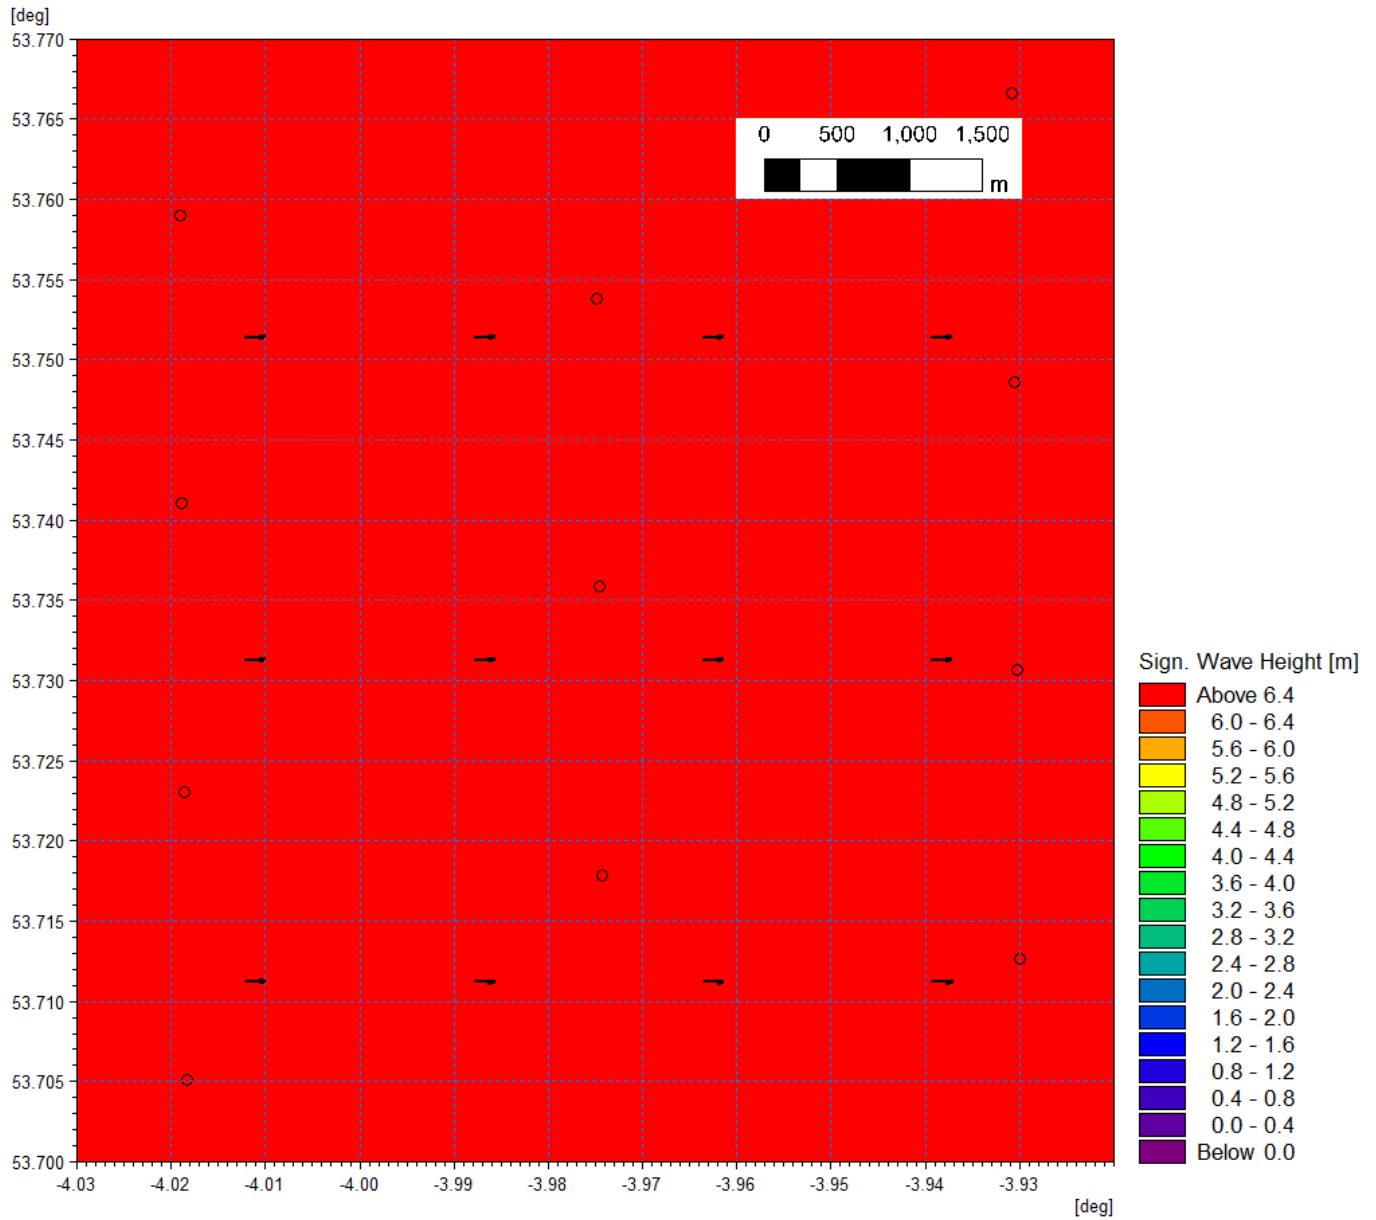


Figure 1.194: Baseline wave climate 1 in 20 year storm 270° MHW.

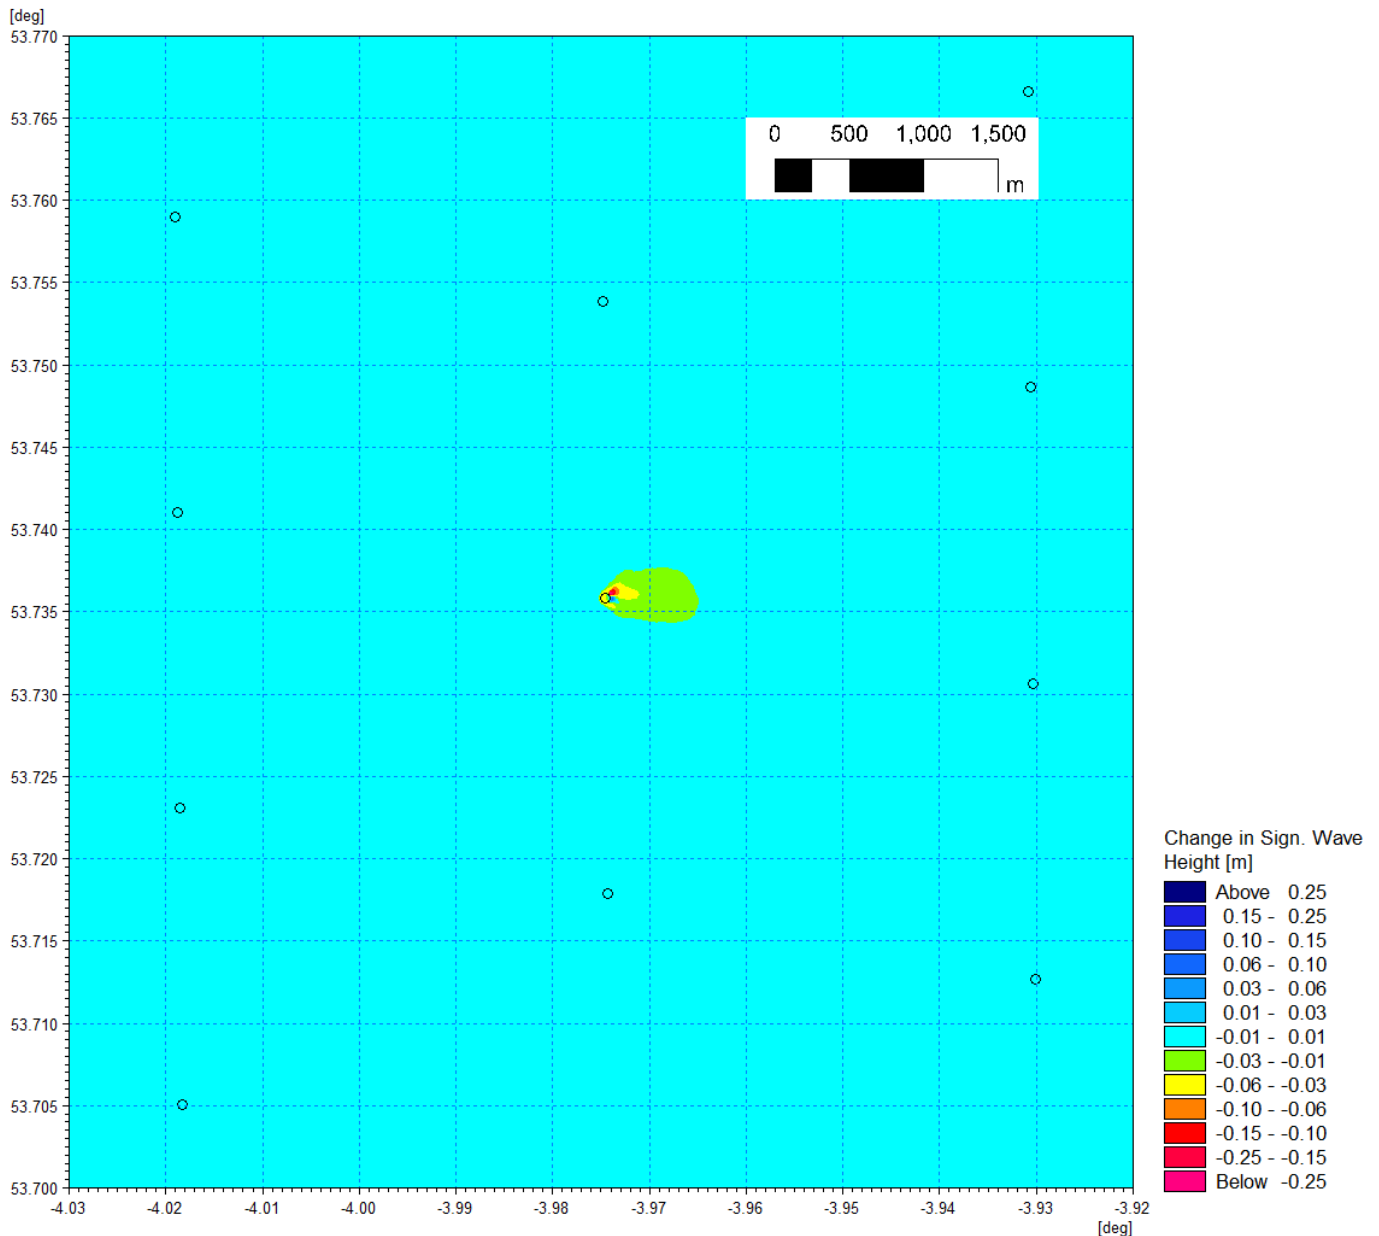


Figure 1.195: Change in wave climate 1 in 20 year storm 270° MHW (post-construction minus baseline) – conical gravity base foundation.

1.4.4 Rectangular gravity base foundations

1.4.4.1 Finally, the rectangular gravity base relates to the larger single semi-submersible OSP structure. The rectangular gravity base reflects a typical design and is comprised of the following:

- Surface dimension 80 m by 60 m
- Slab base 100 m by 80 m
- Six rectangular legs circa 15 m diameter
- Scour protection to a height of average 2.6 m extending 25 m from the slab.

Tidal flow

- 1.4.4.2 Sensitivity testing was undertaken for a single foundation located within the Mona Array Area. The hydrodynamic simulations used to describe the baseline were repeated with the addition of one rectangular gravity base foundation. This represents the largest possible installation for an OSP foundation. The bathymetry was also amended to take account of scour protection. The post-installation tidal currents were subtracted from the baseline conditions to quantify the magnitude and spatial extent of potential changes. The following figures show the mid flood and mid ebb steps from the simulation respectively, but with one rectangular gravity base foundation in place.
- 1.4.4.3 Figure 1.156 shows the baseline flood tide flow patterns with Figure 1.157 showing a focussed plot of the post-construction changes which are limited to the vicinity of the foundation. Similarly, Figure 1.158 and Figure 1.159 show the same information for the ebb tide. During peak current speed the flow is redirected in the immediate vicinity of the structure. Currents accelerate at the exposed face of structure and along the sides, whilst decreasing on the sheltered lee side. The variation is a maximum of 20 cm/s (decrease in current speed) in the immediate vicinity (50 m) of the structure's lee side which constitutes 20% of flows on the flood and c. 29% on the ebb tide. Due to the size of the structure a decrease of 14 cm/s to 20 cm/s may extend 100 m from the structure and a decrease of 8 cm/s to 14 cm/s at a distance of 200 m from the base. Corresponding increases in current speed are of a lower magnitude, the largest occurring in the region of 2 cm/s to 4 cm/s, representing 2% to 4% of the baseline current speed.
- 1.4.4.4 This is a much larger unit than the foundation types considered in the previous sections, however, it would be implemented as a single OSP structure to serve the entire wind project, with other adjacent wind turbines structures comprised of the smaller foundation types. These results for the foundation located in the Mona Array Area are applicable to the Morgan Generation Assets, given a similar if slightly reduced current speed within the Morgan Array Area. The change in peak current speeds can be expected to be slightly smaller for the foundation located within the Morgan Array Area, therefore the percentage change in current speed is likely to remain at c. 20% and 29% on the peak flood and ebb respectively in the immediate vicinity of the structure extending along the axis of the tidal excursion. Again, increases in current speed would be seen at the sides of the structure, ranging between a 2% to 4% increase.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

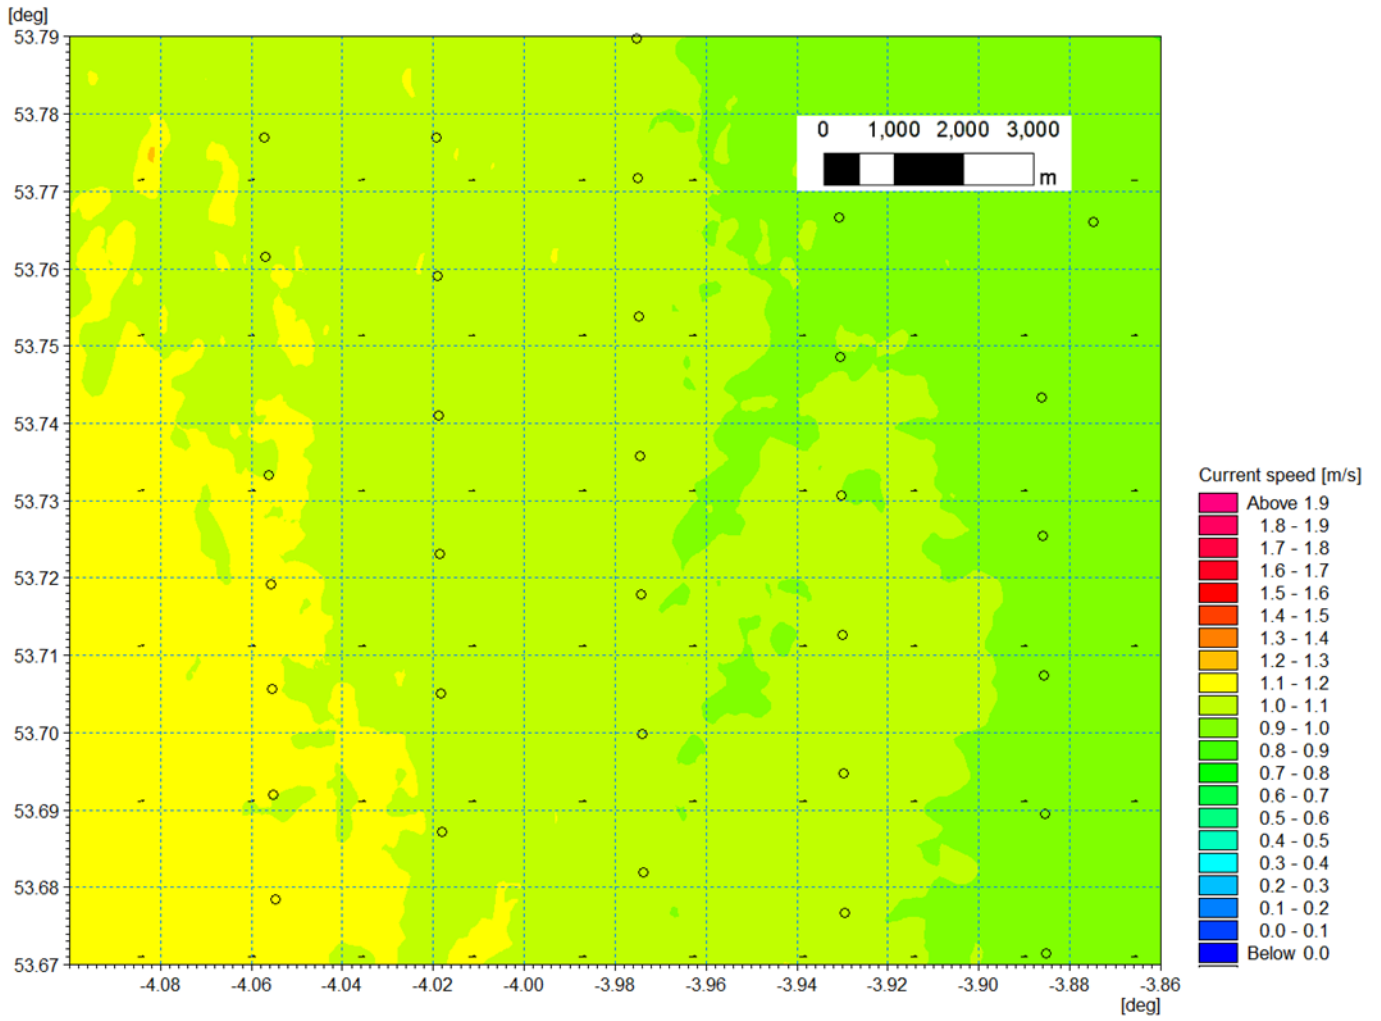


Figure 1.196: Baseline tidal flow pattern – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

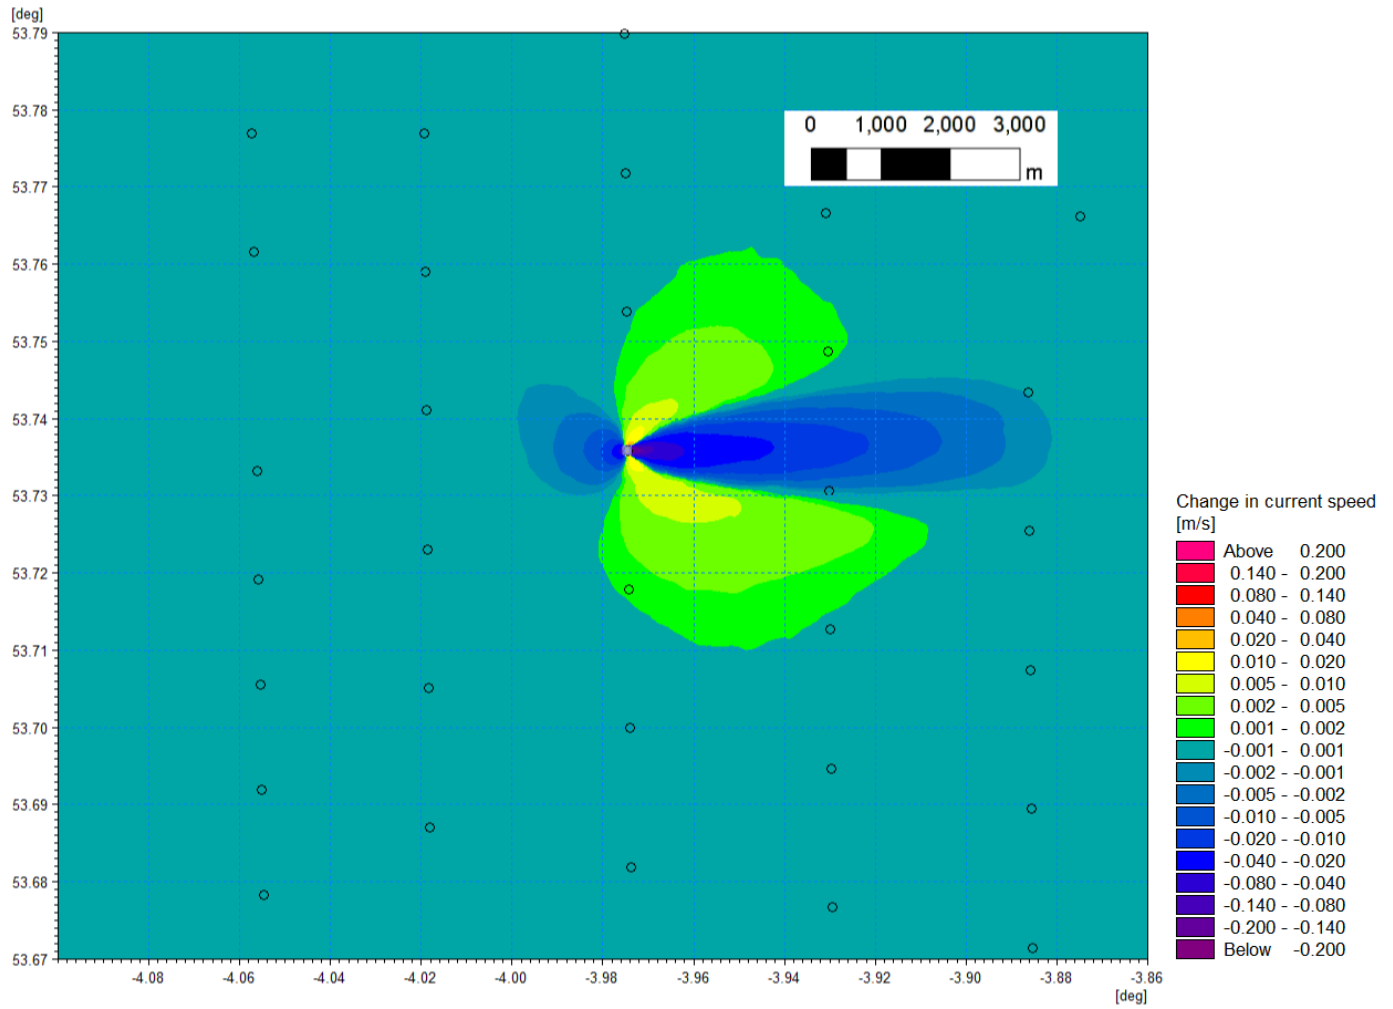


Figure 1.197: Change in tidal flow (post-construction minus baseline) rectangular gravity base foundation – flood tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

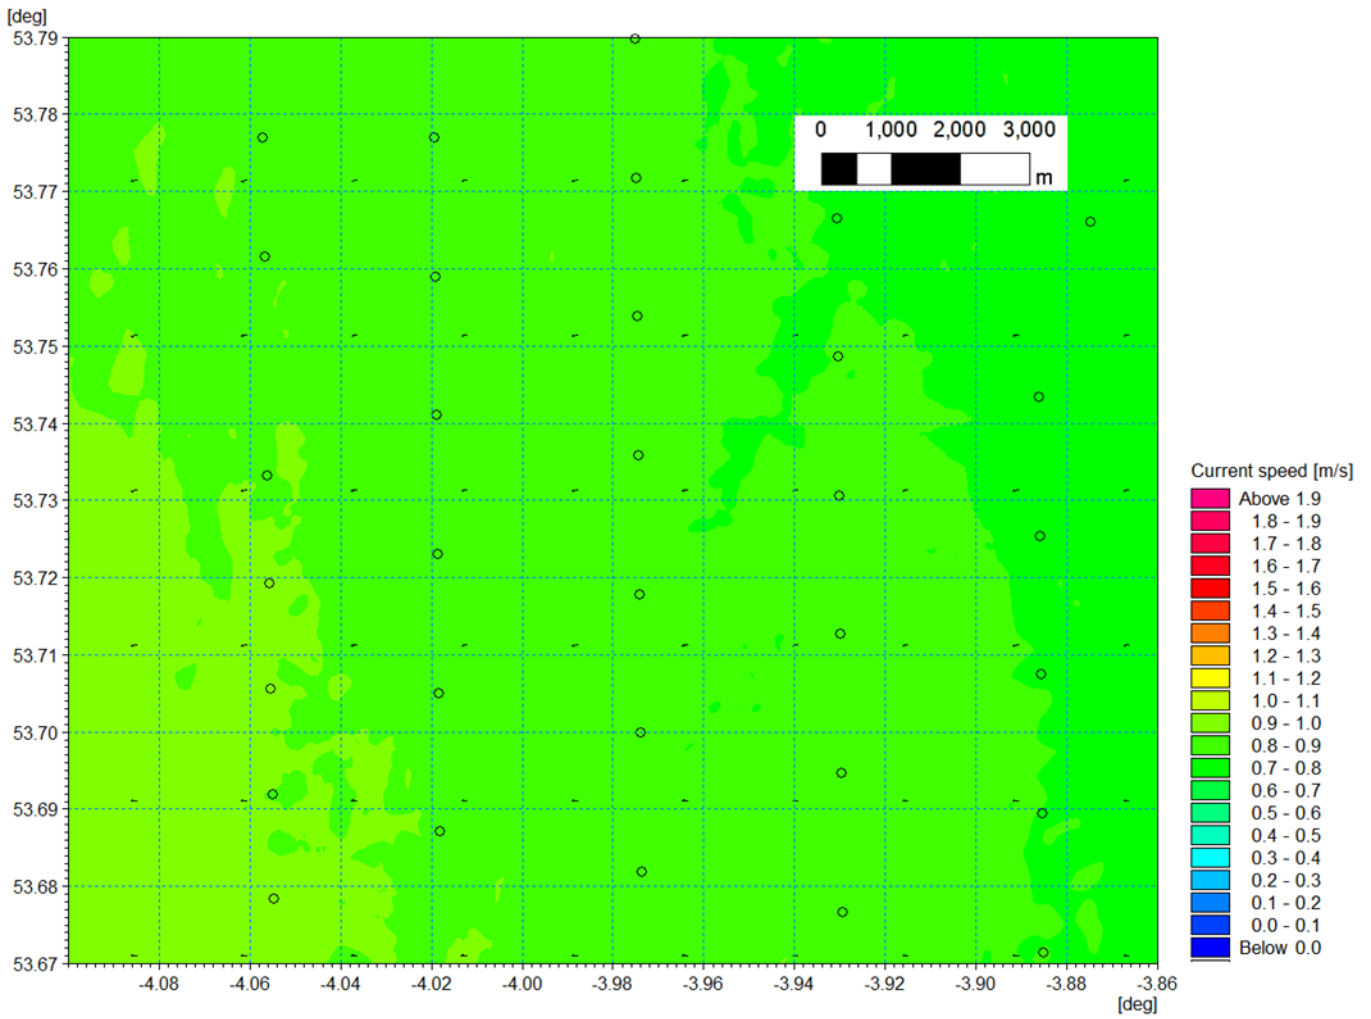


Figure 1.198: Baseline tidal flow pattern – ebb tide.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

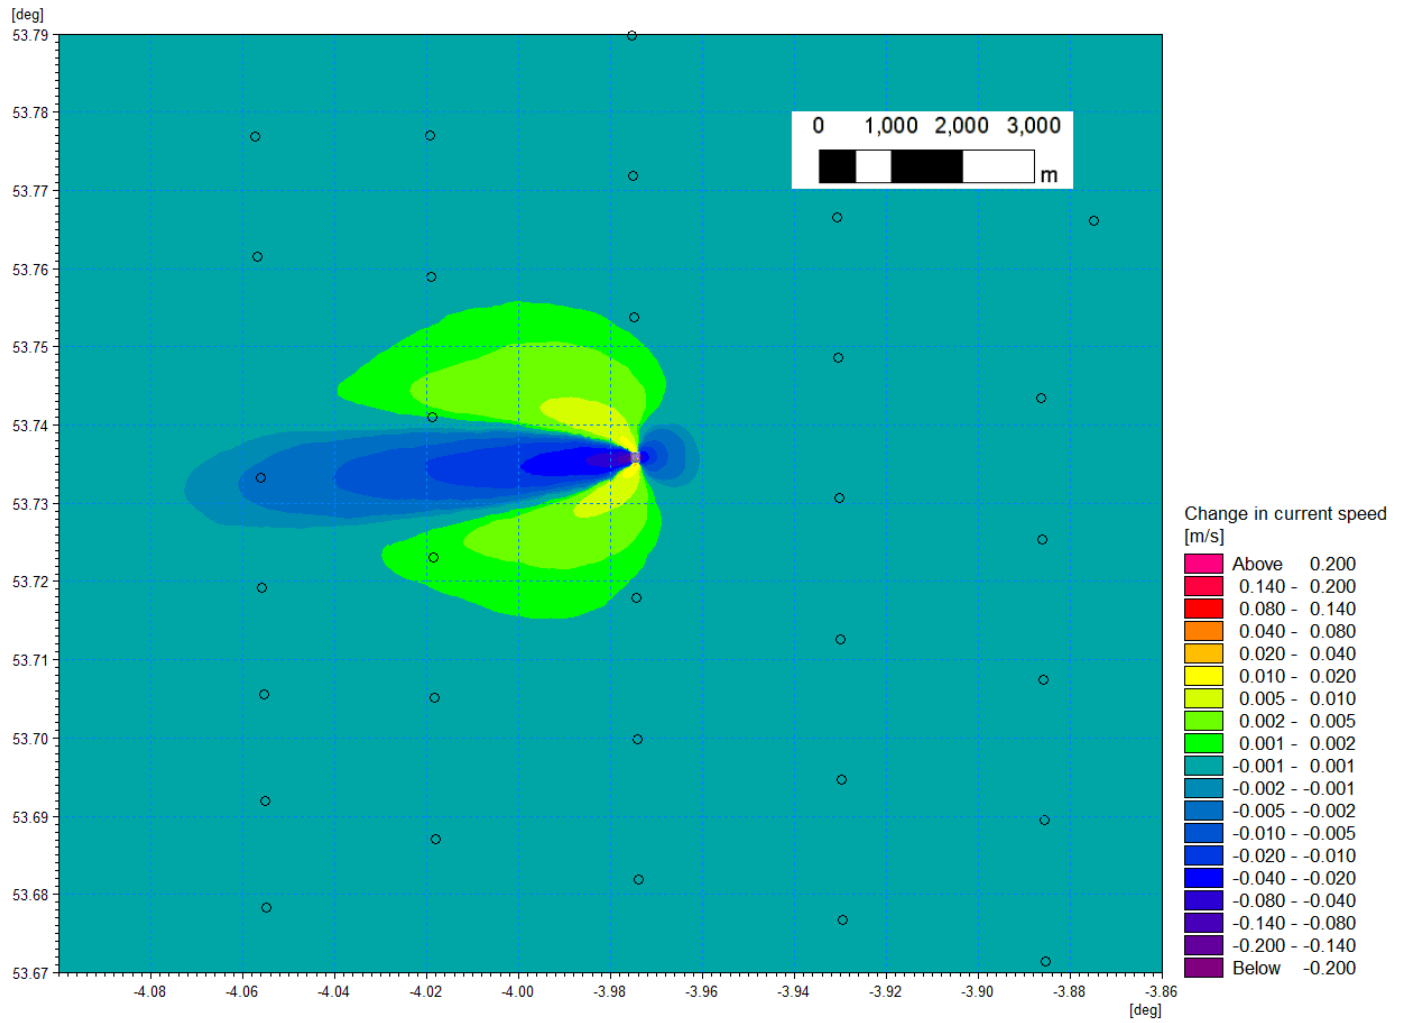


Figure 1.199: Change in tidal flow (post-construction minus baseline) rectangular gravity base foundation – ebb tide.

Wave climate

- 1.4.4.5 The baseline 000° storm is presented for the 1 in 1 year storm in the Mona Array Area in Figure 1.160 with the difference in wave climate with the rectangular gravity base foundation installed shown in Figure 1.201. Similarly, the 1 in 20 year baseline and changes from this direction are presented in Figure 1.208 and Figure 1.209 respectively. The alterations to the wave climate are seen as reductions in the lee of the rectangular gravity base foundation. The maximum changes observed in the immediate vicinity (50 m) were limited to a maximum of 25 cm during the 1 in 20 year scenario, which represents less than c. 5% of the baseline significant wave height of c. 4.8 m. 100 m to 200 m from the structure these changes fall to <15 cm (c. 3%).
- 1.4.4.6 The changes to baseline wave climate for waves originating from 090° sector are shown in Figure 1.203 and Figure 1.210, both 1 in 1 and 1 in 20 year storm waves are of slightly greater than those experienced from the 000° sector due to a lower significant wave height. Whilst still limited to a 25 cm change in significant wave height, this would represent c. 6.5% of the baseline wave height (3.8 m) within 50 m of the structure. This level of change may persist up to 100 m from the offshore platform, after which this would rapidly reduce to <15 cm.
- 1.4.4.7 Within the Morgan Array Area, for both the 000° and 030° directions, significant wave heights are around 4.0 m to 4.4 m for the 1 in 20 year return period storms, thus the changes experienced are likely to fall in between those of the modelled results for 000° and 090° directions for the Mona Offshore Wind Project. With changes in wave heights likely in the range of 5% to 6.5%, these being limited to within 50 m of the structures, falling to around 3% at a distance of 100 m from the foundations with the wake extending to the south south west and south directions respectively.
- 1.4.4.8 Storm waves originating from 240° and 270° are of a greater magnitude than those discussed above within the Mona Array Area, with significant wave heights in excess of 6.2 m in the vicinity of the modelled foundation. During a 1 in 20 year storm post construction waves may experience a change up to a maximum of 25 cm or c. 4% in the immediate vicinity of the rectangular gravity base foundation. These changes reduce in magnitude with distance from the structure, 100 m to 200 m from the structure these changes fall to <15 cm (c. 2.5%).
- 1.4.4.9 In the Morgan Array Area, for both the 240° and 270° directions, significant wave heights are 6.0 m to 6.4 m for the 1 in 20 year events, thus the changes experienced are similar to those of the modelled results for 240° directions for the foundation located within the Mona Array Area. With changes in baseline wave heights likely around 4% (c. 25 cm) in the immediate vicinity of the foundation. These changes would fall to <2.5% within 200 m of the foundations with the wake extending in the north east and easterly directions.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

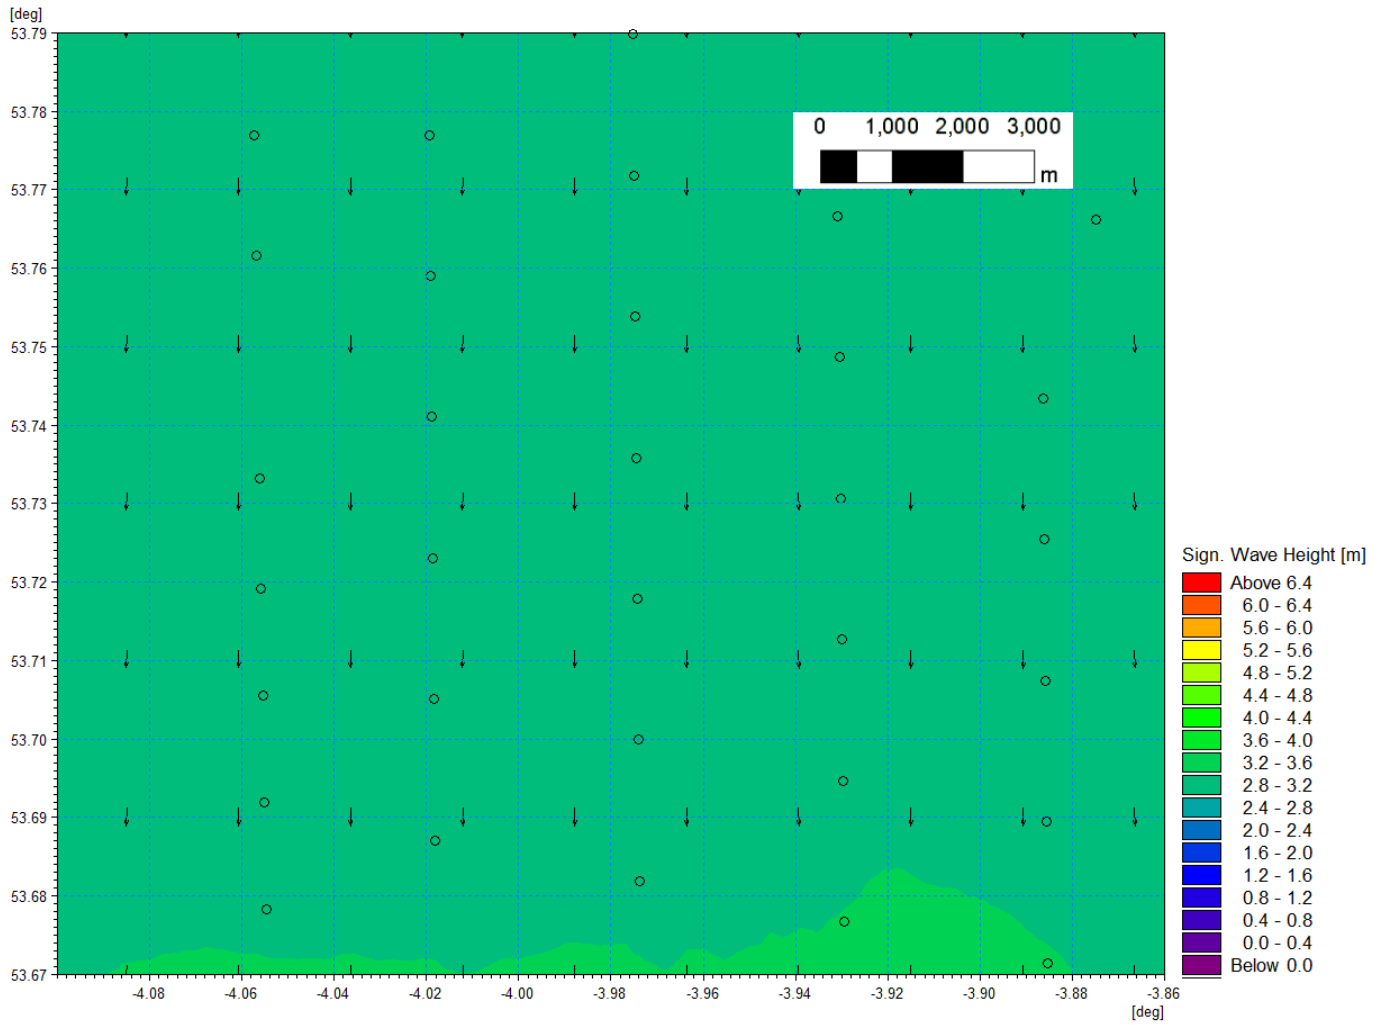


Figure 1.200: Baseline wave climate 1 in 1 year storm 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

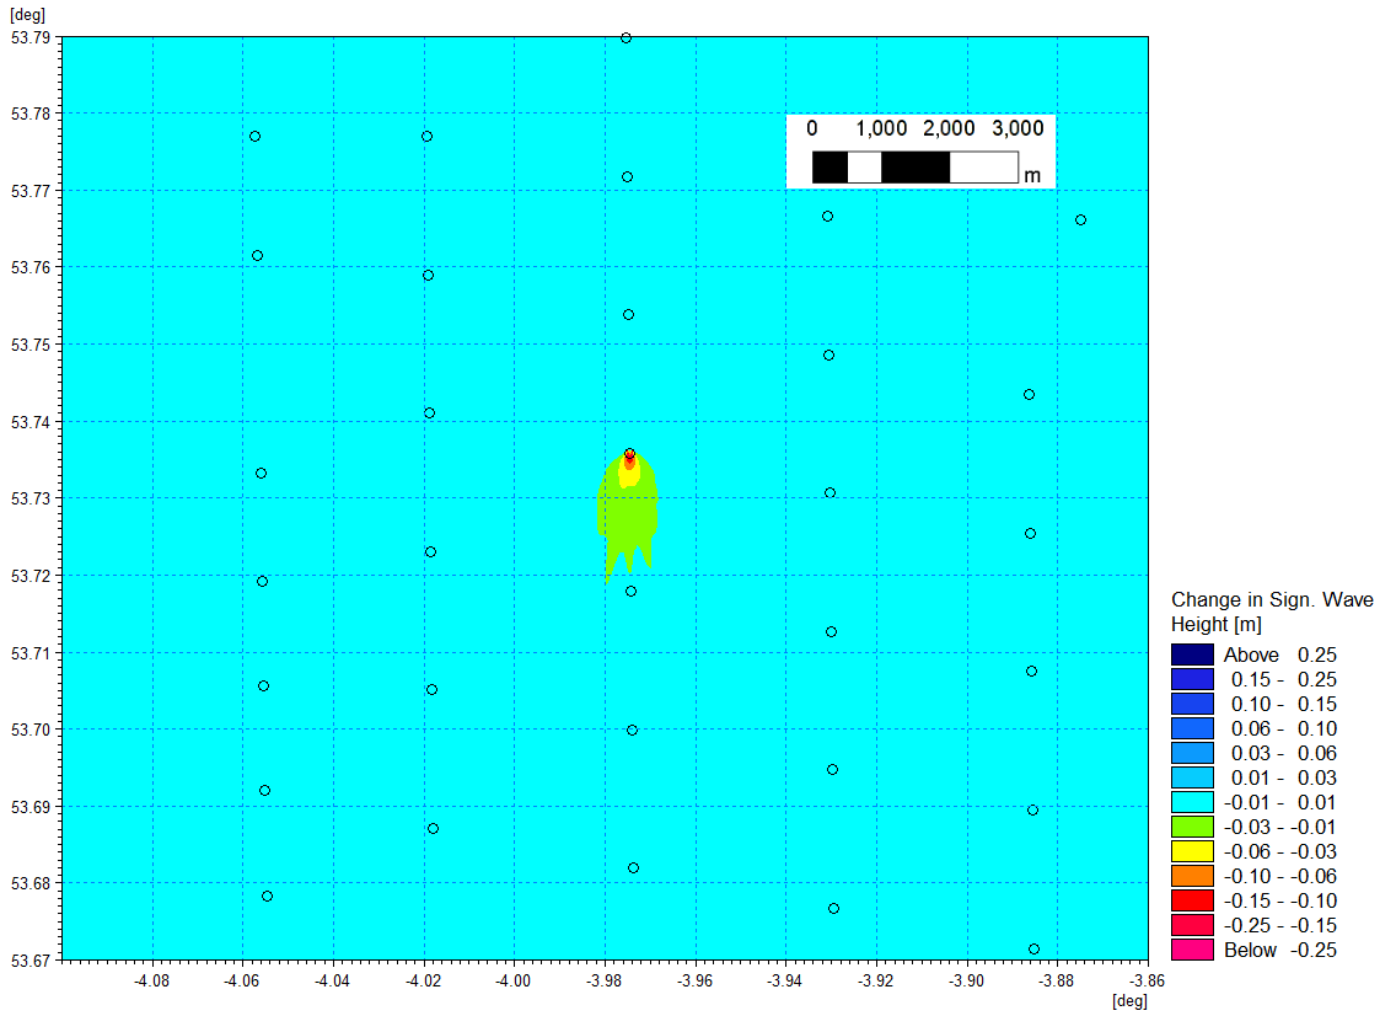


Figure 1.201: Change in wave climate 1 in 1 year storm 000° MHW (post-construction minus baseline) - rectangular gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

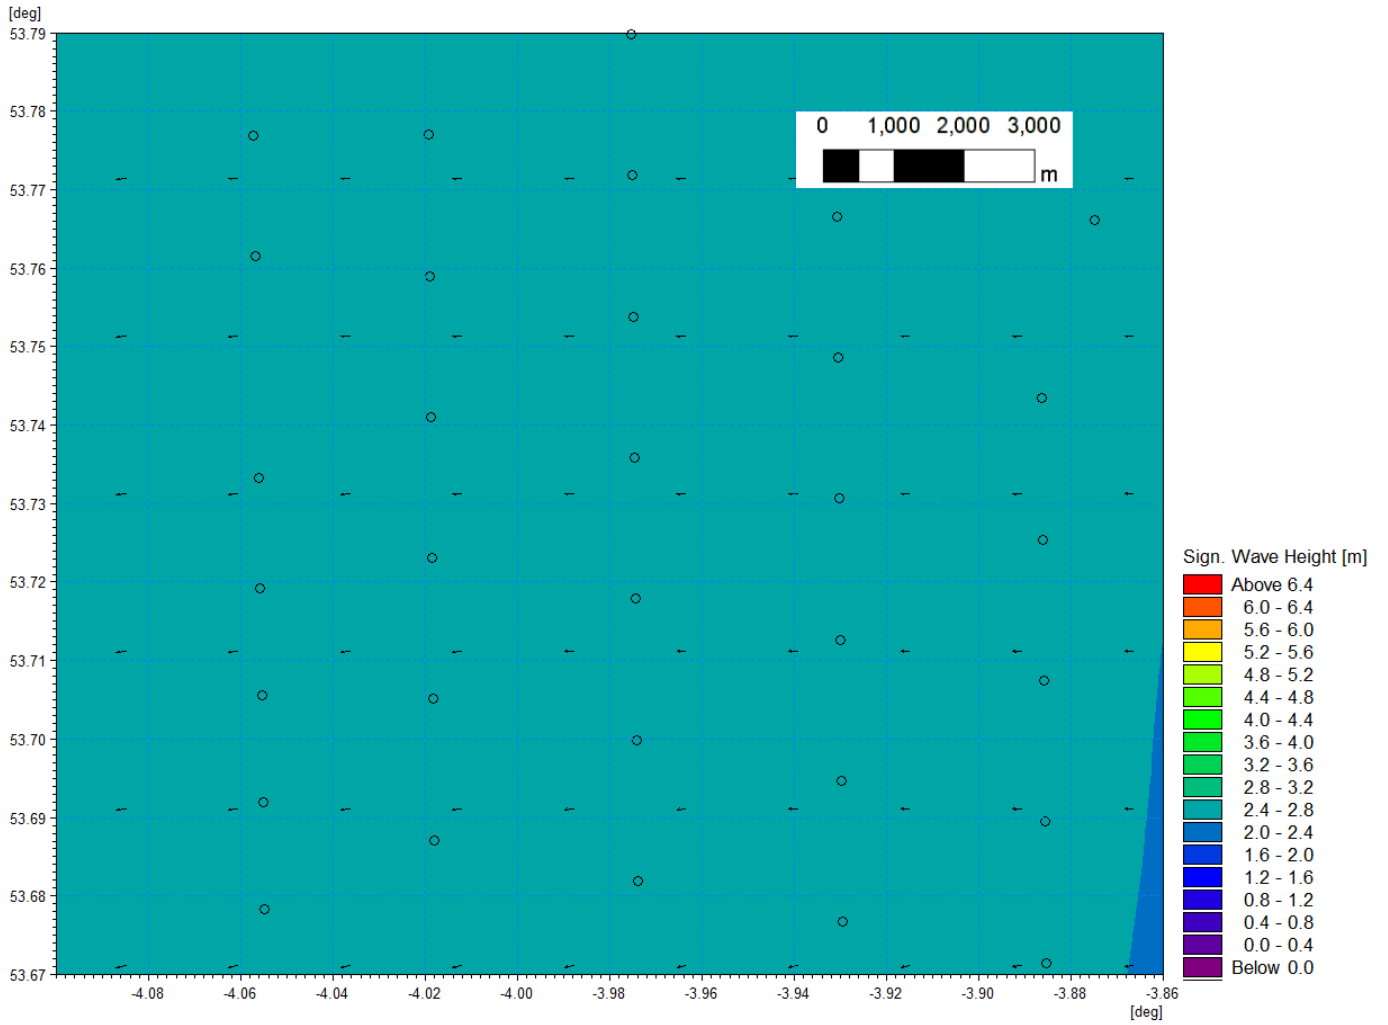


Figure 1.202: Baseline wave climate 1 in 1 year storm 090° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

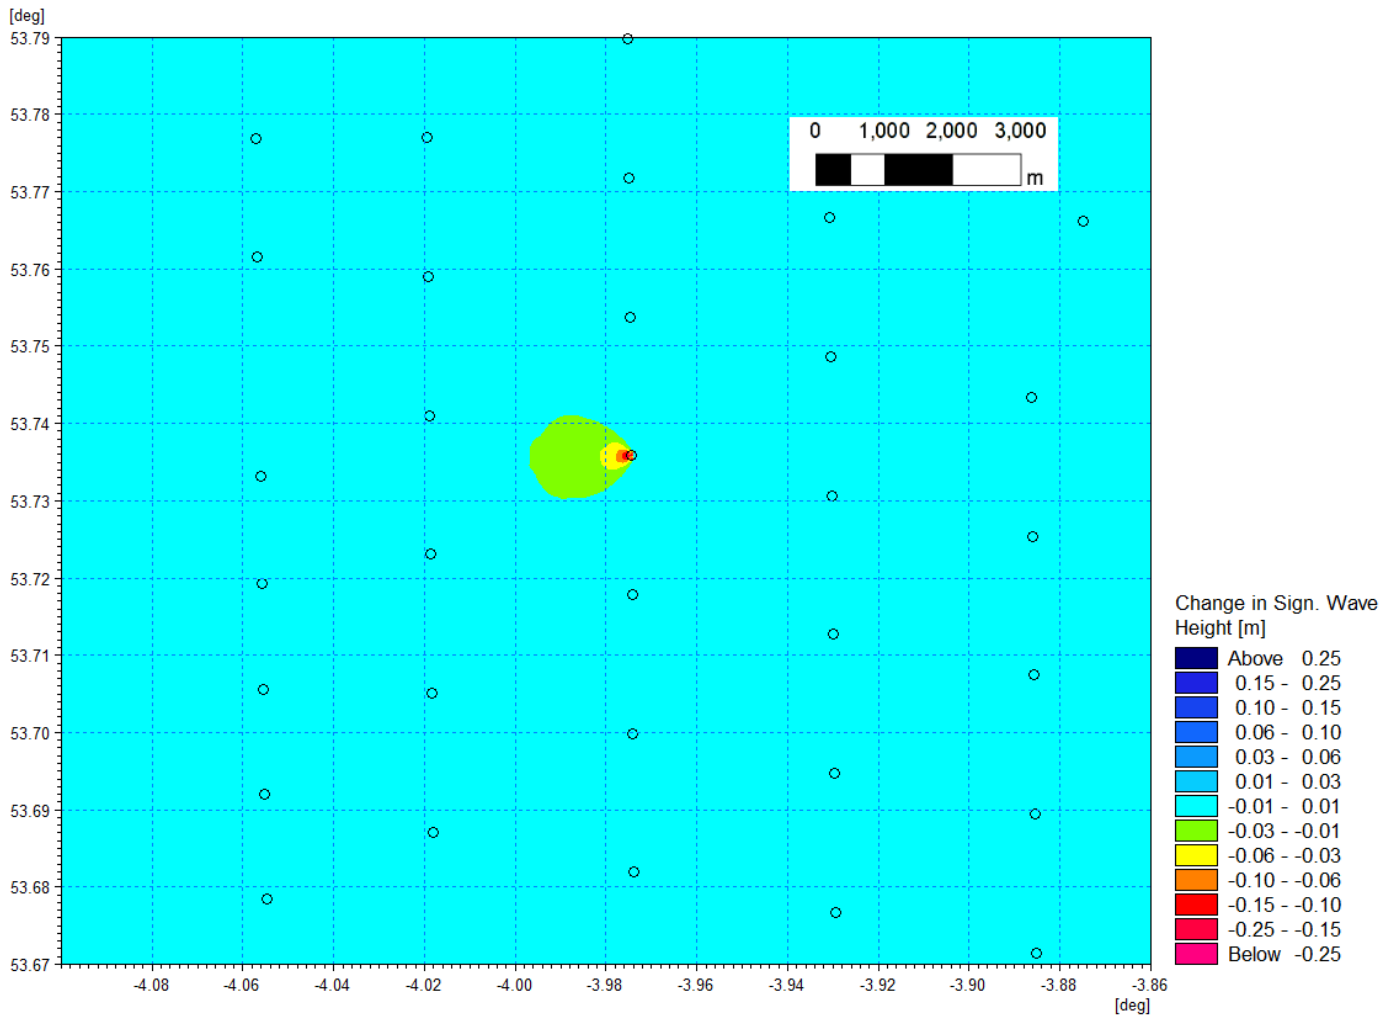


Figure 1.203: Change in wave climate 1 in 1 year storm 090° MHW (post-construction minus baseline) - rectangular gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

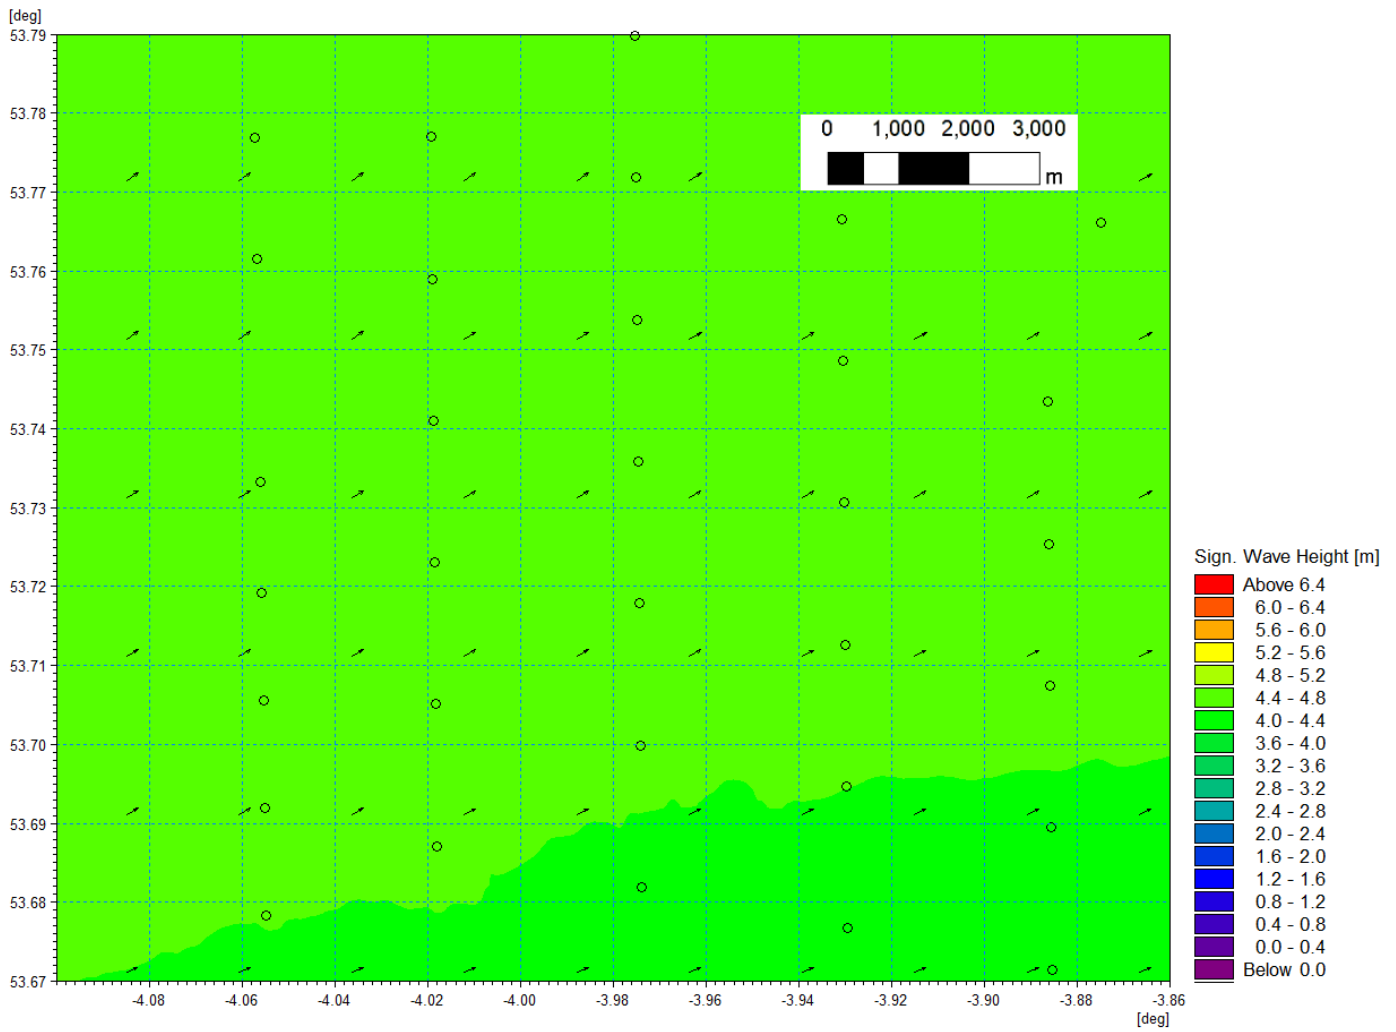


Figure 1.204: Baseline wave climate 1 in 1 year storm 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

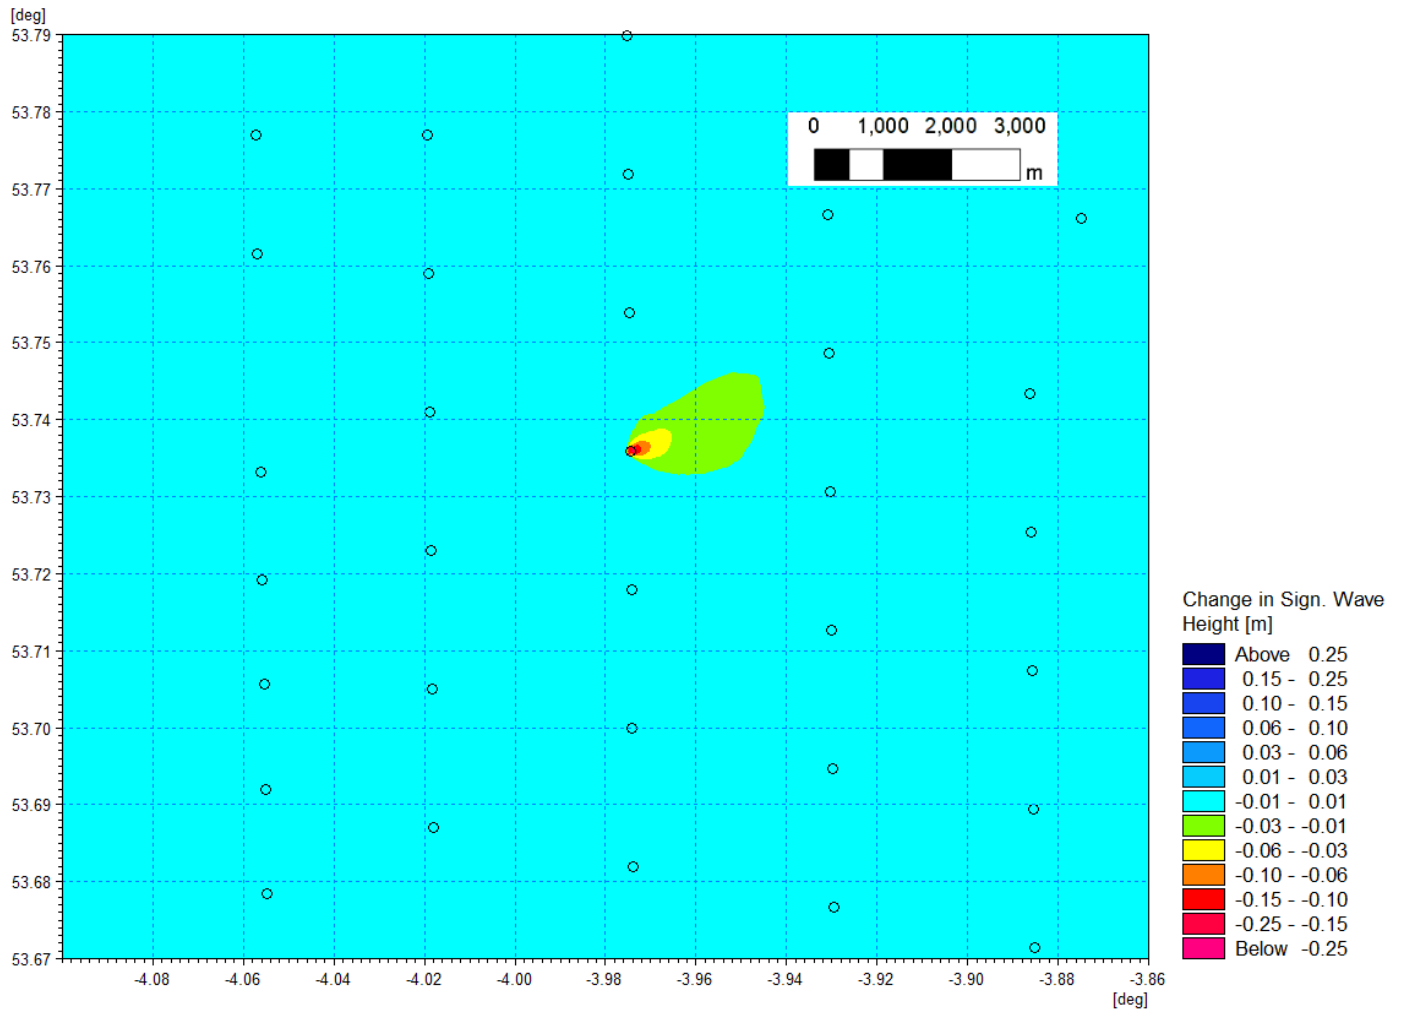


Figure 1.205: Change in wave climate 1 in 1 year storm 240° MHW (post-construction minus baseline) - rectangular gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

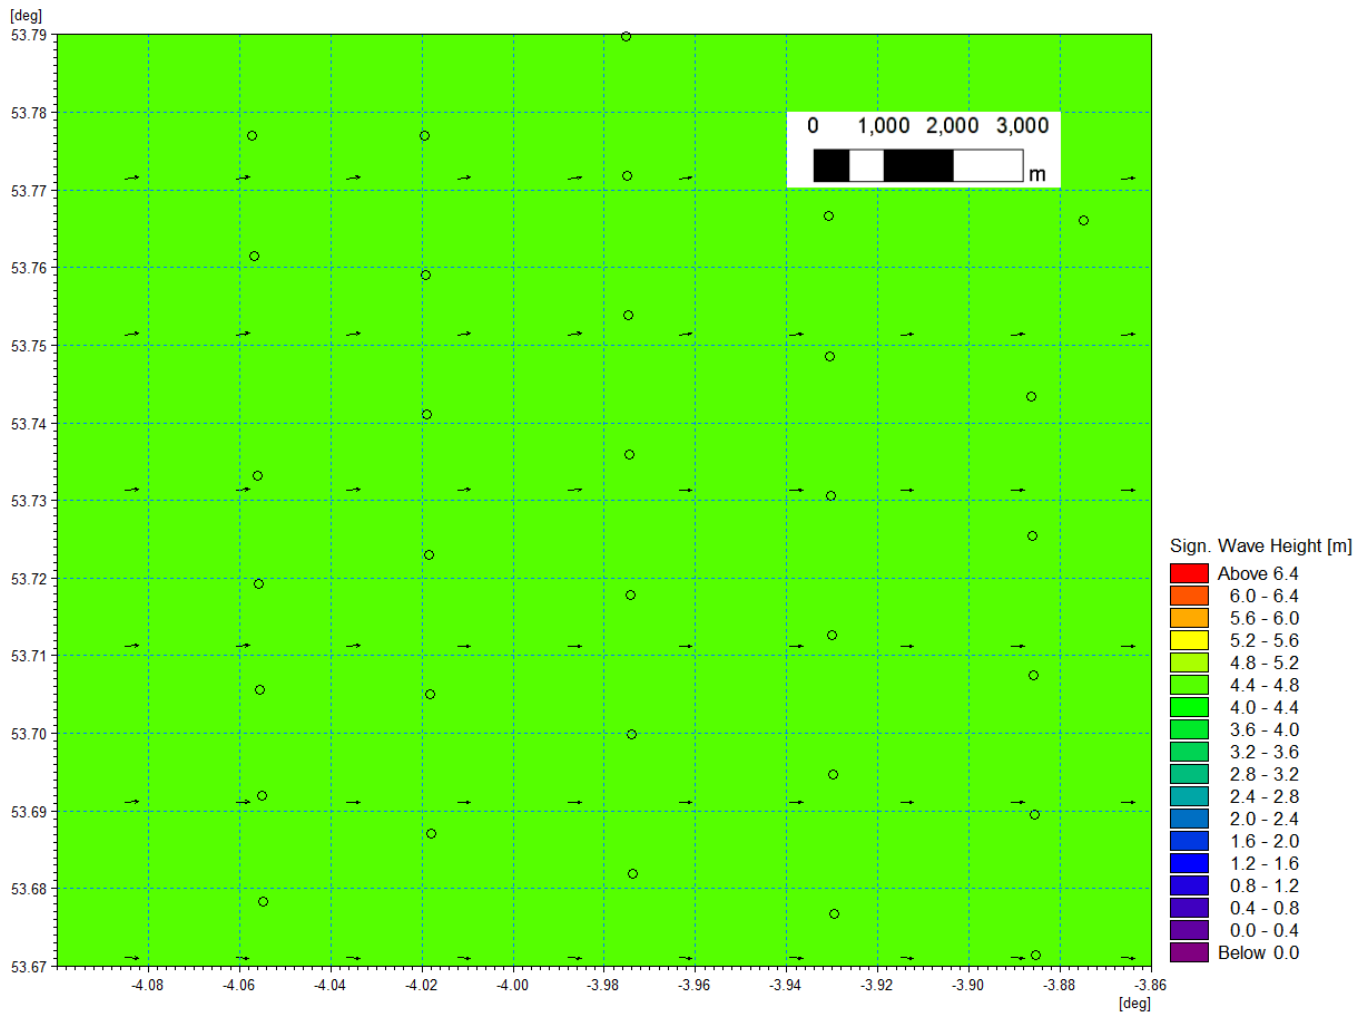


Figure 1.206: Baseline wave climate 1 in 1 year storm 270° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

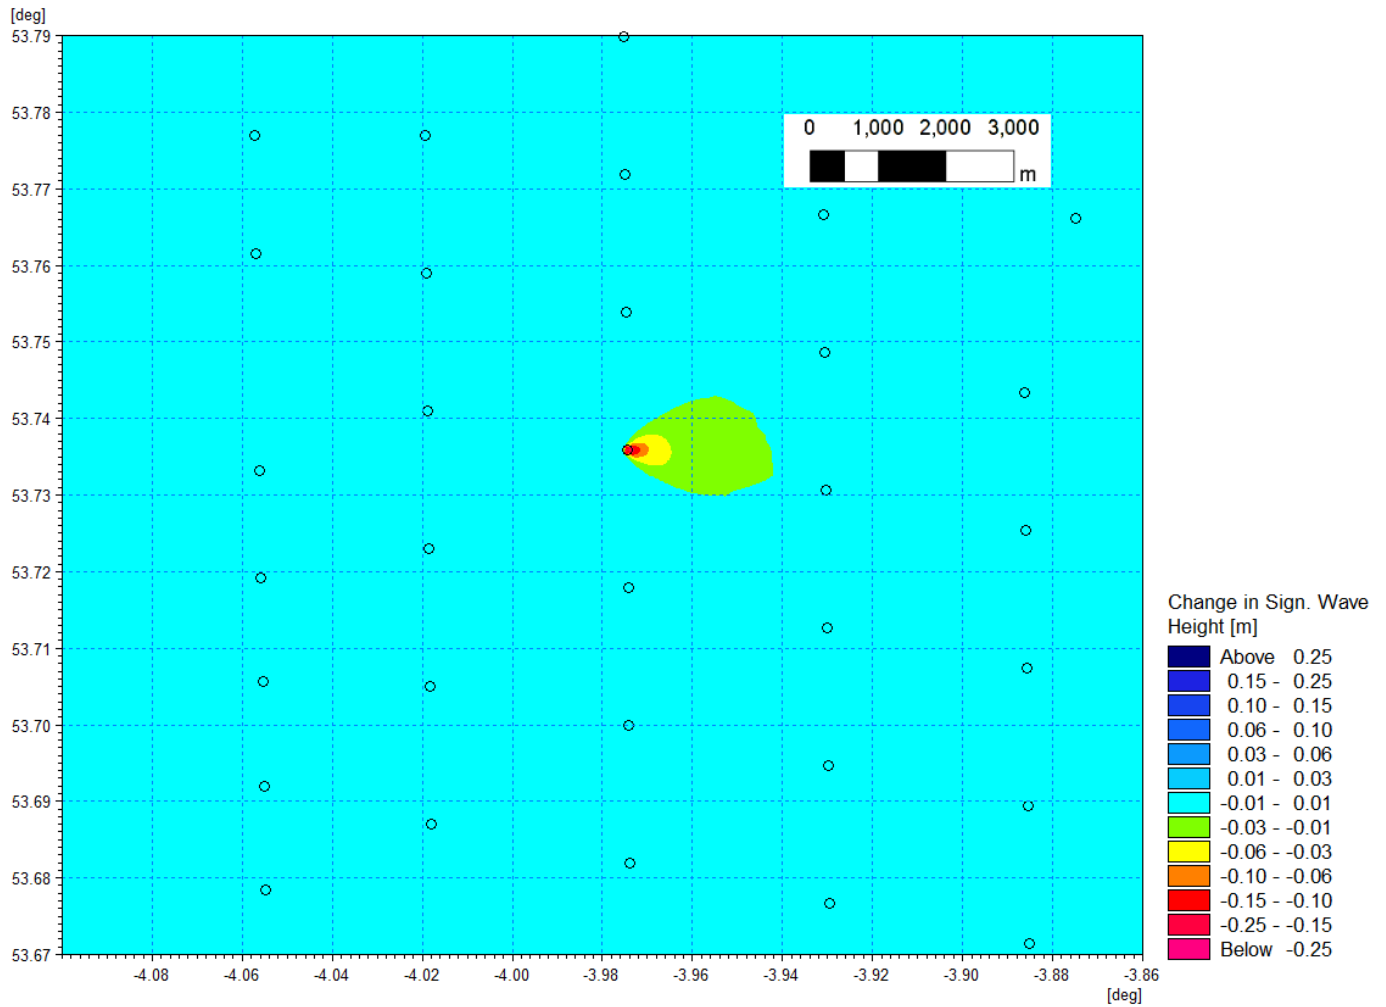


Figure 1.207: Change in wave climate 1 in 1 year storm 270° MHW (post-construction minus baseline) - rectangular gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

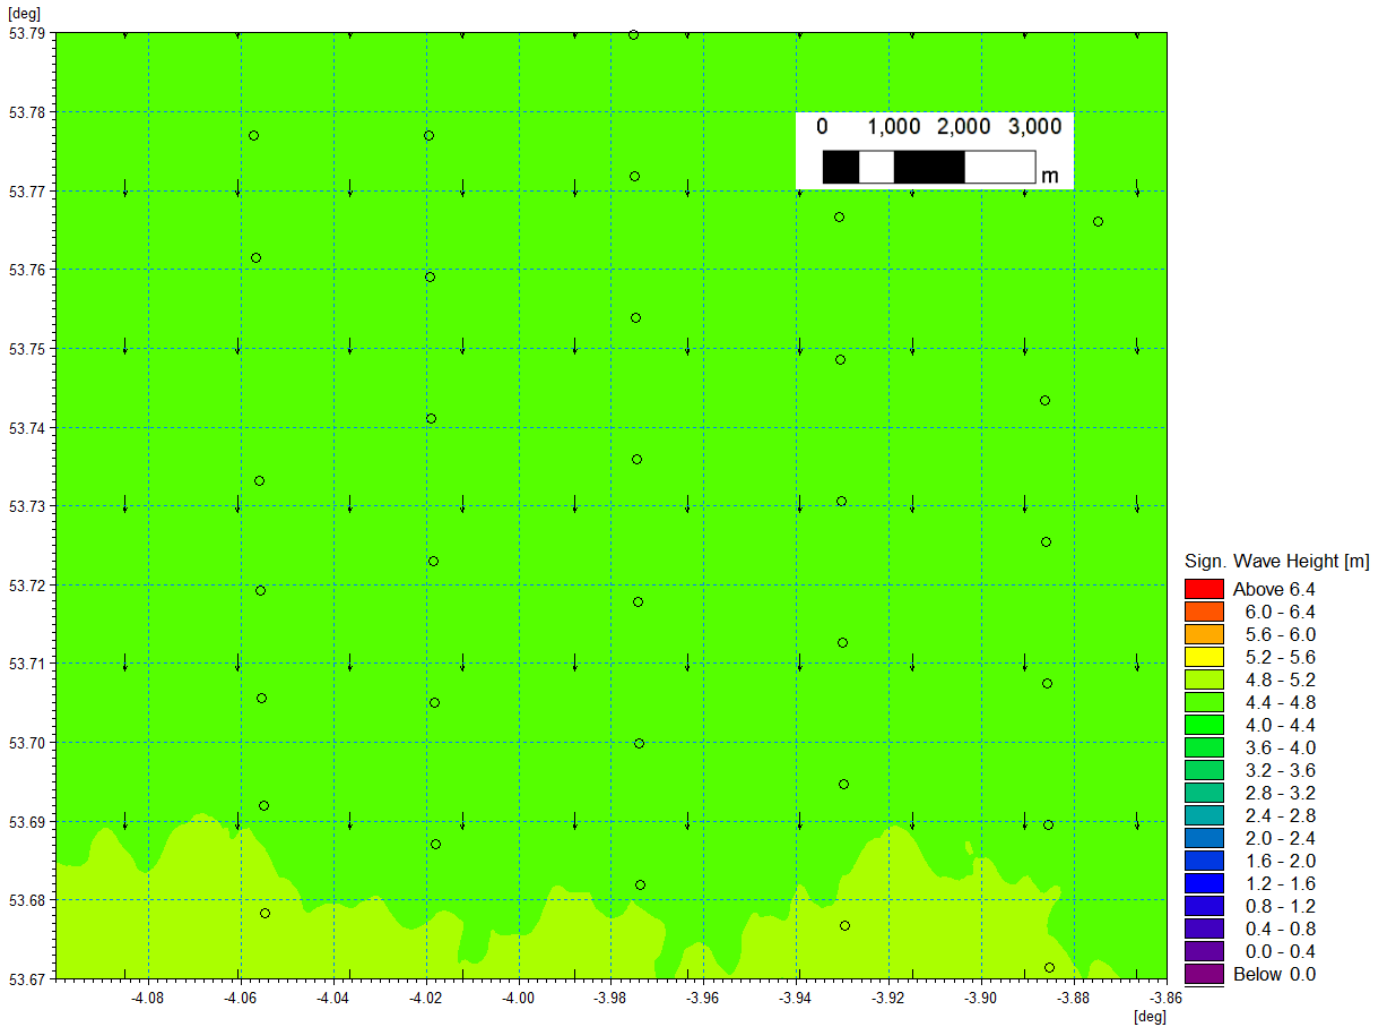


Figure 1.208: Baseline wave climate 1 in 20 year storm 000° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

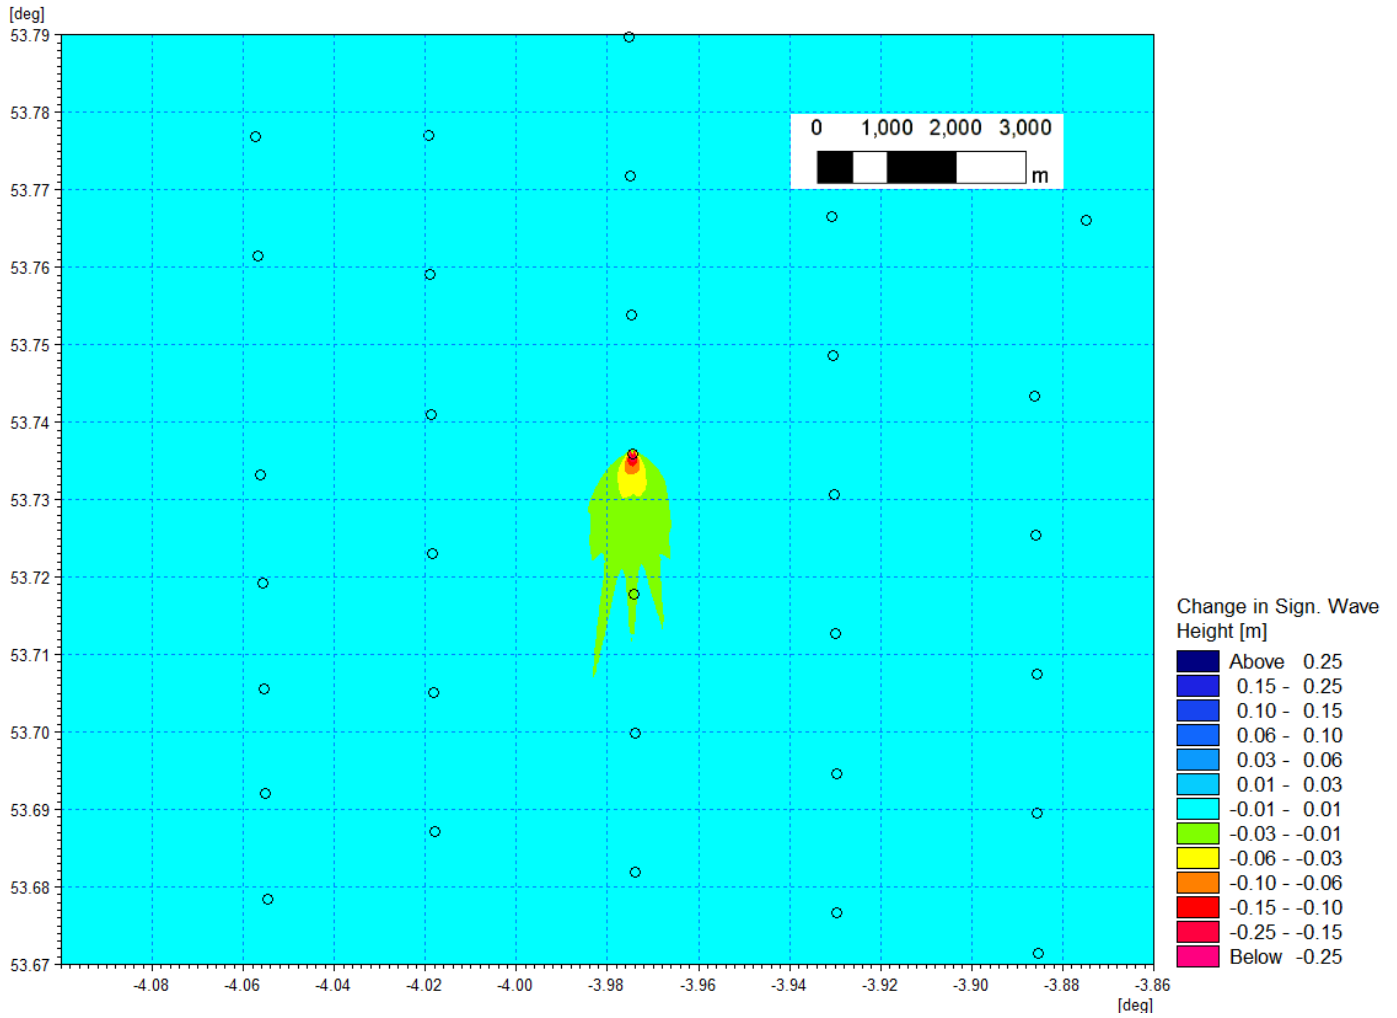


Figure 1.209: Change in wave climate 1 in 20 year storm 000° MHW (post-construction minus baseline) - rectangular gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

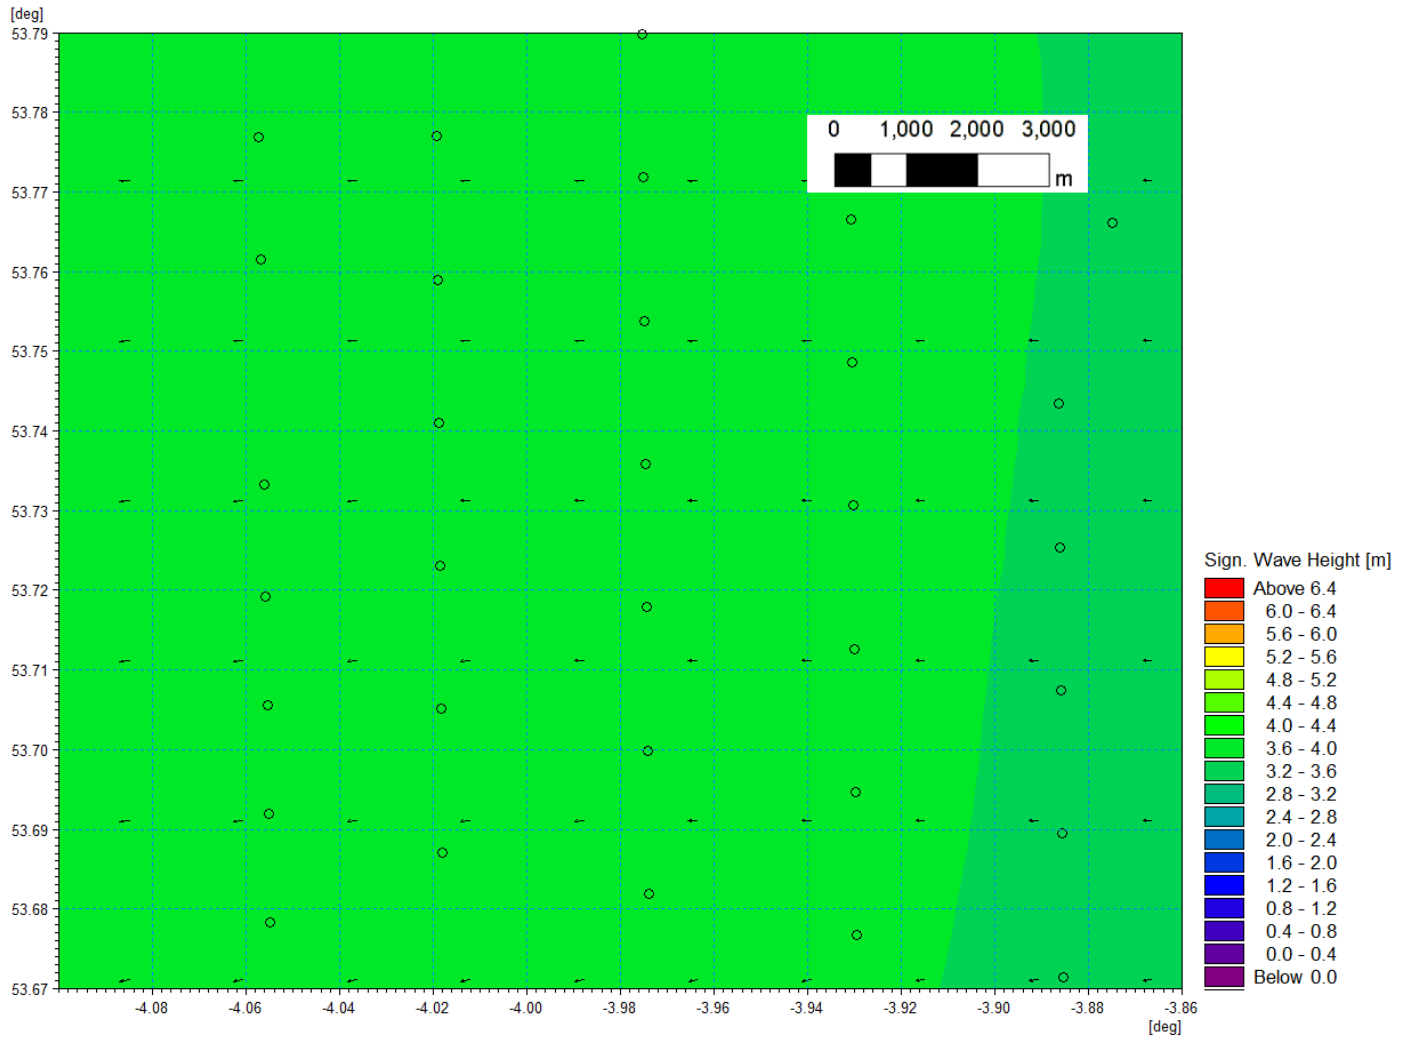


Figure 1.210: Baseline wave climate 1 in 20 year storm 090° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

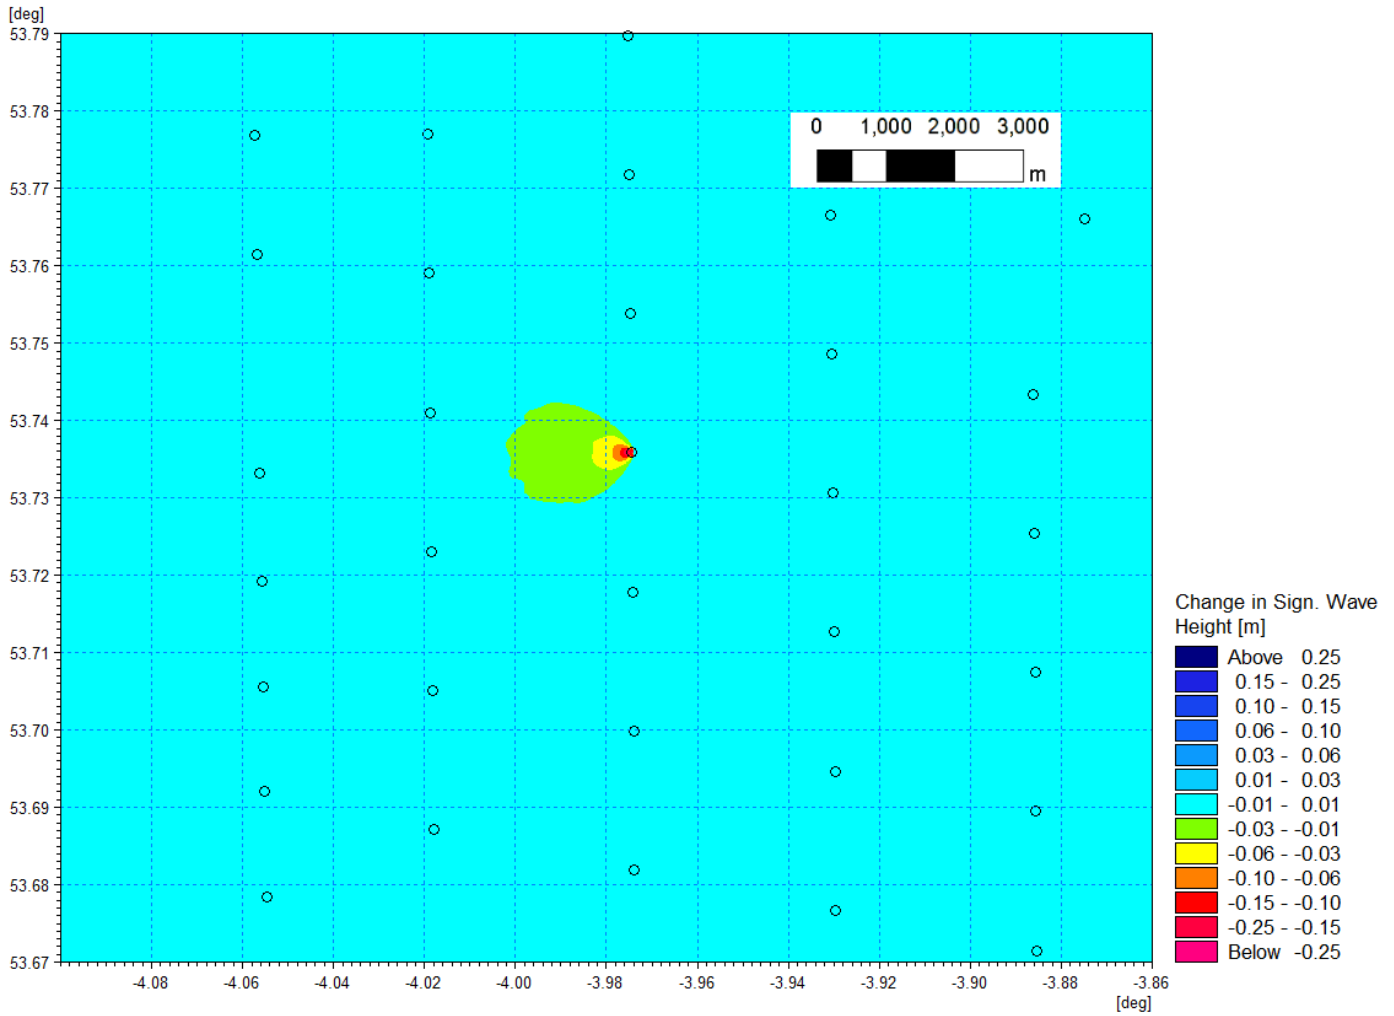


Figure 1.211: Change in wave climate 1 in 20 year storm 090° MHW (post-construction minus baseline) - rectangular gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

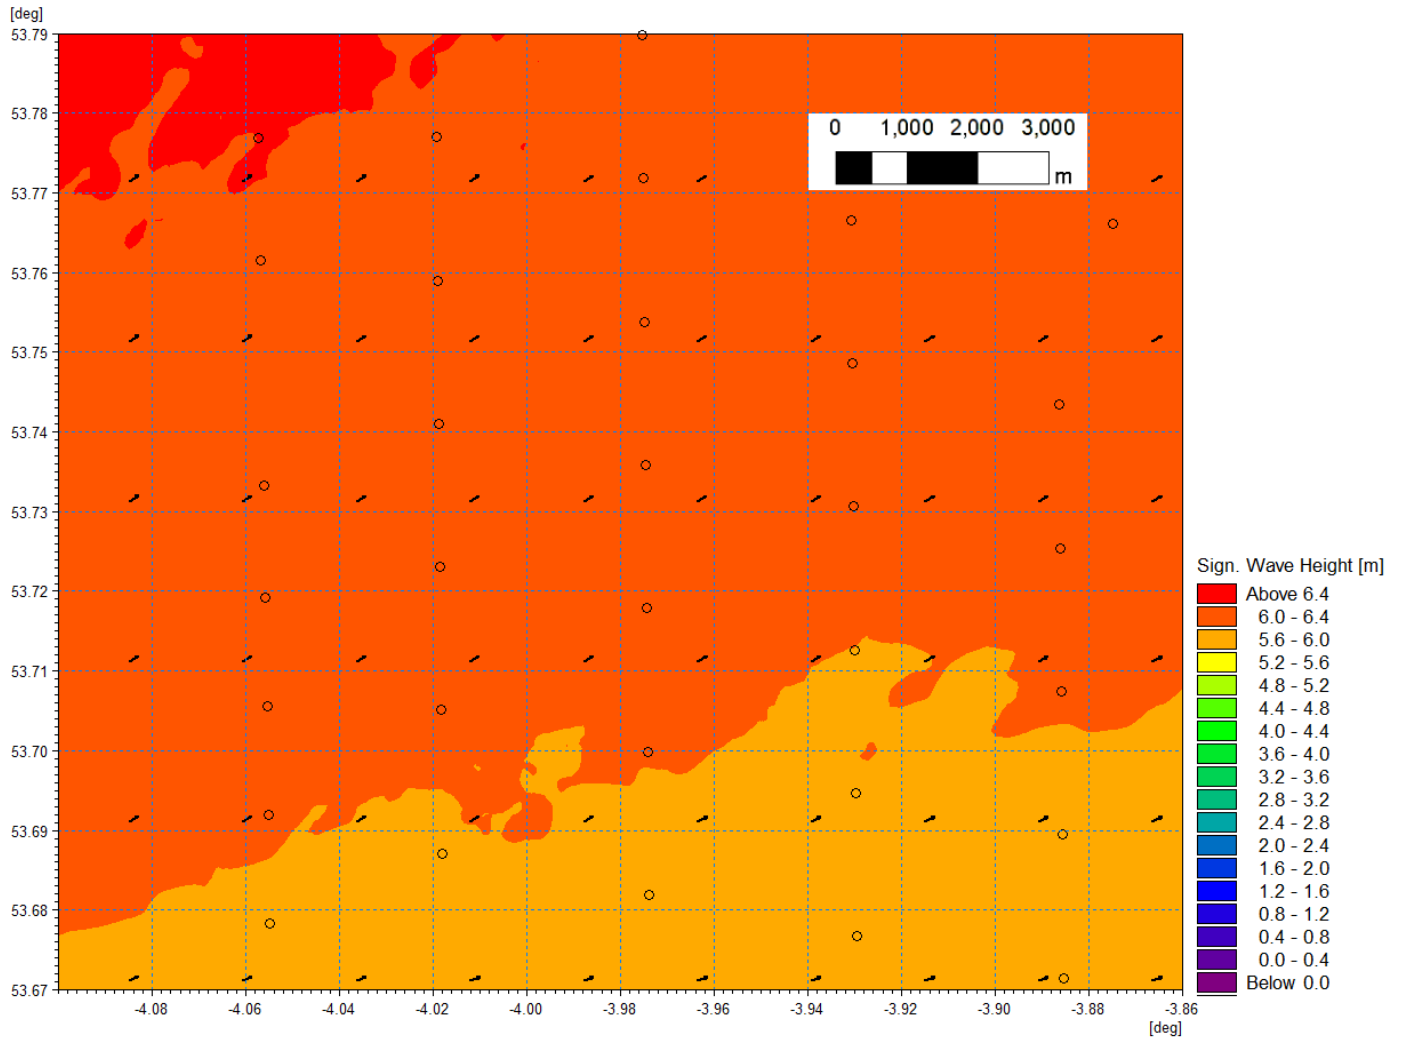


Figure 1.212: Baseline wave climate 1 in 20 year storm 240° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

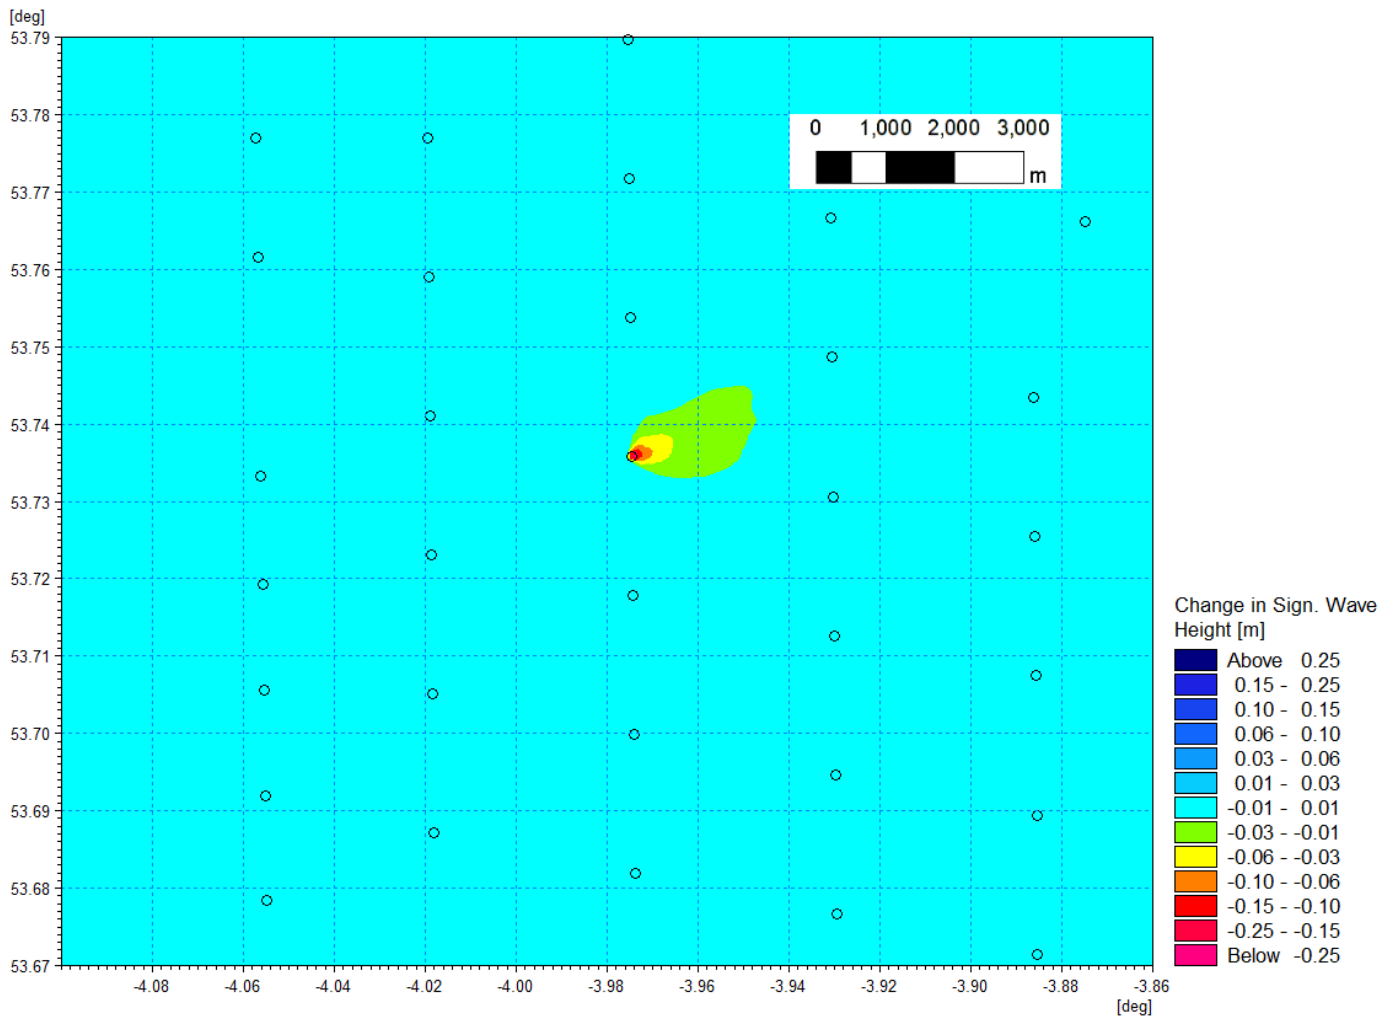


Figure 1.213: Change in wave climate 1 in 20 year storm 240° MHW (post-construction minus baseline) - rectangular gravity base foundation.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

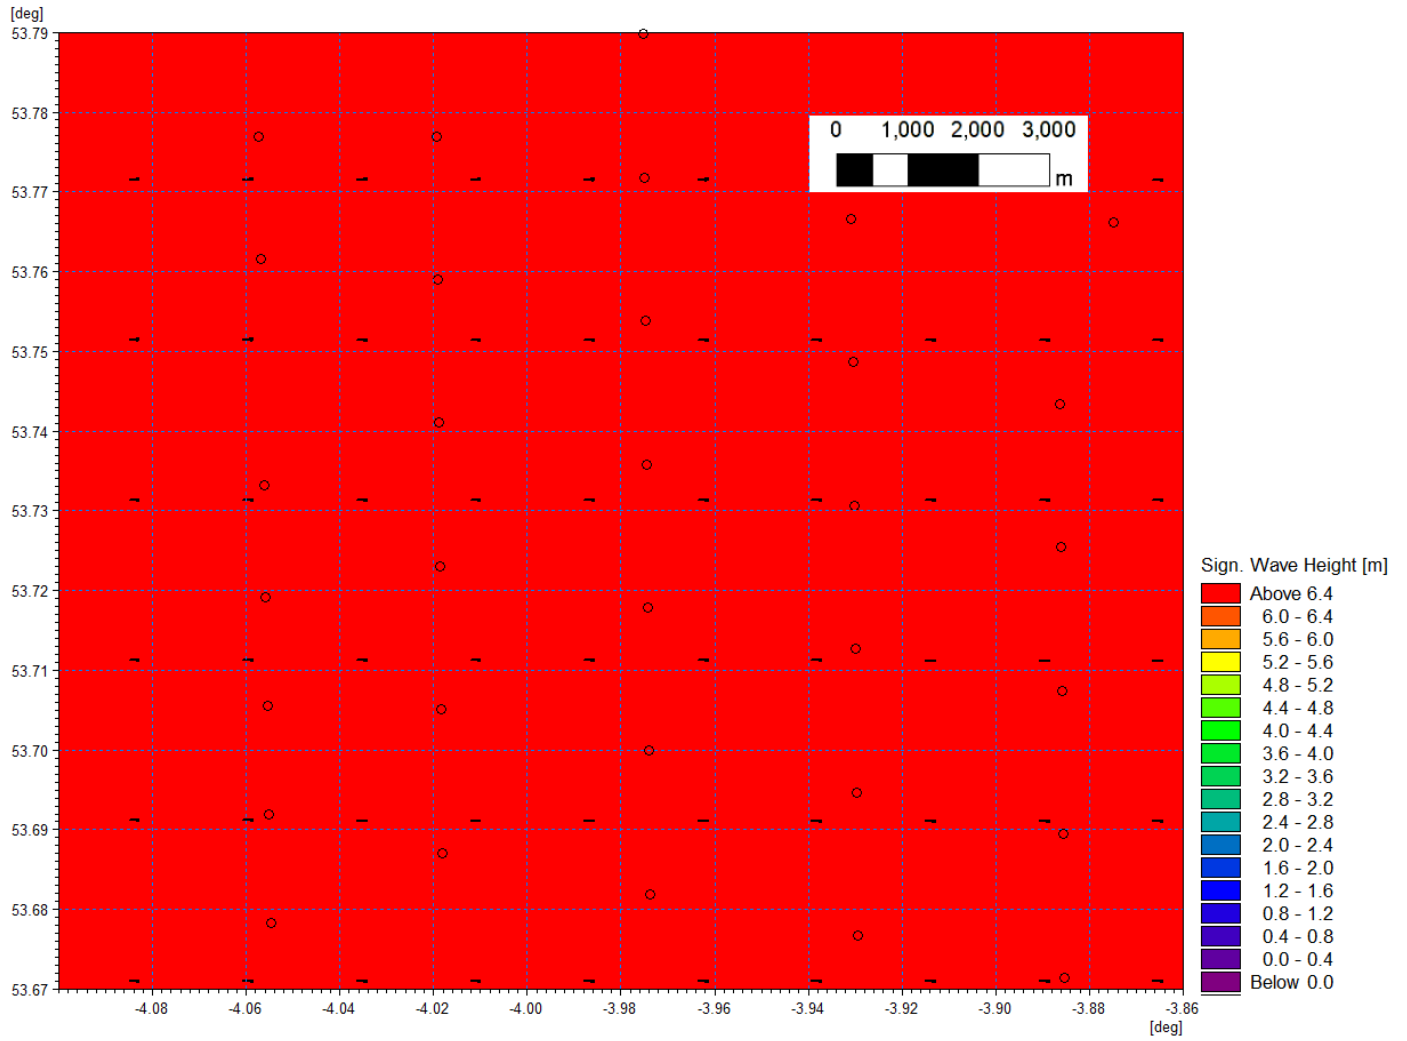


Figure 1.214: Baseline wave climate 1 in 20 year storm 270° MHW.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

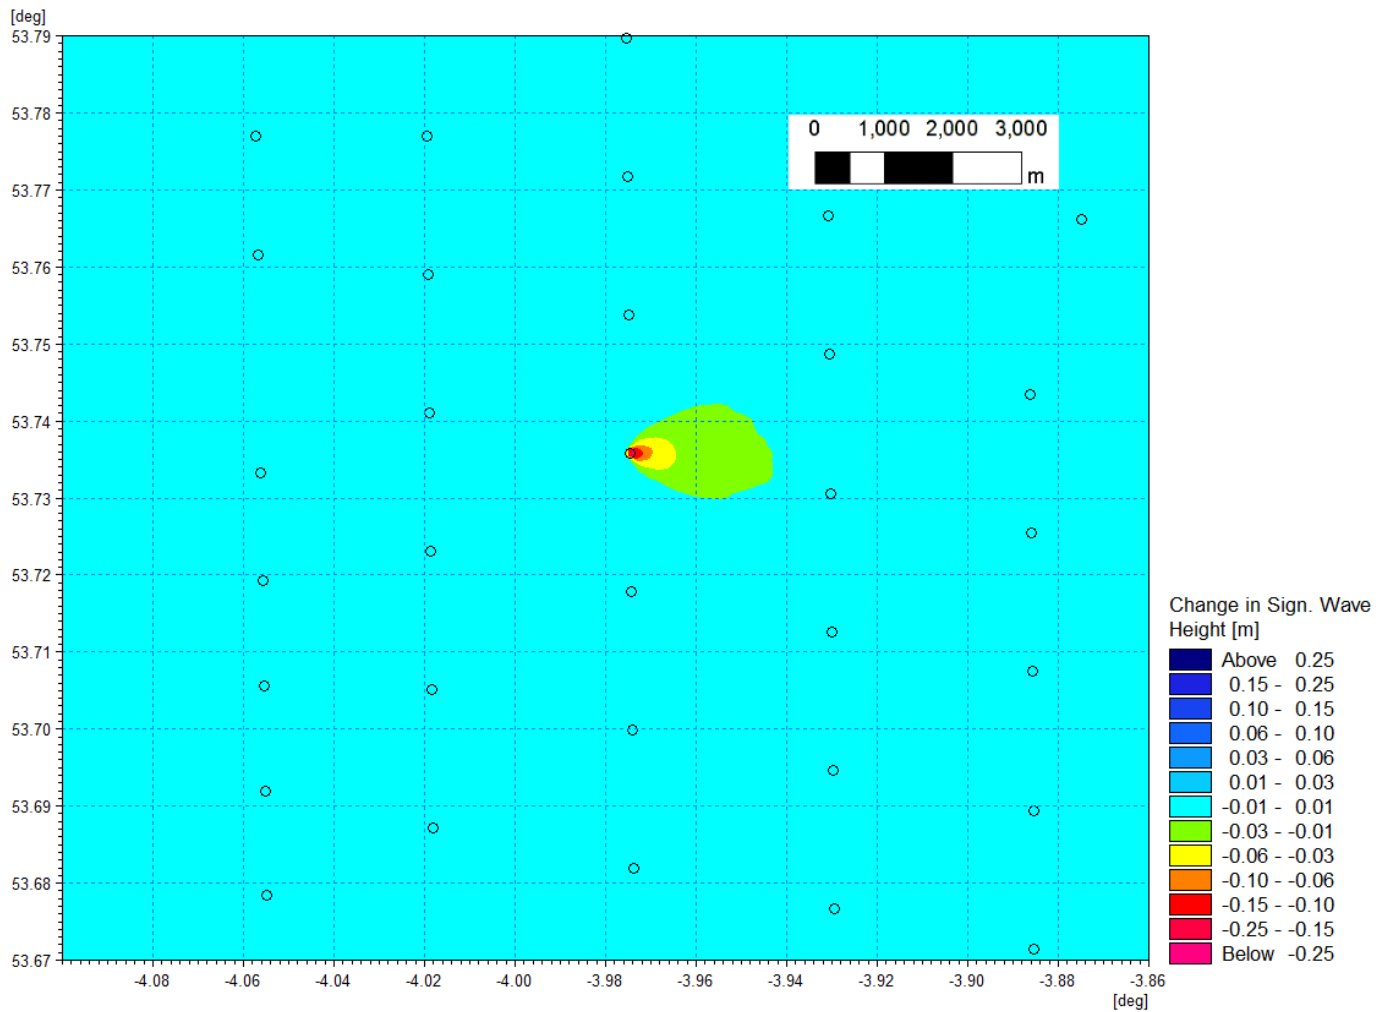


Figure 1.215: Change in wave climate 1 in 20 year storm 270° MHW (post-construction minus baseline) - rectangular gravity base foundation.

1.5 Summary

- 1.5.1.1 A numerical modelling study was undertaken to inform and quantify the potential impacts of the Morgan Generation Assets on physical processes. This report contains modelling undertaken for the PEIR stage of the application, which is considered to provide suitable supporting information for the assessment. There are limited changes from the Morgan Potential Array Area to the project description presented in the Environmental Statement, however the modelling undertaken extends beyond the Morgan Array Area and therefore provides both a precautionary and robust study which quantifies the magnitude and extent of potential impacts. Additionally, sensitivity modelling carried out to review alternative foundation types is also presented to provide information to the Environmental Statement. Thus, the report is formed of two main sections, the first of which utilises boundaries and parameters presented within the PEIR and the second which is based on the project description provided in the Environmental Statement.
- 1.5.1.2 This report has outlined the baseline characteristics of the region in terms of physical processes. This includes tidal current, wave climate and sediment transport under both calm and storm conditions. Numerical modelling has been used to quantify the changes in physical processes due to the installation of the Morgan Generation Assets, as presented in the PEIR. The presence of the wind turbine foundations redirects both waves and tidal flow and although some changes in sediment transport were revealed, these were limited in magnitude and represented an adjustment in the transport path alignment. These changes were seen to be inconsequential in terms of physical processes.
- 1.5.1.3 The installation of the Morgan Generation Assets as presented within the PEIR was seen to marginally reduce wave heights in the lee of the structures whilst a marginal increase was noted at the periphery, however during larger storm events these effects were less marked. Any significant changes in tidal currents and wave climate would not extend to the coastline and there would be no change in coastal processes in this area.
- 1.5.1.4 Suspended sediment plumes for construction activities were quantified. In all cases, the material released was native to the bed sediments and, although there are periods of increased turbidity, the material was retained in the sediment cell and would be subsequently assimilated into the existing sediment transport regime.
- 1.5.1.5 Finally, representative sensitivity modelling undertaken within the Mona Array Area is presented and applied to the Morgan Generation Assets. It compares the influence of foundation type on tidal flow and wave climate, in line with the project description presented in Volume 1, Chapter 3: Project description of the Environmental Statement. Both suction bucket and conical gravity base foundations were found to have little influence on baseline tides and wave patterns. The much larger single OSP with a rectangular gravity base was seen to induce the greatest change in baseline conditions, however, even these would be confined within the Morgan Array Area extending, at the furthest, to adjacent wind turbine structures and would be marginal in terms of physical processes.
- 1.5.1.6 Overall, the modelling study has quantified the magnitude and extent of potential impacts covering the range of both infrastructure and engineering operations across all the physical processes parameters. It therefore provides a robust modelling study to underpin the Environmental Statement.

1.6 References

ABPmer (2008) WebVision Atlas of UK Marine Renewable Energy Resources. Available: [REDACTED] Accessed June 2022.

ABPmer (2018) Data Explorer. Available: [REDACTED]/. Accessed June 2022.

BERR (2008) Review of Cabling Techniques and Environmental Effects applicable to the Offshore Windfarm Industry. Technical Report, Department for Business Enterprise and Regulatory Reform (BERR), in association with Defra, 164pp.

bp/EnBW (2023) Geological Ground Model Morgan Windfarm Development Irish Sea.

British Geological Survey (2022) Sediment sample data. Available: [REDACTED]. Accessed May 2022.

British Oceanographic Data Centre (BODC) (2021) UK tide gauge network. Available at: [REDACTED] Accessed 24 June 2022.

Centre for Environment, Fisheries and Aquaculture Science (Cefas) (2016) Suspended Sediment Climatologies around the UK, CEFAS.

Centre for Environment, Fisheries and Aquaculture Science (Cefas) (2022) Wave data. Available: [REDACTED] Accessed June 2022.

Department for Environment Food and Rural Affairs (2022). Bathymetry and SSSI information. Available:

<https://environment.data.gov.uk/searchresults?query=Bathymetry&searchtype=All&organisation=All&orderby=Relevancy&pagesize=20&page=1>. Accessed 20 March 2024.

European Centre for Medium-range Weather Forecast (ECMWF) (2022) Long term wind and wave datasets. [REDACTED] June 2022.

EMODnet (2020) Bathymetry. Available: [REDACTED] Accessed May 2022.

EMODnet (2022b) EMODnet Geology. Available: [REDACTED] Accessed June 2022.

EMODnet (2022c) EMODnet Geology. [REDACTED] Accessed June 2022.

EMU (2013) Irish Sea Zone, Hydrodynamic measurement campaign October 2010- October 2012. Report issued to Centrica Energy Renewable Investments.

Folk, R.L. (1954) The distinction between grain size and mineral composition in sedimentary rock nomenclature. Journal of Geology 62 (4), 344-359.

Fugro (2022) Metocean Data Report, Morgan and Mona Offshore Wind Projects. Ref: 210674_190291-MDR-01 02.

Gardline Ltd (2022) Integrated Offshore Wind Farm Site Survey. Document number: 11602.

GEMS (2011) Metocean data collection, Ormonde wind farm project. Report prepared for: Offshore Design Engineering Ltd Document number: GSL10108-FIN-001-01.

Howarth M.J. (2005) Hydrography of the Irish Sea, SEA6 Technical Report, POL Internal document 174.

MORGAN OFFSHORE WIND PROJECT: GENERATION ASSETS

Integrated Mapping for the Sustainable Developments of Ireland's Marine Resource (INFOMAR) (2022) Seabed mapping data Geological Survey Ireland (GSI) and Marine Institute. Available at [REDACTED]. Accessed Feb 2022.

Marine Environmental Data Information Network (MEDIN) (2021) Bathymetry data. Available: [REDACTED]tal/apps/sites/#!/marine-data-portal. Accessed March 2021.

Mellet, C, Long, D, Carter, G, Chiverell, R and Van Landeghem, K. (2015) Geology of the seabed and shallow subsurface: The Irish Sea. British Geological Survey Commissioned Report, CR/15/057 52pp.

Mona Offshore Wind Limited (2023) Mona Offshore Wind Project. PEIR. Available at [REDACTED]. Accessed August 2023.

Mona Offshore Wind Limited (2024) Mona Offshore Wind Project. Environmental Statement Available at <https://infrastructure.planninginspectorate.gov.uk/projects/wales/mona-offshore-wind-farm/?ipcsection=docs>. Accessed March 2024.

Morgan Offshore Wind Limited (2023) Morgan Offshore Wind Project. PEIR. Available at [REDACTED]/. Accessed August 2023.

National Network of Regional Coastal Monitoring Programmes (2022) Metocean data. Available: [REDACTED]/. Accessed June 2022.

National Oceanic and Atmospheric Administration (NOAA) (2022) Metocean data. Available: [REDACTED]. Accessed April 2022.

Ocean Ecology (2023a) 11781 bp Mona Environmental Data.xlsx.

Ocean Ecology (2023b) 11781 bp Morgan & Morecambe Environmental Data.xlsx.

RPS (2018) Tide and Storm Surge Forecast (TSSF) model of Irish coastal waters.

The Environment Agency National LiDAR Programme (2022) LiDAR data. Available: <https://www.data.gov.uk/search?q=Lidar+data>. Accessed March 2024.

UKHO (2022) Admiralty Tide Tables – Volume 1B.

Whitehouse, R.J.S., Sutherland, J. and O'Brien, D. (2006) Seabed scour assessment for offshore windfarm. Proceedings Third International Conference on Scour and Erosion, November 1-3, CURNET, Gouda, The Netherland.

XOCEAN Ltd (2022) 00275-BPX-UKX-WIND bp Elizabeth Project Processing Report.