

# A47 Wansford to Sutton Dualling

**Scheme Number: TR010039**

**Volume 9**

## **9.32 Applicant's Response to the Examining Authority's Third Written Questions (ExQ3)**

Infrastructure Planning (Examination Procedure) Rules 2010  
Rule 8(1)(c)

Planning Act 2008

June 2022

Deadline 8

---

Infrastructure Planning

Planning Act 2008

**The Infrastructure Planning  
(Examination Procedure) Rules 2010**

A47 Wansford to Sutton  
Development Consent Order 202[x]

---

**9.32 APPLICANT'S RESPONSE TO THE EXAMINING  
AUTHORITY'S THIRD WRITTEN QUESTIONS (EXQ3)**

---

<b>Rule Number</b>	Rule 8(1)(c)
<b>Planning Inspectorate Scheme Reference</b>	TR010039
<b>Application Document Reference</b>	TR010039/EXAM/9.32
<b>BIM Document Reference</b>	PCF STAGE 4
<b>Author</b>	A47 Wansford to Sutton Project Team, National Highways

<b>Version</b>	<b>Date</b>	<b>Status of Version</b>
Rev 0	June 2022	Deadline 8

## CONTENTS

<b>1</b>	<b>INTRODUCTION</b> .....	<b>1</b>
1.1	Purpose of this Document.....	1
<b>2</b>	<b>APPLICANT'S RESPONSE TO THE EXAMINING AUTHORITY'S ADDITIONAL QUESTIONS (EXA3)</b> .....	<b>2</b>

---

## **1 INTRODUCTION**

### **1.1 Purpose of this Document**

- 1.1.1 The Development Consent Order (DCO) application for the A47 Wansford to Sutton Scheme was submitted on 05 July 2021 and accepted for examination on 02 August 2021.
- 1.1.2 The purpose of this document is to set out National Highways' (the Applicant) response to the Examining Authority's Additional Questions (ExQ3), published on the 24 May 2022.



## 2 APPLICANT'S RESPONSE TO THE EXAMINING AUTHORITY'S THIRD WRITTEN QUESTIONS (EXQ3)

Question number	Question to	Question	Applicant's Response
<b>3.0 General Questions</b>			
3.0.1.	The Applicant	<p><b>Plans</b>            Could the Applicant please provide two plans. A plan showing the extent of the Application site, and a simple, schematic drawing of the proposals, both using an Ordnance Survey map as a base. These should be provided, each, on a single sheet, utilising either the 1:25 000 or 1:50 000 scale maps. The imperative is that they are on a single sheet</p>	These plans were provided at Deadline 7A ( <b>REP7a-007</b> )
<b>3.1. Air quality and emissions</b>			
3.1.1.	The Applicant	<p><b>Carbon emissions</b>            The Applicant is asked to clarify which of the various submissions in relation to carbon emissions it is relying upon.</p> <p>At present there have been the following (main) submissions:</p> <ul style="list-style-type: none"> <li>• Environmental Statement – Chapter 14 – Climate [APP-052]</li> <li>• The Case for the Scheme [AS-022]</li> <li>• Annex D of the Applicant's Response to the Examining Authority's First Written Questions (ExQ1) [REP2-036]</li> </ul> <p>If the Applicant considers that this would be best dealt with by setting out its case on this matter in a single location that is acceptable.</p>	<p>Each of the submissions set out in this question are necessary as they serve different purposes. It follows that each of the submissions is relied upon in respect of the relevant purpose. Given those separate purposes, the Applicant does not consider that a single summary document would necessarily be appropriate, but should the ExA consider such a document necessary it may be prepared. The summary reasons for each document are as follows:</p> <p>The Applicant has set out in ES Chapter 14 – Climate – the information that is required to be provided by the Infrastructure Planning (Environmental Impact Assessment) Regulations 2017 and the National Policy Statement for National Networks (December 2014) (NPS NN) so as to enable the identification and assessment of likely significant environmental effects for the DCO</p>



Question number	Question to	Question	Applicant's Response
			<p>application.</p> <p>Annex D of the Applicant's Response to the Examining Authority's First Written Questions (EXQ1) [REP2-036] explains how the assessment presented in Chapter 14 meets the legal and policy requirements for the assessment of cumulative effects of greenhouse gases, confirms that the appropriate geographical scale of assessment of greenhouse gas emissions is national (as set out in Chapter 14), explains how the assessment complies with various carbon budgets and wider carbon policies, and explains how the assessment undertaken evaluates impacts, considers likely significant effects and complies with the Infrastructure Planning (Environmental Impact Assessment) Regulations 2017.</p> <p>The Case for the Scheme (AS-022) sets out the need for the Scheme and considers its conformity with planning policy and transport plans, including in respect of its effects in terms of climate.</p>
3.1.2	The Applicant Interested Parties	<p><b>Carbon emissions</b></p> <p>To ask the Applicant and Interested Parties to make any representations in respect of the Proposed Development that they consider appropriate and necessary in the light of the Secretary of State's conclusions in relation to carbon emissions as set out in the Decision Letters in respect of the M54/M6 Link Project, the M25 Junction 10/ A3 Wisley Interchange Project and the M25 Junction 28 Improvement Project.</p>	<p>The approach taken by the Secretary of State in considering climate matters at:</p> <ul style="list-style-type: none"> <li>(a) paragraphs 22 – 54 of the decision letter setting out the determination of the application for the M54 – M6 DCO, which was made on 21 April 2022;</li> <li>(b) paragraphs 96 – 127 of the decision letter setting out the determination of the application for the M25 Junction 10/A3 Wisley Interchange DCO, which was made on 12 May 2022; and</li> <li>(c) paragraphs 71 – 100 of the decision letter setting</li> </ul>

Question number	Question to	Question	Applicant's Response
			<p>out the determination of the application for the M25 Junction 28 Improvement Project DCO, which was made on 16 May 2022;</p> <p>is in accordance with the requirements of the Planning Act 2008, section 104 and the advice in the NPS NN. In the documents referred to at 3.1.1 above, the Applicant provides the Examining Authority and the Secretary of State with all of the information needed to conclude that that the Proposed Development complies with the NPS NN, and will not lead to a breach of any international obligations that result from the Paris Agreement or Government's own policies and legislation relating to Net Zero.</p>
<b>3.2. Biodiversity, ecology, and natural environment (including Habitats Regulations Assessment (HRA))</b>			
3.2.1	NE	<p><b>Habitats Regulations Assessment</b>            Could Natural England confirm whether it is satisfied with the Applicant's response in the Report to Inform Habitats Regulations Assessment [REP5-010] relation to the question of the potential hydrological link between the Proposed Development and Rutland Water Special Protection Area and Ramsar site?</p>	
<b>3.3 Compulsory acquisition, temporary possession and other land or rights considerations</b>			
3.3.1	The Applicant	<p><b>CA and TP negotiations</b>            Can the Applicant please provide an update of the current situation of negotiations with affected landowners and occupiers over potential acquisition by agreement?</p>	<p>The Compulsory Acquisition Schedule (<b>TR010039/EXAM/9.9 Rev 5</b>) has been updated and provided at Deadline 8.</p>



Question number	Question to	Question	Applicant's Response
3.3.2	The Applicant	<p><b>Crown Land</b>            (a) Could the Applicant please provide the latest information in respect of the Crown land within the application site and whether the appropriate Crown authorities have given written consent under s135 of the PA2008.            (b) If so, could the Applicant please provide copies of those written consents.</p>	<p>(a) The Applicant is still waiting for Crown consent to be issued, and will provide copies of the consent to the Examination as soon as it is received.</p>
3.3.3	The Applicant	<p><b>Statutory undertakers</b>            Can the latest position of the current situation of negotiations with Statutory Undertakers be updated and in particular with regard to the protective provisions?</p>	<p>The latest position in respect of discussions with statutory undertakers is set out in the Statement of Commonality for the Statements of Common Ground (<b>TR010039/EXAM/8.1 Rev 4</b>).</p>
<b>3.4 Cultural heritage</b>			
3.4.1	The Applicant HMBCE	<p><b>Scheduled monument north of A47 (List entry 1006796)</b>            In the Minutes of the Meeting held on 15 June 2007 set out in Appendix O of the Scheme Assessment Report 2018 – Appendices Preferred Route Decision in relation to Option 3 [AS-031] in paragraph 7.0 it is stated that Option 3 was rejected because “we [the now Applicant] cannot demonstrate a wholly exceptional case for progressing with Option 3”. Option 3 being a route through the Scheduled Monument.             NPSNN paragraph 5.131 indicates that the “wholly exceptional” test applies when there would be</p>	<p>The Applicant has been unable to locate further contemporaneous documents from the 15 June 2007, or to speak to the relevant consultants who were involved in the decision. For that reason, the Applicant is unable to provide any further information as to the decision-making process in 2017, but is continuing to seek that information and will update the Examination as necessary if further information becomes available.             However, as has been set out in the Applicant's various responses to the Examination (including for example within ES Chapter 6 – Cultural Heritage (<b>REP2-010</b>), Applicant's Response to Written Representations (<b>REP3-026</b>) - response to REP2-071 part 3.1 and in the REP4-018</p>



Question number	Question to	Question	Applicant's Response
		<p>“substantial harm”, (this test does not apply to less than substantial harm) and it must therefore be assumed that this must have been the judgement in question. Reference ID 18a-018-20190723 of the PPG gives guidance on substantial harm and less than substantial harm.</p> <p>(a) Could the Applicant please set out precisely why it considered that Option 3 would lead to “substantial harm”. The minutes only state that this decision was based on the “risk that Historic England will object”, and the comment at 3.1 of the Applicant’s response to Written Representations [REP3-026] of “Bifurcation of the Scheduled Monument would result in substantial harm in either eventuality” is assertion as it does not explain why it considers substantial harm would be occasioned. The ExA would particularly appreciate documents dating contemporaneously (2017) with this decision.</p>	<p>Applicant's Written Summary of Oral Submissions at Hearings) and also by Historic England in Written Representation (<b>REP2-072</b>)), the factual position is that the direct disturbance and loss of a sizable proportion of the total site of the Scheduled Monument will cause harm to the Scheduled Monument, and the evidence before the Examination from the Applicant and HMBCE is that that harm is substantial harm – i.e. an impact which could cause harm to or loss of the significance of a heritage asset. It is very clear that earthworks, disturbance and operational impacts from a road traversing 4.865ha of a Scheduled Monument consisting of burial mounds could cause the complete loss of archaeological artifacts and thus the loss of the significance of the heritage asset. The harm is therefore substantial.</p> <p>In any event, the Applicant has also explained (see ES Chapter 6 Cultural Heritage, section 6.3 Legislation and policy framework (<b>REP2-010</b>)) that there is a statutory bar which prevents construction through the Scheduled Monument, and HMBCE have confirmed that position. The Applicant submits on that basis that an analysis of optionality in 2017 is perhaps a less important issue in circumstances where whatever the 2017 position, the present position is that Option 3 would be contrary to statute.</p>
		<p>(b) Could HMBCE please provide its assessment in relation to route Option 3 (ie through the Scheduled Monument) in terms of whether this would result in substantial harm, less than substantial harm (quantifying if necessary), or preserve, providing</p>	



Question number	Question to	Question	Applicant's Response
		justification for its conclusion?	
3.4.2	PCC	<p><b>Thornhaugh Conservation Area Appraisal</b> The version of the Thornhaugh Conservation Area Appraisal – Report and Management Plan provided [REP2-065] is dated October 2018 and is marked “Draft for Consultation”. Could PCC confirm whether this has been taken through to adoption and, if so, provide the adopted version and the date of such adoption?</p>	
3.4.3	The Applicant	<p><b>Wansford Road Railway Station</b> In the draft SoCG with Sutton Parish Council in the Matters not Agreed between the Parties at Ref No 2 is stated: “The NH Project Director gave a long awaited explanation on 13/05/2022 as to the reasoning why a proposal for the building put forward by a resident of Sutton was rejected in favour of that put forward by Nene Valley Railway.” While appreciating that this relates to a matter of Designated Funds rather than being part of the Proposed Development, the ExA would appreciate being appraised of this explanation. This should include reasoning for the decision.</p>	<p>The Applicant can confirm that the Nene Valley Railway is the chosen party to take forward the relocation of the Old Station House building following assessment and appraisal of both proposals by a tri-party group made up of Historic England, Peterborough City Council and National Highways. This panel considered multiple aspects including public benefit, environment, cultural heritage etc in making an informed decisions based upon the proposals submitted at the point in time with both parties having been given the opportunity to submit their strongest proposal in advance of the meeting. Funding for the relocation has recently been approved as part of the National Highways Designated Funds programme. Nene Valley Railway was taken forwards as the proposed party as it is believed that the Nene Valley Railway proposal would provide a wider public benefit and would therefore be a better use of public funds, utilising the materials to create a new ticket office at the Fairy Meadows Station, keeping the Old Station House in line with its original use. Following on from this decision, National Highways are in discussion with Sutton Parish Council regarding them submitting a further proposal to the</p>



Question number	Question to	Question	Applicant's Response
			<p>Designated Funds programme for a community hub to be built.</p> <p>The Designated Funds process is totally separate and standalone process from the A47 Wansford to Sutton Scheme with proposals having to be put forwards and progressed to secure funding providing they meet certain criteria. The DCO for the A47 Wansford to Sutton Scheme is predicated on the demolition of Old Station House and Designated Funds has been pursued to explore the opportunity of keeping the building in some form. The project team views the successful Designated Funds bid as a positive outcome.</p>
<b>3.5 Cumulative and cross-cutting effects</b>			
3.5.1		The ExA has no cumulative and cross-cutting questions at this point in the Examination	
<b>3.6 Draft Development Consent Order (DCO) [REP5-005/REP5-006]</b>			
3.6.1	The Applicant	<p><b>Article 7 – Planning permission</b>            Could the Applicant please explain why this particular provision is necessary? The response should not just cite 'precedent' but should fully set out the Applicant's case. It may be useful to set out a scenario where, without the benefit of the provision, there would be difficulties in implementation were the DCO to be granted.</p>	<p>The DCO process provides for two types of development to be consented: the Nationally Significant Infrastructure Project itself, which can only be consented by way of a DCO, and associated development required to support the construction or operation of the principal development, or to mitigate its impacts. It is possible for works of associated development to be consented through alternative regimes such as the Town and Country Planning Act 1990. If planning permission for such associated development is obtained, then compliance with that planning permission is not taken to be a breach of the terms of the DCO.</p>



Question number	Question to	Question	Applicant's Response
			<p>The Applicant believes it is necessary to include this provision to ensure that it is clear that where the Applicant needs to obtain any other planning permission relating to the project, the implementation of that planning permission would not constitute a breach of the terms of this Order. Without this article, the implementation of the Scheme may be prejudiced where detailed design requires a slightly different form of associated development which could delay or increase the cost of implementing the Scheme if the article was absent from the DCO. The Secretary of State has also approved the article in the latest highway DCO made: namely, the M25/J8 DCO made on 16 May 2022 which post-dates the M54/M6 DCO where it is acknowledged this article does not appear. This article has also become standard for other recently consented DCOs (see, for example, article 8 of the Tees Combined Cycle Power Plant Order 2019, article 11 of the M42 Junction 6 Development Consent Order 2020, article 40 of the Southampton to London Pipeline Development Consent Order 2020) and article 6 of the M25 Junction 28 DCO.</p>
3.6.2	The Applicant	<p><b>Article 10 – Consent in transfer benefit of Order</b>            Could the Applicant please respond to the SoS's decision in the M25 Junction 28 Improvement Project to add a provision (in that case as Article 9(4)) to make it explicit that the undertaker alone is liable for any compensation payable pursuant to this provision</p>	<p>In line with the SoS's decision in the M25 Junction 28 DCO, Article 9(4) of that Order has now been included in the Wansford dDCO as Article 10(4).</p>

Question number	Question to	Question	Applicant's Response
3.6.3	The Applicant	<p><b>Article 11 – Application of the 1991 Act</b>            Could the Applicant please respond to the SoS's decision in the M25 Junction 28 Improvement Project to amend the provision (in that case as Article 10) to make it consistent with other highway DCOs. The ExA notes that the provision in the dDCO in this case is somewhat different to that made.</p>	<p>The main difference between Article 11 of the Wansford dDCO and Article 10 of the M25 Junction 28 DCO is that the Wansford dDCO does not require references to a permit scheme. For this reason, the words '(including any equivalent or modified provisions in any permit scheme)' are omitted from sub-paragraph 11(3) of the Wansford dDCO. Sub-paragraphs 10(8), 10(9), and 10(10) of the M25 Junction 28 DCO – all of which relate to permit schemes and are therefore not relevant – have been deleted in their entirety. However, the Applicant has included article 10(11) from the M25 Junction 28 DCO in the Wansford dDCO at article 11(8).</p> <p>The Applicant notes that articles 11 and 16 of the Wansford dDCO submitted at Deadline 5 contain inconsistencies with regard to actions that may be required in relation to the use of streets. These inconsistencies have been corrected at Deadline 8 at paragraph 11(4), in the title of article 16 and at paragraph 16(2).</p> <p>In respect of article 11, sub-paragraph (7)(b), the wording differs from the equivalent provision in the M25 Junction 28 DCO in that the words 'means that' are included and the word 'not' is omitted. The intended meaning is that the undertaker is not to be taken as the street authority. The inclusion of 'means that' makes better grammatical sense and the deletion of 'not' avoids a double negative contrary to the intended meaning.</p>
3.6.4	The Applicant	<p><b>Article 16 – Temporary alteration, diversion prohibition and restriction of use of streets</b></p>	<p>The Applicant has noted that the title of, and provision contained within, Article 16 of the Wansford dDCO differs</p>



Question number	Question to	Question	Applicant's Response
		<p>Could the Applicant please respond to the SoS's decision in the M25 Junction 28 Improvement Project to amend the provision (in that case as Article 13) to make it consistent with other highway DCOs. The ExA notes that the provision in the dDCO in this case is somewhat different to that made and a different title has been used.</p>	<p>from Article 13 of the M25 Junction 28 DCO. The Applicant has amended the Wansford dDCO so that it is consistent with the title and provisions in other recent highway DCOs, specifically the M25 Junction 28 (Article 13), the A1 Birtley to Coal House (Article 15) and the M54/M6 (Article 12).</p>
3.6.5	The Applicant PCC EA Parish Councils	<p><b>Time limits for deemed consent</b> In the SoS's decision on the M25 Junction 28 Improvement Project he has extended both the period under which, in the absence of a response, a deemed consent is granted, and the period of consultation pursuant to Requirements.</p> <p>In this dDCO this relates to what would be Articles 16(6) (Temporary alteration, diversion prohibition and restriction of use of streets), 20(11) (Traffic Regulation) and 21(8) (Discharge of water) and Schedule 2, Regulation 18 (Details of Consultation).</p> <p>Could the Applicant, PCC, the EA and Parish Councils please give their responses to the SoS's decision.</p>	<p>In relation to Articles 16(6), 20(11) and 21(8), the Applicant proposes to retain the 28-day response window. The extension of this time frame for the M25 Junction 28 DCO was the result of unique resourcing pressures faced by the London Borough of Havering during the Covid 19 pandemic making the provision in respect of deemed consent exceptional, rather than standard practice. Prior to this, 28 days was – and, post-pandemic, now is again – the sufficient time period to which the Applicant considers it appropriate to return. The corresponding articles in the M54/M6 DCO all allow 28 days.</p> <p>In respect of the 10 business day consultation response window under Requirement 17 (previously Requirement 18) of the Wansford dDCO, the Applicant has amended the deemed consent period to 14 days (not business days) in line with the wording of Requirement 13(1) of the M54/M6 DCO. As explained in the paragraph above, the extension of the response window for the M25 Junction 28 DCO to 42 days was specific to the circumstances faced by the London Borough of Havering at the time. Since this was again an exception, rather than the rule, the Applicant proposes to retain the standard time frame for the Wansford DCO</p>



Question number	Question to	Question	Applicant's Response
3.6.6	The Applicant EA	<p><b>Potential Requirement regarding Flood Risk</b> Could the Applicant and EA provide their latest positions in respect of the need for an additional requirement relating to flood risk?</p>	<p>As requested by the EA, a new Requirement (no. 9) 'Flood compensatory storage' was added to the dDCO at Deadline 5. The Applicant and the EA are currently in the process of fine tuning the wording of 9(4). In all other respects, the text proposed at Deadline 5 is agreed.</p>
3.6.7	The Applicant	<p><b>Compulsory Acquisition Provisions</b> Could the Applicant respond to the SoS's changes in the made Development Consent Order for the M25 Junction 10/ A3 Wisley Interchange Project and the M25 Junction 28 Improvement Project in respect of the application of the Compulsory Purchase (Vesting Declarations) Act 1981 and the Compulsory Purchase of Land (Vesting Declarations) (England) Regulations 2017. The ExA notes that the provision in the dDCO in this case is somewhat different to that made.</p>	<p>The SoS addressed draft articles 29(4), 29(10) to (12) and article 30 (modification of the 2017 Regulations) in the M25 Junction 10/A3 Wisley Interchange Project Decision Letter and these provisions were subsequently removed from the final order. A similar approach was taken for the M25 Junction 28 Improvement Project and several sub-paragraphs of article 31 as well as article 32 in its entirety were removed from the final as made order.</p> <p>The Applicant has not included any wording in its dDCO for this project which mirrors those provisions that were removed by the SoS for M25/J28 and M25/J10. On the basis the wording that was retained in articles 29 and 31, in the final as made orders for the M25 Junction 10/A3 Wisley Interchange Project and the M25 Junction 28 Improvement Project respectively, is almost identical to the wording proposed in article 31 of the A47 Wansford dDCO, the Applicant considers that the two SoS decisions referred to provide robust justification for the inclusion of the drafting proposed by the Applicant in this Application.</p>
3.6.8	The Applicant Anglian Water	<p><b>Protective provisions</b> The Applicant and Anglian Water are asked for their comments in relation to their respective positions in relation to Protective Provisions in light of the</p>	<p>The common issue between the Scheme and the M54/M6 Link is described by the Applicant as "deferral of renewal".</p>



Question number	Question to	Question	Applicant's Response
		<p>conclusions on similar matters set out in paragraphs 17.5.27 to 17.5.46 of the ExA's Report in relation to the M54/ M6 Link. As these matters were agreed by the parties subsequent to the close of that Examination the SoS did not need to conclude on them.</p> <p>The ExA appreciates that some matters here are different from those in dispute in the M54/ M6 Link Project, but there are similarities.</p> <p>The ExA would particularly like to receive representations on the 7 year 6 months period in relation to the financial benefit, given the life-time of water apparatus which can be intimated from the table set out after paragraph 2(g) in the Applicant's Response to the Anglian Water Protective provisions set out in Annex A of the Applicant's Response to the Examining Authority's Further Written Questions (ExQ2) – Annexes [REP5-023].</p>	<p>As a general observation, paragraphs 17.5.27 to 17.5.46 of the ExA's Report in relation to the M54/ M6 Link range over a number of matters which are not disputed between the Applicant and Anglian Water. The Applicant does not understand the ExA to be suggesting that it should respond on those matters.</p> <p>That being the case, the only relevant paragraph of the ExA's Report in relation to the M54/ M6 Link would appear to be paragraph 17.5.40. In that paragraph the ExA concluded that the deferment of renewal provisions should not be included because "there is no information in front of us as to the length of the 'life cycle' of Cadent's equipment".</p> <p>As the ExA points out, the Applicant has set out its detailed arguments in relation to deferment of renewal (ie in Applicant's Response to the Anglian Water Protective provisions set out in Annex A of the Applicant's Response to the Examining Authority's Further Written Questions (ExQ2) – Annexes (<b>REP5-023</b>)). That response foreshadowed, but contains in their entirety the substantive arguments contained in, the draft Statement of Common Ground between the parties.</p> <p>The Applicant does not intend to repeat in full those arguments, however in summary:</p> <ol style="list-style-type: none"> <li>1. Deferment of renewal provisions are generally accepted by statutory undertakers and are contained in protective provisions in numerous</li> </ol>



Question number	Question to	Question	Applicant's Response
			<p>schedules.</p> <ol style="list-style-type: none"> <li>2. They have firm roots in primary legislation.</li> <li>3. The methodology is well understood by statutory undertakers in is the subject of the Highway Authorities and Utilities Committee (HAUC) Code of Practice and online calculator, which sets out the rates which would apply.</li> </ol> <p>It would not appear that these arguments were before the ExA for the M54/ M6 Link when they wrote paragraph 17.5.40 of their report. In particular it is clear that the ExA in that application was not aware of the HAUC Code of Practice or the approved rates. The ExA's reasoning in paragraph 17.5.40 is not applicable to the Wansford Scheme given the explanation provided by the Applicant.</p> <p>The Applicant would also point out that the deferment of renewal provisions were ultimately accepted by Cadent and are contained in paragraph 27(5) of Schedule 9 of the M54/ M6 Link DCO.</p>
3.6.9	The Applicant Anglian Water	<p><b>Protective provisions</b> In Annex A of the Applicant's Response to the Examining Authority's Further Written Questions (ExQ2) – Annexes [REP5-023] the Applicant sets out why it considers that the Anglian Water's Inflow system would not be suitable for this project.</p> <p>The Applicant has set out four main points (although the last is a complaint about the system rather than a point). The ExA does not know this system, and</p>	<p>The Applicant has met with Anglian Water understands that there is agreement in principle between the parties in relation to the omission of the requirement to use the Inflow System, however it will take a short while to work out the detail and to document this position. If agreement can be reached then this issue would fall away. If not then the Applicant will provide a full answer to this question at the next deadline</p>



Question number	Question to	Question	Applicant's Response
		<p>therefore requests further information in response to the individual objections:</p> <ul style="list-style-type: none"> <li>a) Why could not a project login be utilised rather than an individual login?</li> <li>b) Could the individual elements of the overall project be sub-divided to make them compatible with Inflow, and if not, why not?</li> <li>c) Does the Inflow system have the ability to 'save' information submitted to a point, and then re-commencing inputting at that point?</li> <li>d) Why is a requirement to submit information sequentially not suitable - a detailed response, rather than "that does not reflect how the Applicant works or is able to work" (see paragraph under the bullets) is required?</li> <li>e) Could the Applicant explain why it is unable to obtain a corporate card to allow for payments to be made in this form?</li> </ul> <p>The Applicant is given the opportunity to set out why it does not consider the Inflow system is suitable for this project.</p>	
<b>3.7 Geology and Soils</b>			
3.7.1		The ExA has no geology and soils questions at this point in the Examination	
<b>3.8 Landscape and visual</b>			
3.8.1		The ExA has no landscape and visual questions at this point in the Examination.	
<b>3.9 Noise and vibration</b>			

Question number	Question to	Question	Applicant's Response
3.9.1		The ExA has no noise and vibration questions at this point in the Examination.	
<b>3.10 Socio-economic effects</b>			
3.10.1		The ExA has no socio-economic questions at this point in the Examination	
<b>3.11 Traffic and transport</b>			
3.11.1	The Applicant	<p><b>Wansford West Roundabout</b>            In its response at the bottom of page 18 of the Applicant's Further Response to Actions from Hearings [REP5-020] the Applicant makes reference to the differences between roundabouts and signalised junctions. This is not what the ExA was asking about. Rather he was asking about the capacity and safety aspects of signal controlled roundabouts, or at least partially signally controlled roundabouts (as the Wansford east roundabout is at present), when compared with non-signal controlled (ie conventional) roundabouts.</p> <p>Does the Applicant have any information on this?            For this reason, the Western Roundabout Traffic Option Assessment Technical Note (Annex E of the Applicant's Response to the Examining Authority's Further Written Questions (ExQ2) – Annex E [REP5-023], while of interest, is not directly relevant.</p>	<p>Please refer to the Department for Transport Local Transport Note 1/09 (April 2009) 'Signal Controlled Roundabouts' (provided as Annex A to this document).</p> <p>This note discourages the use of part-time signals at roundabouts as there is sufficient doubt over the potential safety problems associated with them (ref 4.4).</p> <p>As explained in the note, full-time signalisation at roundabouts can provide benefits with regards to the capacity and safety aspects in many circumstances.</p> <p>However, the roundabout geometry must be designed to accommodate signalisation, with particular regards to the approaches and circulatory storage / stacking capacity.</p> <p>Unfortunately, the ability to enlarge or change the geometry and layout of the Wansford Western roundabout is restricted due to existing land constraints.</p> <p>The ability to provide sufficient circulatory storage on the Wansford roundabout is therefore not possible.</p> <p>In section 3.1.2 the note also confirms that smaller roundabouts are not suitable for signalisation, although</p>



Question number	Question to	Question	Applicant's Response
			<p>'successful designs have been prepared for normal roundabouts with inscribed circle diameters as small as 50 metres'.</p> <p>The existing ICD (inscribed circle diameter) of the Wansford Western roundabout is approximately 45m.</p>
3.11.2	The Applicant	<p><b>Wansford West Roundabout</b>            The layout shown as "Design Fix B Layout" at Appendix A of Annex H: Wansford Western Roundabout – Safety Assessment" (the Safety Assessment) in the Applicant's Response to the Examining Authority's Further Written Questions (ExQ2) – Annexes [REP5-021] is different from that forming the Proposed Development.</p> <p>In its response to RR [REP1-010] Common Response D the Applicant indicates "Consideration was given to widening the northbound off slip from the A1 to two lanes to reduce queue lengths at this location. However, a review of this proposal by the Operational Road Safety team highlighted a greater level of risk for the Old North Road junction users who would be required to cross an additional lane of traffic". This is quoted in ExQ2.11.4 [PD-010].</p> <p>However, the conclusions set out in the Safety Assessment was that the risk assessment considered them to be "Broadly Acceptable", but that "the safety objectives for the activity are deemed to be acceptable by the removal of the medium level risk and the cumulative risk values for all hazards</p>	<p>The development of the Scheme design is described in the Scheme Design Report (<b>AS-025</b>). Improvements to the A1 northbound off slip road formed part of the 2020 design, as described in section 4.3.7. However, as then explained in section 4.4.2, these improvements provided limited benefits to the scheme. This was mainly due to the relatively low volumes of traffic that travel from the A1 north to the A47 east. (The majority of traffic would have used Junction 17 of the A1(M) (Fletton Parkway Interchange) to travel in that direction.). The improvements were therefore removed from this scheme, as stated in section 4.4.3.</p> <p>The "Wansford Western Roundabout – Safety Assessment" as shown in Annex H (<b>REP5-021</b>) was undertaken in September 2020. This was based on the Scheme design at that time, i.e. the 2020 design, as per the Design Fix B Layout in that document.</p> <p>This safety assessment in 2020 was undertaken on the full extent of these improvements at the time. Whilst these improvements are no longer proposed as part of the Scheme (as described above), with particular reference to the Old North Road / A1 slip road junction, the assessment did indicate a higher risk of junction collisions. Refer to</p>



Question number	Question to	Question	Applicant's Response
		<p>being no worse than the existing situation".</p> <p>Tables 3-7 and 3-8 in the Safety Assessment identify a single medium risk value for the existing layout and none for the proposed design (as shown in Appendix A).</p> <p>Given that the layout shown in Design Fix B is an improvement on both the current situation and the Proposed Development, could the Applicant please explain why it does not form part of the Proposed Development, particularly as the Common Response D would appear to be based on incorrect information.</p>	<p>Table 3-8 reference 2.4 which showed a risk value of 6 for the proposed design compared with a risk value of 3 for the existing design.</p> <p>Common Response D (<b>REP1-010</b>) covered traffic at Wansford roundabouts. This included a small section on Safety of the Old North Road / A1/A47 Slip Road junction, to address numerous Representations regarding the safety of this junction.</p> <p>The reference to the higher risk of junction collisions for the improvements at the Old North Road / A1 slip road junction in Common Response D (<b>REP1-010</b>) is therefore not based on incorrect information.</p> <p>Whilst the Applicant fully appreciates that the Wansford Western Roundabout – Safety Assessment" from September 2020 was based on a superseded iteration of the design, a copy was provided as requested in ExQ2.11.4.</p>
3.11.3	The Applicant	<p><b>Traffic Modelling</b>          Could the Applicant in respect of the VISSIM model, please confirm the following:</p> <p>There is zero traffic in the model at the start, then it 'runs' for 30 minutes to, effectively, populate the system, then there is a 1 hour period for analysis and, finally, a 30 minute emptying of the model to allow journeys to complete.</p> <p>a) If this is incorrect, could the Applicant please</p>	<p>This is correct. The response below is therefore relevant to b):</p> <p>The VISSIM model uses a 1 hour origin and destination matrix (this is a table of all movements for vehicles travelling from their origin to their destination). In order for the model to simulate a realistic level of traffic within the network at the start of the 1 hour peak period, it is common to use a 30 minute 'warm-up'. Similarly, after the end of the one hour peak period a 30-minute 'cool-down' is</p>



Question number	Question to	Question	Applicant's Response
		<p>explain why, and how I have misunderstood the model?</p> <p>b) If this is correct, could the Applicant please explain how the model deals with background traffic, in other words traffic that is effectively moving within the model area; for example, a commuter who lives and work within the area, but travels from one to the other?</p>	<p>allowed for the journeys to complete.</p> <p>For the 30 minute 'warm-up' preceding the peak hour, 30 minutes worth of traffic is assigned within the model. The model randomises the release of vehicles into the network over the course of the simulated period.</p> <p>All traffic entering the VISSIM study area are included in the modelled simulation. Any vehicles which are released towards the end of the 'warm-up' period will complete their journey during the peak hour. This entails that traffic will be in the network at the beginning of the peak hour. While vehicles released towards the end of the peak hour will complete their journey during the 'cool-down' period.</p> <p>Therefore, a vehicle movement which is contained entirely within the simulation area, will be released from its origin location at a randomised point during the modelled period. The vehicle will then follow its route through the network to its destination location using the best available route. Depending on the length of the journey (travel time and distance), and the journey's start time, the vehicle may not reach its destination within the peak hour. In this case the vehicle will complete the remaining length of its journey during the cool-down period.</p>
3.11.4	The Applicant	<p><b>Traffic Modelling</b></p> <p>The Sensitivity Test Technical Note (Annex C of Applicant's Further Response to Actions form Hearings – Annexes [REP5 021]) in Section 5</p>	<p>Firstly, it should be noted that the criteria for the flow calibration, set out in TAG unit M3.1, states that if either of the GEH or the TAG 'Flow' criterion are met the link or turn should be regarded as passing the acceptability criteria.</p>



Question number	Question to	Question	Applicant's Response
		<p>“Conclusions and Fitness for Purpose” reports against the TAG criterion. However, it does not conclude against the GEH criterion. It is noted that the analysis does not pass the GEH criterion for all analysis in Tables 3-7 to 3-9 and Tables 4-4 to 4-9.</p> <p>Could the Applicant please provide a commentary and conclusion in relation to the GEH criterion?</p>	<p>On this basis, inspection of Tables 3-7 to 3-9 and Tables 4-4 to 4-9 indicates that all counts pass the TAG criteria.</p> <p>Furthermore, TAG guidance requires that at least 85% of the counts pass either the GEH or the TAG ‘Flow’ criterion.</p> <p>In a relatively small number of cases, around 1 to 2 cases per table, the modelled flow is outside of the GEH less than 5 criterion (also referred to as the GEH 5 criterion). Overall, this is considered acceptable as the TAG ‘Flow’ criterion is met. It is noted that where low observed flows are recorded the GEH boundary is relatively more difficult to achieve than the TAG ‘Flow’ criterion.</p> <p>For instance, in the SATURN base year PM peak (Table 3-9) on Old Leicester Road the model achieves a GEH of approximately 6.5 in both directions which is slightly above the TAG GEH 5 criterion. However, where the observed flow is less than 700 vehicles/hour it passes the TAG ‘Flow’ criterion. Therefore, as one of the criteria is met then this is considered as a pass.</p> <p>In the AM peak SATURN base year model (Table 3-7), on Old Leicester Road in the southbound direction the modelled flow is outside of the GEH 5 boundary by 0.2. This only represents a flow difference marginally higher than the GEH 5 boundary, which is deemed to be acceptable as the model passes the TAG ‘Flow’ criterion.</p> <p>Similarly, in the VISSIM base year model, there are a small number of cases where the flow difference between</p>



Question number	Question to	Question	Applicant's Response
			<p>modelled and observed data sets is outside of GEH 5. However, these instances are principally where there is a low observed flow. For instance, in the VISSIM base year PM peak (Table 4-5) on Peterborough Road the model results show a GEH of approximately 8.0 in both directions. As detailed above, where the observed flow is less than 700 vehicles/hour it passes the TAG 'Flow' criterion. Therefore, as one of the criteria is met then this is considered as a pass.</p> <p>In conclusion, it is therefore considered that both the SATURN and VISSIM models show a good level of calibration and replicate the observed data within the village of Wansford. In the small number of cases where the GEH 5 criterion is not achieved, it is considered the model is acceptable based on the TAG 'Flow' criterion assessment as required by TAG unit M3.1.</p>
3.11.5	The Applicant	<p><b>NMU Route in southwest of Application site</b> In the Legal Note on Wansford Nene Way Permissive 1, the Applicant refers to Options 1a and 1b as shown on Drawing HE551494-GTY-HGN-000-DR-CH-38004. Could this drawing please be provided?</p>	This drawing has been provided as Annex B to this document.
<p><b>3.12 Water environment and flood risk</b></p>			
3.12.1	The Applicant EA PCC	<p><b>Peak rainfall allowances</b> Could the Applicant, EA and PCC please respond to the publication by the EA of updated guidance on peak rainfall allowances in 'Flood risk assessments: climate change allowances' which was published on 10 May 2022 in respect of any implications this may</p>	As the development lifetime of the Scheme is beyond 2100 the new NPPF guidance states that the development must be designed for the 1% annual exceedance probability event with the upper end climate change allowance for the 2070s epoch. Given the Scheme lies in the Nene Management Catchment the appropriate climate change



Question number	Question to	Question	Applicant's Response
		have for the consideration of the Proposed Development.	<p>allowance to apply is 40%.</p> <p>In line with DMRB standards, the proposed drainage design strategy (REP5-007; paragraph 4.1.6) states that the highway drainage is designed to attenuate a 1 in 100 year storm event with a 20% climate change allowance. The proposed attenuation basins are designed to attenuate up to a 1 in 100 year event with a 40% climate change allowance. Therefore, we consider that the revised peak rainfall intensity climate change allowances do not have any implications for the Scheme.</p>
3.12.2	EA	<p><b>Flood Compensation</b>            Could the EA please confirm it is content with the volume of 550m<sup>3</sup> for compensation works for loss of flood storage as set out in response to Action Point (AP) 12 in the Applicant's Comments on Deadline 4 Submissions [REP5-020]?</p>	

## **ANNEX A – DEPARTMENT FOR TRANSPORT LOCAL TRANSPORT NOTE 1/09 (APRIL 2009) ‘SIGNAL CONTROLLED ROUNDABOUTS’**



**Local Transport Note 1/09**

April 2009



# Signal Controlled Roundabouts



Local Transport Note 1/09

# Signal Controlled Roundabouts





Published by TSO (The Stationery Office) and available from:

**Online**

**Mail, Telephone, Fax & E-mail**

TSO  
PO Box 29, Norwich, NR3 1GN  
Telephone orders/General enquiries: 0870 600 5522  
Fax orders: 0870 600 5533  
E-mail: [customer.services@tso.co.uk](mailto:customer.services@tso.co.uk)  
Textphone 0870 240 3701

**TSO@Blackwell and other Accredited Agents**

**Customers can also order publications from:**

TSO Ireland  
16 Arthur Street, Belfast BT1 4GD  
Tel 028 9023 8451 Fax 028 9023 5401

**Acknowledgements**

The Department for Transport would like to acknowledge the valuable contributions of material, comments and advice from many individuals and organisations who have greatly assisted in the preparation of this Local Transport Note.

This Guidance Note was prepared by Mott MacDonald for the Department for Transport. The document is backed by research undertaken in the course of preparation, which is referred to in the text.

© Queen's Printer and Controller of Her Majesty's Stationery Office, 2009, except where otherwise stated

Copyright in the typographical arrangement rests with the Crown.

This publication, excluding logos, may be reproduced free of charge in any format or medium for non-commercial research, private study or for internal circulation within an organisation. This is subject to it being reproduced accurately and not used in a misleading context. The copyright source of the material must be acknowledged and the title of the publication specified.

For any other use of this material, apply for a Click-Use Licence at [www.opsi.gov.uk/click-use/index.htm](http://www.opsi.gov.uk/click-use/index.htm), or by writing to the Information Policy Team, Office of Public Sector Information, Kew, Richmond, Surrey TW9 4DU or e-mail [licensing@opsi.gsi.gov.uk](mailto:licensing@opsi.gsi.gov.uk).

This is a value added publication which falls outside the scope of the Public Sector Information Click-Use Licence.

ISBN 978 0 11 553054 8



Printed in Great Britain on paper containing at least 75 per cent recycled fibre

Cover photograph: Adrian Pingstone

# Contents

<b>1.</b>	<b>Introduction .....</b>	<b>5</b>
1.1	Purpose of the Local Transport Note.....	5
1.2	Scope .....	5
1.3	Other documents.....	5
1.4	Structure of the Local Transport Note .....	6
<b>2.</b>	<b>Overview .....</b>	<b>7</b>
2.1	History and development of signalised roundabouts in the UK .....	7
<b>3.</b>	<b>Reasons for use of signals at roundabouts .....</b>	<b>9</b>
3.1	General.....	9
3.2	Capacity .....	9
3.3	Delay .....	9
3.4	Safety .....	9
3.5	Major changes.....	10
3.6	Pedestrians/cyclists .....	10
<b>4.</b>	<b>Design considerations.....</b>	<b>11</b>
4.1	Preliminary work.....	11
4.2	Full or partial signalisation .....	14
4.3	Segregated left turns .....	14
4.4	Full or part-time signalling .....	15
4.5	Indirect control.....	16
4.6	Pedestrian/cyclist facilities .....	17
4.7	Signing and road markings.....	20



<b>5.</b>	<b>Assessment .....</b>	<b>26</b>
5.1	Introduction.....	26
5.2	TRANSYT .....	27
5.3	LinSig.....	27
5.4	Microsimulation.....	28
5.5	Other resources.....	29
<b>6.</b>	<b>Control strategies .....</b>	<b>30</b>
6.1	General.....	30
6.2	Vehicle Actuation (VA).....	30
6.3	Cableless linking (CLF) .....	30
6.4	Fixed-time UTC .....	31
6.5	SCOOT.....	31
6.6	MOVA .....	32
6.7	Linking to ramp metering .....	32
<b>7.</b>	<b>References .....</b>	<b>34</b>
	<b>Appendices .....</b>	<b>36</b>
	Appendix A Illustrative example.....	36
	Appendix B Background .....	43
	Appendix C Control strategies compared .....	46

# 1. Introduction

## 1.1 Purpose of the Local Transport Note

**1.1.1** The concept of a roundabout encompasses a wide range of junctions varying in size, complexity and traffic loading. When traffic signals are added, the number of design considerations increases enormously and no two signalised roundabouts will be identical.

**1.1.2** There can be no hard and fast rules to determine an optimum design, and it rests with the design engineers to use their skill to produce an effective and efficient working solution. The purpose of this Note is to assist the designer by identifying the issues that need to be addressed and providing guidance on how they can be dealt with.

No two roundabouts are the same – there are no ‘standard’ solutions.

## 1.2 Scope

**1.2.1** This Local Transport Note seeks to provide assistance to those involved in the design and operation of signalised roundabouts. This includes roundabouts to which signals have been added, as well as junctions designed as signalised roundabouts from the outset.

**1.2.2** The Local Transport Note does not deal specifically with urban gyratory systems (as opposed to large roundabouts). Such gyratory systems are characterised by being formed of one-way streets on an existing street network to create a circulating traffic system. There is normally activity within the area enclosed by the gyratory, leading to more complex signal staging and priorities. Roundabout regulations do not apply, and uncontrolled entries to a gyratory need to be considered and signed as normal priority junctions and not using roundabout signs and markings.

*Note: Photographs and examples are used to illustrate specific aspects of signalised roundabout design. They do not necessarily represent best practice in all respects and should not be used as models for implementation.*

## 1.3 Other documents

**1.3.1** This Local Transport Note must be read in conjunction with other standards, regulations, guidance and advice notes. The *Design Manual for Roads and Bridges* (DMRB) gives general advice on traffic signals in Volume 6 and on junction design (including roundabouts) in Volume 8.

These documents in DMRB are relevant:

- TA 78/97 *Design of Road Markings at Roundabouts* (HA, 1997);
- TA 81/99 *Coloured Surfacing in Road Layout (Excluding Traffic Calming)* (HA, 1999);
- TA 86/03 *Layout of Large Signal Controlled Junctions* (HA, 2003b);
- TA 84/06 *Code of Practice for Traffic Control and Information Systems for All-Purpose Roads* (HA, 2006b);
- TD 51/03 *Segregated Left Turn Lanes and Subsidiary Deflection Islands at Roundabouts* (HA, 2003a);
- TD 50/04 *The Geometric Layout of Signal-Controlled Junctions and Signalised Roundabouts* (HA, 2004);
- TD 35/06 *All-purpose Trunk Roads: MOVA System of Traffic Control at Signals* (HA, 2006a);
- TD 16/07 *Geometric Design of Roundabouts* (HA, 2007);
- TD 89/08 *Use of Passively Safe Signposts, Lighting Columns and Traffic Signal Posts* (HA, 2008a).



The following Department for Transport Traffic Advisory Leaflets (TALs) are also important sources of information:

- TAL 2/03 *Signal-control at Junctions on High-speed Roads* (DfT, 2003c);
- TAL 5/05 *Pedestrian Facilities at Signal-Controlled Junctions* (DfT, 2005);
- TAL 1/06 *General Principles of Traffic Control by Light Signals* (DfT, 2006).

## 1.4 Structure of the Local Transport Note

- Section 2 of this Note deals with the history and development of the use of signals at roundabouts and the safety aspects of this form of junction control.
- Section 3 considers the reasons why signalised roundabouts are used and provides guidance on whether this form of control is appropriate for a given scheme.
- Section 4 looks at the aspects which need to be considered when preparing the design of a signalised roundabout and provides guidance on the decisions to be made in drawing up a design.
- Section 5 reviews the various methods which can be used for the assessment of a signalised roundabout design and how these might be used to arrive at an optimised design for a given site.
- Section 6 compares the various control strategies for guidance on selecting the appropriate strategy for a given junction.
- Section 7 is a list of references to the documents quoted in this guide.
- Appendix A sets out the details of a real-life example to illustrate the development of a design for a signalised roundabout.
- Appendix B provides the background to the project of investigating the design of signalised roundabouts of which this guide is a part.
- Appendix C compares the different strategies for the control of signalised roundabouts.

# 2. Overview

## 2.1 History and development of signalised roundabouts in the UK

**2.1.1** Signalisation of roundabouts was first experimented with in 1959 in the UK to prevent circulating traffic from blocking entering traffic during peak periods. With the introduction of the offside-priority rule in roundabout operation in the mid-1960s, various operation and geometric layout improvements were implemented, usually aimed at smooth operation as well as improving the performance and capacity. Nevertheless, there were still problems arising from unbalanced entry flows, which in many cases resulted in long queues causing long delays and blocking back into preceding junctions.

**2.1.2** In more recent years, a number of studies have shown that the performance of some congested roundabouts can be improved with traffic signal control. Traffic signals installed on entry approaches and on the circulatory carriageway regulate the traffic flows rather than allowing certain movements to dominate under priority control. Signals are able to keep the circulatory traffic flow fluid and hence balance and improve the roundabout capacity. At motorway interchanges, signals tackle the problem of high circulatory speeds preventing the slip road traffic from joining the roundabout.

**2.1.3** There has been a rapid increase in the installation of signal controlled roundabouts in the UK since the early 1990s. A survey carried out by the County Surveyors' Society (CSS, 1997) collected information from 49 authorities on 161 signalised roundabouts concerning the reasons for signalisation and the type of control used.

**2.1.4** As part of the background research for this Local Transport Note, a new survey was carried out which gathered data from 47 authorities on 239 roundabouts. Additional information collected included the type of control and appraisal tools used. A comparison of the results from the two surveys is shown in Table 2.1.

Table 2.1 Comparison of surveys 1997/2006

Trends in signalisation of roundabouts	CSS 1997 (%)	2006 (%)
<b>Location</b>		
Urban (30 mph or 40 mph limit)	55	62
Rural (50 mph or greater limit)	45	38
<b>Reasons for signalisation</b>		
Queue control	70	80
Increased capacity	67	70
Accident reduction	30	72
UTC linkage	27	15
Pedestrians/cyclists	–	38
Other	24	–
<b>Type of control</b>		
Fully signalised	35	48
Pedestrian/cyclist facility	34	32
Full-time control	64	86
<b>Control strategy</b>		
SCOOT	–	15
MOVA	–	12
Linked MOVA	–	8
Fixed-time UTC	–	30
CLF	–	20
Linked VA	–	15
Total linked	66	88
<b>Appraisal tools</b>		
TRANSYT	–	83*
LinSig	–	33*
VISSIM	–	Low
Paramics	–	Low

\* Note: Some authorities use both packages



Trends revealed by the new survey include an increase in:

- the proportion of roundabouts that are fully signalised;
- the proportion of roundabouts under full-time control;
- the use of signalised roundabouts for accident reduction;
- the use of signalised roundabouts to assist pedestrians and cyclists.

**2.1.5** Full-time control is now widely accepted as the preferred control arrangement. The reasons for adopting full-time control include:

- the roundabout has a poor safety record;
- traffic flows are high throughout the day, rather than just limited to the peak traffic periods;
- significant numbers of cyclists;
- a requirement for pedestrian crossing facilities on the roundabout;
- a potential benefit from incorporation into a linked system.

## Accident reduction

---

**2.1.6** The increased proportion citing 'accident reduction' as a reason for full-time signal control could be a response to studies showing correlation between accident and part-time control and reduction in specific types of accidents at signalised junctions.

## Provision of pedestrian/cyclist facility

---

**2.1.7** The proportion of roundabouts having some formal pedestrian crossing was similar (32 per cent) to the figure (34 per cent) reported in the CSS report. This was surprising, as a higher proportion

of roundabouts are fully signalised, and a higher proportion of respondents (72 per cent) stated accident reduction as one of the reasons for signalising roundabouts. Furthermore, there is a higher proportion of signalised roundabouts in an urban location (62 per cent) and hence a need for such provisions.

## Control strategy

---

**2.1.8** The proportion of MOVA (12 per cent) and Linked MOVA (8 per cent) are still quite low, but these percentages will increase following the issuing of TD 35/06, *All-purpose Trunk Roads: MOVA System of Traffic Control at Signals* (HA, 2006a), which identifies MOVA as the standard control technique for Highways Agency (HA) all-purpose trunk roads (although there is more flexibility of choice of control strategies on other roads). The numbers of roundabouts under CLF and VA control can therefore be expected to decrease over time.

## Appraisal methods

---

**2.1.9** As expected, most authorities (83 per cent) were using TRANSYT and/or LINSIG (33 per cent), which are essential for the optimisation of signal timings. Uptake of microsimulation tools was low, but was not surprising, given that they are not essential for optimisation, require a more rigorous data set and, at the time, were less well established in use. VISSIM, Paramics and Aimsun are the most popular microsimulation tools used.

**2.1.10** Since the date of the second survey, new versions of both TRANSYT and LinSig have been released.

# 3. Reasons for use of signals at roundabouts

## 3.1 General

**3.1.1** In many cases, signals have been installed at existing roundabouts because of perceived operational problems. These can be summarised as aspects concerning delay, capacity, safety and convenience (specifically for pedestrians and cyclists).

**3.1.2** It should be noted that very small roundabouts (including mini and compact roundabouts as described in TD 16/07 *Geometric Design of Roundabouts* (HA, 2007)) are not suitable for signalisation, but successful designs have been prepared for normal roundabouts with inscribed circle diameters as small as 50 metres.

## 3.2 Capacity

**3.2.1** Lack of capacity on an entry is normally caused by either an imbalance of traffic flows or a continual flow of traffic on the circulating carriageway. Controlling traffic by signals can help the roundabout operate more freely and aid entry from approaches left uncontrolled by creating gaps. At the same time, geometric changes, including the provision of additional lanes on the entries, exits and circulating carriageway, can improve both operation and capacity when signal controlled.

## 3.3 Delay

**3.3.1** Delay on an individual entry is a direct consequence of lack of capacity, as described above. Using signals to balance incoming flows can reduce delays on some entries while increasing delays on others. However, by allowing the roundabout to operate more efficiently, with each lane on each entry and section of circulating carriageway being used to its full potential, signals can and do reduce overall delay to the whole roundabout when it is operating at high degrees of saturation.

## 3.4 Safety

**3.4.1** Uncontrolled roundabouts have a good overall safety record relative to other junction types. Even so, recent studies seem to show that, where the overall accident rate is relatively high (five or more personal injury accidents per year), the installation of traffic signals can in some instances reduce the accident rate.

**3.4.2** One form of accident that can be reduced by traffic signals is that caused by poor judgement of gaps by drivers entering a high-speed flow of circulating traffic.

**3.4.3** Another accident type that is characteristic of roundabouts is the rear-end collision between vehicles waiting to join the roundabout. This is related to the problem of the following driver having to assess gaps in the circulating flow while at the same time monitoring the movement of the vehicle in front. The geometry of roundabouts means that a wider angle of vision is involved than for drivers at a conventional T-junction. Signals can be expected to substantially reduce this type of accident.

**3.4.4** Signals can also regulate the speed of circulating traffic which can improve safety particularly for cyclists.

Signalised roundabouts can tackle a range of issues:

- capacity;
- delay;
- accidents;
- pedestrian/cyclist difficulties.



## 3.5 Major changes

**3.5.1** New developments might require additional accesses to be added to existing roundabouts. This might trigger the need to consider the addition of signals. Even where new accesses are not required, increased traffic from new developments or road schemes might require the consideration of installing signals at nearby roundabouts.

## 3.6 Pedestrians/cyclists

**3.6.1** Although beneficial in many ways, uncontrolled roundabouts can be difficult for pedestrians (and particularly difficult for disabled pedestrians). Two-wheeled vehicles (particularly pedal cycles) have an increased accident risk at some roundabouts. Evidence indicates that the introduction of traffic signals can reduce risks for two-wheeled vehicles. It also offers the possibility of providing controlled crossings for pedestrians and cyclists.

**3.6.2** When considering the needs of pedestrians and cyclists at an existing roundabout, due regard should be paid to the possibility of suppressed demand and potential desire lines. Current levels of cyclist and pedestrian movements and existing routes taken through the area might not reflect the true demand.

There are several published advice and guidance notes dealing with pedestrian needs, including the following:

- Disability Discrimination Act 1995;
- *Guidelines for Providing for Journeys on Foot* (IHT, 2000);
- LTN 1/95 (*The Assessment of Pedestrian Crossings*) (DETR, 1995a);
- LTN 2/95 (*The Design of Pedestrian Crossings*) (DETR, 1995b);
- LTN 1/04 (*Policy, Planning and Design for Walking and Cycling*) (DfT, 2004b);
- *Puffin Crossings – Good Practice Guide* (CSS, 2006);
- Traffic Signs Regulations and General Directions 2002;
- The Zebra, Pelican and Puffin Pedestrian Crossings Regulations and General Directions 1997.

**3.6.3** Where traffic signals are to be installed, it should be presumed that pedestrian facilities and appropriate provision for cyclists will be included, unless the area effectively rules out pedestrian and cyclist movements (e.g. a motorway interchange).

There are also several publications dealing specifically with cyclists, including:

- *Guidelines for Cycle Audit and Cycle Review* (IHT, 1998);
- *London Cycling Design Standards* (TfL, 2006);
- LTN 2/08 *Cycle Infrastructure Design* (DfT, 2008).

# 4. Design considerations

## 4.1 Preliminary work

### Basic data

---

**4.1.1** The initial step in the drawing up of a design for a signalised roundabout is the choice of appropriate layout. A minimum requirement is a full origin/destination flow matrix for each traffic situation, where the 'origin' of each vehicle is the entry point to the roundabout and the 'destination' is the exit point. Where a new roundabout is being designed and there is no 'existing' traffic to be surveyed, design flows for a new major road project or from a transport assessment in the case of a new development could be used.

**4.1.2** For pedestrians and cyclists, current flows are not necessarily the best assessment of need, as demand can be suppressed by the existing junction arrangements. It is important to assess the desire lines (and potential desire lines if new development is proposed) for pedestrian and cyclist movements.

**4.1.3** If there is a need to allow for growth in traffic over the life of the scheme, it is important to allow sufficient reserve capacity in the design. This could be done by using traffic flows scaled up by known traffic growth rates to a future design year, but in some congested urban areas growth might be constrained. Design years are typically 10 to 15 years into the future, depending on the design standard requirements of the highway authority.

**4.1.4** Alternative junction designs should be considered, including conventional traffic signals, uncontrolled roundabouts and, where justified by site considerations, traffic levels, mix and distribution, special layouts as described in TD 50/04 *The Geometric Layout of Signal-Controlled Junctions and Signalised Roundabouts* (HA, 2004). 'Signabouts', 'throughabouts' (also known as 'hamburger' junctions) and junctions with segregated turning movements or grade separation should also be considered.

**4.1.5** Where there is a dominant heavy flow through the junction, a throughabout might be considered, as it offers a direct route with potentially more capacity and less delay for these movements. The design process is essentially the same as for a conventional roundabout with the same requirements for modelling and assessment.

The quality of the final design is dependent on the quality of the data used.

### Lane flow diagrams

---

**4.1.6** Assessment tools such as TRANSYT and LinSig model traffic as a network of nodes joined by links carrying traffic. The signals at each node control the flow of traffic on these links. At simple junctions with traffic signals, a multilane approach can often be modelled, as a single link as traffic will distribute itself evenly between the available lanes. At signal-controlled roundabouts, the choice of lane, both on the approaches and on the circulatory carriageway, is dependent on the intended exit for an individual vehicle.

Lane flow diagrams are **ESSENTIAL**:

- each lane must be modelled separately;
- each movement must be assigned to appropriate lanes from entry to exit;
- optimising the use of lanes is the key to a successful design.



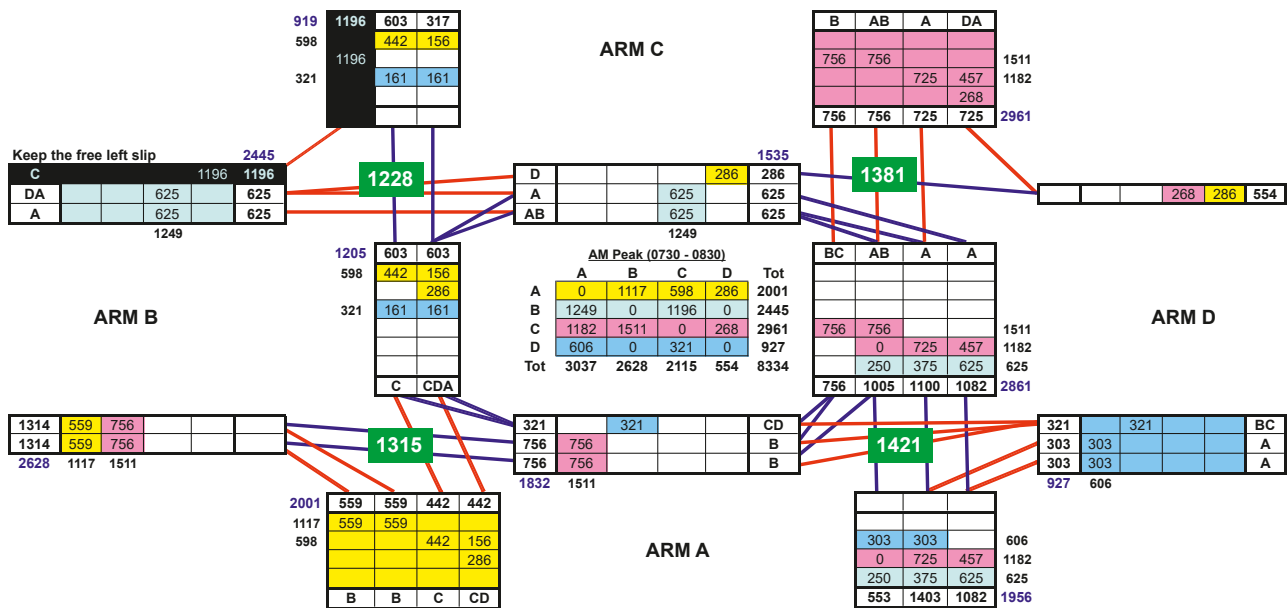


Figure 4.1 Lane flow diagram (note the origin/destination matrix in centre and the critical lane flow sums in green boxes)

**4.1.7** The distribution of traffic between lanes on a roundabout is best set out as a lane flow diagram. A typical lane flow diagram is illustrated in Figure 4.1. These diagrams indicate how traffic will distribute itself on the approaches and through the roundabout for a particular layout and lane direction markings. They can also provide an indication as to whether the proposed design results in a (within capacity) solution.

**4.1.8** Lane flow diagrams need to be prepared for each of the traffic situations being modelled. Where flow patterns vary widely at different times of day, the final lane designations chosen will have to be a compromise between the different requirements.

**4.1.9** Colour coding of the lane flow diagram (i.e. by traffic origin or destination) helps to interpret the diagram, and, in the case of TRANSYT, aids production of a correct link structure.

**4.1.10** If lane flow diagrams are not carefully prepared, geometric designs might be produced which assume a lane usage that is unattainable in practice. This might result in the outcomes predicted by the modelling process not being achieved.

**4.1.11** The lane markings themselves are an integral part of any preliminary design. During the development of the design, different lane markings can be appraised to see which one provides the best

balance of the flow between lanes. The lane markings will determine the connections between the boxes on the lane flow diagram which will need to be revised.

**4.1.12** At large roundabouts, for example where there are bridges over or under a motorway, some lane changing can take place to bring circulating lane flows more into balance. Additional connectors in the lane flow diagram are used to allow or indicate such movements in a way that should be transparent for checking purposes.

**Signalised roundabouts need different geometry from unsignalised ones.**

**4.1.13** Changes to the geometric layout can also be examined in lane flow diagrams. These can include additional lanes or converting a flared roundabout approach to a flared traffic signal approach. The term 'flare' refers to the local widening used on approaches. At unsignalised roundabouts the flare is created by the use of tapered lanes to provide additional width at the point of entry. At traffic signals the flare consists of a short length of full-width lane to provide a storage area leading to a wider stop line. This is the appropriate layout for a signalised roundabout which can require a change to the tapered flare when signals are added (Figure 4.2).

**4.1.14** Reducing the deflection on the approach that is normally provided at unsignalled roundabouts to reduce entry speeds can improve the visibility to the right for drivers entering the roundabout.

**4.1.15** The availability of land and the need to divert services need to be considered before deciding on changes to the physical layout.

**4.1.16** Any review of the physical layout of a roundabout before the installation of signals must take account of how and where the signals are to be positioned.

**4.1.17** Where a short length of additional lane is incorporated, it is important to ensure that it can be used efficiently. If a neighbouring lane is heavily used, the queue formed might prevent traffic entering the additional lane if it serves a different movement. Depending on the distribution of traffic movements, road markings can be used to provide the additional lane at the left or right, or even in the centre of the approach. Software is available to help assess the effectiveness of short lengths of extra lane.

**4.1.18** The possibility of leaving one or more of the entries uncontrolled can be considered at this stage. Fewer stop lines on the circulating carriageway can reduce the likelihood of queuing back which will prejudice the operation of the roundabout.

**4.1.19** Where design options are to be compared, the differing layouts can be drawn up so that the necessary data for the assessment process can be established. These will include link lengths, cruise times and intergreen times.

## Capacity check

**4.1.20** Individual signalised nodes on a roundabout will usually operate as simple two-stage signals. Once a draft lane flow diagram has been drawn up, a simple check will show if a node will have sufficient capacity. If the highest individual lane flow from each of the two stop lines (i.e. critical lanes) are added together, then a total less than about 1500 pcu/h would indicate that there is likely to be sufficient capacity. This is based



Figure 4.2 Full width 'flare' lane



on an assumed cycle time of 60 seconds, 5 second intergreens, a lane saturation flow of 1900 pch/h and a degree of saturation for the node of 90 per cent.

**4.1.21** If the sum of the critical lane flows is in excess of 1500 pcu/h, it will be necessary to adjust lane designations to distribute flow more evenly and/or to consider the provision of additional lanes. Alternatively, it might be possible to leave the entry unsignalised if it meets the necessary criteria (see appropriate section). For example, in Figure 4.1, all critical lane flow sums are below 1500 pcu/h, indicating that a working solution is possible.

**4.1.22** It should be noted that these estimates provide a rough guide only and are not an alternative to a proper design analysis.

## 4.2 Full or partial signalisation

**4.2.1** Partial control of a roundabout (signalisation of one or more, but not all, approaches) is often employed where delays do not occur on all arms. It can be a useful technique, as installing signals at a single entry is sometimes all that is necessary to solve a particular problem, such as queuing back on to a motorway.

**4.2.2** An entry should be considered for being left under priority control if safe operation with sufficient entry capacity could be achieved in this way and there is sufficient stacking room for gap takers at the next stop line in the circulating carriageway. When considering the options for control, if an entry is to be left uncontrolled, the effects of this on the rest of the roundabout and the needs of pedestrians and cyclists must be taken into consideration.

**4.2.3** There are distinct advantages for control of roundabouts with three controlled nodes. If the signals are set to give green to newly entered traffic at the first signalised node on the circulating carriageway, then few vehicles will be required to stop on the circulating carriageway. If, for example, one of four approaches can be left unsignalised, the advantages to the roundabout as a whole might outweigh any disadvantages due to lack of control on that arm.

Leaving an entry unsignalised might benefit the whole roundabout.

**4.2.4** Wherever possible, three-stage control at any of the nodes should be avoided because of the delay induced. Leaving an entry unsignalised can be a means for achieving this.

**4.2.5** Sometimes the signal control at an entry will produce natural gaps at the next entry, which will allow that entry to remain unsignalised. It is also possible to use queue detectors on an uncontrolled approach to increase intergreens or change stages at a preceding node on the circulating carriageway to produce gaps.

**4.2.6** Full signalisation can sometimes result in the signalised nodes being very close together, making co-ordination difficult with the very short links and restricted queuing space available.

**4.2.7** Where the roundabout is within a UTC system, the benefits of being able to co-ordinate the roundabout entries with nearby signalised junctions might outweigh the benefits in capacity and delay at the roundabout, which might be gained by leaving the roundabout partially signalised.

## 4.3 Segregated left turns

**4.3.1** Where a considerable volume of traffic on a signalised approach wishes to leave at the next exit, there might be a case for a segregated left turn (Figure 4.3) – that is, a dedicated lane for this traffic which, because it is not in conflict with any other traffic, can run freely without being subject to signal control. Apart from problems which would arise if pedestrian facilities across the approach were required, there are other reasons why a segregated left turn in these circumstances might not produce the optimum result. Reserving an entry or exit lane for left turners means that other traffic cannot use these lanes. Consequently, the lack of the ability to balance traffic between the affected entry and adjacent circulating lanes can result in a reduction in capacity. For example, on the approach, traffic wishing to use the second exit would not be able to make use of any spare capacity available in the leftmost lane. At the same time, since the free turn lane is continued into the exit there is less capacity for other traffic using this exit.

Segregated left turns can cause problems at signalised roundabouts.



Figure 4.3 Segregated left turn

4.3.2 Commonly, segregated left turns are more heavily used in one peak hour than in the other. Where signals are to be installed on an existing roundabout, the elimination of any existing segregated left turns should be considered.

**4.3.3** Segregated left turns can also create major problems for cyclists wishing to leave by a later exit as they have to move across the left turn lane.

## 4.4 Full or part-time signalling

**4.4.1** Where problems occur at roundabouts only under certain conditions, primarily at peak hours, it has been common to implement signal control on a part-time basis (Figure 4.4). A study undertaken by the County Surveyors' Society in 1997 was based on a survey of signalised roundabouts (CSS, 1997). Although identifying the benefits of signalling, the study also identified an increase in accidents during the time

when part-time signals were not operating. This increase in the accident rate was compared with the time when the signals were operational and also with the situation before signals were installed.

### Part-time signals can result in:

- potential safety problems;
- no provision for pedestrians and cyclists;
- a compromised layout.

**4.4.2** Largely as a result of this study there has been a move away from using part-time signals at roundabouts, and many formerly part-time signals have been converted to full-time operation. Although a more recent study was not able to confirm the findings of the 1997 study, there is sufficient doubt over the relative safety of part-time signals to discourage their use.





Figure 4.4 Part-time signals

**4.4.3** Other reasons for not using part-time signals are:

- As the junction has to operate in different modes, the layout has to be a compromise. The flares necessary for the operation of an uncontrolled roundabout are not appropriate for signal control, which requires a more rigid lane structure for optimum operation. Also the entry deflections required by TD 16/07 *Geometric Design of Roundabouts* (HA, 2007) need to be retained for the non-signalled operating periods.
- With part-time signal operation, there is no way to provide safe pedestrian crossing facilities for visually impaired pedestrians, as there is no effective way of indicating in a non-visual way that the signals are not operational. Consequently, signalised pedestrian facilities cannot be recommended for part-time signals.
- Full-time signalisation reduces difficulties for cyclists.

**4.4.4** The problem of unnecessary delay when signals are in use at periods of low traffic demand can be mitigated by the use of a flexible control strategy (SCOOT or MOVA) to reduce wasted green time. Even so, there can be situations where the advantages of providing part-time signals outweigh the potential disadvantages, but in these situations a strong case (including a safety case) needs to be made before deciding to adopt this approach.

## 4.5 Indirect control

**4.5.1** Indirect control (Figure 4.5) is where signals are installed on an approach to a roundabout (often incorporating pedestrian signals) which control traffic on the approach only and do not involve control of the circulating traffic. Traffic passing through the signals is still required to give way to traffic on the roundabout.

**4.5.2** The main application for this technique is when there is very little circulating traffic to prevent a heavy entering traffic flow dominating the roundabout

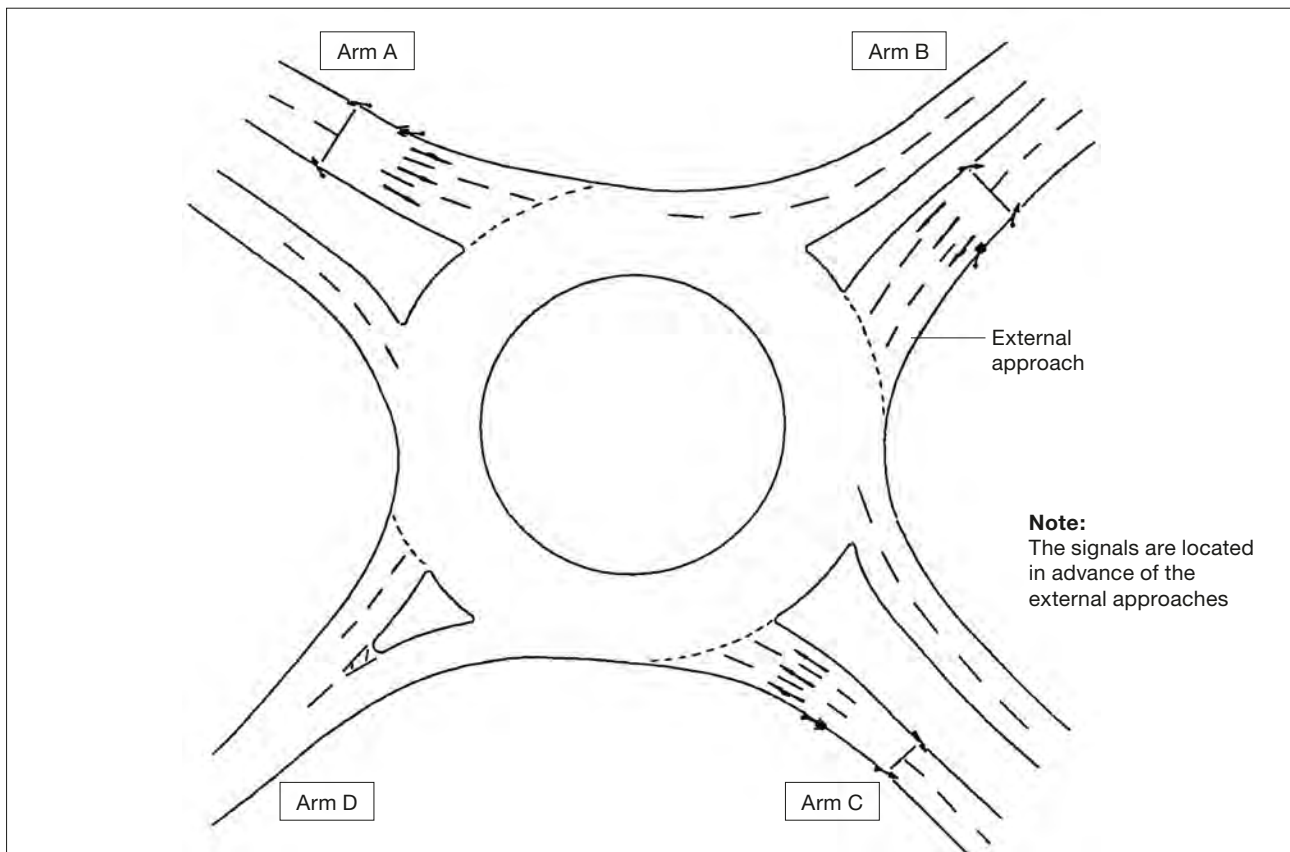


Figure 4.5 Indirect control (from TD 50/04)

operation. Downstream entries might be left with very few gaps to allow traffic to enter the roundabout, leading to excessive delay.

Indirect control creates:

- possible confusion to drivers;
- inconvenience to pedestrians and cyclists;
- restricted control options.

**4.5.3** To avoid the risk of drivers seeing a green signal on the approach and not realising that they are still required to give way at the roundabout, the signals must be sited some way back from the roundabout. This might not be convenient for pedestrians and cyclists. It might be necessary to use the full junction 'give way' marking and signing (double dashed white line and inverted triangle with 'give way' sign) to emphasise the give way requirement after the signals.

**4.5.4** Indirect control gives much less opportunity for optimising the operation of the roundabout.

## 4.6 Pedestrian/cyclist facilities

### Pedestrians

**4.6.1** Where there are pedestrian movements in the area covered by the roundabout, signalisation provides a useful opportunity for providing safe crossing places.

**4.6.2** Where there are existing pedestrian underpasses, it might still be necessary to consider surface crossings for pedestrians and cyclists.

**4.6.3** A crossing at a signalised entry can be provided by a simple walk-with-traffic arrangement. A crossing at an exit should be located a short distance (normally at least 20 metres) away from the roundabout to allow space for exiting traffic to wait without blocking the roundabout. (Note that, unless the exit crossing is near enough to be considered as being 'situated at the junction' (TSRGD 2002, Dir 46) then zig-zag markings will be required.).





Figure 4.6 Middle crossings

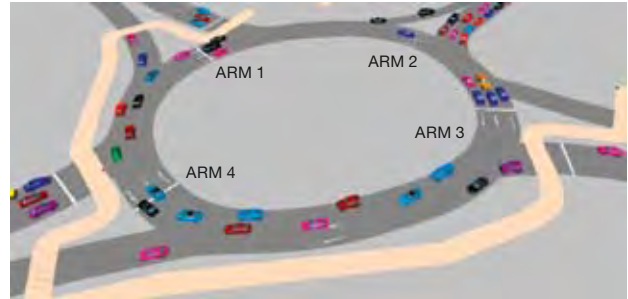


Figure 4.7 Edge crossings



Figure 4.8 Pedestrian route through centre

**4.6.4** If a controlled crossing facility is provided at a signalised roundabout, then crossings must be provided so pedestrians or cyclists can complete their desired route across the roundabout – for example, across both the entry and exit arms (Figures 4.6– 4.8).

**Pedestrian facilities must be planned to make up complete routes for pedestrians.**

**4.6.5** This will result in a right/left staggered crossing for pedestrians. For standalone crossings on dual carriageways a left/right stagger is normally recommended. The preference for a left/right stagger is based on the assumed safety advantage of walking towards oncoming traffic when approaching the second half of the crossing. At a roundabout this is

balanced by the advantage of crossing further from the exit itself, and right/left staggers are often the preferred alternative. A summary of the advantages and disadvantages of each type of stagger is given in TAL 5/05 (DfT, 2005).

**For pedestrian crossings across roundabout exits, right/left stagger is acceptable!**

**4.6.6** It is essential that an exit Puffin or Toucan crossing is co-ordinated with the other signals on the roundabout, so that the possibility of blocking the exit is minimised.

**4.6.7** It is important to realise that there are alternatives to how pedestrian (or Toucan) phases are handled that will have a significant effect on how the signals perform. The pushbutton phases can be arranged to run within their respective stages under different conditions:

- The phase can be set to run every time the relevant stage appears. This is the simplest arrangement and is the normal setting when under UTC control.
- The phase will run if demanded at any time during the stage. This has advantages for pedestrians, but can result in the stage being extended to allow for the pedestrian green and associated clearance period.
- The phase will only run if a demand exists at the start of the stage. This can lead to confusion to pedestrians if they arrive after the start of the stage, conclude they could cross (because the traffic has not yet started to move), press the pushbutton and do not get a green signal.

**4.6.8** The termination of the pedestrian green will depend on the type of signalling equipment used. With farside signals, the intergreen after the pedestrian green will be fixed, based on the width of the crossing.



Figure 4.9 Pedestrian indicators – potential ‘see through’



Figure 4.10 ‘Anti-pedestrian’ paving

With nearside signals and on-crossing detection (Puffin style), the intergreen will vary depending on when the detectors show that pedestrians have cleared the crossing. This can improve capacity under light pedestrian flows. Where farside signals are used, the termination of the non-conflicting vehicle phase that runs in the same stage as the pedestrian phase can be delayed by a few seconds following the termination of the pedestrian phase, because the pedestrian/vehicle intergreen is longer than the vehicle/vehicle intergreen. This also has a capacity benefit.

**4.6.9** For safety reasons, it is preferable to time the signals on an exit so that red is presented to slower rather than faster moving traffic. Traffic leaving at the first exit after joining the roundabout is likely to be moving more slowly than traffic that has entered earlier.

**4.6.10** Depending on the physical nature of the site and the desire lines for pedestrians and cyclists there can be advantages in providing crossing points across the circulating carriageway. If this can be arranged to avoid the use of exit crossings there can be benefits in reducing delay to vehicles and the more direct routes can also reduce delay to pedestrians and cyclists. On the other hand, providing crossings across the circulating carriageway will reduce the queuing space for vehicles. Care must be used to ensure that nearside pedestrian indicators do not cause a ‘see through’ problem. Pedestrians and cyclists crossing the roundabout entry might see the indicators intended for those crossing the circulating carriageway (and vice versa) and misinterpret them. This problem can be overcome by using Pedestrian Demand Units (PDU) with a reduced angle of view.

#### Having pedestrians crossing through the roundabout:

- reduces delay to pedestrians;
- can avoid need for exit crossings;
- but – reduces queuing space on roundabout.

(This also applies to cyclists!)

**4.6.11** Where pedestrians and cyclists cross the central area, guidance (other than formal guardrailing) such as low vegetation borders (Figure 4.9) or low level fence to paths can be provided. If certain routes are to be discouraged, ‘anti-pedestrian’ paving (Figure 4.10) can be used, although safe access on foot where necessary for maintenance must be considered.

**4.6.12** If it is not possible to accommodate pedestrian movements through the centre of the roundabout, it might still be possible to route them around but inside the circulating carriageway.

## Cyclists

**4.6.13** Small and mini-roundabouts generally have a moderate cycle accident record. However, larger conventional UK designs with four or more arms have a poor safety record for vulnerable road users, particularly cyclists. In general terms, the larger the roundabout, the higher the number of circulating lanes and the higher the traffic flow, then the greater the problem for cyclists.



**4.6.14** Signalisation of roundabouts can improve safety for cyclists. In general, reducing the width of the entry arms and the circulating carriageway to a single wide lane (4 metres), and making entry arms perpendicular to the roundabout will tend to slow traffic and assist cyclists, but roundabouts with this geometry are unlikely to merit signalisation.

**4.6.15** The segregation of cyclists should be considered. Where there are existing pedestrian underpasses, the use of these for cyclists can be considered.

**4.6.16** *The London Cycling Design Standards* (TfL, 2006) recommendations include the provision of segregated cycle tracks with signalised (Toucan) crossings of appropriate arms if the total junction flows exceed about 25,000 vehicles per day.

**4.6.17** Advanced stop lines can be used at approaches to signal-controlled roundabouts and they should also be considered for the circulating carriageway for large roundabouts. Advanced stop lines should be considered whether or not a segregated cycle track is provided.

Signalised roundabouts are safer for cyclists – but there are problems with:

- high speeds;
- multiple lanes;
- high traffic volumes.

Consider shared facilities:

- Toucan crossings;
- use of pedestrian underpasses.

## 4.7 Signing and road markings

### Road markings

**4.7.1** Advice on the correct design and use of road markings is given in Chapter 5 of the Traffic Signs Manual (TSM) (DfT, 2003a). Full-time and part-time signals require different road marking schemes.



Figure 4.11 Spiral markings and hatching

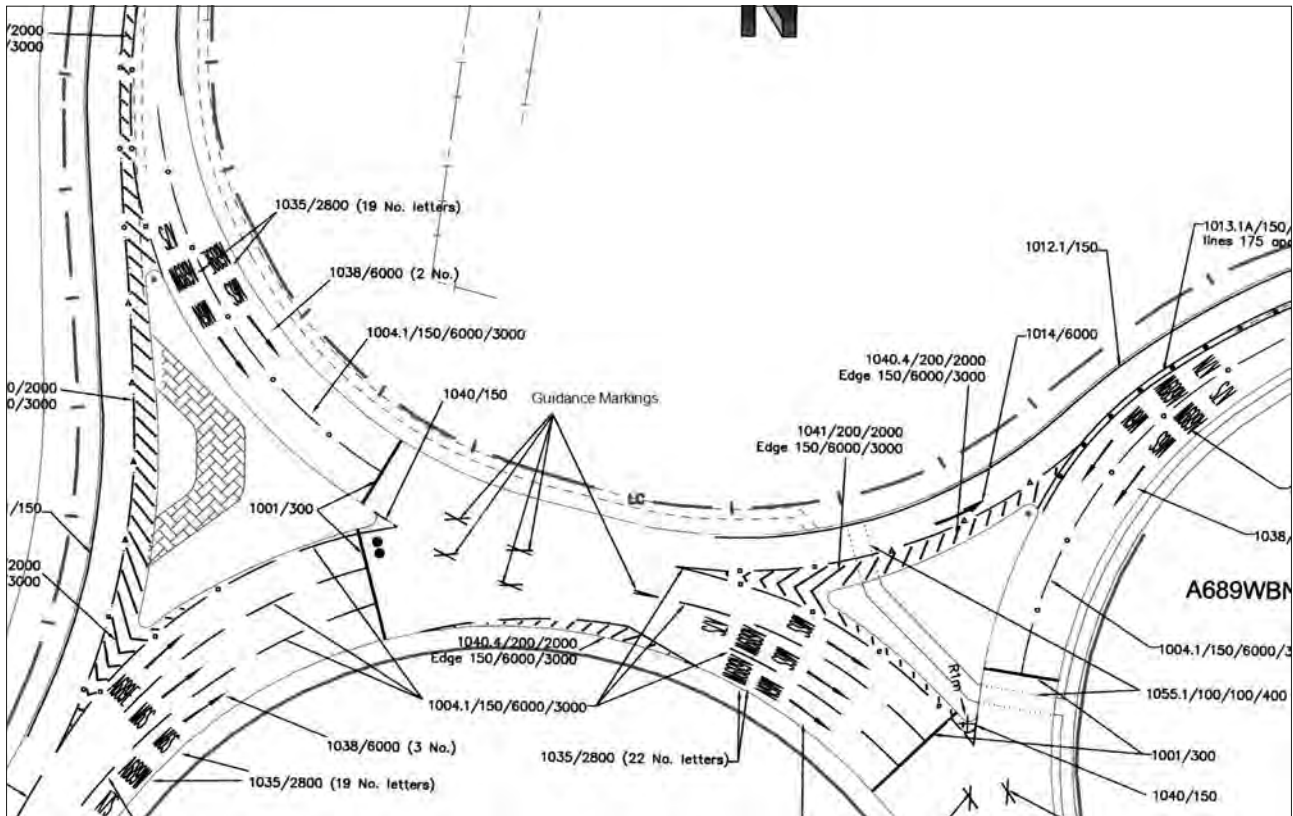


Figure 4.12 An example of the use of lane markings, guidance markings and hatchings at a signalised roundabout

**4.7.2** At roundabouts with full-time signals, the road markings should be as for any signalised junction. There should be a stop line to diagram 1001 of the Traffic Signs Regulations and General Directions 2002 (TSRGD), which should be straight and at right angles to the carriageway. There should be no markings at the entrance to the roundabout.

**4.7.3** At roundabouts with part-time signals, the standard roundabout 'give way' markings to diagram 1003.1 of the TSRGD should be provided in addition to the signal stop line.

**4.7.4** For unsignalised roundabouts, there are different types of lane markings available for the circulating carriageway, involving concentric or spiral marking or a combination of the two. These are explained in detail in TA 78/97 *The Design of Road Markings at Roundabouts* (HA, 1997).

**4.7.5** For signalised roundabouts, the choice of markings depends greatly on the traffic flow distribution and the queuing space required on the circulating carriageway, but spiral markings should always be the first choice. This will make navigating the roundabout clear for drivers and minimise weaving and lane changing.

## Spiral markings

**4.7.6** Spiral markings (Figure 4.11) are lane markings around a roundabout that indicate a route through the roundabout with minimal need for lane changing. Spiral markings are described in TA 78/97 *The Design of Road Markings at Roundabouts* (HA, 1997) and should be the prime choice for markings at a signalised roundabout. Figure 4.12 illustrates the principles of using lane markings (and guidance markings where lanes cross and merge) to show the path through a junction. Destination markings and signs where appropriate are essential to this approach.

**4.7.7** Arrows (Figure 4.13) may be provided on each lane to indicate the traffic movements intended to use it. The arrows should be placed at the beginning of the lane (where they are least likely to be hidden by stationary traffic) and repeated further up the lane for sections that are longer or more heavily used. The destination, expressed as the road number or town name, can also be added where necessary. This might not be appropriate at smaller roundabouts where carriageway area is limited.





Figure 4.13 Lane markings – arrows and destinations on circulatory carriageway

**4.7.8** The Traffic Signs Manual (DfT, 2003a) notes that right turning arrows on entry lanes are ‘best avoided’. This is particularly true where there is a danger that they might be interpreted as permitting a right turn on to the circulating carriageway.

**4.7.9** Safety of cycles and particularly motorcycles must be considered when designing a roadmarking scheme. Raised road markings can cause problems for motorcyclists, either by affecting their stability or by retaining water on the surface, resulting in a loss of adhesion between the tyres and the road. High friction road marking materials should be used, especially on curved sections and, where speeds are high, to reduce skidding when surfaces are wet.

## Yellow boxes

**4.7.10** Yellow boxes can be used to counter problems of blocking where these cannot be resolved by the traffic control system.

**4.7.11** The Traffic Signs Regulations and General Directions 2002 (TSRGD) require that, on a roundabout, yellow boxes may only be placed on parts of the carriageway that are permanently controlled by traffic signals (TSRGD Direction 35).

**4.7.12** TSRGD also specifies the requirements for the size and shape of yellow boxes, including limits on the angles at the corners. (Notes to Diagrams 1043 and 1044 in TSRGD).

**4.7.13** Yellow boxes which do not comply with the regulations require special authorisation. This is likely to be the situation at most signalised roundabouts.

**4.7.14** Yellow boxes should only be used if blocking remains a problem. Yellow boxes do not need a Traffic Regulation Order (TRO) but the police should always be consulted before implementation.

### When considering yellow boxes:

- avoid them if possible;
- authorisation required at unsignalised nodes;
- no TRO needed;
- consult the police.

## Hatching and chevrons

---

**4.7.15** A white hatched road marking is prescribed as diagram 1040.5 of the TSRGD to indicate a part of the carriageway adjacent to the edge, which vehicles should not enter unless it is seen to be safe to do so. Hatching can be useful when adjusting lane markings where an existing roundabout is being converted to signalised operation or spiral markings are introduced.

**4.7.16** Additionally, chevron markings to diagram 1042 may be used to create ghost islands where lanes need to be separated (for example on free, segregated, left turns or to help define desire lines). Hatching or chevrons may be reinforced with coloured surfacing in conformity with TA 81/99 *Coloured Surfacing in Road Layout* (HA, 1999).

**4.7.17** The use of hatching and chevrons should be minimised when a new roundabout with signals is being designed.

**4.7.18** Note that hatching should be avoided on the approach to a pedestrian crossing point. Hatching alongside pedestrian crossings is potentially hazardous, and at crossings with zig-zags the use of hatching (other than along the centre line approaching a divided crossing) is not permitted by legislation.

## Guidance markings

---

**4.7.19** Guidance markings can be used to indicate vehicle paths where lanes cross or merge (see the example in Figure 4.12).

**4.7.20** There is a safety issue with the design of guidance markings. Having guidance markings immediately after a stop line or 'give way' markings has been shown to significantly increase the number of overshoots. Therefore for signalised roundabouts there is usually a 10–15 metre gap before the markings start.

**4.7.21** Experience shows that the best layout for the guidance marking is a 1 metre or 2 metre line with a variable gap. (Note that this is not diagram 1005 or 1005.1, which have specific meanings.) Where the guidance markings cross the projected lane lines, the spacing and location of the lines should be designed to minimise the probability of the combination looking like a T marking. Where the lanes merge, the lines should form a V.

**4.7.22** Intermediate lines might be necessary, but the layout should be designed so as to minimise the potential for confusion where drivers need to cross a marking.

**4.7.23** Where the number of lanes on the joining carriageway does not equal the number of lanes on the roundabout, then the inclusion of either nearside or offside guidance markings should be considered as appropriate.

**4.7.24** These markings will require authorisation.

## Yellow bar markings

---

**4.7.25** Yellow bar markings to slow vehicles on an approach to a roundabout must meet the criteria set out in Chapter 5 of the Traffic Signs Manual (DfT, 2003a) and require Department for Transport authorisation.

**4.7.26** TSM Chapter 5 (DfT, 2003a) states: 'They are not normally appropriate on slip roads if there is a segregated left turn lane for the roundabout, or on approaches controlled by traffic signals. On approaching a green signal, some drivers will slow down in response to the markings others will maintain speed in an attempt to beat a change to red. Markings are unlikely to be approved in such cases unless the accident justification is strong'.

### Yellow bar markings:

- not appropriate on signalised entries;
- need authorisation.

## Signing

---

**4.7.27** The Traffic Signs Manual (Chapter 4) (DfT, 2004a) gives advice on the provision of warning signs on the approaches to both standard roundabouts (Section 2) and signal-controlled junctions (Section 8). The best form of advance signing is a map type sign that indicates destinations and also identifies the junction as being a roundabout.

**4.7.28** Where the visibility distances, based on 85th percentile approach speeds, listed in TSM Chapter 4 (DfT, 2004a) are not met, a 'Traffic signals ahead' sign (diagram 543) will also be required. Where approach speeds are above 50 mph, the 543 sign will be needed, regardless of visibility distance. On high speed roads,



signs should be installed on both sides of the carriageway. The 'Roundabout ahead' sign (diagram 510) should not be provided on the approach to a roundabout that is controlled by full-time signals.

**4.7.29** Temporary signs warning of a new roundabout or new traffic signals ahead may be used for up to three months from the date of completion of the works.

**4.7.30** Countdown markers should NOT be provided on the approach to a signalised roundabout.

**4.7.31** Lane destination signs using direction arrows, route numbers or destinations (Figure 4.14) can be particularly effective as a supplement to markings on the approaches to a roundabout. Where traffic signs are used, lane and route identification on the signs should be consistent with the lane markings. Details of these signs are given in TSM Chapter 7 (DfT, 2003b).

## Signal heads

**4.7.32** Signalised roundabouts will typically have multi-lane approaches both on the entries and the circulating carriageway. It is essential that signal displays are visible to all road users to whom they apply. All drivers when approaching or stationary in any lane should be able to see at least one appropriate signal head. As one signal may be masked by parked vehicles or other obstructions, it is normal to align at least two signals to be seen on each approach, typically one primary and one secondary signal. Drivers must also be able to see at least one signal when waiting at the stop line. This is normally achieved by a secondary signal mounted at either the centre or the off-side of the road. Refer to LTN 1/98 *The Installation of Traffic Signals and Associated Equipment* (DETR, 1998) regarding signal head alignment and visibility.



Figure 4.14 Lane destination signs

### Ensure visibility of signals! Tall poles:

- might be needed on high speed roads and multi-lane approaches;
- need authorisation.

**4.7.33** Where the approach is a high speed road (defined as 85th percentile approach speed above 35 mph) or vertical alignment limits visibility, high mounted signal aspects might be necessary to meet the visibility requirements. This is normally achieved by the use of tall poles with signal heads mounted both at the normal level and at a higher level. Signal heads mounted with the centre of the amber aspect more than 4 metres above ground level need authorisation.

### Mast arms are very visible, but:

- have possible maintenance problems;
- restrict the use of over-height vehicles;
- have location (behind barrier) problems.

**4.7.34** Mast arms can provide a very visible signal display above the carriageway, but they should be used with caution because of the potential problems of maintenance of signal heads located over the carriageway. (This problem can be mitigated by the use of rotating mast arms, where the signal head can be swung away from the carriageway for maintenance.)

**4.7.35** The safety barrier requirements for the protection of mast arms mean that the arms have to be well set back from the edge of carriageway and well behind barriers (Figure 4.15). This reduces the effective outreach and limits where they can be located. Similar comments apply to the use of gantries, which can also be visually intrusive.

**4.7.36** Mast arms can also limit the use of the route for over-height vehicles.

**4.7.37** The green signals will normally be in the form of a full green aspect rather than a green arrow. Using green arrows where they are not required can cause problems. Where there is a small entry angle between the entry and the circulating carriageway, joining the roundabout might appear more like an ahead movement than a turning left movement. A green arrow might be interpreted as a requirement to take the first exit if this is only a short distance away.



Figure 4.15 Mast arm signal – note location behind barrier

**4.7.38** One exception is at a gyratory or roundabout of unconventional shape where there is a possibility that the node might be interpreted as a T-junction. In this case, green arrows might be required. Also, at a ‘throughabout’ where there are nodes where traffic flows cross at right angles and straight ahead is the only permitted movement, green arrows are appropriate.

#### Box signs:

- should be used only if necessary;
- must be internally illuminated.

**4.7.39** Box signs (no right turn, no left turn, etc) should not normally be necessary. The exception is where there is a real danger that drivers might turn into a link against the traffic. This might include turning left off a roundabout on to a motorway off slip or right on to a roundabout if it is not obvious that the driver is on a roundabout entry.

**4.7.40** The positioning of signal heads is critical, particularly on a small roundabout, to prevent drivers being confused over which signal head is controlling their movement. If this cannot be solved by

positioning alone, it might be necessary to consider tunnel hoods or vertical louvres to limit the angle of visibility of certain aspects. Horizontal louvres can also be used, if necessary, to reduce the distance at which signal aspects are visible. This might be necessary to prevent the ‘see-through’ problem of signals on the circulating carriageway on small roundabouts being visible to traffic waiting at an entry stop line. Refer to LTN 1/98 *The Installation of Traffic Signals and Associated Equipment* (DETR, 1998) regarding signal head alignment and visibility.

## Passive safety

**4.7.41** ‘Passively-safe’ is the term applied to road furniture which is designed to minimise the severity of an accident when it is struck by a moving vehicle.

**4.7.42** Passively-safe signposts, lighting columns and traffic signal posts should be used on approaches with speed limits of 40 mph or more. Advice is covered by TD 89/08 *Use of Passively Safe Signposts, Lighting Columns and Traffic Signal Posts* (HA, 2008a), which in turn refers to BS EN 12767, which covers the specifications for passively-safe structures.



# 5. Assessment

## 5.1 Introduction

**5.1.1** To assess the suitability of a preliminary design or to compare alternative designs for a signalised roundabout will require some form of computer modelling. Available models fall into two groups: empirical models working with fixed cyclic average flow profiles such as TRANSYT and LinSig and microsimulation models such as VISSIM, Paramics and Aimsun.

**5.1.2** A high degree of expertise is required to operate these software packages, and it is essential that designers should have substantial experience in their use before attempting to prepare a design. It is strongly recommended that designers should have attended an accredited course in the relevant package before attempting to use it in developing a roundabout design. Microsimulation models have application in many transport fields and it is important that designers using them for roundabout design also have good traffic engineering experience and a thorough knowledge of other traffic signal analysis software (e.g. TRANSYT, LinSig).

### Essential

Empirical models (TRANSYT, LinSig):

- need training, but this is relatively straightforward;
- give direct output of signal timings;
- give numerical results for many performance factors.

**5.1.3** All design work should be carried out in accordance with the *Code of Practice for Traffic Control and Information Systems for All-Purpose Roads* TA 84/06 (HA, 2006b) which requires an independent systems audit of all design work of this type.

**5.1.4** Microsimulation models work by simulating the movements of individual vehicles with different characteristics, subject to gap acceptance and other rules. These models are considered 'stochastic'

models in that they use pseudo-random numbers to control random processes within the simulation, such as lane changing decisions, desired speeds, etc. The set of pseudo-random numbers is generated from a random number 'seed' input by the operator so that results can be repeated by using the same seed.

**5.1.5** Different seeds will produce equally valid results but with random variations in the same way that two days traffic observations will exhibit random variations between them. Commonly, the results of several runs using different seeds are averaged to produce a final set of results.

**5.1.6** It is important to note that microsimulation models do not have an optimiser to determine traffic signal settings, so an empirical model is essential to provide this. The use of a microsimulation model is an additional stage if required to investigate the operation of the roundabout in more detail.

### Optional

Microsimulation models:

- need training and high levels of skill and effort;
- give unparalleled dynamic presentations;
- should be used in addition, if empirical models cannot clarify operation sufficiently.

**5.1.7** Different types of model can produce different results from the same data, and careful calibration is required (particularly for microsimulation models) if the results are to be relied on for accurate prediction of queues and delays. All the models are, however, in general self-consistent so that they are all likely to agree whether any given change is beneficial to the design or not.

**5.1.8** Whatever model is used, it is vital that the analysis is validated on street when the control system is in operation. This will require careful

validation when the system is first switched on and returning to the site after the traffic has stabilised – at least two weeks after initial commissioning.

## 5.2 TRANSYT

**5.2.1** TRANSYT, developed by TRL, is a tool for the analysis of traffic signal networks. It is primarily used for the optimisation of traffic signal timings, but it can also provide valuable analysis of predicted queue lengths and delays. The algorithm used is based on the average cyclic flow profiles at each stop line for a given set of signal timings. An optimiser is then used to test the effect of incremental changes in the signal timings to arrive at optimum timings that minimise delays and stops for traffic using the network. It is also able to model uncontrolled junctions within networks, which enable it to be used for partially signalised roundabouts.

**5.2.2** Unlike the microsimulation tools, TRANSYT does not model individual vehicles or depend on modelling individual gap acceptances to predict performance. The basic algorithm does not take account of queue lengths, but the latest version of the program includes a cell transmission model that models the effect of blocking back where queues stretch back from a downstream junction. It can also model the effect of flared approaches, which are common at roundabouts.

**5.2.3** The data required for TRANSYT will come largely from the lane flow and link diagrams. The ‘shared stop line’ tool in TRANSYT will need to be used to provide proper modelling of traffic flows that share a lane but are heading for different exits from the roundabout.

**5.2.4** Otherwise, saturation flows on approaches calculated using RR67 (TRRL, 1986) and a nominal 1900 pcu/h per lane on circulating carriageways will usually provide a conservative estimate for initial assessment if spiral road markings are used to remove the need for lane changing. If weaving has to take place on the circulating carriageway, then saturation flows should be reduced. In this instance, values as low as 1650 pcu/hr per lane may be more appropriate. Start-up and end lost times are also critical, especially where short green times are involved. Cruise times should be measured on site if possible. If they have to be estimated, a range of 10–12 m/s is typical, depending on the size of the roundabout.

**5.2.5** Where estimates are used, sensitivity testing should be used to identify which values are critical. In all cases, the process should be fully documented to allow reassessment to be carried out if necessary.

**5.2.6** Cycle times of 70 seconds or less are generally appropriate for signalised roundabouts, with 60 seconds as a recommended starting point. Longer cycle times are generally less effective at roundabouts. Cycle times higher than 90 seconds should not be considered.

**5.2.7** It is strongly recommended that, for safety reasons, the signal timings are set so that vehicles newly entered into the roundabout are not confronted by red at the next signal stop line. To achieve this in TRANSYT, such newly entered traffic should always be assigned to a separate link (usually the major link) on which a stop penalty of 500 is placed. This forces the TRANSYT optimiser to treat each vehicle stop on this link as equivalent to five times the specified cost of stops, thereby encouraging TRANSYT not to stop traffic on this particular link.

**5.2.8** At the same time, the initial run of TRANSYT should have a zero stop penalty (-9999) and delay weighting of 20 set for all entry links to encourage the program to force any necessary queuing to occur on these entry approaches, rather than on the circulating carriageway. These values can be adjusted for subsequent runs until a preferred balance of queuing is obtained.

## 5.3 LinSig

**5.3.1** LinSig, developed by JCT, is a software tool for the modelling and design of traffic signals. As well as modelling stand-alone traffic signal junctions LinSig can also model networks of traffic signal and priority junctions, including large compound junctions such as signalised roundabouts. As in TRANSYT, the modelling depends on cyclic flow profiles for the prediction of queues and delays at successive stop lines. For the same network, signal timings, and modelling assumptions LinSig gives the same results as TRANSYT.

**5.3.2** For signalised roundabouts, the input data for LinSig differs from that required for TRANSYT, with the lane flow diagram being built from input data using the software. Traffic flows are specified as sets of origin/destination matrices giving each entry to exit movement. These flows are allocated to the links



(individual lanes) by the software, thereby forming the lane flow diagram, although this allocation should always be checked and adjusted manually if felt necessary. Lane arrangements and connectors can then be manipulated as necessary to arrive at a preferred layout. The capacity of entries without signals can be tested before the input of traffic signal data.

**5.3.3** For saturation flows, flared approaches, cruise times and cycle times, similar considerations apply as with TRANSYT. However, shared stop line links are not required because of the way link flows are disaggregated within LinSig.

**5.3.4** The optimisation of signal timings in LinSig follows an interactive procedure specific to signalled roundabouts, building in safety considerations and enabling practical reserve capacity to be directly maximised with acceptable queues on the circulating carriageway. This interactive process can be aided by the selective examination of cyclic flow and uniform queue graphs on critical circulating links.

## 5.4 Microsimulation

**5.4.1** Multi-purpose microsimulation packages such as VISSIM, Paramics and Aimsun can be used to model signalised roundabouts (Figures 5.1 and 5.2). Using a simulation model based on individual vehicle behaviour, they are capable of modelling a wide range of vehicle and driver characteristics, including pedestrians and cyclists, enabling them to be calibrated to almost any traffic environment or traffic control strategy. However, it must be stressed that accurate calibration is extremely important. Before such models are used to advise on design decisions, their lane utilisation and rate of discharge from signalised and 'give way' stoplines must be calibrated against either measured or estimated values from other capacity analysis models such as TRANSYT, LinSig, ARCADY or PICADY.

**5.4.2** They all have the potential to produce very realistic detailed images of dynamic street scenes, but for most purposes the roundabout designer needs no more than the two dimensional presentation. This provides a dynamic graphical representation of the operating traffic system (such as a full or partially signalised roundabout) giving a direct visualisation of how the system performs.

**5.4.3** The outputs require careful validation and a high level of skill to provide consistent, reliable results, but the software packages provide a way to model complex and unconventional systems that software like TRANSYT or LinSig finds more difficult.

**5.4.4** Microsimulation models can release vehicles into the road network according to a detailed (5 minute) profile. The build-up of congestion can be very dependent on this profile and, if adaptive signal control is modelled on the roundabout, the results of the study can vary according to the accuracy with which the release of vehicles into the system is modelled.

**5.4.5** Microsimulation models require the user to input the signal timings. A TRANSYT or LinSig analysis is the usual method for deriving the necessary timings.

**5.4.6** There is constant development of links between the empirical models and the microsimulation packages. These links can substantially simplify the interchange of data between them. Before embarking on an analysis involving an empirical model and a microsimulation package, it is worth checking what links are available between them.



Figure 5.1 Example of VISSIM graphics



Fig 5.2 Example of Paramics graphics

**5.4.7** Also available is PCMOVA, developed by TRL. PCMOVA allows MOVA to be linked to either S-Paramics or VISSIM. The reasons for producing PCMOVA were twofold. Firstly, with the increasing use of microsimulation to model wider areas, many models

will include junctions that are MOVA controlled in reality. Without being able to model these junctions under MOVA control, the models were proving unrealistic. With PCMOVA, the models can now give realistic results, allowing planners to carry out their task effectively. All modelling systems require accurate input data but, in the case of MOVA, accurate vehicle headways, flows and speeds are particularly important.

**5.4.8** TRL have also developed the ability to link SCOOT (Split, Cycle and Offset Optimisation Technique) to VISSIM in conjunction with the signal companies Siemens and Peek, although this is currently only available on a consultancy basis. There is also a Paramics to SCOOT link developed between Siemens and SIAS (Paramics), which is also available on a consultancy basis.

## 5.5 Other resources

**5.5.1** The software packages named above are the ones of their type most commonly used in the UK. There are other packages available that aim to serve similar functions.

**5.5.2** The Transport for London *Modelling Guidelines* (TfL, 2009) are a useful resource to refer to for traffic modelling advice.



# 6. Control strategies

## 6.1 General

**6.1.1** This section provides an overview of the various techniques available for the control of signalised roundabouts. The selection of the appropriate strategy will depend on the individual characteristics of the scheme and should not be assumed at the outset. A table detailing the characteristics of each control strategy is included as Appendix C to this document.

**6.1.2** This Local Transport Note does not attempt to provide full advice on how to use each technique, which is dealt with in documentation specific to each technique and in specialist training courses.

The following documents are relevant:

- *Guide to MOVA Data Set-Up and Use* (AG 45) (TRL, 2006a);
- *MOVA Traffic Control Manual* (AG 44) (TRL, 2006b);
- *SCOOT Manual* (Siemens, 2004).

**6.1.3** In general terms, the adaptive systems (SCOOT, MOVA) have proven benefits in delay reduction under less congested conditions. At high levels of demand, fixed-time can often provide more efficient control, but it is not ideal as a fall-back strategy that needs to cater for both peak and off-peak situations. Both MOVA and SCOOT can be restricted in flexibility (for example by setting low maximum green times or cycle times and fixing offsets between signalised nodes), which can make them operate more like a fixed-time system during high levels of demand.

**6.1.4** It is possible to have alternative control strategies for different times of day or days of week.

**6.1.5** Strategies using only local control (CLF, MOVA) can be used as a fallback strategy to those relying on communication to a central control system (Fixed-time UTC, SCOOT).

Include a backup control strategy that is not dependent on links to a remote centre.

**6.1.6** For all signal control strategies, it is essential that the circulatory carriageway on a roundabout is given the required priority to prevent a possible 'gridlock' situation. An 'anti-gridlock' strategy should be considered.

**6.1.7** When developing the timings of roundabout signals, the effect on pedestrians and cyclists should also be considered, particularly when an important pedestrian route involves several carriageway crossings. The co-ordination between them can have a significant effect on pedestrian delay.

## 6.2 Vehicle Actuation (VA)

**6.2.1** Basic vehicle actuation allows green times at a junction to vary between pre-set minimum and maximum greens. Isolated (unlinked) VA is unlikely to be applicable to signalised roundabouts, unless the roundabout is very large and the distance between signalised nodes and the traffic flow distribution is such that the timings of different nodes are essentially unrelated. Linking between VA controllers is possible using wired links.

## 6.3 Cableless linking (CLF)

**6.3.1** Cableless linking allows a degree of co-ordination between neighbouring signalised nodes operating with VA facilities. The CLF module in each controller contains essentially fixed-time plans which can be selected by time of day.

**6.3.2** The CLF module can exert various 'influences' on the main controller allowing specific stage changes to be immediate, to be demand dependent or to be prevented. A combination of these influences can be used to provide a range of control options from rigid fixed-time control to a very flexible control where a controller can work in a vehicle actuated

manner but is able to respond immediately to arriving vehicles at the point in the cycle where co-ordination is required. The result is that at times of heavy traffic the CLF system can effectively act as a fixed-time co-ordinated system but at low traffic volumes provides a degree of vehicle actuation.

**6.3.3** As there is no communication between neighbouring controllers, the offset in timings between them, which needs to be maintained to ensure effective co-ordination, relies on the clocks within the microprocessors in the individual controllers remaining in synchronism.

**6.3.4** The quartz crystal clocks used have the inherent accuracy required to maintain synchronism for extended periods, but some form of monitoring and resynchronisation by a central UTC control, a remote monitoring system or regular site checks is necessary to ensure that controllers remain synchronised. (Where more than one node is controlled by a single controller, loss of synchronism is obviously not a problem.)

**6.3.5** Even if cableless linking is not seen as an optimum control system for a particular roundabout, it can provide an excellent back-up strategy where the main form of control is based on central control (SCOOT or fixed-time UTC).

**Cableless linking is a useful back-up strategy.**

## 6.4 Fixed-time UTC

**6.4.1** Where the roundabout controllers can be connected to a central UTC system, they can be co-ordinated from the UTC computer with fixed-time plans. The advantages of central control are that signal timings can be changed from the centre at any time and operation can be continuously monitored.

**6.4.2** Plans need to be produced for each identifiable traffic pattern and a timetable drawn up to select the appropriate one by time of day and day of week. A minimum of four plans is normally required (AM peak, off-peak, PM peak and overnight) plus any special event plans for any distinct situations that recur. The development of fixed-time plans for a roundabout can be more complicated than for a general signal network, and plans need careful adjustment when implemented on site. Both TRANSYT and LinSig can be used for the calculation of fixed-time plans.

**Calculation of signal timings for a roundabout can be more complicated than for a general signal network.**

## 6.5 SCOOT

**6.5.1** SCOOT (Split, Cycle and Offset Optimisation Technique) is a form of urban traffic control to co-ordinate a network of traffic signal junctions. It is a real-time adaptive system aiming to optimise the three basic parameters needed to generate a set of signal timings for an area (or 'region', in SCOOT terminology). These are the cycle time (to ensure co-ordination over an area, all junctions must share a common cycle time or a multiple or submultiple of it), the green split (division of available green time between competing stages) and the offset (the difference in time between the start of a cycle at a junction and an arbitrary zero for the region).

**6.5.2** SCOOT detects the flow profile at the beginning of a link, predicts the time and shape of the flow profile at the stop line and calculates the effects of incremental changes to the timings.

**6.5.3** Because of the short links involved and the amount of lane changing that takes place between nodes, the application of SCOOT to a roundabout requires special considerations. Each lane will normally need to be treated as a separate link, and detector location is critical to ensure that the lane profiles are correctly measured. As the detectors are likely to be closer to the stop line than in normal signal networks, it is likely that queuing traffic might regularly cover the detector. In this case, the SCOOT facility to bias an offset or permanently fix the offset might be required.

**6.5.4** Alternatively, consideration should also be given to use the SCOOT multi-node facility to fix offsets.

**In SCOOT, detector location on circulating sections is critical.**

**6.5.5** Priority must be given to keeping the roundabout moving freely, so that any spare green should be given to the circulating link, not the entry link. This can be done by using the split weighting function in SCOOT. Split weighting can be used on links where it is desired that they run at a higher

degree of saturation than opposing links (i.e. to give additional green to a link, it is necessary to add a split weighting to links running in other stages). It is necessary to specify the amount of the weighting (multiplier) and the maximum degree of saturation acceptable on the weighted link.

**6.5.6** The SCOOT gating function can also be used to provide a greater restriction to traffic entering the roundabout, although the queuing on motorway off slips should not be allowed to affect traffic on the motorway itself.

**6.5.7** The SCOOT parameters, particularly journey time, saturation occupancy and maximum queue, should be carefully checked during fine tuning, together with the use of SCOOT facilities such as split weighting and biased offsets.

**6.5.8** For a smaller roundabout, effective control can be achieved if it is treated as one multi-node in a wider SCOOT region.

SCOOT might need to be biased to restrict timing changes in order to maintain free flow during periods of high traffic volume.

## 6.6 MOVA

**6.6.1** MOVA (Microprocessor Optimised Vehicle Actuation) was developed in the early 1990s as a control strategy for isolated junctions. It uses some of the concepts of SCOOT, using detectors to assess flow profiles at the entry to network links and predicting the arrival pattern at the stop line. It is currently the Highways Agency's standard control strategy for signalised junctions on trunk roads (TD 35/06 *All-purpose Trunk Roads: MOVA System of Traffic Control at Signals* (HA, 2006a)).

**6.6.2** MOVA uses an entry detector at the start of a link to measure the input flow profile of a platoon of traffic and predicts the shape and time of arrival at the stop line. MOVA can use this profile to assess queues and flows across the stop line and identify when the end of saturation flow occurs. This information is used to choose when to terminate the green time for minimum delay. This is more effective than standard VA, which allows individual vehicles to extend the green time. Under saturated conditions, MOVA uses a different algorithm to maximise capacity.

All control settings must be validated on site at commissioning and again at least two weeks later.

**6.6.3** Where MOVA is used to control a group of signals (such as at a roundabout), some form of co-ordination between nodes will be required. There are three different methods of achieving this:

- The 'Linked MOVA' technique uses the Emergency-Priority (EP) function in MOVA to allow one MOVA controller to influence a neighbouring MOVA controller. The stage or phase confirm signals from a controller are fed to the downstream controller to demand priority for an appropriate stage to achieve co-ordination;
- Using carefully sited queue detectors to call a stage via the EP function;
- Controlling two or more junctions as a single junction (single stage stream).

**6.6.4** Communication links will be needed to transmit the required control signals.

## 6.7 Linking to ramp metering

**6.7.1** Ramp metering is a traffic management technique to control traffic entering a motorway from a slip road. There are various algorithms used for ramp metering, but all have the same purpose: to maintain free flow on the motorway itself (*Ramp Metering: Technical Design Guidelines* (HA, 2008b)).

**6.7.2** The control is exercised by standard three-aspect signals incorporated into a distinctively shaped yellow traffic sign that has a black border (Figure 6.1). Tall poles are used so that vehicles arriving at the back of the queue are aware of the signals.

**6.7.3** Normally, the decision to use ramp metering and the algorithm chosen to control it will not be the responsibility of the roundabout designer. Even so, the roundabout designer needs to take account of any ramp metering to make sure that queuing back from the metering signals does not affect the efficient operation of the roundabout.

**6.7.4** A standard form of queue control incorporated in the ramp metering system is the use of limiting queue detectors that override the ramp metering



signals if the queue reaches a critical length. This form of control is independent of any roundabout signals and can equally well be used at an unsignalised roundabout. It is probable that more efficient control can be obtained by linking the ramp metering signals with one or more controlled nodes on the roundabout using a flexible control technique such as SCOOT or MOVA. This would need to be developed in conjunction with the agency responsible for the control of the motorway. It is also possible to link ramp metering with CLF controlled signals.

**6.7.5** A pilot project for the Highways Agency of a new technique of linking ramp metering to junction signals called ITM (Integrated Traffic Management) (HA, 2008c) has proved successful and might lead the way to a new standard.

**6.7.6** ITM operates by sending queue status messages to the local traffic signal controller via the existing detector input interface. No special adaptation of the controller is required. The way these bits are used to influence the operation of the signals is determined by the special conditioning logic programmed into the controller.



Figure 6.1 Ramp metering signals

# 7. References

- County Surveyors' Society (1997). *A Review of Signal Controlled Roundabouts*. CSS, Shrewsbury.
- County Surveyors' Society (2006). *Puffin Crossings – Good Practice Guide*. CSS, Shrewsbury.
- Department for the Environment, Transport and the Regions (1995a). LTN 1/95 *The Assessment of Pedestrian Crossings*. HMSO, London.
- Department for the Environment, Transport and the Regions (1995b). LTN 2/95 *The Design of Pedestrian Crossings*. HMSO, London.
- Department for the Environment, Transport and the Regions (1998). LTN 1/98 *The installation of Traffic Signals and Associated Equipment*. TSO, London.
- Department for Transport (2003a). *Traffic Signs Manual Chapter 5: Road Markings*. TSO, London.
- Department for Transport (2003b). *Traffic Signs Manual Chapter 7, The Design of Traffic Signs*. TSO, London.
- Department for Transport (2003c). TAL 2/03 *Signal-control at Junctions on High-speed Roads*. DfT, London.
- Department for Transport (2004a). *Traffic Signs Manual Chapter 4: Warning Signs*. TSO, London.
- Department for Transport (2004b). LTN 1/04 *Policy, Planning and Design for Walking and Cycling*. TSO, London
- Department for Transport (2005). TAL 5/05 *Pedestrian Facilities at Signal-Controlled Junctions*. DfT, London.
- Department for Transport (2006). TAL 1/06 *General Principles of Traffic Control by Light Signals*. DfT, London.
- Department for Transport (2008). LTN 2/08 *Cycle Infrastructure Design*. TSO, London
- Disability Discrimination Act 1995. TSO, London.
- Highways Agency (1997). TA 78/97 *Design of Road Markings at Roundabouts*. DMRB Volume 6, Section 2, Part 3. TSO, London.
- Highways Agency (1999). TA 81/99 *Coloured Surfacing in Road Layout (Excluding Traffic Calming)*. DMRB Volume 6, Section 3, Part 4. TSO, London.
- Highways Agency (2003a). TD 51/03 *Segregated Left Turn Lanes and Subsidiary Deflection Islands at Roundabouts*. DMRB Volume 6, Section 3, Part 5. TSO, London.
- Highways Agency (2003b). TA 86/03 *Layout of Large Signal Controlled Junctions*. DMRB Volume 6, Section 2, Part 8. TSO, London.
- Highways Agency (2004). TD 50/04 *The Geometric Layout of Signal-Controlled Junctions and Signalised Roundabouts*. DMRB Volume 6, Section 2, Part 3. TSO, London.
- Highways Agency (2006a). TD 35/06 *All-purpose Trunk Roads: MOVA System of Traffic Control at Signals*. DMRB Volume 8, Section 1, Part 1. TSO, London.

Highways Agency (2006b). TA 84/06 *Code of Practice for Traffic Control and Information Systems for All-Purpose Roads*. DMRB Volume 8, Section 1, Part 2. TSO, London.

Highways Agency (2007). TD 16/07 *Geometric Design of Roundabouts*. DMRB Volume 6, Section 2, Part 3. TSO, London.

Highways Agency (2008a). TD 89/08 *Use of Passively Safe Signposts, Lighting Columns and Traffic Signal Posts to BS EN 12767*. DMRB Volume 8, Section 2, Part 2. TSO, London.

Highways Agency (2008b). MCH 2470 *Ramp Metering: Technical Design Guidelines*.

Highways Agency (2008c). *Integrated Traffic Management at Junction 33 of the M1 Evaluation Report*.

Institution of Highways and Transportation (1998). *Guidelines for Cycle Audit and Cycle Review*. IHT, London.

Institution of Highways and Transportation (2000). *Guidelines for Providing for Journeys on Foot*. IHT, London.

Siemens (2004). *SCOOT Manual*. Siemens, Camberley.

Sustrans, National Cycle Network (1997). *Guidelines and Practical Details*, Issue 2. Sustrans, Bristol.

Traffic Signs Regulations and General Directions 2002 (SI No. 3113). TSO, London.

Transport for London (2005). *London Cycle Network Design Standards*. TfL, London.

Transport for London (2006). *London Cycling Design Standards*. TfL, London.

Transport for London (2009). *Modelling Guidelines Volume 3, Part A*. TfL, London.

Transport and Road Research Laboratory (1986). *The Prediction of Saturation Flows at Road Junctions Controlled by Traffic Signals*. TRL, Wokingham.

Transport Research Laboratory (2006). *MOVA Traffic Control Manual (AG 44)*. TRL, Wokingham.

Transport Research Laboratory (2006). *Guide to MOVA Data Set-Up and Use (AG 45)*. TRL, Wokingham.

The Zebra, Pelican and Puffin Pedestrian Crossings Regulations and General Directions 1997 (SI No. 2400). TSO, London.



# Appendices

## Appendix A Illustrative example

### A.1 Introduction

This example is based on an actual roundabout (Bardills roundabout) at Stapleford, Nottingham. It is presented as an illustration, not as a comprehensive report. The steps involved in the actual development of the design have been simplified and not all the results from all the options are presented.

Bardills roundabout (Figures A.1 and A.2) joins the A52 Brian Clough Way (arms B and D) to the B6003 (arms A and C). The roundabout is named after the Bardills Garden Centre, which accesses and egresses on to this roundabout. The flows into and out of the garden centre (arm E) are only a handful of vehicles per hour at peak times. This arm has been ignored for the purposes of the LinSig and TRANSYT analysis but has been included (with nominal flows) in the Paramics simulation.

Three of the four approaches into this priority roundabout experienced delay, with long queues on arm D and arm A in both morning and afternoon peak periods. The worst was arm D in the evening peak, with delays of over 10 minutes regularly for at least the whole hour

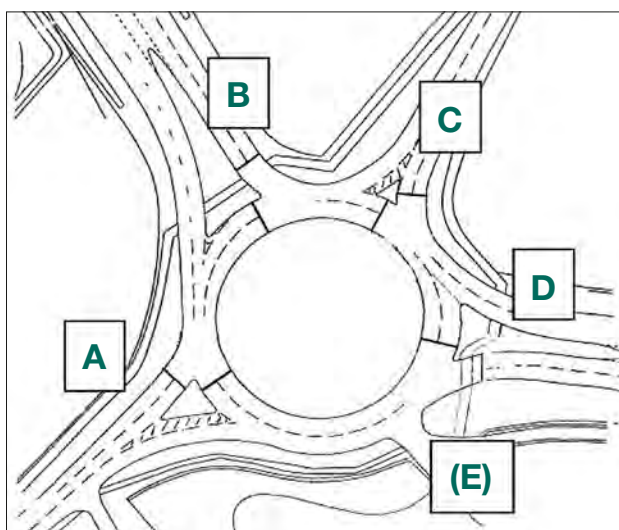


Figure A.1 Option 1



Figure A.2 Bardills roundabout showing cut-through (looking towards arm A, Stapleford Road).

from 5pm to 6pm. Arm D had delays of several minutes also in the AM peak. Delay on arm A was regularly several minutes in both peaks.

Pedestrian flows are low and surveys showed 100 movements per day across arm B and 30 per day across arm D. Toucan crossings would be incorporated into the design at these points. Across the entries, the pedestrian phases operate in parallel with the circulating traffic. On the exits, the pedestrian demand (even allowing for the release of some latent demand) was assessed to be low enough that the occasional interruption to the (minor movement turning traffic) traffic could be accommodated within the design.

## A.2 Development of design options

The initial investigation of design options was the signalisation of all arms except arm E (Option 1). From the results of this analysis, further options would be developed. The design option analysis would be carried out at current (2003) traffic levels. It was considered that only a short-term solution would be possible without major structural changes, and a design year of 2008 was set with an assessed traffic growth over the five years of 8 per cent.

## A.3 Design evaluation

Lane/flow diagrams were first produced for the Option 1 layout (Figure A.3). These indicated that a fully signal controlled design on the existing layout would result in overcapacity in the peak periods. The limited internal queuing capacity and high 'worst lane flow summation totals' at each node (Table A.1), particularly in the afternoon peak, indicated that a fully signal controlled design on the existing layout would result in overcapacity in the peak periods. The very limited queuing capacity within the roundabout would exacerbate the problem. In addition, a major contributor to the overcapacity would be the large right-turn movement from arm B (i.e. 330 in the AM peak and 298 in the PM peak), which seriously impacts arms C and D.

**Table A.1 Capacity check – Option 1**

Arm	Arm name	Worst lane flow summation	
		AM	PM
A	Stapleford Lane	1416	1419
B	A52 (W)	1314	1417
C	Toton Lane	1427	1445
D	A52 (E)	1452	1541

The above exercise led to the development of Option 2 with a 'by-pass' from arm B to arm A to remove this heavy movement from the circulating carriageway and relieving the load on the nodes at C and D. At the same time there seemed to be a possible advantage in leaving arm C unsignalised. This was verified by revised lane/flow diagrams based on a diversion of the

right-turn movement from arm B through the roundabout and provision of a third gyratory lane on the south side. To make a fair comparison, Option 3 (as Option 2 but with arm C signalised), was also identified for analysis.

## A.4 Modelling methodology and TRANSYT results

The existing situation (2003) was modelled using ARCADY (based on 'lane-usage' – i.e. intercept-corrected).

For Option 1, traditional TRANSYT modelling (for signalled roundabouts) was used to test signal control on all nodes on the existing layout.

For Option 2, a combination of LinSig and TRANSYT was used. The results for the AM/PM peak periods are summarised in Table A.2.

For Option 3, TRANSYT was again used to model the operation, with timings for node C added to the data used for the Option 2 analysis.

Design year (2008) results were obtained by repeating the TRANSYT analysis with 2003 traffic flows increased by 8 per cent.

## A.5 Discussion of results

Option 1: In year 2003, this design affords some benefits to arms A and D the A52 (E), but at cost to the arms B and C in both peaks. The signalling of all arms, together with the need to accommodate within-roundabout storage for the high volume right-turn movement from arm B, severely limits the potential for this design.

Option 2: This design directly addresses the problems identified in Option 1 by providing a right-turn 'diversion' through the roundabout island, leaving arm C entry as 'give way' and expanding the southern gyratory section from two to three lanes. The arm C 'give way' entry will receive significant gaps during the upstream junction interstage periods. The right-turn 'diversion' will relieve pressure on the 'worst lane flow summation' values at both nodes C and D. Option 2 offers significant capacity and operational benefits over both Option 1 and the 'existing' priority control scenario.

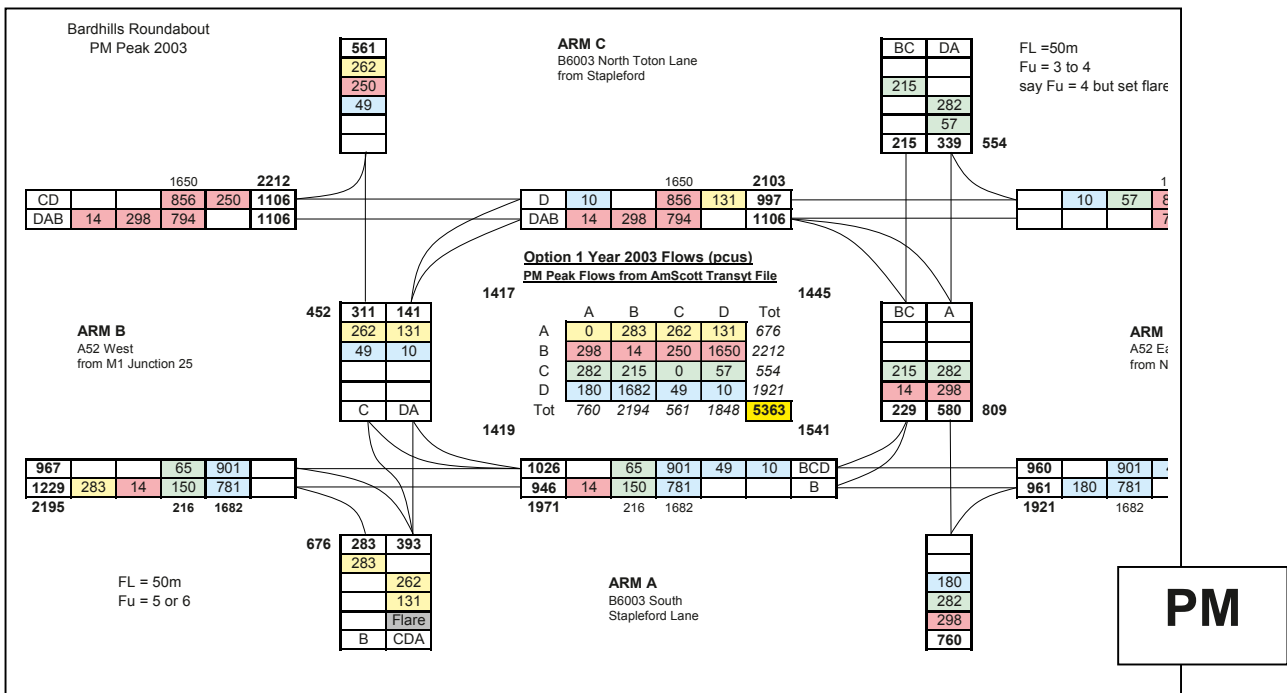
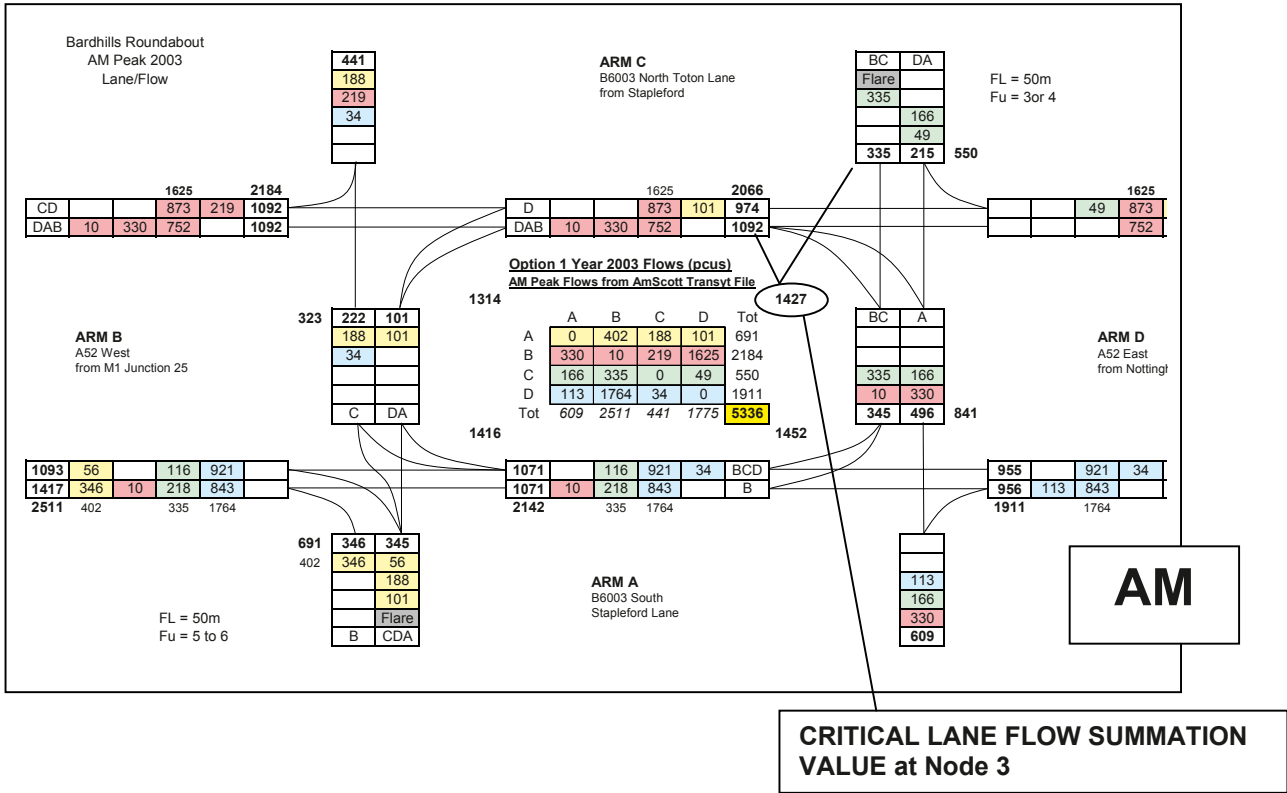


Fig A.3 Lane flow diagrams (with O/D matrices) – Option 1



**Table A.2 TRANSYT evaluation results summary for base year (2003) and design year (2008)**

AM Peak Year 2003	A		B		C		D	
	Stapleford Lane		A52 (W)		Toton Lane		A52 (E)	
	Deg Sat	(MMQ)	Deg Sat	(MMQ)	Deg Sat	(MMQ)	Deg Sat	(MMQ)
Arcady As-Is Year 2003	139%	(120)	101	(19)	105	(18)	131	(144)
Option 1: AM Peak 2003	118%	(63)	108%	(65)	127%	(67)	126%	(118)
Option 2: AM Peak 2003	93%	(11)	96%	(24)	73%	(5)	102%	(37)
Option 3: AM Peak 2003	93%	(12)	96%	(24)	96%	(13)	102%	(37)

PM Peak Year 2003	A		B		C		D	
	Stapleford Lane		A52 (W)		Toton Lane		A52 (E)	
	Deg Sat	(MMQ)	Deg Sat	(MMQ)	Deg Sat	(MMQ)	Deg Sat	(MMQ)
Arcady As-Is Year 2003	139%	(62)	112%	(55)	108%	(20)	122%	(201)
Option 1: PM Peak 2003	97%	(14)	113%	(86)	117%	(20)	117%	(89)
Option 2: PM Peak 2003	95%	(13)	97%	(28)	77%	(6)	98%	(27)
Option 3: PM Peak 2003	95%	(14)	97%	(28)	97%	(14)	98%	(27)

AM Peak Year 2008	A		B		C		D	
	Stapleford Lane		A52 (W)		Toton Lane		A52 (E)	
	Deg Sat	(MMQ)	Deg Sat	(MMQ)	Deg Sat	(MMQ)	Deg Sat	(MMQ)
Option 1: AM Peak 2008	121%	(76)	113%	(93)	137%	(90)	148%	(190)
Option 2: AM Peak 2008	101%	(21)	103%	(48)	83%	(7)	111%	(70)
Option 3: AM Peak 2008	101%	(21)	103%	(48)	104%	(24)	111%	(71)

PM Peak Year 2008	A		B		C		D	
	Stapleford Lane		A52 (W)		Toton Lane		A52 (E)	
	Deg Sat	(MMQ)	Deg Sat	(MMQ)	Deg Sat	(MMQ)	Deg Sat	(MMQ)
Option 1: PM Peak 2008	105%	(33)	112%	(91)	115%	(49)	129%	(141)
Option 2: PM Peak 2008	103%	(26)	105%	(56)	87%	(9)	106%	(53)
Option 3: PM Peak 2008	103%	(26)	105%	(56)	105%	(26)	106%	(53)

Option 3: The effect of reintroducing signals at the node C entry, but maintaining the Option 2 timings at each of the remaining nodes, is to produce a significantly improved design over the existing priority controlled roundabout junction, but a less favourable outcome for the arm C entry than over Option 2. The TRANSYT results for Options 1, 2 and 3, years 2003 and 2008 flows, are summarised in Table A.2.

## A.6 Paramics microsimulation

The following options were modelled using Paramics (Figure A.4).

1. Option 2: nodes 1, 2 and 4 (arms A, B and D) signal controlled, cut-through for right turn movement from arm B added, arm C to remain under priority control.
2. Option 3: As Option 2, but arm C returned to signal control. (Note: the Paramics model for Option 2 was used to aid the setting of the timings for the arm C entry in Option 3). The Paramics model for Option 2 proved invaluable when inserting and adjusting the signal control at arm C to create Option 3.



Figure A.4 Paramics simulation

The microsimulation visualisation provided immediate reassurance that optimum and satisfactory queuing behaviour was possible on the adjacent gyratory links with these additional signals in place. Such reassurance is difficult to achieve using just the TRANSYT software.

## A.7 Pedestrian facilities

Toucans across arms B and D (entry and exits) are to be included. The crossings will have on-crossing detection, and this will shorten the intergreens following the crossing stages, as virtually all crossings will be completed within one or two seconds of the end of green to users. This will result in intergreens similar to the traffic intergreens.

## A.8 Control strategies

The final design (Figures A.5 and A.6) is intended to operate primarily under MOVA control. VA and CLF will both be tried as fallback modes, and the better-performing will be chosen for permanent fallback use.

A conventional TRANSYT model has been built for the final design, and the CLF timings will be based on this.

## A.9 Post-evaluation design changes

Widening the arm A approach from two to three lanes, with the left turn, the dominant morning peak flow, allowed from both lanes 1 and 2, lane 2 also being used by the ahead flow, with the right turn only from lane 3. This reduces the 'worst lane flow summation value' on this entry from 346 to 295 pcu/h in the morning peak hour and from 393 to 273 pcu/hour in the afternoon peak.

Provision of a much longer right turn lane lead-in on the arm B approach effectively increases the number of right turners that can store without blocking ahead traffic on the arm B approach and so offers additional capacity for growth in the right-turn movement. Just as importantly, it increases capacity by taking most of the right turners out of the main flow.

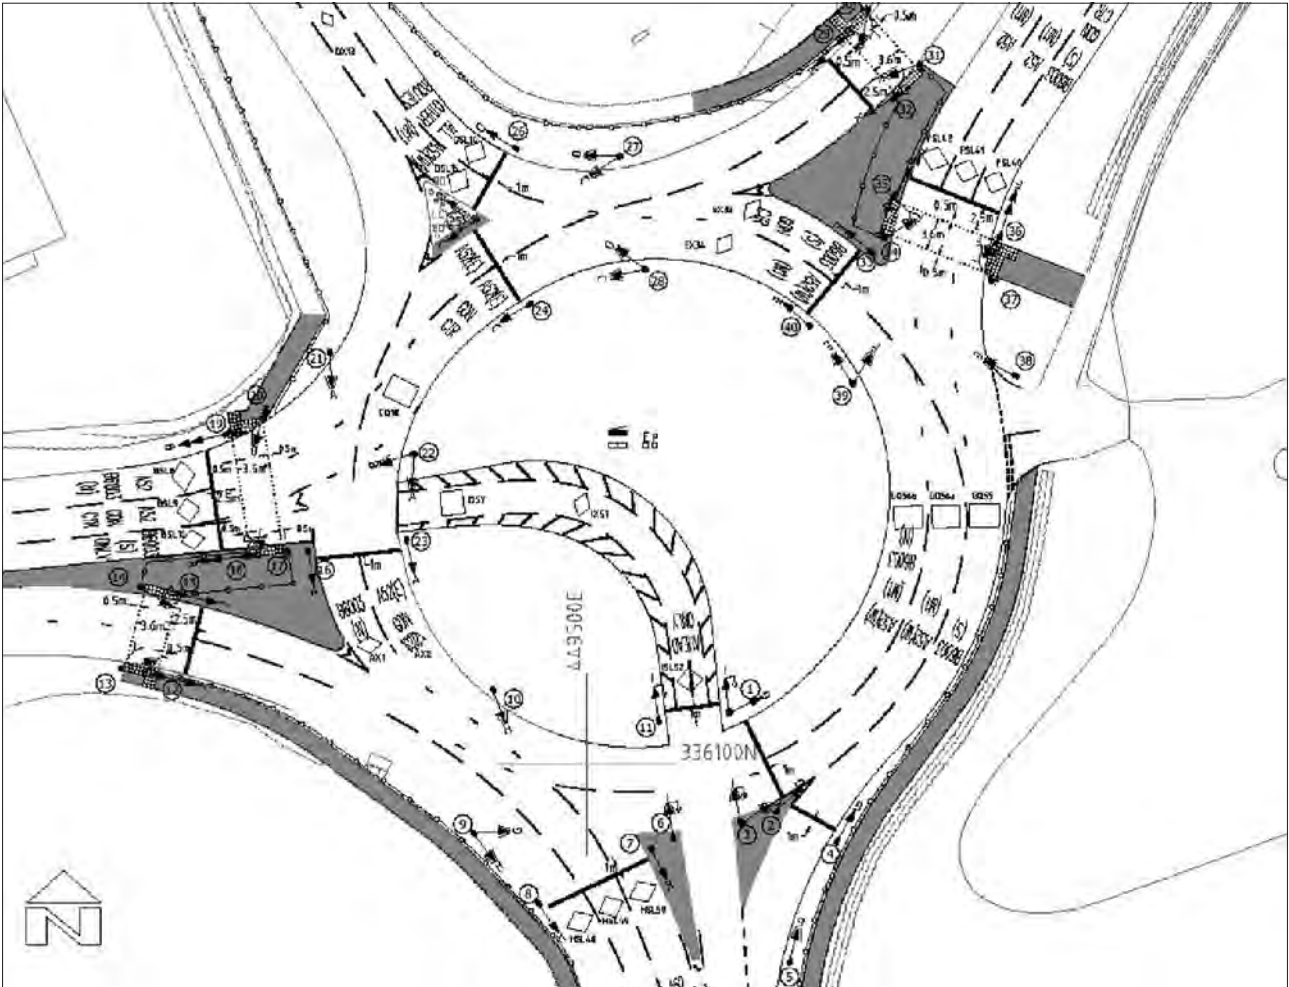


Figure A.5 Final design

## A.10 Postscript

Following the analysis it was decided to include the signalisation of arm C for the following reasons:

(a) concern regarding insufficient gap generation from the upstream signals;

(b) safety concerns about the ability of drivers on arm C to simultaneously judge circulating traffic on the roundabout, queuing traffic downstream on the roundabout and the signals to the left for the exit Toucan at arm D.



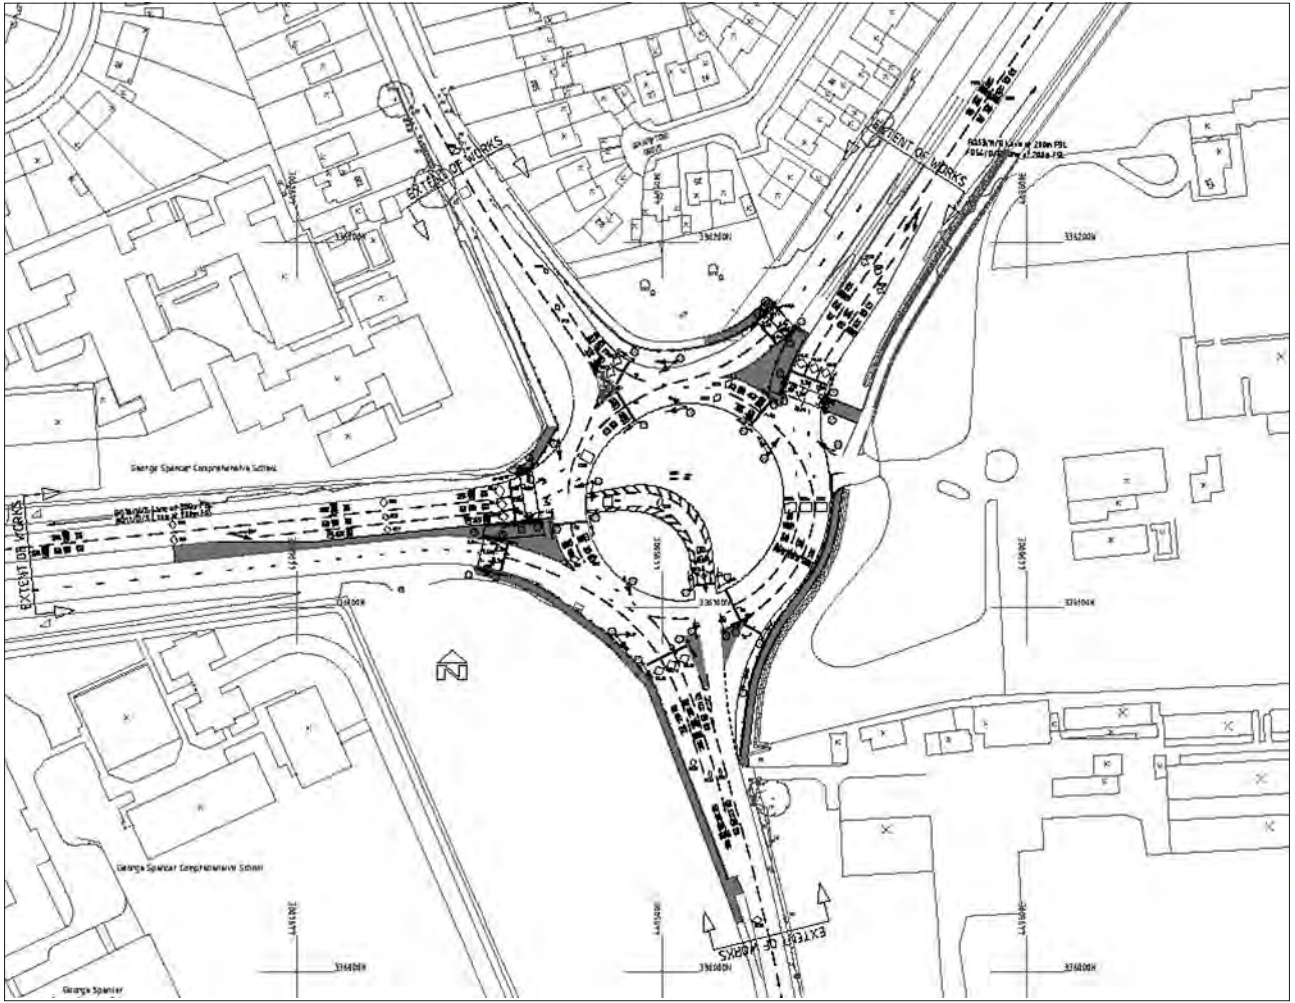


Figure A.6 Final design in context

# Appendix B Background

## B.1 The project

This Local Transport Note has been produced as part of a larger research project looking into various ways of analysing and controlling signalised roundabouts.

Various analytical tools were tested using data from real-life roundabouts in a comprehensive modelling programme.

The primary aim of the project was to set out a process that details the approach for modelling and validation, including characteristics of sites chosen, and to establish the parameters that affect the safety and the capacity of signalised roundabouts with a view to providing practical guidance for design engineers.

The key aims were to:

- develop procedures, backed by design considerations, for the provision of advice to practitioners on the use of signal control at roundabouts;
- review current practice in the UK and relevant experience overseas, including the tools currently in use for investigating roundabout performance;
- identify factors that affect the safety, efficiency and capacity of roundabouts;
- conduct a modelling and validating exercise to establish the key variables that determine when to implement signal control at roundabouts;
- produce draft guidelines and advice for practitioners on the use of signal control at roundabouts;
- conduct a consultation exercise to ensure the guidelines and advice work in practice.
- produce a guidance document to practitioners.

## B.2 Methodology

The methodology is shown in Figure B.1. A literature review was undertaken, consultation carried out and workshops were held with key practitioners, which resulted in the identification of a need for a sample of at least 15 sites to obtain a thorough test of the analysis methods. A list of five small, five medium and five large signalised roundabouts was drawn up. The roundabouts have been categorised as small, medium and large depending on their inscribed circle diameter (less than 75 metres as small, between 75 metres and 120 metres as medium and more than 120 metres as large). These range from motorway interchanges to rural and urban situations to reflect different approach speed limits, flow conditions and geometry. Criteria for the site selection were based on the availability of 'before' and 'after' data. Where possible, sites were chosen that have been signalised in recent years.

The sites also encompass a number of key parameters, so that the effect of these parameters in various conditions can be modelled. Similar sites were then grouped to make more accurate comparisons and to develop a generic model to assess sensitivity of various factors for different site conditions.

The 15 chosen sites were located within the Midlands, West Sussex, Somerset and Hampshire.

Two representative models, consisting of one small and one large roundabout, were developed from the base models of the 15 chosen sites to analyse the impacts of various parameters using microsimulation. Sensitivity tests were carried out for different traffic volumes (low to high) and different traffic compositions to determine the impact of key variables under different flow conditions.

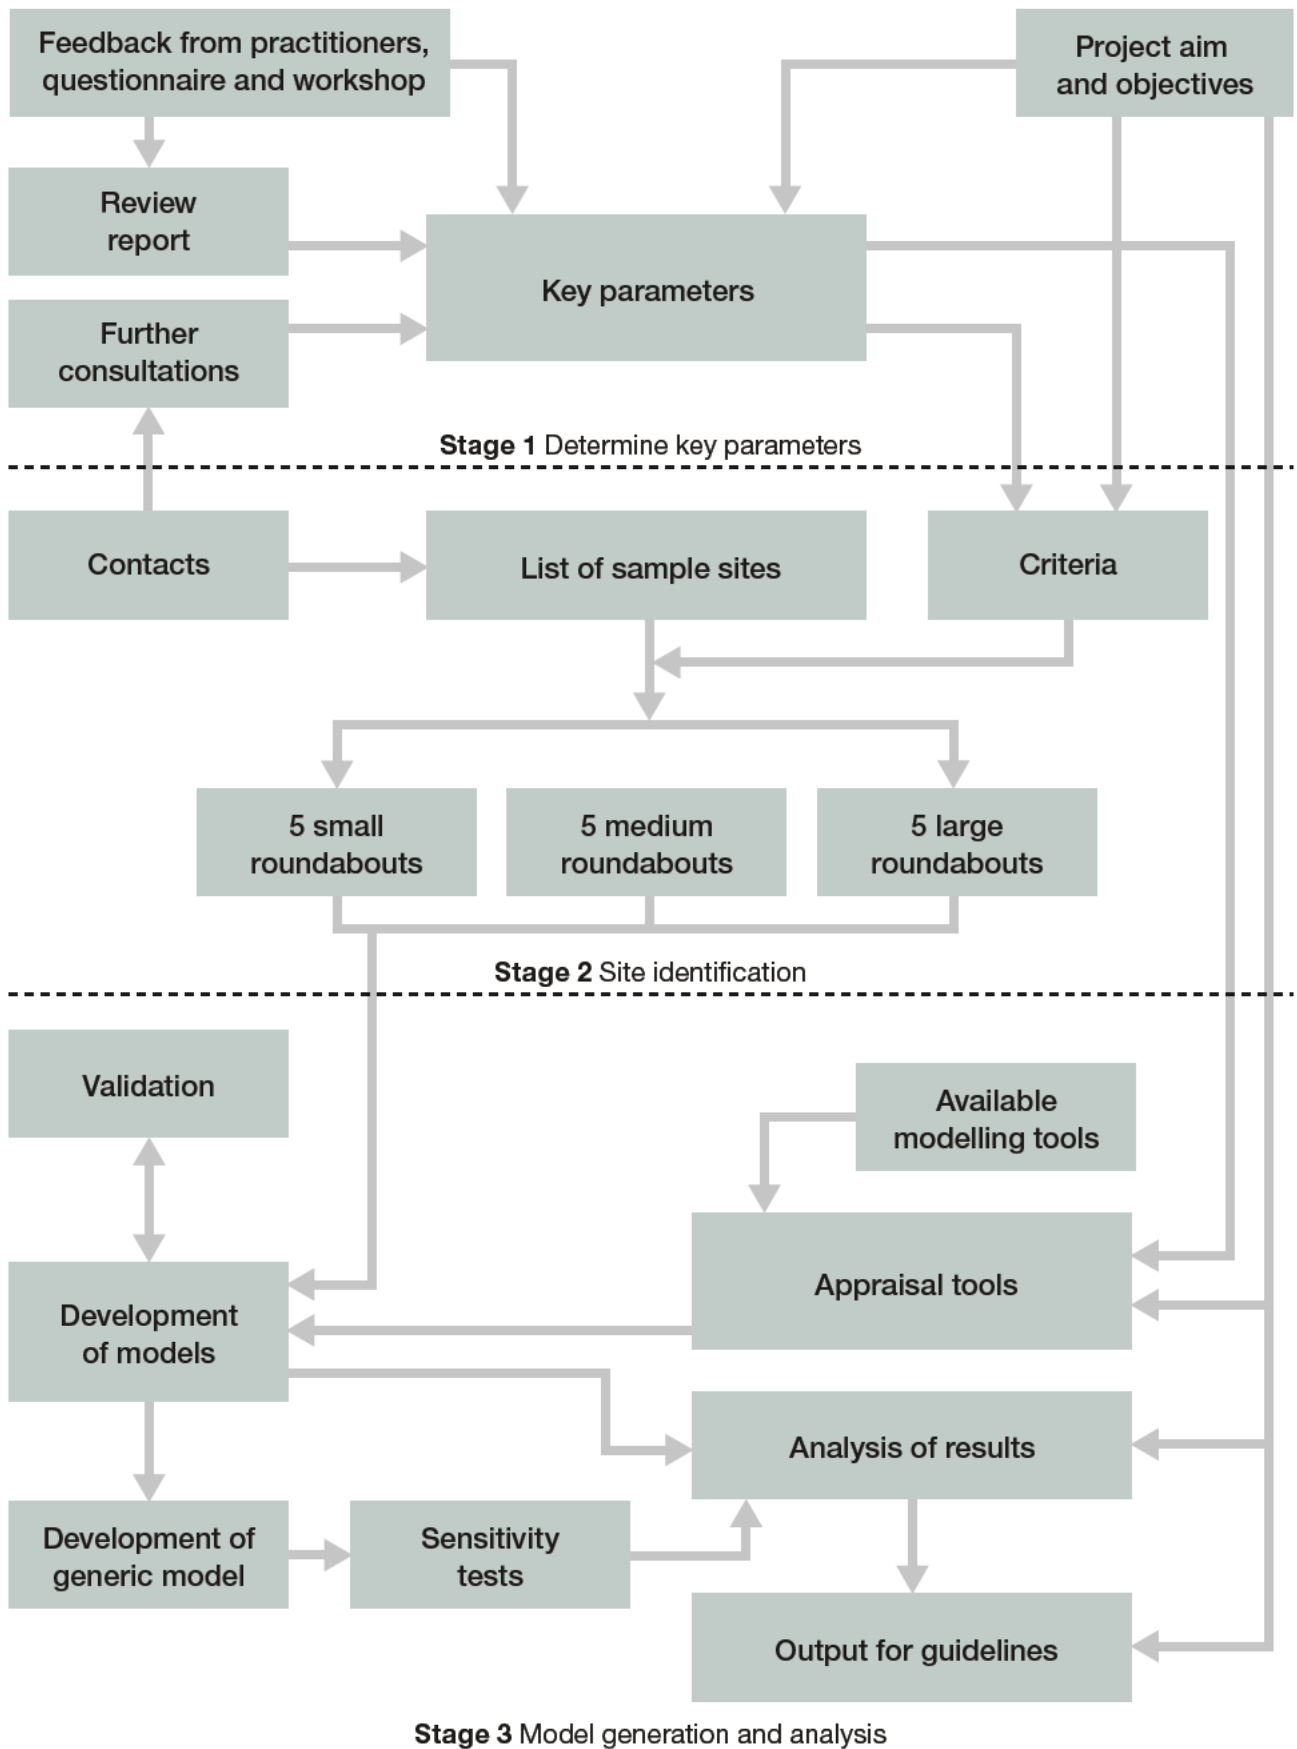


Figure B.1 Modelling process – evaluation plan



Comparisons were made between unsignalled, partially signalled and fully signalled situations. The effects of geometrical changes were investigated. The performance of the roundabouts were assessed for the following control strategies:

- fixed-time;
- MOVA;
- SCOOT.

## B.3 Analysis tools

Various appraisal tools were used, including:

- ARCADY;
- TRANSYT;
- LinSig V2;
- VISSIM;
- Paramics;
- PC MOVA.

One other package which was also used was TranEd. TranEd provides a graphical interface to TRANSYT which allows the editing of the TRANSYT data files and displays both input and output data graphically.

ARCADY version 6 was used to test the non-signalisation of the sites and TRANSYT 12 was used to test how the roundabouts work with traffic signals. These results were compared with each other and with those from the microsimulation models, which used the latest versions of VISSIM 4.30 and S Paramics.

MOVA was modelled using TRL's PC MOVA link. For modelling SCOOT, a software developed by Mott MacDonald which had already been calibrated and presented was used.

The models were developed for the peak periods. In VISSIM and Paramics the models were for 1.5 hours but the data collection for delays, travel times, etc occurred in the peak hour only. For all other tools only the peak hour was modelled.

## B.4 Modelling

Models were developed for both the 'before' and the 'after' signalisation case studies. No new site data were collected, and the models were validated and calibrated using the existing data available, which varied by site. Thus sites were validated on travel times taken from CJAMS or surveys available from SPECTRUM, videos (CCTV), throughputs, queue counts or turning counts (again available in SPECTRUM). CJAMS (Congestion and Journey-time Acquisition and Monitoring System) data are derived from in-car GPS data and are the basis for most of the congestion monitoring analysis undertaken within the West Midlands conurbation for Local Transport Plan (LTP) monitoring purposes. (SPECTRUM is a web-based system that hosts traffic data collected by the West Midlands local authorities and other parties.)

Each site was modelled for a single peak period and its adjacent intersections were also modelled.

## Appendix C Control strategies compared

Table AC.1 compares the four major available control strategies for signalised roundabouts:

- MOVA;
- SCOOT;
- Fixed-time UTC;
- Cableless Linking (CLF).

The table is intended to help designers choose the appropriate main and fallback strategies for their signalised roundabout design.

**Table AC.1 Comparison of MOVA, SCOOT, Fixed-time UTC and CLF**

Factor	MOVA	SCOOT	Fixed time UTC	CLF
<b>Variability of traffic flow</b>	<p>For use with any flow scenario.</p> <p>Responds rapidly to unpredictable and variable flows without user intervention.</p>	<p>For use with any flow scenario.</p> <p>Responds to unpredictable and variable flows – but less rapidly than MOVA – without user intervention.</p> <p>Coordination between signals responds to changing traffic flows, as measured by the detectors, but can be biased to favour preferred progression.</p>	<p>For use with predictable flows.</p> <p>Works satisfactorily with predictable flows.</p> <p>Time of day plans, and reserve operator plans, required for each flow scenario.</p> <p>Flow/turning counts and variable dated plans required.</p> <p>Ability to change timings remotely is system-dependent. Normatively can be changed on site.</p>	<p>For use with predictable flows.</p> <p>Works satisfactorily with predictable flows.</p> <p>Time of day plans, required for each flow scenario.</p> <p>Flow/turning counts and variable dated plans required.</p> <p>Ability to change timings remotely is system-dependent. Normatively can be changed on site.</p>
<b>Telecommunication requirement and cost</b>	<p>Low, but not a connection cost can be high fixed line has to be installed at remote sites.</p> <p>Remote data-up can be used for monitoring and data downloads. GSM may be possible with some equipment.</p>	<p>High for conventional systems. UTM systems can be much cheaper with private networks.</p> <p>Continuous communication.</p>	<p>High.</p> <p>Continuous communication.</p>	<p>Low.</p> <p>Remote data-up.</p>



Factor	MOVA	SCOOT	Fixed time UTC	CLF
<b>Approach speeds</b>	<p>'Cruise speeds' have to be measured to inform the dataset.</p> <p>MOVA proven to be safe at high-speed sites when adequately set up. Proven to reduce dilemma-zone events and red-running at so-called junctions. Copes with varying speed as vehicles approach the roundabout entry.</p>	<p>Changes in signal stage are not made with any reference to speed.</p> <p>If platoon progression is good, dilemma-zone events should be reduced compared with average.</p>	<p>Changes in signal stage are not made with any reference to speed.</p> <p>If platoon progression is good, dilemma-zone events should be reduced compared with average.</p> <p>Platoon progression may not always be as good as SCOOT</p>	
<b>Spare capacity</b>	<p>Responding to varying traffic demand means more effective use of the road space is made. Linking has to be good to ensure capacity at junctions can cope with peaks and troughs in flow.</p>	<p>Responding to varying traffic demand means more effective use of the road space is made.</p>	<p>The fixed signals have to be designed to ensure the capacity section remains comfortable with capacity and excess demand is stored on approaches.</p>	
<b>Distance between nodes</b>	<p>Death with party at the design stage and party during validation. Mode change may help resolve or at least assist with issues that may arise.</p>	<p>Valid for the longest links expected on any gyratory. Detector placement may be problematic on short links and longer links where there is a short distance between the previous exit and the stop line.</p>		<p>Death with party during the mode change (design) stage. Care needed, as TRANSYT does not (yet) model blocking back.</p>

Factor	MOVA	SCOOT	Fixed time UTC	CLF
<b>Detector location and type</b>	Two detectors per lane normally required, with the upstream-most IN-detectors located approx 80 to 120 metres from the stop line. These need to be inductive loop-type detectors. Add tone queue detect on key to be needed (possible to double up MOVA detectors as queue detectors). Stop-line demand detectors necessary on some approaches.	One detector per pair of lanes required, but may be better with one per lane. Detectors positioned to avoid detecting exiting traffic and delay downstream of weaving movements. These should be inductive loop detectors, but tone may be possible to use purpose-built above-ground detectors. Add tone queue detect on key to be needed (possible to double up SCOOT detectors as queue detectors). Stop-line demand detectors can be used, and stages can be demand-dependent. Stop-line demand detectors can be above ground (and there are various technologies that are available for this).	Detectors are not normally used, but it is possible to use queue detectors for pedestrian detection purposes.	Stop-line demand detectors can be used so that stages can be made to be demand-dependent. Stop-line demand detectors can be above ground (and there are various technologies that are available for this).
<b>Control room intervention</b>	MOVA has not been designed for manual intervention. A format MOVA data sets can be downloaded, but this is not recommended during normal operation, unless the operator is very experienced.	Mostly, SCOOT will not require manual intervention. However, this is possible for times when SCOOT needs some help in dealing with an incident or some other problem when the SCOOT data will not correctly represent the road network currently available for vehicles.	At important roundabouts, manual intervention is key to be necessary. A repository of signals should have been prepared to deal with various possible scenarios. Operators can choose to run any plan from the control room, or override signals in any way they choose.	CLF is not designed for user intervention, but data-up systems exist that have facilities for making changes, for example downloading signal plans or switching to a format stored plans. Synchronisation of the changes is key to be an issue.

Factor	MOVA	SCOOT	Fixed time UTC	CLF
<b>Implementation costs</b>	MOVA equipment will be required with each unit able to control two streams with one controller. Requires two detectors for most lanes, including the IN detectors placed about 8 seconds cruise time from the stop line. Stage controllers need to be cabed to and from each signal controller. Communications and data on requirements are high and may require specific RS485 cabling between nodes. Needs no additional detection for any fallback strategy.	Overall costs depend on whether SCOOT is a ready used and can be extended to the network question. OTUs (Outstation Transmissions Unit) and data transmissions (though the major cost is in rental). Fewer detectors required as compared with MOVA, but may need to be placed even further upstream. Validation and communications on requirements similar to MOVA. May need VA detection to provide a fallback strategy.	Overall costs depend on whether a UTC system exists and can be extended to the network question. OTUs and data transmissions required (though the rental is a major cost). Detection is not required (but may be used for monitoring purposes and can be used for automatic plan changes). VA detection may be required to provide fallback functionality and a strategy for night-time operation.	CLF is normally part of any signal controller and not an extra cost option. VA detection is usually required to provide night-time operation strategy and for demand-dependency. Phones usually required for monitoring purposes and to update signal plans when necessary.
<b>Maintenance and running costs</b>	Large number of detectors, but should be essential to damage due to streetworks than in an urban area.	Medium number of detectors (large number of VA provided for fallback), but should be essential to damage resulting from streetworks than in an urban area. Communications costs can be significant.	Expensive to maintain fixed-time plans for efficient control. Communications costs can be significant.	Expensive to maintain fixed-time plans for efficient control.
<b>Integration with surrounding signals</b>	Normally operate independently of surrounding signals. May provide links for pedestrian crossings close to roundabout as part of overall design.	Can coordinate with surrounding signals where advantageous, a though cycle time for roundabout may be less than normal for surrounding network, which may limit the potential linking opportunities.	Can coordinate with surrounding signals where advantageous, a though cycle time for roundabout may be less than normal for surrounding network. Will not have benefit of traffic responsive control that SCOOT has.	
<b>Partial/full signalisation</b>	Design, part of a variety of intergreens, needs to consider the requirements of un-signalised approaches.			



Factor	MOVA	SCOOT	Fixed time UTC	CLF
<b>Intervention facilities</b>	Not normally expected to need intervention; intervention should be very difficult and not likely to have any great effect.	Not normally expected to need intervention; intervention should be understood or needs prepared set of actions to be implemented.	Intervention strategies straightforward, but fixed-time key to need intervention to deal with unusual situations.	Intervention should be avoided and the downward of a terminal signposts. Intervention may be necessary to deal with unusual situations.
<b>Public transport and emergency vehicle priority</b>	Available, but would need to be very carefully configured because of the potential problems with emergency vehicle priority over ordinary traffic.  Emergency vehicle priority should be expected to cause problems because of much less frequent operation than public transport priority.	Not provided commercially, TfL (Transport for London) has a custom development for its own use. Hurryca should be used, but not recommended because of potential severe disruption of roundabout.	Hurryca should be used, but not recommended because of potential severe disruption of roundabout.	Hurryca should be used, but not recommended because of potential severe disruption of roundabout.
<b>Cycle time requirements, roundabouts require short cycle times</b>	Linked junctions may need to be constrained or even included in a single stream so that they operate on a similar cycle time.	A nodes roundabout operate on same cycle time.		
<b>Data collection and performance monitoring</b>	Data can be stored in assessment logs. The logs can be remotely accessed with some systems.	Available as standard in the control centre, but quality of data depends on the accuracy of the validation.  Raw congestion data provides an independent check on problems. A data can be stored in an ASTRID database.	No detectors, therefore no information. Where queue logs are used for clearance plans, the operation of the clearance plans could be monitored in the control room.	Little if any. Remote monitoring facilities vary. Detector counts from some, mean occupancy time of any queue detectors from others.

Factor	MOVA	SCOOT	Fixed time UTC	CLF
<b>Resourcing – design, commissioning, validation</b>	<p>A require O-D survey to design and consequent signing and marking, high resource requirement. Having collected O-D data, it is recommended that TRANSYT or LNSg is run to help design link for MOVA and based offsets for SCOOT. TRANSYT or LNSg is essential for fixed-time UTC and CLF.</p> <p>High: specific condition on link to implement link, on-street via data.</p>	<p>High: on-street validation of SCOOT parameters and setting up traffic management facilities.</p>	<p>Medium: check and tuning a fixed-time plans.</p>	
<b>Resourcing – maintenance</b>	<p>Low, urban traffic patterns change such that new weaving movements affect validity of interpretation of detector data.</p>		<p>High to update fixed-time plans.</p>	

**This Local Transport Note seeks to provide assistance to those involved in the design and operation of signalised roundabouts. This includes roundabouts to which signals have been added, as well as junctions designed as signalised roundabouts from the outset. It does not offer 'model solutions', but aims to help the designer by identifying the issues that need to be addressed and providing guidance on how they can be dealt with.**

ISBN 978 0 11 553054 8

£27



ISBN 978-0-11-553054-8







## **ANNEX B - Drawing HE551494-GTY-HGN-000-DR-CH-38004**



This drawing should not be relied on or used in circumstances other than those for which it was originally prepared and for which Sweco UK Ltd was commissioned. Sweco UK Ltd accepts no responsibility for this drawing to any party other than the person by whom it was commissioned. This drawing has been prepared on behalf of Galliford Try by Sweco UK Ltd for the titled project or named part thereof and should not be relied upon or used for any other project without an independent check being carried out as to its suitability and prior written authority of Galliford Try being obtained. Sweco UK Ltd accepts no responsibility or liability for the consequences of this drawing being used for a purpose other than the purposes for which it was commissioned. Any person using or relying on this drawing for such other purpose agrees, and will by such use or reliance be taken to confirm his/her agreement, to indemnify Sweco UK Ltd for all loss or damage resulting therefrom.

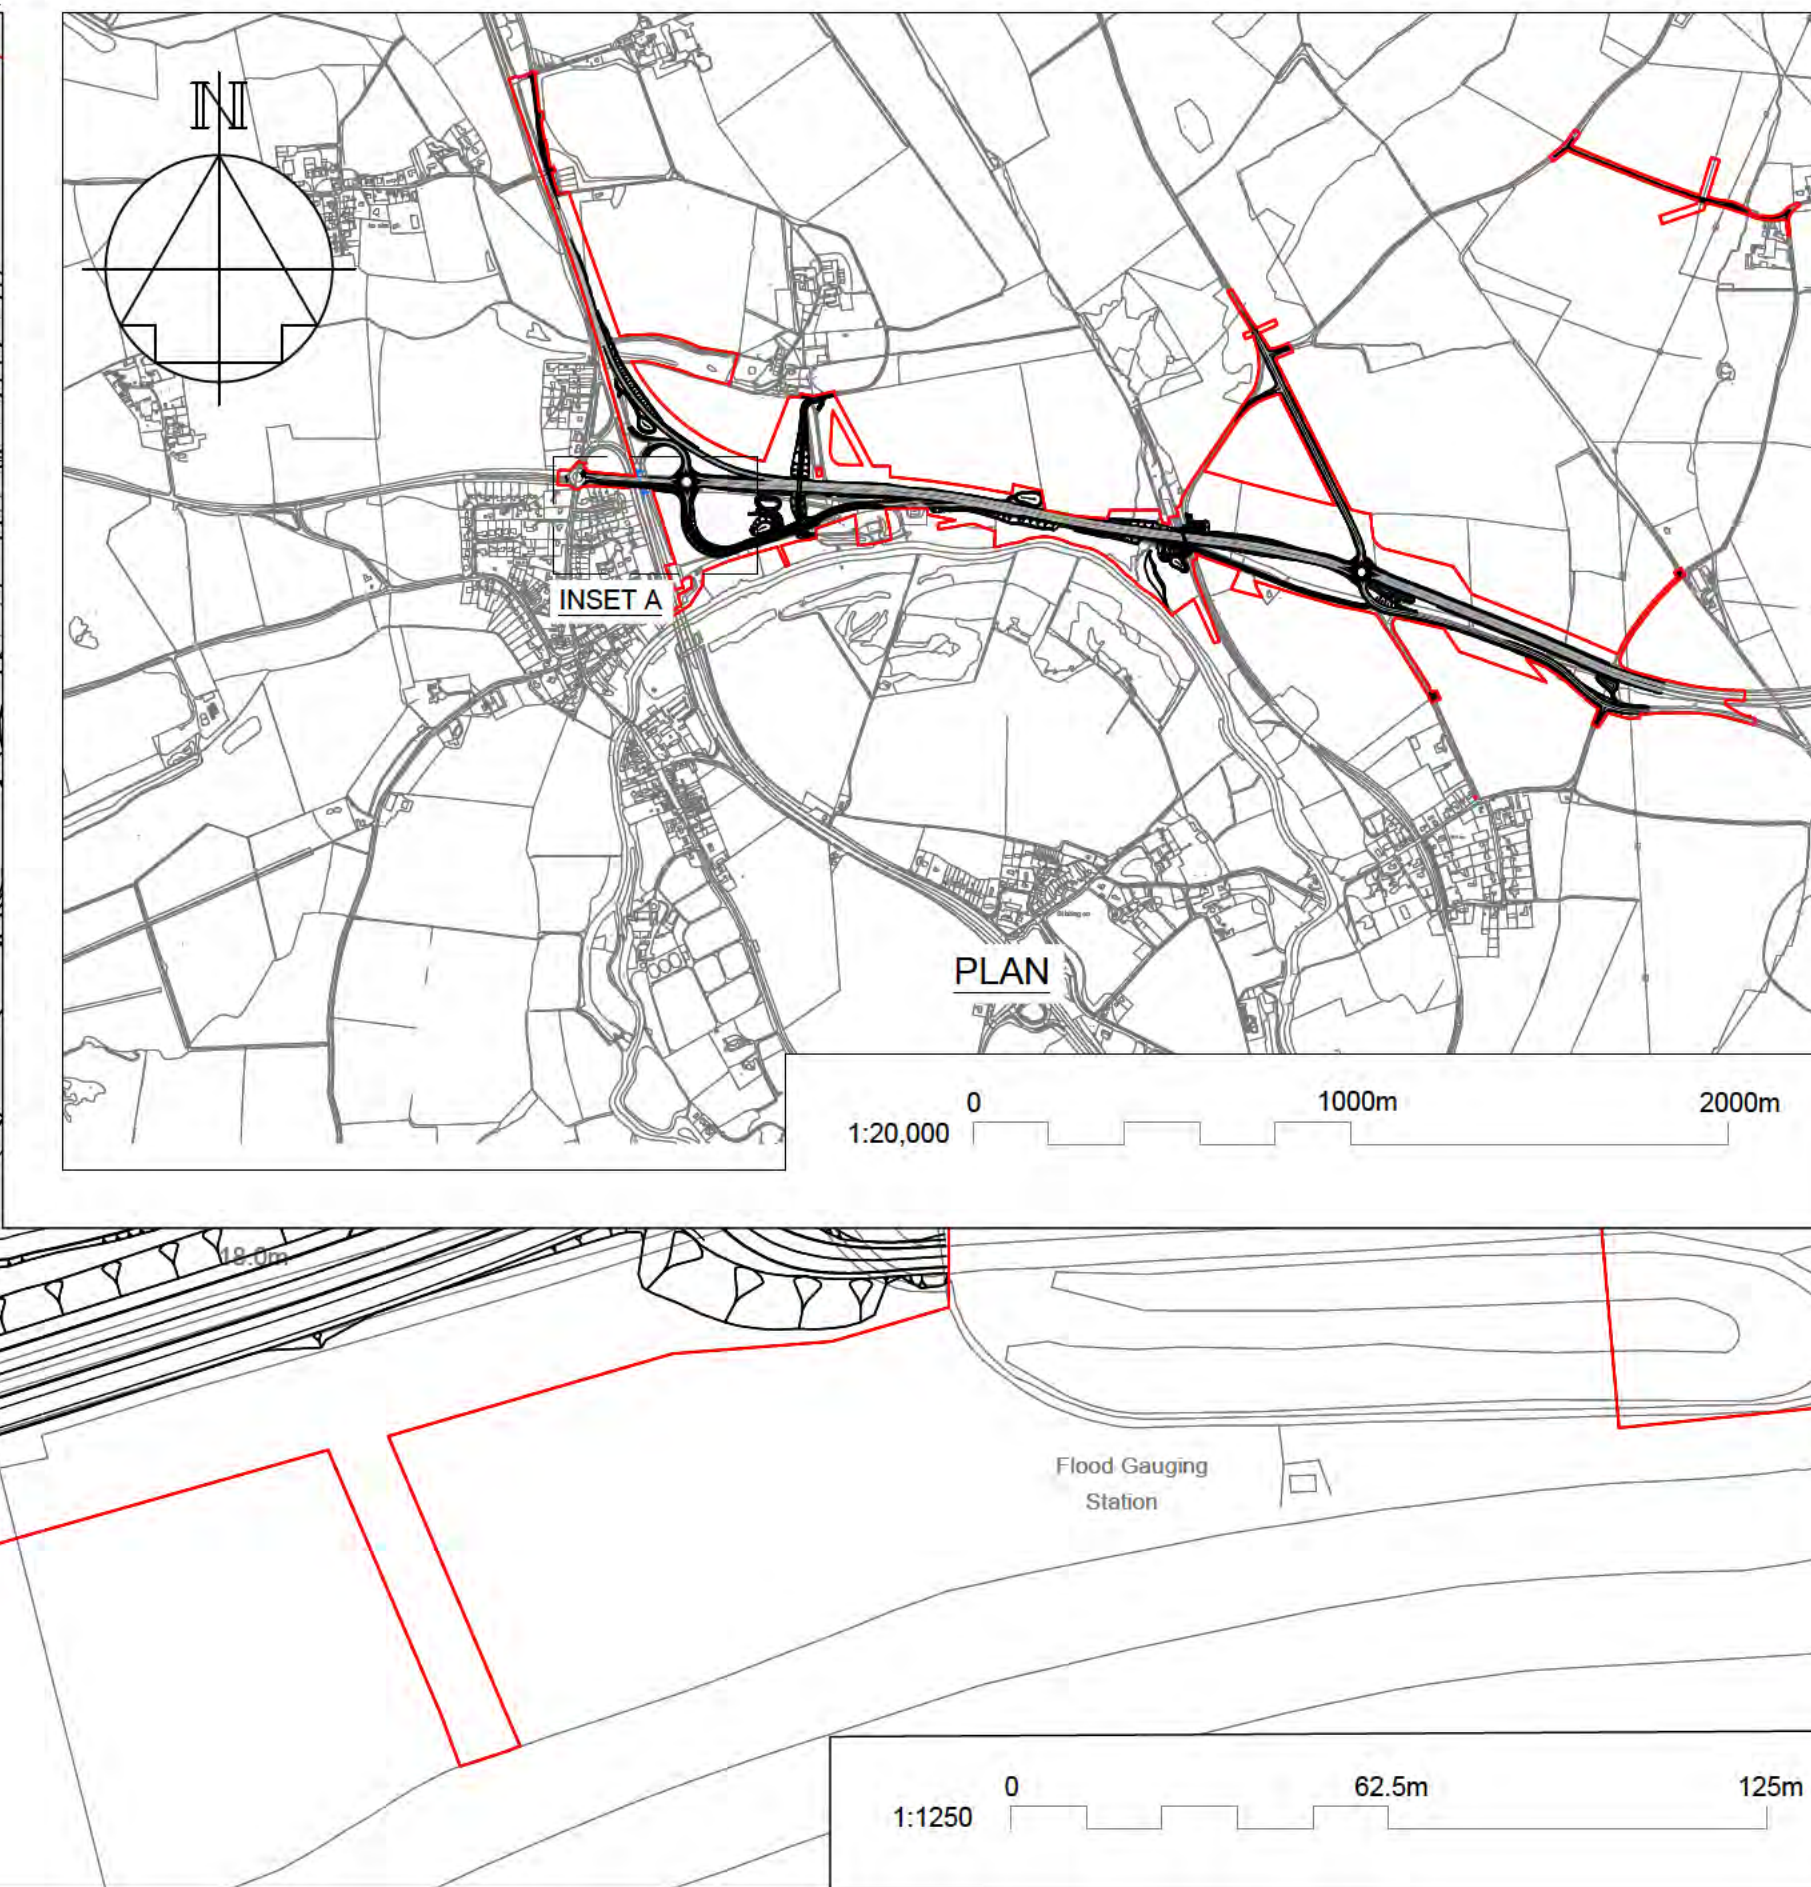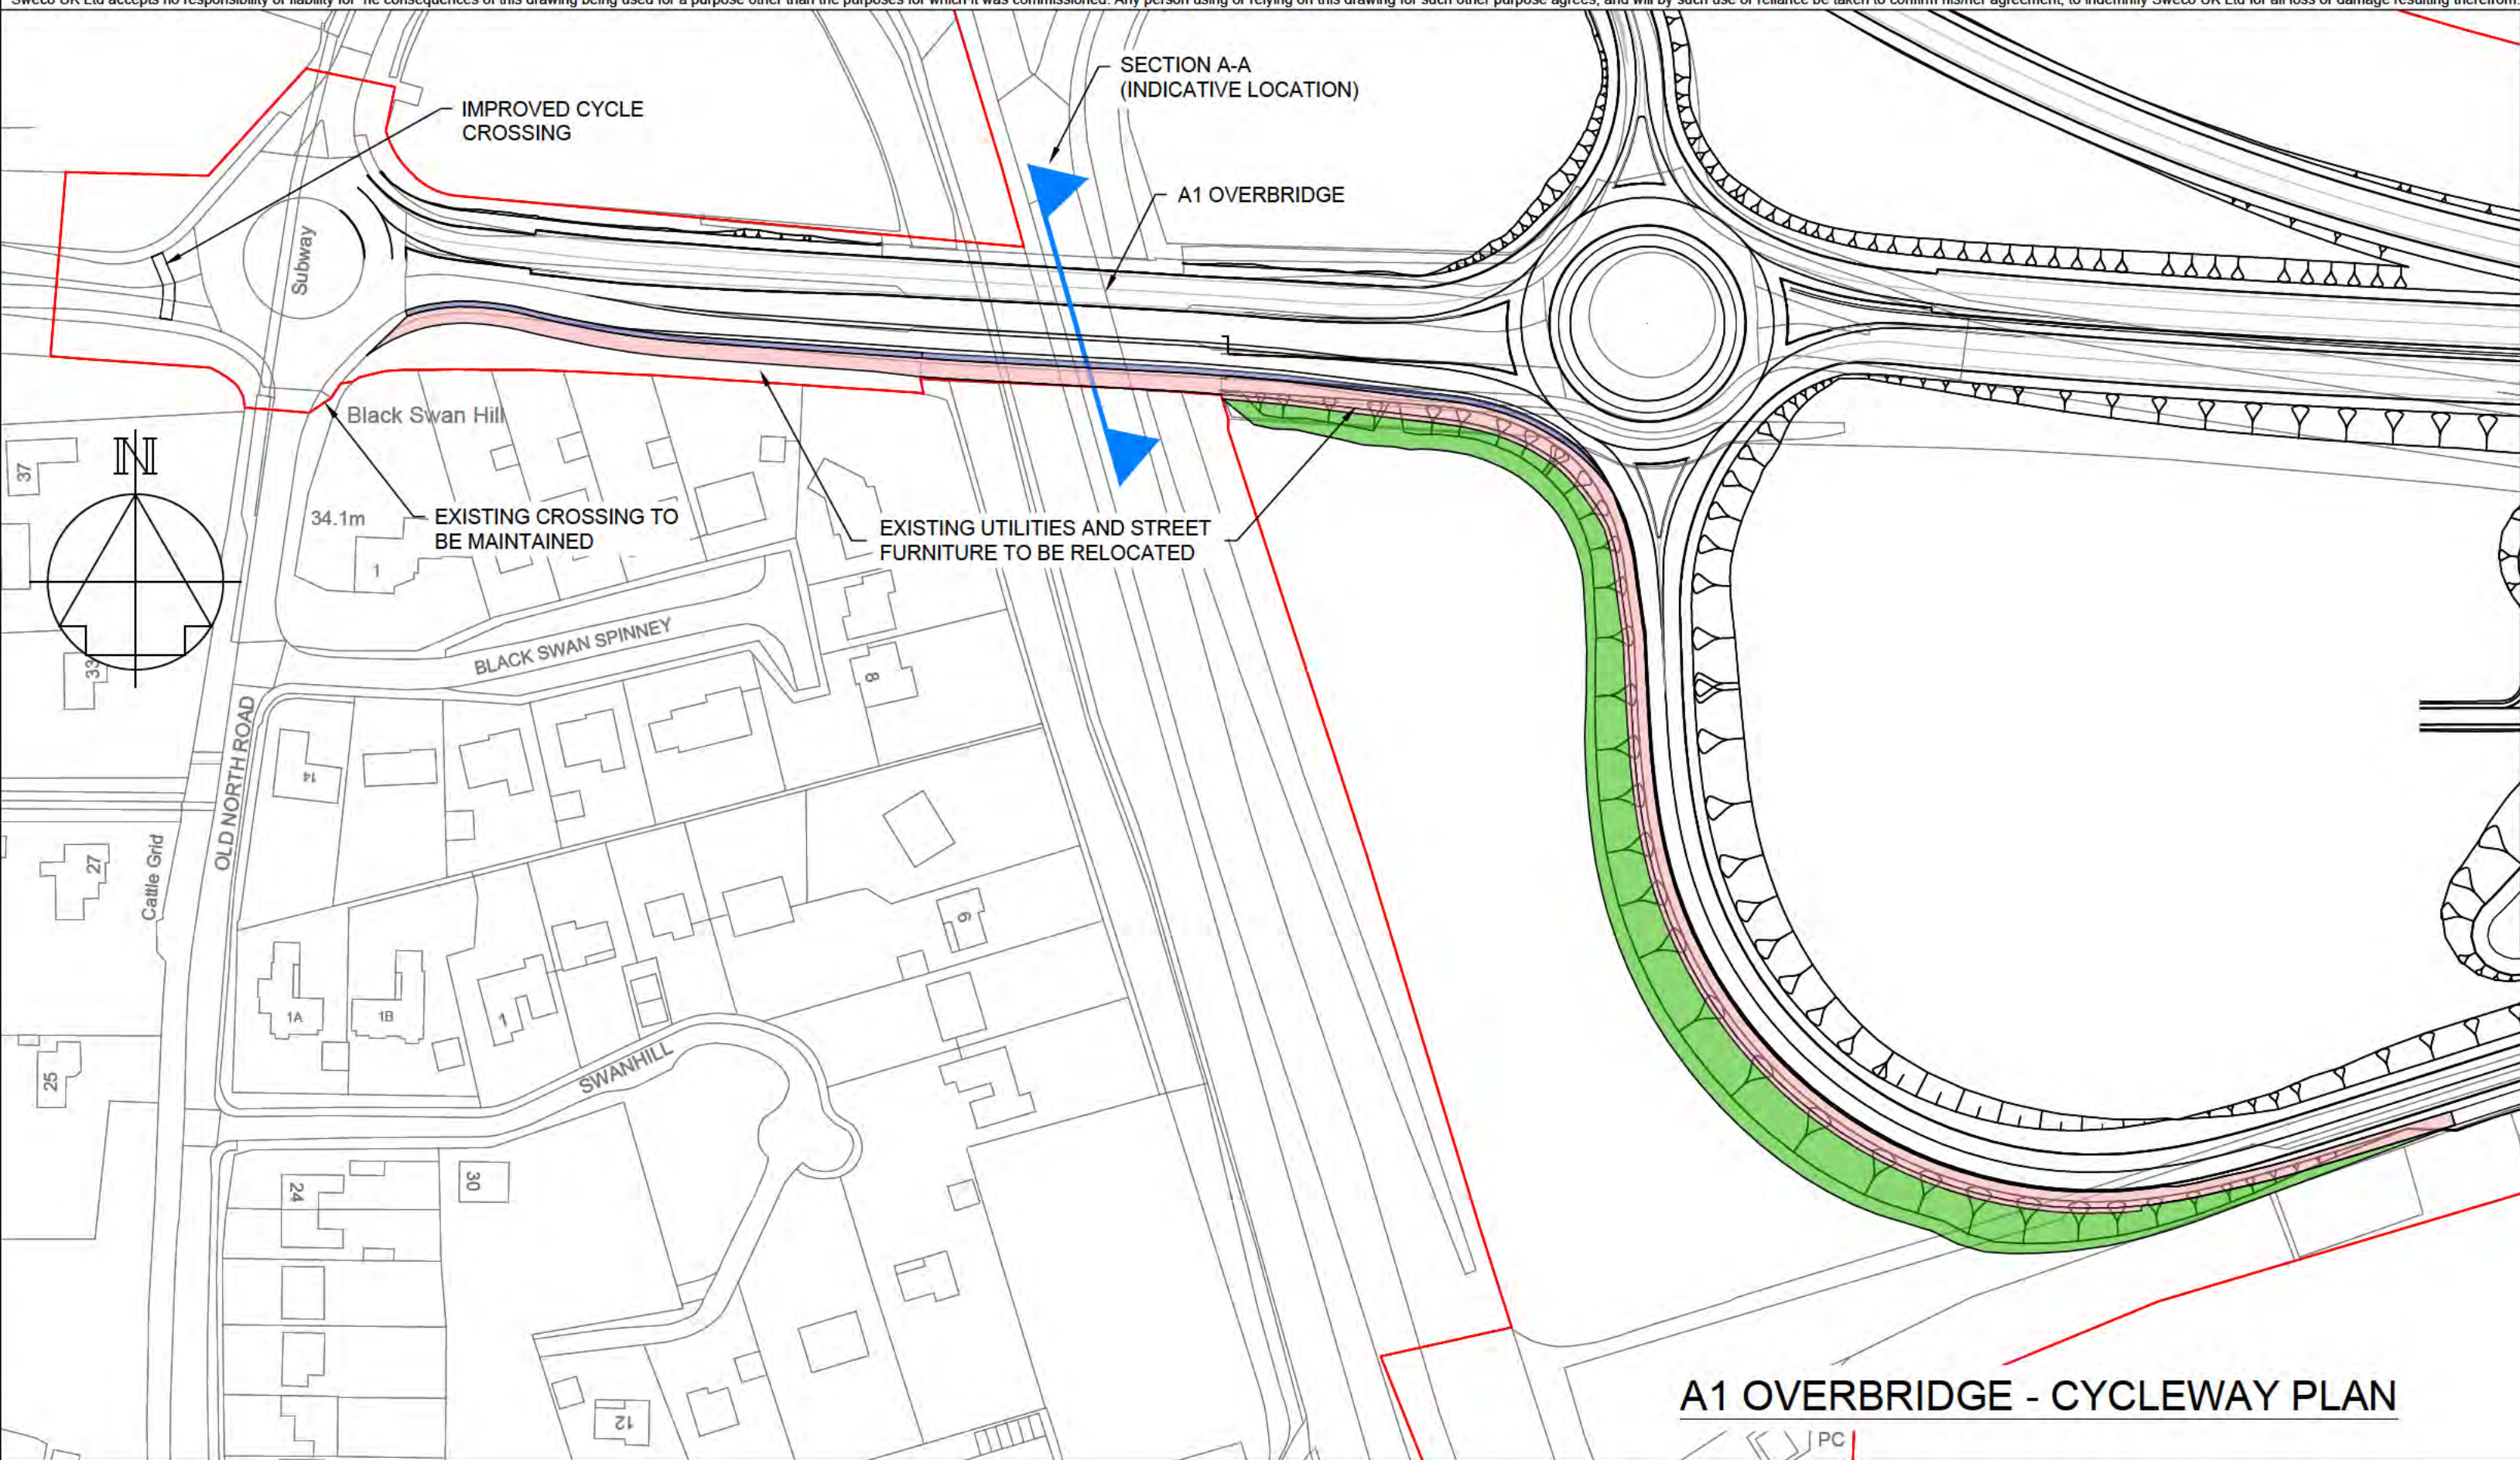

**NOTES**

Purpose of use  
**FOR DCO SUBMISSION**



Development Consent Order Number / Document  
**TEST123456789**

- ALL DIMENSIONS ARE IN METRES UNLESS STATED OTHERWISE
- EXACT HEIGHT OF EXISTING BRIDGE PARAPET TO BE CONFIRMED FOR RETENTION.
- ADDITIONAL WIDTHS FOR VERTICAL FEATURES WITHIN CYCLEWAY\*

**KEY TO SYMBOLS**

- EXISTING BRIDGE CROSS SECTION
- PROPOSED CYCLEWAY CROSS SECTION
- WORKING WIDTH OF BARRIER
- SET-BACK OF BARRIER
- HARD STRIP
- PROPOSED CYCLEWAY
- PROPOSED RAISED VERGE (HARD)
- PROPOSED EARTHWORKS

REV	DATE	REVISION NOTE	ORG	CHKD	APPD
P01.02					

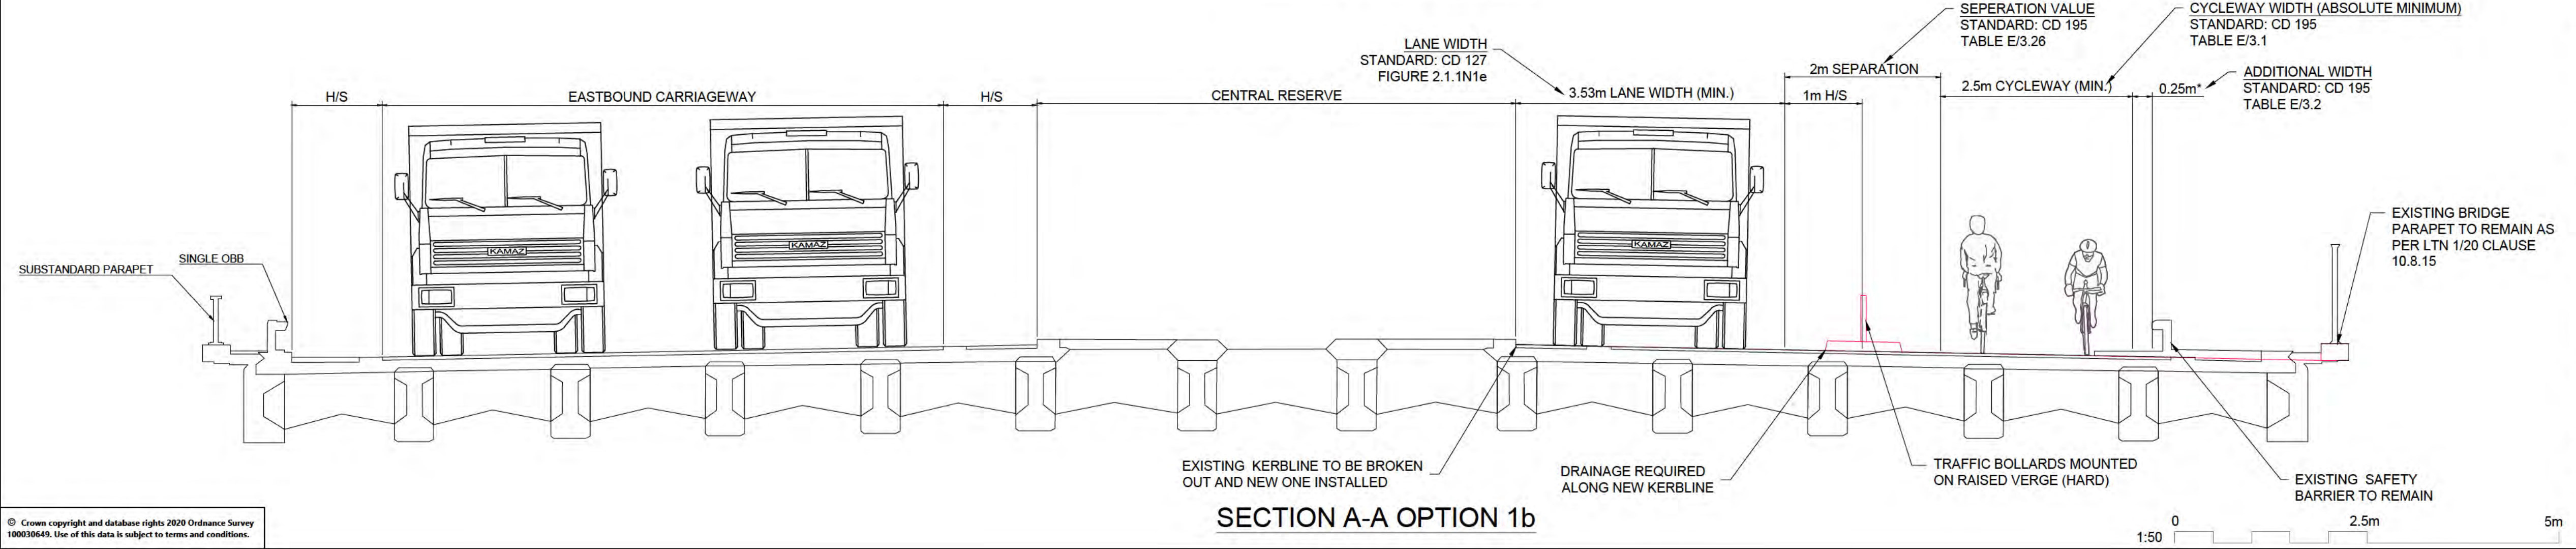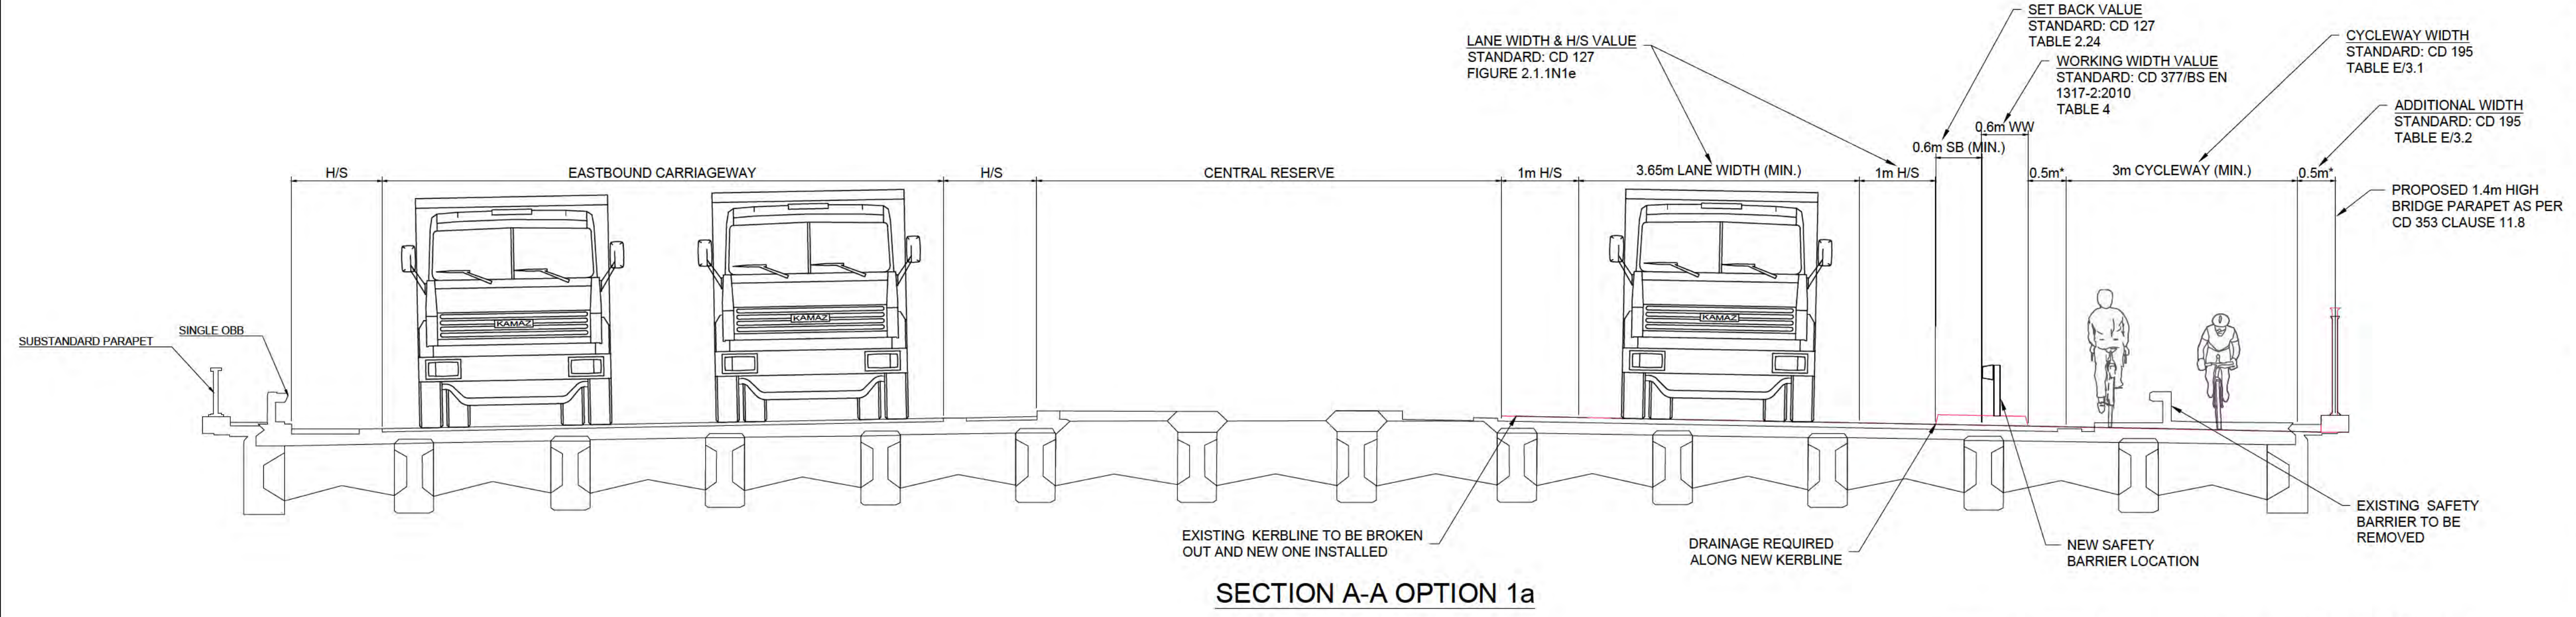

DESIGNER  
**SWECO**

CONTRACTOR  
**GallifordTry**

CLIENT  
**highways england**

PROJECT TITLE  
**A47 WANSFORD TO SUTTON DUALLING**

PROJECT STAGE  
**PCF STAGE 4**

DRAWING TITLE  
**A47 WANSFORD TO SUTTON  
A1 OVERBRIDGE CYCLEWAY**

SUITABILITY  
**WORK IN PROGRESS**

SHEET SIZE	SCALE	STATUS	REVISION
A1	AS SHOWN	S0	P01.02

DRAWING NUMBER  
**HE551494-GTY-HGN-000-DR-CH-38004**