The Great Grid Upgrade

BT-NG-020621-545-0144

Bramford to Twinstead Reinforcement

Volume 8: Examination Submissions

Document 8.3.6.4 (B): Draft Statement of Common Ground East Anglia Three Limited

Final Issue B December 2023

Planning Inspectorate Reference: EN020002

TWINSTEAD

The Infrastructure Planning (Examination Procedure) Rules 2010 Regulation 8(1)(e)

LAMARSH

ALTER ON

nationalgrid

Page intentionally blank

Version History			
Date	Issue	<u>Status</u>	Description / Changes
25 September 2023	A	<u>Final</u>	Deadline 1 SoCG. The subject of this SoCG was previously contained in the Draft Statement of Common Ground TC East Anglia One OFTO Limited and East Anglia Three Limited [APP-174].
			However, the transmission assets of the East Anglia One Windfarm were subsequently transferred to TC East Anglia One OFTO Limited, who are now the Transmission Licence holder for these assets. Since the divestment of East Anglia One from Scottish Power Renewables (SPR), the Applicant has been engaging with the new licence holder. Meanwhile, the East Anglia Three project remains wholly owned by SPR.
			As such, the submission SoCG [APP-174] has been split into two separate SoCG to reflect the two discrete projects and Licence holders.
1 December 2023	B	Final	An updated SoCG has been provided at Deadline 5. This SoCG reflects the latest position with East Anglia Three Limited, which since the Deadline 1 SoCG, the Applicant has issued Heads of Terms in respect to an Interface Agreement to manage the parties respective projects.

Contents

1.	Introduction	1
1.2	Description of the Project	1
1.3	Project Programme	2
1.4	This Statement of Common Ground	3
2.	Record of Engagement	4
2.1	Role of the Consultee in the Process	4
2.2	East Anglia Three	4
2.3	Project Interface	5
2.4	Summary of Pre-Application Discussions	6
2.5	Summary of Post-Submission Discussions	7
3.	Matters Agreed	8
4.	Matters Not Agreed	9
5.	Matters Under Discussion	10
6.	Approvals	11
Refe	erence List	12
	Table 2.1 – Pre-application discussions	6
	Table 2.2 – Post-submission discussions Table 4.1 – Matters not agreed	7 9
	Table 5.1 – Matters under discussion	10

1. Introduction

- 1.1.1 A Statement of Common Ground (SoCG) is a written statement produced as part of the application for development consent and is prepared jointly between the applicant and another party. It sets out matters of agreement between both parties, as well as matters where there is not an agreement. It also details matters that are under discussion.
- 1.1.2 The aim of a SoCG is to help the Examining Authority manage the examination phase of the application. Understanding the status of the matters at hand will allow the Examining Authority to focus their questioning, and provide greater predictability for all participants in examination. A SoCG may be submitted prior to the start of or during examination, and then updated as necessary or as requested during the examination phase.
- 1.1.3 This SoCG is between National Grid <u>(the Applicant)</u> and East Anglia Three Limited <u>(the Consultee)</u> relating to the application for development consent for the Bramford to Twinstead reinforcement ('the project'). This SoCG has been prepared in accordance with the guidance for the examination of applications for development consent for Nationally Significant Infrastructure Projects (NSIP) (Planning Act 2008) published by the Department of Communities and Local Government (Department for Communities and Local Government, 2015).
- 1.1.4 This SoCG has been prepared to identify matters agreed and matters currently outstanding between National Grid and East Anglia Three Limited in respect to the Bramford to Twinstead reinforcement and the East Anglia Three project only. The SoCG will evolve as the application progresses through examination.
- 1.1.5 The subject of this SoCG was previously contained as part of the Development Consent Order (DCO) submission in the Draft Statement of Common Ground TC East Anglia One OFTO Limited and East Anglia Three Limited [**APP-174**], as Scottish Power Renewables (SPR) owned both projects. However, the transmission assets of the East Anglia One Windfarm were subsequently transferred to TC East Anglia One OFTO Limited, who are now the Transmission Licence holder for these assets.
- 1.1.6 Since the divestment of East Anglia One from SPR, National Grid has been engaging with the new licence holder and as such, this SoCG relates to East Anglia Three only and a separate SoCG is being progressed with TC East Anglia One OFTO Limited. The East Anglia Three project remains wholly owned by SPR.
- 1.1.7 Both the separate/-standalone SoCG, <u>which wereare</u> provided at Examination Deadline 1, <u>and</u>-supersede<u>ds</u> the version submitted in April 2023 at application stage (Draft Statement of Common Ground TC East Anglia One OFTO Limited and East Anglia Three Limited [**APP-174**]).

1.2 **Description of the Project**

1.2.1 This document supports National Grid's The Applicant has submitted an application for an order granting development consent to reinforce the transmission network between the existing Bramford Substation in Suffolk, and Twinstead Tee in Essex. This would be achieved by the construction and operation of a new electricity transmission line over a distance of approximately 29km. The project meets the threshold as a NSIP, as defined under Part 3 of the Planning Act 2008, hence National Grid requires a DCO.

- 1.2.2 The reinforcement would comprise approximately 18km of overhead line (consisting of approximately 50 new pylons, and conductors) and 11km of underground cable system (with associated joint bays and above ground link pillars).
- 1.2.3 Four cable sealing end (CSE) compounds would be required to facilitate the transition between the overhead and underground cable technology. The CSE would be within a fenced compound, and contain electrical equipment, support structures, control building and a permanent access track.
- 1.2.4 Approximately 27km of existing overhead line and associated pylons would be removed as part of the proposals (25km of existing 132kV overhead line between Burstall Bridge and Twinstead Tee, and 2km of the existing 400kV overhead line to the south of Twinstead Tee). To facilitate the overhead line removal, a new grid supply point (GSP) substation is required at Butler's Wood, east of Wickham St Paul, in Essex. The GSP substation would include associated works, including replacement pylons, a single circuit sealing end compound and underground cables to tie the substation into the existing 400kV and 132kV networks.
- 1.2.5 Some aspects of the project, such as the underground cable sections and the GSP substation, constitute 'associated development' under the Planning Act 2008.
- 1.2.6 Other ancillary activities would be required to facilitate construction and operation of the project, including (but not limited to):
 - Modifications to, and realignment of sections of existing overhead lines, including pylons;
 - Temporary land to facilitate construction activities including temporary amendments to the public highway, public rights of way, working areas for construction equipment and machinery, site offices, welfare, storage and access;
 - Temporary infrastructure to facilitate construction activities such as amendments to the highway, pylons and overhead line diversions, scaffolding to safeguard existing crossings and watercourse crossings;
 - Diversion of third-party assets and land drainage from the construction and operational footprint; and
 - Land required for mitigation, compensation and enhancement of the environment as a result of the environmental assessment process, and National Grid's commitments to Biodiversity Net Gain.

1.3 **Project Programme**

1.3.1 It is assumed that the GSP substation and the associated works would take approximately 18 months to construct and this would take place in advance of development consent being granted. The main overhead line/underground cable works are proposed to commence in mid-2024, starting with first site access and compound set up and then be completed in mid-2028. Reinstatement and landscape planting would then take place until mid-2029.

1.4 This Statement of Common Ground

- 1.4.1 For the purpose of this SoCG, National Grid <u>(the Applicant)</u> and East Anglia Three Limited will jointly be referred to as the 'Parties'. When referencing to East Anglia Three Limited alone, they will be referred to as 'the Consultee'.
- 1.4.2 Throughout the SoCG:
 - Where a section begins 'Matters Agreed', this sets out matters that have been agreed between the Parties and where there is no dispute.
 - Where a section begins 'Matters Not Agreed', this sets out matters that are not agreed between the Parties and where a difference of opinion remains.
 - Where a section begins 'Matters Under Discussion', this sets out matters that are subject to further negotiation between the Parties.
- 1.4.3 This SoCG is structured as follows:
 - Section 1 provides an introduction to this SoCG and a description of its purpose.
 - Section 2 states the role of the Consultee in the DCO application process and details engagement undertaken between the Parties.
 - Section 3 sets out matters agreed between the Parties.
 - Section 4 sets out matters not agreed between the Parties.
 - Section 5 sets out matters where agreement is currently outstanding between the Parties.
 - Section 6 includes the signing off sheet.
- 1.4.4 It should be noted that this SoCG does not seek to agree the acceptability of the Consultee's development(s), but it will set out an approach as to how the Consultee's development(s) will be managed in the context of the project and the powers granted by the DCO, in respect to the Bramford to Twinstead reinforcement and the East Anglia Three project only.
- 1.4.5 This SoCG has been <u>updated submitted</u> at Examination Deadline <u>5 (1 December 2023)</u>4 and supersedes the version submitted in April 2023 at <u>the</u> application stage (Draft Statement of Common Ground TC East Anglia One OFTO Limited and East Anglia Three Limited [**APP-174**]) and the version submitted at Deadline 1 (Draft SoCG East Anglia Three Limited [**REP1-031**].

2. Record of Engagement

2.1 Role of the Consultee in the Process

- 2.1.1 East Anglia Offshore Wind Limited was originally a joint venture owned equally by SPR (UK) Limited and Vattenfall Wind Power Ltd. East Anglia Offshore Wind Limited has a Zone Development Agreement with The Crown Estate to develop approximately 7.2 gigawatts (GW) of offshore wind projects off the coast of East Anglia. East Anglia Offshore Wind has renamed this Zone the East Anglia Zone.
- 2.1.2 However, the transmission assets of the East Anglia One Windfarm have been transferred to TC East Anglia One OFTO Limited, and TC East Anglia One OFTO Limited is now the Transmission Licence holder for these assets. Since the divestment of East Anglia One from SPR, National Grid<u>the Applicant</u> has been engaging with the new licence holder company.

2.2 East Anglia Three

- 2.2.1 The East Anglia Three project is the second project to be developed within the East Anglia Zone and comprises an offshore windfarm consisting of up to 100 offshore wind turbines and associated infrastructure, located approximately 69km from the Suffolk Coast. The East Anglia Three project includes an onshore cable route to transport energy to a convertor station in Bramford, adjacent to the existing National Grid<u>the Applicant</u> and East Anglia One's substations at Bramford Substation. A plan showing East Anglia Three's Order Limits within the proximity of Bramford Substation is contained at **Appendix 1**.
- 2.2.2 In respect to the East Anglia Three project, the high-level project timeline is summarised as follows:
 - An application for development consent was submitted to the Planning Inspectorate in November 2015.
 - On 28 March 2017 the Planning Inspectorate issued a report of recommendation to the SoS for BEIS. The SoS approved the application for consent on 7 August 2017.
 - In June 2019 BEIS approved a non-material change to increase the overall capacity of the windfarm to 1,400MW.
 - In April 2021 BEIS approved a second non-material change to reduce the number of offshore substations to one and to decrease the number of wind turbines and increase their hub height and rotor radius.
 - In August 2021 a third non-material change was submitted to remove the maximum generating capacity of 1,400MW and to decrease the number of wind turbines and increase their height and rotor radius.
 - Onshore construction began in July 2022 and is ongoing.
- 2.2.3 The East Anglia Three project is wholly owned by the Consultee (SPR) and remains the sole subject of this SoCG.

2.3 **Project Interface**

- 2.3.1 The project would contain and/or involve development works that relate to the removal/installation of overhead lines on/or in close proximity to elements of the Consultee's proposed and existing developments at Bramford near Bramford Substation, including the installation of new shunt reactors to maintain the electrical operating parameters of the 400kV network and gantry structures to connect the overhead line into the substation. This work would take place within the boundaries of National Grid<u>the Applicant</u>'s operational land.
- 2.3.2 The proposed 400kV overhead line would tie into the existing substation on the western boundary. This would require the realignment of the existing 400kV overhead line and a new angle pylon, near Hill Farm to connect into Bramford Substation. The existing 400kV overhead line to the north-east of Hill Farm would be removed (comprising three pylons and the intervening spans of conductors).
- 2.3.3 The following list provides details of the proposed development works, that would be required pursuant to the project and as detailed on Sheet 1 General Arrangement Plan (see **Appendix 2**). These works may interface with the Consultee's proposals in this location, as the works also fall within the Order Limits for the East Anglia Three project:
 - The removal of a short section of the existing 400kV overhead line including two pylons 4YL002 and 4YL003;
 - Realignment of the existing 400kV line (removal of the section of line extending northwest from the substation (green line) and replacement of line extending to the southwest from Bramford (grey line);
 - Moving the existing 400kV overhead line (downleads and conductors) from the northern gantry;
 - Constructing the two 400kV overhead lines to both come into the two western gantries;
 - Switchgear; and
 - Shunt reactors on the southern line (one for each circuit, needed due to the underground cable section down the line).
- 2.3.4 The technical interface between the respective projects is currently being determined during on-going discussions. The interface chiefly comprises the removal of three spans of overhead line; the existing SuDs pond and it being a potential receptor for run off during demolition and construction; the proposed accesses including the access from Bullen Lane and East Anglia Three's access to the SuDs pond; works within the substation itself and the proposed cables between the converter station (East Anglia Three) to the existing National Grid substation.
- 2.3.5 National Grid<u>The Applicant</u> has also considered whether the proposed works at Bramford Substation pursuant to the project would likely impact on the proposed landscape planting north of Bramford Substation associated with the East Anglia Three Converter Station. This landscape planting is proposed as part of the East Anglia Three Order Requirements to mitigate landscape and visual impacts of the Converter Station. An interface plan showing the overlap of the Parties' projects is contained at **Appendix 3**.
- 2.3.6 However, it appears that the proposed landscape planting is contained to the north/northwest of the Order Limits for the project and there does not appear to be an interface between the Parties' projects, as demonstrated by the East Anglia Three approved landscaping proposals at **Appendix 4**.

2.4 Summary of Pre-Application Discussions

2.4.1 Table 2.1 summarises the consultation and engagement that has taken place between the Parties prior to submission of the application.

Date	Subject	Discussion Points
21 March 2022	Written response to Statutory Consultation	The Consultee responded to National Gridthe Applicant's Statutory Consultation in the capacity of both East Anglia One and East Anglia Three. The Consultee drew a distinction between East Anglia One & Three, identified their land interests and advised that the project (as proposed at the time) was likely to impact on the Consultee's existing planting implemented as part of East Anglia One's Order Requirements to mitigate landscape and visual impacts associated with the Converter Station. In addition, the Consultee requested that matters in respect to cumulative effects between the projects were fully considered in any cumulative effects assessment, including traffic and transport, landscape, ecology, water resources and noise. See written response at Appendix 5 .
14 April 2022	Consultee's Statutory Consultation feedback	Meeting between National Gridthe Applicant and the Consultee, focussed on the Consultee's Statutory Consultation feedback, particularly in respect to the implications of the Consultee's existing landscaping, SUDS pond, access, and cumulative effects. Issues discussed included whether a proposed construction compound to the south-west of the Consultee's converter station can be moved, and access routes rationalised.
20 June 2022	Introductions	Follow-up email from the <u>National Gridthe Applicant</u> Consents Officer to initiate further discussions of the relative projects with a view of progressing a SoCG.
10 August 2022	Project interface	Virtual meeting with the Consultee's Consents Compliance Managers and to follow up on introductory emails and discuss the relative projects with a view of progressing a SoCG.
23 August 2022		A follow up email from the meeting held on 10 August 2022, providing National Gridthe Applicant to a link in respect to the landscaping Discharge of Requirements in respect to East Anglia Three for the area around Bramford Substation.
29 September 2022		Following the Consultee's feedback at Statutory Consultation, it was reported to the Consultee's Consents Compliance Managers that a number of changes to the proposals around Bramford Substation had been implemented to reduce the impact on the Consultee's landscape planting southwest of the East Anglia One's Substation. It was also advised that the targeted consultation was open for responses.
10 October 2022	Consultee's written response to Targeted Consultation	The Consultee responded to National Gridthe Applicant's Targeted Consultation advising that they were pleased to see a number of changes implemented following the Statutory Consultation. In addition, the Consultee requested that matters in respect to cumulative effects between the projects were fully considered in any cumulative effects assessment, including traffic and transport, landscape, ecology, water resources and noise. The Consultee also

Table 2.1 – Pre-application discussions

		encouraged on-going discussions to inform any SoCG. See response contained at Appendix 6 .
18 January 2023	Head of Development to	Email from the Consultee's Head Of Development advising that the Transmission Assets of The East Anglia One Windfarm have been transferred to TC East Anglia One OFTO Limited. As of this date TC East Anglia One OFTO Limited is the Transmission Licence holder for these assets.
20 January 2023	Draft SoCG	Email to Consultee with the Draft SoCG attached to initiate further discussions.

2.5 Summary of Post-Submission Discussions

Table 2.2 summarises the consultation and engagement that has taken place between the Parties post submission of the application.

Date	Торіс	Discussion Points
6 June 2023	Notification of Relevant Representation	National GridThe Applicant wrote to the Consultee to inform them that the application for development consent had been accepted and that relevant representations could be submitted.
Published 24 July 2023 (on PINS website)	The Consultee's Relevant Representations	The Consultee submitted a Relevant Representation [RR-029] to the Planning Inspectorate identifying their interest in land within the Order Limits and suggesting that National Gridthe Applicant undertakes a full cumulative effects assessment.
7 June 2023	Further SoCG discussions	Follow up meeting with the Consultee's Project Manager in respect to the East Anglia Three project only to progress the SoCG.
11 September 2023	Further SoCG discussions	Virtual meeting with the Consultee's Project Manager and Senior Project Manager where parties agreed to progress discussions in respect to the technical interface; share more information on construction programmes and proposed and existing assets; the Consultee to provide a land interest plan; parties to consider vegetation removal; National Gridthe Applicant's Land Agent to reach out to new contacts and the Consultee to provide an updated list of project contacts.
<u>17 October 2023</u>	TechnicalandConstruction Interface	Technical interface discussion.
<u>3 November 2023</u>	TechnicalandConstruction Interface	Continued technical interface discussions.
<u>17 November 2023</u>		Continued technical interface discussions and next steps, including agreement of provisions to be included in the draft Heads of Terms.
24 November 2023	Email Issuing Draft Heads of Terms	Email sent by the Applicant's solicitors to the Consultee's solicitors, with attached draft Heads of Terms to initiate further discussions and agreement.

Table 2.2 – Post-submission discussions

3. Matters Agreed

- 3.1.1 The Parties agree the following:
 - i. Pursuant to section 6A(5) of the Electricity Act 1989, the Consultee benefits from an electricity supply licence under section 6(1)(d) of the Electricity Act 1989.
 - ii. The Consultee acknowledges the project description for the project as set out in Section 1.2 of this SoCG.
 - iii. The Consultee has no objection to the principle of the project.
 - iv. The Parties can see no reason why the project and East Anglia Three cannot be implemented <u>and operated</u> without conflict with one another.
 - v. The Consultee agrees to provide a diagram and list of all their apparatus (existing or proposed) that is in the vicinity of the project and the Consultee agrees that it has identified and listed those parts of its network apparatus (existing or proposed) that are located within the vicinity of all that land that may be required for all the development works required under the terms of the project.

4. Matters Not Agreed

Table 4.1 – Matters not Aagreed

SoCG ID	Matter	The Consultee Position	National GridThe Applicant's Position

Currently, no matters are not agreed between the Parties.

5. Matters Under Discussion

Table 5.1 – Matters under Deliscussion

SoCG ID	Matter	The Consultee Position	National Grid <u>The Applicant</u> Position
Technical I	nterface		
5.1.1	There is an interface between the project and the Consultee's proposed/existing assets	National Grid <u>The Applicant</u> and the Consultee remain in discussions in respect to the technical interface, with a view of agreeing a suitable <u>interface</u> agreement <u>Interface Agreement</u> .	National Grid <u>The Applicant</u> and the Consultee remain in discussions in respect to the technical interface, with a view of agreeing a suitable interface agreement <u>Interface Agreement</u> .
			In addition, the draft Development Consent Order [APP-034] includes (at Part 1 of Schedule 14) general protective provisions for the benefit of statutory undertakers.
Sharing of	Information		
5.1.2	Sharing of information to inform the technical interface	Parties agreed to progress discussions in respect to the technical interface; share more information on construction programmes and proposed and existing assets; the Consultee to provide a land interest plan; parties to consider vegetation removal; National Gridthe <u>Applicant</u> 's Land Agent to reach out to new contacts and the Consultee to provide an updated list of project contacts.	Parties agreed to progress discussions in respect to the technical interface; share more information on construction programmes and proposed and existing assets; the Consultee to provide a land interest plan; parties to consider vegetation removal; National Gridthe <u>Applicant</u> 's Land Agent to reach out to new contacts and the Consultee to provide an updated list of project contacts.
<u>5.1.3</u>	<u>Heads of Terms</u>	<u>N/A</u>	The Applicant has issued the Consultee draft Heads of Terms in respect to the Interface Agreement on 24 November 2023. The Applicant is awaiting feedback on this draft.

6. Approvals

Signed


On Behalf of	
Name	
Position	
Date	
Signed	

On Behalf of	
Name	
Position	
Date	

Reference List


Department for Communities and Local Government (2015) *Planning Act 2008: Guidance for the examination of applications for development consent.* March 2015 (Department for Communities and Local Government, 2015)

Appendix 1: The Consultee's Order Limits near Bramford Substation

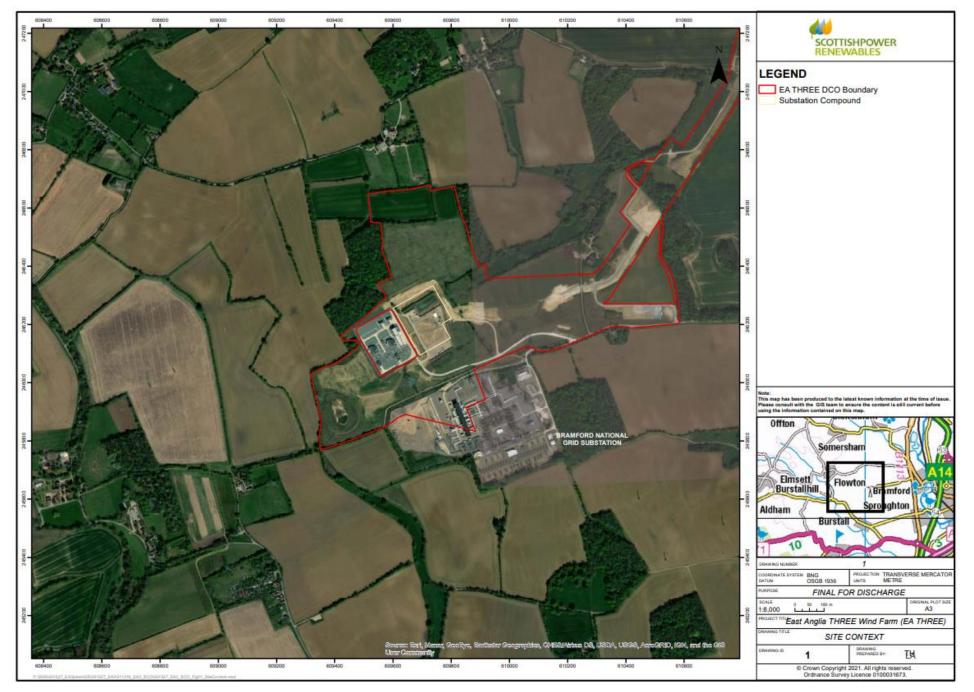


National Grid | December 2023 | Bramford to Twinstead Reinforcement

Appendix 2: The Project's Order Limits near Bramford Substation

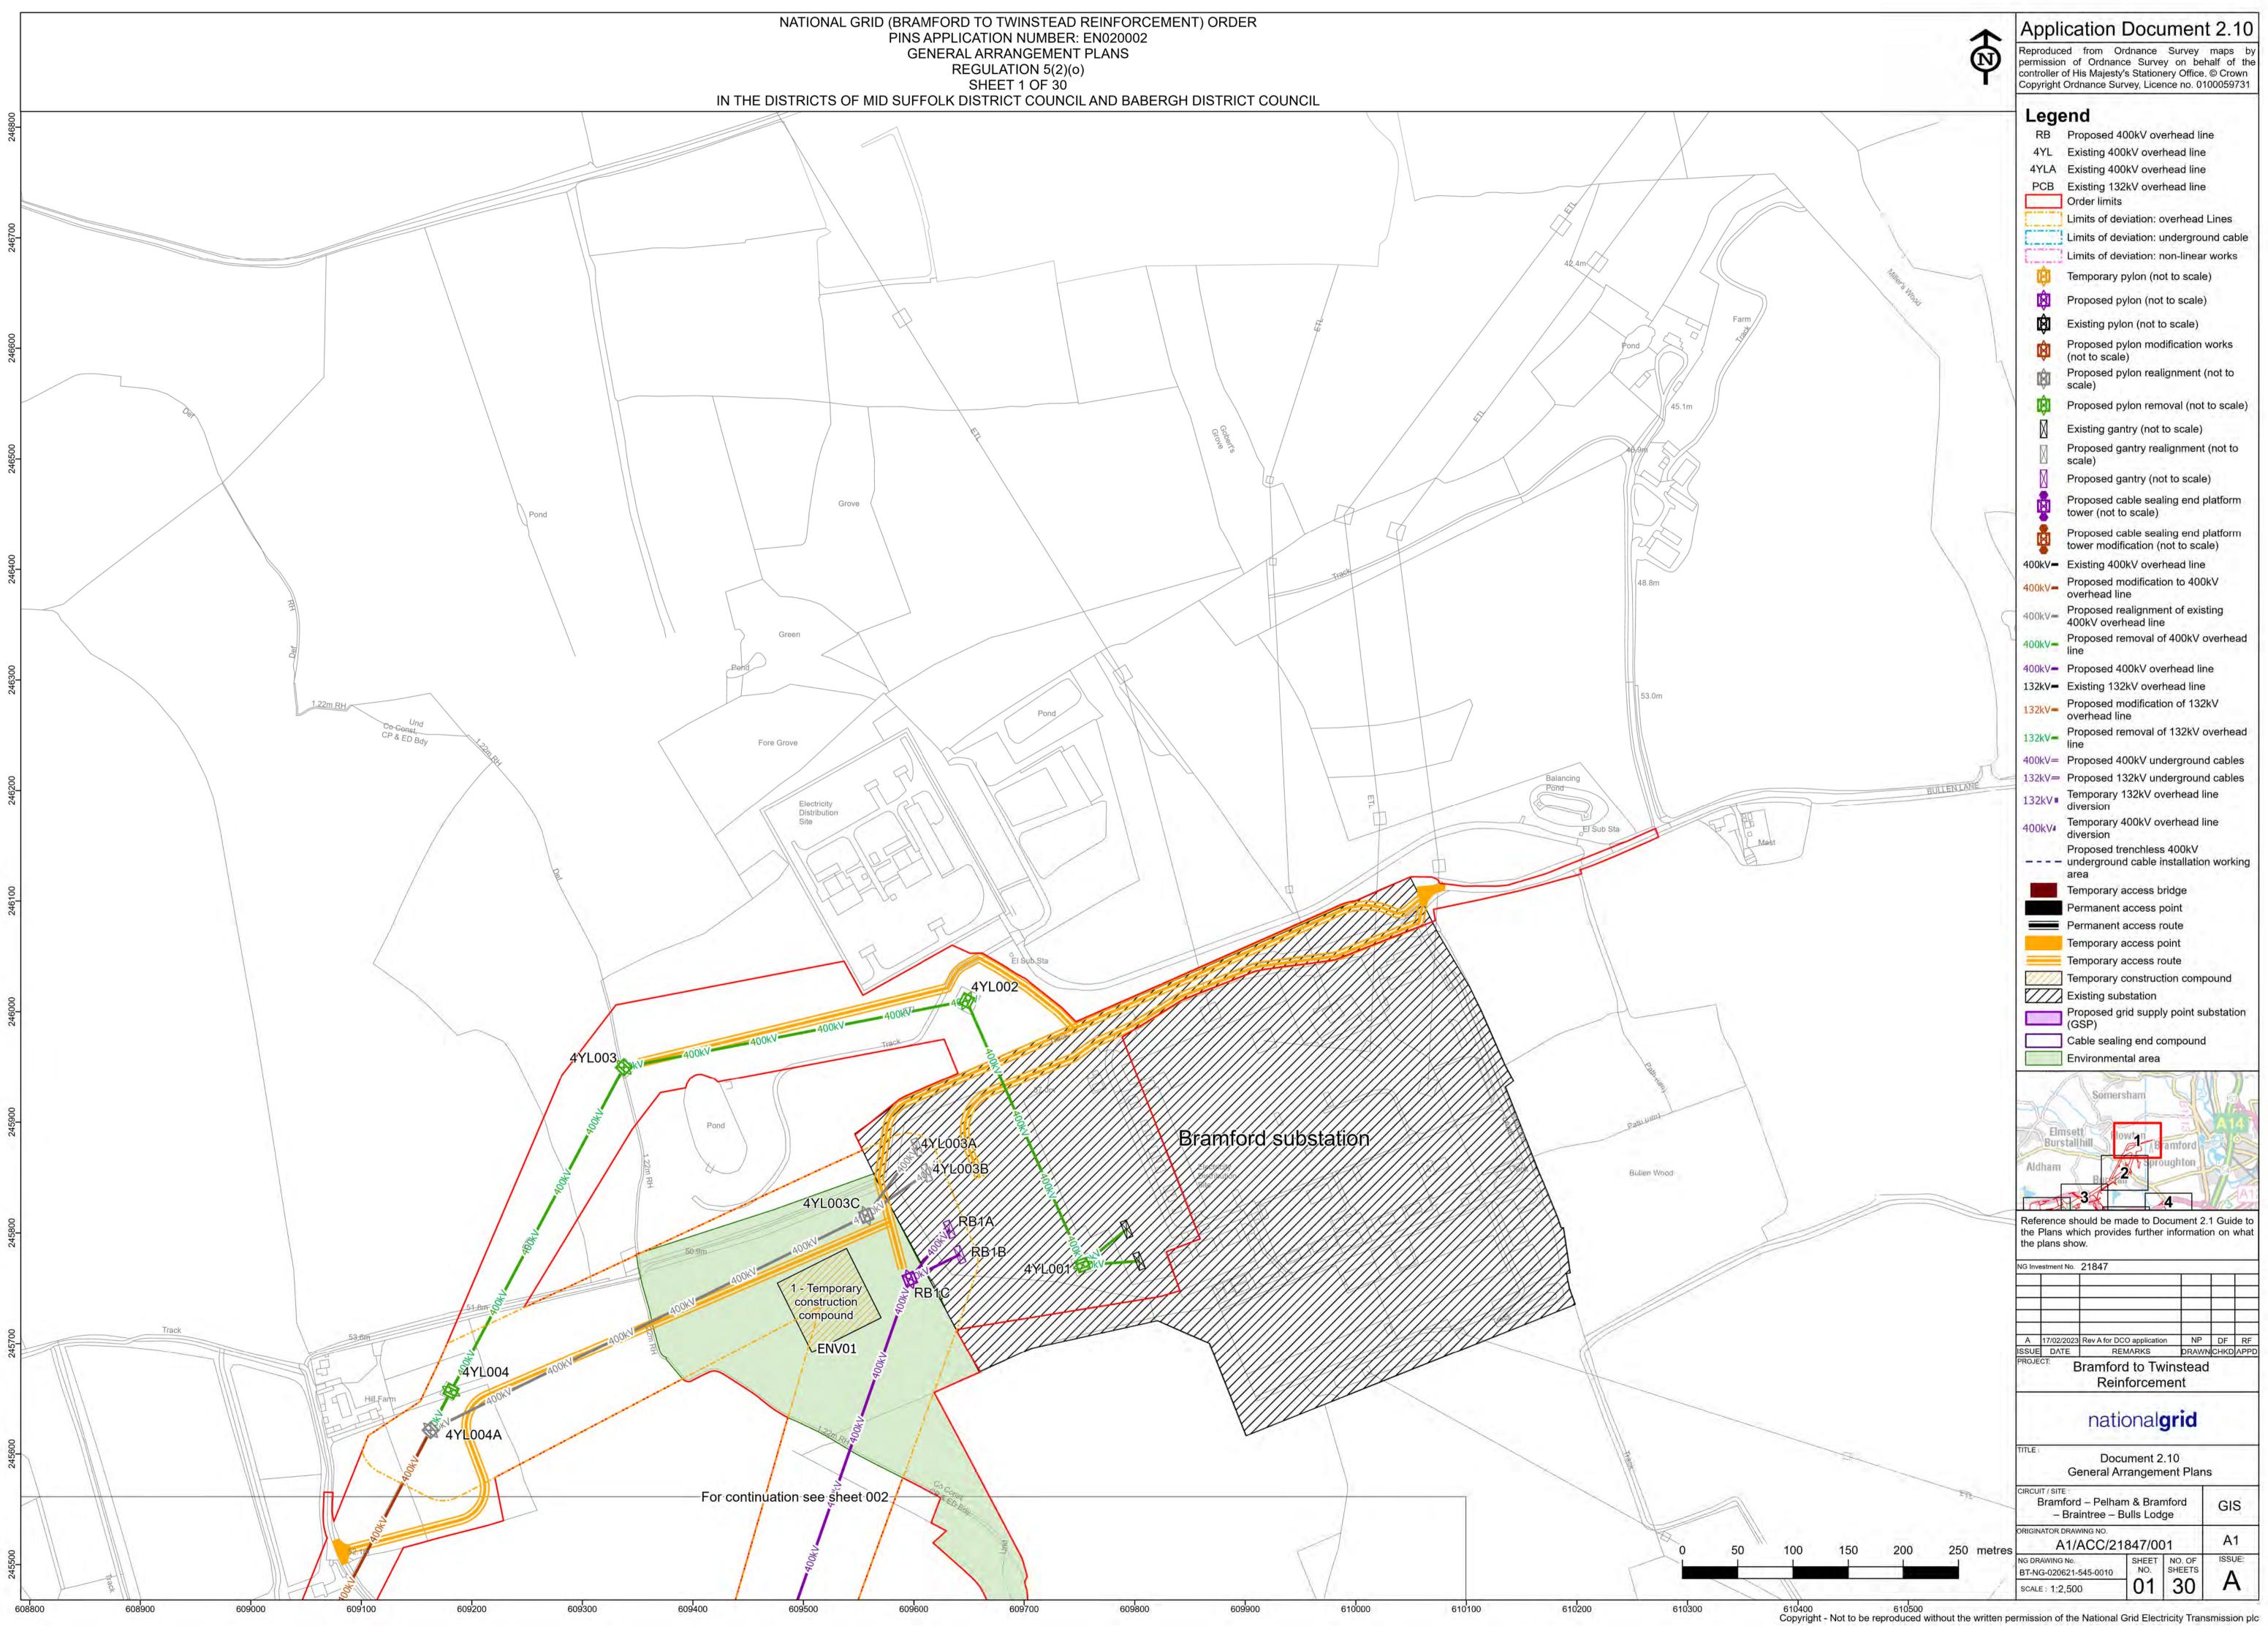

Appendix 3: East Anglia Three and Bramford to Twinstead Interface

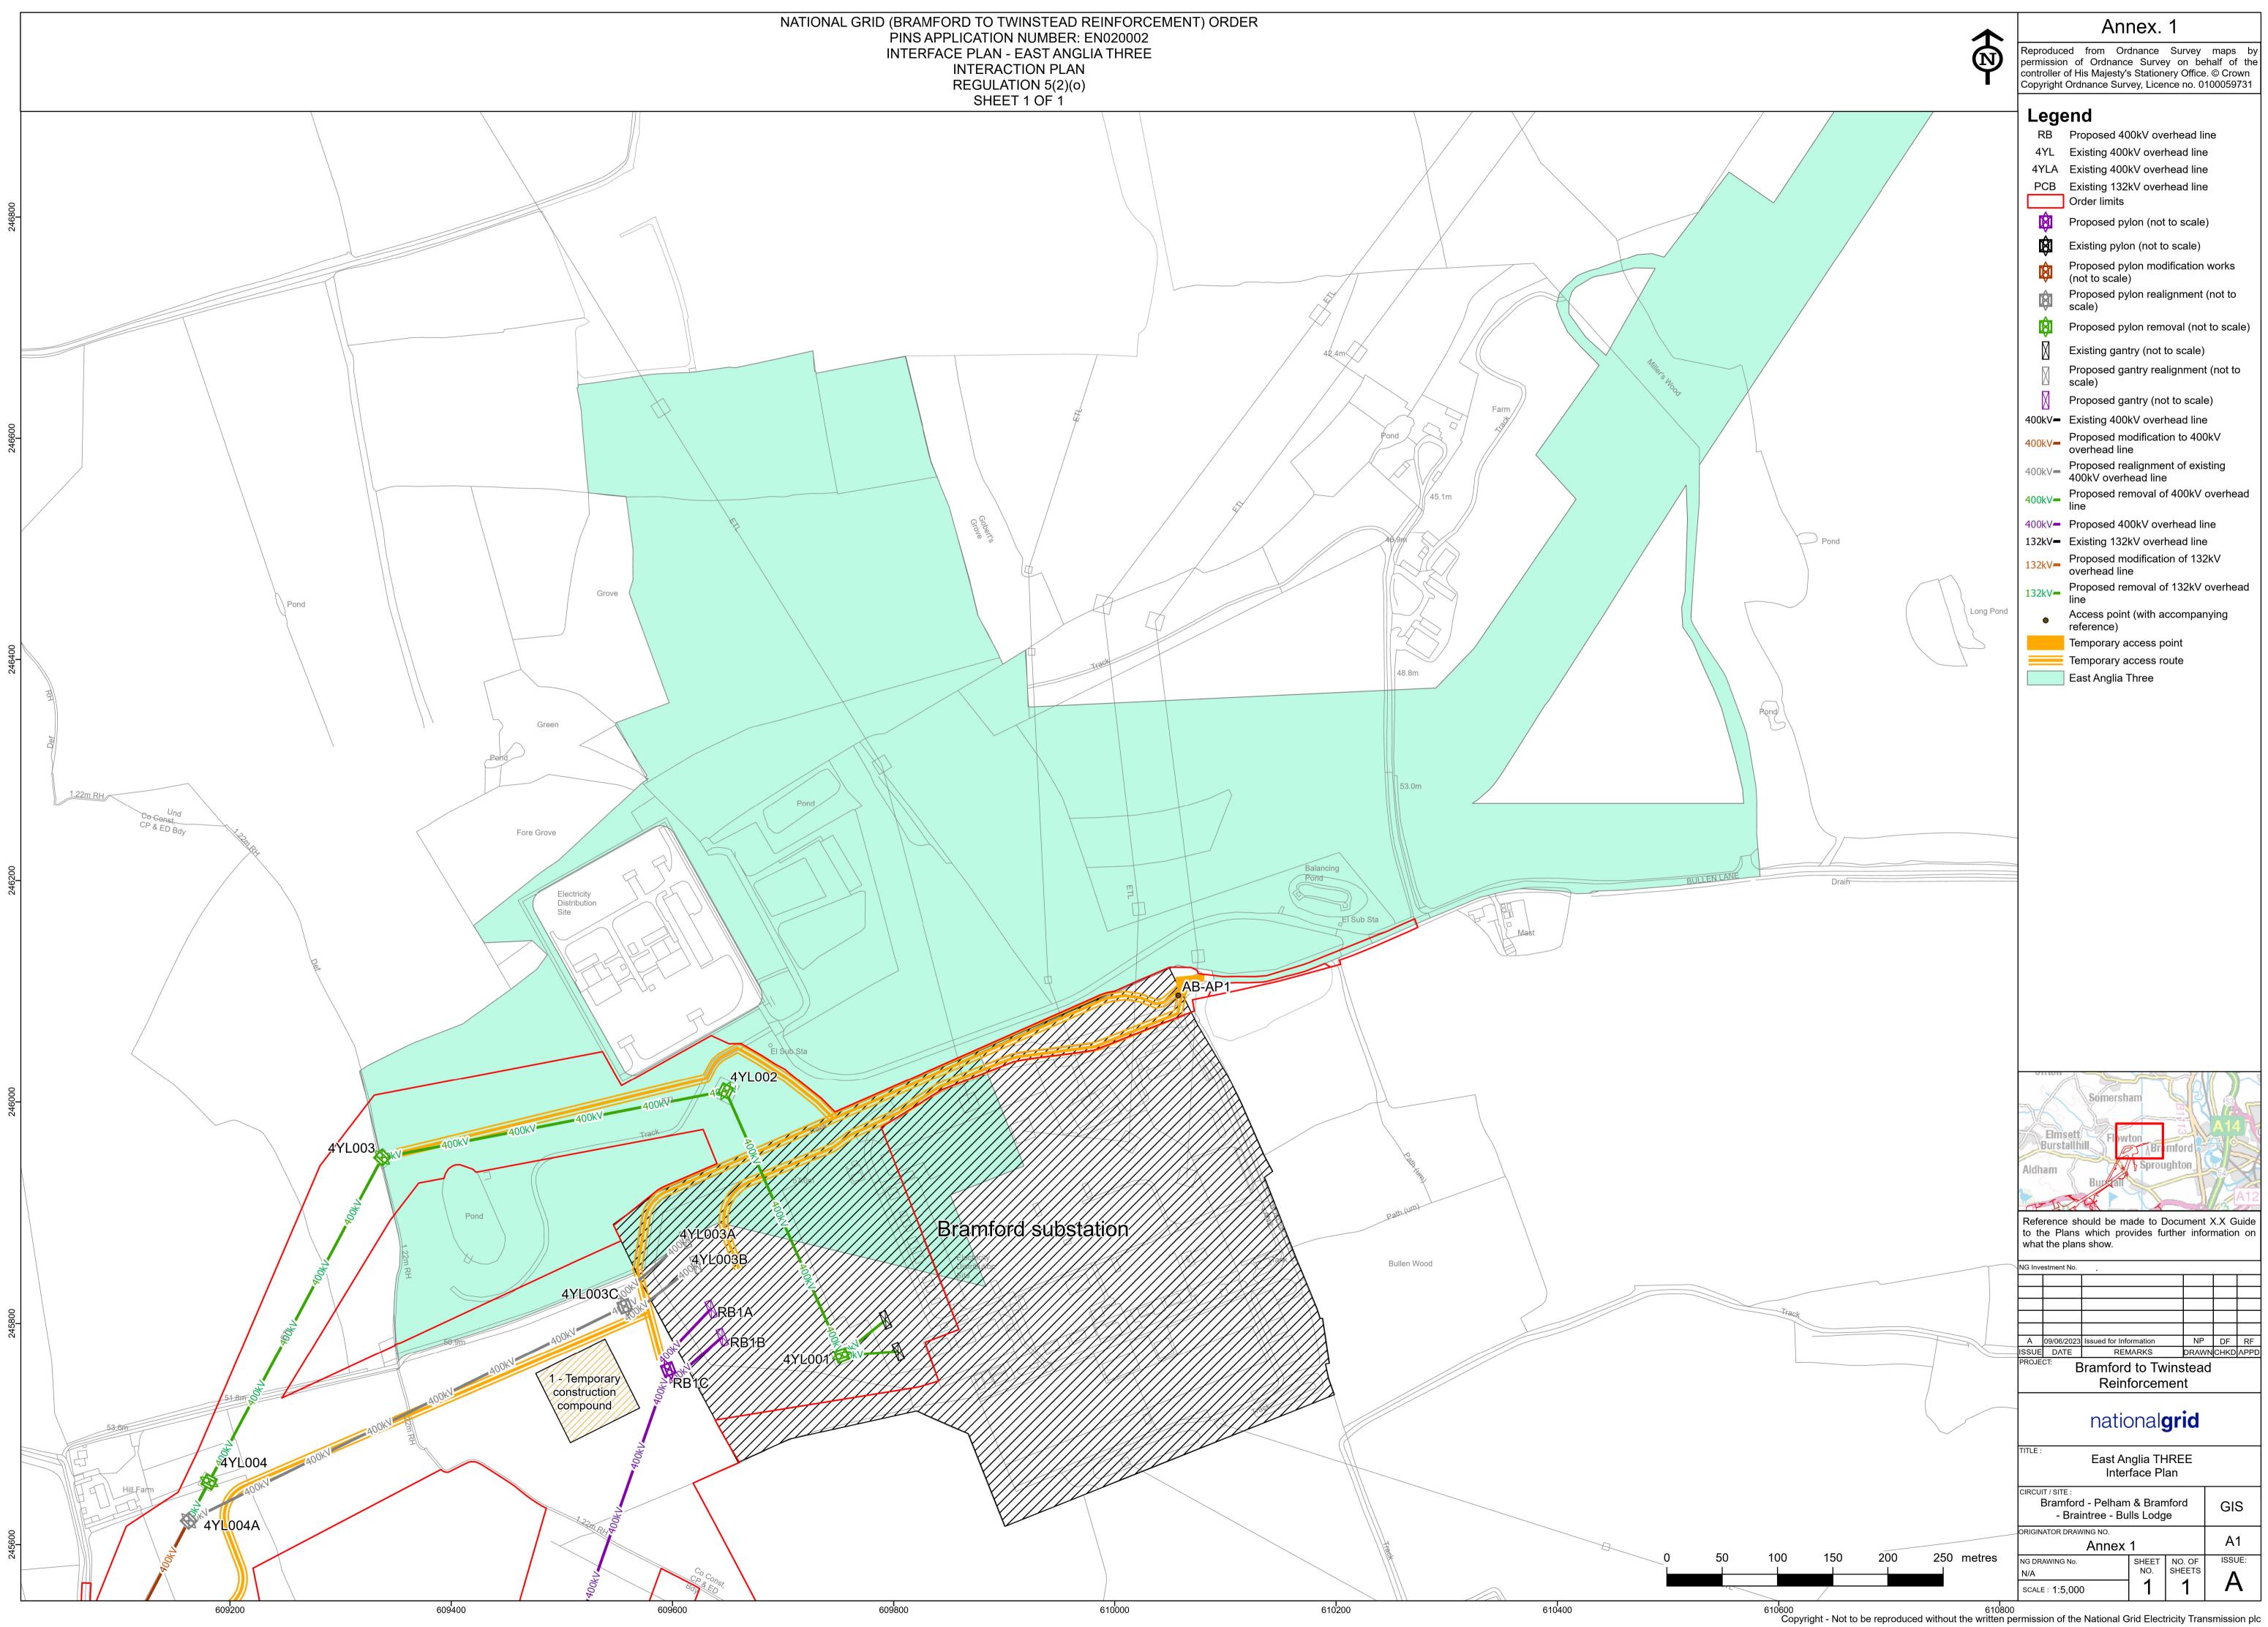

Appendix 4: East Anglia Three Approved Landscaping Proposals



	ANDSCAPE LEGEND	NOTES		
Ex	THREE DCO Boundary	1. This drawing is to be read in conjunction with all other drawings and specifications.		
	isting Contours oposed Contours	 Do not scale off this drawing. Written dimensions to be taken only. 		
	isting Vegetation to be retained	 Any discrepancies found between this drawing and othe drawings and specifications in the construction documents must be referred to the Landscape Architect 		
	licative areas of existing mature woodland	prior to work commencing.4. This drawing must not be copied in whole or in part		
	lon	without prior written consent of Optimised Environments		
₩~~ Ov	verhead powerlines	DRAWING INFORMATION BASED UPON		
Ар	pproximate underground cable alignment			
oposed Pla	nting	Emapsite: © Crown copyright and database rights 2019 Ordnance Survey 0100031673.		
	X Tree replanting location. See plant schedules for details.	OS OpenData: Contains OS data © Crown copyright and		
— н1	Mixed native species hedge. See plant schedules for details.	database right (2019). Google Earth: Please show the attribution statement shown		
	M1 Core Woodland comprising generally slower growing	on the Google map or image that you are using.		
	ed broadleaf species such as oak (See plant schedules for ails)	Topographical Survey: Please reference surveyor's survey		
mix	M2 Edge woodland comprising generally lower growing ted broadleaf species such as Rowan (See plant schedules details)			
	M4 Wet woodland planting mix appropriate for SUDs ention basin area. (See plant schedules for details)			
R1	Supplementary / infill planting for gaps in existing			
	dgerows using WM2 tree/shrub mix or H1 hedgerow mix as acified			
	Amenity grass seed mix for embankments, verges and rale sides			
G	2 Wetland areas grassland seed mix areas.	KEY PLAN		
G	3 Species rich grassland seed mix areas.			
	6 Marginal aquatic planting for the margins around the			
G	rmanent pond. 7 Marginal aquatics for the SUDs basin forebay and swale			
	se areas ter drain with grass cover and manhole access			
(Re	efer to engineers specification) ter drain with exposed aggregate and manhole access			
(Re	efer to engineers specification)			
(Re	ter drain within substation compound efer to engineers specification) 1: Reinforced grass road surface			
De	 Reinforced grass road surface escription: Golpla pre-grown reinforced grass road from eosynthetics Ltd. 			
EA	1 Woodland. Woodland planting carried out as part of EA1			
Exis	dscape works. For information only. sting land use to be retained and managed as agricultural use			
	accordance with local landowners recommendations and dance			
roposed Fen	icing to New Woodland			
	: Fence scription: Rabbit / deer protection fencing for new woodland.			
(A) F3	: Maintenance access gate			
	scription: 2m wide maintenance gate / height dependent upon acent fencing.			
djacent areas.				
VOODLAND PLA reparation: II	NTING GENERALLY Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove			
reparation: II nd	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local			
reparation: II nd izes: pacings:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans			
reparation: II nd izes: pacings: imings: ionifers and ever lanting:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch.			
reparation: I Ind izes: pacings: imings: onifers and every lanting: lanting Depth: ith	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil.			
reparation: I Ind jaces: imings: onifers and every lanting Depth: ith lanting density:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one			
reparation: II nd jzes: pacings: imings: conifers and every lanting: lanting Depth: <i>i</i> th lanting density: ayout: rotection:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland			
reparation: I nd izes: pacings: imings: onifers and every lanting Depth: ith lanting density: ayout: rotection: anting,	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012.			
reparation: II nd jzes: pacings: imings: ionifers and every lanting: lanting Depth: rith lanting density: ayout:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to	02 Suds pond update; eastern hedgeline rt 14.04.20. shown on plan.		
reparation: I ad zes: pacings: mings: onifers and every anting Depth: ith anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base.	02 Suds pond update; eastern hedgeline rt 14.04.20 shown on plan. 01 SPR comments; Red line boundary. jd 24.01.20		
reparation: I I nd izes: pacings: imings: onifers and every lanting Depth: ith lanting Depth: ith lanting density: ayout: rotection: anting, ulch: aintenance: eplacements:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes.	02 Suds pond update; eastern hedgeline rt 14.04.20 shown on plan. 01 SPR comments; Red line boundary. jd 24.01.20		
reparation: I ad zes: pacings: onifers and every anting: anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance: eplacements: EDGE PLANTIN	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan	02 Suds pond update; eastern hedgeline rt 14.04.20 shown on plan. 01 SPR comments; Red line boundary. jd 24.01.20		
reparation: I and zes: pacings: mings: onifers and every anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance: eplacements: EDGE PLANTIN reparation:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IC <u>GENERALLY</u> Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Date		
reparation: I and zes: pacings: mings: onifers and every anting: anting Depth: ith anting density: ayout: rotection: anting, ulch: eplacements: EDGE PLANTIN reparation: zes: pacings:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG <u>GENERALLY</u> Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Data Oppering Oppering Oppering optimised environment 14.04.20		
reparation: l d zes: bacings: mings: onifers and every anting Depth: th anting Depth: th anting density: yout: otection: anting, ulch: aintenance: eplacements: EDGE PLANTIN reparation: zes: bacings: mings: rotection:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for tree protection tubes for each plant.	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Date Optimised environment optimised environment EDINBURGH 2nd Floor Quartermile Two 2 Lister Square Edinburgh EH		
reparation: h d zes: bacings: mings: onifers and every anting Depth: ith anting density: ayout: otection: anting, ulch: eplacements: EDGE PLANTIN reparation: zes: bacings: mings: otection: aution: placements: bacings: mings: otection: bacings: mings: otection: bacings: mings: bacings:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG <u>GENERALLY</u> Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Da Issue Revision Initial Da Optimised environment optimised environment total 215920 w optimisedenvironment EDINBURGH 2nd Floor Quartermile Two 2 Lister Square Edinburgh EF t 0131 221 5920 w optimisedenvironment LONDON 107-111 Fleet Street London EC4/4		
reparation: I and zes: pacings: mings: onifers and every anting Depth: ith anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance: EDGE PLANTIN reparation: zes: pacings: rotection: ulch: aintenance: pacings: mings: rotection: ulch: aintenance: pacings: mings: rotection: ulch: aintenance: pacings: mings: rotection: ulch: aintenance: pacings: mings: rotection: ulch: aintenance: pacings: mings: rotection: ulch: aintenance: mings: rotection: ulch: aintenance: mings: rotection: aintenance: aintenanc	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG <u>GENERALLY</u> Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for the protection tubes for each plant. 75mm of well-composted bark mulch to be provided around base of plants	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Data Optimised environment optimised environment EDINBURGH 2nd Floor Quartermile Two 2 Lister Square Edinburgh EF- t 0131 221 5920 w optimisedenvironment LONDON 107-111 Fleet Street London EC44 t 0203 984 4022 w optimisedenvironment MANCHESTER 13 Swan Street Manchester M		
eparation: d d zes: bacings: mings: onifers and every anting Depth: ith anting density: yout: otection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: bacings: mings: otection: ulch: aintenance: eplacements: LANTS/ TREES	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG <u>GENERALLY</u> Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow for 10 year maintenance and management as per management plants Allow fo	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Da Initial Da Optimised environment coptimised environment contained environment MANCHESTER 13 Swan Street Manchester Manches		
reparation: I and zes: pacings: mings: onifers and every anting Depth: ith anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: pacings: mings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per inearmet plants Allow for 10 year maintenance and plant. 75mm of well-composted bark mulch to be provided around base of plants Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes.	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Data Optimised environment optimised environment Definised environment LONDON 107-111 Fleet Street London EC44 t 13 Swan Street Manchester Manchester MANCHESTER		
eparation: d d zes: bacings: mings: onifers and every anting Depth: th anting Depth: th anting density: yout: otection: anting, ulch: aintenance: eplacements: EDGE PLANTIN reparation: zes: bacings: mings: otection: ulch: aintenance: eplacements: cotection: ulch: aintenance: eplacements: cotection: aintenance: aintenance: eplacements: cotection: aintenance: aintenance: eplacements: cotection: aintenance:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. GENERALL Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders.	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Da Optimised environment optimised environment EDINBURGH LONDON 107-111 Fleet Street London EC44 t 0203 984 4022 w optimisedenvironment MANCHESTER MANCHESTER Contentioned Environment Contentioned Environment MANCHESTER Contentioned Environment Contentioned Environment MANCHESTER Contentioned Environment Manchester Manchester Manchester Manchester Manchester Ma		
reparation: I and zes: pacings: mings: onifers and every anting Depth: ith anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: pacings: mings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: post system and of tandard:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG <u>GENERALLY</u> Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. <u>GENERAL</u> Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. condition: Balanced with branch system. The National Plant Specification.	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Data Optimised environment optimised environment Definised environment LONDON 107-111 Fleet Street London EC44 t 13 Swan Street Manchester Manchester MANCHESTER		
reparation: I d zes: pacings: mings: onifers and every anting Depth: ith anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: pacings: mings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: cost system and of tandard: pecies: rigin/ Provenance	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IC GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. - <u>GENERAL</u> Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. condition: Balanced with branch system.	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Data Optimised environment optimised environment to 131 221 5920 w optimisedenvironment to 031 984 4022 w optimisedenvironment to 1016 1696 7550 w optimisedenvironment to 2023 984 4022 w optimisedenvironment to 1016 1696 7550 w optimisedenvironment to 2023 984 4022 w optimisedenvironment MANCHESTER 13 Swan Street Manchester Manchest		
reparation: I and zes: pacings: mings: onifers and every anting Depth: ith anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: pacings: mings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: pot system and of andard: pecies: rigin/ Provenance efinition: ational	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. - GENERAL Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. Cordition: Balanced with branch system. The National Plant Specification. True to name. e: Local provenance. Origin and Provenance have the meaning given in the Plant Specification	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Data Optimised environment optimised environment to 131.221.5920 w optimisedenvironment to 131.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 201.984 4022 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 201.984 4022 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 201.984 4022 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 201.984 4022 w optimisedenvironment to		
eparation: d d zes: bacings: mings: onifers and every anting Depth: ith anting Depth: ith anting density: ayout: otection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: bacings: mings: otection: ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: bacings: mings: otection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> pondition: opearance: ardiness: ealth: boot system and of andard: becies: rigin/ Provenance finition: ational <u>COODLAND/HEE</u> 'atering:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for tree protection tubes for each plant. Allow for 10 year ma	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Date Optimised environment optimised environment to 131 221 5920 w optimisedenvironment to 132 24 5920 w optimisedenvironment to 131 221 5920 w optimisedenvironment to 131 221 5920 w optimisedenvironment to 131 221 5920 w optimisedenvironment to 131 24 5920 w optimisedenvironment to 131 24 5920 w optimisedenvironment to 131 24 5920 w optimisedenvironment to 135 884 4022 w optimisedenvironment to 161 696 7550 w optimisedenvironment to 161 696 7550 w optimisedenvironment to 161 696 7550 w optimisedenvironment to 204 Floer Outerter Renewables Client ScottishPower Renewables Project		
eparation: d d zes: bacings: mings: onifers and every anting Depth: th anting Depth: th anting density: yout: otection: anting, ulch: aintenance: eplacements: EDGE PLANTIN reparation: zes: bacings: mings: otection: ulch: aintenance: eplacements: EDGE PLANTIN reparation: zes: bacings: mings: otection: ulch: aintenance: eplacements: EDGE PLANTIN reparation: postection: ulch: aintenance: eplacements: cotection: ulch: aintenance: eplacements: cotection: ulch: aintenance: eplacements: cotection: ulch: aintenance: eplacements: cotection: ulch: aintenance: eplacements: cotection: ulch: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: cotection: aintenance: eplacements: e	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical '', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. - <u>GENERAL</u> Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. conditon: Balanced with branch system. The National Plant Specification. True to name. :: Local provenance. Origin and Provenance have the meaning given in the Plant Specification DOEE MAINTENANCE	02 Suds pond update; eastern hedgeline shown on plan. rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Data Optimised environment optimised environment to 131.221.5920 w optimisedenvironment to 131.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 201.984 4022 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 201.984 4022 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 201.984 4022 w optimisedenvironment to 161.696 7550 w optimisedenvironment to 201.984 4022 w optimisedenvironment to		
eparation: d d zes: bacings: mings: onifers and every anting Depth: th anting Depth: th anting density: ayout: otection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: bacings: mings: rotection: ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: bacings: mings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> podition: opearance: ardiness: ealth: bot system and of pearance: ingin/ Provenance finition: ational (OODLAND/HEEC (atering: bose plants: (eed control: peas ea.	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'T, 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan A	02 shown on plan. 01 SPR comments; Red line boundary. jd jd 24.01.20 1ssue Revision Initial Date Optimised environment optimised environment optimised environment Dispute the square Edinburgh EH 1 0131221 5920 w optimisedenvironment LONDON 107-111 Fleet Street London EC44 1 0203 984 4022 w optimisedenvironment MANCHESTER MANCHESTER Contrisch Power Renewables Client ScottishPower Renewables Project East Anglia THREE Offshore Windfar		
reparation: I and izes: pacings: imings: onifers and every lanting Depth: ith lanting density: ayout: rotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: oot system and of pacies: rigin/ Provenance efinition: ational <u>(OODLAND/HEE</u> /atering: pose plants: /eed control: eess rea. risings:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'T, 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As	02 shown on plan. 01 SPR comments; Red line boundary. jd 24.01.20 1 SPR comments; Red line boundary. jd 24.01.20 1 Issue Revision Initial Date Optimised environment optimised environment Optimised environment Disburget London 24.ister Square Edinburgh EH (1031 221 5920 w optimisedenvironment London 107-111 Fleet Street London EC44 (2023 984 4022 w optimisedenvironment Manchester M (10161 686 7550 w optimisedenvironment Manchester Manchester M (10161 686 7550 w optimisedenvironment Manchester M (10161 686 7550 w optimisedenvironment Manchester Manchester M (10161 686 7550 w optimisedenvironment Client Manchester M (10161 686 7550 w optimisedenvironment Client Manchester M (10161 686 756 w optimisedenvironment Manchester M (10161 686 756 w optimisedenvironment <td< td=""></td<>		
reparation: I and izes: pacings: imings: onifers and every lanting Depth: ith lanting Depth: ith lanting density: ayout: rotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: oot system and of tandard: ppecies: rigin/ Provenance efinition: ational <u>(OODLAND/HEEE</u> /atering: bose plants: /eed control: ees. rea. risings: bontrol:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. - GENERAL Materially undamaged, sturdy, healthy and vigorous.	02 shown on plan. 01 SPR comments; Red line boundary. jd jd 24.01.20 1ssue Revision Initial Date Optimised environment optimised environment optimised environment Dispute the square Edinburgh EH 1 0131221 5920 w optimisedenvironment LONDON 107-111 Fleet Street London EC44 1 0203 984 4022 w optimisedenvironment MANCHESTER MANCHESTER Contrisch Power Renewables Client ScottishPower Renewables Project East Anglia THREE Offshore Windfar		
reparation: I and izes: pacings: imings: onifers and every lanting Depth: ith lanting Depth: ith lanting density: ayout: rotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: oot system and of tandard: ppecies: rigin/ Provenance efinition: ational <u>(OODLAND/HEE</u> /atering: bose plants: /eed control: eess rea. risings: ontrol: atoma d rains <u>ROTECTION TC</u>	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate fuil depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. - GENERAL Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. Origin and Provenance have the meaning given in the Plant Specification DEADEMINTENANCE Only as necessary to prevent plants wilting Refirm surrounding soil, without compacting. Cut down and remove weeds prior to setting seed in a 1 m diameter area around each tree/hedge. Vegetation except and coppice shoots to be retained: Cut within the plantation Height	02 Suds pond update; eastern hedgeline rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 1 Issue Revision Initial Dat Optimised environment Optimised environment Optimised environment Optimised environment Optimised environment Control Countermile Two 12 Lister Square 1 Editory 1 Editor 10 (2013 PB4 4022 w optimisedenvironment LONDON 107-111 Fleet Street 1 London 1 EC44 Control Street 1 Manchester 1 M Control Street 1 Manchester 1 M Control Street 1 Manchester 1 M Manchester 1 Manchester 1 M Control Street 1 Manchester 1 M <td co<="" td=""></td>		
reparation: I I I I I I I I I I I I I I I I I I I	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T' or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. -<u>GENERAL</u> Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. condition: Balanced with branch system. The National Plant Specification. True to name. e: Local provenance. Origin and Provenance have the meaning given in the Plant Specification OEE MAINTENANCE Only as necessary to prevent plants witting Refirm surrounding soil, without compacting. Cut down and remove weeds prior to setting seed in a 1 m diameter ar	02 Suds pond update; eastern hedgeline rt 14.04.20 01 SPR comments; Red line boundary. jd 24.01.20 Issue Revision Initial Dat Imitial Colspan="2">Imitial Colspan="2">Imitial Colspan="2">Imitial Colspan="2">Imitial Colspan="2" Imitian Colspan="2" <td <<="" colspan="2" td=""></td>		
reparation: I d zes: pacings: mings: onifers and every anting Depth: ith anting Depth: ith anting density: ayout: rotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: pacings: mings: rotection: ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: pacings: mings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: poot system and of indense: ealth: poot system and of indense: ealth: indense: ea	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/May. Notching: Make a vertical '!, 'U, 'To 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. EG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As req	02 Suds joon updan. shown on plan. SPR comments; Red line boundary. jd 24.01.20. jssue Revision Initial Date Optimised environment optimised environment Optimised environment Optimised environment District environment District environment District environment London (colspan="2">Contribution (colspan="2") Contribution (colspan="2") <td colspan<="" td=""></td>		
reparation: I and izes: pacings: imings: onifers and every lanting Depth: ith lanting Depth: ith lanting density: ayout: orotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: oot system and of pacies: rigin/ Provenance efinition: ational <u>/OODLAND/HEE</u> /atering: bose plants: /eed control: ees rea. risings: ontrol: itches and drains <u>ROTECTION TC</u> <u>UTSIDE FENCE</u> anufacturer: roduct reference quare stake. ype: aterial: ize:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/May. Notching: Make a vertical 'I, 'L, 'To 'T 'N rtoch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Duble staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late Cotober to late March Allow for 10 year maintenance and management as per management plan As re	02 Suds jood update; eastern hedgeline shown on plan. SPR comments; Red line boundary. jd 24.01.202 1 Issue Revision Initial Date Imitial Coperation Initial Date Imitial Date Date Dat		
reparation: I and izes: pacings: imings: onifers and every lanting Depth: ith lanting Depth: ith lanting density: ayout: rotection: antenance: eplacements: EDGE PLANTIN reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: LANTS/ TREES ondition: ppearance: ardiness: ealth: oot system and of the transported of pecies: rigin/ Provenance efinition: andard: ppecies: rigin/ Provenance efinition: ational /OODLAND/HEE /atering: oose plants: /eed control: itches and drains ROTECTION TCC UTSIDE FENCE anufacturer: roduct reference quare stake. ype: aterial: ize: olour: upport:	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical '', 'L, 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IC GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. -GENERAL Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. Condition: Balanced with branch system. The National Plant Specification. True to name. :: Local provenance have the meaning given in the Plant Specification DEE MAINTENANCE Only as necessary to prevent plants wilting Refirm surrounding soil, without compacting. Cut down and remove weeds prior to setting seed in a 1 m diameter area around each tree/hedge. Vege	02 Suds joon updan. shown on plan. SPR comments; Red line boundary. jd 24.01.202 jssue Revision Initial Date Optimised environment optimised environment Optimised environment District environment District environment District environment District environment London 1 Colariermile Two 1 2 Lister Square [Edinburgh] EH (2013 984 4022 w optimisedenvironment District for the planet environment Manchester Manchester Manchester Manchester Add Floor] Quartermile Two 1 2 Lister Square [Edinburgh] EH (2013 984 4022 w optimisedenvironment Manchester Manchester Manchester Manchester Intervision environment Contristed covertice for environment Manchester Manchester Manchester Manchester Contristed covertice for environment Contristed covertice for environment Content Bast Anglia THR		
reparation: I and izes: pacings: imings: onifers and every lanting Depth: ith lanting Depth: ith lanting density: ayout: orotection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: ppearance: ardiness: ealth: oot system and of tandard: ppecies: rigin/ Provenance efinition: ational <u>(OODLAND/HEE</u> /atering: bose plants: /eed control: eess rea. risings: ontrol: itches and drains <u>ROTECTION TC</u> <u>UTSIDE FENCE</u> anufacturer: roduct reference quare stake. ype: aterial: ize: olour: upport: eneral:	Fiai clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. - GENERAL Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. Ordigi and Provenance have the meaning given in the Plant Specification Tue to name. :: Local provenance. Origi and Provenance have the meaning given in the Plant Specification Ciee MAINTENANCE Only as necessary to prevent plants wilting Refirm surrounding soil, without compacting. Cut down and remove weeds prior to setting seed in a 1 m diameter area aroun	02 Suds jood update; eastern hedgeline shown on plan. SPR comments; Red line boundary. jd 24.01.202 1 Issue Revision Initial Date Imitial Coperation Initial Date Imitial Date Date Dat		
reparation: I and izes: pacings: imings: onifers and every lanting Depth: ith lanting Depth: ith lanting density: ayout: rotection: antenance: eplacements: EDGE PLANTIN reparation: izes: pacings: inings: rotection: ulch: aintenance: eplacements: LANTS/ TREES ondition: ppearance: ardiness: ealth: oot system and of tradiness: ealth: oot system and of anufacturer: roduct reference quare stake. ype: aterial: ize: olour: upport: eneral: OOT BARRIERS nderground Prop	Fiai clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. - GENERAL Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. Ordigi and Provenance have the meaning given in the Plant Specification Tue to name. :: Local provenance. Origi and Provenance have the meaning given in the Plant Specification Ciee MAINTENANCE Only as necessary to prevent plants wilting Refirm surrounding soil, without compacting. Cut down and remove weeds prior to setting seed in a 1 m diameter area aroun	22 Sub pond update: eastern hedgeline r 14.04.202 31 SPR comments; Red line boundary. jd 24.01.202 1 Issue Revision Initial Dat Optimised environments Issue Revision Initial Dat Optimised environment Optimised environment Control Cuartermite Two [2 Lister Square] Edinburyton ment Control Cuartermite Two [2 Lister Square] Edinburyton ment Control Cuartermite Two [2 Lister Square] Edinburyton ment Control Cuartermite Two [2 Lister Square] Edinburyton ment Control Content Marchester [Marchester] Marchester] Marchester] Marchester Marchester Marchester [Marchester] Marchester] Marchester Client Bast Anglia THREE Offshore Windfart Drawing Title Apple: Dista Carte Sopt LandoscA		
reparation: I and izes: pacings: imings: onifers and every lanting Depth: ith lanting Depth: ith lanting density: ayout: rotection: antenance: eplacements: <u>EDGE PLANTIN</u> reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: izes: pacings: imings: rotection: ulch: aintenance: eplacements: LANTS/ TREES ondition: ppearance: ardiness: ealth: oot system and of tool system and o	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, greens: September/ October or April/ May. Notching: Make a vertical 'I', 'L', 'T or 'H' notch. To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. IG CENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggered row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. - <u>CENERAL</u> Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. Cordition: Balanced with branch system. The National Plant Specification. True to name. et. Local provenance. Ave provenance. Origin and Provenance have the meaning given in the Plant Specification Somet may eleven rows. Mechanical, chemical or mulching methods of vegetation Submit proposals. s: Keep clear. DH HEDGE PLANTING AND WM WOODLAND PLANTING DAC	02 Suds pond update: eastern hedgeline r 14.04.202 1 SPR comments; Red line boundary. jd 24.01.202 Issue Revision Initial Dat Initial Initial Initial		
eparation: d d zes: bacings: mings: onifers and every anting Depth: th anting Depth: th anting density: ayout: otection: anting, ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: bacings: mings: otection: ulch: aintenance: eplacements: <u>EDGE PLANTIN</u> reparation: zes: bacings: mings: otection: ulch: aintenance: eplacements: <u>LANTS/ TREES</u> ondition: opearance: ardiness: ealth: bot system and of andard: becies: rigin/ Provenance finition: opearance: ational <u>CODLAND/HEE</u> atering: bose plants: rees ea. risings: otot cystem and of andard: becies: rigin/ Provenance finition: attore and drains <u>ROTECTION TC</u> <u>UTSIDE FENCE</u> anufacturer: polour: upport: eneral: <u>COT BARRIERS</u> Doforpriate depth	Flail clear all vegetation from site to 100mm high. Remove arisings. Cross-rip planting areas to 600mm deep to remove break through clay pans Bare root, transplanted whips, 60-80cm high. Local provenance where possible 1.5m centres or as indicated in Plant Schedules Deciduous trees and shrubs: Late October to late March, To accommodate full depth of roots. Plant tree, close notch root collar at ground level and firm the soil. As plant schedule. Random groups of no less than 3 or more than 7 of the same species, ensuring that no three plants are aligned in any one direction. Allow for deer proof fence to surround areas woodland fencing to incorporate rabbit proof fencing. Fencing mesh to BS EN 10223-5:2012. 75mm of well-composted bark mulch to be provided around tree base. Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. KG GENERALLY Flail clear all vegetation from site to 100mm high. Remove all arisings. Cross-rip planting areas to 600mm deep to remove and break through clay pans Bare root, transplanted whips, 90-120cm high. Local provenance where possible Double staggreef row, 5 plants per linear metre Deciduous trees and shrubs: Late October to late March Allow for 10 year maintenance and management as per management plan As required, commiserate species and sizes. -GENERAL Materially undamaged, sturdy, healthy and vigorous. Of good shape and without elongated shoots. Grown in a suitable environment and hardened off. Free from pests, diseases, discoloration, weeds and physiological disorders. Cordition: Balanced with branch system. The National Plant Specification. True to name. e: Local provenance. Origin and Provenance have the meaning given in the Plant Specification Dide marker area around each tree/hedge. Vegetation except and coppic shoots to be retained: Cut within the plantation Height (maximum): 50 mm. Leave between rows. Mechanical, chemical or mulching methods of vegetation Submit proposals. s: Keep clear. DH 1 HEOGE PLANTING AND	02 Suds pond update; eastern hedgeline shown on plan. SPR comments; Red line boundary. rt 14.04.20; 24.0120; 1 SPR comments; Red line boundary. jd 24.0120; 1 SPR comments; Red line boundary. jd 24.0120; 1 SPR comments; Red line boundary. jd 24.0120; 1 Suds pond update; eastern hedgeline shown on plan. Initial Dat Optimised environment control of the plan of		

Appendix 5: The Consultee's Response to Statutory Consultation



21st March 2022

To whom it may concern,

Response to the Bramford to Twinstead Reinforcement January 2022 consultation

This letter sets out jointly ScottishPower (UK) Limited's (SPR), East Anglia One Limited's (EAOL) and East Anglia Three Limited's (EATL) comments on the National Grid proposal to reinforce the electricity transmission network between the National Grid Bramford Substation and Twinstead Tee.

EAOL own and operate the East Anglia ONE offshore wind farm (EA1). EAOL is a joint venture between SPR and Bilbao Offshore Holding Limited (which is part of the Green Investment Group). EATL is wholly owned by SPR and is in the process of discharging Development Consent Order Requirements for the East Anglia THREE offshore wind farm (EA3). EA1 and EA3 are both Nationally Significant Infrastructure Projects for which development consent was granted, respectively, on 16 June 2014 pursuant to the East Anglia ONE Offshore Wind Farm Order 2014 (EA1 Order) and on 7 August 2017 pursuant to the East Anglia THREE Offshore Wind Farm Order 2017 (EA3 Order). The EA1 Order grants consent for electricity generation with an installed capacity of up to 750MW and the EA3 Order grants consent for electricity generation with an installed capacity of up to 1,400MW.

EAOL and EATL are statutory undertakers for the purposes of their respective projects and by virtue of Article 31 of the EA1 Order and Article 30 of the EA3 Order, the land within their Order Limits should be treated as operational land required in connection with their statutory undertaking. Proposed works in Section AB - Bramford Substation to Hintlesham - are located within the Order Limits of the onshore connection works for EA1 and EA3, namely the proposed removal of existing 400kV pylons and replacement with a new 400kV pylon at Bramford Substation. As such, EAOL and EATL have a significant interest as statutory undertakers whose operational land is affected.

SPR owns land adjacent to Bramford substation and is the grantee under deeds of grant of easement along the EA1 and EA3 onshore export cable corridor.

EAOL is also a tenant under a lease of part of the land owned by SPR adjacent to the Bramford substation and is entitled, as tenant, to exercise certain of the rights granted to SPR under deeds of grant of easement along the EA1 export cable corridor.

SPR, EAOL and EATL recognise the importance of the proposed reinforcement works, however it is imperative that the works do not compromise the construction and operation of EA3 or the operation of EA1, both of which will deliver substantial renewable energy benefits towards meeting the national need for renewable energy identified in the National Policy Statement for Renewable Energy (EN-3). There are a number of concerns for National Grid to consider, as described below.

Works within EA1 and EA3 Order limits

The proposed removal of two 400kV pylons and the construction of a new 400kV pylon at Bramford Substation, are within the EA1 and EA3 Order Limits, on land owned by SPR and also



on land leased to EAOL. It is imperative that the reinforcement works around Bramford Substation are designed to ensure there is no impact on any land required by EAOL or EATL to mitigate impacts of or operate the EA1 and EA3 projects. Access to the EA1 and EA3 substations by SPR, EAOL and EATL must also be maintained at all times during both the construction and operational phases of the proposed works.

Specifically, the proposed works at Bramford Substation will impact on landscape planting southwest of the EA1 Substation, which was implemented as part of the EA1 Order Requirements to mitigate landscape and visual impacts. Any landscape planting removed would need to be replaced and further discussions would also be required on the subsequent maintenance of any replacement planting over a ten-year period.

Similarly, the two temporary access tracks required for the removal of the two 400kV pylons would also require the removal of EA1 landscape planting. It is recommended these access tracks are rationalised and combined to reduce the impact on landscape planting.

Further consideration must also be given to the proposed location of the temporary construction compound south-west of the EA1 Substation. The location proposed would sever the existing access track, impacting on the EA1 access to the SuDS pond. The proposed location in proximity to the pond also creates a risk of additional run-off from the construction compound, risking increased siltation of the SuDS pond.

Proposed planting

In initial discussions with SPR, National Grid have explored potential opportunities to provide landscape planting as part of their own net gain requirements along the existing power line route, following the removal of the pylons near to the EA1 Substation. Further discussions would be required if this proposal were to be taken forward, particularly regarding types of planting proposed, details of who would undertake landscaping, land agreements to allow access and planting to take place, and what provision for the ongoing maintenance and replanting of any failed landscaping over an extended period would be made.

Additionally, further consideration is needed to ensure that any additional planting, replacement planting and/or loss of existing planting does not undermine the EA1/EA3 Landscape Master Plan requirements contained within the respective Orders and landscape management strategies. The loss of any planting resulting in a greater visibility of the respective EA1 and EA3 substations would not be acceptable in the first instance and will require coordination of an overall landscape master plan for all three schemes in cooperation with the appropriate Local Planning Authority. The requirement for any variation or consents as part of these works resulting for EA1/EA3 would be the responsibility of National Grid in consultation with EA1 and EA3 respectively.

Cumulative effects

Given the requirement to assess cumulative effects in paragraph 5(e) of Schedule 4 to the Town and Country Planning (Environmental Impact Assessment) Regulations 2017, we trust that a full cumulative environmental assessment with both the EA1 and EA3 projects will be undertaken but we would comment particularly on EA3 for reasons set out below.

As the proposed works are likely to coincide with the construction phase of EA3, we believe the following topics require consideration, some of which are already noted in the preliminary cumulative assessment in the PEIR:



- **Traffic and transport:** Cumulative impacts from construction traffic associated with the proposed works and the EA3 Convertor Station and cable route should be assessed. Additionally, the impact on Public Rights of Way (PRoW) amenity along the bridleway at Bullen Lane, which coincides with the vehicular access along Bullen Lane, should be considered.
- Landscape, ecology and water resources: As noted above, there is the potential for cumulative impacts in relation to landscape, water resources and ecology. This is associated with the impacts on existing landscape planting around the EA1 and EA3 substations and on the SuDS pond. This could have subsequent impacts on local fauna, including Great Crested Newts in the SuDS pond.
- **Noise**: The potential noise impacts from concurrent construction activities should be considered in the assessment and mitigated accordingly. It should be noted that piling activities are expected at the EA3 Converter Station. Information on the number, type and timing of these works will become available in Quarter 3 of 2023.

SPR, EAOL and EATL recognise the importance of the proposed works and the contribution both projects have in meeting the national need for renewable energy. We are keen to continue working with National Grid to address the concerns raised in this letter, as well as supporting National Grid's identification of enhancement opportunities around the Bramford Substation.

SPR are committed to Mid Suffolk District Council's strategic cumulative group in the Bramford area and are happy to provide appropriate information on the EA1 and EA3 sites as required. It is requested that National Grid continues to liaise with us through your existing contact at ScottishPower Renewables, Philip Rew-Williamson (prew-williamson@scottishpower.com). Please do not hesitate to contact us for further discussion or information requests.

Yours Sincerely,



Digitally signed by Gareth Mills Date: 2022.03.21 14:49:20 Z

Gareth Mills EA Hub Onshore Project Manager, UK Offshore Development, ScottishPower Renewables Appendix 6: The Consultee's Response to Targeted Consultation



10 October 2022

Return address: Terence Epo East Anglia Three Limited c/o ScottishPower Renewables 320 St Vincent Street Glasgow G2 5AD

To whom it may concern,

Response to the Bramford to Twinstead Reinforcement September 2022 Targeted Consultation

This letter sets out East Anglia Three Limited's (EATL) comments on the updated National Grid proposal to reinforce the electricity transmission network between the National Grid Bramford Substation and Twinstead Tee.

EATL is wholly owned by ScottishPower Renewables and is in the process of discharging requirements for the East Anglia THREE offshore wind farm (EA3). EA3 is a Nationally Significant Infrastructure Project for which development consent was granted on 7 August 2017 pursuant to the East Anglia THREE Offshore Wind Farm Order 2017 (EA3 Order)..

By virtue of Article 30 of the EA3 Order, EATL is a statutory undertaker for the purposes of this project and the land within the Order Limits should be treated as operational land required in connection with its statutory undertaking. Proposed works in Section AB - Bramford Substation to Hintlesham - is located within the Order Limit of the onshore connection works for EA3, namely the proposed removal of existing 400kV pylons and replacement with a new 400kV pylon at Bramford Substation. As such, EATL have a significant interest as statutory undertaker whose operational land is affected.

EATL recognise the importance of the proposed reinforcement works, however it is imperative that the works do not compromise the construction and operation of EA3 which will deliver substantial renewable energy benefits towards meeting the national need for renewable energy identified in the National Policy Statement for Renewable Energy (EN-3).

Following on from our initial letter in response to the consultation in January 2022, alongside meetings between SPR and National Grid, the changes to the design at Bramford have been reviewed and it is appreciated that a number of our previous comments have been taken into consideration. Any outstanding comments are described below.

Works within EA3 Order limits

The proposed removal of two 400kV pylons and the construction of a new 400kV pylon at Bramford Substation, are within the EA3 Order Limits, on land owned by ScottishPower

EAST ANGLIA THREE LIMITED Offshore Windfarm, 3rd Floor, 1 Tudor Street, London EC4Y 0AH



Renewables. It is imperative that the reinforcement works around Bramford Substation are designed to ensure there is no impact on any EA3 land required to mitigate or operate the EA3 project. Access to the EA3 substation by EATL must also be maintained at all times during both the construction and operational phases of the proposed works.

Additionally, consideration is needed to ensure that any additional planting does not undermine the EA3 Landscape Master Plan requirements contained within the DCO and landscape management strategies. The requirement for any variation or consents as part of these works resulting for EA3 would be the responsibility of National Grid in consultation with EA3.

Cumulative effects

Given the requirement to assess cumulative effects in paragraph 5(e) of Schedule 4 to the Town and Country Planning (Environmental Impact Assessment) Regulations 2017, we trust that a full cumulative environmental assessment with the EA3 project will be undertaken. As the proposed works are likely to coincide with the construction phase of EA3, we believe the following topics require consideration, some of which are already noted in the preliminary cumulative assessment in the PEIR:

- Traffic and transport: Cumulative impacts from construction traffic associated with the proposed works and the EA3 Convertor Station and cable route should be assessed. Additionally, the impact on Public Rights of Way (PRoW) amenity along the bridleway at Bullen Lane, which coincides with the vehicular access along Bullen Lane, should be considered.
- Landscape, ecology and water resources: There is the potential for cumulative impacts in relation to landscape, water resources and ecology. This is associated with the potential for impacts on existing landscape planting around the EA3 substations and on the SuDS pond due the proximity of the works. This could have subsequent impacts on local fauna, including Great Crested Newts in the SuDS pond.
- Noise: The potential noise impacts from concurrent construction activities should be considered in the assessment and mitigated accordingly. It should be noted that piling activities are expected at the EA3 Converter Station. Information on the number, type and timing of these works will become available in Q3 of 2023.

SPR recognises the importance of the proposed works and the contribution both projects have in meeting the national need for renewable energy. We are keen to continue working with National Grid and welcome further meetings to discuss the issues noted above and any other items, including if National Grid would still like to arrange a Statement of Common Ground following these design updates.

SPR are committed to Mid Suffolk District Council's strategic cumulative group in the Bramford area and are happy to provide appropriate information on the EA3 site as required. It is requested that National Grid liaise with us through Terence Epo, (tepo@scottishpower.com). Please do not hesitate to contact us for further discussion or information requests.

Yours Sincerely,





Terence Epo Project Manager, Consent Compliance, UK Offshore Development, ScottishPower Renewables Page intentionally blank

National Grid plc National Grid House, Warwick Technology Park, Gallows Hill, Warwick. CV34 6DA United Kingdom

Registered in England and Wales No. 4031152 nationalgrid.com