# **FARMS: TRANSMISSION ASSETS**

## **Environmental Statement**

Volume 3, Annex 2.3: Flood risk assessment - part 3 of 3









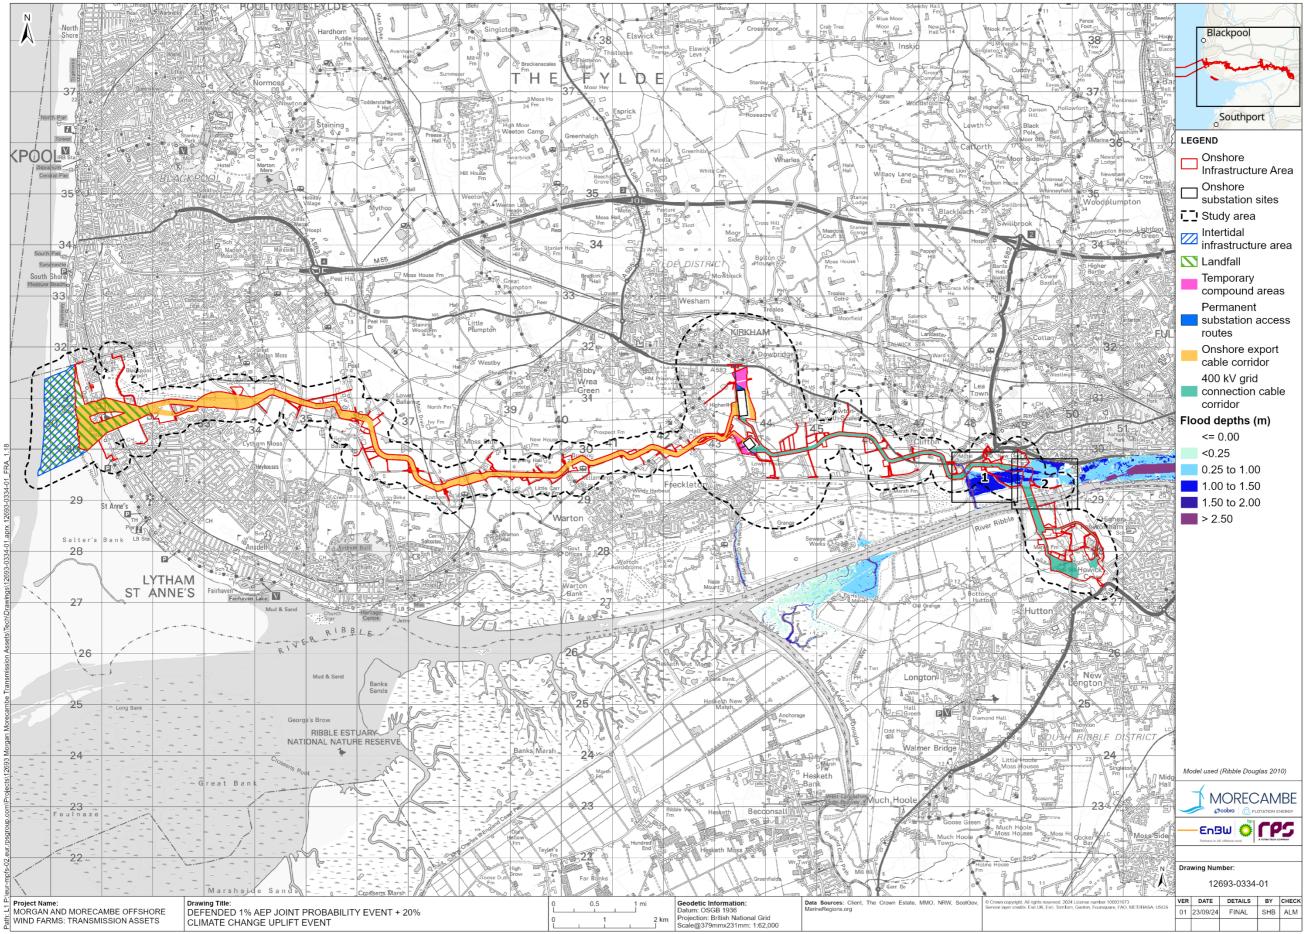


Figure 1.18a: Defended 1% AEP joint probability event plus 20% climate change uplift event







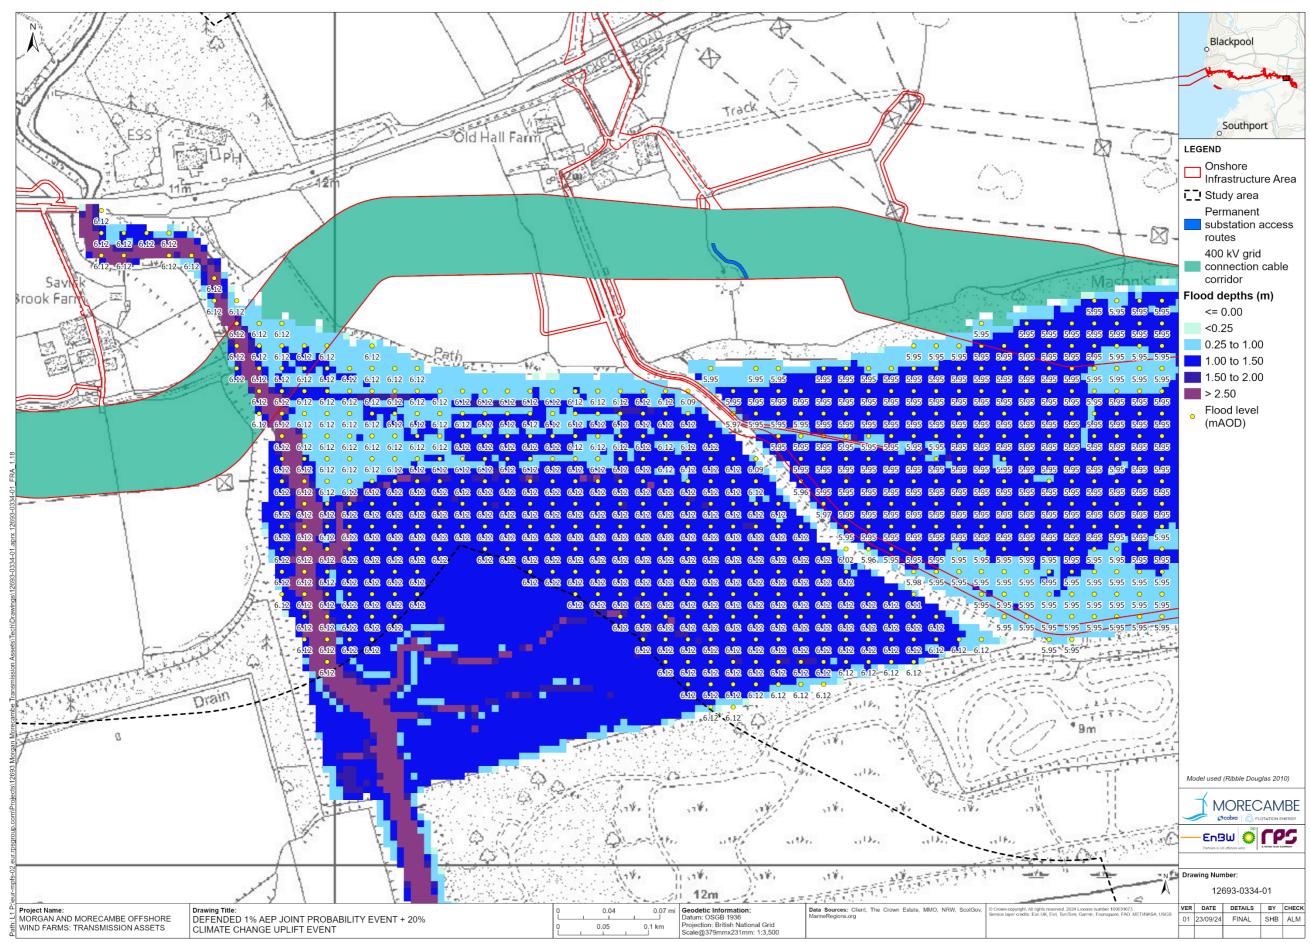


Figure 1.18a: Defended 1% AEP joint probability event plus 20% climate change uplift event







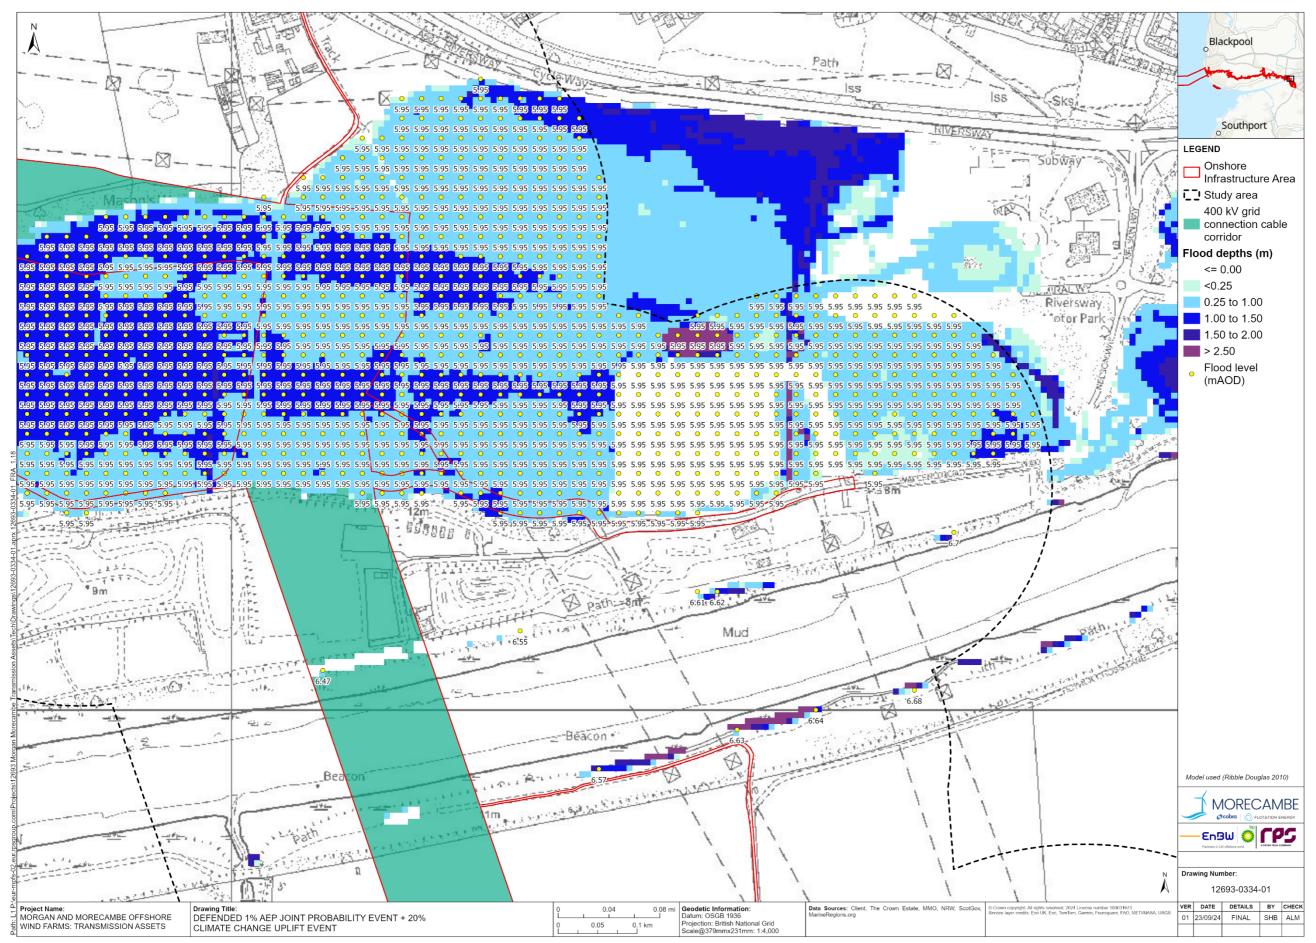


Figure 1.18a: Defended 1% AEP joint probability event plus 20% climate change uplift event







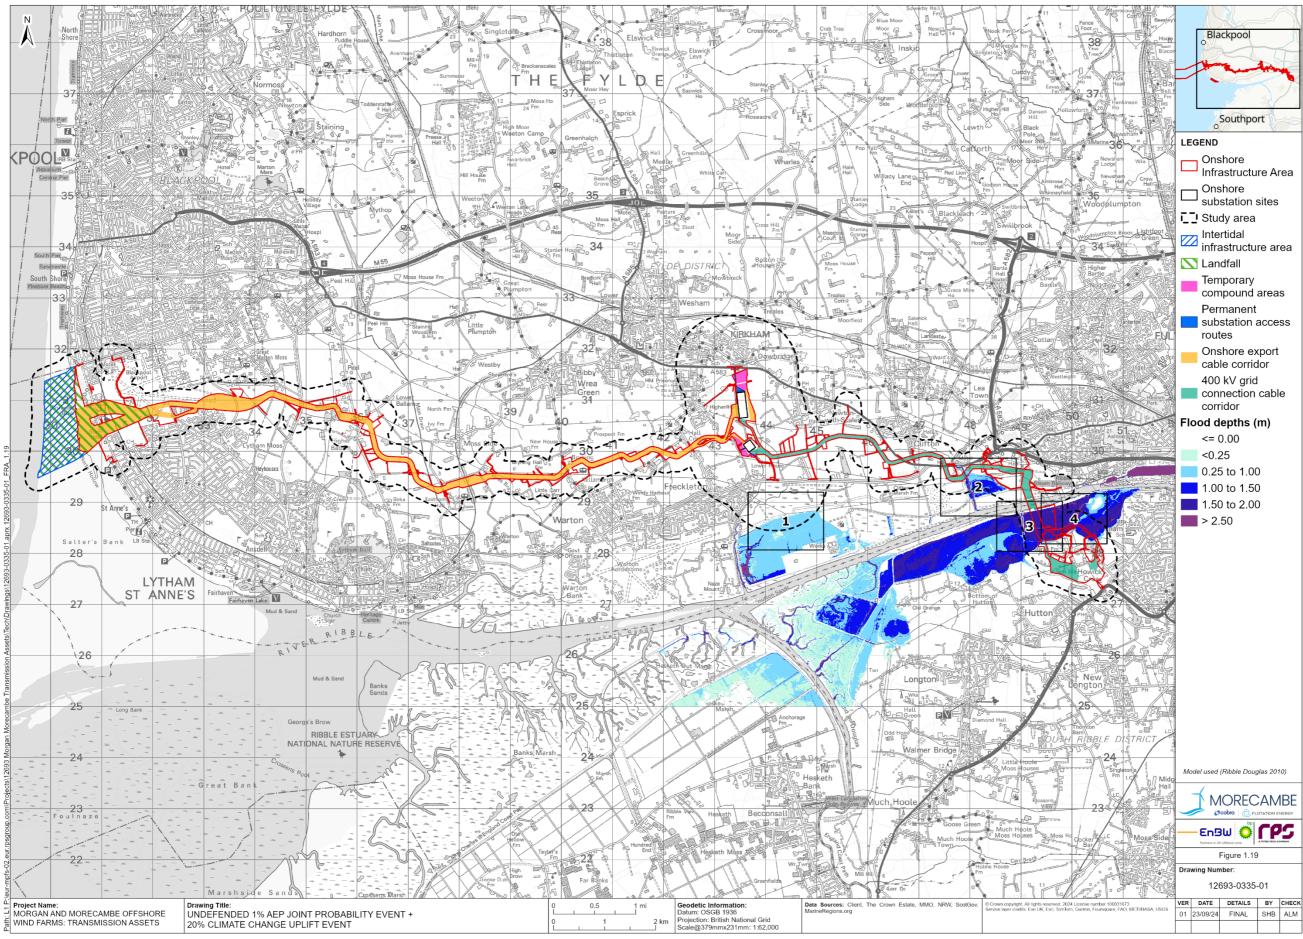


Figure 1.19a: Undefended 1% AEP joint probability event plus 20% climate change uplift event







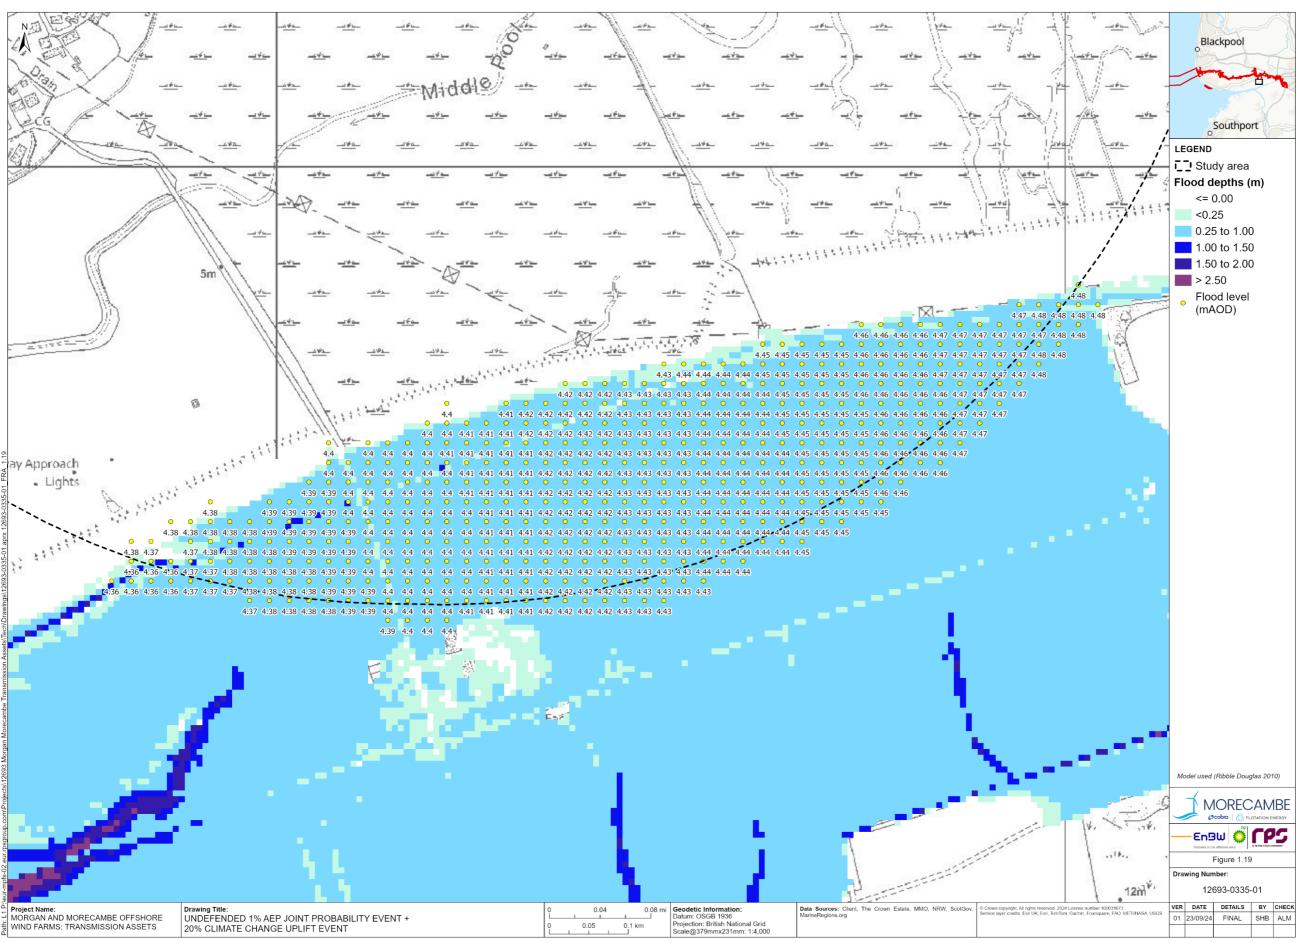


Figure 1.19a: Undefended 1% AEP joint probability event plus 20% climate change uplift event







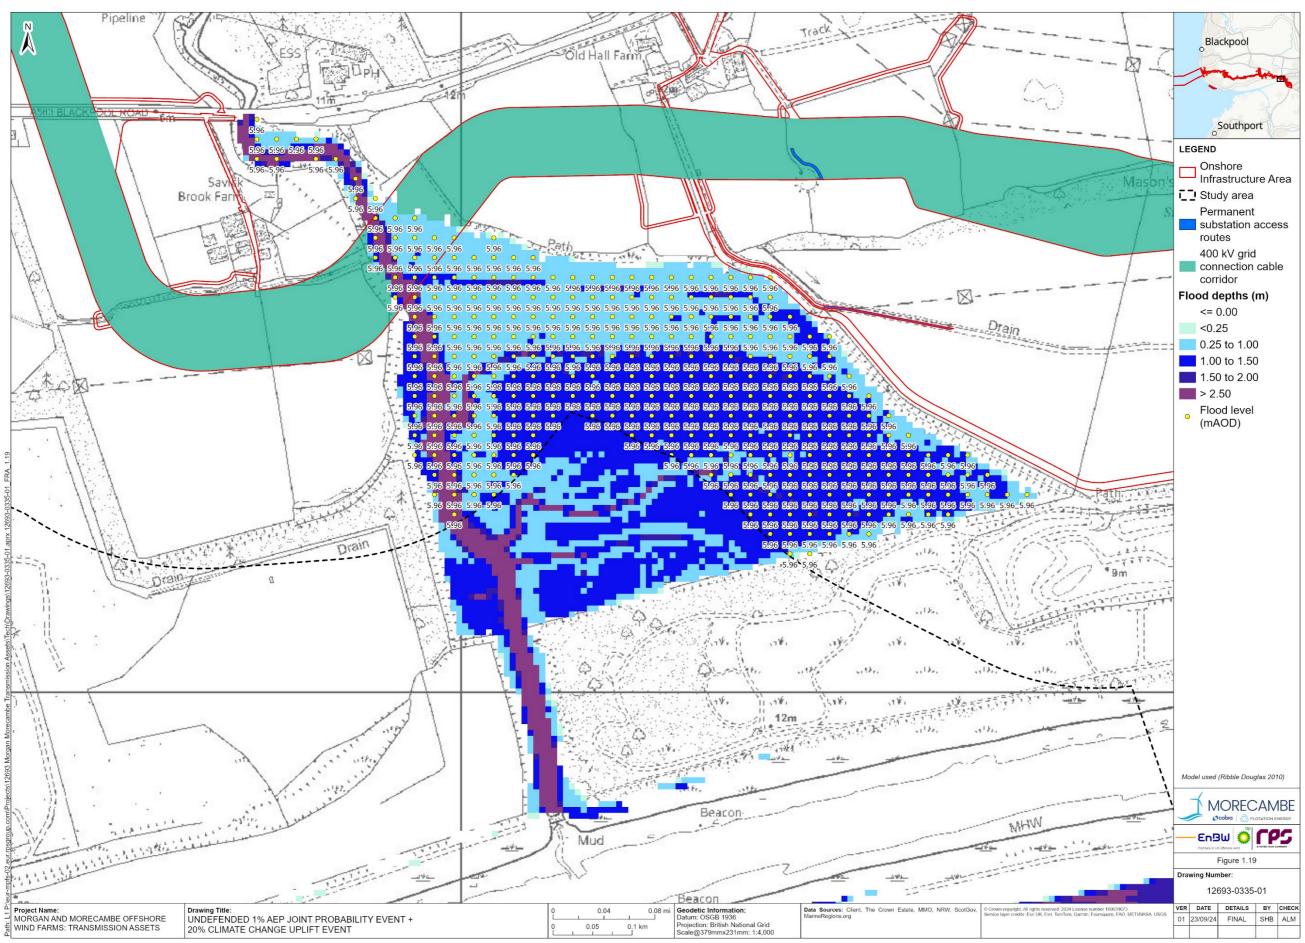


Figure 1.19a: Undefended 1% AEP joint probability event plus 20% climate change uplift event







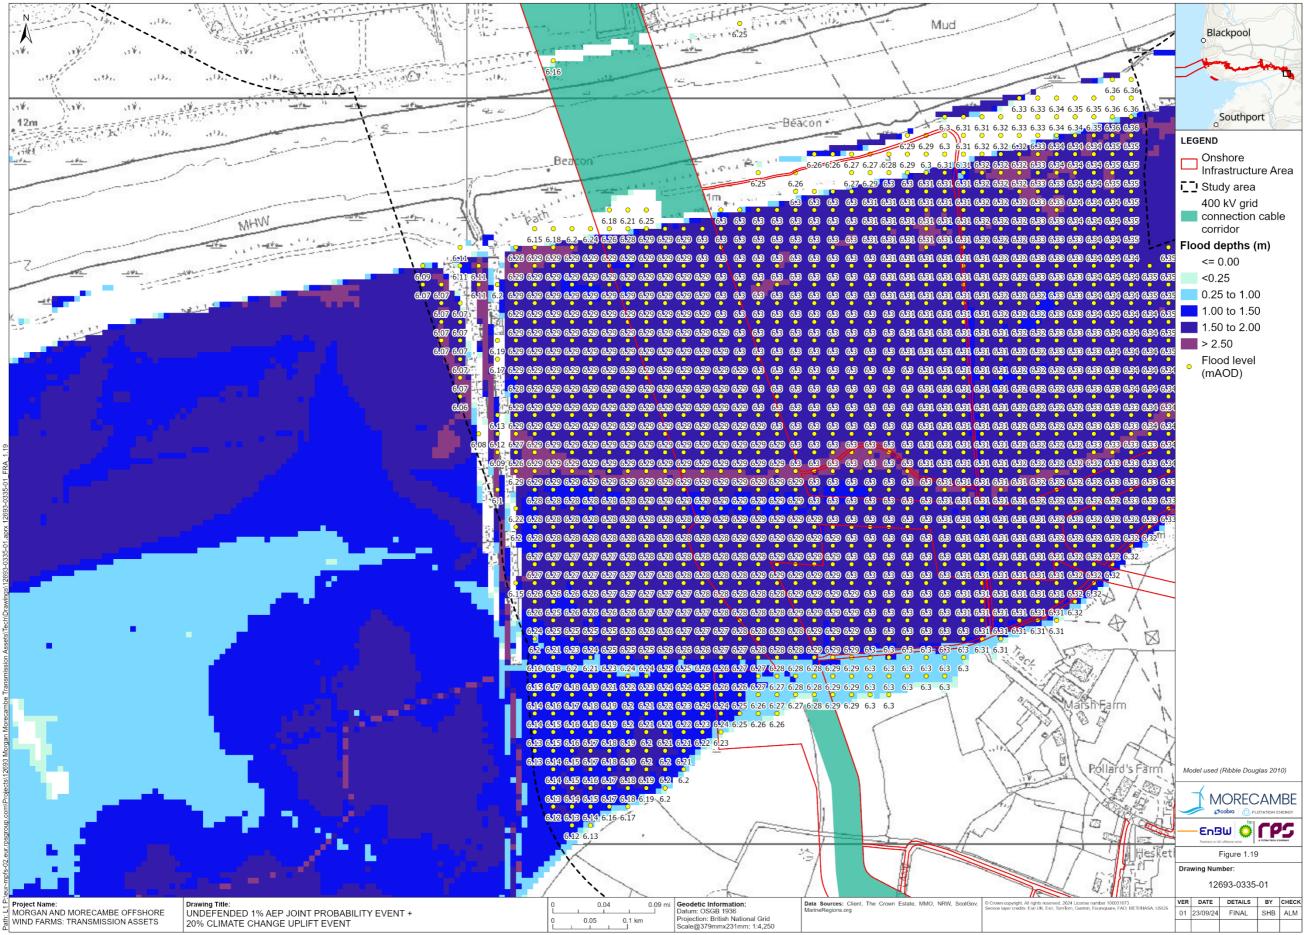


Figure 1.19a: Undefended 1% AEP joint probability event plus 20% climate change uplift event







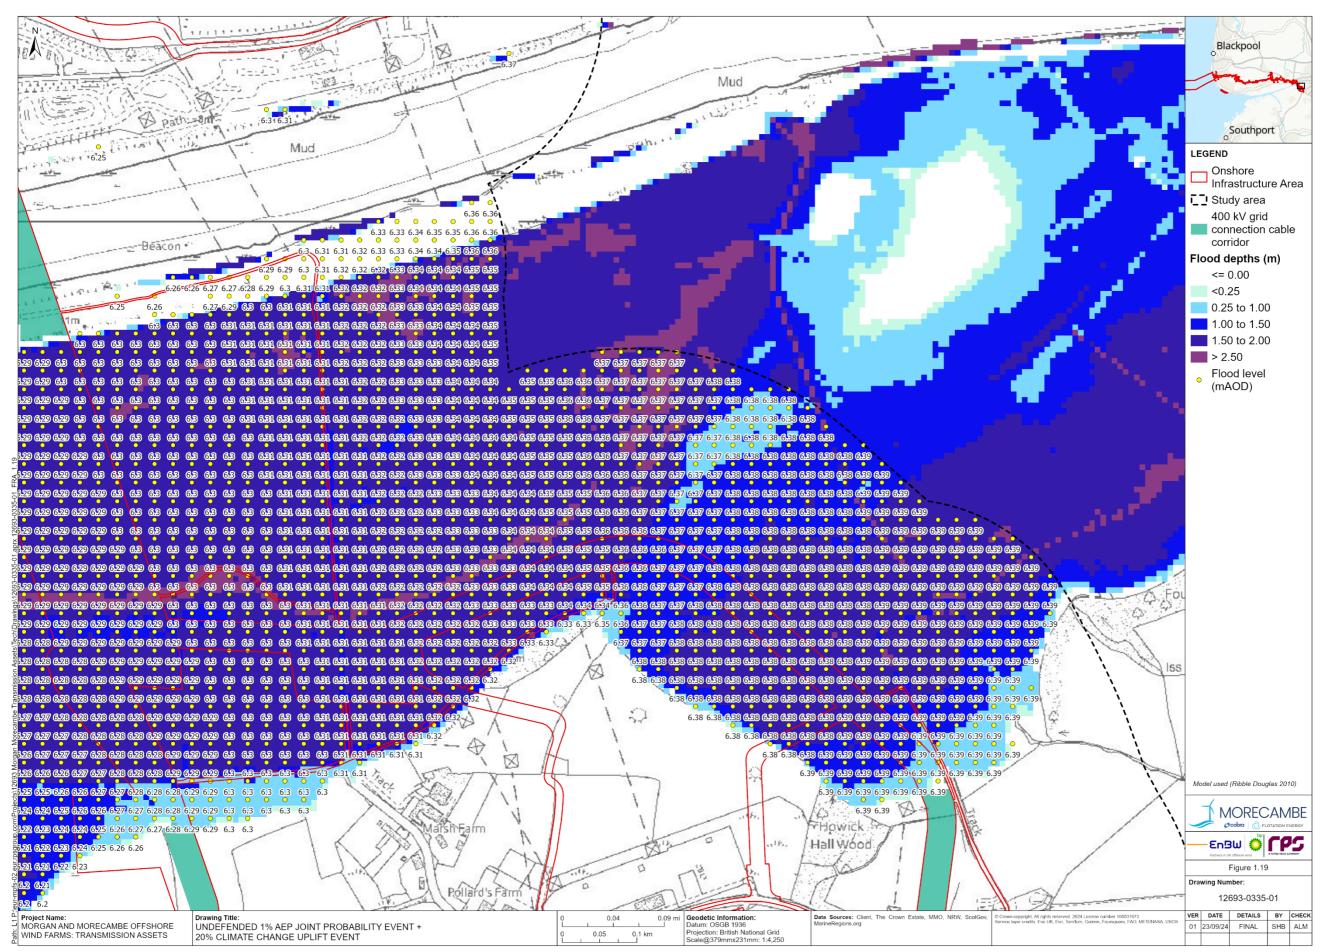


Figure 1.19a: Undefended 1% AEP joint probability event plus 20% climate change uplift event







## 1.7.5 Groundwater flood risk

- 1.7.5.1 Groundwater flood risk mapping included within the Groundsure Enviro and Geo Insight report shows the western extent of the study area has a 'low' risk of groundwater flooding. The eastern extent of the study area has a 'moderate' to 'high' risk of groundwater flooding, associated with the water table being located closer to the surface within proximity to the Ribble Estuary.
- 1.7.5.2 Mitigation measures as identified in Volume 3, Chapter 1: Geology, hydrogeology and ground conditions of the ES limit the potential impact from this source. Any ingress of groundwater during excavation and trenching will be managed appropriately using dewatering as outlined in Volume 1, Chapter 3: Project description. With the mitigation, the overall risk of flooding from groundwater has been assessed to be very low.

## **Strategic Flood Risk Assessment Data**

#### **Central Lancashire Strategic Flood Risk Assessment (2007)**

1.7.5.3 The CL SFRA reported occurrences of groundwater flooding from hard rock aquifers or superficial deposits in the north west Environment Agency region.

## **Mitigation measures (commitments)**

1.7.5.4 Mitigation measures (commitments) presented below within **Table 1.39** are proposed to manage flood risk and vulnerability to site workers during the construction and decommissioning phase. No commitments relating to groundwater flooding are required during the operation and maintenance phase. Commitments are also presented within **Section 1.8**, **Table 1.44**. Commitments are to be secured through requirements of the DCO.

Table 1.39: Summary of CoT for groundwater flood risk

СоТ	Summary	Reason	How CoT is to be secured
CoT09	The Outline Code of Construction Practice (CoCP) has been submitted as part of the application for development consent. Detailed CoCP(s) will be developed in accordance with the outline CoCP. The Outline CoCP includes information about drainage during construction.	To implement construction phase drainage to control runoff during this phase of the Transmission Assets.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)







СоТ	Summary	Reason	How CoT is to be secured
CoT35	An Outline Code of Construction Practice (CoCP) has been prepared and submitted with the application for development consent. Detailed CoCP(s) will be developed in accordance with the outline CoCP. The Outline CoCP will include measures to maintain and address:  • [] flood protection and control measures;  • -water environment and drainage; and  • pollution prevention []	To implement control measures in regards to fluvial and tidal flooding, including:  • Measures to prevent a reduction in the capacity of the fluvial floodplain which can increase flood risk downstream;  • Measures regarding dewatering;  Measures regarding restricting the placement of stockpiling, storage of fuels and chemicals and refuelling to Flood Zone 1 (where practical) and at least 8 m from ordinary watercourses and Main Rivers and 16m from tidal Main Rivers to reduce vulnerability to flood risk;	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT36	Onshore Decommissioning Plan(s) will be developed prior to decommissioning. The Onshore Decommissioning Plan(s) will include provisions for the removal of all onshore above ground infrastructure and the decommissioning of below ground infrastructure (if and where relevant and practicable), and details relevant to flood risk, pollution prevention and avoidance of ground disturbance. The Onshore Decommissioning Plan(s) will be in line with the latest relevant available guidance.	To manage flood risk during decommissioning	DCO Schedules 2A and 2B, Requirement 22 (Onshore decommissioning)
CoT41	Where the onshore export cable corridor or 400 kV grid connection cable corridor crosses sites of particular sensitivity (e.g. embanked Environment Agency surface watercourses, Sites of Special Scientific Interest or groundwater inner Source Protection Zones) hydrogeological risk assessment(s) will be undertaken to inform a site-specific crossing method statement(s) where required. These will be agreed with the relevant stakeholders prior to construction.	To inform groundwater flood risk	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)







## **Summary**

1.7.5.5 With the implementation of commitments listed within **Table 1.39** the overall risk of flooding from groundwater is assessed to be very low.

## 1.7.6 Surface water flood risk

1.7.6.1 Surface water flooding occurs when the amount of rainfall exceeds the drainage or infiltration capacity of the surface it falls upon. Surface water runoff can coalesce into surface water flow pathways as it flows towards a drainage system or watercourse. Surface water can also pond within areas of inadequate drainage.

# **Environment Agency Long Term Flood Risk Mapping**

1.7.6.2 The Environment Agency long term flood risk from surface water mapping is presented within **Figure 1.20** and shows localised areas along the study area as having 'low' to 'high' risk of flooding from surface water and ordinary watercourses. Flooding is predominantly associated overland flow pathways flowing towards ordinary watercourses and out-of-bank flows from ordinary watercourses which form tributaries to main rivers.

## **Strategic Flood Risk Assessment Data**

Strategic Flood Risk Assessment (Fylde Borough Council, 2011)

- 1.7.6.3 Relevant information from the Fylde Council SFRA has been extracted and included as follows.
  - Localised flooding hotspots from surface water flooding are identified within Little Eccleston, Elswick, Freckleton and the eastern edge of Blackpool.
- 1.7.6.4 No in-depth mapping was available as a part of the Fylde Council SFRA.

Blackpool Council Strategic Flood Risk Assessment (2014)

- 1.7.6.5 Relevant information from the Blackpool Council SFRA has been extracted and included as follows.
  - There are certain areas of the Blackpool Council area, that are at risk of surface water flooding from and during exceptional rainfall events. These areas include:
    - Anchorsholme:
    - Marton Mere Catchment Station;
    - Staining North Catchment; and
    - Marton Moss; and
    - Any area of the borough which is susceptible to inundation from a failure of the Public Sewerage Network/Highway Drainage System, or domestic or watercourse systems.







## **Mitigation measures (commitments)**

1.7.6.6 Mitigation measures (commitments) presented below within **Table 1.40** are proposed to manage flood risk and vulnerability to site workers during the construction and decommissioning phase. No commitments relating to surface water flooding are required during the operation and maintenance phase. Commitments are also presented within **Section 1.8, Table 1.44.** Commitments are to be secured through requirements of the DCO.

Table 1.40: Summary of CoT for surface water flood risk for landfall, the onshore export corridor and 400 kV grid connection cable corridor

СоТ	Summary	Reason	How CoT is to be secured
CoT08	Post-construction, the working area will be reinstated to pre-existing condition as far as reasonably practical in line with the DEFRA Construction Code of Practice for the Sustainable Use of Soils on Construction Sites (PB13298), Institute of Quarrying (IQ) Good Practice Guide for Handling Soils in Mineral Workings (IQ, 2021) and British Society of Soil Science (BSSS) Working with Soil Guidance Note on Benefitting from Soil Management in Development and Construction (BSSS, 2022).	To ensure working areas are reinstated to pre-existing conditions to not increase flood risk from surface water runoff as a result of increased impermeable areas	DCO Schedules 2A & 2B, Requirement 18 (Restoration of land temporarily used for construction); DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT09	The Outline Code of Construction Practice (CoCP) has been submitted as part of the application for development consent. Detailed CoCP(s) will be developed in accordance with the outline CoCP. The Outline CoCP includes information about drainage during construction.	To implement construction phase drainage to control runoff during this phase of the Transmission Assets.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT24	Where practicable, during construction, access routes within the onshore export cable corridor and 400 kV grid connection corridor (i.e. for example, the use of haul roads) will be used, to minimise potential impacts to the local road network.	To not increase impermeable areas associated with haul roads and in turn increase surface water runoff and flood risk from this source	DCO Schedules 2A & 2B, Requirement 9 (Traffic and Transport) Access to Works Plan
CoT27	All temporary compounds will be removed and sites will be reinstated when construction has been completed.	To not increase surface water runoff as a result of greater impermeable areas during the operation and maintenance phase	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice) DCO Schedules 2A & 2B, Requirement 16 (Restoration of land used temporarily for construction)







СоТ	Summary	Reason	How CoT is to be secured
CoT35	An Outline Code of Construction Practice (CoCP) has been prepared and submitted with the application for development consent. Detailed CoCP(s) will be developed in accordance with the outline CoCP. The Outline CoCP will include measures to maintain and address:  • [] flood protection and control measures;  • -water environment and drainage; and  • pollution prevention []	To implement control measures in regards to fluvial and tidal flooding, including:  • Measures to prevent a reduction in the capacity of the fluvial floodplain which can increase flood risk downstream;  • Measures regarding dewatering;  • Measures regarding restricting the placement of stockpiling, storage of fuels and chemicals and refuelling to Flood Zone 1 (where practical) and at least 8 m from ordinary watercourses and Main Rivers and 16m from tidal Main Rivers to reduce vulnerability to flood risk;	DCO Schedules 2A & 2B, Requirement 22 (Onshore decommissioning)
CoT36	Onshore Decommissioning Plan(s) will be developed prior to decommissioning. The Onshore Decommissioning Plan(s) will include provisions for the removal of all onshore above ground infrastructure and the decommissioning of below ground infrastructure (if and where relevant and practicable), and details relevant to flood risk, pollution prevention and avoidance of ground disturbance. The Onshore Decommissioning Plan(s) will be in line with the latest relevant available guidance.	To manage flood risk during decommissioning	DCO Schedules 2A & 2B, Requirement 22 (Onshore decommissioning)

## **Summary**

1.7.6.7 Commitments listed in **Table 1.40** above will ensure the landfall and onshore export cable corridor and 400 kV grid connection cable corridor will not be impacted by or cause any adverse effect on surface water flooding during the construction phase. As such, flood risk from this source is assessed to be low.

#### 1.7.7 Reservoir flood risk

1.7.7.1 Reservoir flood maps show where water may go in the unlikely event of a dam or reservoir failure. EA reservoir flood risk mapping is presented within **Figure 1.10** shows that for a dry scenario (defined by the Environment Agency as where river levels are normal), flood water is expected to remain within the channels of the River Ribble and the Savick Brook.







- 1.7.7.2 During a wet scenario (defined by the Environment Agency as when there is also flooding from rivers) a significant portion of the study area is expected to become inundated. Water is shown to extend north and south from the River Ribble and encompass approximately 460 ha of land. There are additional small portions of land around the Main Drain in the west of the study area that are also shown to be affected during the wet scenario.
- 1.7.7.3 Due to the regular inspection and maintenance regime in place on large reservoirs, the likelihood of catastrophic failure and therefore risk of flooding to the site from this source is unlikely to occur.
- 1.7.7.4 Taking into account the above, the overall risk of flooding from a reservoir failure has been assessed to be low.







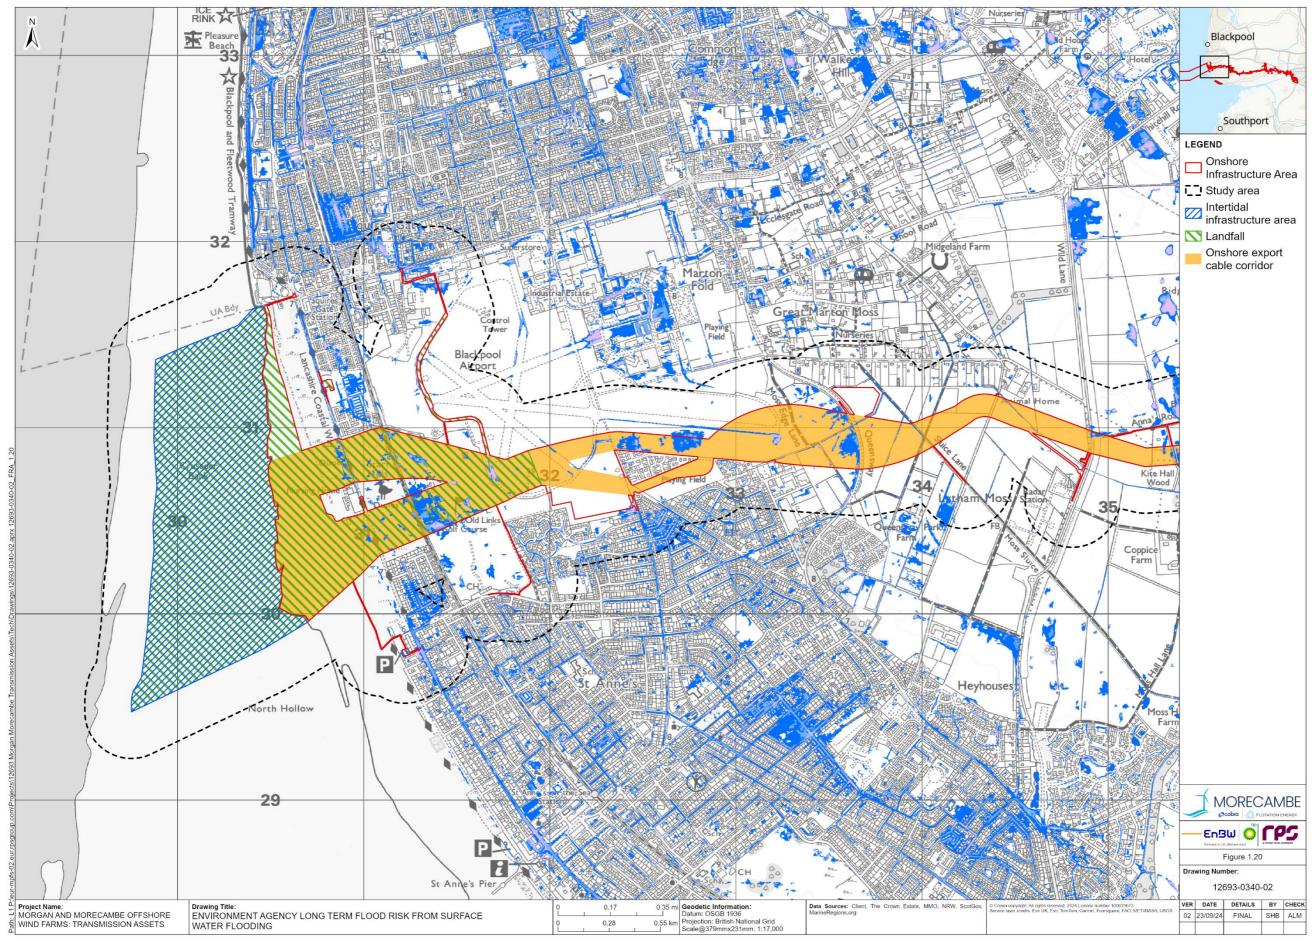


Figure 1.20a: Environment Agency Long term flood risk from surface water flooding







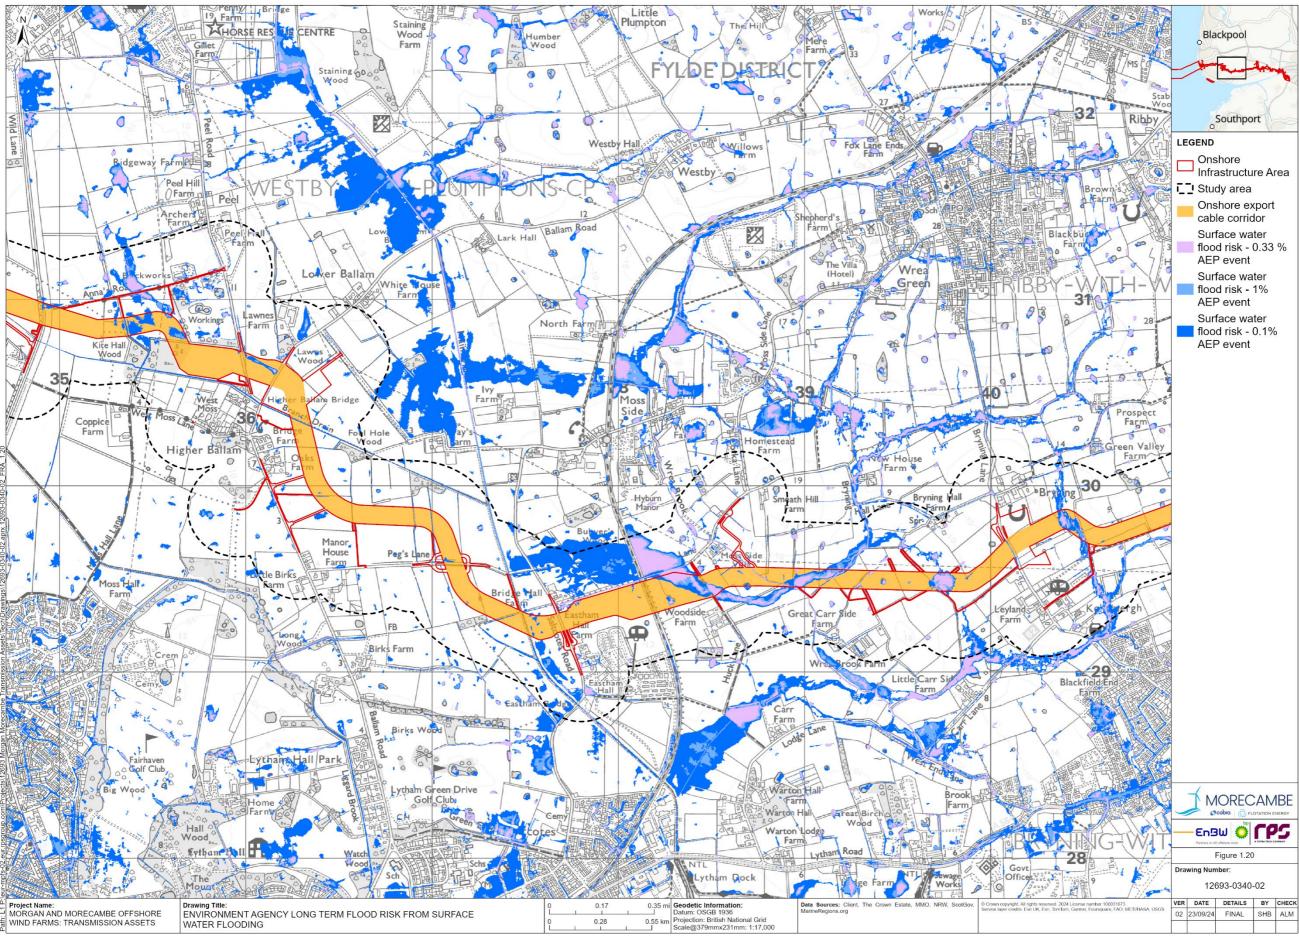


Figure 1.20a: Environment Agency Long term flood risk from surface water flooding







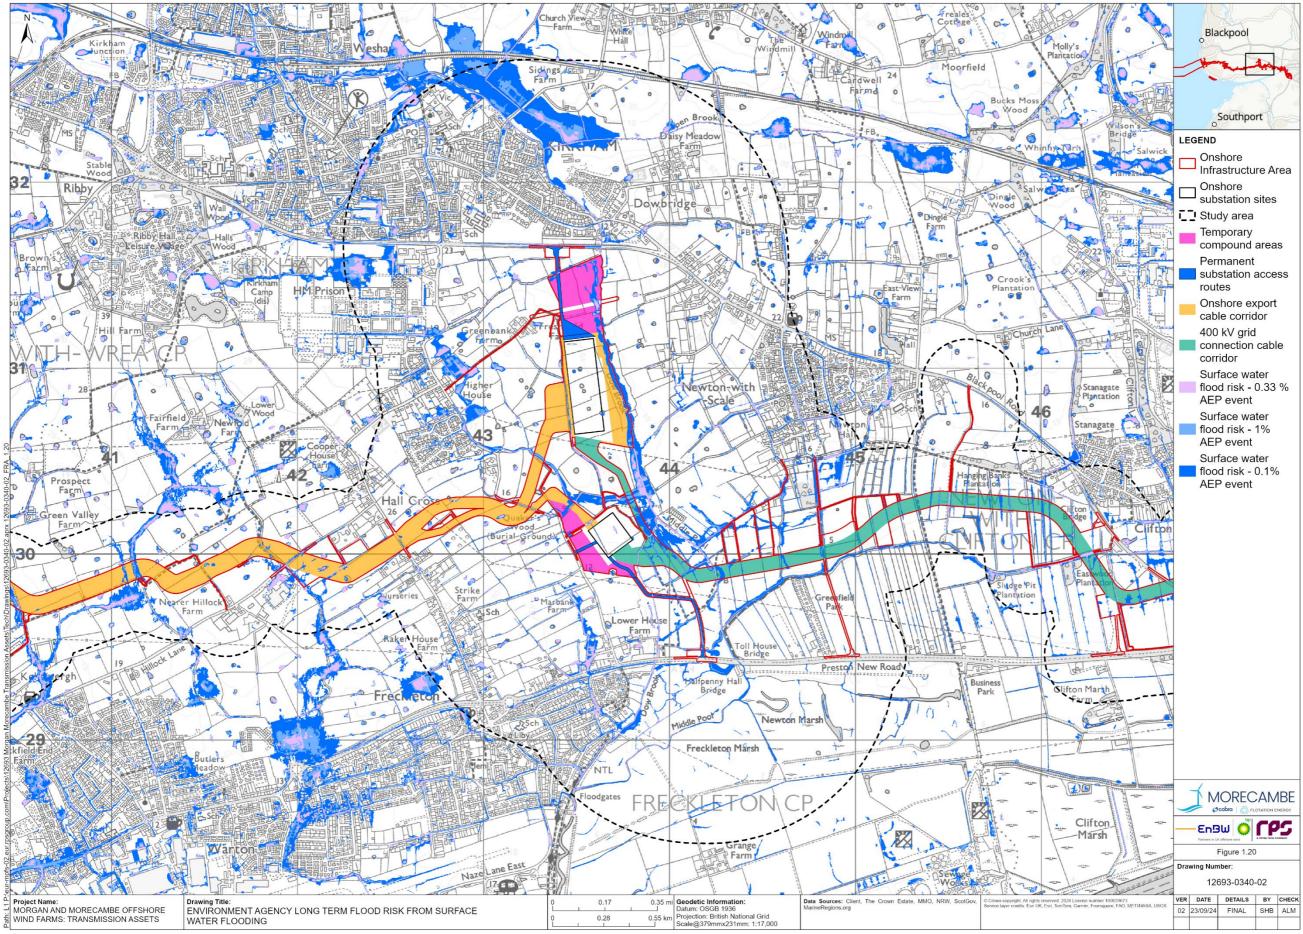


Figure 1.20a: Environment Agency Long term flood risk from surface water flooding







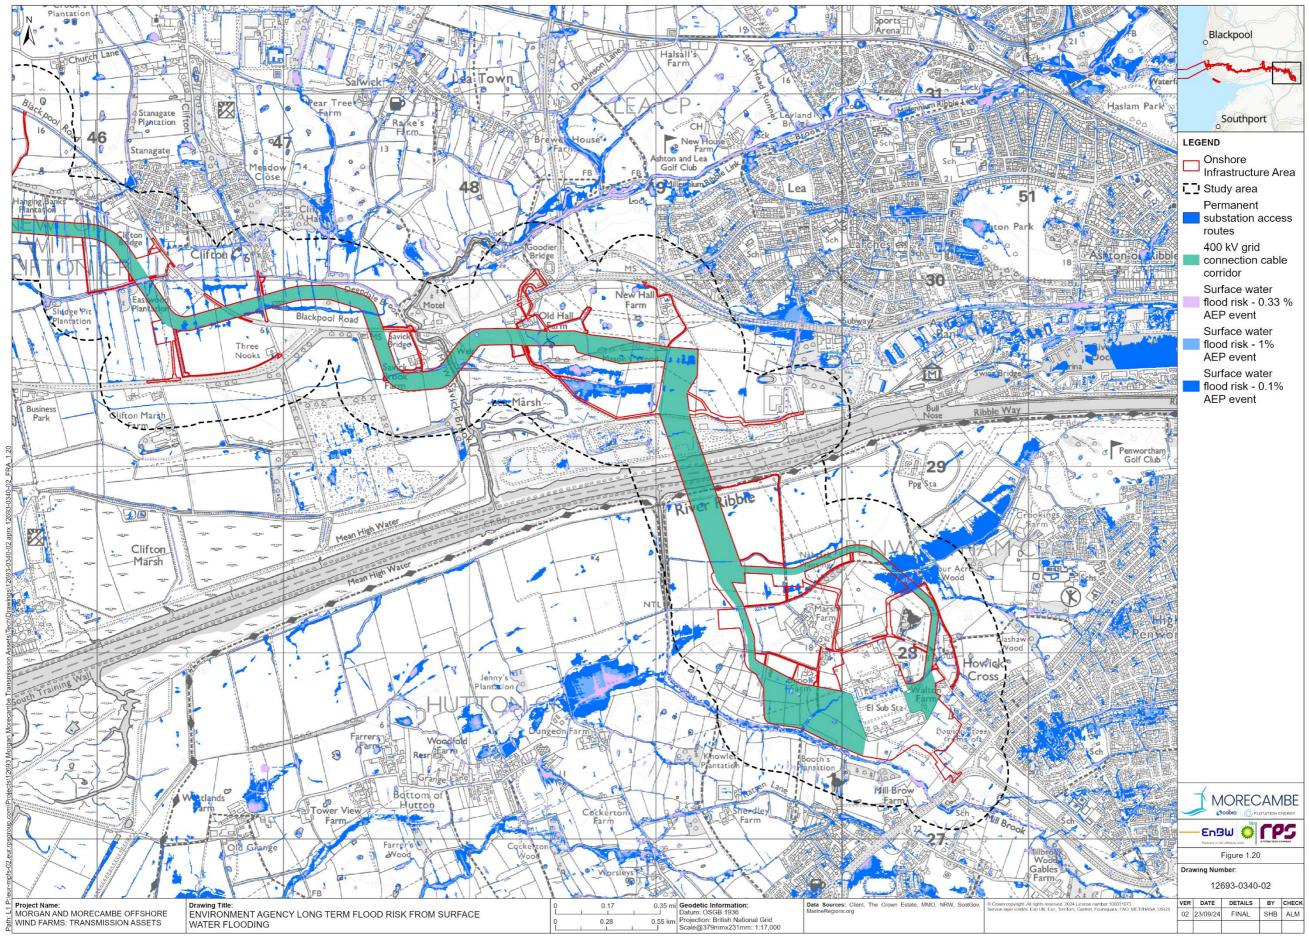


Figure 1.20a: Environment Agency Long term flood risk from surface water flooding







## 1.7.8 Flood risk from sewer and water main failure

- 1.7.8.1 United Utilities operate public sewer assets and water supplies in the study area. Flooding from sewerage failure occurs when a rainfall event exceeds the maximum capacity of the surrounding network. The most common causes of flooding from sewers are inadequate flow capacity, blockages, pumping station failures, burst water mains, water inflow from rivers or the sea, tide locking, siltation, fats/greases, and sewer collapse. Should any of these events occur there is a risk of flooding within the vicinity of the sewer by surcharge where the flood is in excess of the sewer capacity (usually 1 in 30-year event or greater).
- 1.7.8.2 As per **section 3.16.8** of Volume 1, Chapter 3: Project description of the ES, to ensure damage to sewers and water pipelines and thus flooding from this source is prevented during the construction phase, prior to the commencement of works, any construction activities will need to be undertaken in accordance with the water authorities design standards prior to gaining approval. This includes providing evidence to confirm the presence/lack of presence of any water authority assets (e.g. sewers and water mains) and if they are present, how final design and construction methods will be implemented to divert their assets (which will need additional approval) or avoid their assets.

## **Mitigation measures (commitments)**

1.7.8.3 Mitigation measures (commitments) presented below within **Table 1.41** are proposed to manage flood risk and vulnerability to site workers during the construction and decommissioning phase. No commitments relating to groundwater flooding are required during the operation and maintenance phase. Commitments are also presented within **Section 1.8**, **Table 1.44**. Commitments are to be secured through requirements of the DCO.

Table 1.41: Summary of CoT for flood risk from sewers for landfall, the onshore export corridor and 400 kV grid connection cable corridor

СоТ	Summary	Reason	How CoT is to be secured
CoT09	The Outline Code of Construction Practice (CoCP) has been submitted as part of the application for development consent. Detailed CoCP(s) will be developed in accordance with the outline CoCP. The Outline CoCP includes information about drainage during construction.	To implement construction phase drainage to control runoff during this phase of the Transmission Assets.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT35	An Outline Code of Construction Practice (CoCP) has been prepared and submitted with the application for development consent. Detailed CoCP(s) will be developed in accordance with	To implement control measures in regards to fluvial and tidal flooding, including:  • Measures to prevent a reduction in the capacity of the fluvial floodplain which	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)







СоТ	Summary	Reason	How CoT is to be secured
	the outline CoCP. The Outline CoCP will include measures to maintain and address:  • [] flood protection and control measures;  • -water environment and drainage; and  • pollution prevention []	can increase flood risk downstream;  • Measures regarding dewatering;  • Measures regarding restricting the placement of stockpiling, storage of fuels and chemicals and refuelling to Flood Zone 1 (where practical) and at least 8 m from ordinary watercourses and Main Rivers and 16m from tidal Main Rivers to reduce vulnerability to flood risk;	
CoT36	Onshore Decommissioning Plan(s) will be developed prior to decommissioning. The Onshore Decommissioning Plan(s) will include provisions for the removal of all onshore above ground infrastructure and the decommissioning of below ground infrastructure (if and where relevant and practicable), and details relevant to flood risk, pollution prevention and avoidance of ground disturbance. The Onshore Decommissioning Plan(s) will be in line with the latest relevant available guidance.	To manage flood risk during decommissioning	DCO Schedules 2A & 2B, Requirement 22 (Onshore decommissioning)

#### **Summary**

1.7.8.4 With implementation of commitments listed within **Table 1.41**, flood risk from sewers is therefore assessed to be very low.

## 1.7.9 Flood risk from artificial sources

1.7.9.1 Field drainage is expected to be present within agricultural land within the study area and could pose localised sources of flooding if impacted during construction. Due to the nature of development associated with landfall, onshore export cable corridor and 400 kV grid connection cable corridor, which is predominantly to be buried below ground, development will not be impacted by or cause any adverse effect on field drainage following installation.

## **Mitigation measures (commitments)**

1.7.9.2 Mitigation measures (commitments) presented below within **Table 1.42** are proposed to manage flood risk and vulnerability to site workers during the







construction and decommissioning phase. No commitments relating to flooding from artificial sources are required during the operation and maintenance phase. Commitments are also presented within **Section 1.8**, **Table 1.44**. Commitments are to be secured through requirements of the DCO.

Table 1.42: Summary of CoT for flood risk from artificial sources for landfall, the onshore export corridor and 400 kV grid connection cable corridor

СоТ	Summary	Reason	How CoT is to be secured
CoT09	The Outline Code of Construction Practice (CoCP) has been submitted as part of the application for development consent. Detailed CoCP(s) will be developed in accordance with the outline CoCP. The Outline CoCP includes information about drainage during construction.	To implement construction phase drainage to control runoff during this phase of the Transmission Assets.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT35	An Outline Code of Construction Practice (CoCP) has been prepared and submitted with the application for development consent. Detailed CoCP(s) will be developed in accordance with the outline CoCP. The Outline CoCP will include measures to maintain and address:  • [] flood protection and control measures;  • -water environment and drainage; and  • pollution prevention []	To implement control measures in regards to fluvial and tidal flooding, including:  • Measures to prevent a reduction in the capacity of the fluvial floodplain which can increase flood risk downstream;  • Measures regarding dewatering;  Measures regarding restricting the placement of stockpiling, storage of fuels and chemicals and refuelling to Flood Zone 1 (where practical) and at least 8 m from ordinary watercourses and Main Rivers and 16m from tidal Main Rivers to reduce vulnerability to flood risk;	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT36	Onshore Decommissioning Plan(s) will be developed prior to decommissioning. The Onshore Decommissioning Plan(s) will include provisions for the removal of all onshore above ground infrastructure and the decommissioning of below ground infrastructure (if and where relevant and practicable), and details relevant to flood risk, pollution prevention and avoidance of ground disturbance. The Onshore Decommissioning Plan(s) will be in line with the latest relevant available guidance.	To manage flood risk during decommissioning	DCO Schedules 2A & 2B, Requirement 22 (Onshore decommissioning)







СоТ	Summary	Reason	How CoT is to be secured
CoT84	An Outline Code of Construction Practice (CoCP) has been prepared and submitted with the application for development consent. Detailed CoCP(s) will be developed in accordance with the Outline CoCP. In order to manage impacts to field drainage, the Outline CoCP stipulates field drainage plans will be developed in consultation with the relevant landowners. If required, additional field drainage will be installed to ensure the existing drainage of the land is maintained during and after construction.	To prevent flooding from field drainage	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)

## **Summary**

1.7.9.3 With implementation of commitments listed within **Table 1.42**, flood risk from artificial sources is therefore assessed to be very low.

# 1.7.10 Historic flooding

1.7.10.1 The Environment Agency Historic Flood Map is presented within **Figure 1.11** and records historical flooding has occurred within the study area on the land north of the River Ribble, and around Savick Brook. Extents are approximately 95.4 ha.

## **Strategic Flood Risk Assessment Data**

## Strategic Flood Risk Assessment (Fylde Borough Council, 2011)

- 1.7.10.2 Relevant information from the Fylde Council SFRA has been extracted and included as follows.
  - Fylde Borough Council do not hold any records of historical flooding.

# 1.7.11 Summary of flood risk

1.7.11.1 A summary of assessed flood risk is presented below within **Table 1.43.** 

#### Table 1.43: Morecambe onshore substation flood risk summary

Source of flooding	Assessed risk to Morecambe onshore substation	Commitment measures to be adopted
Fluvial and tidal	Low	CoT02 CoT06, CoT08, CoT09 CoT10, CoT12, CoT14 CoT27 CoT35, CoT36, CoT95 and CoT97
Groundwater	Very low	CoT09 CoT35 CoT36, CoT41







Source of flooding	Assessed risk to Morecambe onshore substation	Commitment measures to be adopted
Surface water	Low	CoT08, CoT09, CoT24, CoT27, CoT35, CoT36
Reservoir	Very low	None
Sewer	Very low	CoT09 CoT35 CoT36,
Artificial Sources	Very low	CoT09 CoT35 CoT36 CoT84

# 1.8 Flood Risk Management

# 1.8.1 Measures adopted as part of the Transmission Assets (Commitments)

1.8.1.1 Embedded and secondary measures relevant to flood risk of the Transmission Assets that will form part of the final design (and/or are established legislative requirements/good practice) have been taken into account as part of the flood risk assessment presented in **section 1.5.4** and below within **Table 1.44**.







# **Table 1.44: Mitigation measures and commitments**

Commitment number	Mitigation measure	How will this commitment be secured?	
Embedded m	easures		
CoT02	The following features will be crossed by trenchless techniques, as set out in the Onshore Crossing Schedule submitted as part of the application for development consent:	DCO Schedules 2A & 2B, Requirement 5(2) (Detailed	
	A, B and Classified unnumbered roads (known as C roads) (including the Preston Western Distributor Road, A582 South Ribble Western Distributor Upgrade and M55 Heyhouses Link Road; excluding Leech Lane);	design parameters onshore); DCO Schedules 2A & 2B, Requirement 8 (Code of	
	<ul> <li>All Environment Agency Main Rivers, including: Moss Sluice, east of Midgeland Road along Pegs Lane; Savick Brook, south of A583; Wrea Brook southeast of Cartmell Lane; Dow Brook east of Lower Lane between the A584 and the A583; Middle Pool north of Lund Way; and</li> </ul>	Construction Practice)"	
	All Network Rail crossings, including along the line which runs between Blackpool North and Preston, south of Cartmell Lane; and at the Network Rail crossing along the line which runs to Blackpool North, south east of Squires Gate, parallel to the A584.		
СоТ06	The construction area associated with onshore export cable corridor will be 100 m working width and the 400 kV grid connection cable corridor will be working width 76 m to minimise the construction footprint, except at complex trenchless technique crossings, including, but not limited to:	DCO Schedules 2A & 2B, Requirement 5 (Detailed design parameters onshore)	
	Network Railway Crossings;	Works Plans - Onshore and Intertidal	
	A, B and Classified unnumbered roads (known as C roads), including B5261 (Queensway);	intertidal	
	the approach to landfall;		
	river and water course crossings; and		
	sensitive utility assets (e.g. high pressure gas pipelines).		
	The widths of both the onshore export cable corridor and 400 kV grid connection cable corridor also increases up to 270 m in width, on the access and egress to the onshore substations, to facilitate consideration of trenchless crossings as well as being subject to detailed design. These increased widths and crossing methodologies are set out in the Onshore Crossing Schedule and Works Plans-Onshore and Intertidal.		
СоТ08	Post-construction, the working area will be reinstated to pre-existing condition as far as reasonably practical in line with the DEFRA Construction Code of Practice for the Sustainable Use of Soils on Construction Sites (PB13298), Institute of Quarrying (IQ) Good Practice Guide for Handling Soils in	DCO Schedules 2A & 2B, Requirement 18 (Restoration	







Commitment number	Mitigation measure	How will this commitment be secured?
	Mineral Workings (IQ, 2021) and British Society of Soil Science (BSSS) Working with Soil Guidance Note on Benefitting from Soil Management in Development and Construction (BSSS, 2022).	of land temporarily used for construction);
		DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT09	The Outline Code of Construction Practice (CoCP) has been submitted as part of the application for development consent. Detailed CoCP(s) will be developed in accordance with the outline CoCP. The Outline CoCP includes information about drainage during construction.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT10	Where trenchless techniques are proposed for Environment Agency Main Rivers, the following distances will be used:	DCO Schedules 2A and 2B, Requirement 8 (Code of
	8 m from the bank of the Environment Agency Main River or landward toe of any associated flood defence structure;	Construction Practice)
	16 m from tidal Environment Agency Main Rivers or the landward toe of any flood defences, where the Main River is a sea defence structure; and	
	a minimum of 2 m vertical clearance will be maintained below the hard bed of all Environment Agency Main Rivers, including the landward toe of any associated flood defences.	
	Final vertical clearance depths beneath Environment Agency Main Rivers will be identified during detailed design stage, in consultation with the Environment Agency, to ensure the export cables remain buried for the operational lifetime of the project.	
CoT11	An Outline Operational Drainage Management Plan for the substation sites has been prepared and submitted with the application for development consent. The Plan will include measures to ensure that existing land drainage is reinstated and/or maintained. This will include measures to limit discharge rates and attenuate flows to maintain greenfield runoff rates at the onshore substations. It will also include measures to control surface water runoff, including measures to prevent flooding of the working areas or offsite and to ensure any runoff is treated appropriately. Detailed Operational Drainage Management Plan(s) will be developed in accordance with the Outline Operational Drainage Management Plan and in line with the latest relevant drainage guidance notes in consultation with the Environment Agency and the Lead Local Flood Authority (Lancashire County Council).	DCO Schedules 2A & 2B, Requirement 20 (Outline Operational Drainage Management Plan)
CoT12	The onshore export cables and the 400 kV grid connection cables will be completely buried underground for the entire length. No overhead pylons will be installed as part of the Transmission Assets.	DCO Schedule 1, Part 1, Authorised Development







Commitment number	Mitigation measure	How will this commitment be secured?
CoT14	Joint bays will be completely buried, with the land above reinstated. An inspection cover will be provided on the surface for link boxes for access during operation and maintenance phase.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT24	Where practicable, during construction, access routes within the onshore export cable corridor and 400 kV grid connection corridor (i.e. for example, the use of haul roads) will be used, to minimise potential impacts to the local road network.	DCO Schedules 2A & 2B, Requirement 9 (Traffic and Transport) Access to Works Plan
CoT27	All temporary compounds will be removed and sites will be reinstated when construction has been completed.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice) DCO Schedules 2A & 2B, Requirement 16 (Restoration of land used temporarily for construction)
CoT35	An Outline Code of Construction Practice (CoCP) has been prepared and submitted with the application for development consent. Detailed CoCP(s) will be developed in accordance with the Outline CoCP. The Outline CoCP includes measures to maintain and address:  • []flood protection and control measures;  • water environment and drainage[]	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT36	Onshore Decommissioning Plan(s) will be developed prior to decommissioning. The Onshore Decommissioning Plan(s) will include provisions for the removal of all onshore above ground infrastructure and the decommissioning of below ground infrastructure (if and where relevant and practicable), and details relevant to flood risk, pollution prevention and avoidance of ground disturbance. The Onshore Decommissioning Plan(s) will be in line with the latest relevant available guidance.	DCO Schedules 2A & 2B, Requirement 22 (Onshore decommissioning)
CoT39	Fences, walls, ditches and drainage outfalls will be retained at the landfall and along the onshore export cable corridor and 400 kV grid connection cable corridor, where possible. Where it is not reasonably practicable to retain them, any damage will be repaired and reinstated as soon as reasonably practical. The Environment Agency must be notified if damage occurs to any Environment Agency main river or related flood infrastructure.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)







Commitment number	Mitigation measure	How will this commitment be secured?
CoT44	The Project Description (Volume 1, Chapter 3 of the Environmental Statement) sets out that the installation of the offshore export cables under Lytham St Annes SSSI and the St Annes Old Links Golf Course will be undertaken by direct pipe trenchless installation technique. The exit pits associated with the direct pipe installation will be at least 100 m seaward of the western boundary of the SSSI.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT82	Where trenchless techniques are proposed for crossing ordinary watercourses, the entry and exit pits will be set back a minimum of 8 m from the bank of the watercourse. These crossings are detailed in the Onshore Crossing Schedule. Where required, geomorphological surveys will be undertaken on ordinary watercourses that may be crossed by trenched techniques. These will be used to inform detailed designs prior to construction.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice); DCO Schedule 10
CoT84	An Outline Code of Construction Practice (CoCP) has been prepared and submitted with the application for development consent. Detailed CoCP(s) will be developed in accordance with the Outline CoCP. In order to manage impacts to field drainage, the Outline CoCP stipulates field drainage plans will be developed in consultation with the relevant landowners. If required, additional field drainage will be installed to ensure the existing drainage of the land is maintained during and after construction.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
СоТ86	An Outline Code of Construction Practice (CoCP) will be prepared and submitted with the application for development consent. Detailed CoCP(s) will be developed in accordance with the Outline CoCP. Where required, trenched techniques may be used for minor ditches or smaller watercourses that are frequently dry. In these cases, measures will be implemented to protect water quality and flow and these will be detailed within the Outline CoCP.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
CoT90	The Project Description (Volume 1, Chapter 3 of the Environmental Statement) sets out that the installation of the 400 kV Grid Connection Cable Corridor beneath the River Ribble will be undertaken by direct pipe or micro tunnel trenchless installation techniques.	DCO Schedules 2A & 2B, Requirement 5(3)(Detailed design parameters onshore); and
		Requirement 8 (Code of Construction Practice)"







Commitment number	Mitigation measure	How will this commitment be secured?
CoT95	The Outline Code of Construction Practice (CoCP) has been submitted as part of the application for development consent. Detailed CoCP(s) will be developed in accordance with the Outline CoCP. The Outline CoCP includes that during the construction phase the Principal Contractor(s) will sign up to the Flood Warning Service and will be alerted by a phone call or text when a Flood Warning becomes active. The flood warning will be applied to the entire Onshore Infrastructure Area located within Flood Zones 2 and 3 to enable site personnel to be evacuated from the site in a timely manner prior to a flood event occurring, if appropriate.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
СоТ97	The Outline Code of Construction Practice (CoCP) has been submitted as part of the application for development consent. Detailed CoCP(s) will be developed in accordance with the Outline CoCP. The Detailed CoCPs detail that where necessary at the compounds located within the landfall area, construction measures will be adopted to maintain the existing level of flood protection during construction. These measures will be discussed with the Environment Agency. If applicable, these measures could include scheduling work windows against tide times and briefing site personnel regarding weather conditions, tide times and heights. If a Flood Warning/Flood Alert is issued for the 'Lancashire coastline at Lytham St. Annes, along the coast from Squires Gate to Warton Bank' Flood Warning Area (reference 012FWCTL13A) and the 'Coast at Lytham St Annes' Flood Alert area (reference 012WACLS) works within the relevant areas within the landfall area would also be stopped whilst the Flood Warning/Flood Alert is active.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)
Secondary m	easures	
CoT41	Where the onshore export cable corridor or 400 kV grid connection cable corridor crosses sites of particular sensitivity (e.g. embanked Environment Agency surface watercourses, Sites of Special Scientific Interest or groundwater inner Source Protection Zones) hydrogeological risk assessment(s) will be undertaken to inform a site-specific crossing method statement(s) where required. These will be agreed with the relevant stakeholders prior to construction.	DCO Schedules 2A & 2B, Requirement 8 (Code of Construction Practice)







# 1.9 Sequential test and exception test

# 1.9.1 Site Vulnerability

- 1.9.1.1 In accordance with the Development Vulnerability Categories within Annex 3: The Transmission Assets are classified as 'essential infrastructure'.
- 1.9.1.2 The NPS and NPPF requires the Local Authority to apply the Sequential and Exception Test in consideration of new development. The aim of the test is to steer new development to areas at the lowest probability of flooding.
- 1.9.1.3 According to Annex 3: Flood risk vulnerability classification of the NPPF, the Morecambe onshore substation is classified as 'Essential Infrastructure' and as such is acceptable within Flood Zones 1 and 2. The exception test is required if development is proposed within Flood Zone 3.

# 1.9.2 Sequential test

#### Morgan onshore substation

- 1.9.2.1 The site selection process for the onshore substations is detailed within Volume 1, Annex 4.3: Selection and Refinement of Onshore Infrastructure of the ES. A sequential approach has been applied to Morgan onshore substation whereby the onshore substation development platform plus associated access/egress and surface water attenuation is located within Flood Zone 1 and has a low risk of flooding from all assessed sources. In relation to the Morgan onshore substation development platform and associated access/egress, the sequential test is considered to be passed.
- 1.9.2.2 The temporary construction compounds are located Flood Zone 1, 2 and 3a and are required to enable construction of the onshore substation. The temporary compounds will be decommissioned prior to 2032 when the Morgan Offshore Wind Project and the Morecambe Offshore Windfarm intend to be fully operational. Due to the nature of temporary construction compounds, there are no other reasonable available sites which provide access to the construction activities. As such, this aspect of enabling works is considered to pass the sequential test.

## Morecambe onshore substation

- 1.9.2.3 The site selection process for the onshore substations is detailed within Volume 1, Annex 4.3: Selection and Refinement of Onshore Infrastructure of the ES. A sequential approach has been applied to Morecambe onshore substation whereby the onshore substation development platform, associated surface water attenuation and temporary construction compounds are located within Flood Zone 1 and have a low risk of flooding from all other sources. The sequential test is considered to be passed for these elements of the Morecambe onshore substation.
- 1.9.2.4 The Morecambe onshore substation temporary and permanent access tracks are routed across Flood Zone 3a. The permanent use would be for heavy goods vehicle and abnormal loads deliveries only and therefore operational







use would be rare. Due to existing development bounding the south, west and north and the Dow Brook located adjacent to the east, there are no other reasonable available sites which the temporary and permanent access tracks can be located to provide access between the onshore substation and public highway network. As such, these elements of the Morecambe onshore substation are considered to pass the sequential test.

## Landfall, onshore cable corridor and 400 kV export cable corridor

- 1.9.2.5 The site selection process for the onshore substations is detailed within Volume 1, Annex 4.3: Selection and Refinement of Onshore Infrastructure of the ES. Existing development including infrastructure, industry, commercial and residential buildings are located throughout the wider area and due to the linear nature of the project, the site selection process has been sequentially steered away from these areas to prevent disruption to infrastructure, services and occupants of the wider area. The landfall and National Grid substation at Penwortham are required to be connected by the onshore export cable corridor and 400 kV grid connection cable corridor and there are no reasonably available routes available in which cables can traverse without crossing areas of Flood Zone 3 (Flood Zones 3a and 3b).
- 1.9.2.6 Furthermore, no permanent above ground development will occur as a result of construction activities associated with landfall, the onshore export cable corridor and 400 kV grid connection cable corridor and flood risk will only be temporarily increased until 2032 when the construction phase ends. The sequential test for the landfall, onshore export cable corridor and 400 kV are therefore considered passed.

# 1.9.3 Exception test

- 1.9.3.1 According to Table 3: Flood risk vulnerability and flood zone compatibility of the NPPF, 'essential infrastructure' is acceptable within Flood Zones 1 and 2. The exception test is required if development is proposed within Flood Zone 3.
- 1.9.3.2 the onshore substation development platform plus associated access/egress and surface water attenuation is located within Flood Zone 1 and has a low risk of flooding from all other sources and as such the application of the exception test is not required for this aspect of development.
- 1.9.3.3 The PPG advises that 'essential infrastructure' development can be considered appropriate in Flood Zone 3a and 3b, following satisfactory application of the exception test. The Exception test aims to ensure that more vulnerable property types are not allocated to areas at high risk of flooding. For the exception test to be passed the following must be met.
  - It must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risk, informed by a SFRA where one has been prepared.
  - A site-specific flood risk assessment must demonstrate that the development will be safe for its lifetime taking account of the vulnerability of its users, without increasing flood risk elsewhere, and, where possible, will reduce flood risk overall.







- 1.9.3.4 With reference to point (a), the Transmission Assets are required to connect two nationally significant offshore wind farms to the national grid and will contribute towards meeting the UK Government's targets for generating energy from a renewable energy source; please see Section 3.3 of Volume 1, Chapter 3: Project description of the ES.
- 1.9.3.5 Furthermore, the Transmission Assets will contribute towards meeting the UK Government's targets for generating energy from a renewable energy source; they will generate increased employment opportunities and supply chain demand during its construction phase and operation and maintenance phase. For more information, please see Volume 4, Chapter 2: Socio-economics of the ES. Therefore, point (a) of the exception test is considered to be satisfied.
- 1.9.3.6 Point (b) is discussed within the substations below.

#### **Morgan onshore substation**

- 1.9.3.7 With reference to point (b), the temporary construction compounds to enable the construction of the Morgan onshore substation are located within Flood Zone 1, 2 and 3a.
- 1.9.3.8 Flood risk is fluvial in nature from the Dow Brook. To ensure the fluvial floodplain capacity is maintained and flow conveyance is unaffected by development, no profiling of ground levels within the Environment Agency Flood Map for Planning Flood Zone 3 (further assessed as Flood Zone 3a) in association with temporary construction compounds. Additional commitments to be implemented during the construction phase are referenced within **Table 1.18** and set out in Outline Code of Construction Practice (document reference J1) that will be submitted to the LPAs for approval with consultation with the Environment Agency and LLFA prior to the commencement of works.

#### Morecambe onshore substation

- 1.9.3.9 With reference to point (b), the temporary and permanent Morecambe onshore substation access and egress is located within Flood Zone 1, 2 and 3a. An egress to the existing highways network is required to enable access to the Morecambe onshore substation by HGVs. The permanent and temporary access tracks are therefore unable to be routed between the Morecambe onshore substation and Preston New Road (A584) without crossing areas within Flood Zone 3a.
- 1.9.3.10 Flood risk is both fluvial and tidal. To ensure the fluvial floodplain capacity is maintained and flow conveyance is unaffected by development, no profiling of ground levels within the Environment Agency Flood Map for Planning Flood Zone 3 is proposed in association with temporary and permanent access tracks.
- 1.9.3.11 The permanent and temporary access track via Preston New Road is located within Flood Zones 1, 2 and 3a and is to serve as access to the Morecambe onshore substation for HGVs. During construction, If a Flood Warning/Flood Alert is issued for the 'Lancashire coastline at Lytham St. Annes, along the coast from Squires Gate to Warton Bank' Flood Warning Area (reference 012FWCTL13A) and the 'Coast at Lytham St Annes' Flood Alert area







(reference 012WACLS) works within the relevant areas within the landfall area would also be stopped whilst the Flood Warning/Flood Alert is active (CoT97). The permanent use would be for heavy goods vehicle and abnormal loads deliveries only and therefore operational use would be rare and an outline operational drainage management plan (document reference J10) has been submitted with the application.

1.9.3.12 Additional commitments are referenced within **Table 1.27** and set out in Outline Code of Construction Practice (document reference J1) that will be submitted to the LPAs for approval with consultation with the Environment Agency and LLFA prior to the commencement of works.

# Landfall, onshore export cable corridor and 400 kV grid connection cable corridor

- 1.9.3.13 With reference to point (b) (in **paragraph 1.9.3.3**), the development is to connect the offshore wind farms to the national grid and therefore is unable to be routed without crossing areas within Flood Zone 3a and 3b. The following components are located partially within Flood Zone 3a:
  - The onshore export cable corridor;
  - Areas of the 400kv grid connection cable corridor;
  - Areas of temporary construction, and operational access tracks;
  - Temporary construction compounds;
- 1.9.3.14 The following components are located within Flood Zone 3b:
  - A small extent of the 400kv grid connection cable corridor in proximity to the River Ribble and Savick Brook:
  - An operational access track located to the south of the River Ribble;
  - Portions of two 400kv grid connection temporary construction access tracks; and
  - Two temporary construction compounds located to the south of the River Ribble.
- 1.9.3.15 The installation of below ground cables will be undertaken during the construction stage, with no permanent above ground structures proposed. The majority of the construction works are within agricultural land however, there will be no changes to existing land use once cables are installed, as per CoT14. Once installed, the landfall and onshore cable corridors do not increase flood risk to the surrounding area and has negligible risk of flooding to and from the development.
- 1.9.3.16 Any alterations in the existing surface water drainage regime associated with the installation of the below ground cables are expected to be only during the construction stage and thus temporary in nature. Any increase in runoff from the onshore cable corridors during construction will be managed through commitments listed within **Table 1.44** and set out in Outline Code of Construction Practice (document reference J1) that will be submitted to the LPAs for approval with consultation with the Environment Agency and LLFA prior to the commencement of works.







- 1.9.3.17 Site workers will be present within areas of the landfall, onshore export cable corridor and 400 kV grid connection cable corridor at risk of fluvial and tidal flooding (Flood Zone 2 and 3a and 3b) during the construction phase of the development. Occasional operation and maintenance activities are also expected to take place at the landfall, onshore export cable corridor and 400 kV grid connection cable corridor. As outline in the outline operational drainage management plan (document reference J10), the onshore export cables and 400 kV grid connection cables will be installed below ground, and the existing land cover will be reinstated at surface level, in line with best practice, during the construction phase. On this basis it is not considered necessary to provide permanent surface water management measures for the onshore cable route.
- 1.9.3.18 Additional commitments are referenced within **Table 1.27** and set out in Outline Code of Construction Practice (document reference J1) that will be submitted to the LPAs for approval with consultation with the Environment Agency and LLFA prior to the commencement of works.

## Exception test part (b)- conclusion

1.9.3.19 This FRA and the mitigation measures proposed demonstrates that the development will be safe, without increasing flood risk elsewhere. Therefore, point (b) of the exception test for the temporary construction compounds is considered to be satisfied.







# 1.10 Summary and conclusions

# **1.10.1** Summary

- 1.10.1.1 A site-specific FRA in accordance with NPS EN-1, the NPPF and associated PPG has been undertaken for the study area which incorporates the following aspects of the Transmission Assets.
  - The area of land to be temporarily or permanently occupied during the construction, operation and maintenance and decommissioning phases of the Transmission Assets.
  - Flood risk receptors located within 250 m of the following elements located within the intertidal infrastructure area and onshore infrastructure area:
    - Landfall, including up to six TJBs and two associated compounds and four compounds to the west of TJBs to MLWS;
    - onshore export cable corridor: these cables will link the landfall via
       TJBs and the onshore substations:
    - 400 kV grid connection cables: these 400 kV cables will connect the onshore substations to the existing National Grid Penwortham substation; and
    - Associated temporary construction compounds and construction access tracks
  - Flood risk receptors located within 1 km of the Morgan and Morecambe onshore substations which are also are located within the onshore infrastructure area, plus:
    - access/egress, temporary construction compounds and construction access tracks associated with the onshore substations.
- 1.10.1.2 In accordance with the guidance on development and flood risk (PPG Flood risk and coastal change), this FRA demonstrates the following.

### 1.10.2 Fluvial and tidal flood risk

- 1.10.2.1 Environment Agency flood model data indicates that a proportion of the development is located within Flood Zone 1 (low risk). However, partial extents of the development are located within Flood Zone 2 (medium risk) and Flood Zone 3 (including Flood Zones 3a and 3b) (high risk). Areas of risk are associated with tidal flooding from the Ribble Estuary causing flooding to main rivers and ordinary watercourses that run through the onshore infrastructure area. Within the intertidal infrastructure area, the Irish Sea poses flood risk via tidal flooding along the coastline.
- 1.10.2.2 The majority of main rivers are bounded by Environment Agency flood defences which provide varying levels of protection to the development.
- 1.10.2.3 Phasing between the Transmission Assets and Penwortham Flood Defence Scheme have been confirmed to be different, minimising the chance of interaction between the schemes.







#### 1.10.2.4 In summary:

- the landfall is assessed to partially be at risk of tidal flooding during construction;
- the onshore export cable corridor is at risk of tidal flooding during construction,
- the Morgan onshore substation is assessed to partially be at risk of fluvial flooding during construction;
- the Morecambe onshore substation is assessed at to partially be at risk of fluvial and tidal flooding during the operation and maintenance phase; and
- 400 kV grid connection cable corridor are at risk from tidal and fluvial flooding during construction.
- 1.10.2.5 However, with mitigation measures CoT02 CoT06, CoT08, CoT09 CoT10, CoT12, CoT14 CoT27 CoT35, CoT36, CoT95 and CoT97 (as presented within **Section 1.8, Table 1.44** and to be secured through requirements of the DCO) fluvial and/or tidal risk to the Transmission Assets is considered to be low.

## 1.10.3 Groundwater flood risk

- 1.10.3.1 Groundwater flood risk mapping included within the Groundsure Enviro and Geo Insight report shows the western extent of the study area has a 'low' risk of groundwater flooding. The eastern extent of the Transmission Assets has a 'moderate' to 'high' risk of groundwater flooding, associated with the water table being located closer to the surface within proximity to the Ribble Estuary.
- 1.10.3.2 Considering the implementation of commitments CoT09, CoT35, CoT36 and CoT41 (as presented within **Section 1.8, Table 1.44** and to be secured through requirements of the DCO) the overall risk of flooding from groundwater has been assessed to be low for the onshore substation sites and very low for the landfall, onshore export cable corridor and 400 kV grid connection cable corridor.

#### 1.10.4 Surface water flood risk

- 1.10.4.1 As shown within the Environment Agency Long Term Flood Risk mapping, areas within the study area have been identified as being at low to high risk of surface water flooding. These areas are associated with out-of-bank flows from ordinary watercourses and surface water ponding.
- 1.10.4.2 During the construction phase of the onshore export cable corridor and 400 kV grid connection cable corridor, CoT08, CoT09, CoT24, CoT27, CoT35 and CoT36 (as presented within **Section 1.8, Table 1.44** and to be secured through requirements of the DCO) will ensure surface water will not be adversely affected. As such, flood risk from surface water sources is considered to be low







#### 1.10.5 Reservoir flood risk

- 1.10.5.1 Environment Agency reservoir mapping shows that during a wet scenario, a significant portion of the study area is expected to become inundated. Water is shown to extend north and south from the River Ribble and encompass approximately 460 ha of land. There are additional small portions of land around the Main Drain in the west of the study area that are also shown to be affected during the wet scenario.
- 1.10.5.2 Due to the regular inspection and maintenance regime in place on large reservoirs, the likelihood of catastrophic failure and therefore risk of flooding to the site from this source is unlikely to occur. For this reason, risk of flooding from reservoirs is considered to be very low.

## 1.10.6 Flood risk from sewers and water main failure

1.10.6.1 United Utilities operate public sewer assets and water supplies in the study area. However, the majority of the cable corridor is predominantly located within agricultural land. With the implementation of CoT09, CoT35 and CoT36 (as presented within **Section 1.8, Table 1.44** and to be secured through requirements of the DCO), flood risk from this source is assessed to be very low.

#### 1.10.7 Flood risk from artificial sources

1.10.7.1 Field drainage is expected to be present within agricultural land within the study area and could pose localised sources of flooding if impacted during construction. CoT09, CoT35, CoT36 and CoT84 (as presented within **Section 1.8, Table 1.44** and to be secured through requirements of the DCO) are expected to prevent impacts to field drainage. The landfall and onshore cable corridor will not be impacted by or cause any adverse effect on field drainage following installation. As such, the risk of flooding from artificial sources is assessed to be very low.

# 1.10.8 Sequential and exception tests

- 1.10.8.1 The Transmission Assets are defined as 'essential infrastructure' in Table 2 of Planning Practice Guidance ID7 and is suitable for the present Flood Zone and the zone including climate change, subject to an exception test.
- 1.10.8.2 The Morgan onshore substation temporary construction compounds are partially located within Flood Zone 3a. There are no other reasonable available sites which the temporary construction compounds can be located to provide access to the construction activities. As such, these elements of the Morgan onshore substation are considered to pass the sequential test.
- 1.10.8.3 The exception test has been undertaken and based on sustainability grounds and demonstration that the temporary construction compounds will not increase flood risk elsewhere during construction activities, and appropriate mitigation measures are implemented, the exception test is deemed to be passed.







- 1.10.8.4 The Morecambe onshore substation temporary and permanent access tracks are routed across Flood Zone 3a. The permanent use would be for heavy goods vehicle and abnormal loads deliveries only and therefore operational use would be rare. There are no other reasonable available sites which the temporary and permanent access tracks can be located to provide access between the onshore substation and public highway network. As such, these elements of the Morecambe onshore substation are considered to pass the sequential test.
- 1.10.8.5 The exception test has been undertaken and based on sustainability ground and demonstration that the temporary and permanent access tracks will not increase flood risk elsewhere for the lifetime of development, and appropriate mitigation measures are implemented, the exception test is deemed to be passed.
- 1.10.8.6 The Transmission Assets onshore export cable corridor and 400 kV grid connection cable corridor will connect the offshore wind farms from landfall to the National Grid Penwortham substation and therefore are unable to be routed without crossing areas within Flood Zone 3a and 3b. This does not increase flood risk to the surrounding area and has negligible risk of flooding on the development. On this basis, the sequential test and exception test are determined to be passed.

## 1.10.9 Surface water drainage

1.10.9.1 The drainage strategies for the onshore substations are presented within the Outline Operational Drainage Management Plan (document reference J10) and are to be secured through requirements of the DCO.

#### **1.10.10 Conclusion**

- 1.10.10.1 Proposed mitigation measures will reduce any adverse impacts caused by the construction of the Transmission Assets. As a result, these aspects of the Transmission Assets have a low to very low risk of flooding, and flood risk will not be increased as a result of development.
- 1.10.10.2 The FRA and supporting documentation demonstrate that the Onshore Infrastructure Area study area meets the requirements of the NPS EN-1, the NPPF and the associated PPG.

## 1.11 References

Blackburn with Darwen Council, Blackpool Council, Lancashire County Council (2021) Local Flood Risk Management Strategy for Lancashire 2021-2027. Available online: https://www.lancashire.gov.uk/media/928565/lancashire-flood-risk-management-strategy-2021-2027-final-v2.pdf Accessed on 29 August 2024

Blackpool Council (2014) Strategic Flood Risk Assessment. Available online: https://www.blackpool.gov.uk/Residents/Planning-environment-and-community/Documents/EB027-SFRA.pdf Accessed on 29 August 2024

British Geological Survey (2023) Geoindex Onshore Mapping. Available online: https://www.bgs.ac.uk/map-viewers/geoindex-onshore/ Accessed on 29 August 2024







CIRIA (2001) Report C532 Control of water pollution from construction sites. London, CIRIA.

CIRIA (2015a) Report C753 The SuDS manual. London, CIRIA.

CIRIA (2015b) Report C741 Environmental good practice on site guide. 4th ed. London, CIRIA.

Defra (2011) National Standards for sustainable drainage systems. Designing, constructing, operating and maintaining drainage for surface runoff. London, Department for Environment Food and Rural Affairs.

Defra (2015) Sustainable Drainage Systems: Non-statutory technical standards for sustainable drainage systems. Available online:

https://www.gov.uk/government/uploads/system/uploads/attachment\_data/file/415773/sust ainable-drainagetechnical-standards.pdf Accessed on 29 August 2024

Department for Business, Energy and Industrial Strategy (2021a) Draft Overarching National Policy Statement for Energy (NPS EN-1). Available online: https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment\_data/file/1015233/en-1-draft-for-consultation.pdf Accessed on 29 August 2024

Department for Business, Energy and Industrial Strategy (2021b) Draft National Policy Statement for Renewable Energy Infrastructure (NPS EN-3). Available online: https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment\_data/file/1015236/en-3-draft-for-consultation.pdf Accessed on 29 August 2024

Department for Energy Security and Net Zero (2024a) Overarching National Policy Statement for Energy (NPS EN-1). Available online:

https://www.gov.uk/government/publications/overarching-national-policy-statement-forenergy-en-1 Accessed on 29 August 2024

Department for Energy Security and Net Zero (2024b) National Policy Statement for renewable energy infrastructure (NPS EN-3). Available online:

https://www.gov.uk/government/publications/national-policy-statement-for-renewable-energy-infrastructure-en-3 Accessed on 29 August 2024

Department for Energy Security and Net Zero (2024c) National Policy Statements for Electricity Networks Infrastructure (NPS EN-5). Available online:

https://www.gov.uk/government/publications/national-policy-statement-for-electricity-networks-infrastructure-en-5 Accessed on 29 August 2024

Department for Levelling Up, Housing and Communities (2023) National Planning Policy Framework. Available online: https://www.gov.uk/guidance/national-planning-policy-framework Accessed on 29 August 2024

Department for Levelling Up, Housing and Communities and Ministry of Housing, Communities and Local Government (2014) Flood risk and coastal change. Available online: https://www.gov.uk/guidance/flood-risk-and-coastal-change\_Accessed on 29 August 2024.

Department for Levelling Up, Housing and Communities and Ministry of Housing, Communities and Local Government (2021) Planning Practice Guidance. https://www.gov.uk/government/collections/planning-practice-guidance

Environment Agency (2024a) Catchment Data Explorer. Available online: https://environment.data.gov.uk/catchment-planning Accessed on 29 August 2024







Environment Agency (2024b) Climate change allowances for peak rainfall in England. Available online: https://environment.data.gov.uk/hydrology/climate-change-allowances/rainfall Accessed on 29 August 2024

Environment Agency (2024c) Climate change allowances for peak river flow in England. Available online: https://environment.data.gov.uk/hydrology/climate-change-allowances/river-flow Accessed on 29 August 2024

Environment Agency (2024d) Flood Map for Planning. Available online: https://flood-map-for-planning.service.gov.uk/ Accessed on 29 August 2024

Environment Agency (2024e) Long Term Flood Risk Map. Available online: https://checklong-term-flood-risk.service.gov.uk/map Accessed on 29 August 2024

Environment Agency (2024f) Find a Shoreline Management Plan. Available online: https://environment.data.gov.uk/shoreline-planning Accessed on 29 August 2024

Flood Estimation Handbook Web Service (2023) Catchment mapping. Available online: https://fehweb.ceh.ac.uk/GB/map Accessed on 29 August 2024

Fylde Borough Council (2018) Coastal Strategy. Available online: https://new.fylde.gov.uk/wp-content/uploads/2018/10/Coastal-Strategy-2015-FINAL.pdf Accessed on 29 August 2024

Fylde Borough Council (2011) Strategic Flood Risk Assessment. Available online: https://new.fylde.gov.uk/wp-content/uploads/2019/11/SFRA-2011.pdf Accessed on 29 August 2024.

Fylde Borough Council (2021) Fylde Local Plan to 2032 (incorporating Partial Review) Available online: https://new.fylde.gov.uk/wp-content/uploads/2021/12/Fylde-Local-Plan-to-2032-incorporating-Partial-Review-adopted.pdf Accessed on 29 August 2024

Groundsure (2022) Enviro-Geo Insight reports. Brighton, Nile House.

Internal Drainage Board (2024) Internal Drainage Boards Map. Available online: https://www.ada.org.uk/idb-map/ Accessed May 2024

Lancashire County Council (2024) Flood risk asset register. Available online: https://www.lancashire.gov.uk/council/strategies-policies-plans/environmental/flood-risk-asset-register/. Accessed on 29 August 2024

Lancashire County Council (2024) Regulating Ordinary Watercourses in Lancashire. Available online: https://www.lancashire.gov.uk/flooding/ordinary-watercourse-regulation/Accessed on 29 August 2024

North West England and North Wales Coastal Group (2011) North West England and North Wales Shoreline Management Plan SMP2. Available at: https://www.mycoastline.org.uk/wp-content/uploads/onedrive/Main%20Documents/SMP%20Main%20Document%20FINALV2 .pdf Accessed on 29 August 2024

Ordnance Survey (2024) 1:25 000 mapping. Available online: http://bing.com/maps Accessed on 29 August 2024

Preston City Council, South Ribble Borough Council and Chorley Borough Council (2012) Central Lancashire Adopted Core Strategy. Available online:

https://new.fylde.gov.uk/resident/planning/planning-policy-local-plan/adopted-fylde-local-plan-to-2032-incorporating-partial-review/ Accessed on 29 August 2024







Planning Inspectorate (2024) Nationally Significant Infrastructure Projects: Advice on the Water Framework Directive. Available online: https://www.gov.uk/guidance/nationally-significant-infrastructure-projects-advice-on-the-water-framework-directive. Accessed 23 September 2024.

Scott Wilson Group PLC on behalf of Preston City Council, South Ribble Borough Council and Chorley Borough Council (2007) Central Lancashire Strategic Flood Risk Assessment Level 1 Final Report. Available online: https://www.southribble.gov.uk/media/758/SRE042a-Central-Lancashire-Strategic-Flood-Risk-Assessment-2007/pdf/SRE042a -

\_Central\_Lancashire\_Strategic\_Flood\_Risk\_Assessment\_- 2007.pdf?m=637479597051430000 Accessed on 29 August 2024

The National Soils Research Institute (2024) Soilscapes viewer. Available online: http://www.landis.org.uk/soilscapes/ Accessed on 29 August 2024