

Tritax Symmetry (Hinckley) Limited

# **HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

---

## **The Hinckley National Rail Freight Interchange Development Consent Order**

Project reference TR050007

### **Geometric Design Strategy Record**

Document reference: 2.29B

Revision: 03

**9 February 2024**

---

**Planning Act 2008**

**The Infrastructure Planning (Applications: Prescribed Forms and Procedure) Regulations 2009  
Regulation 5(2)(q)**

**TRANSPORT AND INFRASTRUCTURE**

Tritax Symmetry (Hinckley) Limited

Hinckley National Rail Freight Interchange  
Geometric Design Strategy Record  
(GDSR)

HRF-BWB-HML-A47-RP-CH-00100

## **TRANSPORT AND INFRASTRUCTURE**

# Tritax Symmetry (Hinckley) Limited Hinckley National Rail Freight Interchange Geometric Design Strategy Record (GDSR)

HRF-BWB-HML-A47-RP-CH-00100

Birmingham  
Livery Place, 35 Livery Street, Colmore Business District  
Birmingham, B3 2PB  
T: 0121 233 3322

Leeds  
Whitehall Waterfront, 2 Riverside Way  
Leeds, LS1 4EH  
T: 0113 233 8000

London  
11 Borough High Street  
London, SE1 9SE  
T: 0207 407 3879

Manchester  
11 Portland Street  
Manchester, M1 3HU  
T: 0161 233 4260

**Nottingham**  
**5<sup>th</sup> Floor, Waterfront House, Station Street**  
**Nottingham, NG2 3DQ**  
**T: 0115 924 1100**

February 2024

## DOCUMENT ISSUE RECORD

<b>Document Number:</b>	HRF-BWB-HML-A47-RP-CH-00100
<b>BWB Reference:</b>	NTT2814

Revision	Date of Issue	Status	Author:	Checked:	Approved:
1	14.11.2023	S2	Daniel Fraser BEng (Hons)	Sam Carter CEng MICE	Sam Carter CEng MICE
2	02.01.2024	S2	Daniel Fraser BEng (Hons)	Sam Carter CEng MICE	Sam Carter CEng MICE
3	09.02.2024	S2	Daniel Fraser BEng (Hons)	Sam Carter CEng MICE	Sam Carter CEng MICE

### Notice

This document has been prepared for the sole use of the Client in accordance with the terms of the appointment under which it was produced. BWB Consulting Limited accepts no responsibility for any use of or reliance on the contents of this document by any third party. No part of this document shall be copied or reproduced in any form without the prior written permission of BWB.



## CONTENTS

1.	INTRODUCTION.....	4
	Introduction.....	4
	Purpose.....	4
	Overview of the Scheme.....	4
	List of Drawings.....	5
2.	GEOMETRIC DESIGN STANDARDS.....	7
	Existing Situation.....	7
	Standards Used.....	7
	Design Speed.....	7
3.	HORIZONTAL DESIGN OF LINKS.....	9
	M69 J2 to B4668 Link.....	9
4.	SIGHT DISTANCE ON LINKS.....	11
	M69 J2 to B4668 Link.....	11
5.	VERTICAL DESIGN OF LINKS.....	13
	M69 J2 to B4668 Link.....	13
6.	CROSS SECTIONS OF LINKS.....	15
7.	M69 J2 TO B4668 LINK JUNCTION AND FEATURES.....	16
	Roundabout 1.....	16
	Roundabout 2.....	16
	Roundabout 3.....	18
	B4668 Roundabout.....	19
	M69 Junction 2 Roundabout.....	21
	Bus Lay-by.....	23
	Non-motorised user (NMU) crossing points.....	23
8.	REMOTE JUNCTION MITIGATION.....	25

## APPENDICES

**APPENDIX A: Scheme Layout Drawings and Long Sections**

**APPENDIX B: Scheme Vehicle Tracking Drawings**

## 1. INTRODUCTION

### Introduction

- 1.1 Tritax Symmetry (Hinckley) Limited (the Applicant), have submitted an application for a Development Consent Order (DCO). The DCO will authorise the Applicant to construct and operate a Strategic Rail Freight Interchange (SRFI), which is a "nationally significant infrastructure project", as defined in the Planning Act 2008.
- 1.2 The SRFI site is proposed on land to the north west of the M69 motorway off J2 and to the south east of the Leicester to Hinckley railway line. It comprises a total of approximately 247 ha (610 acres) including the works associated with Junction 2.
- 1.3 A detailed description of the SRFI development is found at Chapter 2 of the Environmental Statement. The proposals include significant improvements to M69 J2 and the construction of a new link between the B4668 and M69 J2.
- 1.4 The report is based on the following information:
  - Design standards listed in Chapter 2 below
  - Topographical survey information by MK Surveys
  - OS mapping, aerial photos and Google Streetview

### Purpose

- 1.5 The purpose of this report is to record the strategy for the geometric design for the upgrades to J2 and the construction of the new link between the B4668 and the M69. Hence this report is termed the Design Strategy Record (DSR). It covers all the upgrades to J2 and the construction of the new link between the B4668 and the M69, as well as commentary on the proposed remote junction improvement works within Leicestershire County Council's (LCC) jurisdiction as Highway Authority.
- 1.6 For each aspect of geometric design this report will describe the proposed geometry. Where relaxations or departures from standard are required, these will be highlighted and a justification provided.
- 1.7 This report does not include analysis of the motorway highway works or other works to the Strategic Road Network (SRN), these are covered in a separate report.

### Overview of the Scheme

- 1.8 The purpose of the junction upgrades and the new link is to provide access and sufficient capacity to facilitate the development of the NRFI. The junction upgrades and the new link would consist of the following:
  - New link from M69 J2 to the B4668
  - Capacity upgrades to M69 J2.

1.9 The drawings listed below show the scheme layouts.

## List of Drawings

1.10 The following 1:500 scale drawings are found at **Appendix A**:

Section of Scheme	Drawing Number
B4668 New Roundabout	HRF-BWB-HGN-HW01-DR-CH-0100_General Arrangement Sheet 1
Link Road North of Railway	HRF-BWB-HGN-HW02-DR-CH-0100_General Arrangement Sheet 2
Link Road North of Railway	HRF-BWB-HGN-HW03-DR-CH-0100_General Arrangement Sheet 3
Railway Bridge Area	HRF-BWB-HGN-HW04-DR-CH-0100_General Arrangement Sheet 4
Link Road South of Railway	HRF-BWB-HGN-HW05-DR-CH-0100_General Arrangement Sheet 5
Roundabout 3	HRF-BWB-HGN-HW06-DR-CH-0100_General Arrangement Sheet 6
Link Road and bus interchange	HRF-BWB-HGN-HW07-DR-CH-0100_General Arrangement Sheet 7
Roundabout 2	HRF-BWB-HGN-HW08-DR-CH-0100_General Arrangement Sheet 8
Roundabout 1	HRF-BWB-HGN-HW09-DR-CH-0100_General Arrangement Sheet 9
M69 J2 west	HRF-BWB-HGN-HW10-DR-CH-0100_General Arrangement Sheet 10
M69 J2 east	HRF-BWB-HGN-HW11-DR-CH-0100_General Arrangement Sheet 11
B4669/Stanton Lane Junction	HRF-BWB-HGN-HW16-DR-CH-0100_General Arrangement Sheet 16
B581/Hinckley Road Junction	HRF-BWB-HGN-HW17-DR-CH-0100_General Arrangement Sheet 17
Sapcote Village	HRF-BWB-HGN-HW18-DR-CH-0100_General Arrangement Sheet 18
Normandy Way/Ashby Road Junction	HRF-BWB-HGN-HW19-DR-CH-0100_General Arrangement Sheet 19
A47/B4668/The Common Roundabout	HRF-BWB-HGN-HW20-DR-CH-0100_General Arrangement Sheet 20
B4114/Croft Road Junction	HRF-BWB-HGN-HW21-DR-CH-0100_General Arrangement Sheet 21
A5 Cross in Hand Roundabout	HRF-BWB-HGN-HW22-DR-CH-0100_General Arrangement Sheet 22
Bostock Close/B581 Crossing	HRF-BWB-HGN-HW23-DR-CH-0100_General Arrangement Sheet 23
B4114/Broughton Road Junction	HRF-BWB-HGN-HW24-DR-CH-0100_General Arrangement Sheet 24

1.11 The highway information can also be found on the highway plans (Sheets 1 – 8) found within the formal documentation associated with the Development Consent Order application. In addition, long sections associated with the A47 link road can be found at **Appendix A** on drawing HRF-BWB-LSI-D1-DR-CH-00105, Document 2.4J (PINS Ref APP-030)

1.12 The following vehicle tracking drawings are found at **Appendix B**:

Section of Scheme	Drawing Number
Roundabout 3	HRF-BWB-HGN-HW06-DR-CH-0115_Vehicle Tracking Roundabout 3
Link Road and bus interchange	HRF-BWB-HGN-HW07-DR-CH-0115_Vehicle Tracking Bus Interchange
Roundabout 2	HRF-BWB-HGN-HW08-DR-CH-0115_Vehicle Tracking Roundabout 2
Roundabout 1	HRF-BWB-HGN-HW09-DR-CH-0115_Vehicle Tracking Roundabout 1
M69 J2 west	HRF-BWB-HGN-HW10-DR-CH-0115_Vehicle Tracking Junction 2 West
M69 J2 east	HRF-BWB-HGN-HW11-DR-CH-0115_Vehicle Tracking Junction 2 East
B4669/Stanton Lane Junction	HRF-BWB-GEN-XX-DR-TR-129_B4669_Stanton Lane Mitigation Swept Paths
B581/Hinckley Road Junction	HRF-BWB-GEN-XX-DR-TR-124_B581_Hinckley Road_New Road Mitigation Swept Paths
Sapcote Village	HRF-BWB-GEN-XX-DR-TR-135_Sapcote Swept Paths
Normandy Way/Ashby Road Junction	HRF-BWB-GEN-XX-DR-TR-128_A47 Normandy Way_Ashby Rd Mitigation Swept Paths
A47/B4668/The Common Roundabout	HRF-BWB-GEN-XX-DR-TR-125_A47_The Common_Leicester Rd Mitigation Swept Paths
B4114/Croft Road Junction	HRF-BWB-GEN-XX-DR-TR-127_Coventry Rd_Croft Rd Mitigation Swept Paths
A5 Cross in Hand Roundabout	HRF-BWB-GEN-XX-DR-TR-126_A5_Coal Pit Ln_A4303 Mitigation Swept Paths
B4114/Broughton Road Junction	HRF-BWB-GEN-XX-DR-TR-133_B4114 B581 Mitigation Swept Paths

## 2. GEOMETRIC DESIGN STANDARDS

### Existing Situation

- 2.1 The existing M69 J2 is subject to national speed limit. The B4668 is subject to 50mph in the area of the proposed new roundabout.
- 2.2 The M69 J2 circulatory is not currently signalised. LCC are the highway authority for the circulatory carriageway and surrounding roads with the exception of the north facing slip roads to the M69 which are the responsibility of National Highways. The boundary is shown on the highway plans.
- 2.3 There are existing entry path deflection departures on the B4669 approaches to the circulatory in both directions.
- 2.4 The B4668 is a rural single carriageway road with a shared footway/cycleway to its north side.
- 2.5 There is an existing access to a traveller's site in the vicinity of the proposed roundabout and a layby to the south west of the proposed roundabout.

### Standards Used

- 2.6 Unless stated otherwise the upgrades to J2 and the construction of the new link between the B4668 and the M69 will be designed in accordance with the following Design Manual for Roads and Bridges (DMRB) standards:
  - CD109 "Highway Link Design"
  - CD116 "Geometric Design of Roundabouts"
  - CD127 "Cross-Sections and Headrooms"
  - CD123 "Geometric design of at-grade priority and signal-controlled junctions"
  - CD143 "Designing for walking, cycling and horse-riding"
  - CD169 "The design of lay-bys, maintenance hardstandings, rest areas, service areas and observation platforms"
  - CD195 "Designing for cycle traffic"

### Design Speed

- 2.7 The design speeds for each section of the scheme are given as follows.

Road/Link Section	Road/Link Type	Design Speed (kph)	Derived from
<b>M69 J2 to B4668 Link</b>			
M69 J2 to Roundabout 1	Urban dual carriageway	70kph	CD109 Table 2.5 for 40mph speed limit
Roundabout 1 to	Urban dual carriageway	70kph	CD109 Table 2.5 for

Roundabout 2			40mph speed limit
Roundabout 2 to Roundabout 3	Urban dual carriageway	70kph	CD109 Table 2.5 for 40mph speed limit
Roundabout 3 to a point 200m north of the rail bridge	Urban single carriageway	70kph	CD109 Table 2.5 for 40mph speed limit
From point 200m north of the rail bridge to the B4668	Rural single carriageway	100kph	CD109 Figure 2.1
North east of B4668 roundabout	Urban single carriageway	70kph	CD109 Table 2.5 for 40mph speed limit
South west of B4668 roundabout	Urban single carriageway	85kph	CD109 Table 2.5 for 50mph speed limit
<b>M69 Junction 2</b>			
B4669 East approach to J2	Rural single carriageway	85kph	CD109 Figure 2.1
B4669 West approach to J2	Rural single carriageway	100kph	CD109 Figure 2.1

### 3. HORIZONTAL DESIGN OF LINKS

3.1 The horizontal alignment consists of various elements, depending on the type of link. Each aspect is considered below

#### M69 J2 to B4668 Link

M69 J2 to Roundabout 3				
Chainage	Element	Standard (70kph design speed)	Proposed Design	
			Details	Relaxations/Departures
0-56.874	Roundabout			
56.874-109.713	Right hand curve – Approach to roundabout	360m desirable min radius	255m	None – CD 116 applies
109.713-171.730	Right hand curve	360m desirable min radius	180m	Two steps below desirable minimum is a permitted relaxation
171.730-263.410	Roundabout			
263.450-349.650	Straight	-	-	None
349.650-430.470	Right hand curve	360m desirable min radius	1020m	None
430.470-542.920	Roundabout			
542.920-586.440	Left hand curve	360m desirable min radius	255m	One step below desirable minimum is a permitted relaxation
586.440-664.640	Transition to straight	~78.2m length transition curve	~78.2m length transition curve	None
664.640-671.011	Straight	-	-	None
671.011-826.478	Right hand curve	360m desirable min radius	1020m	None
826.478-829.216	Straight	-	-	None
829.216-853.467	Right hand curve	360m desirable min radius	1440m	None
853.467-927.150	Straight	-	-	None
927.150-949.614	Roundabout			

Roundabout 3 to Chainage 1855.374				
Chainage	Element	Standard (70kph design speed)	Proposed Design	
			Details	Relaxations/Departures
1009.590-1048.530	Roundabout			
1048.530-1094.089	Straight	-	-	None
1094.089-1162.089	Transition to Curve	~68m length transition curve	~68m length transition curve	None
1162.089-1407.096	Curve	360m desirable min radius	360m	None
1407.096-1475.096	Transition to straight	~68m length transition curve	~68m length transition curve	None
1475.096-1609.506	Straight	-	-	None
1609.506-1682.106	Transition to Curve	~72.6m length transition curve	~72.6m length transition curve	None
1682.106-1782.774	Curve	360m desirable min radius	220m	Two step below desirable minimum is a permitted relaxation
1782.774-1855.374	Transition to straight	~72.6m length transition curve	~72.6m length transition curve	None

Chainage 1855.374 to B4668				
Chainage	Element	Standard (100kph design speed)	Proposed Design	
			Details	Relaxations/Departures
1855.374-1938.245	Straight	-	-	None
1938.245-2299.534	Curve	720m desirable min radius	2040m	None
2299.534-2363.534	Transition	64m length transition curve	64m length transition curve	None
2363.534-2550.782	Curve	720m desirable min radius	720m	None
2420.110-2546.547	Roundabout			



## 4. SIGHT DISTANCE ON LINKS

4.1 The stopping sight distance is assessed for each of the links identified above. Note that visibility to traffic signals or roundabout give way lines are assessed separately.

### M69 J2 to B4668 Link

M69 J2 to Roundabout 3 Northbound (70kph)			
Chainage	Junction Features within Length	Proposed SSD (120m desirable SSD)	Relaxations / Departures
0	M69 Junction 2		
0-13.939	None	≥120m	None
13.939-193.939	Immediate approach to proposed roundabout 1	≥120m	None
193.939-241.423	Roundabout 1		
241.423-283.998	None	≥120m	None
283.998-463.998	Immediate approach to proposed roundabout 2	≥120m	None
463.998-523.990	Roundabout 2		
523.990-769.614	None	≥120m	None
769.614-946.614	Immediate approach to proposed roundabout 3	≥120m	None
946.614	Roundabout 3		

M69 J2 to Roundabout 3 Southbound (70kph)			
Chainage	Junction Features within Length	Proposed SSD (120m desirable SSD)	Relaxations / Departures
946.614	Roundabout 3		
946.614-703.990	None	≥120m	None
703.990-523.990	Immediate approach to proposed roundabout 2	≥120m	None
523.990-463.998	Roundabout 2		
463.998-421.423	None	≥120m	None
421.423-241.423	Immediate approach to proposed roundabout 1	≥120m	None
241.423-193.939	Roundabout 1		
193.939-180	None	≥120m	None
0-180	Immediate approach to M69 Junction 2	≥120m	None
0	M69 Junction 2		

Roundabout 3 to Chainage 1855.374 Northbound (70kph)			
Chainage	Junction Features within Length	Proposed SSD (120m desirable SSD)	Relaxations / Departures
1009.590	Roundabout 3		
1009.590-1524.990	None	≥120m	None

1524.990-1704.990	Immediate approach to minor junction	≥120m	None
1655.790-1855.374	None	≥120m	None
1855.374	Change in speed limit		

<b>Roundabout 3 to Chainage 1855.374 Southbound (70kph)</b>			
<b>Chainage</b>	<b>Junction Features within Length</b>	<b>Proposed SSD (120m desirable SSD)</b>	<b>Relaxations / Departures</b>
1855.374	Change in speed limit		
1855.374-1704.990	Immediate approach to minor junction	≥120m	None
1704.990-1189.590	None	≥120m	None
1189.890-1009.590	Immediate approach to proposed roundabout 3	≥120m	None
1009.590	Roundabout 3		

<b>Chainage 1855.374 to B4668 Northbound (100kph)</b>			
<b>Chainage</b>	<b>Junction Features within Length</b>	<b>Proposed SSD (215m desirable SSD)</b>	<b>Relaxations / Departures</b>
1855.374	Change in speed limit		
1855.374-2199.047	None	≥215m	None
2199.047-2521.547	Immediate approach to proposed B4668 roundabout	≥215m	None
2521.547	B4668 roundabout		

<b>Chainage 1855.374 to B4668 Southbound (100kph)</b>			
<b>Chainage</b>	<b>Junction Features within Length</b>	<b>Proposed SSD (215m desirable SSD)</b>	<b>Relaxations / Departures</b>
2521.547	B4668 roundabout		
1855.374-251.547	None	≥215m	None
1855.374	Change in speed limit		

## 5. VERTICAL DESIGN OF LINKS

5.1 The vertical alignment consists of various elements, depending on the type of link. Each aspect is considered below.

### M69 J2 to B4668 Link

M69 J2 to Roundabout 3 Northbound (70kph)					
Chainage	Vertical alignment feature	Junction features within the section	Minimum Standard	Proposed design	
				Details	Relaxations / Departures
0	M69 Junction 2 Exit				
5.689-49.122	Grade	None	0.5%-4%	-0.568%	None
49.122-129.120	Crest Curve	Immediate approach to proposed roundabout 1	30KF	40KF	None
129.120-180.799	Grade	Immediate approach to proposed roundabout 1	0.5%-4%	-2.568 %	None
180.799-193.939	Sag Curve	Immediate approach to proposed roundabout 1	20KF	300KF	None
193.939-241.423	Roundabout 1				
241.423-283.998	Sag Curve	None	20KF	300KF	None
283.998-463.998	Sag Curve	Immediate approach to proposed roundabout 2	20KF	300KF	None
463.998-523.990	Roundabout 2				
523.990-769.614	Sag Curve		20KF	300KF	None
769.614-946.614	Sag Curve	Immediate approach to proposed roundabout 3	20KF	300KF	None
946.614	Roundabout 3				

M69 J2 to Roundabout 3 Southbound (70kph)					
Chainage	Vertical alignment feature	Junction features within the section	Minimum Standard	Proposed design	
				Details	Relaxations / Departures
946.614	Roundabout 3				
946.614-703.990	Sag Curve	None	20KF	300KF	None
703.990-523.990	Sag Curve	Immediate approach to proposed roundabout 2	20KF	300KF	None
523.990-463.998	Roundabout 2				
463.998-421.423	Sag Curve	None	20KF	300KF	None
421.423-241.423	Sag Curve	Immediate approach to proposed roundabout 1	20KF	300KF	None
193.939-241.423	Roundabout 1				
193.939-180.799	Sag Curve	None	20KF	300KF	None
180.799-129.120	Grade	Immediate approach to M69 Junction 2	0.5%-4%	-2.568%	None
129.120-49.122	Crest Curve	Immediate approach	30KF	40KF	None

		to M69 Junction 2			
49.122-5.689	Grade	Immediate approach to M69 Junction 2	0.5%-4%	-0.568%	None
0	M69 Junction 2 Exit				

Roundabout 3 to Chainage 1855.374 (70kph)					
Chainage	Vertical alignment feature	Junction features within the section	Minimum Standard	Proposed design	
				Details	Relaxations / Departures
1009.590	Roundabout 3				
1009.590-1311.808	Sag Curve	None	20KF	300KF	None
1311.808-1483.707	Sag Curve	None	20KF	100KF	None
1483.707-1524.990	Crest Curve	None	30KF	30KF	None
1524.990-1669.659	Crest Curve	Immediate approach to minor junction	30KF	30KF	None
1669.659-1855.374	Sag Curve	Immediate approach to minor junction	20KF	175KF	None
1855.374	Change in speed limit				

Chainage 1855.374 to B4668 (100kph)					
Chainage	Vertical alignment feature	Junction features within the section	Minimum Standard	Proposed design	
				Details	Relaxations / Departures
1855.374	Change in speed limit				
1855.374-2260.160	Sag Curve	None	26KF	175KF	None
2260.160-2307.376	Sag Curve	Immediate approach to proposed B4668 roundabout	26KF	175KF	None
2307.376-2521.547	Grade	Immediate approach to proposed B4668 roundabout	0.5%-4%	0.369%	Deviation from recommendation in CD 109 para 5.2.2 but <b>not</b> a departure from standards
2521.547	B4668 Roundabout				

## **6. CROSS SECTIONS OF LINKS**

6.1 Proposed cross sections of the links to CD 127 are shown on the drawings. These are summarised as follows:

- M69 J2 – Roundabout 1 – D2UAP urban dual carriageway
- Roundabout 1 – Roundabout 2 – D2UAP urban dual carriageway
- Roundabout 2 – Roundabout 3 – D2UAP urban dual carriageway
- Roundabout 3 to Ch 1855.374 – SU2 urban single carriageway
- Ch 1855.374 – B4668 roundabout – S2 rural single carriageway

## 7. M69 J2 TO B4668 LINK JUNCTION AND FEATURES

### Roundabout 1

- 7.1 The proposed ICD is 60.0m and the circulatory width is 10.0m, which is between 1 and 1.2 times the maximum entry width of 9.0m.
- 7.2 There will be two approaches to the roundabout and these are assessed as follows:

Roundabout 1 Northbound Approach (Design speed: 70kph)			
Requirement	Criteria	Actual provided	Departure from Standard?
Visibility on approach	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
Visibility on entry	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
Visibility to right on entry	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
Entry path curvature	≤ 100m	82.87m	No
Entry angle	20° to 60°	32°	No
Entry radius	20m to 100m	20m	No
Lane width on entry	3-4.5m	2x4.5m	No

Roundabout 1 Southbound Approach (Design speed: 70kph)			
Requirement	Criteria	Actual provided	Departure from Standard?
Visibility on approach	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
Visibility on entry	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
Visibility to right on entry	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
Entry path curvature	≤ 100m	96.4m	No
Entry angle	20° to 60°	43.5°	No
Entry radius	20m to 100m	20m	No
Lane width on entry	3-4.5m	2x4.5m	No

### Roundabout 2

- 7.3 The proposed ICD is 60.0m and the circulatory width is 10.0m, which is between 1 and 1.2 times the maximum entry width of 9.0m.
- 7.4 There will be four approaches to the roundabout and these are assessed as follows:

Roundabout 2 Northbound Approach (Design speed: 70kph)			
Requirement	Criteria	Actual provided	Departure from Standard?
Visibility on approach	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
Visibility on entry	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
Visibility to right on entry	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
Entry path curvature	≤ 100m	94.36m	No
Entry angle	20° to 60°	31.1°	No
Entry radius	20m to 100m	20m	No
Lane width on entry	3-4.5m	2x4.5m	No

Roundabout 2 Southbound Approach (Design speed: 70kph)			
Requirement	Criteria	Actual provided	Departure from Standard?
Visibility on approach	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
Visibility on entry	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
Visibility to right on entry	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
Entry path curvature	≤ 100m	91.70m	No
Entry angle	20° to 60°	39.3°	No
Entry radius	20m to 100m	20m	No
Lane width on entry	3-4.5m	2x4.5m	No

Roundabout 2 Westbound Approach (Design speed: 60kph)			
Requirement	Criteria	Actual provided	Departure from Standard?
Visibility on approach	90m for 135m (1.5 x SSD)	≥ 90m for 135m	No
Visibility on entry	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
Visibility to right on entry	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
Entry path curvature	≤ 100m	76.33m	No
Entry angle	20° to 60°	40°	No
Entry radius	20m to 100m	20m	No
Lane width on entry	3-4.5m	2x4.25m	No

Roundabout 2 Eastbound Approach (Design speed: 40kph)			
Requirement	Criteria	Actual provided	Departure from Standard?
Visibility on approach	70m for 135m (1.5 x SSD)	≥ 70m for 135m	No
Visibility on entry	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
Visibility to right on entry	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
Entry path curvature	≤ 100m	56.87m	No
Entry angle	20° to 60°	32.7°	No
Entry radius	20m to 100m	20m	No
Lane width on entry	3-4.5m	4.5m	No

## Roundabout 3

7.5 The proposed ICD is 60.0m and the circulatory width is 10.0m, which is between 1 and 1.2 times the maximum entry width of 9.0m.

7.6 There will be four approaches to the roundabout and these are assessed as follows:

Roundabout 3 Northbound Approach (Design speed: 70kph)			
Requirement	Criteria	Actual provided	Departure from Standard?
Visibility on approach	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
Visibility on entry	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
Visibility to right on entry	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
Entry path curvature	≤ 100m	97.05m	No
Entry angle	20° to 60°	40.3°	No
Entry radius	20m to 100m	20m	No
Lane width on entry	3-4.5m	2x4.5m	No

Roundabout 3 Eastbound Approach (Design speed: 60kph)			
Requirement	Criteria	Actual provided	Departure from Standard?
Visibility on approach	90m for 135m (1.5 x SSD)	≥ 120m for 180m	No



<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	77.78m	No
<b>Entry angle</b>	20° to 60°	29.5°	No
<b>Entry radius</b>	20m to 100m	40m	No
<b>Lane width on entry</b>	3-4.5m	2x4.25m	No

<b>Roundabout 3 Southbound Approach (Design speed: 70kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	71.80m	No
<b>Entry angle</b>	20° to 60°	32.8°	No
<b>Entry radius</b>	20m to 100m	20m	No
<b>Lane width on entry</b>	3-4.5m	2x3.5m	No

<b>Roundabout 3 Westbound Approach (Design speed: 60kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	90m for 135m (1.5 x SSD)	≥ 120m for 180m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	96.27m	No
<b>Entry angle</b>	20° to 60°	39.5°	No
<b>Entry radius</b>	20m to 100m	20m	No
<b>Lane width on entry</b>	3-4.5m	2x4.25m	No

## B4668 Roundabout

- 7.7 The proposed ICD is 50.0m and the circulatory width is 10.0m, which is between 1 and 1.2 times the maximum entry width of 8.75m.

7.8 There will be three approaches to the roundabout with a segregated left turn lane (SLTL) on the westbound approach and these are assessed as follows:

<b>B4668 Roundabout Northbound Approach (Design speed: 100kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	215m for 322.5m (1.5 x SSD)	≥ 215m for 322.5m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	65.10m	No
<b>Entry angle</b>	20° to 60°	41°	No
<b>Entry radius</b>	20m to 100m	30.0m	No
<b>Lane width on entry</b>	3-4.5m	2x4.5m	No

<b>B4668 Roundabout Eastbound Approach (Design speed: 70kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	97.90m	No
<b>Entry angle</b>	20° to 60°	29.2 °	No
<b>Entry radius</b>	20m to 100m	20.0m	No
<b>Lane width on entry</b>	3-4.5m	4.5m	No

<b>B4668 Roundabout Westbound Approach (Design speed: 70kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	67.90m	No

<b>Entry angle</b>	20° to 60°	25.4°	No
<b>Entry radius</b>	20m to 100m	22.0m	No
<b>Lane width on entry</b>	3-4.5m	4.5m	No
<b>SLTL Radius</b>	-	100m	No
<b>SLTL Width</b>	6.2m	6.2m	No
<b>Lane Width</b>	3.7m	3.7m	No

## M69 Junction 2 Roundabout

- 7.9 The M69 Junction 2 roundabout is to be widened in various locations and fully signalised. New south facing slip roads are to be connected to the southern half of the roundabout.
- 7.10 The existing bridge structures over the M69 are unaffected by the proposed works, with no widening proposed, nor new connections to the structures.
- 7.11 The roundabout is to be widened on the eastern and western sections to 13.5m. This is between 1 and 1.2 times the maximum approach width of 13.3m.
- 7.12 The B4668 arms are to be realigned to provide suitable entry path deflection and permit space to install the new site access arm and the new south facing merge slip road.
- 7.13 The geometry of the roundabout is assessed below.

<b>M69 J2 Site Access Arm Approach (Design speed: 70kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	70.0m	No
<b>Entry angle</b>	20° to 60°	36.1°	No
<b>Entry radius</b>	20m to 100m	35m	No
<b>Lane width on entry</b>	3-4.5m	3x4.4m	No

<b>M69 J2 Southbound Diverge Approach (Design speed: 70kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>

<b>Visibility on approach</b>	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	95.0m	No
<b>Entry angle</b>	20° to 60°	23.8°	No
<b>Entry radius</b>	20m to 100m	45m	No
<b>Lane width on entry</b>	3-4.5m	2x4.4m	No

<b>M69 J2 B4669 Westbound Approach (Design speed: 100kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	215m for 332.5m (1.5 x SSD)	≥ 215m for 332.5m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	98.0m	No
<b>Entry angle</b>	20° to 60°	68°	Not in accordance with recommendations but <b>not</b> a departure from standards.
<b>Entry radius</b>	20m to 100m	30m	No
<b>Lane width on entry</b>	3-4.5m	3x4.4m	No

<b>M69 J2 Northbound Diverge Approach (Design speed: 70kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	120m for 180m (1.5 x SSD)	≥ 120m for 180m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	90.0m	No

<b>Entry angle</b>	20° to 60°	42.2°	No
<b>Entry radius</b>	20m to 100m	30m	No
<b>Lane width on entry</b>	3-4.5m	2x4.1m	No

<b>M69 J2 B4669 Eastbound Approach (Design speed: 70kph)</b>			
<b>Requirement</b>	<b>Criteria</b>	<b>Actual provided</b>	<b>Departure from Standard?</b>
<b>Visibility on approach</b>	215m for 332.5m (1.5 x SSD)	≥ 215m for 332.5m	No
<b>Visibility on entry</b>	40m at 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Visibility to right on entry</b>	40m from give way line and 15m back from give way line	≥ 40m at 15m back from give way line	No
<b>Entry path curvature</b>	≤ 100m	98.0m	No
<b>Entry angle</b>	20° to 60°	48.4°	No
<b>Entry radius</b>	20m to 100m	30m	No
<b>Lane width on entry</b>	3-4.5m	3x4.4m	No

## Bus Lay-by

7.14 A bus lay-by will be provided on both the northbound and southbound sides between roundabouts 2 and 3. Both of these have been designed in accordance with CD169 and are dimensioned on the drawings.

## Non-motorised user (NMU) crossing points

7.15 Shared footway/cycleways are provided along the length of the link road as shown on the layout drawings. These are provided on both sides of the road through the 'urban' section and on the south western side only through the 'rural' section to the north of the railway. An uncontrolled crossing point is provided to the north of the railway to provide connectivity between the two sides of the carriageway.

7.16 At the B4668 roundabout, an uncontrolled crossing point utilising the splitter island on the eastbound approach is provided to link the new footway/cycleway along the link road to the existing footway/cycleway to the north of the B4668.

7.17 A permissive path is provided along the private means of access to Bridge Farm in order to link the bridleway (U52/9) to the footway/cycleway on the link road.

7.18 A bridleway underpass is provided in this location to connect Burbage Common Road to U59/2.

7.19 NMU crossing points have been incorporated into the splitter islands where footway cycleway is present. The predominant crossing points will be over the site access arms

of the roundabouts on the link roads where the expected AADT is below the recommended threshold for introducing controlled crossings.

- 7.20 Controlled crossing points for the link road are provided at two locations. A two stage toucan crossing near the proposed bus stops and a one stage pegasus crossing near the M69 J2 roundabout.
- 7.21 Uncontrolled crossing points are provided over the link road at the splitter islands on the roundabouts but it is not expected that these will form a significant desire line and therefore they are not expected to be heavily used.
- 7.22 At M69 J2, the existing uncontrolled crossing points over the north facing slip roads will be retained and improved with new tactile paving and widened footway provision. These will become 'walk with traffic' style crossings as the roundabout is to be signalised. The expected AADT utilising the north facing slip roads is below the threshold for provision of controlled crossings.

## **8. REMOTE JUNCTION MITIGATION**

- 8.1 The geometric design of the remote junction mitigation works is driven predominantly by vehicle tracking. Drawings showing these are appended to this report.
- 8.2 Key geometric features, footway/cycleways, traffic signals, crossing points and other details are labelled on the layout plans.

## ***APPENDICES***


---



## **APPENDIX A: Scheme Layout Drawings and Long Sections**

---




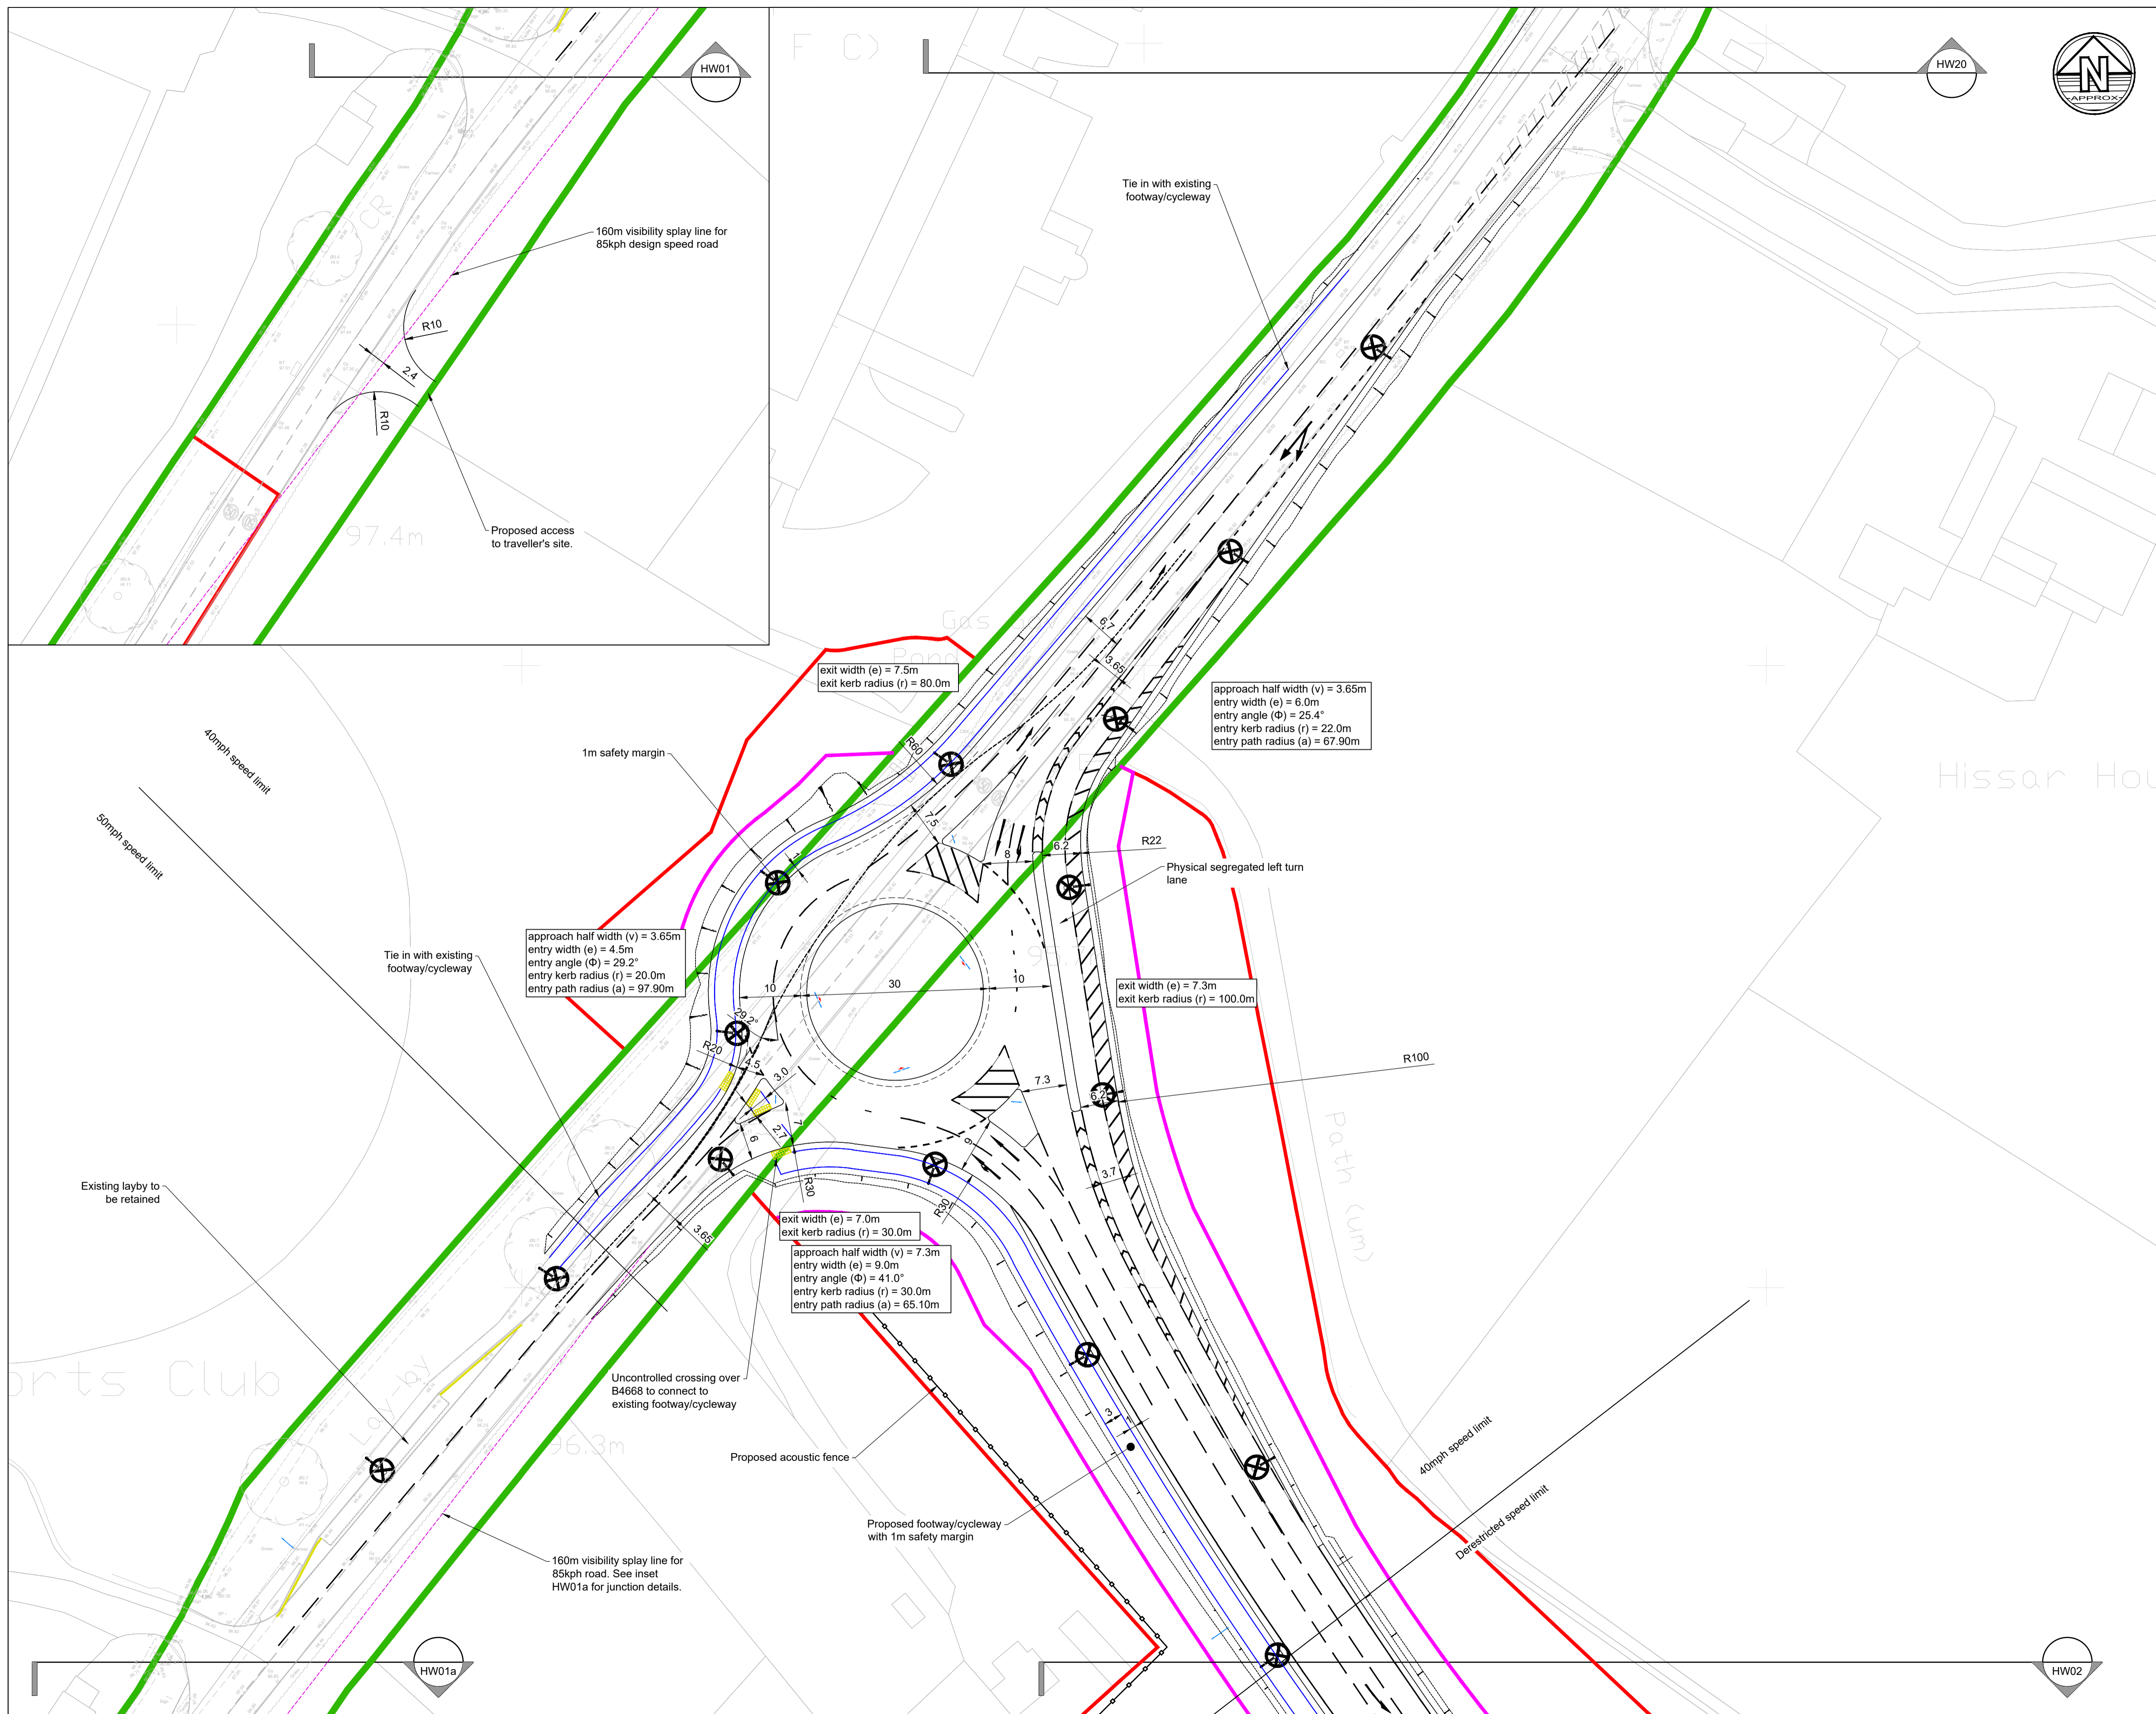

**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
6. All works must be carried out to the requirements of the overseeing organisation.

**Key Plan**

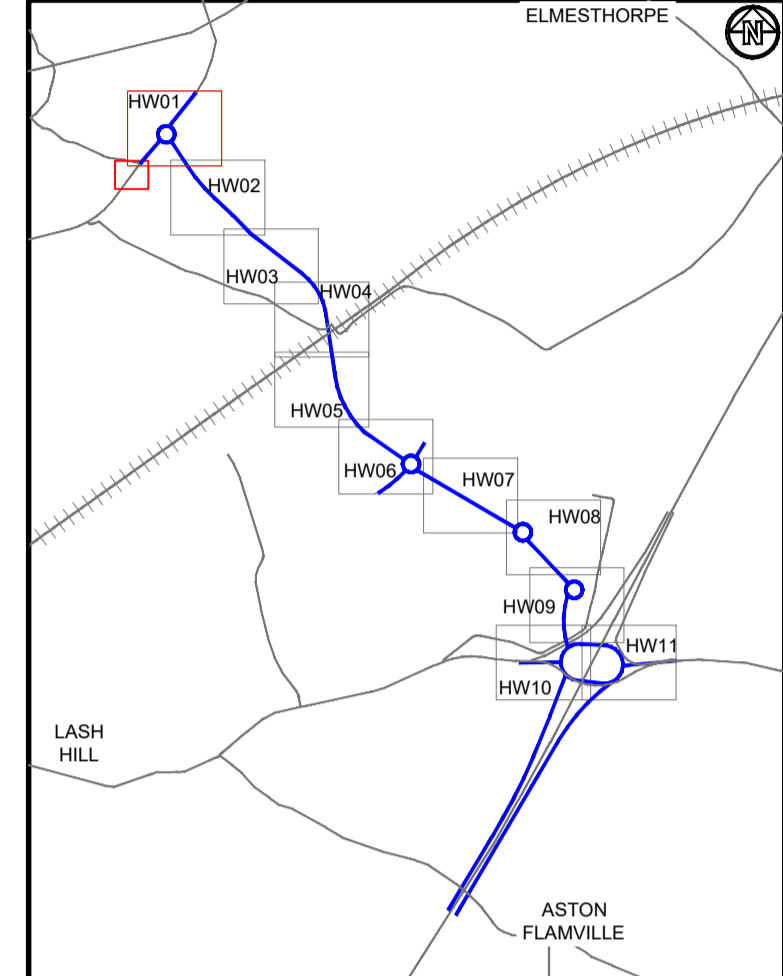

**Legend**

- DCO Land boundary limit
- Primary Signal Head
- Secondary Signal head
- Noise fence
- Earthwork extents
- Footway Type - Tactile paving in Red (R)
- Footway Type - Tactile paving in Buff (B)
- Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
- Existing Highway Boundary
- Lighting Column
- Road Sign

PO2	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Dw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client


**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**


**GENERAL ARRANGEMENT SHEET 1**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	10.11.23 Scale@A1: 1:500
<b>PRELIMINARY</b>			
Project - Originator - Zone - Level - Type - Role - Number	Status	Rev	
HRF-BWB-HGN-HW01-DR-CH-0100	S2	P02	



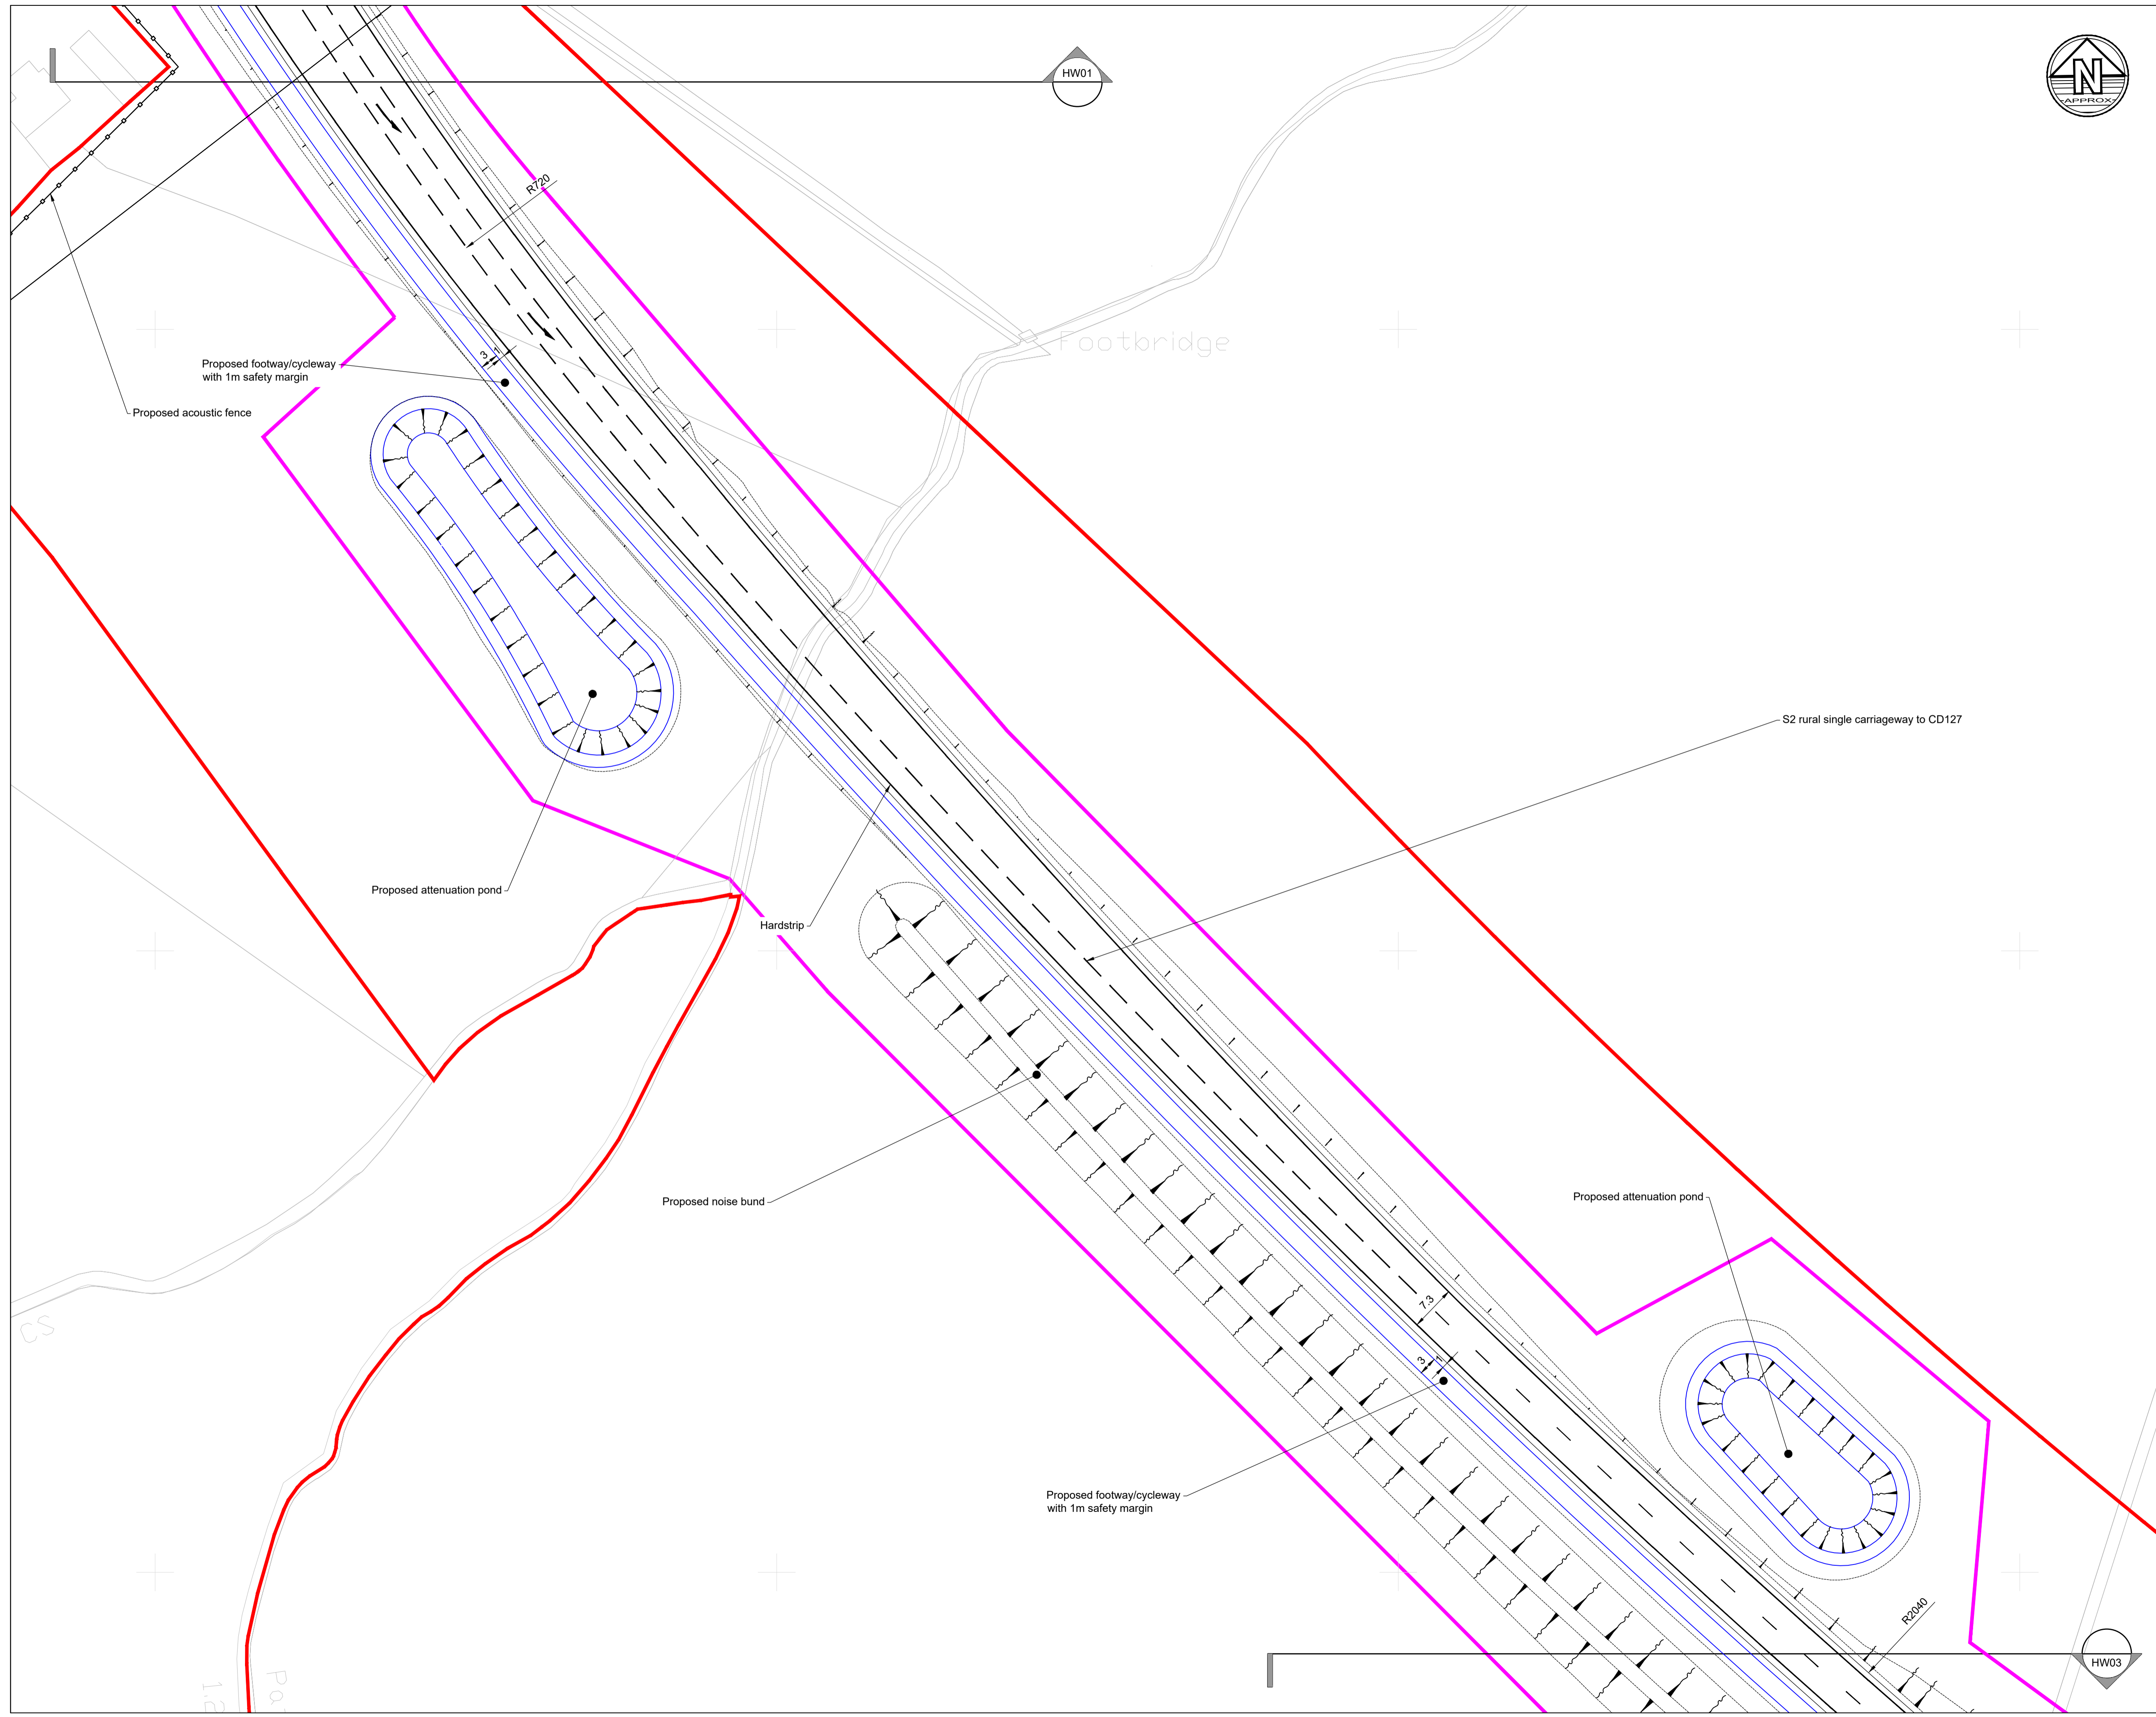

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

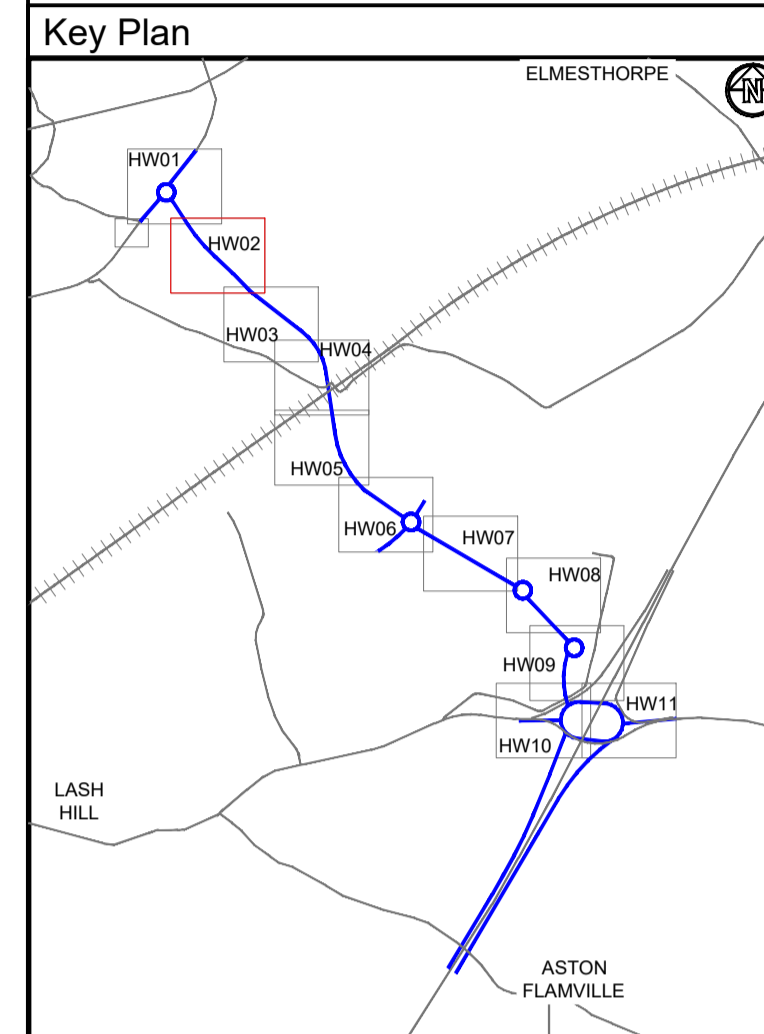

- Legend**
- DCO Land boundary limit
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)
  - Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
  - Existing Highway Boundary

Rev	Date	Details of issue / revision	Drw	Rev
P02	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100
- www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title


**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title


**GENERAL ARRANGEMENT SHEET 2**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	07.12.23
Scale@A1:	1:500		
<b>Drawing Status</b>			
<b>PRELIMINARY</b>			
Project - Originator - Zone - Level - Type - Role - Number	Status	Rev	
<b>HRF-BWB-HGN-HW02-DR-CH-0100</b>	<b>S2</b>	<b>P02</b>	



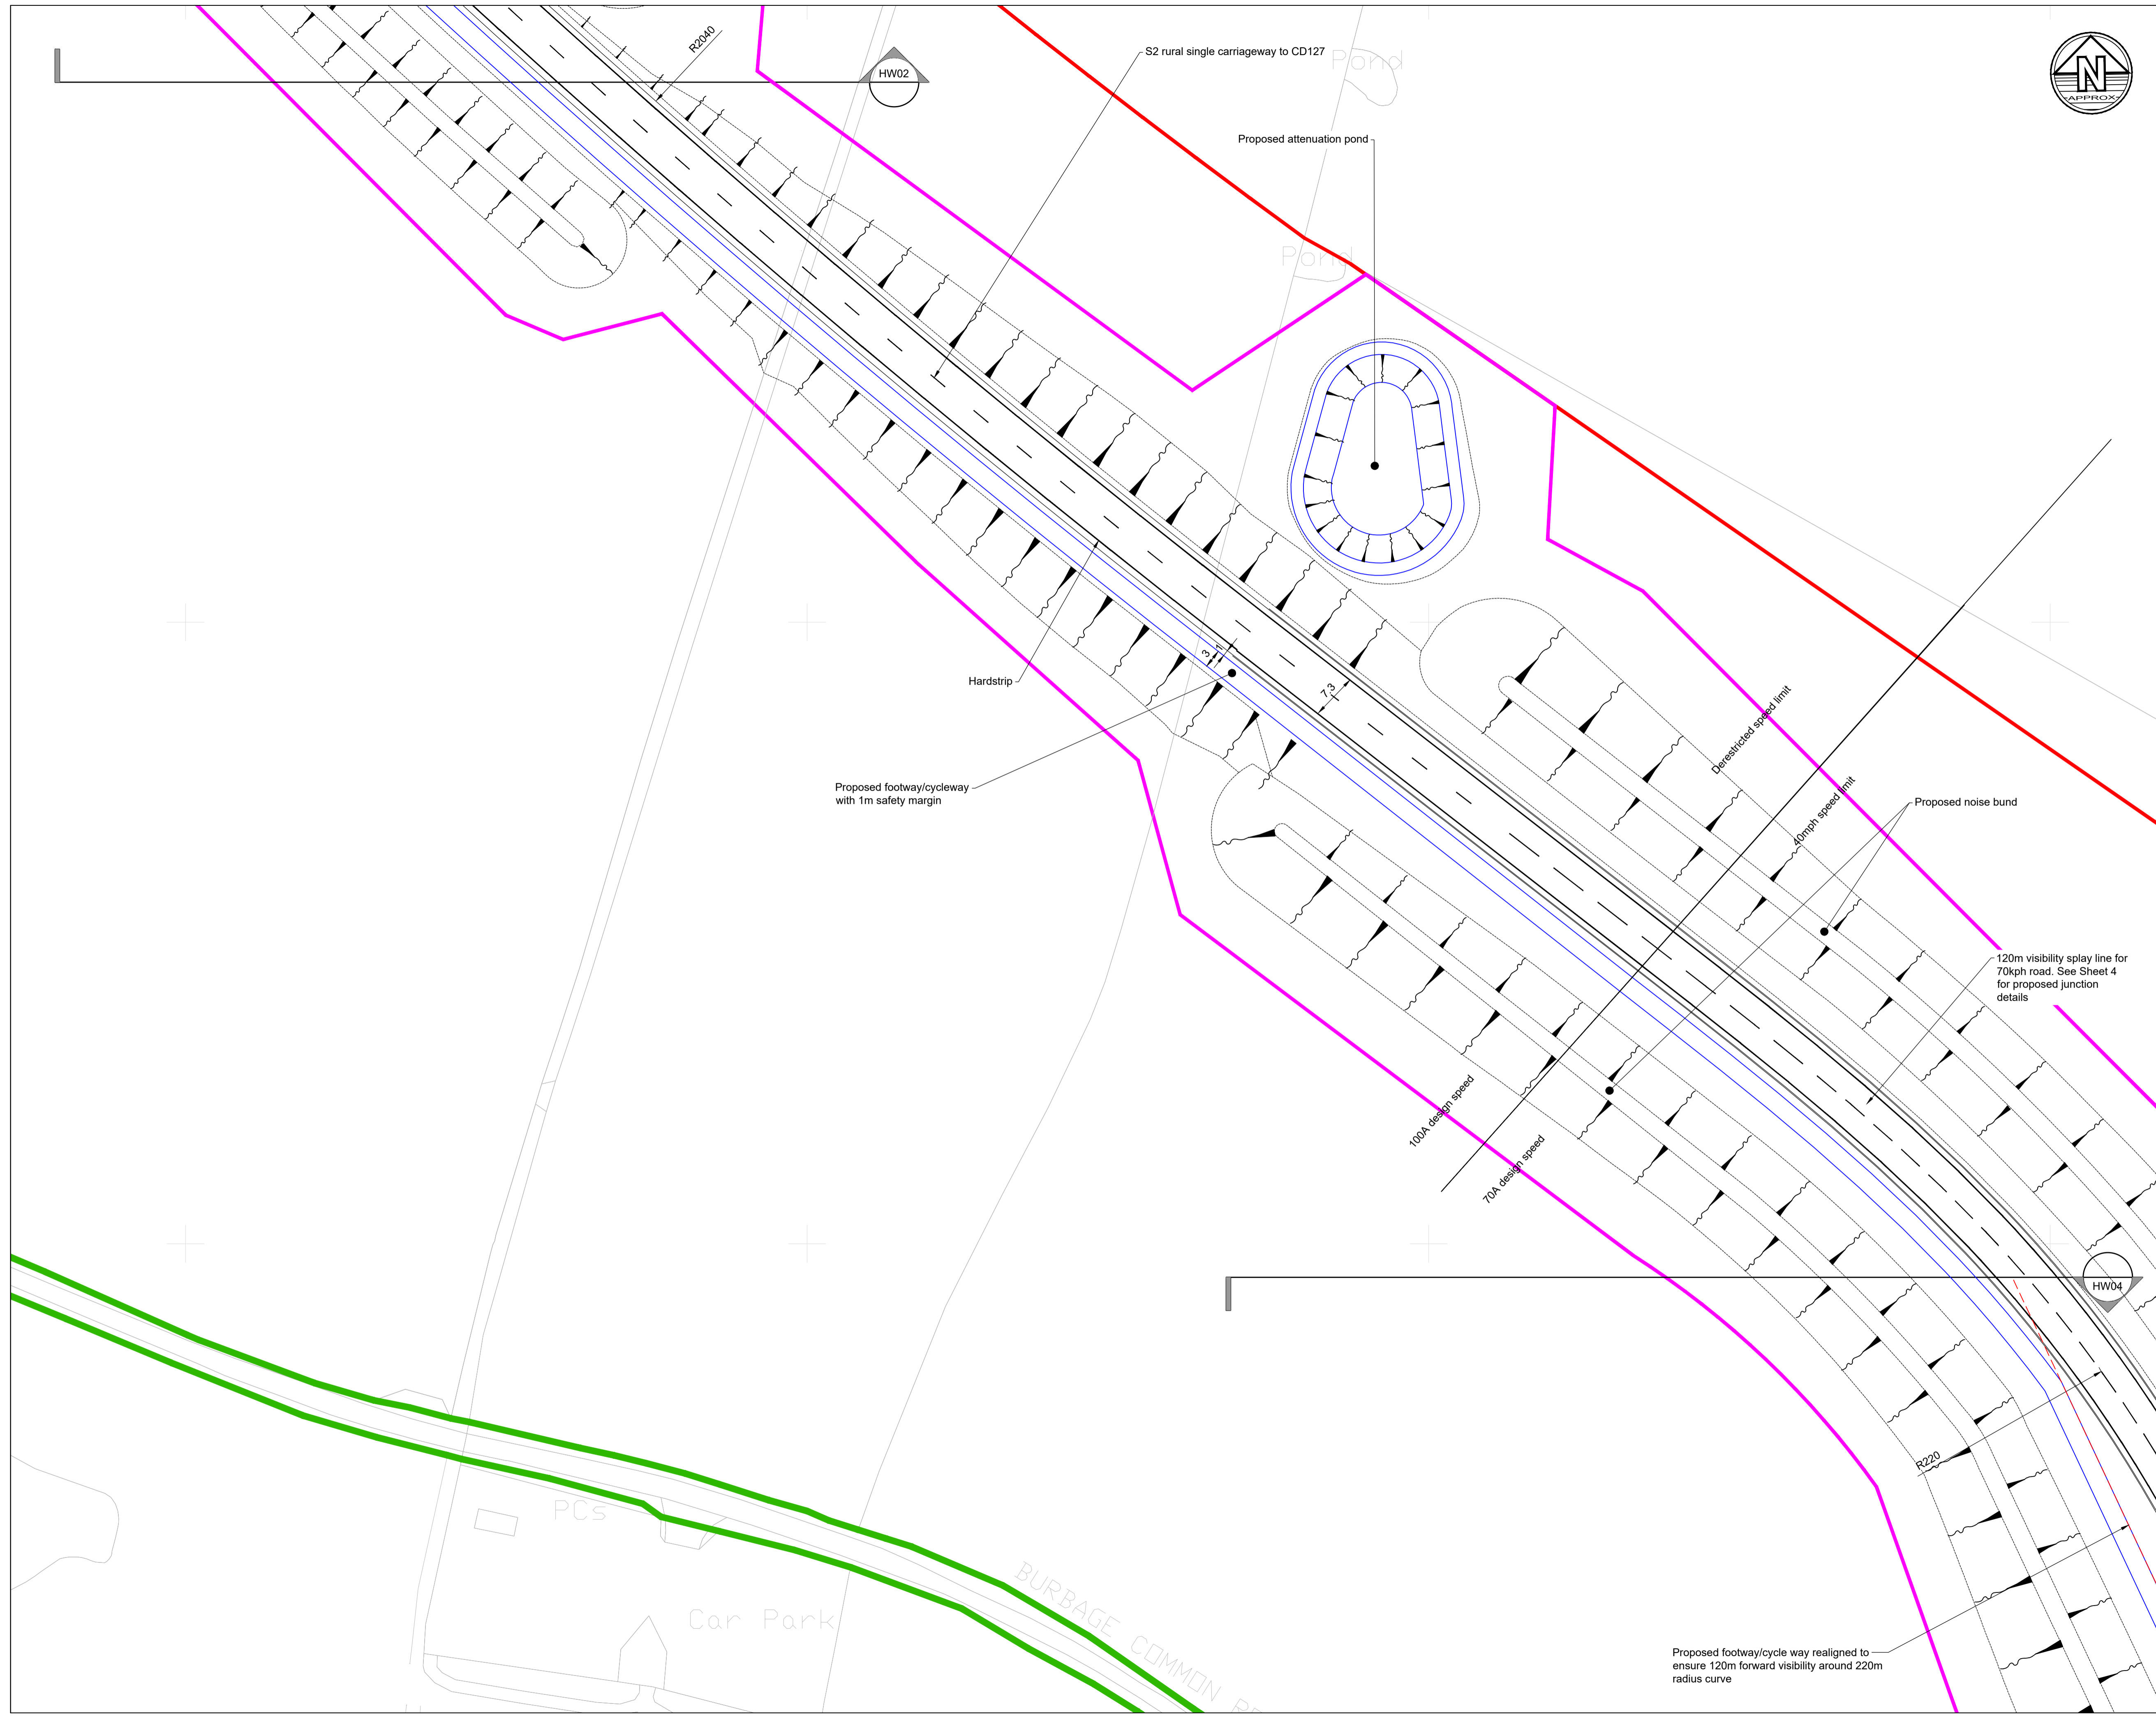

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

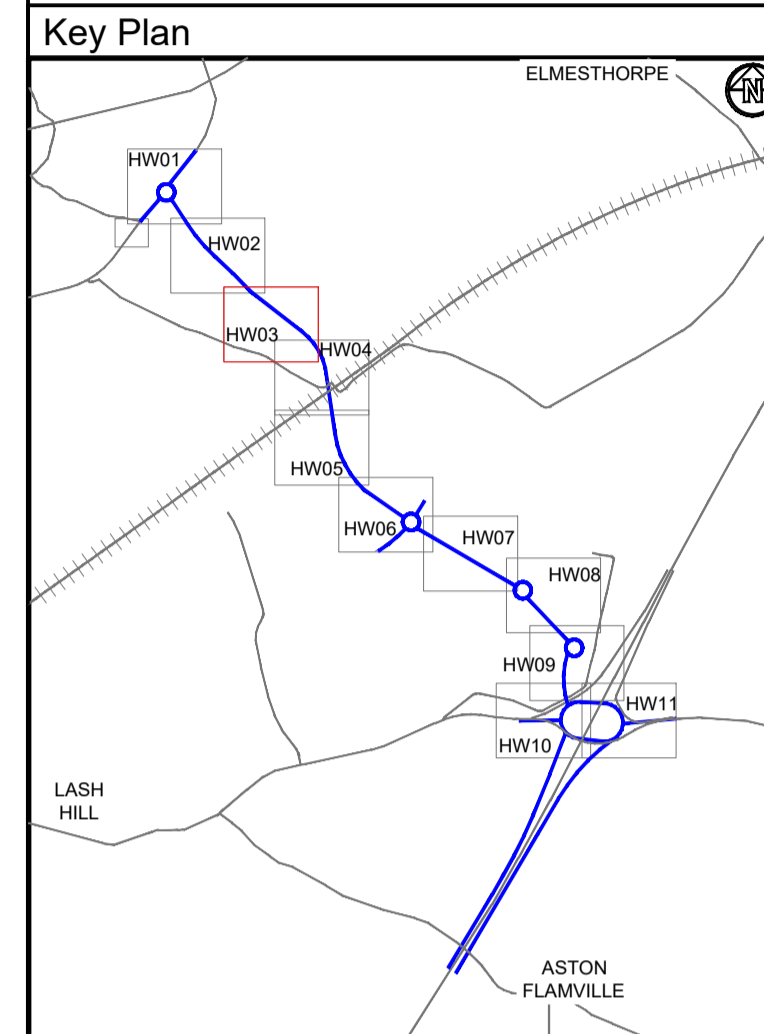

- Legend**
- DCO Land boundary limit
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)
  - Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
  - Existing Highway Boundary

P02	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com



Project Title


**HINCKLEY NATIONAL RAIL  
FREIGHT INTERCHANGE**

Drawing Title


**GENERAL ARRANGEMENT  
SHEET 3**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	07.12.23
Scale@A1:	1:500	Status	S2
Drawing Status	<b>PRELIMINARY</b>	Rev	P02
Project - Originator - Zone - Level - Type - Role - Number	HRF-BWB-HGN-HW03-DR-CH-0100		



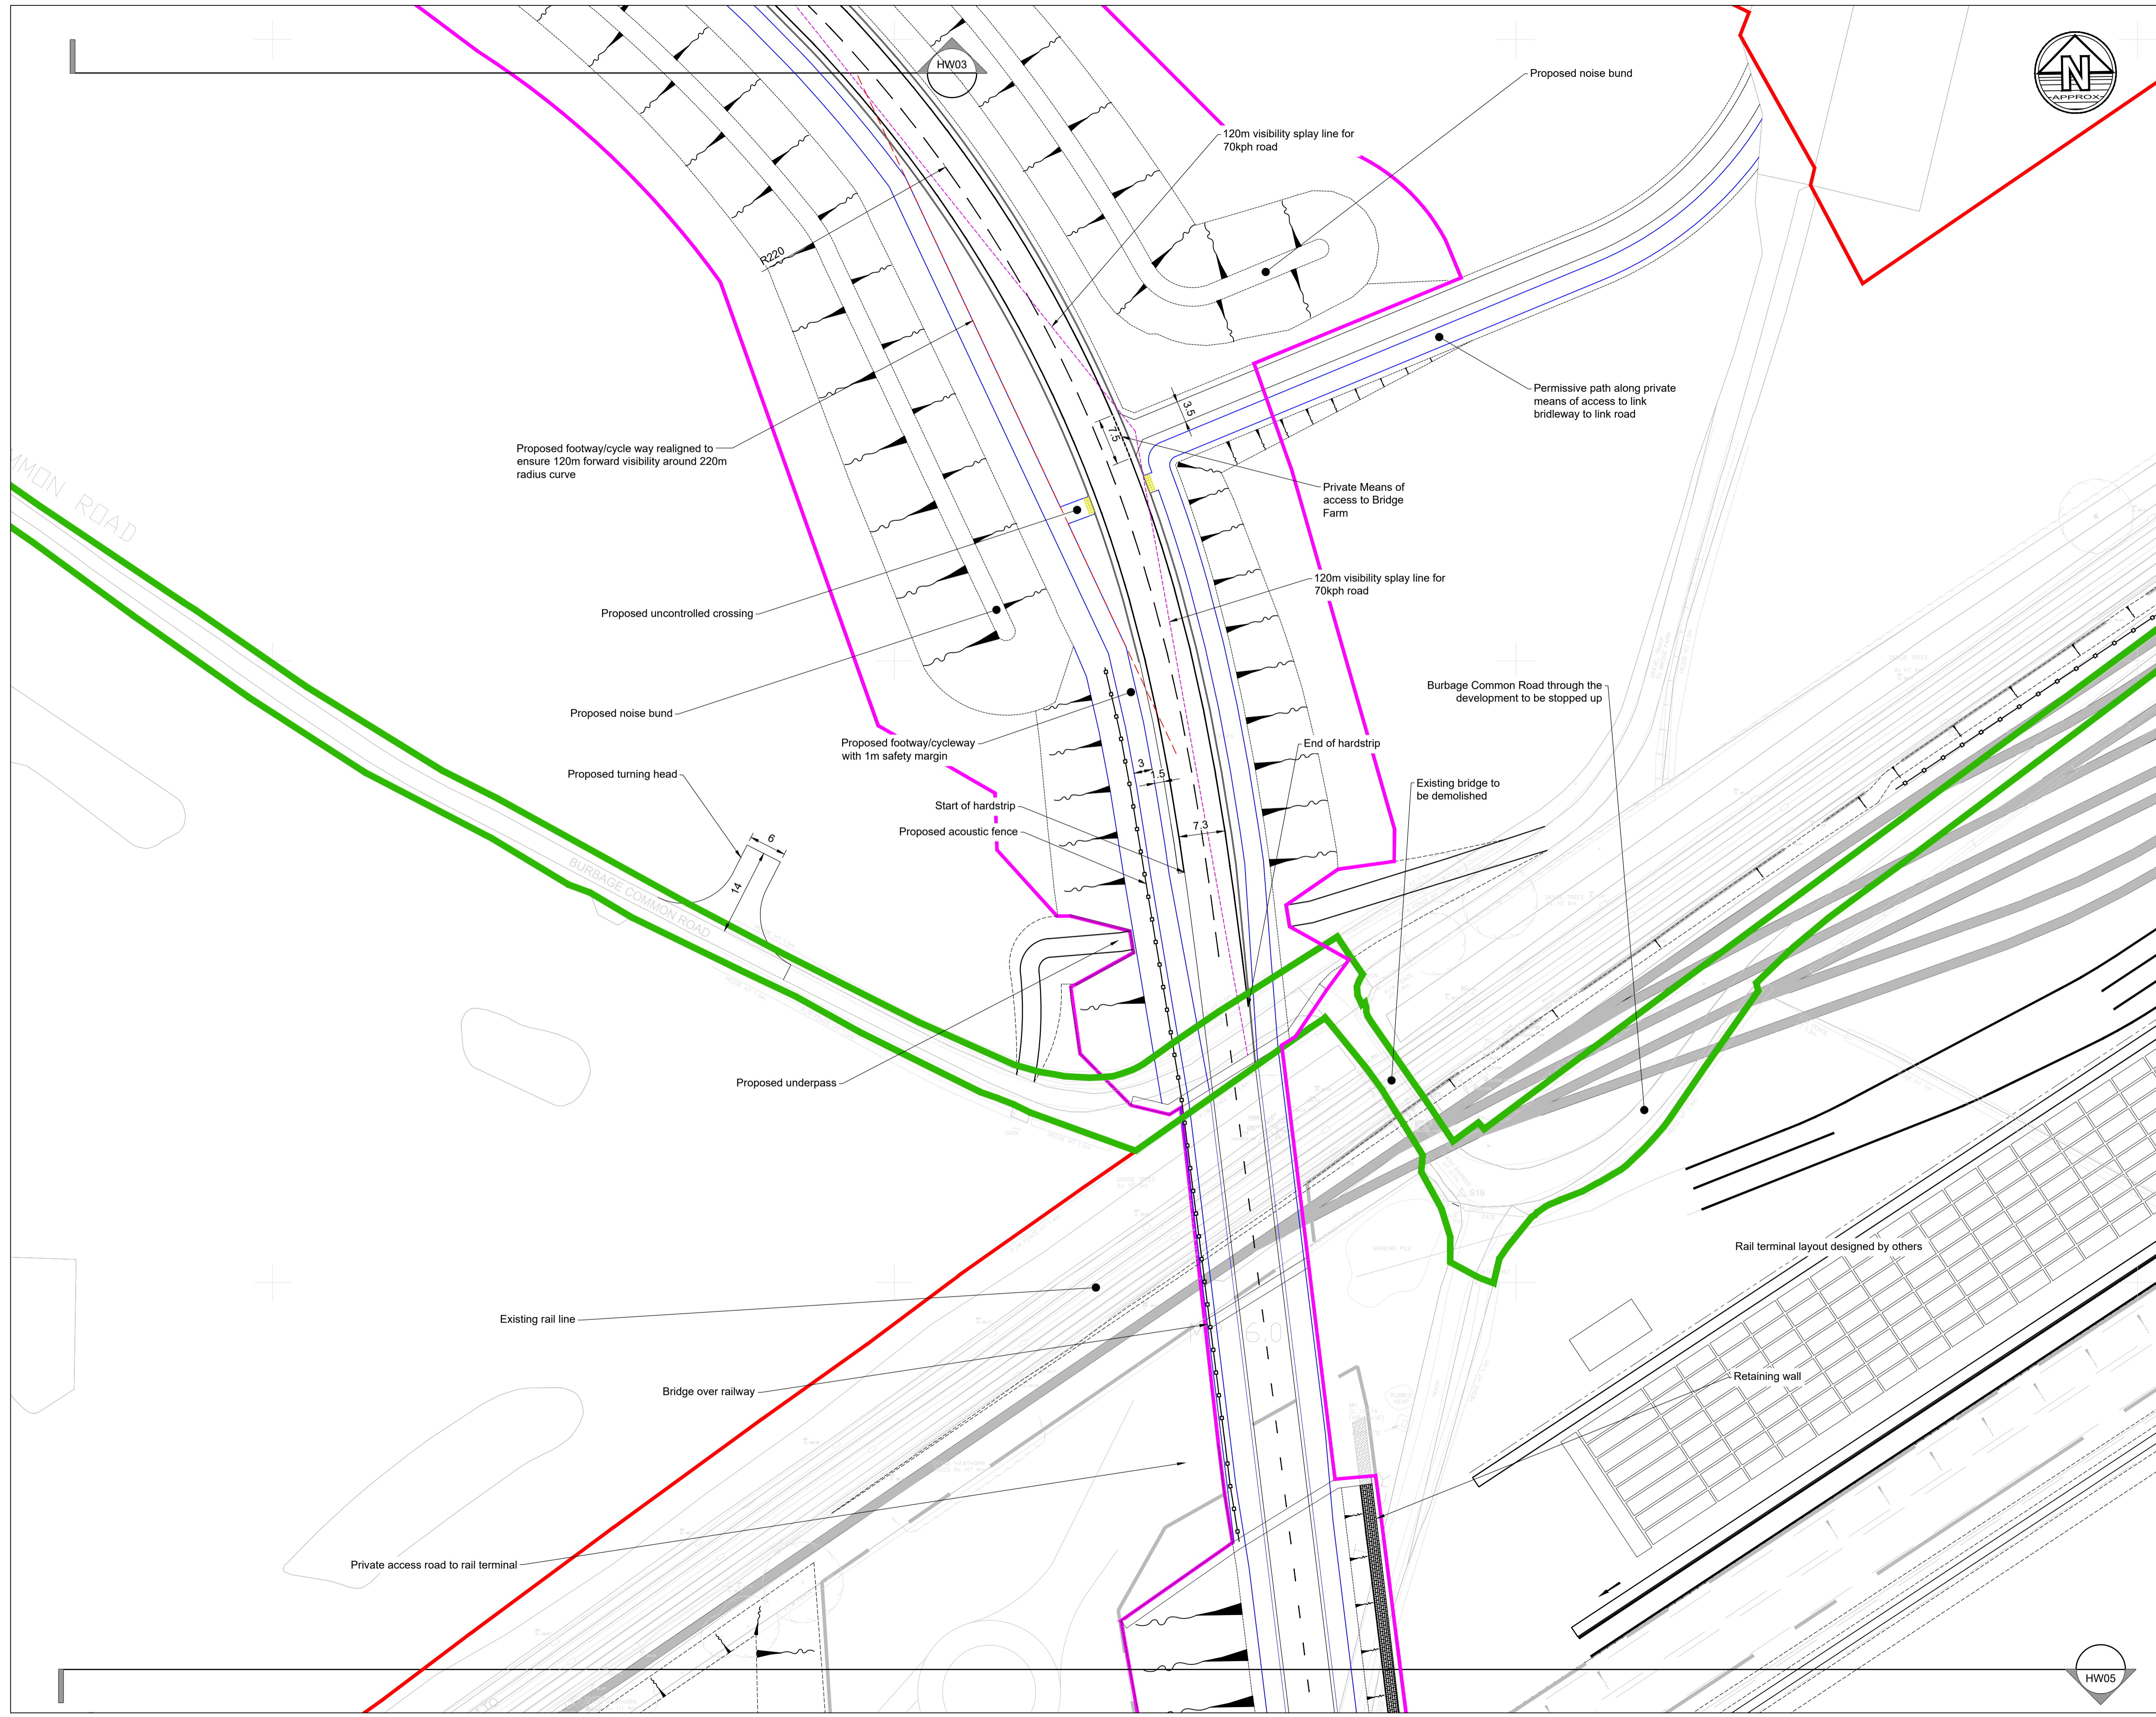

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

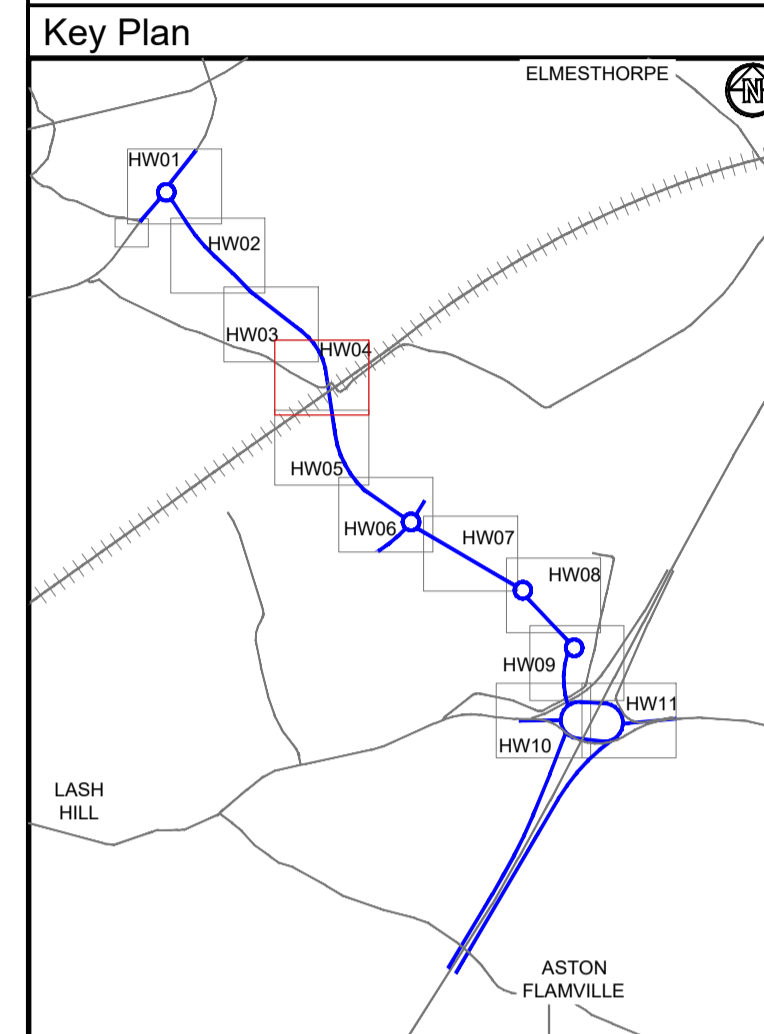

- Legend**
- DCO Land boundary limit
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)
  - Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
  - Existing Highway Boundary

PO2	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100
- www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title


**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title

**GENERAL ARRANGEMENT SHEET 4**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT 2814	Date:	07.12.23
Scale@A1:	1:500	Status	Rev
<b>PRELIMINARY</b>			
Project - Originator - Zone - Level - Type - Role - Number			
<b>HRF-BWB-HGN-HW04-DR-CH-0100</b>	<b>S2</b>	<b>P01</b>	




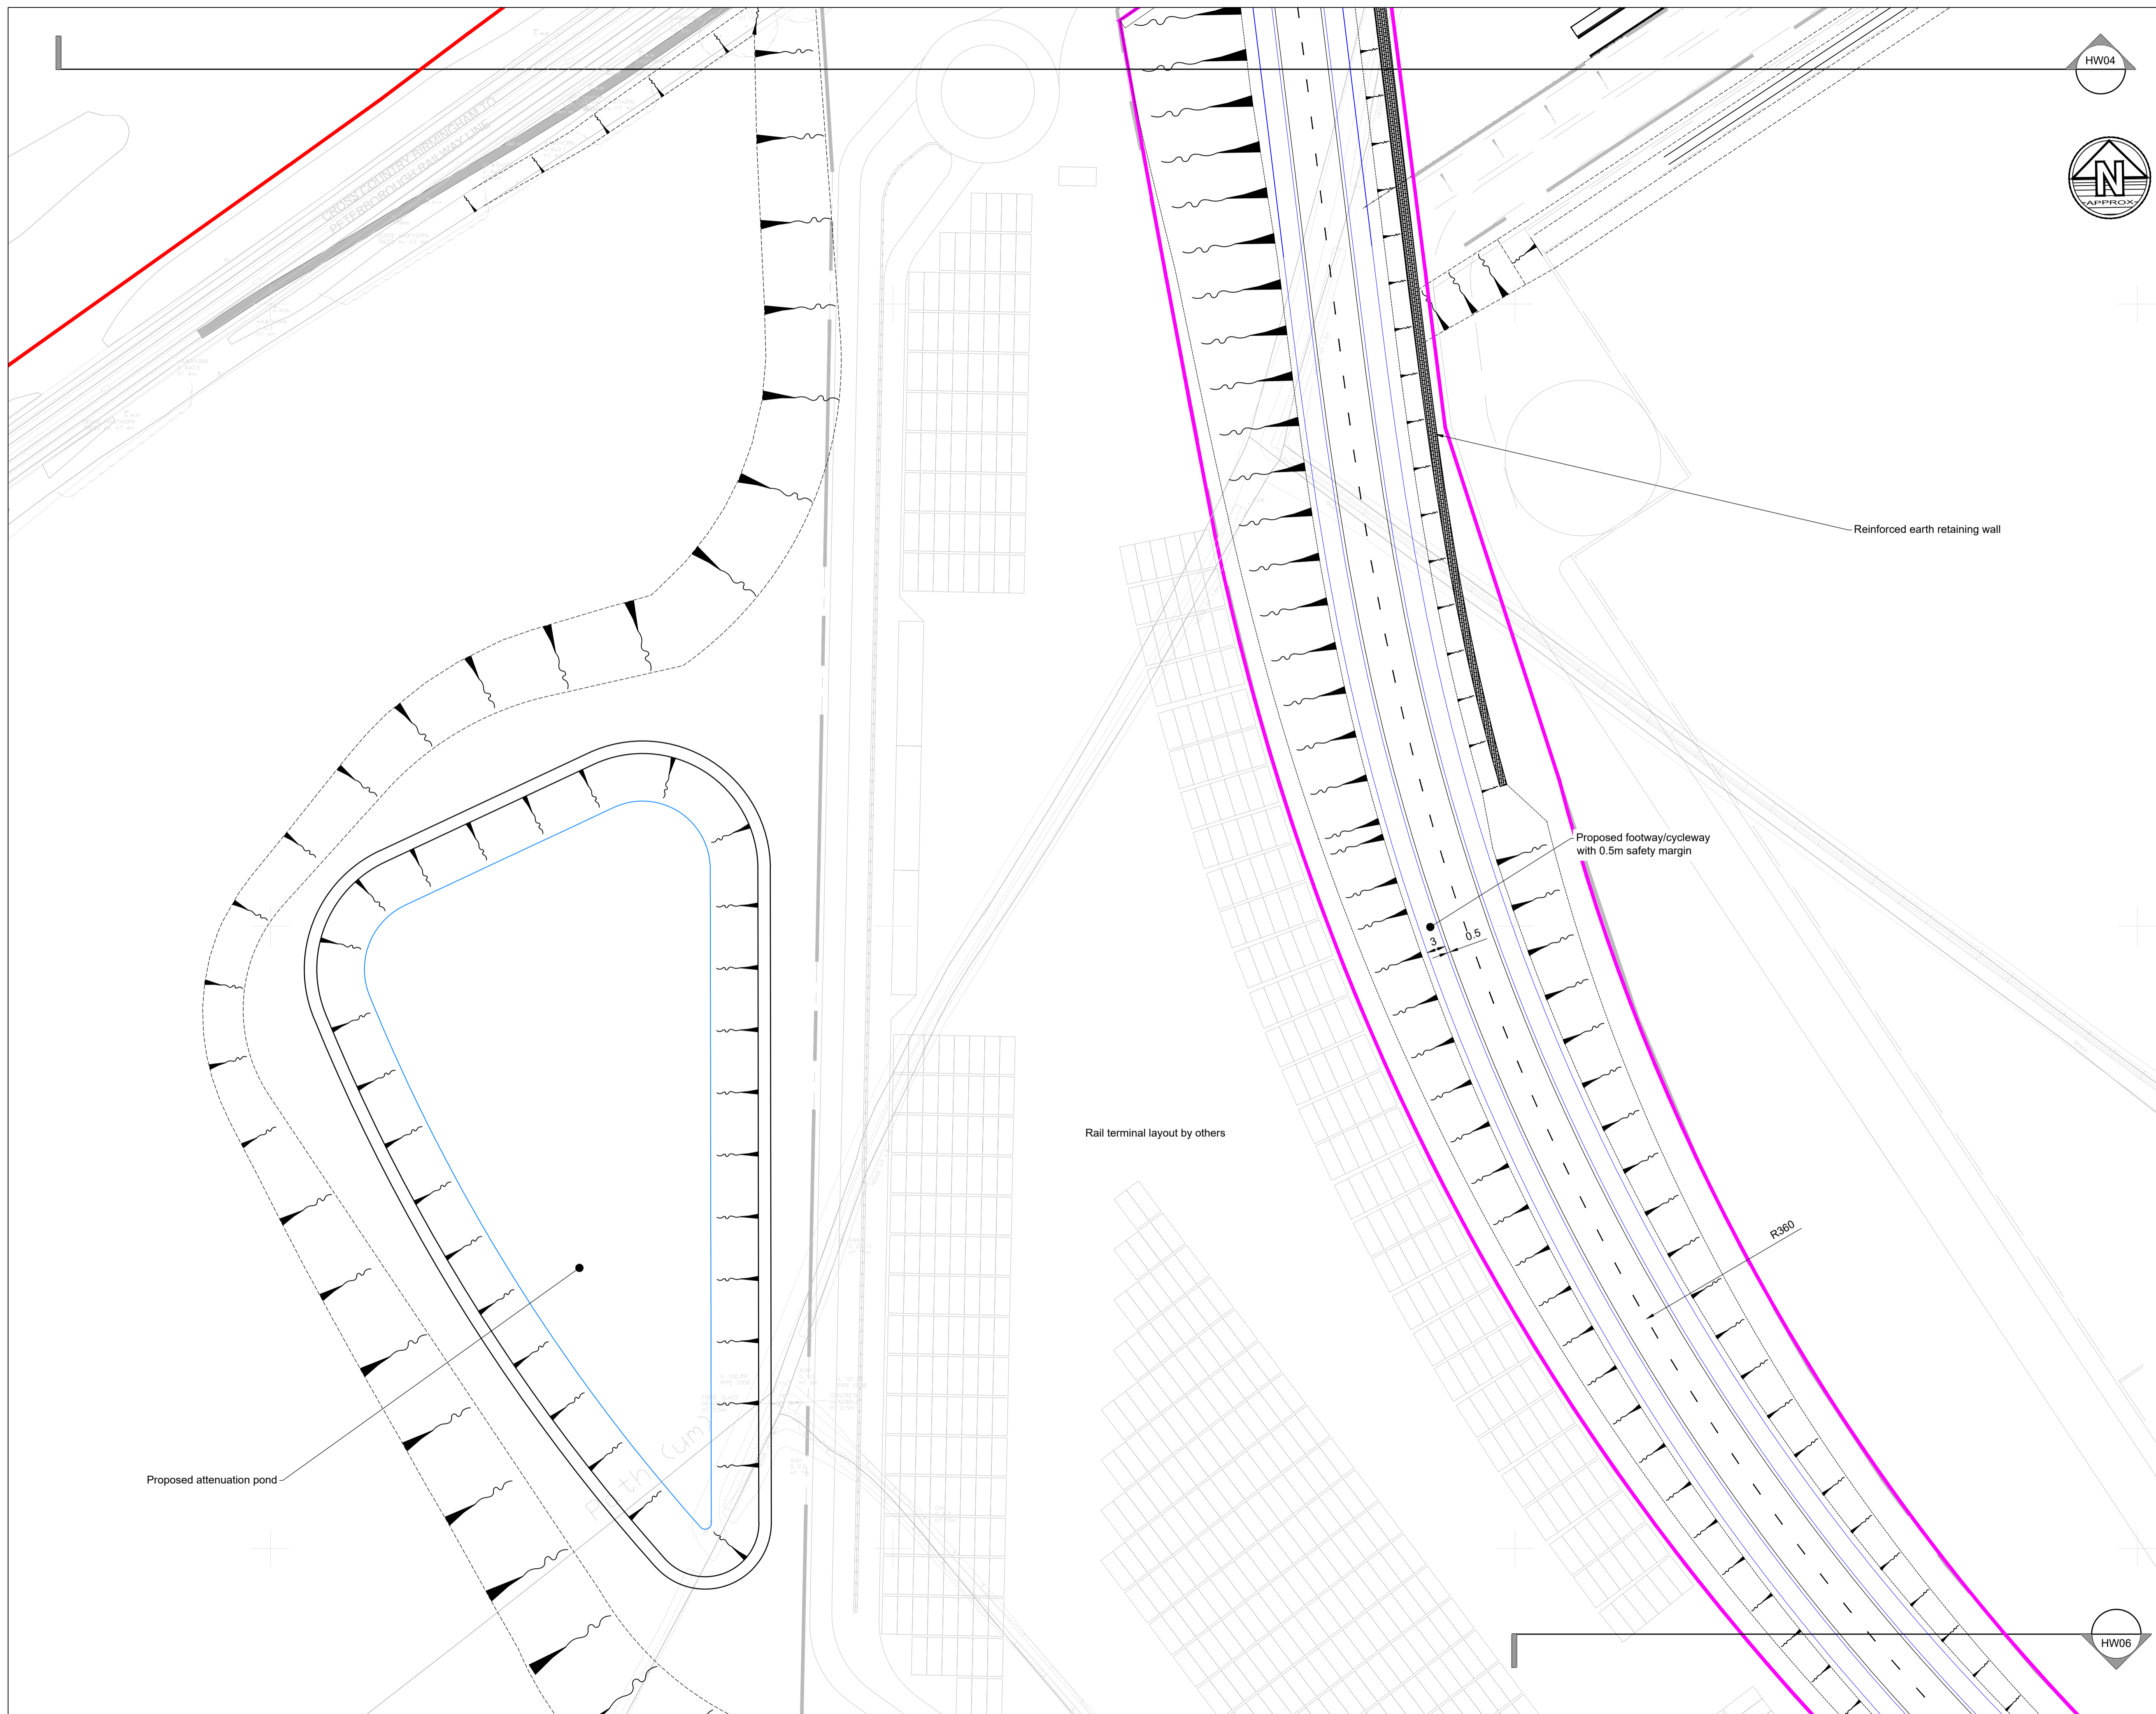

**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
6. All works must be carried out to the requirements of the overseeing organisation.

**Key Plan**

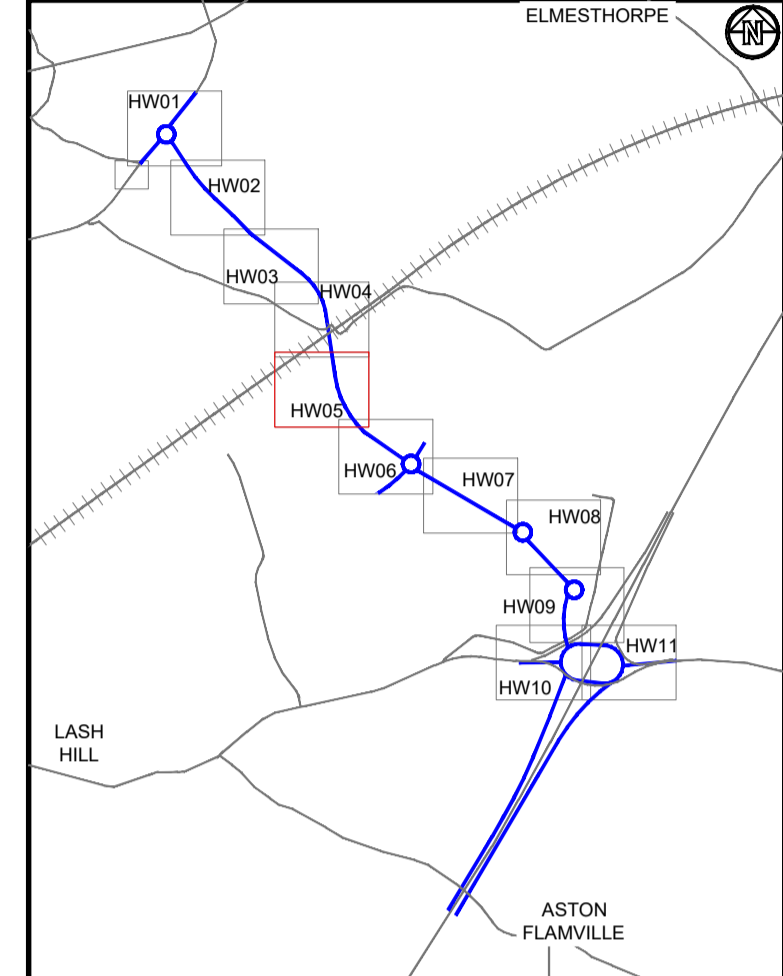

**Legend**

- DCO Land boundary limit
- Primary Signal Head
- Secondary Signal head
- Noise fence
- Earthwork extents
- Footway Type - Tactile paving in Red (R)
- Footway Type - Tactile paving in Buff (B)
- Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
- Existing Highway Boundary

PO2	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

**GENERAL ARRANGEMENT SHEET 5**


Drawn:	J.Manifold	Reviewed:	S.Carter
--------	------------	-----------	----------

BWB Ref:	NTT2814	Date:	07.12.23	Scale@A1:	1:500
----------	---------	-------	----------	-----------	-------

**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW05-DR-CH-0100	S2	P02




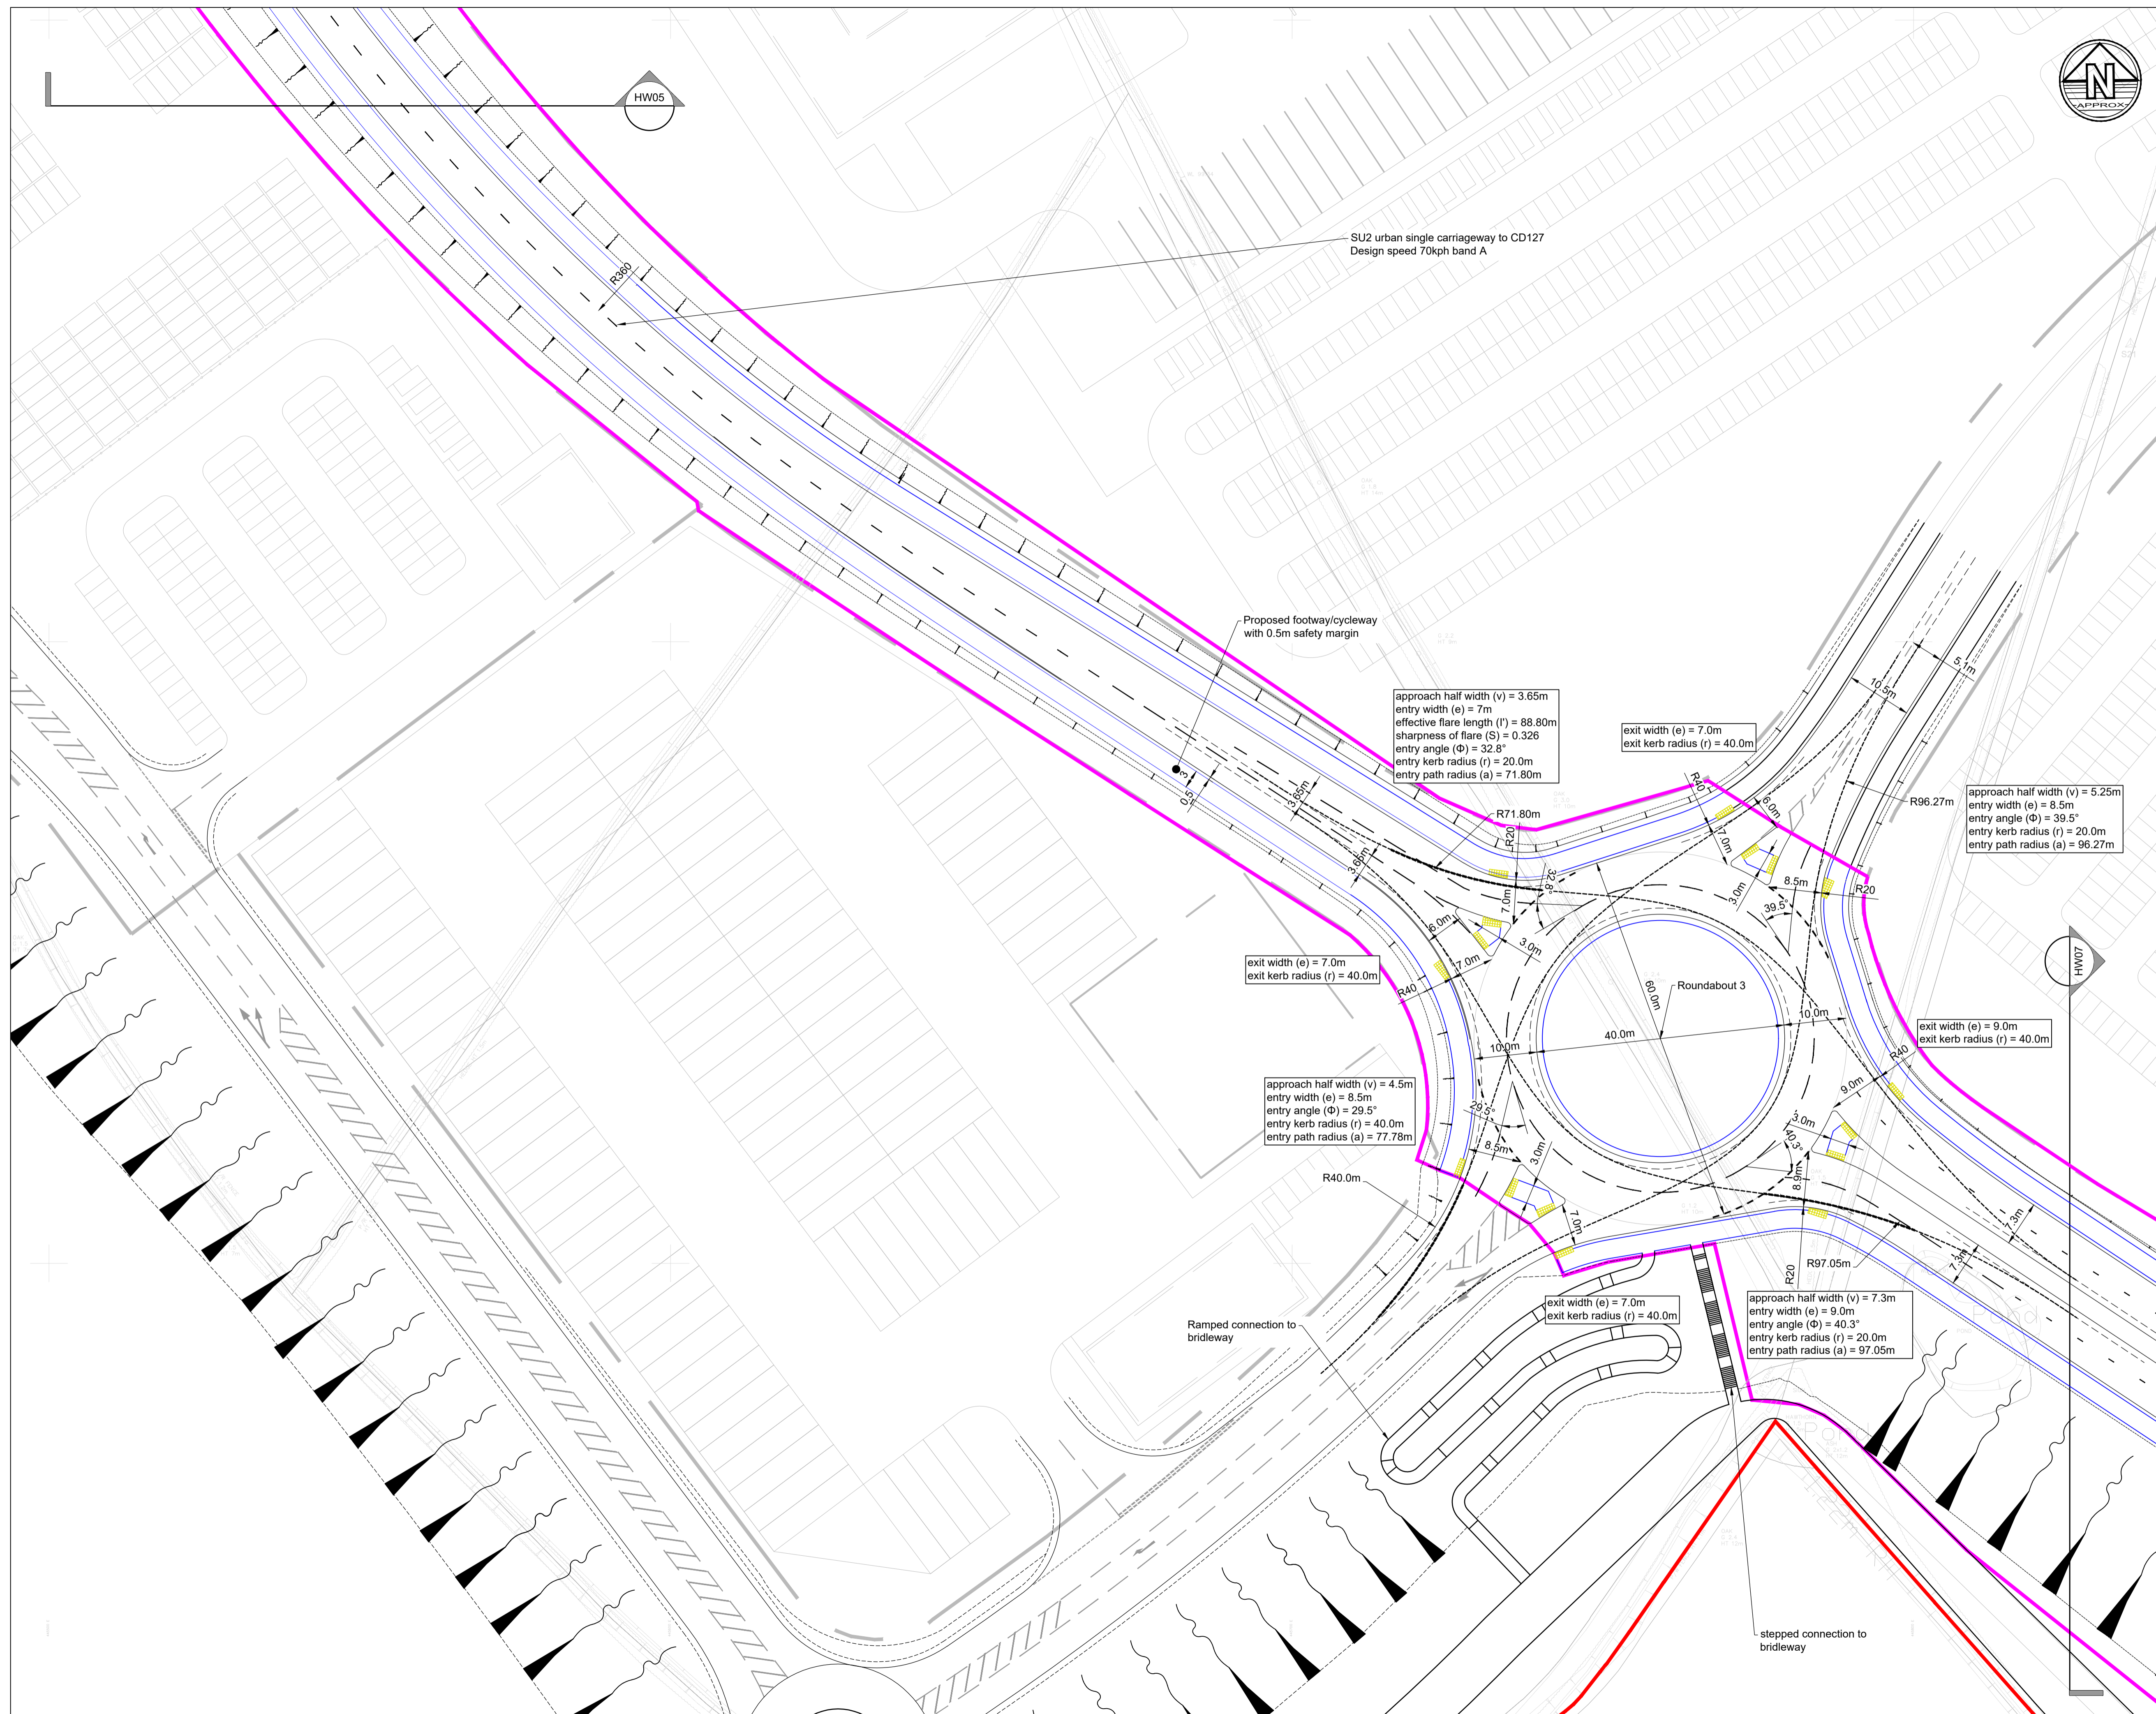

Notes

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
6. All works must be carried out to the requirements of the overseeing organisation.

Key Plan

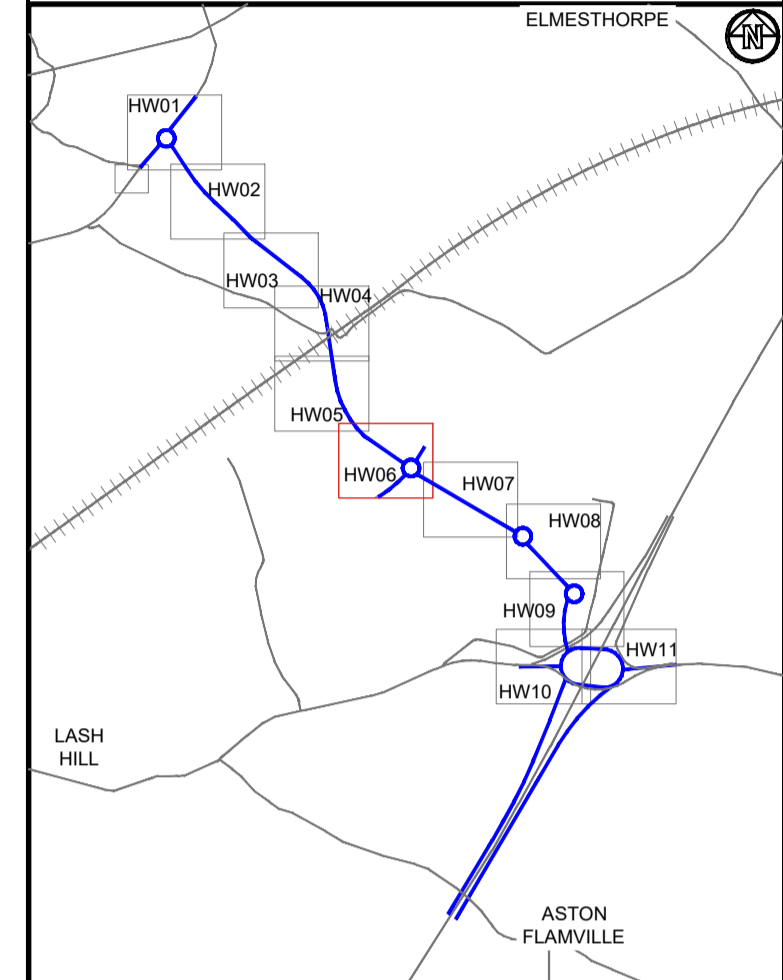

Legend

- DCO Land boundary limit
- ▶ Primary Signal Head
- ◀ Secondary Signal head
- Noise fence
- Earthwork extents
- Footway Type - Tactile paving in Red (R)
- Footway Type - Tactile paving in Buff (B)
- Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
- Existing Highway Boundary

PO2	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Dw	Rev

Issues & Revisions

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100
- www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title  
**HINCKLEY NATIONAL RAIL  
FREIGHT INTERCHANGE**


Drawing Title  
**GENERAL ARRANGEMENT  
SHEET 6**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	07.12.23
Scale@A1:	1:500		


Drawing Status  
**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW06-DR-CH-0100	S2	P02



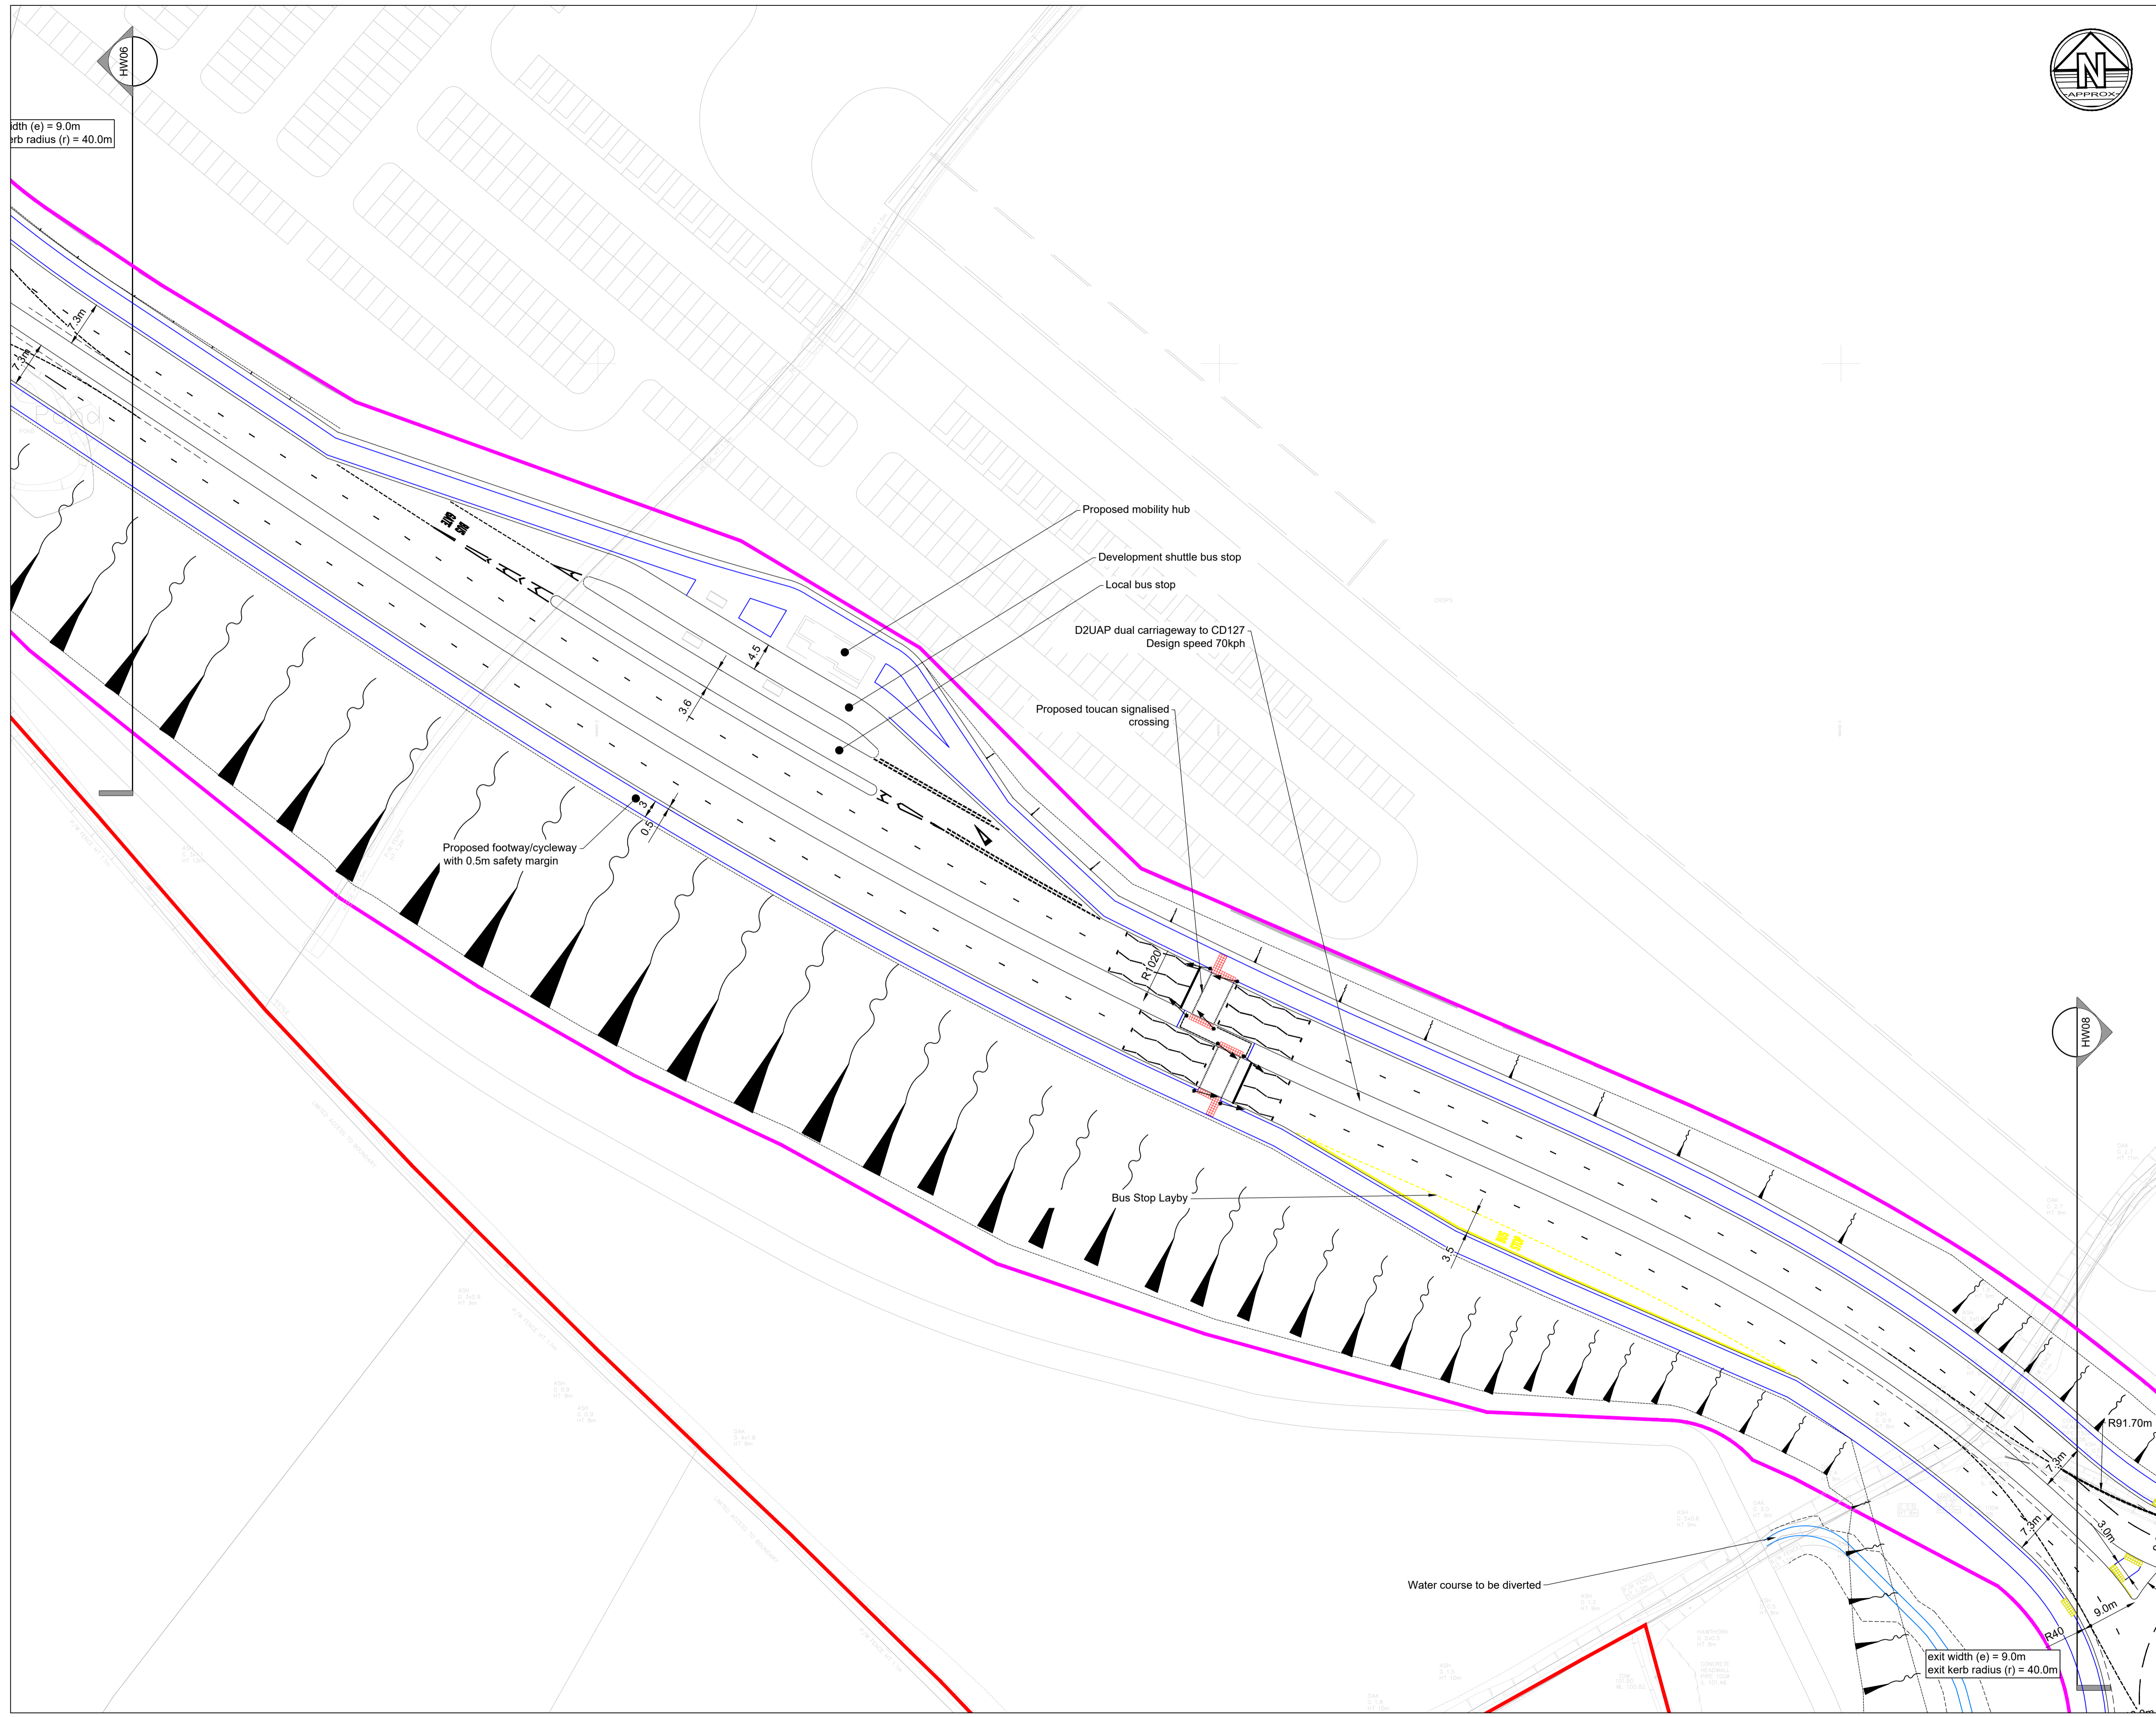

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

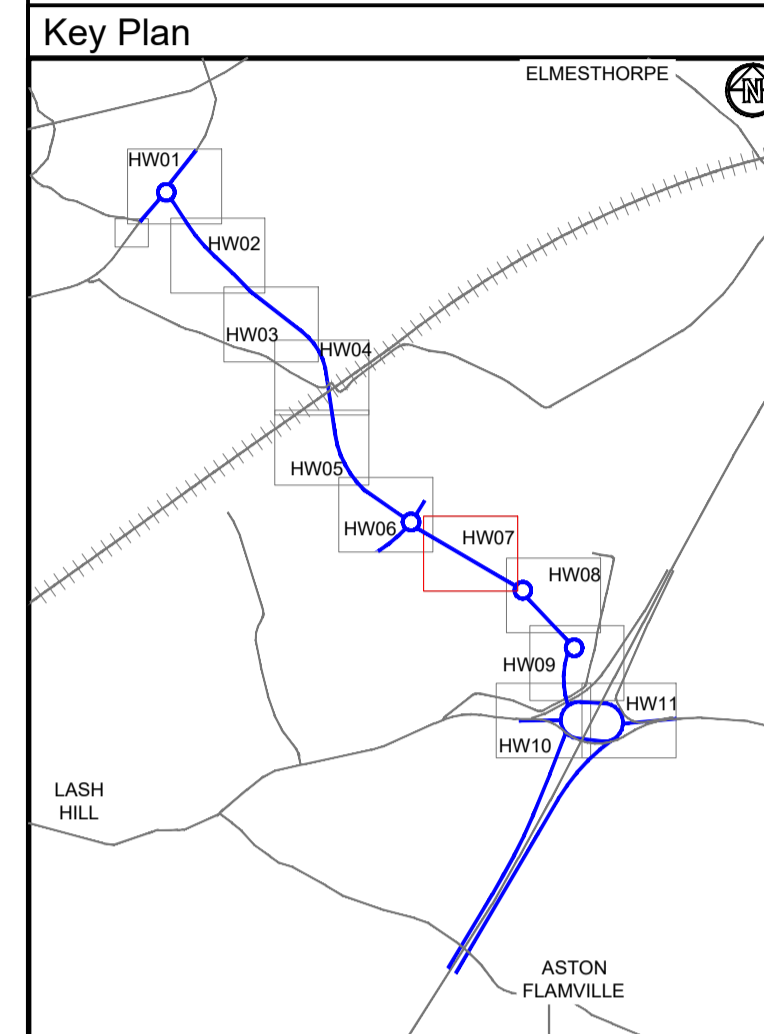

- Legend**
- DCO Land boundary limit
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)
  - Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
  - Existing Highway Boundary

P03	07.12.23	Updated following LCC meeting	JM	SC
P02	14.11.23	Bus Gate & Bus Stop relocation	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100
- www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title


**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title

**GENERAL ARRANGEMENT SHEET 7**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	07.12.23
Scale@A1:	1:500		
<b>PRELIMINARY</b>			
Project - Originator - Zone - Level - Type - Role - Number	Status	Rev	
HRF-BWB-HGN-HW07-DR-CH-0100	S2	P03	




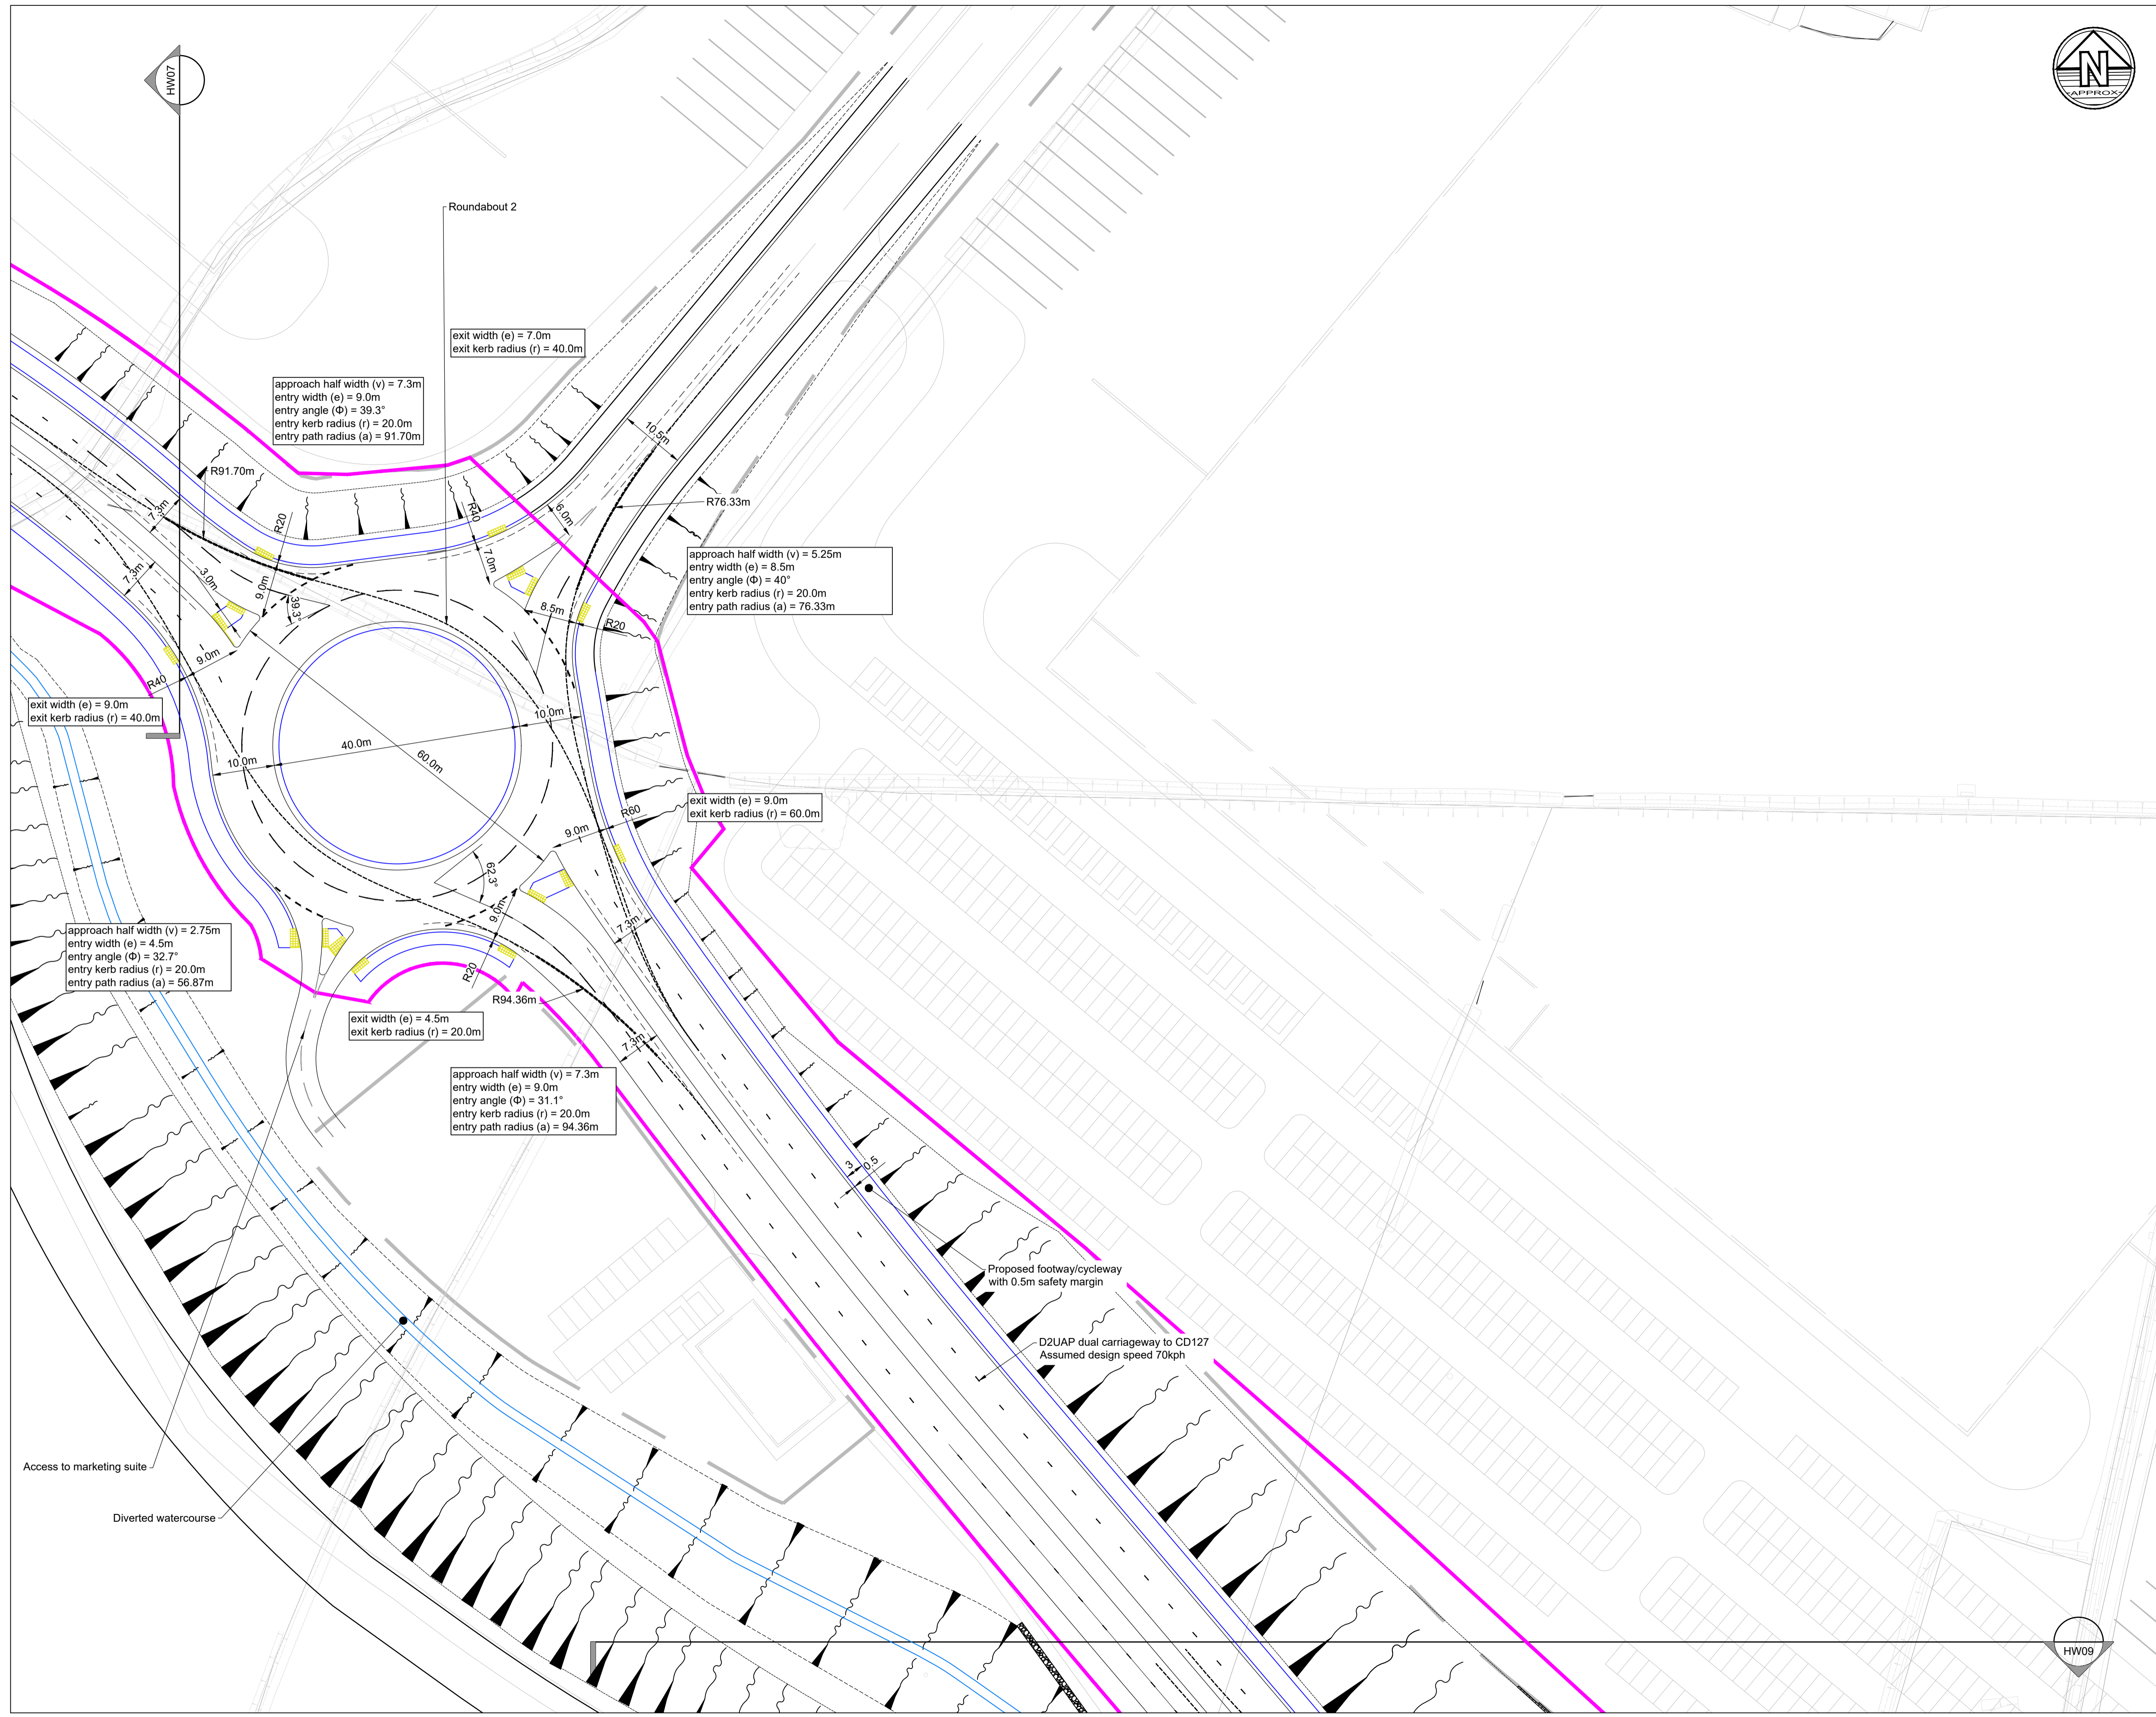

**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
6. All works must be carried out to the requirements of the overseeing organisation.

**Key Plan**

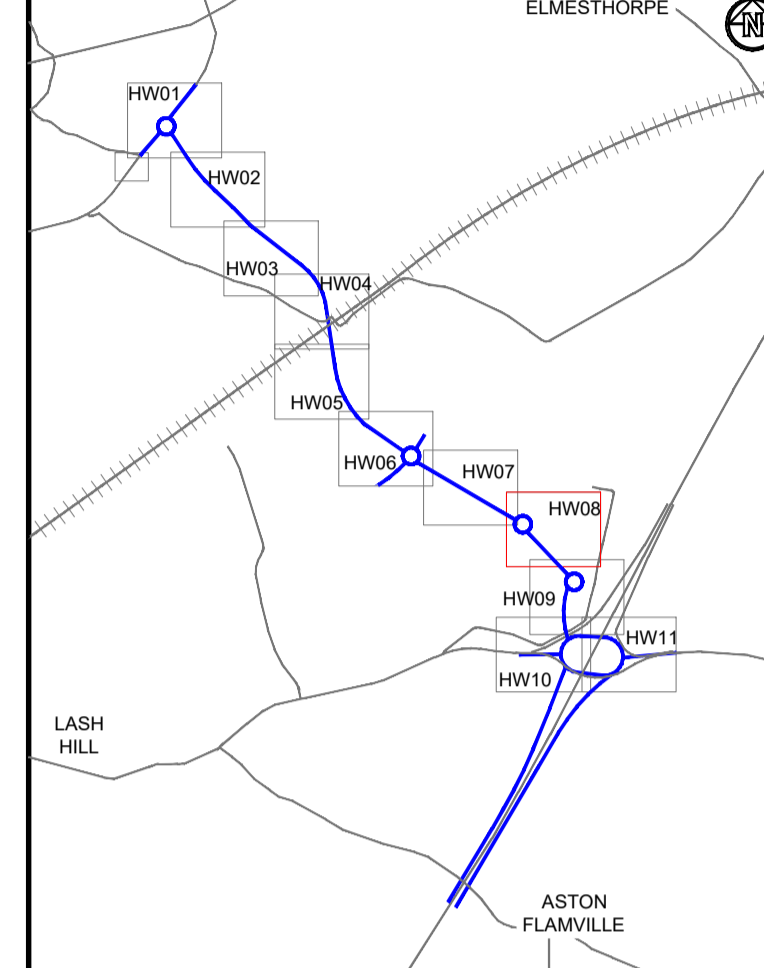

**Legend**

- DCO Land boundary limit
- Primary Signal Head
- Secondary Signal head
- Noise fence
- Earthwork extents
- Footway Type - Tactile paving in Red (R)
- Footway Type - Tactile paving in Buff (B)
- Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
- Existing Highway Boundary

PO2	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100
- www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title


**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title

**GENERAL ARRANGEMENT SHEET 8**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	07.12.23
Scale@A1:	1:500	Status	PRELIMINARY
Project - Originator - Zone - Level - Type - Role - Number	HRF-BWB-HGN-HW08-DR-CH-0100	Status	S2
Rev	P02		




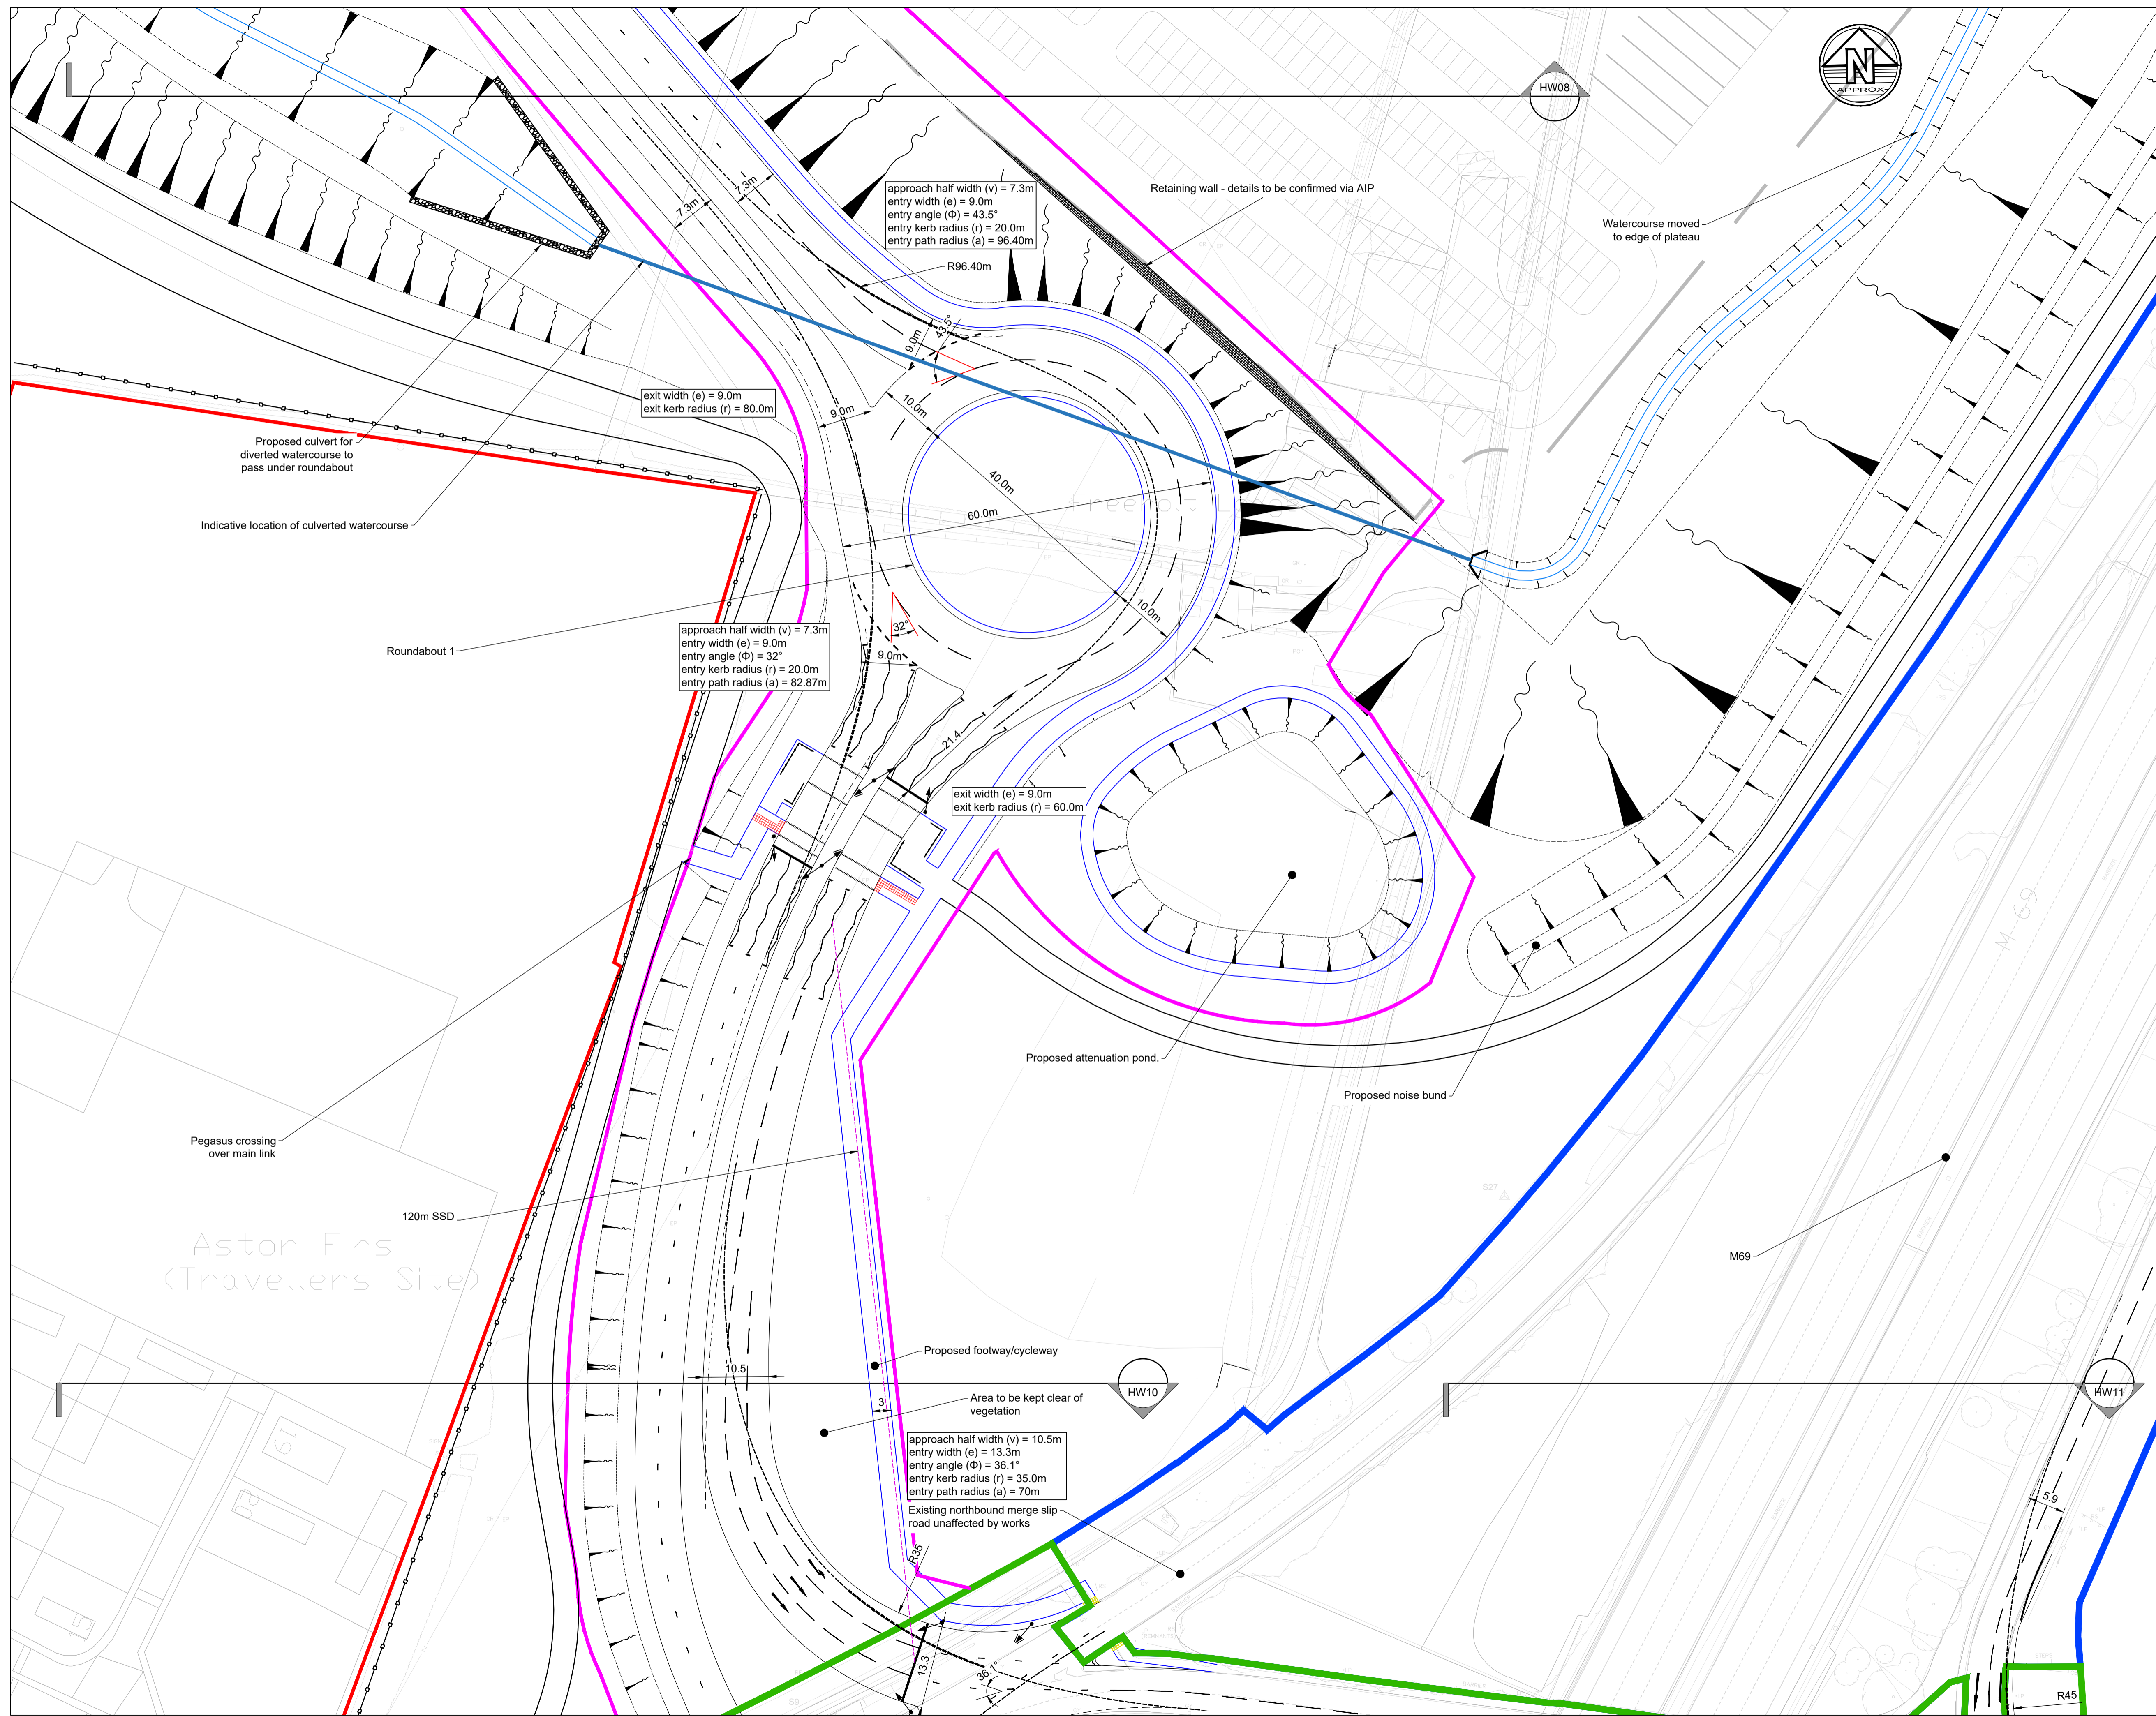

**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
6. All works must be carried out to the requirements of the overseeing organisation.

**Key Plan**

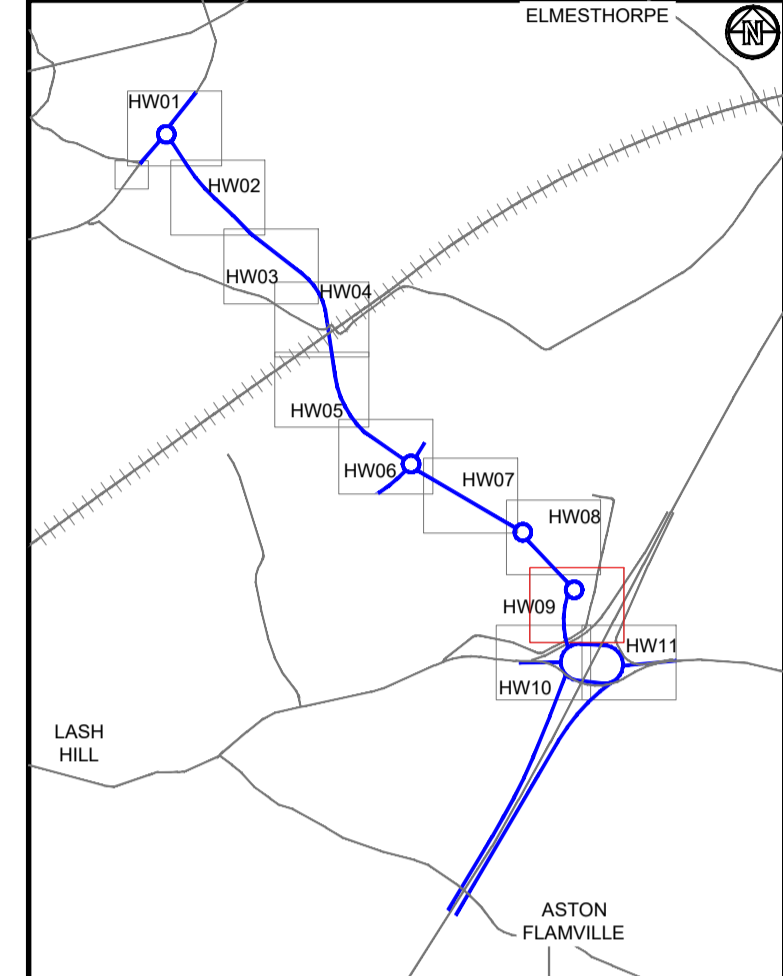

**Legend**

- DCO Land boundary limit
- Primary Signal Head
- Secondary Signal Head
- Noise fence
- Earthwork extents
- Footway Type - Tactile paving in Red (R)
- Footway Type - Tactile paving in Buff (B)
- Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
- LCC Highway Boundary
- National Highways Boundary

PO2	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client


**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

**HINKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

**GENERAL ARRANGEMENT SHEET 9**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	07.12.23
Scale@A1:	1:500	Status:	<b>PRELIMINARY</b>
Project - Originator - Zone - Level - Type - Role - Number	HRF-BWB-HGN-HW09-DR-CH-0100	Status	<b>S2</b>
Rev	<b>P02</b>		




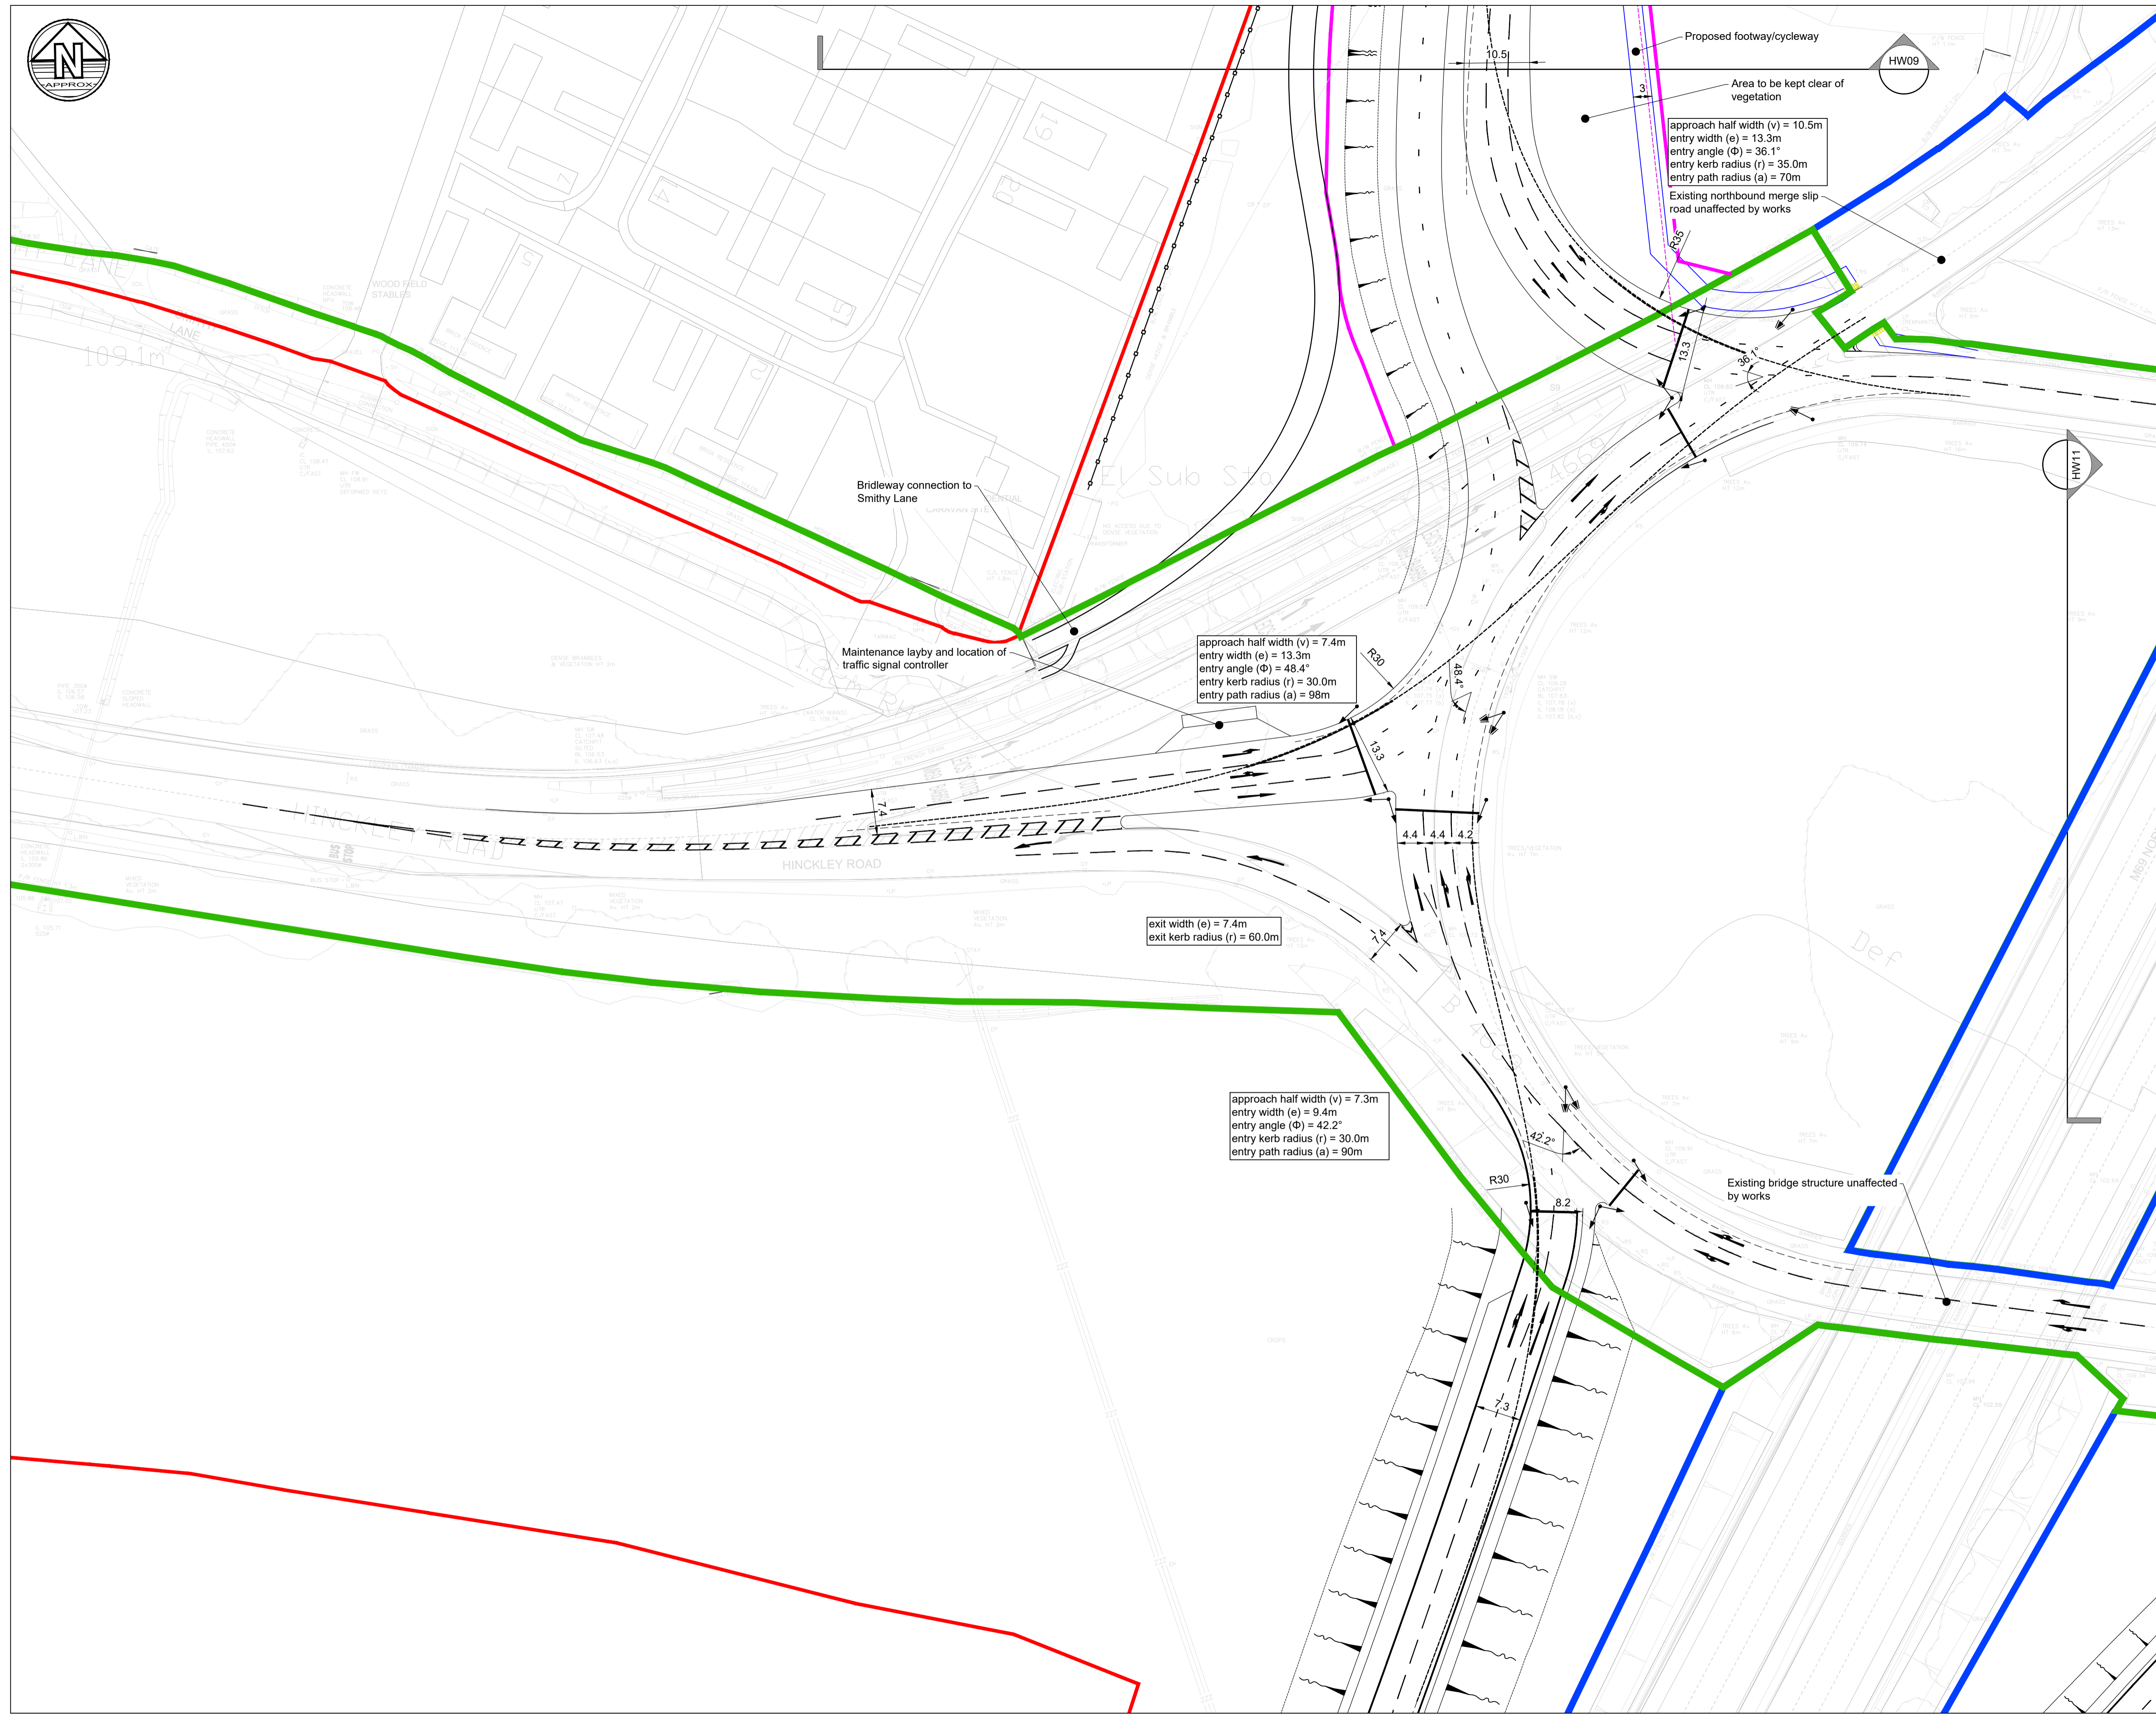

Notes

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
6. All works must be carried out to the requirements of the overseeing organisation.

Key Plan

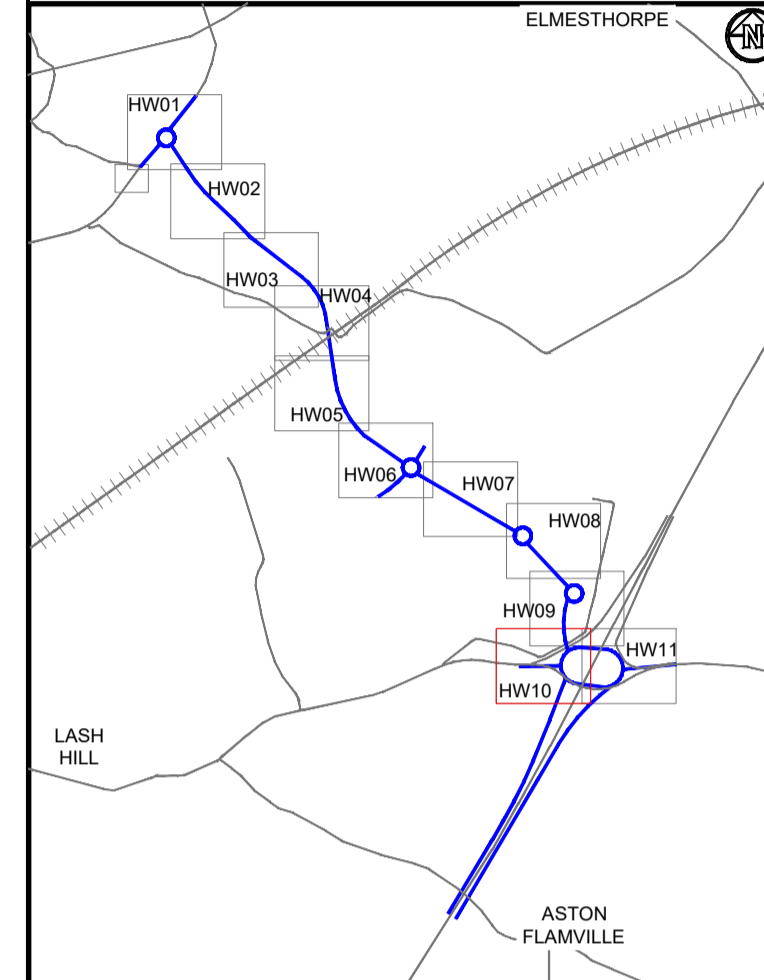

Legend

- DCO Land boundary limit
- Primary Signal Head
- Secondary Signal head
- Noise fence
- Earthwork extents
- Footway Type - Tactile paving in Red (R)
- Footway Type - Tactile paving in Buff (B)
- Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
- LCC Highway Boundary
- National Highways Boundary

P02	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

Issues & Revisions

**BWB** A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title

**GENERAL ARRANGEMENT SHEET 10**

Drawn:	J.Manifold	Reviewed:	S.Carter
--------	------------	-----------	----------


BWB Ref:	NTT2814	Date:	07.12.23	Scale@A1:	1:500
----------	---------	-------	----------	-----------	-------

Drawing Status


**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW10-DR-CH-0100	S2	P02



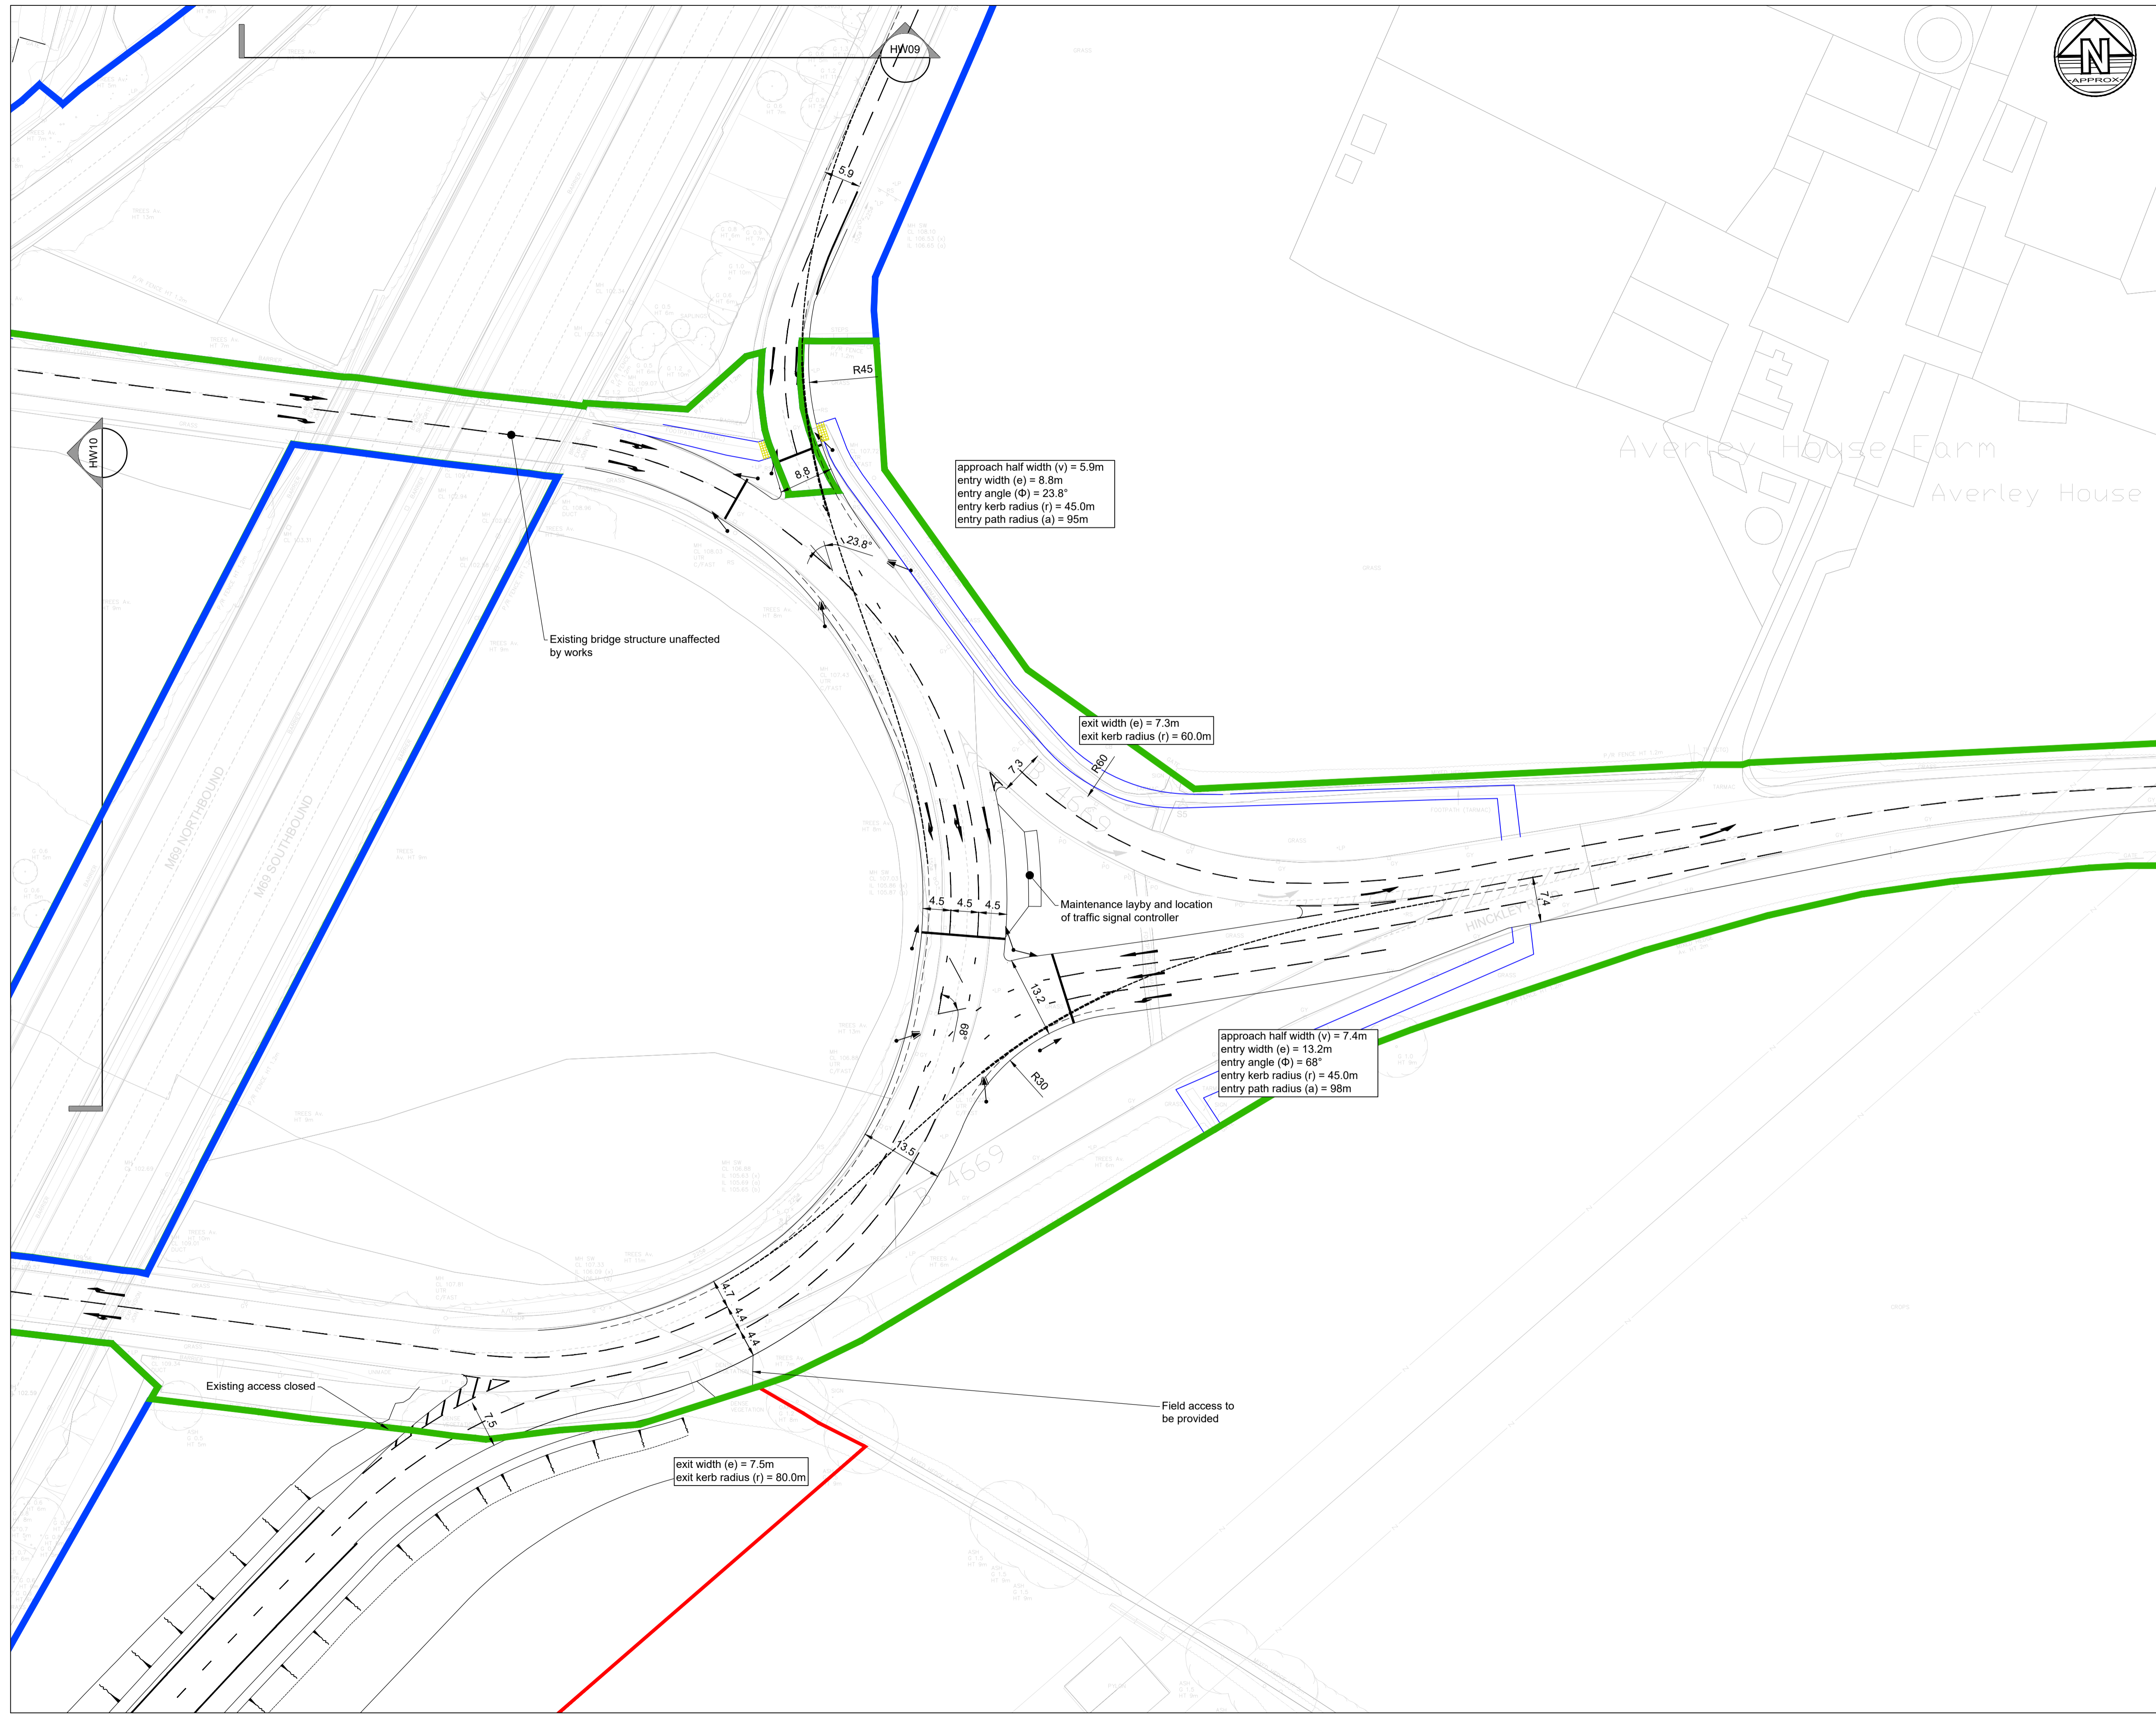

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

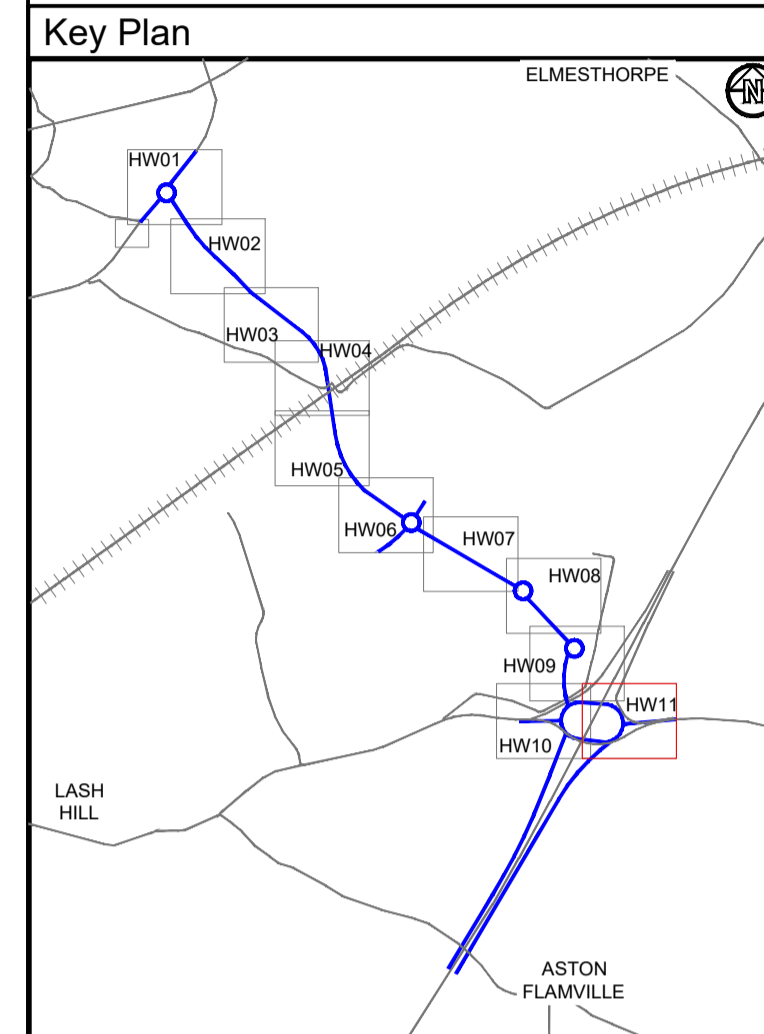

- Legend**
- DCO Land boundary limit
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)
  - Indicative proposed highway boundary - subject to detailed design and agreement with overseeing authority
  - LCC Highway Boundary
  - National Highways Boundary

P02	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title


**HINCKLEY NATIONAL RAIL  
FREIGHT INTERCHANGE**

Drawing Title


**GENERAL ARRANGEMENT  
SHEET 11**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	07.12.23
Scale@A1:	1:500	Status	Rev
<b>PRELIMINARY</b>		Status	Rev
Project - Originator - Zone - Level - Type - Role - Number		Status	Rev
<b>HRF-BWB-HGN-HW11-DR-CH-0100</b>		<b>S2</b>	<b>P02</b>



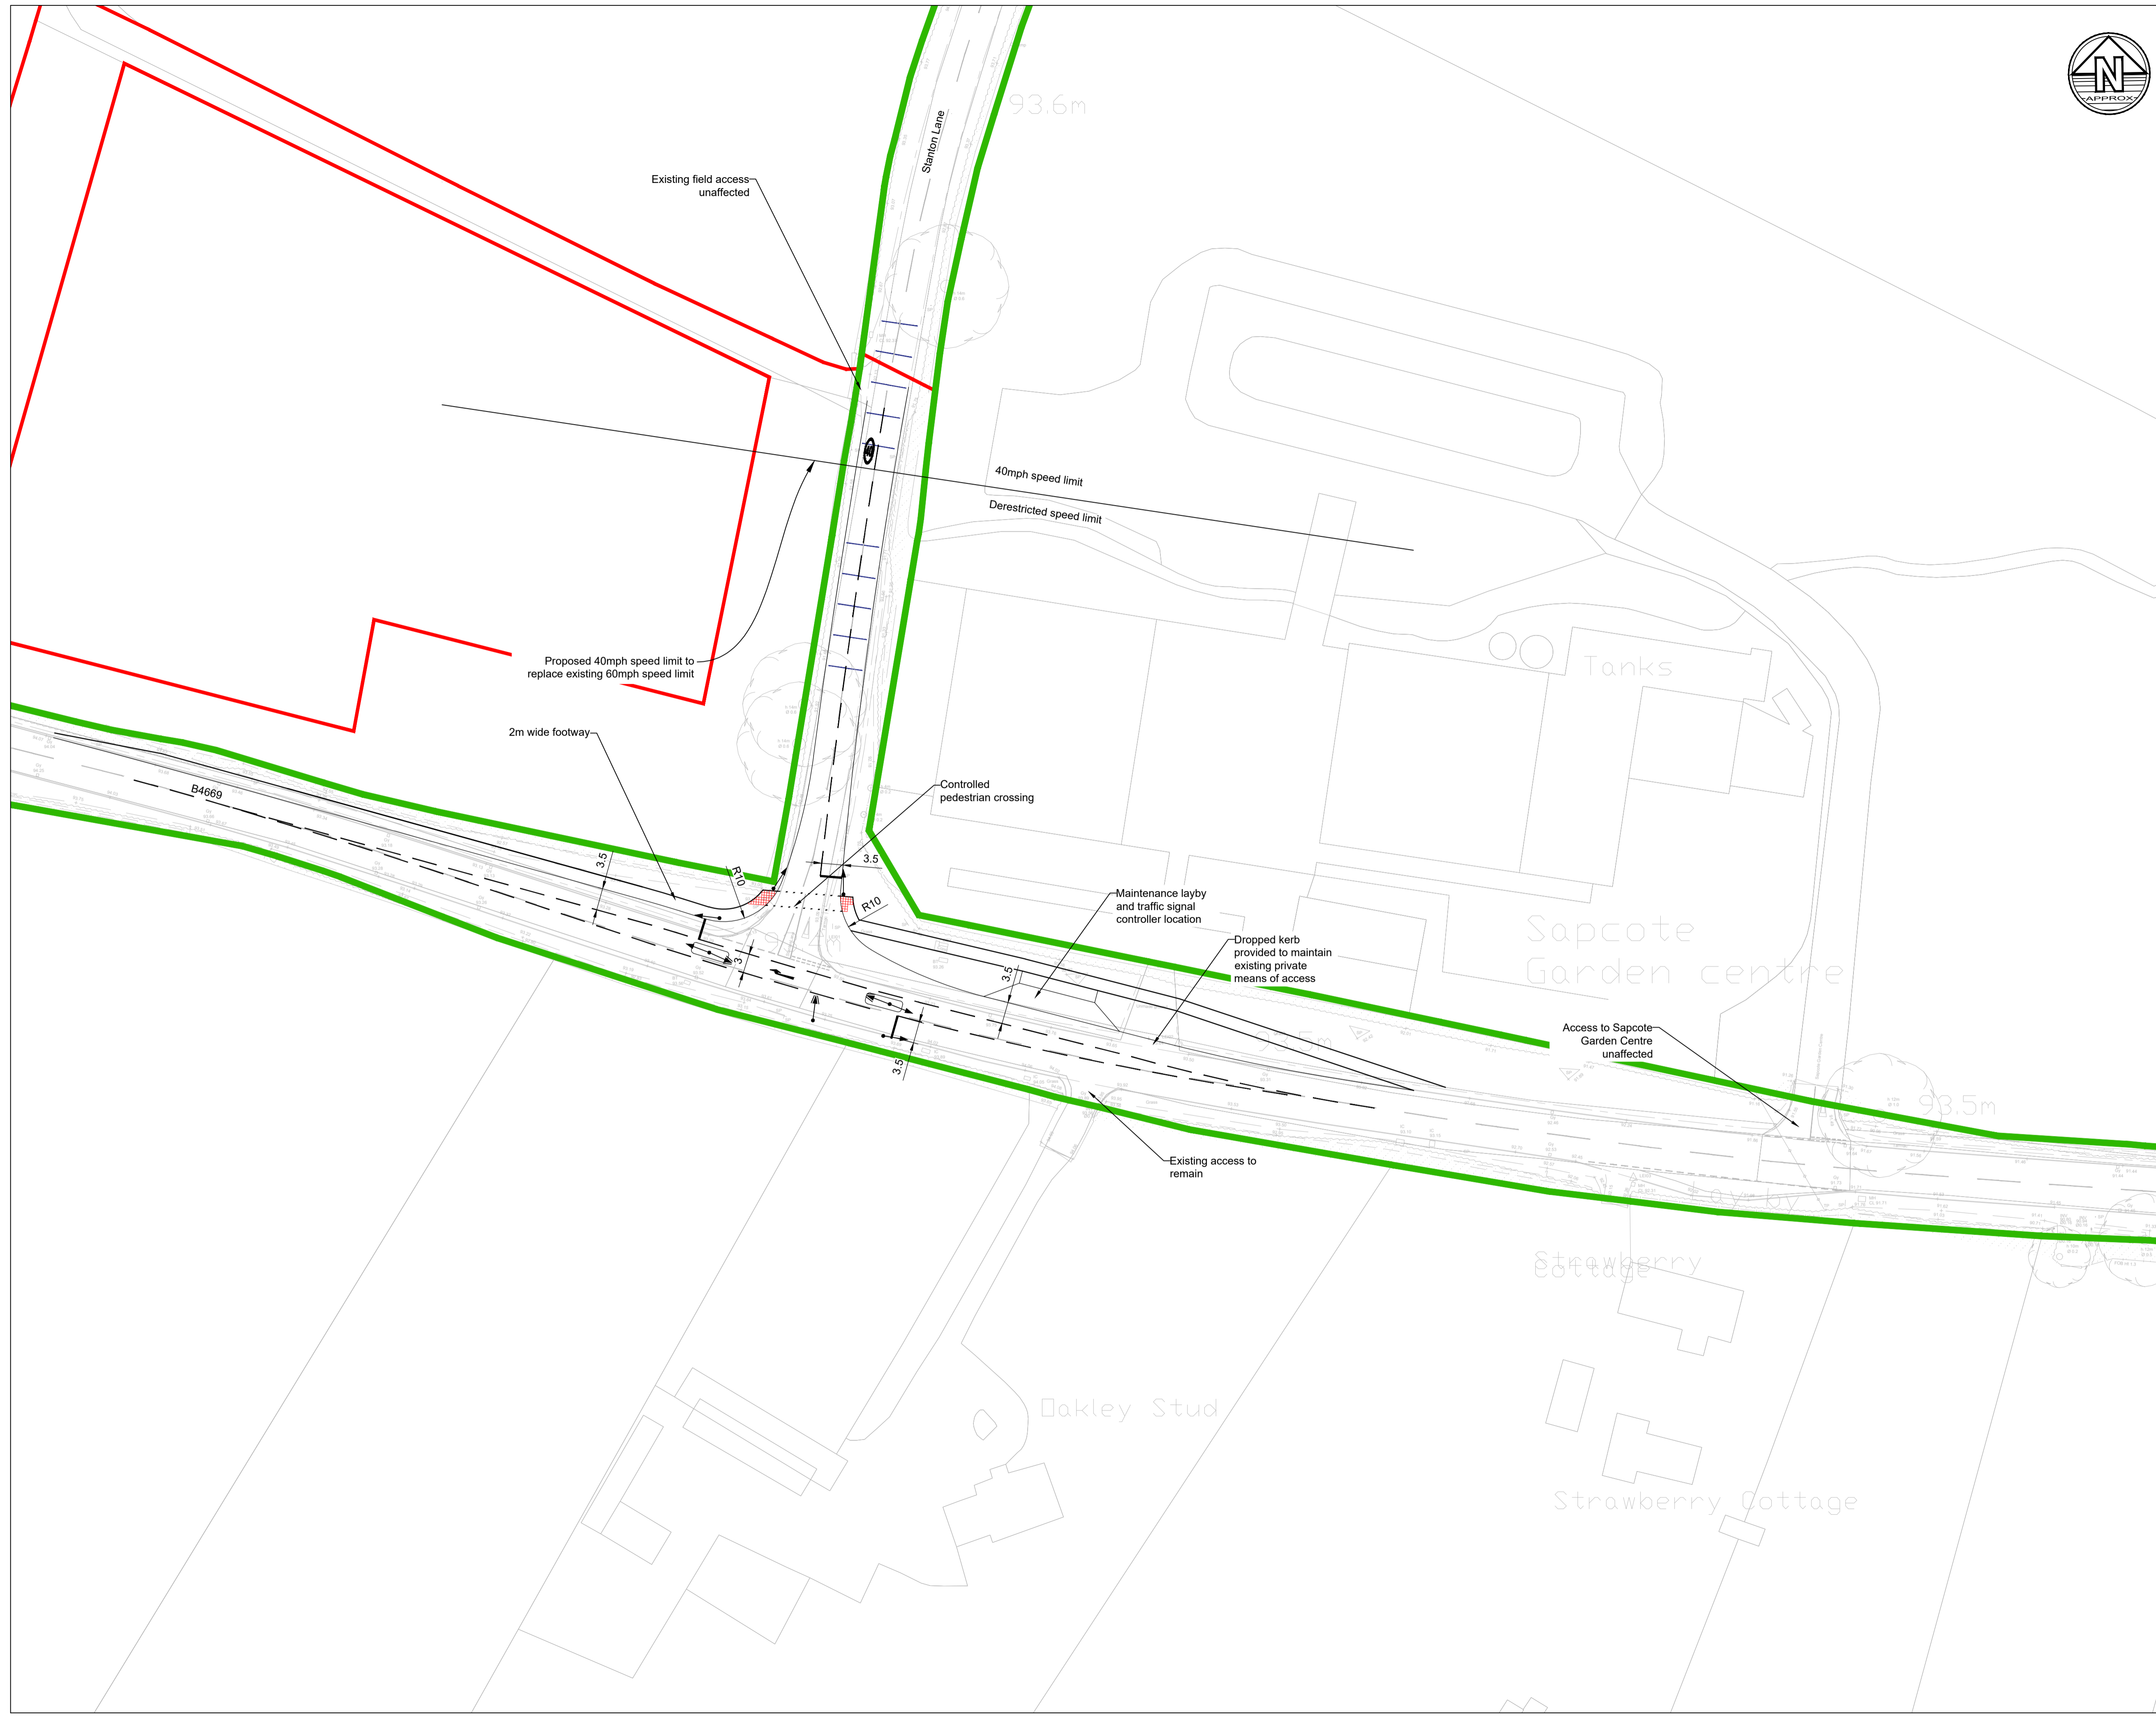

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

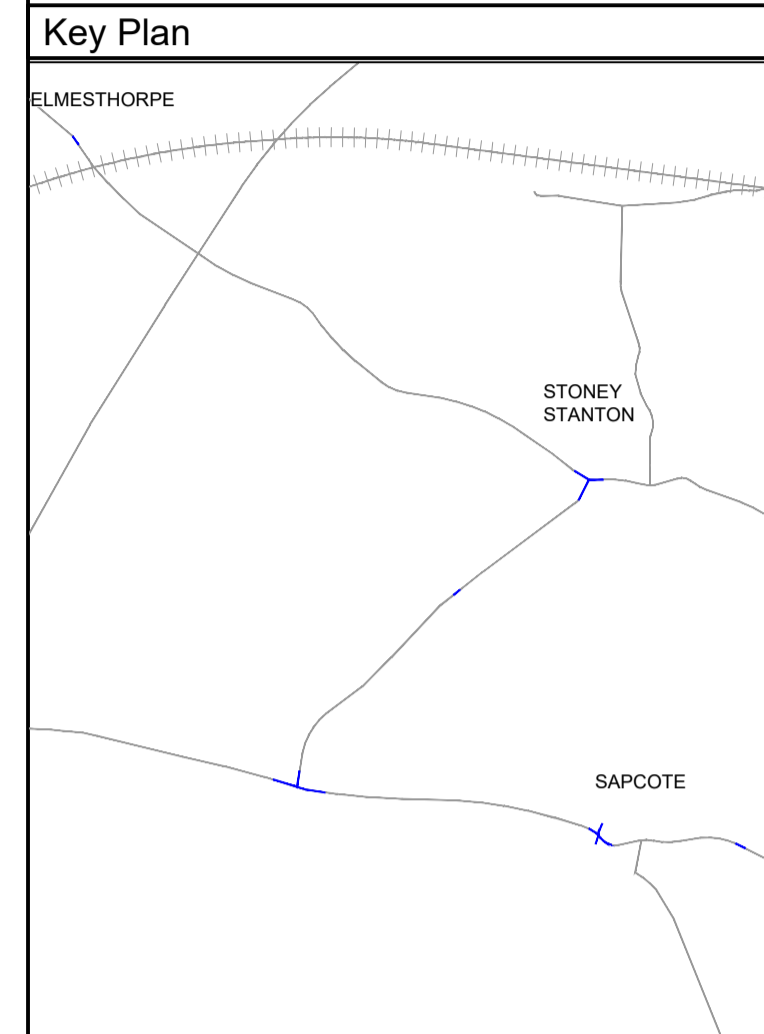

- Legend**
- DCO Land boundary limit
  - LCC Highway Boundary
  - NH Highway Boundary
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)

PO2	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

**Client**

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

**Project Title**


**HINKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

**Drawing Title**


**GENERAL ARRANGEMENT SHEET 16**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	06.11.23
Scale@A1:	1:500	Status:	<b>P02</b>
Drawing Status:	<b>PRELIMINARY</b>		
Project - Originator - Zone - Level - Type - Role - Number	HRF-BWB-HGN-HW16-DR-CH-0100		



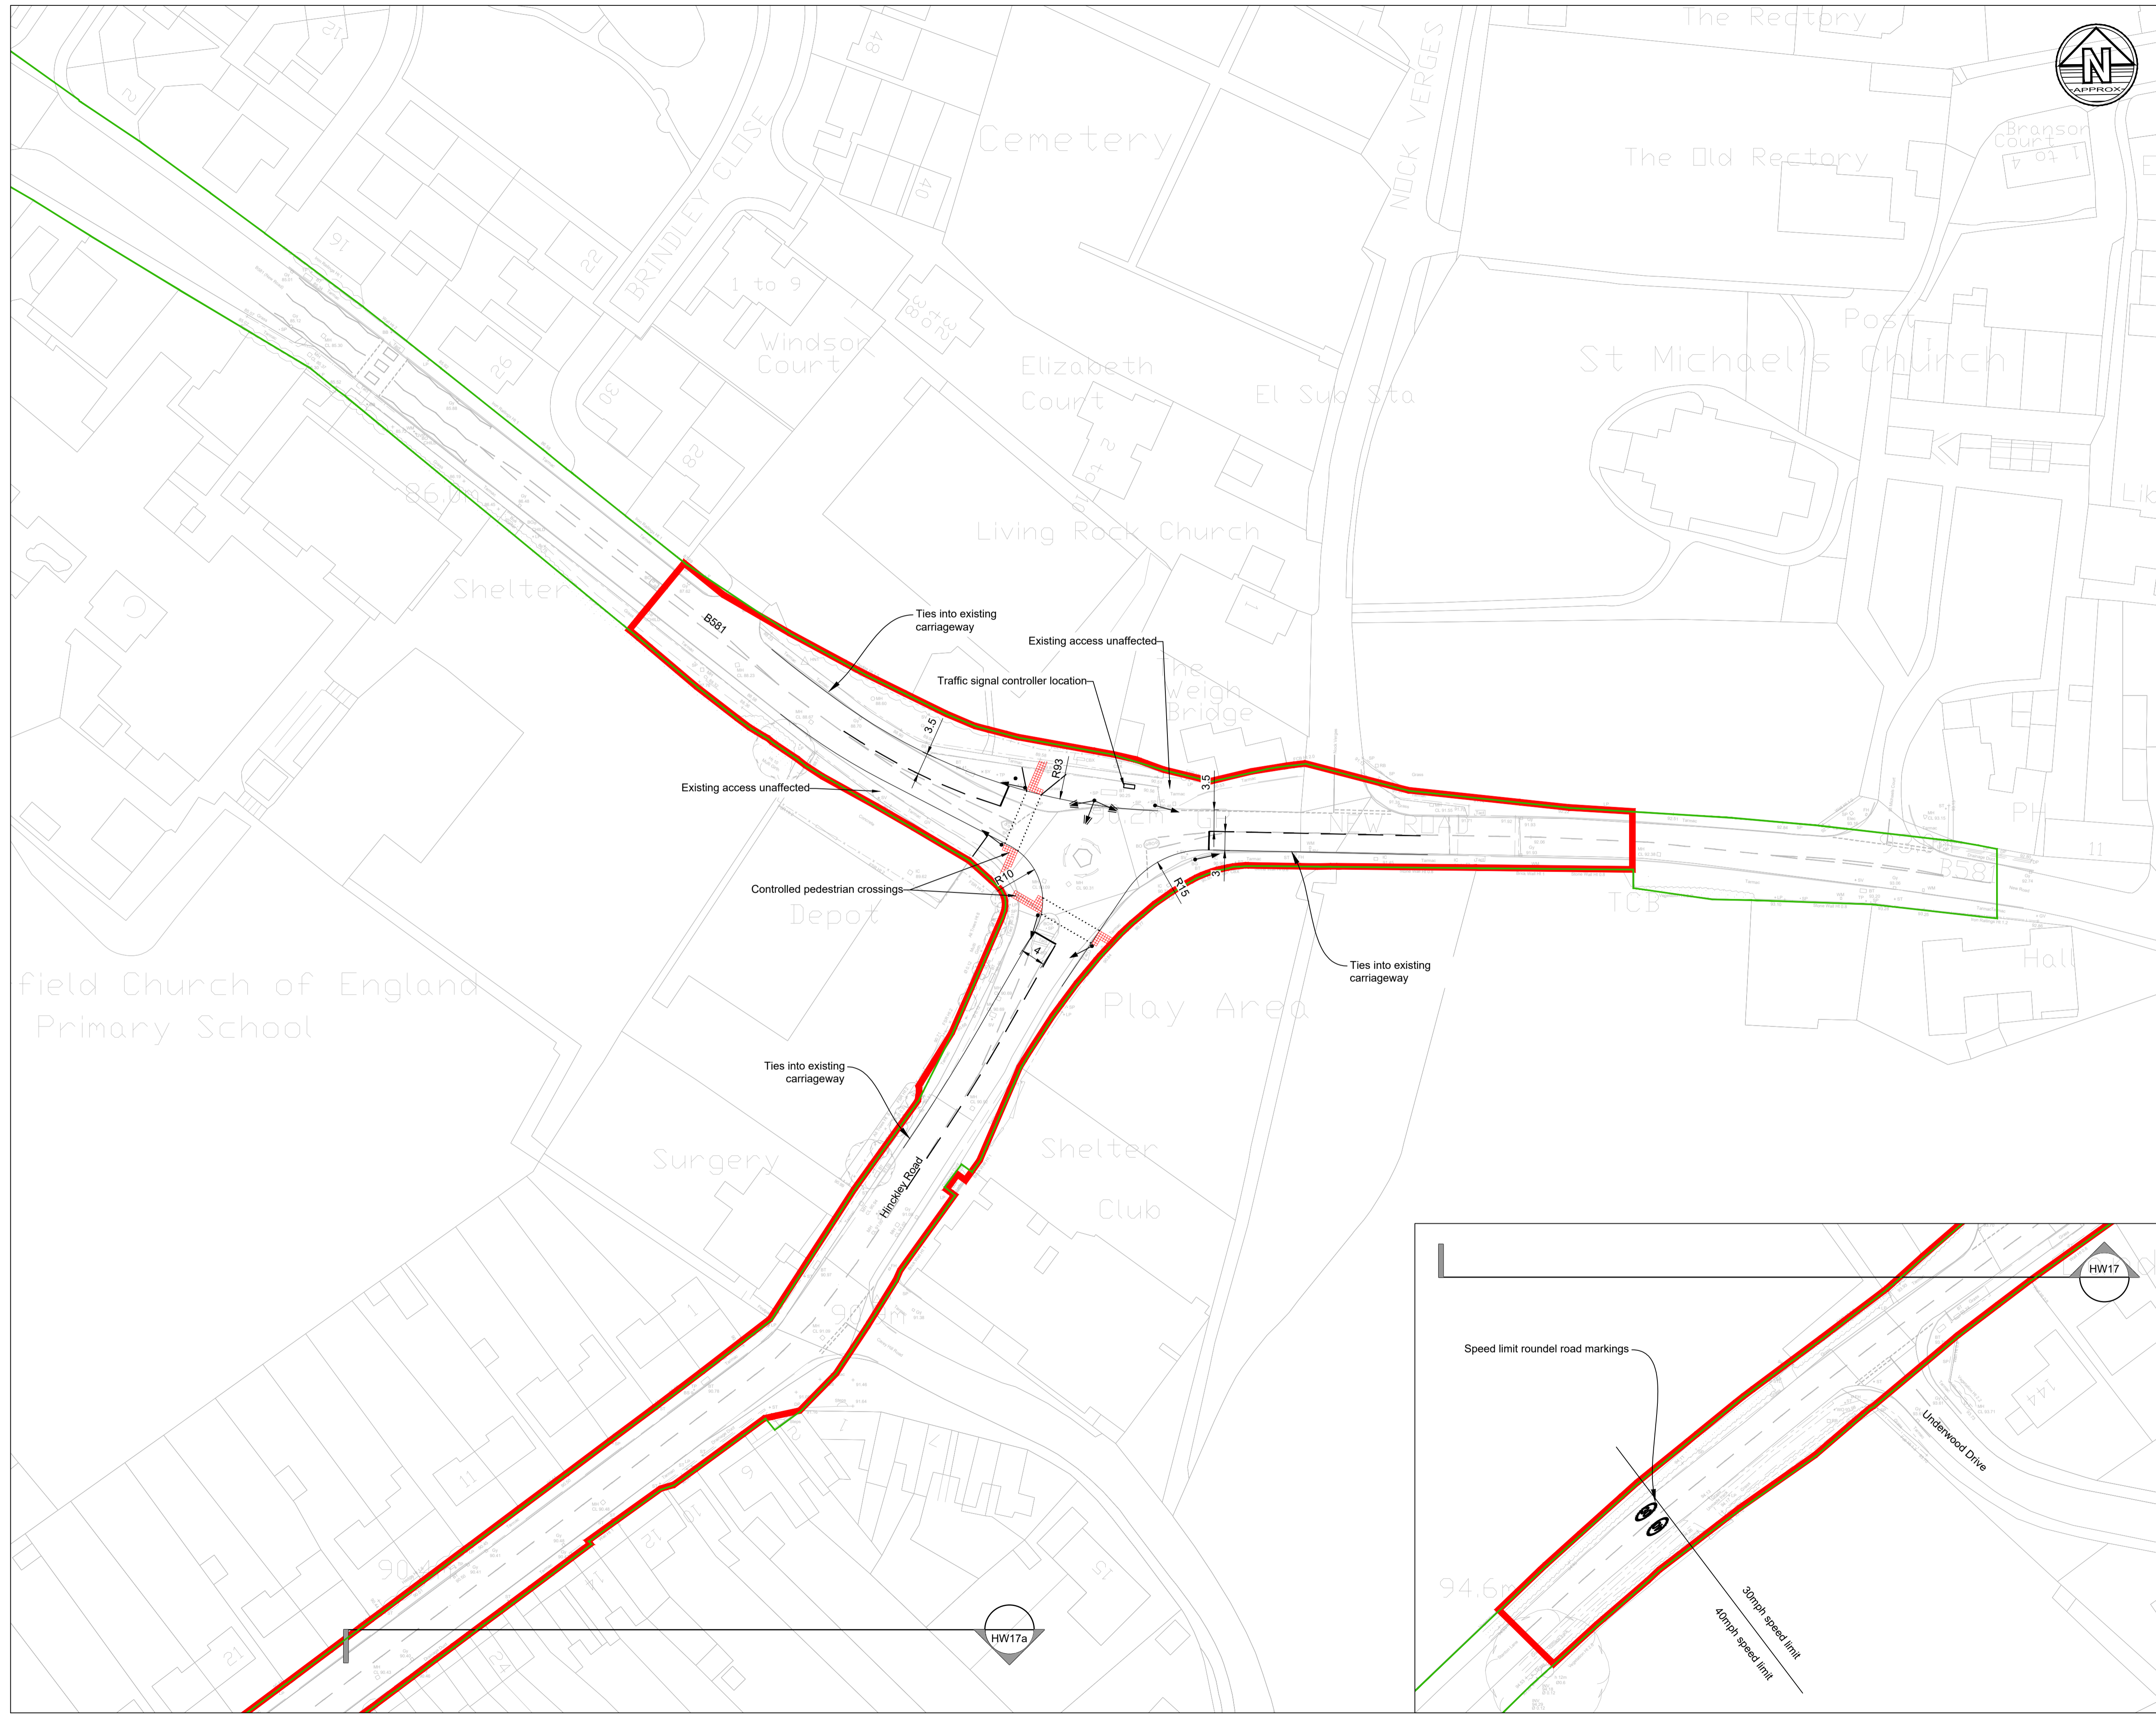

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

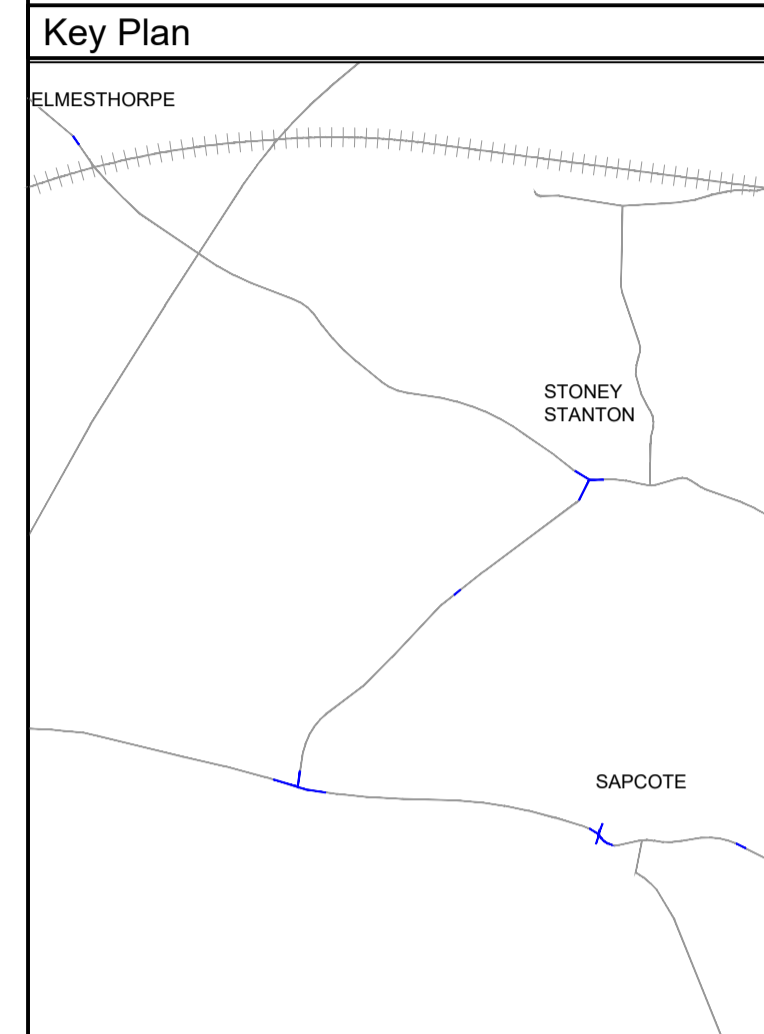

- Legend**
- Development Consent Order Limits
  - LCC Highway Boundary
  - NH Highway Boundary
  - Primary Signal Head
  - Secondary Signal Head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)

P04	04.01.24	Gateway Feature Removed	JM	SC
P03	07.12.23	Updated following LCC meeting	JM	SC
P02	22.11.23	Updated to suit topo survey	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client


**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title  
**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**


Drawing Title  
**GENERAL ARRANGEMENT SHEET 17**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	06.11.23
Scale@A1:	1:500		
<b>PRELIMINARY</b>			
Project - Originator - Zone - Level - Type - Role - Number	Status	Rev	
HRF-BWB-HGN-HW17-DR-CH-0100	S2	P04	



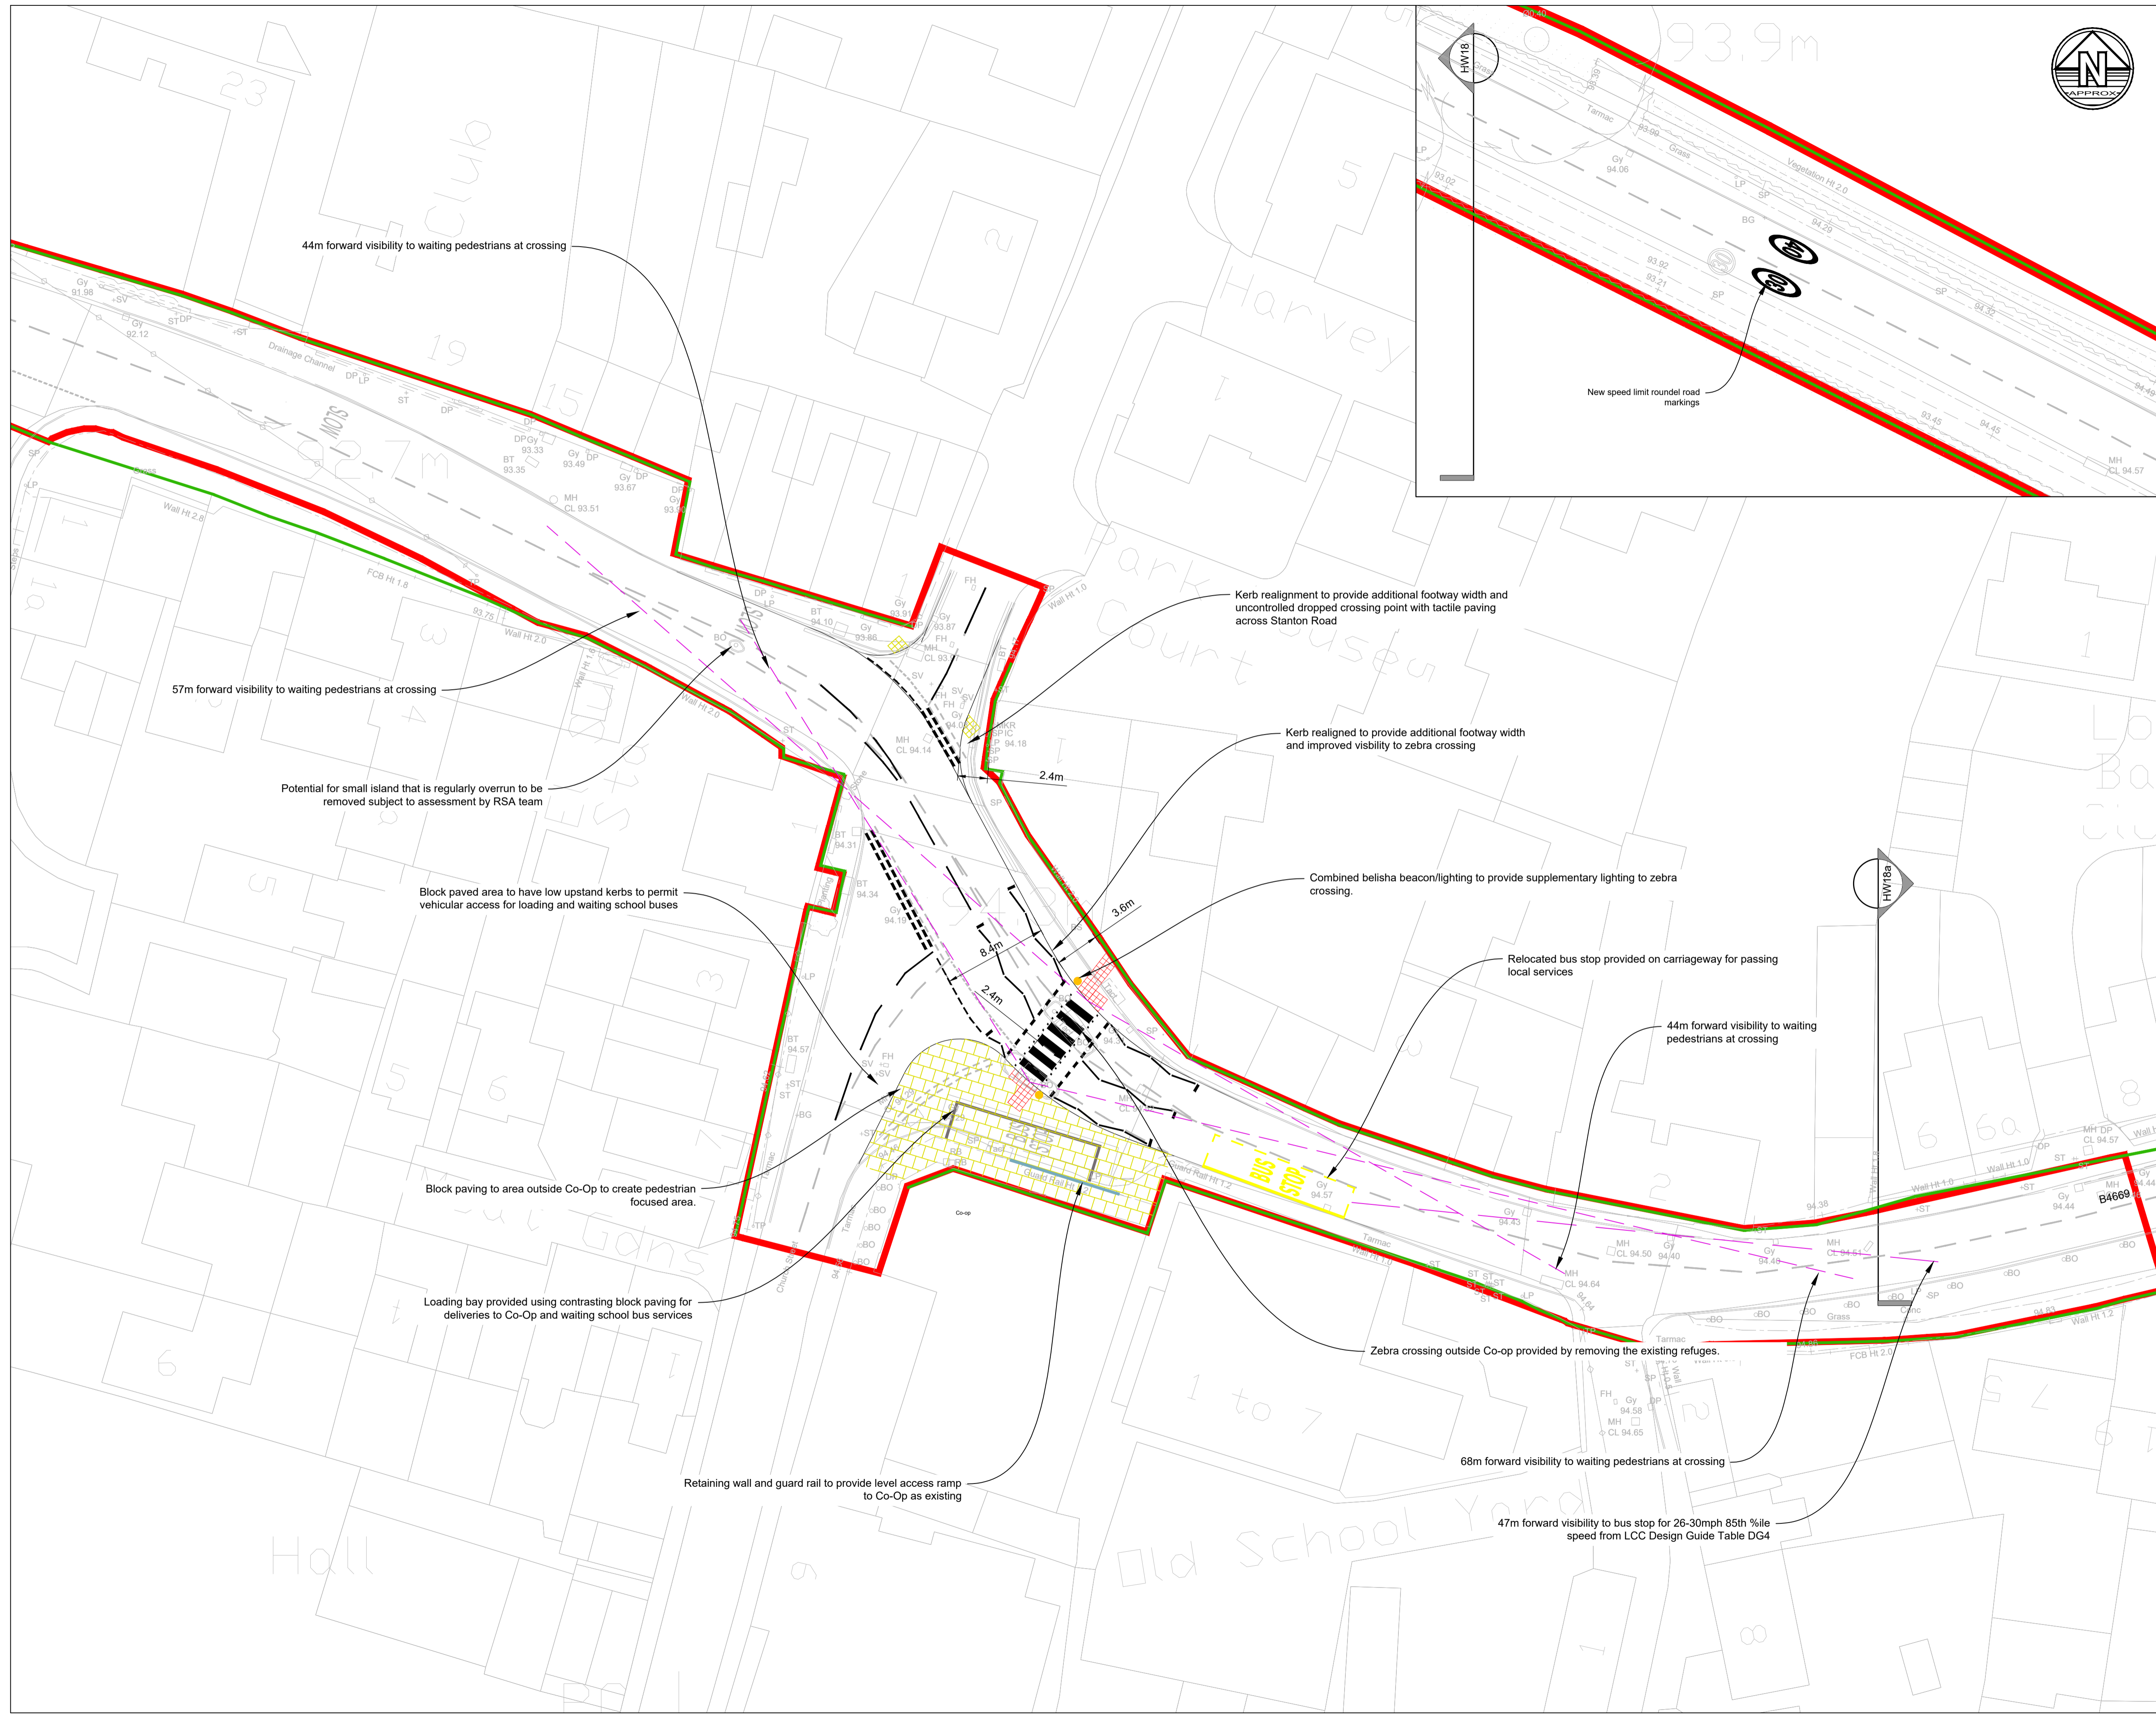

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

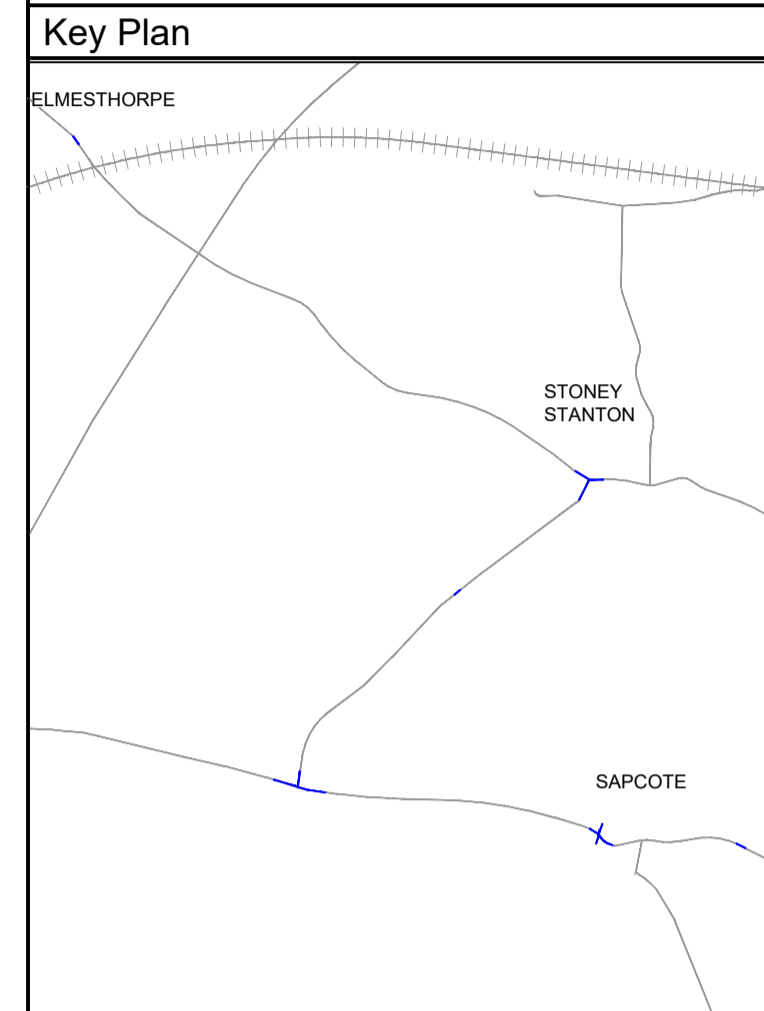

- Legend**
- Development Consent Order Limits
  - LCC Highway Boundary
  - NH Highway Boundary
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)

PO2	04.01.23	Amended to suit topo survey	JM	SC
PO1	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Dw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

Birmingham | 0121 233 3322  
 Leeds | 0113 233 8000  
 London | 020 7407 3879  
 Manchester | 0161 233 4260  
 Nottingham | 0115 924 1100  
[www.bwbconsulting.com](http://www.bwbconsulting.com)

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title


**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title


**GENERAL ARRANGEMENT SHEET 18**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	06.11.23
Scale@A1:	1:250	Status:	<b>P02</b>
Drawing Status:	<b>PRELIMINARY</b>		
Project - Originator - Zone - Level - Type - Role - Number	HRF-BWB-HGN-HW18-DR-CH-0100		



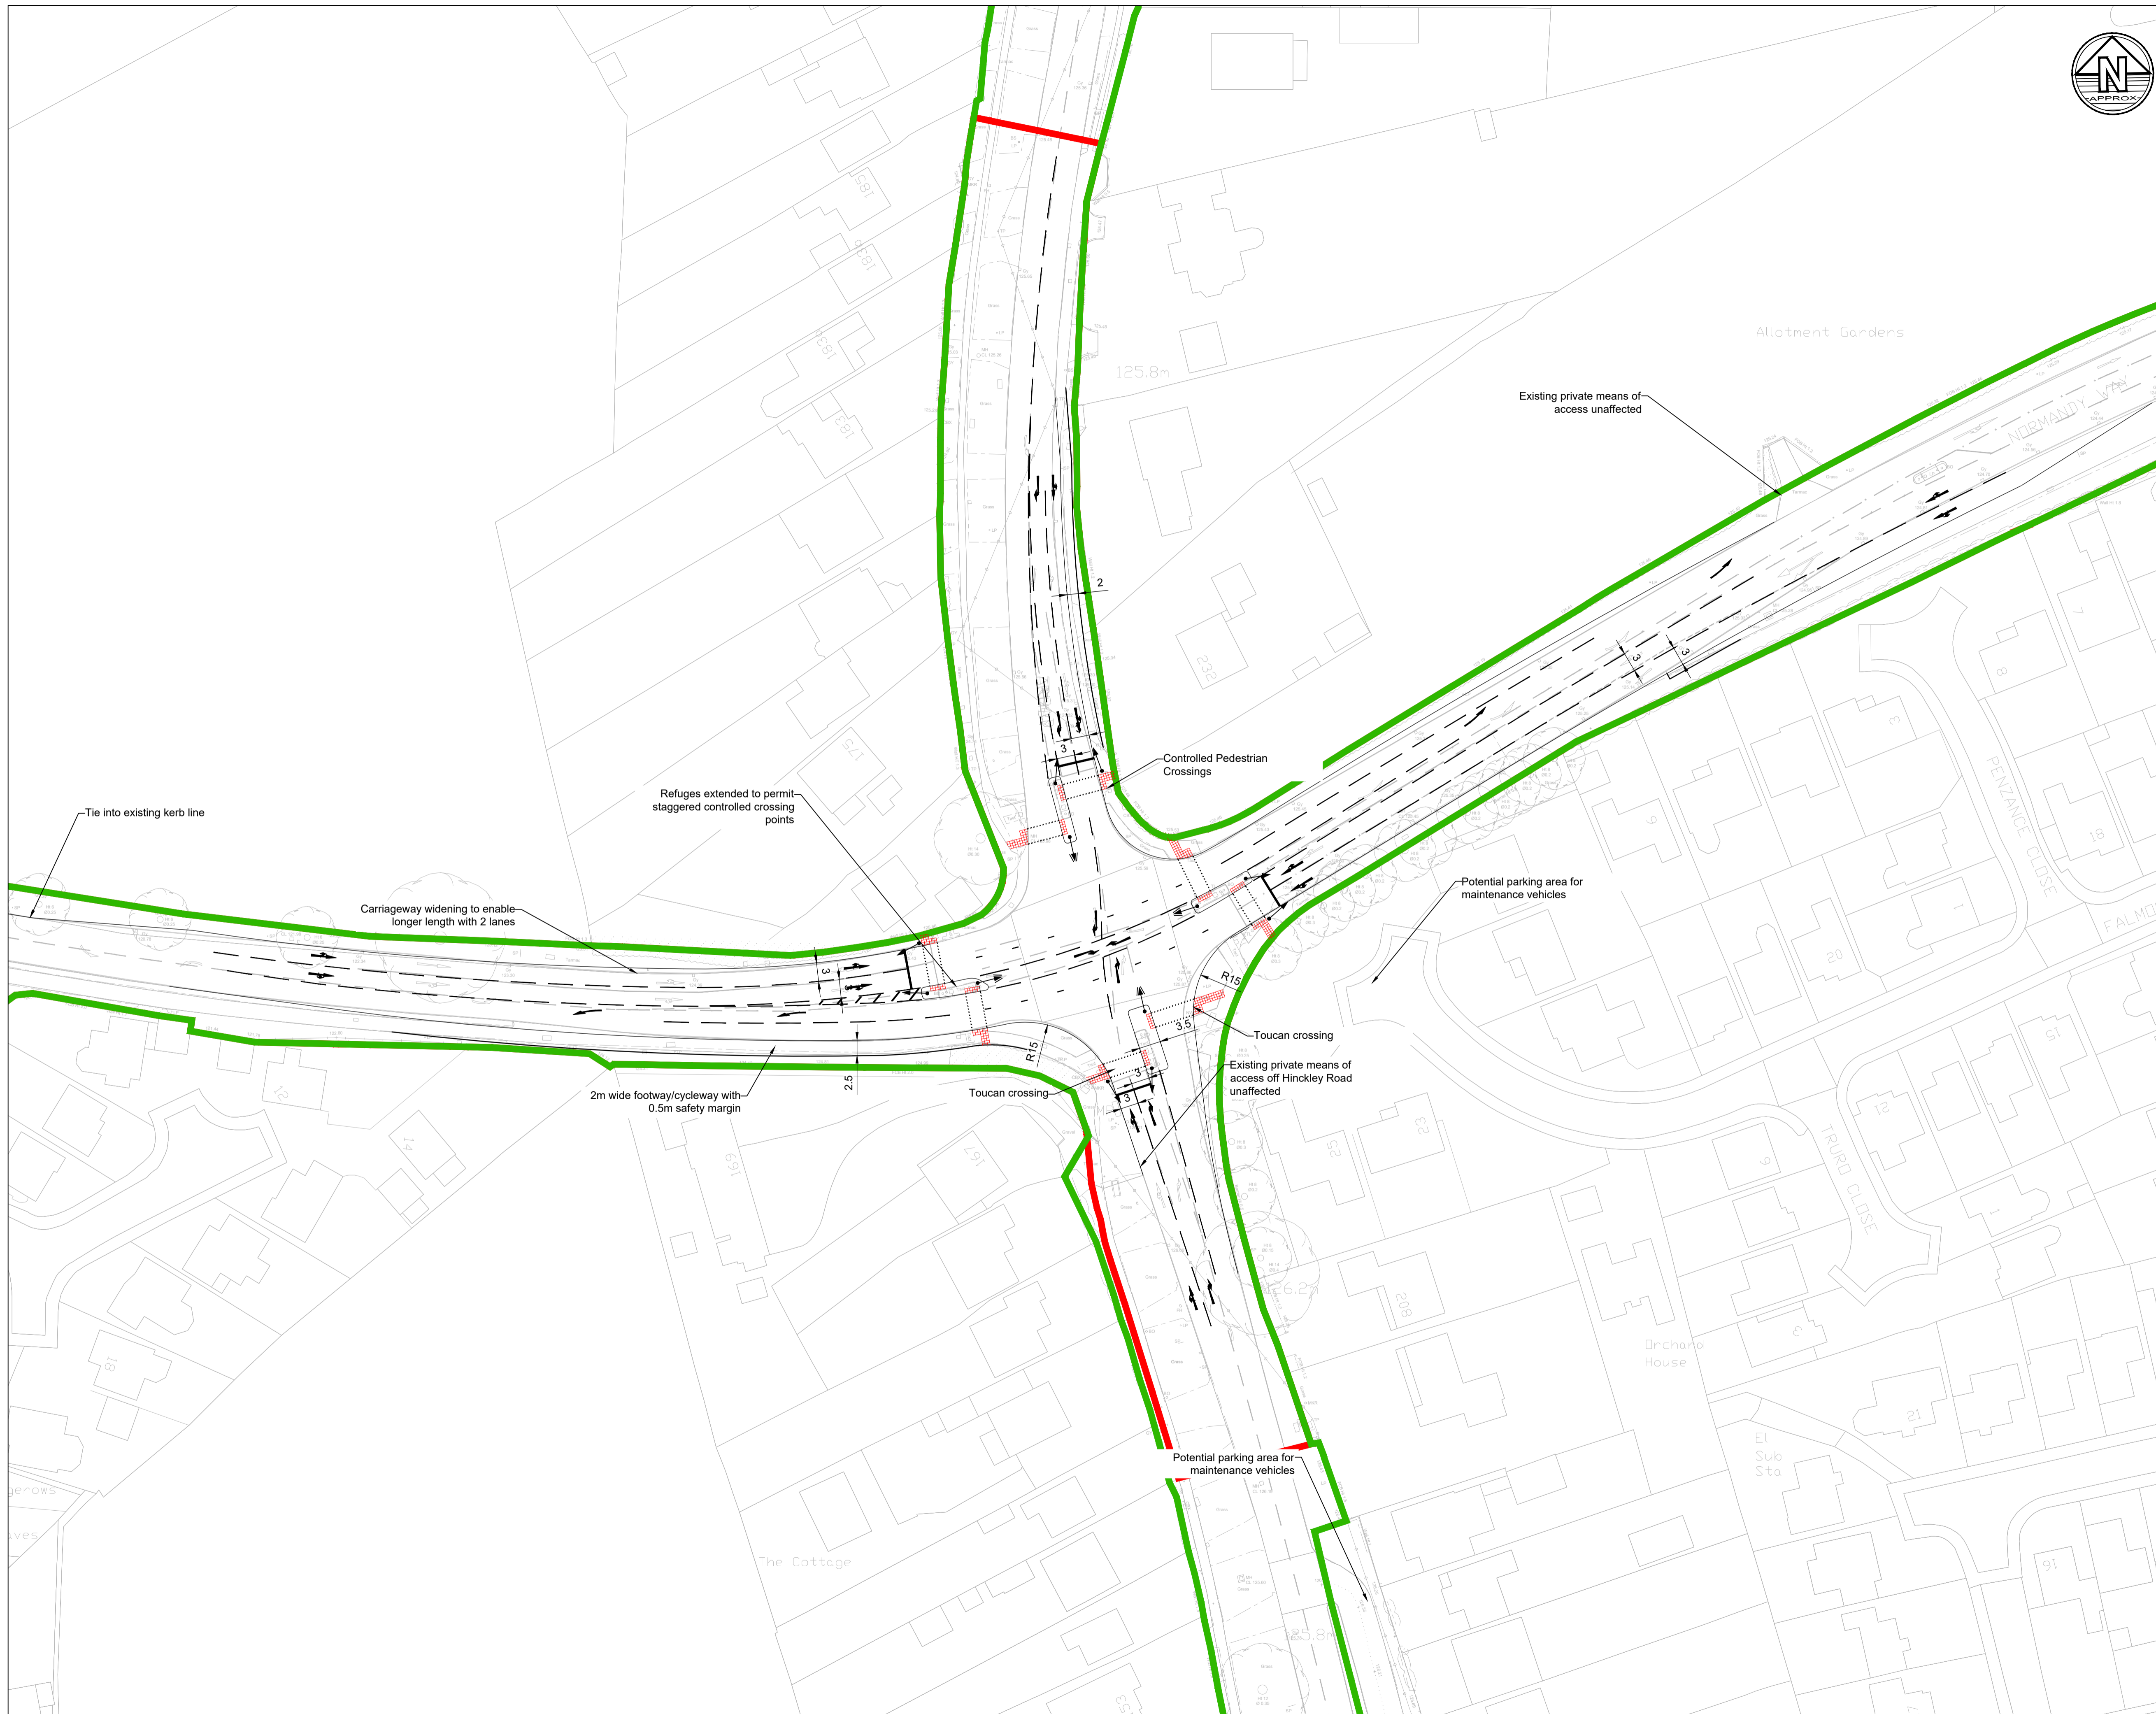

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

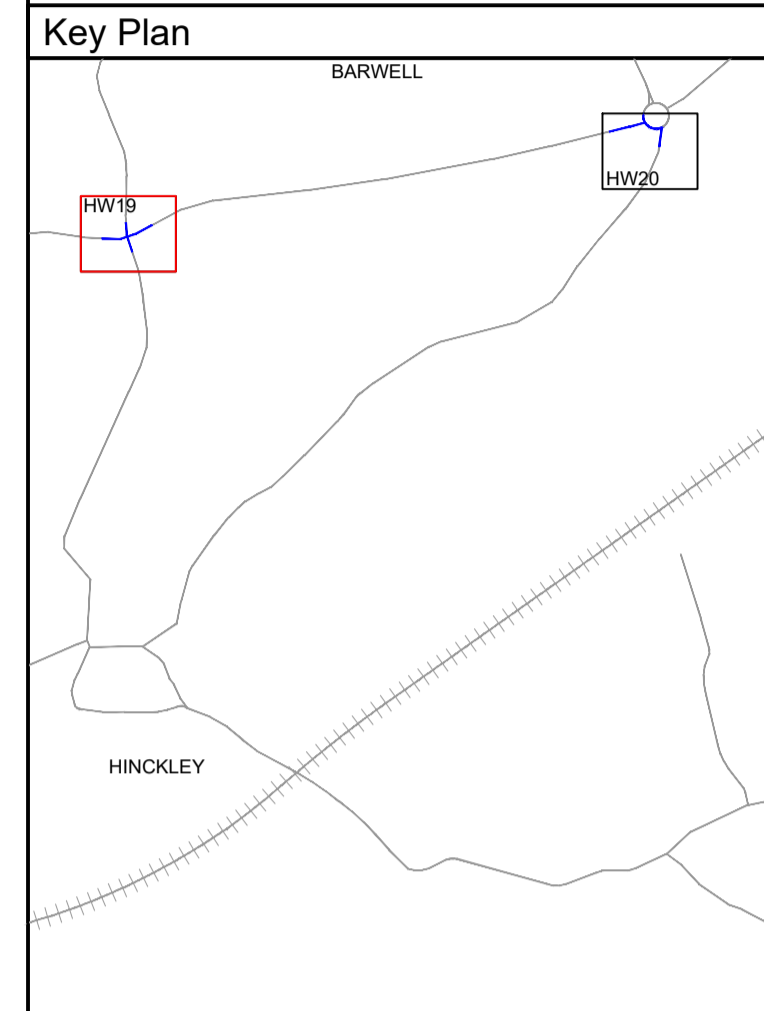

- Legend**
- DCO Land boundary limit
  - LCC Highway Boundary
  - NH Highway Boundary
  - Primary Signal Head
  - Secondary Signal Head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)

Rev	Date	Details of issue / revision	Drw	Rev
P03	14.12.23	Maintenance areas labelled	JM	SC
P02	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title


**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title

**GENERAL ARRANGEMENT SHEET 19**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2815	Date:	06.11.23
Scale@A1:	1:500	Status	<b>PRELIMINARY</b>
Project - Originator - Zone - Level - Type - Role - Number	HRF-BWB-HGN-HW19-DR-CH-0100	Status	<b>S2</b>
Rev	<b>P03</b>		




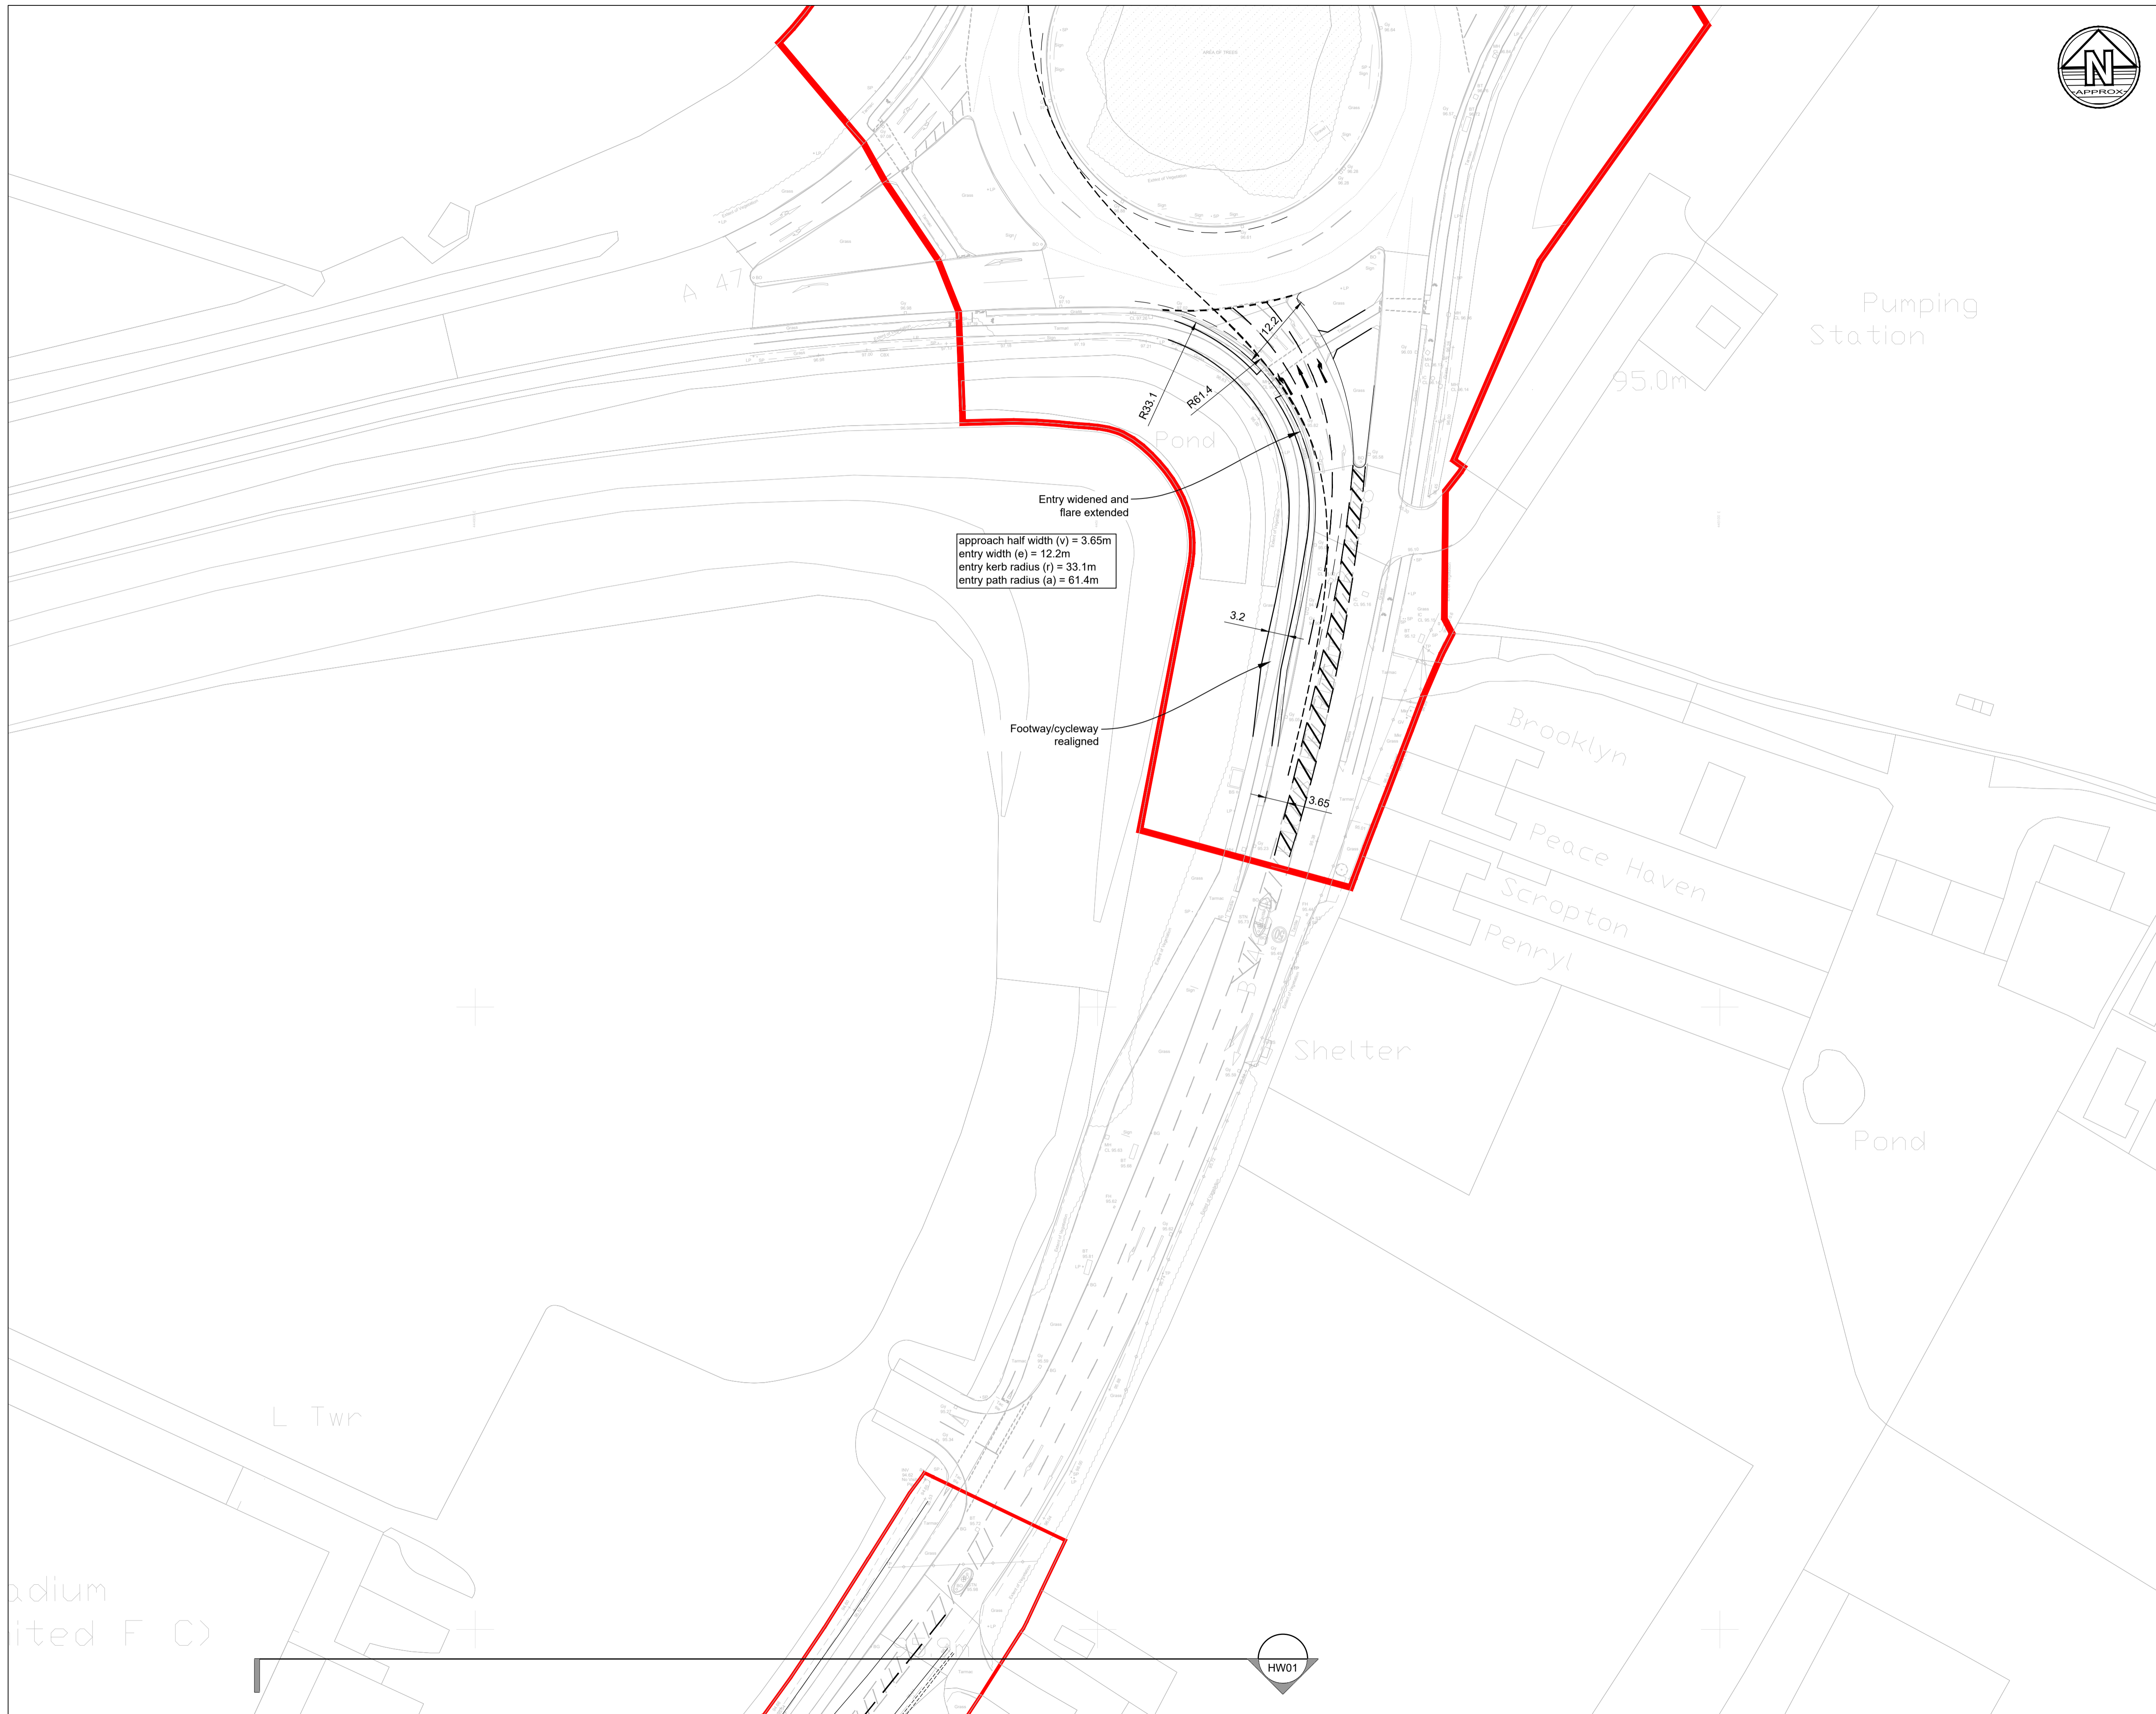

**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
6. All works must be carried out to the requirements of the overseeing organisation.

**Key Plan**

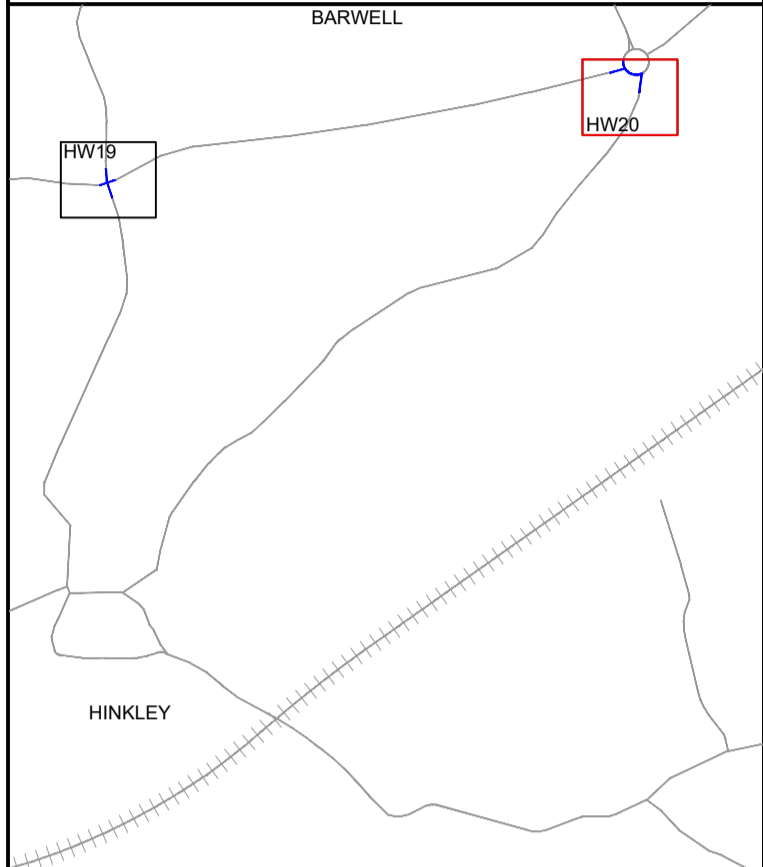

**Legend**

- DCO Land boundary limit
- Primary Signal Head
- Secondary Signal head
- Noise fence
- Earthwork extents
- Footway Type - Tactile paving in Red (R)
- Footway Type - Tactile paving in Buff (B)

P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

**HINKLEY NATIONAL RAIL FREIGHT INTERCHANGE**


**GENERAL ARRANGEMENT SHEET 20**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	06.11.23
Scale@A1:	1:500		

**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW20-DR-CH-0100	S2	P01




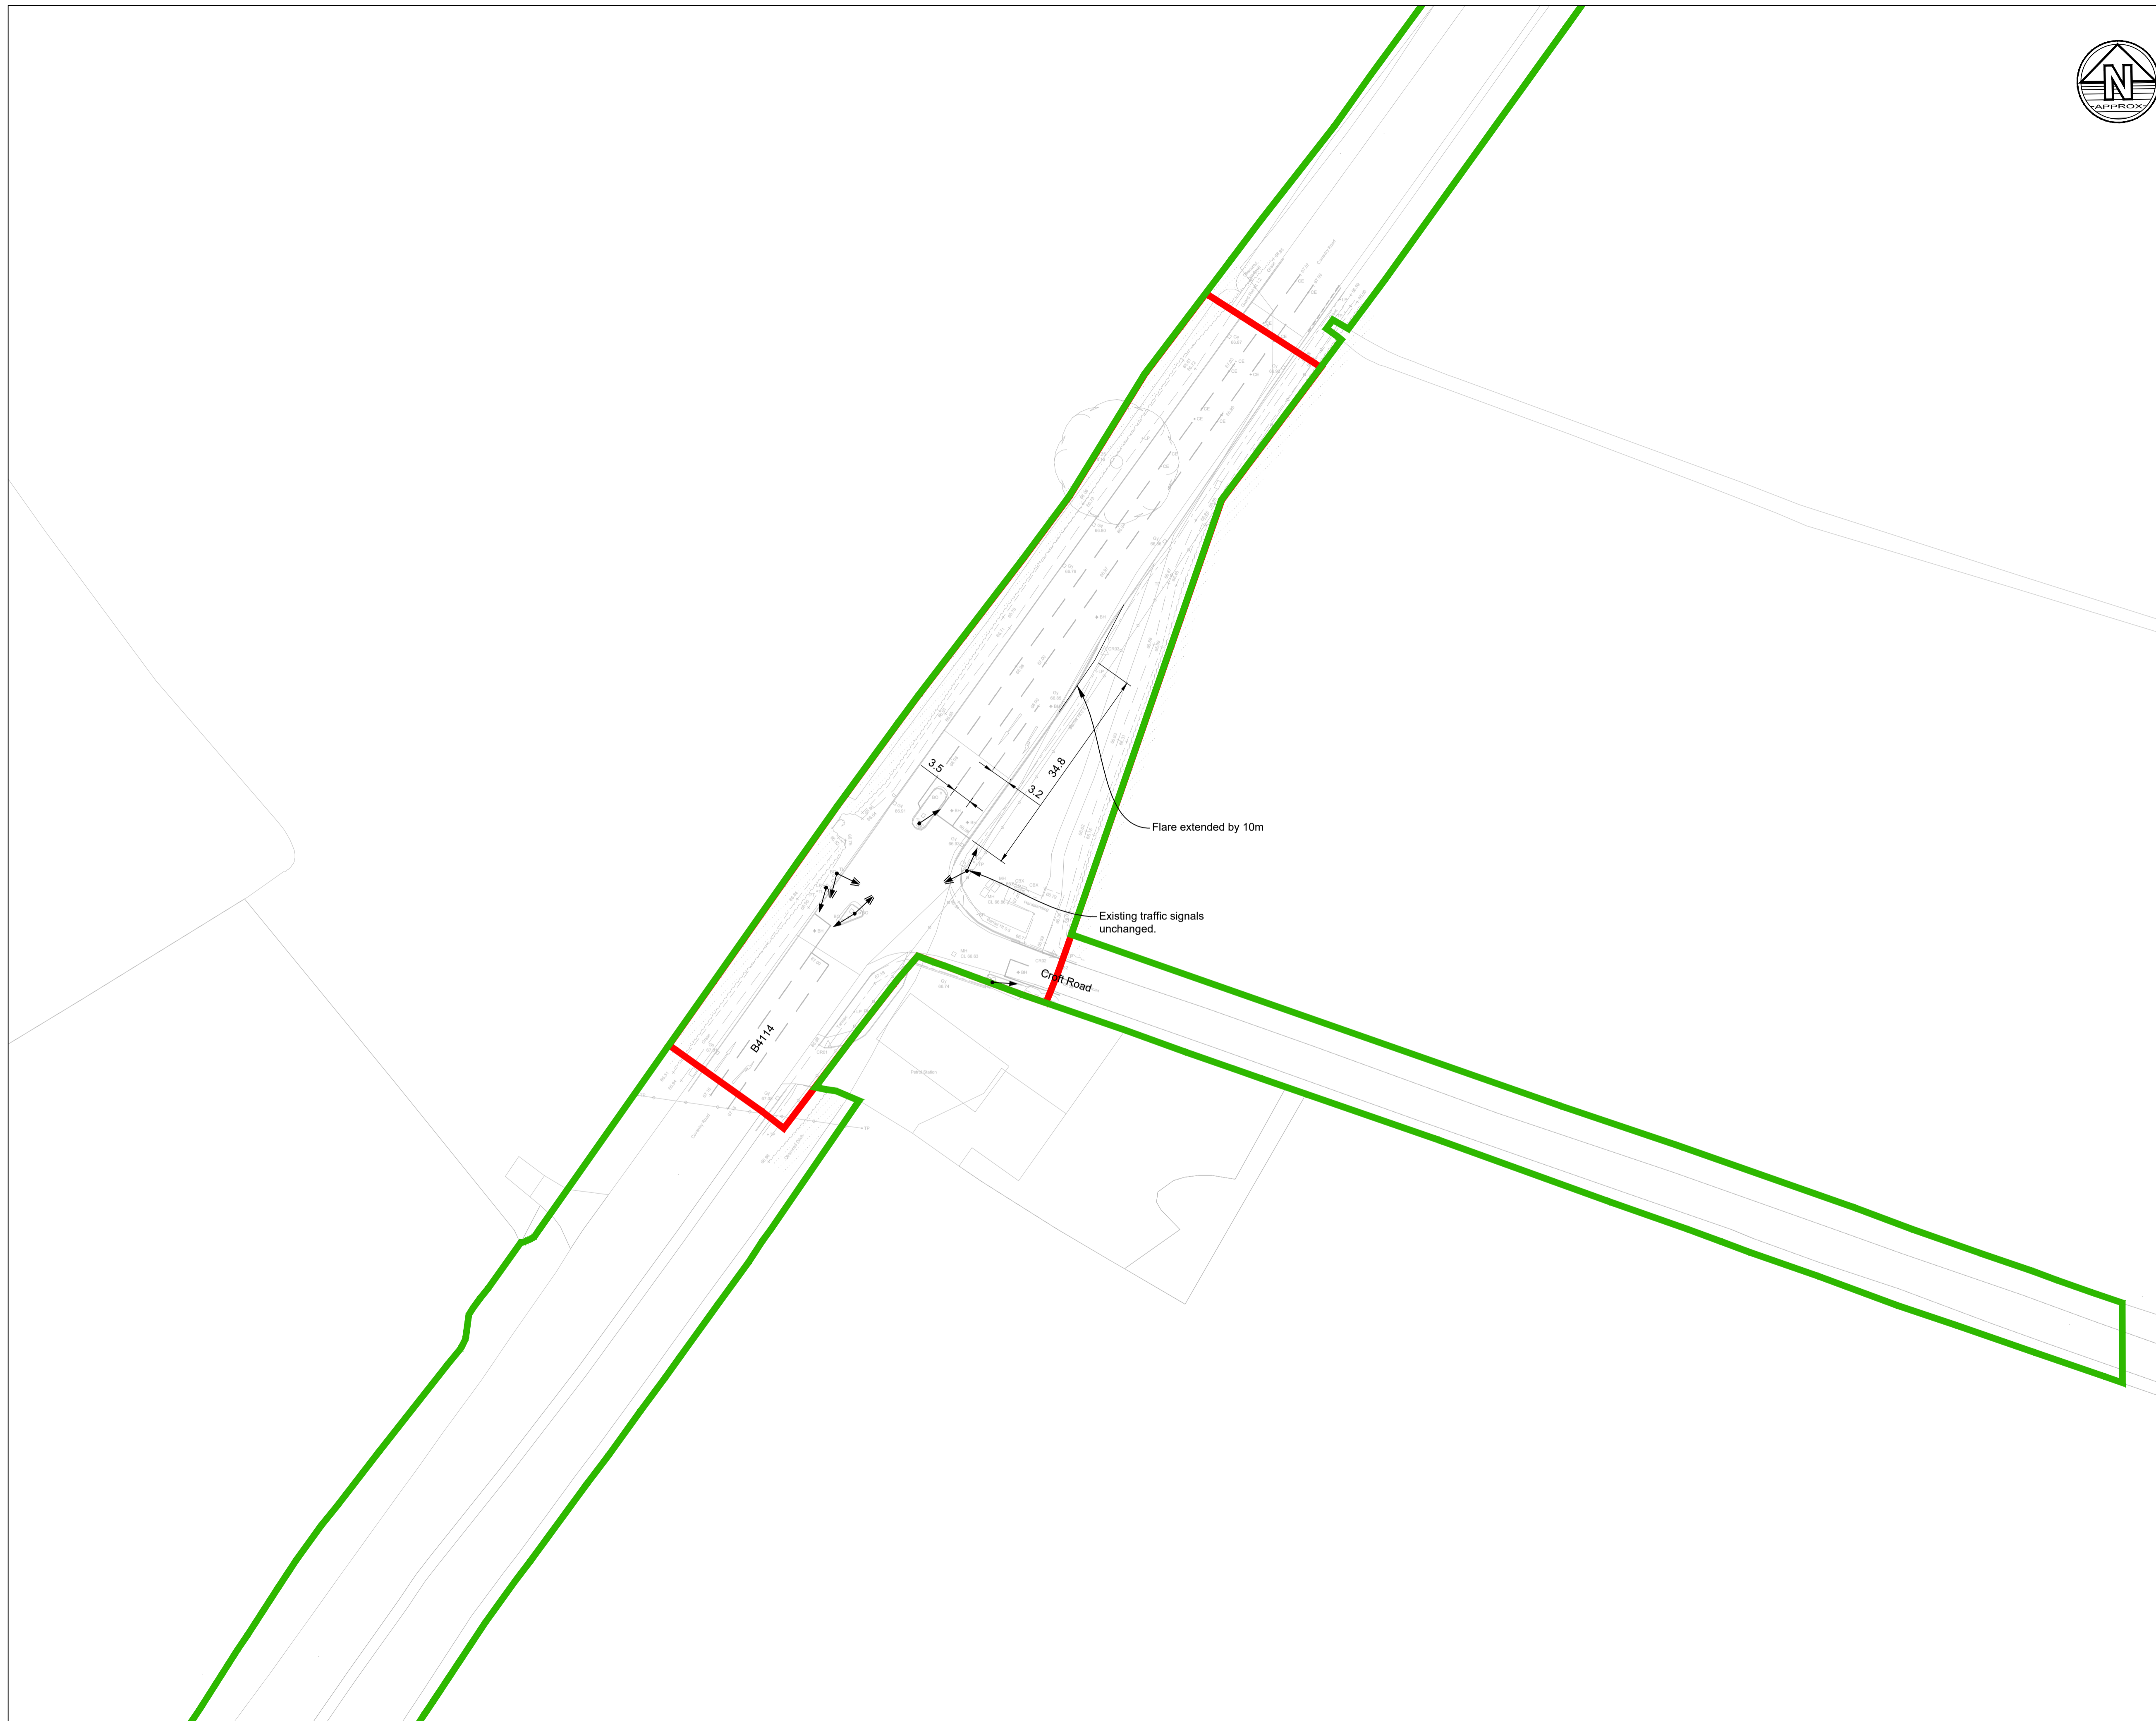

Notes

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appedices
6. All works must be carried out to the requirements of the overseeing organisation.

Key Plan

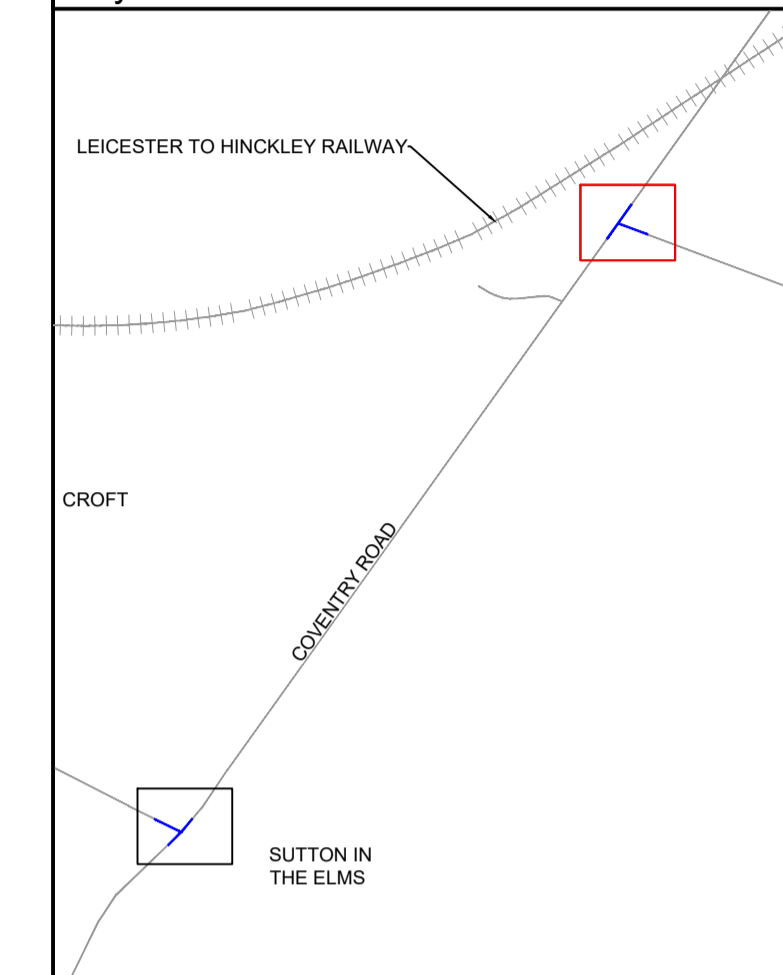

Legend

- DCO Land boundary limit
- LCC Highway Boundary
- NH Highway Boundary
- Primary Signal Head
- Secondary Signal head
- Noise fence
- Earthwork extents
- Footway Type - Tactile paving in Red (R)
- Footway Type - Tactile paving in Buff (B)

P02	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

Issues & Revisions

**BWB** A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title

**HINCKLEY NATIONAL RAIL  
FREIGHT INTERCHANGE**

Drawing Title

**GENERAL ARRANGEMENT  
SHEET 21**

Drawn:	J.Manifold	Reviewed:	S.Carter
--------	------------	-----------	----------

BWB Ref:	NTT2814	Date:	06.11.23	Scale@A1:	1:500
----------	---------	-------	----------	-----------	-------

Drawing Status

**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW21-DR-CH-0100	S2	P02






Notes

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately
5. For further details on specific areas of works, see the relevant SHW series drawings and appedices
6. All works must be carried out to the requirements of the overseeing organisation.

Legend

- Development Consent Order Limits
- LCC Highway Boundary
- NH Highway Boundary
- Primary Signal Head
- Secondary Signal head
- Noise fence
- Earthwork extents
- ▤ Footway Type - Tactile paving in Red (R)
- ▤ Footway Type - Tactile paving in Buff (B)

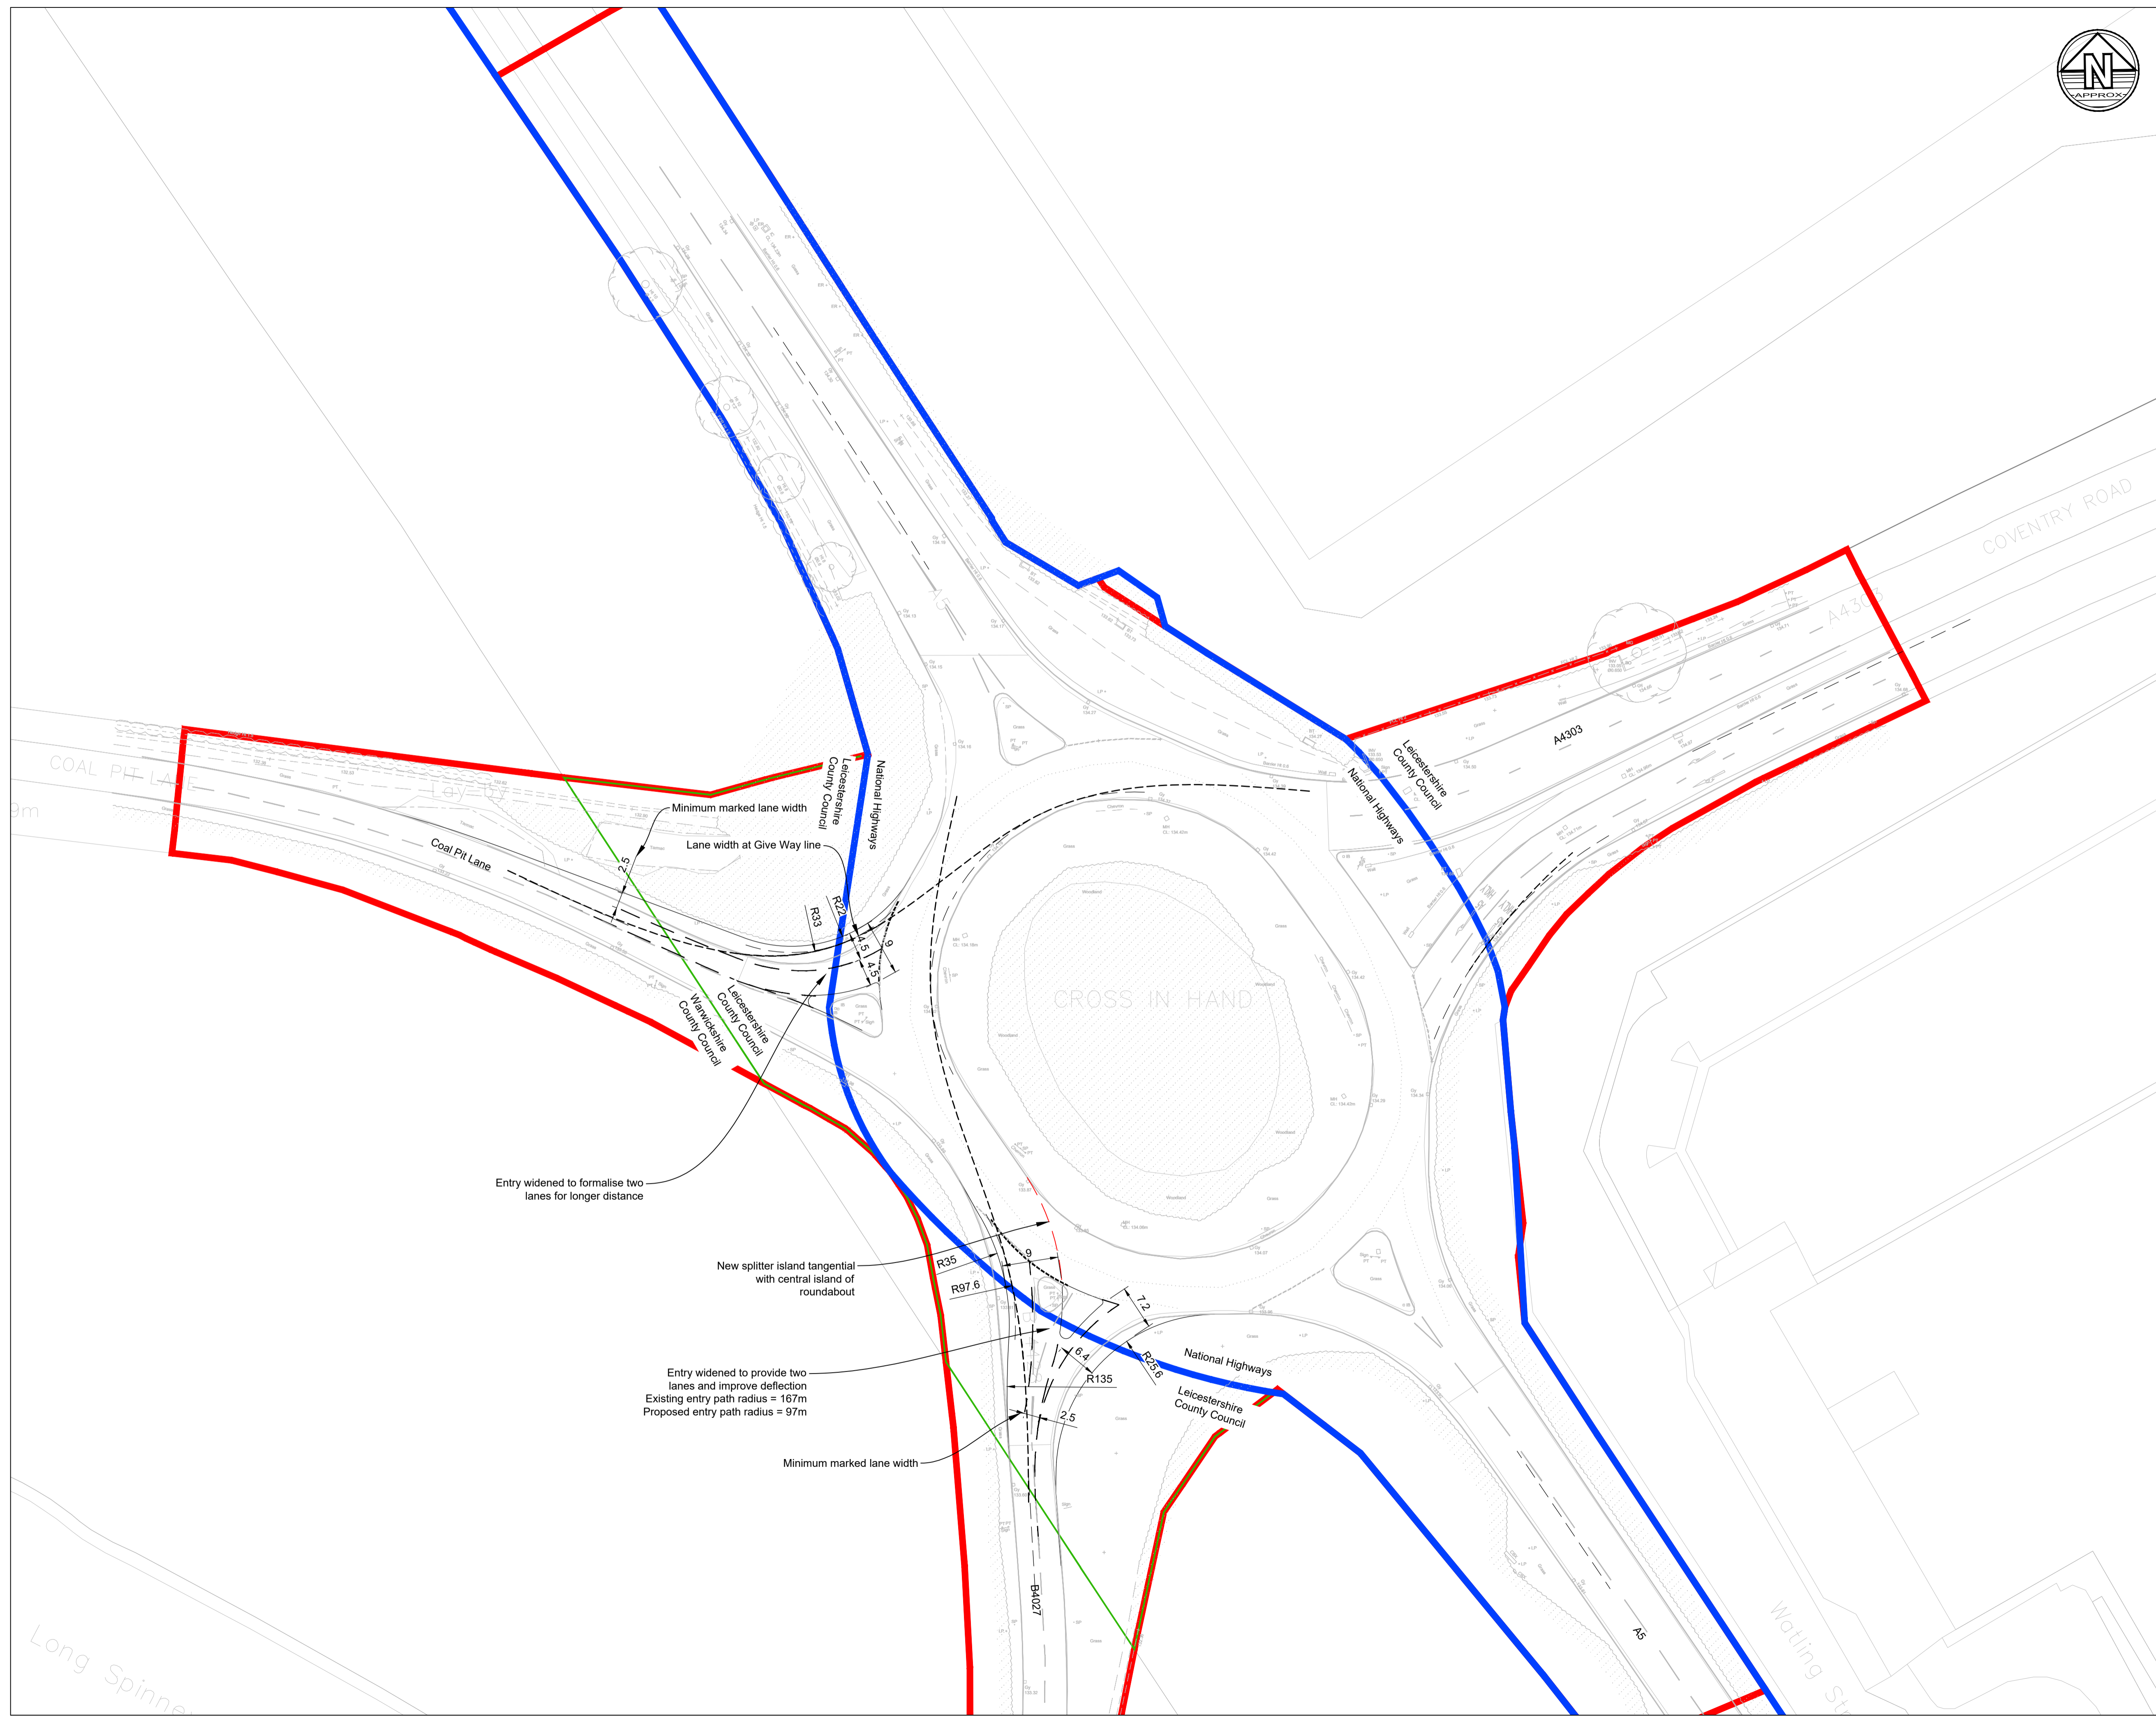

P03	09.02.24	Extents of mitigation amended.	JM	SC
P02	07.12.23	Updated following LCC meeting	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

Issues & Revisions

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title

**HINKLEY NATIONAL RAIL  
FREIGHT INTERCHANGE**

Drawing Title

**GENERAL ARRANGEMENT  
SHEET 22**

Drawn:	J.Manifold	Reviewed:	S.Carter
--------	------------	-----------	----------


BWB Ref:	NTT2814	Date:	06.11.23	Scale@A1:	1:500
----------	---------	-------	----------	-----------	-------

Drawing Status


**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW22-DR-CH-0100	S2	P03



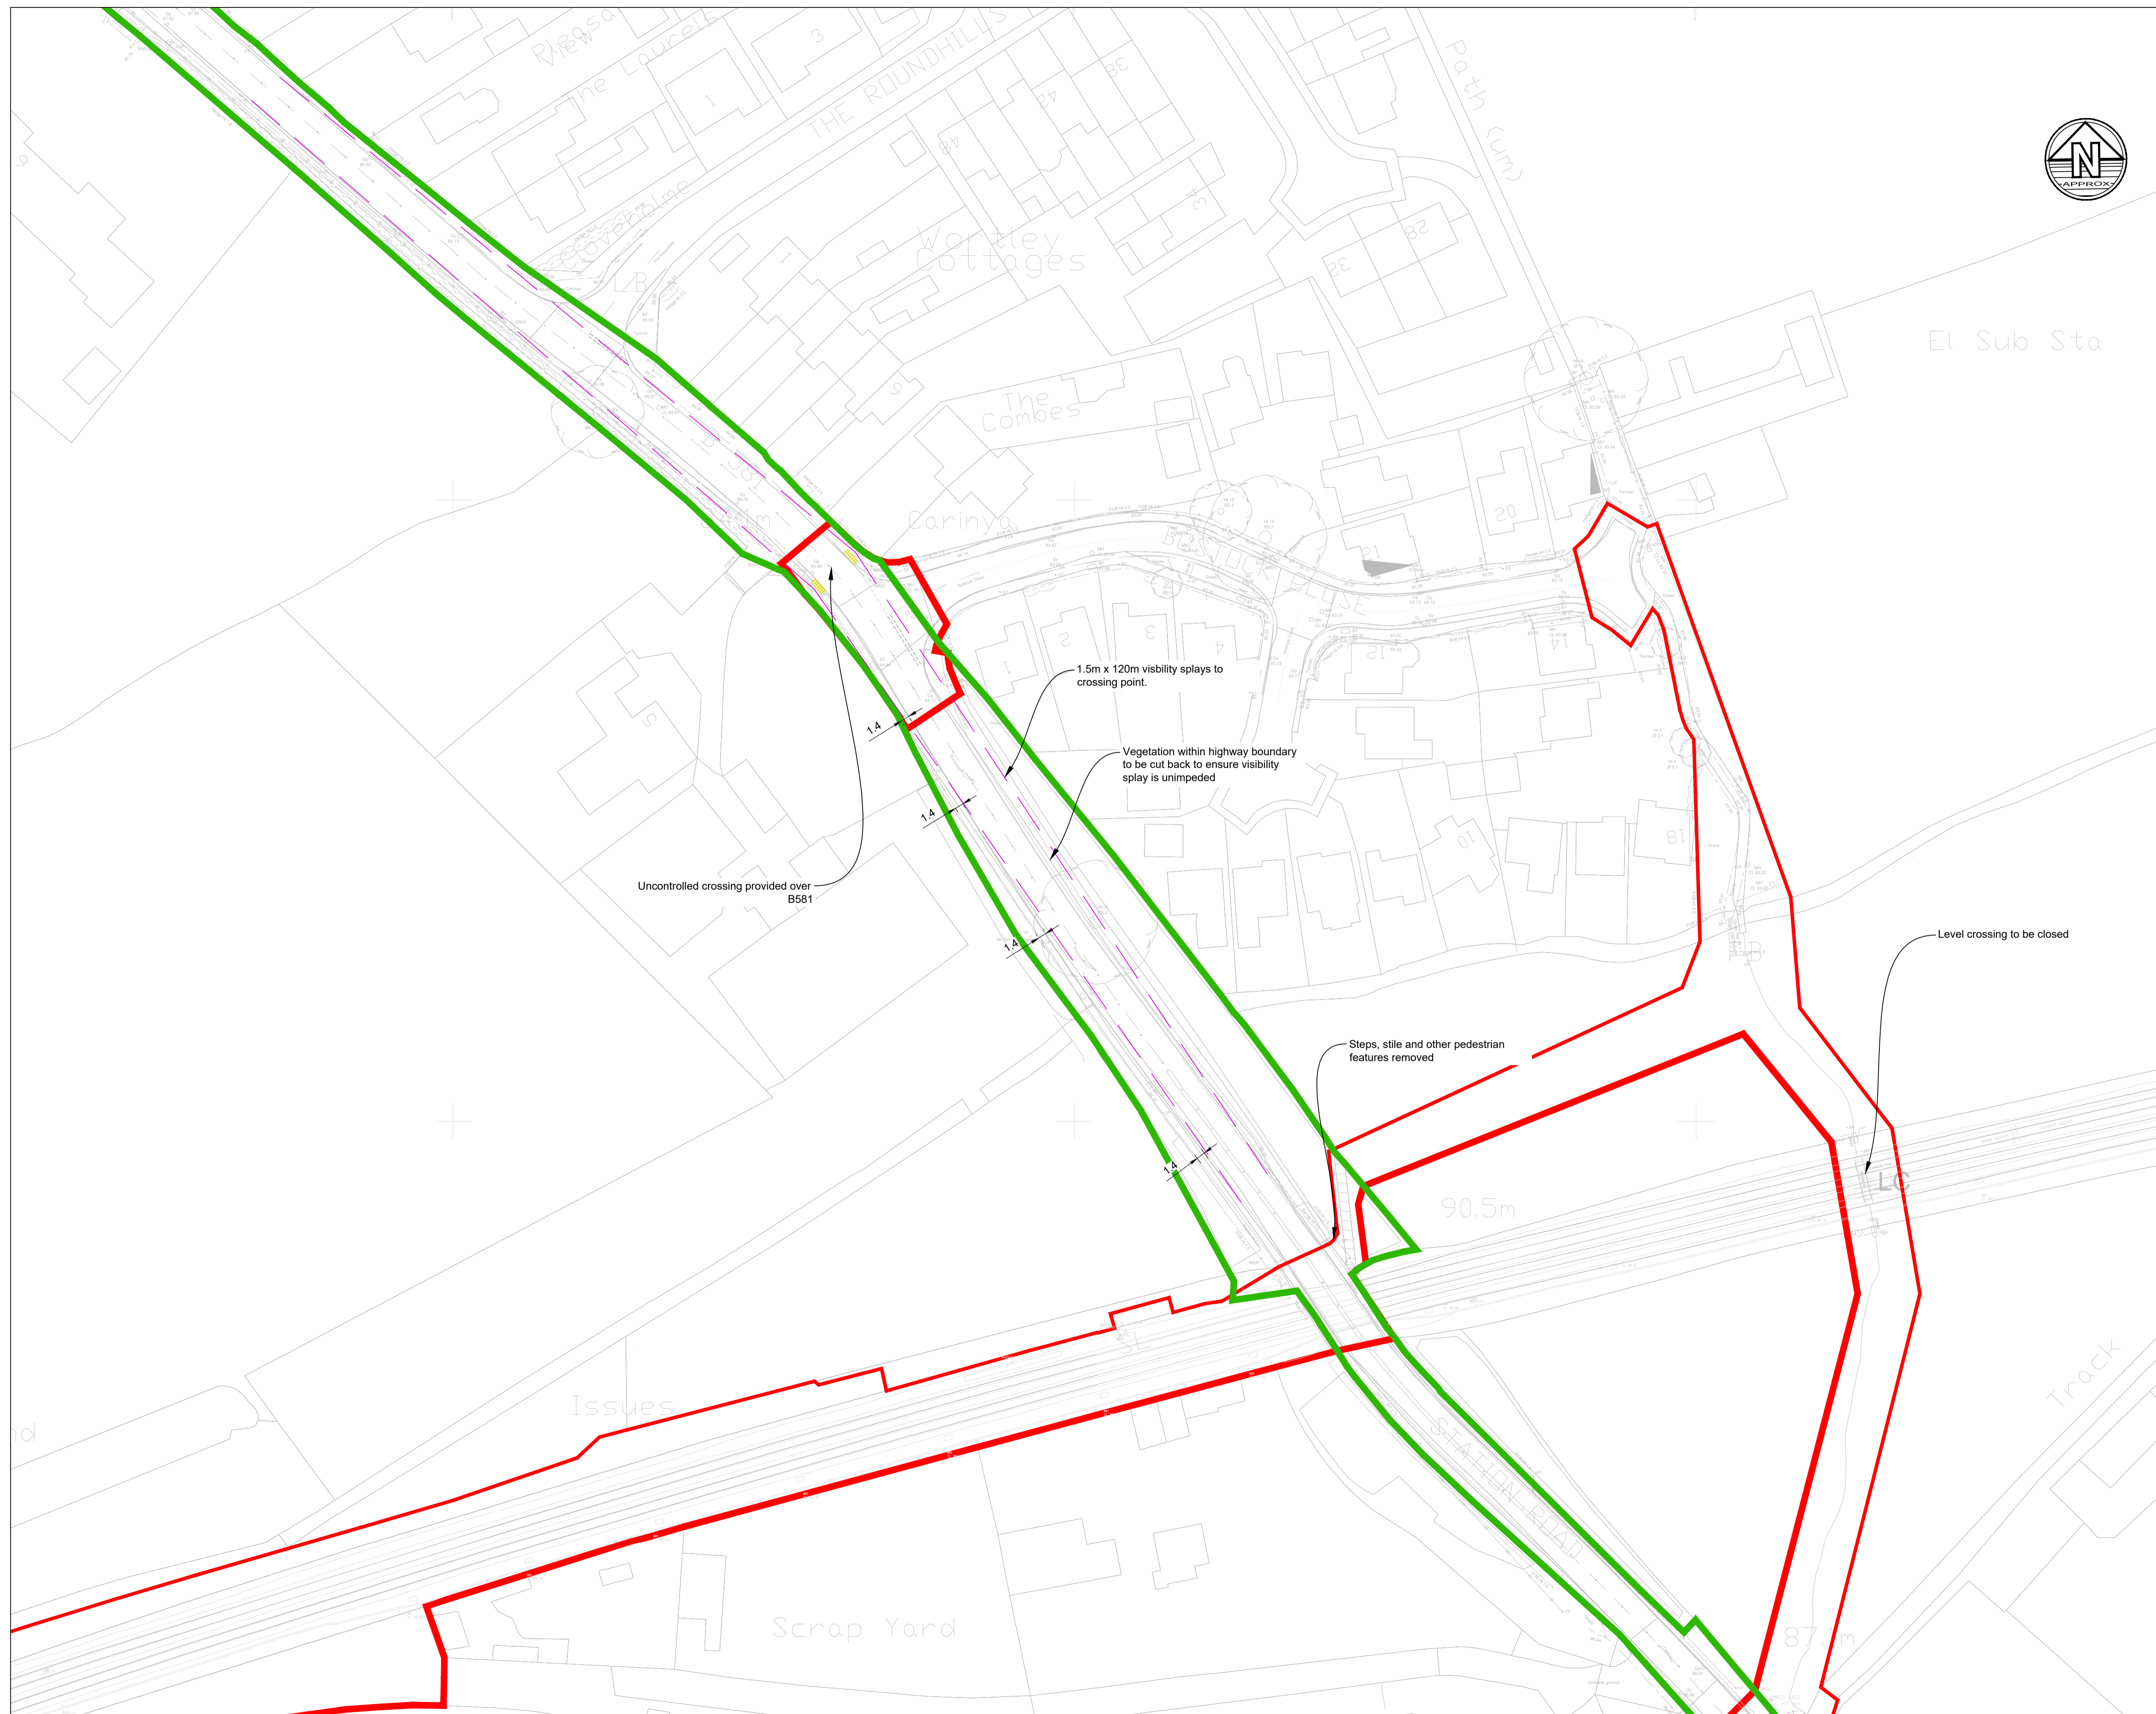

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appendices
  6. All works must be carried out to the requirements of the overseeing organisation.

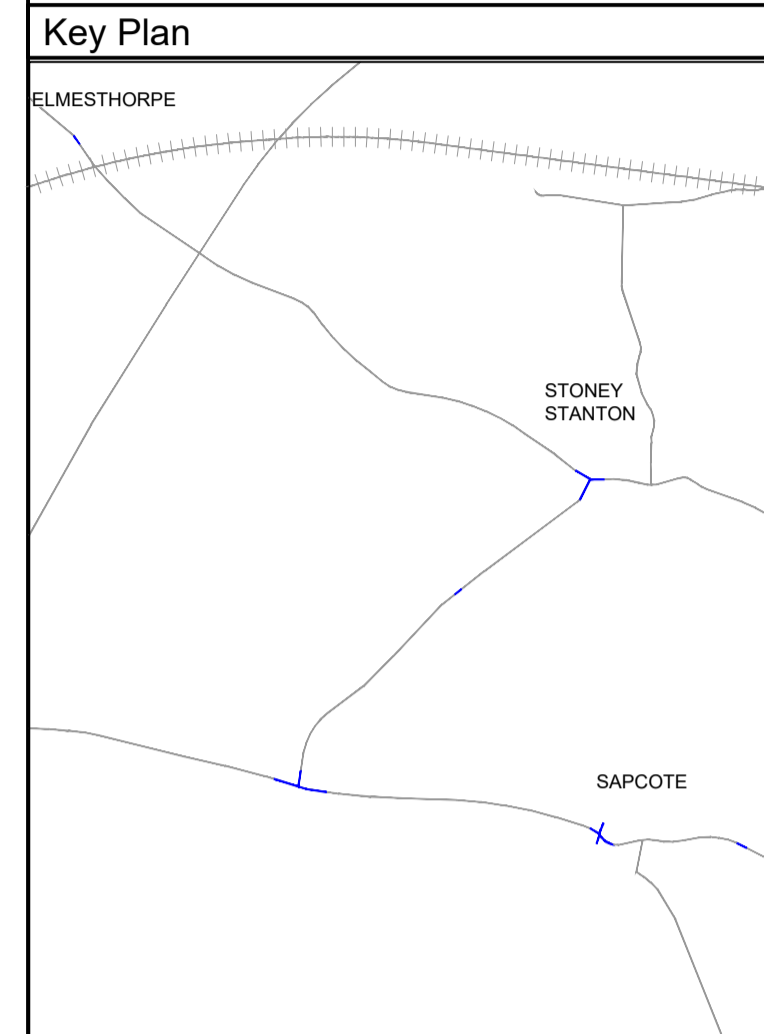

- Legend**
- DCO Land boundary limit
  - LCC Highway Boundary
  - NH Highway Boundary
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)

P02	07.12.23	Crossing point relocated following RSA1	JM	SC
P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title


**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title


**GENERAL ARRANGEMENT SHEET 23**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	06.11.23
Scale@A1:	1:500	Status:	S2
Drawing Status:	<b>PRELIMINARY</b>	Rev:	P02
Project - Originator - Zone - Level - Type - Role - Number	HRF-BWB-HGN-HW23-DR-CH-0100	Status	S2
Rev	P02		



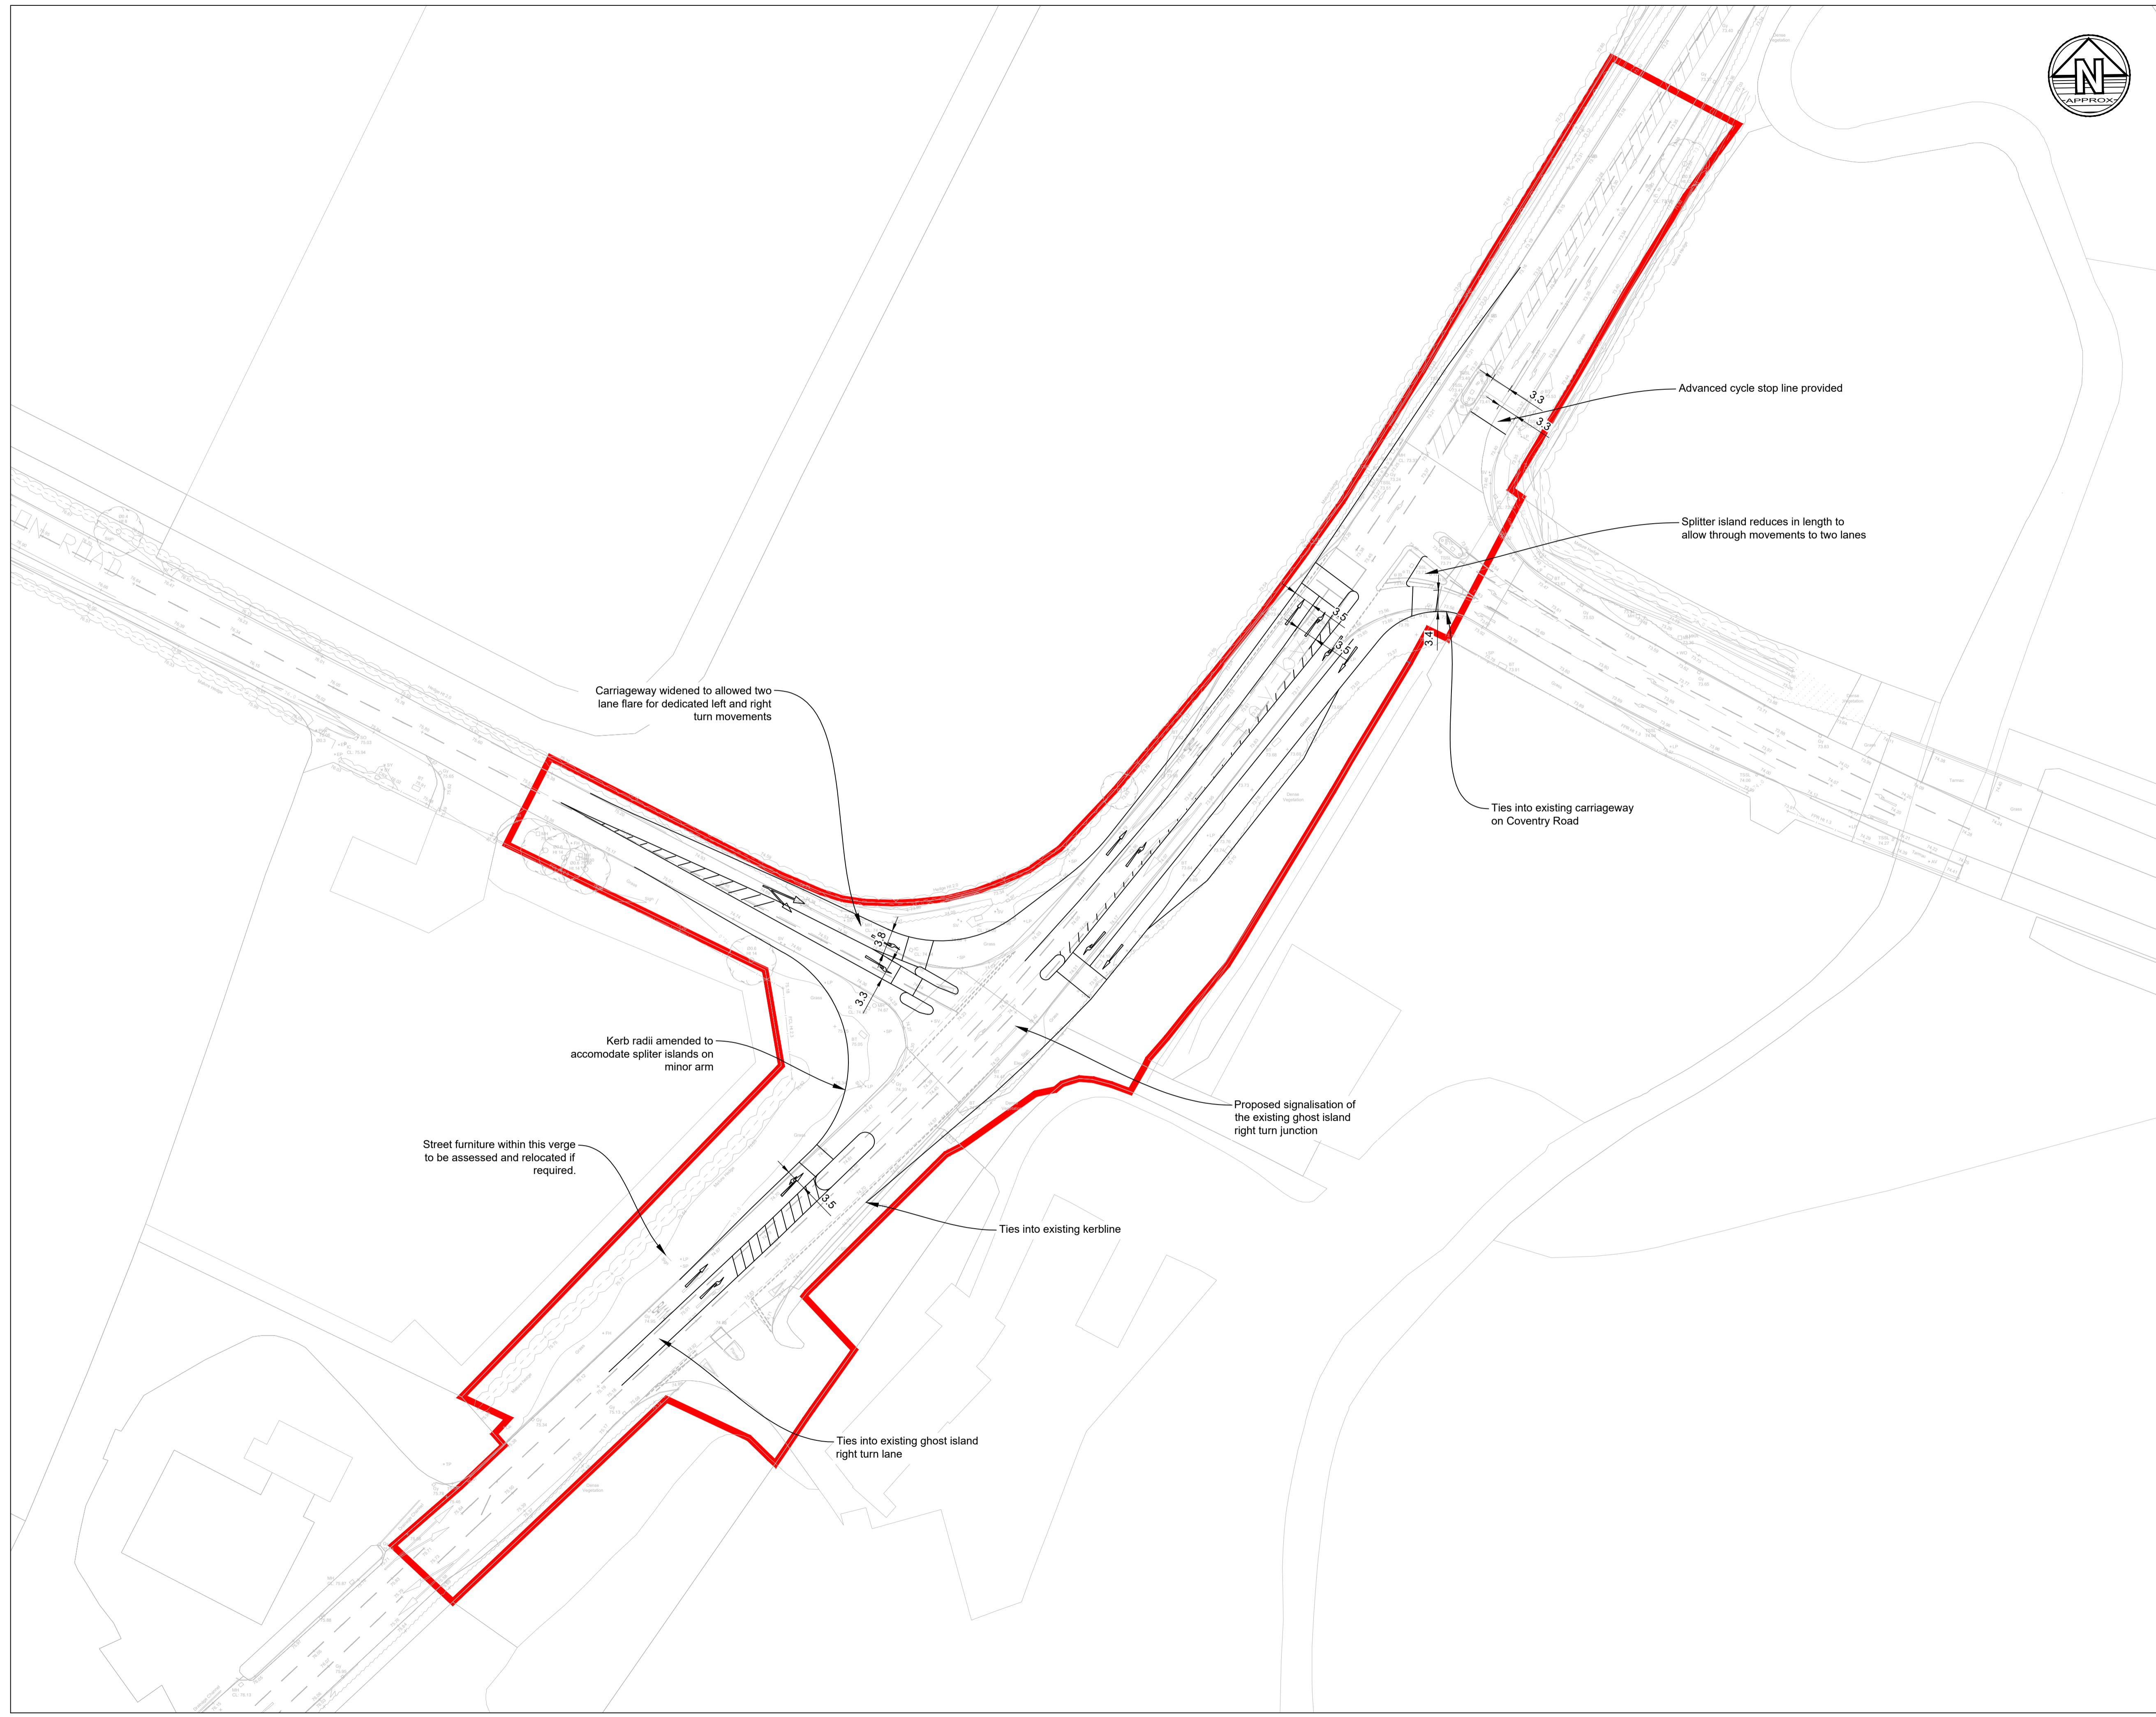

- Notes**
1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
  3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
  4. Any discrepancies noted on site are to be reported to the engineer immediately
  5. For further details on specific areas of works, see the relevant SHW series drawings and appedices
  6. All works must be carried out to the requirements of the overseeing organisation.

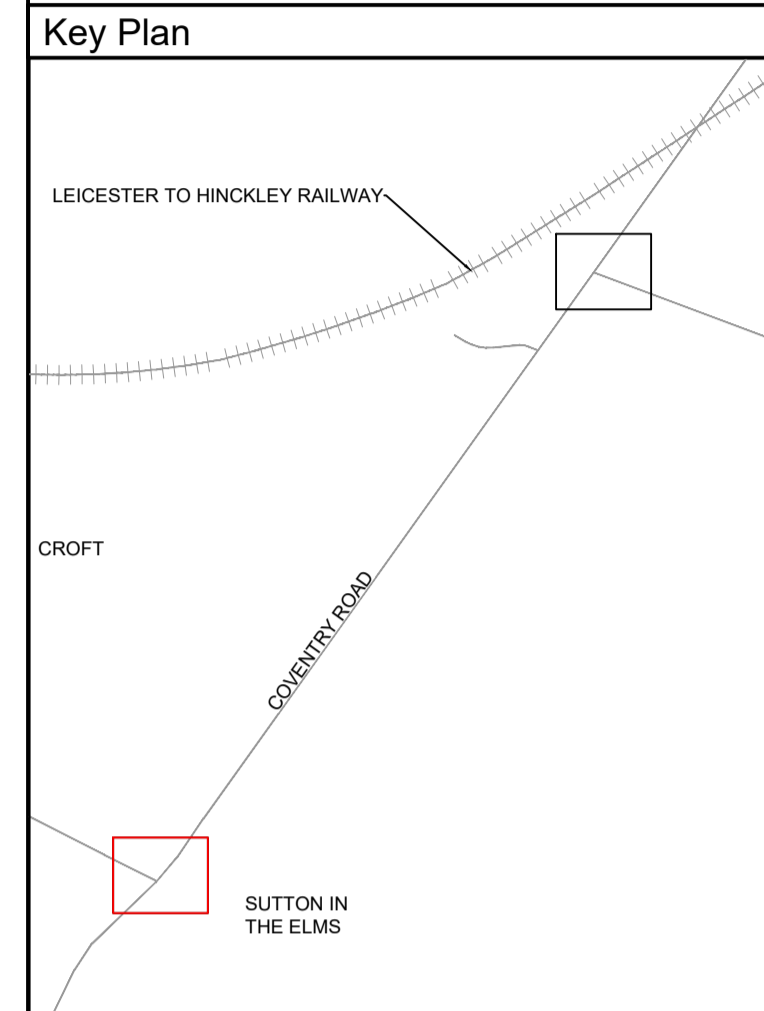

- Legend**
- DCO Land boundary limit
  - Primary Signal Head
  - Secondary Signal head
  - Noise fence
  - Earthwork extents
  - Footway Type - Tactile paving in Red (R)
  - Footway Type - Tactile paving in Buff (B)

P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

Birmingham | 0121 233 3322  
 Leeds | 0113 233 8000  
 London | 020 7407 3879  
 Manchester | 0161 233 4260  
 Nottingham | 0115 924 1100  
[www.bwbconsulting.com](http://www.bwbconsulting.com)

Client

Project Title

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title

**GENERAL ARRANGEMENT SHEET 24**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	06.11.23
Scale@A1:	1:500		

Drawing Status

**PRELIMINARY**


Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW24-DR-CH-0100	S2	P01





## **APPENDIX B: Scheme Vehicle Tracking Drawings**




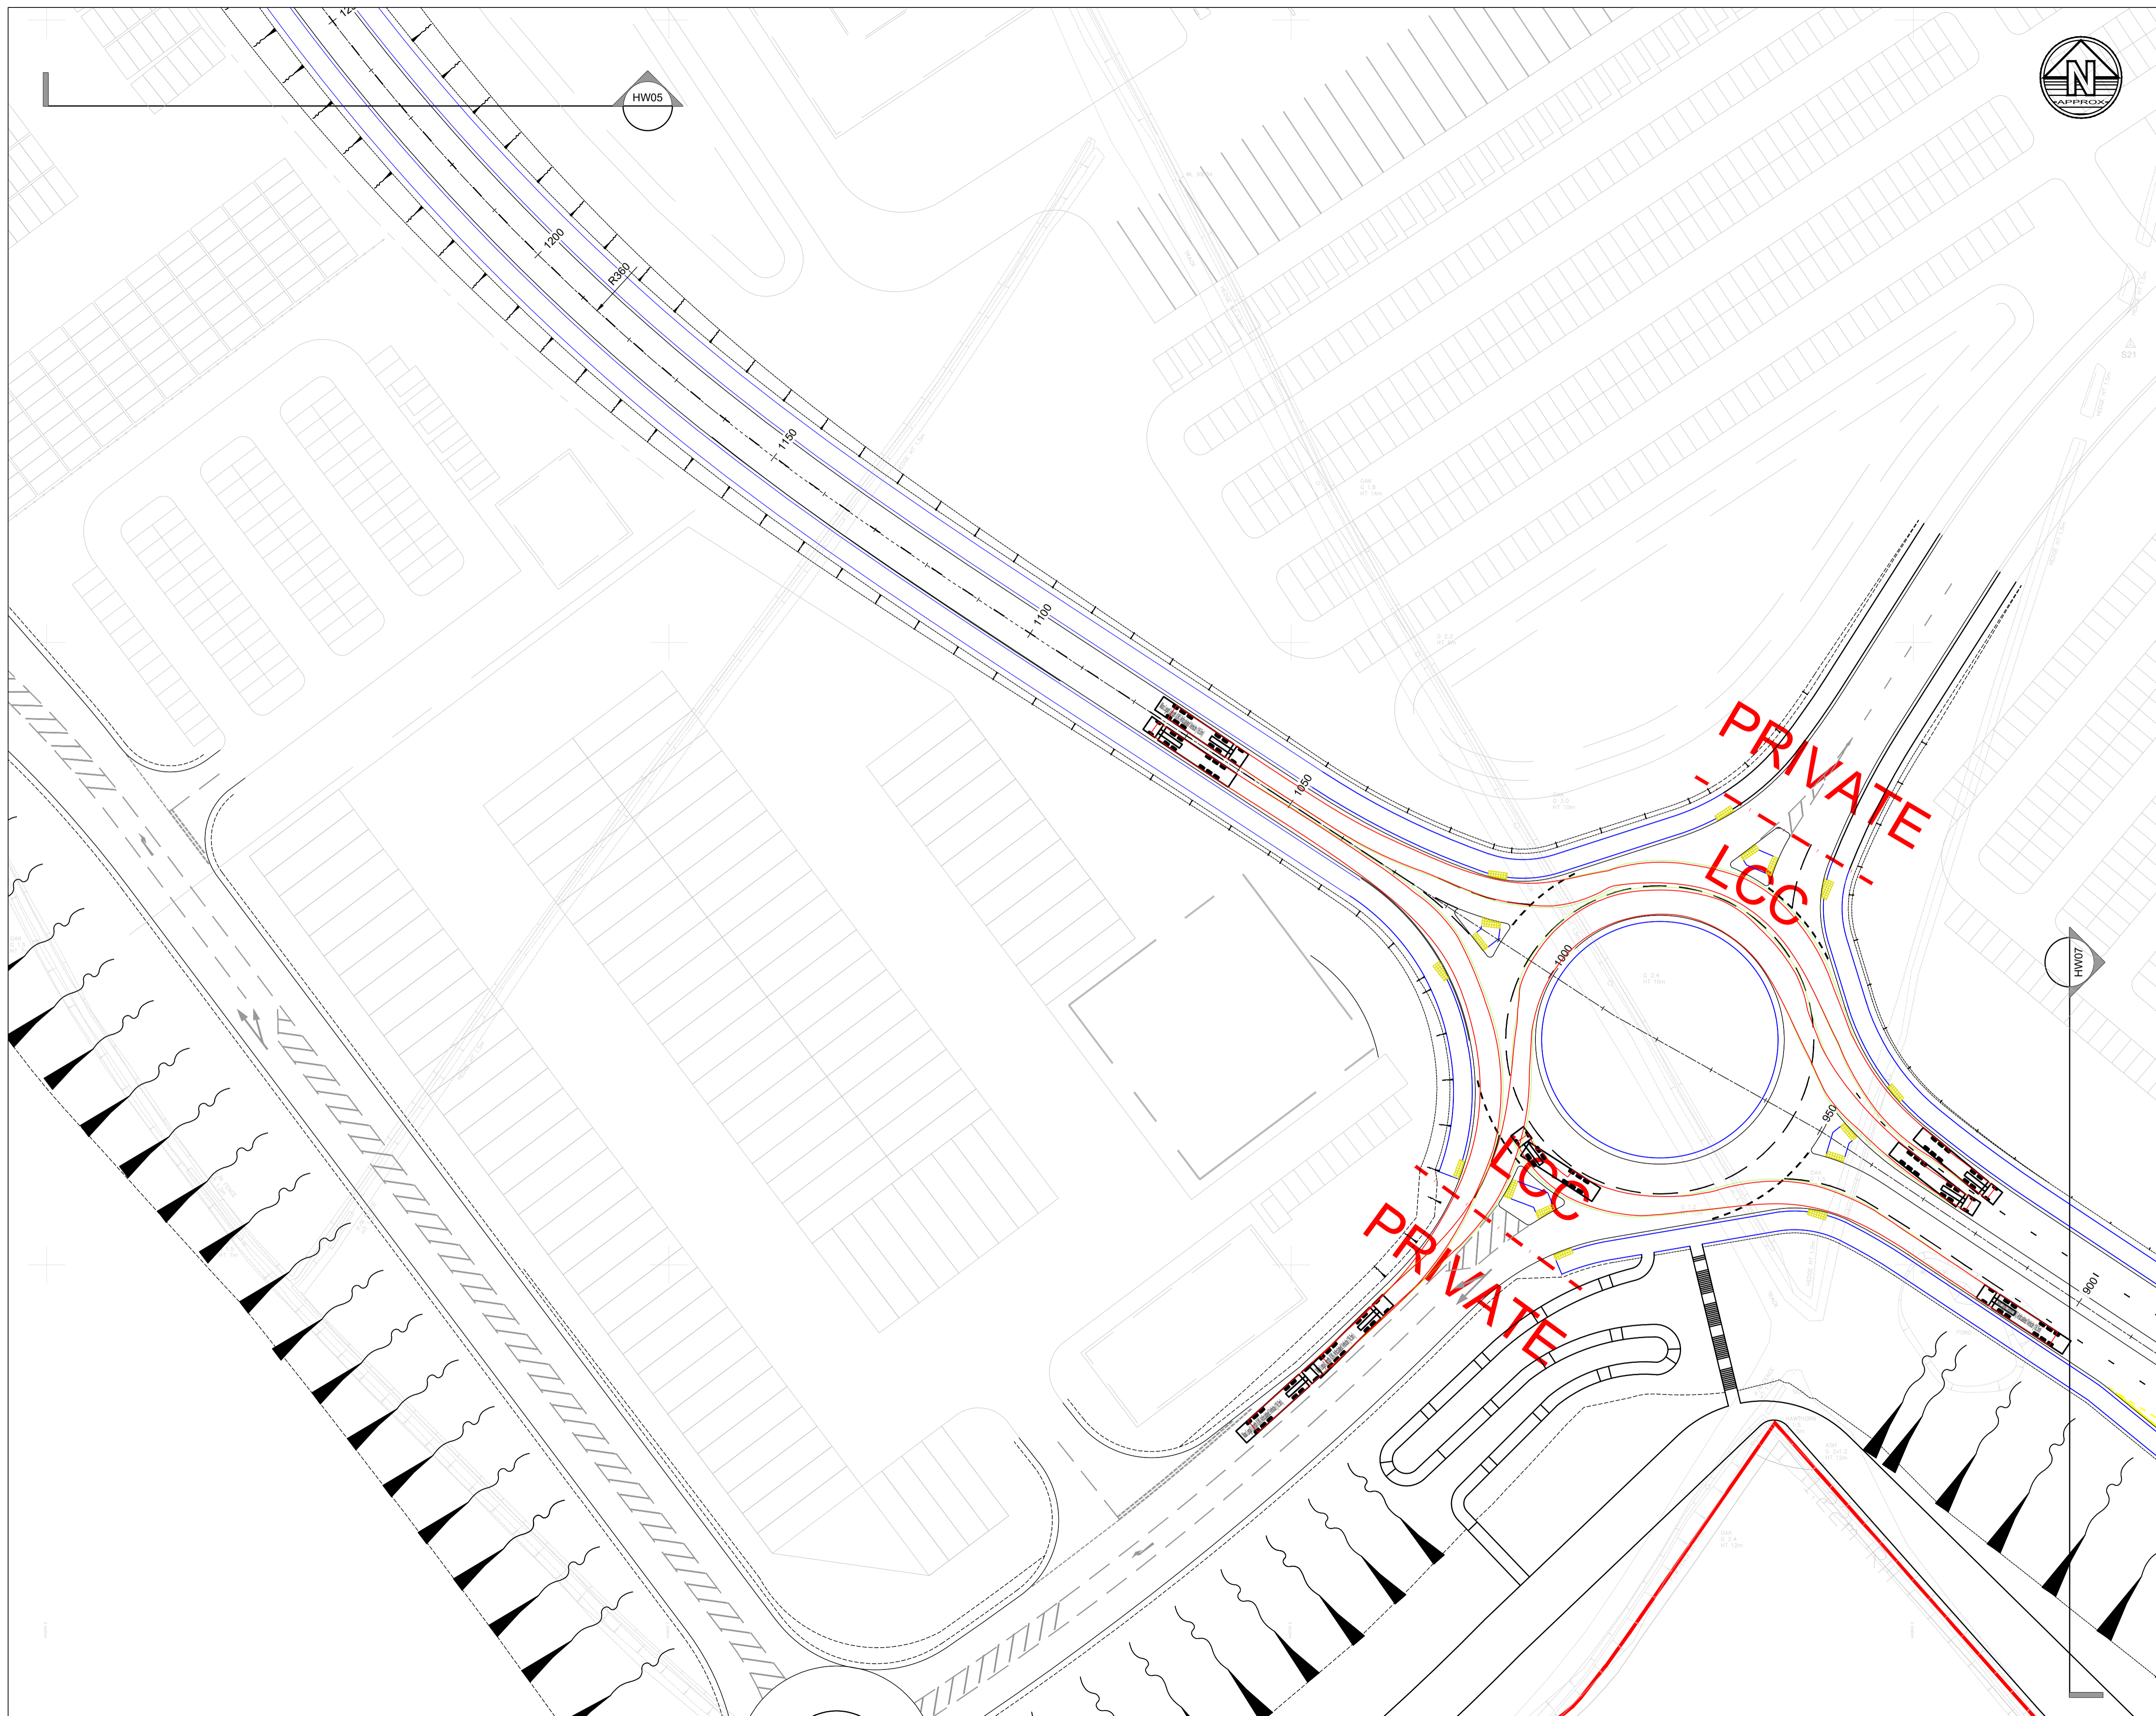


**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately

**Key Plan**

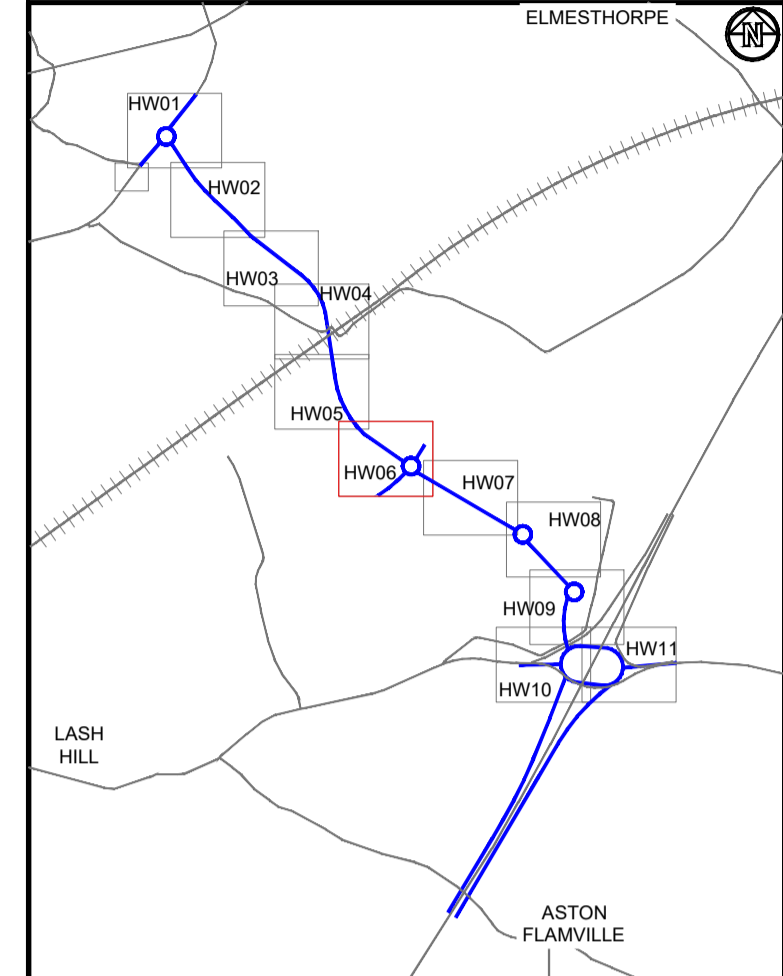

**Legend**

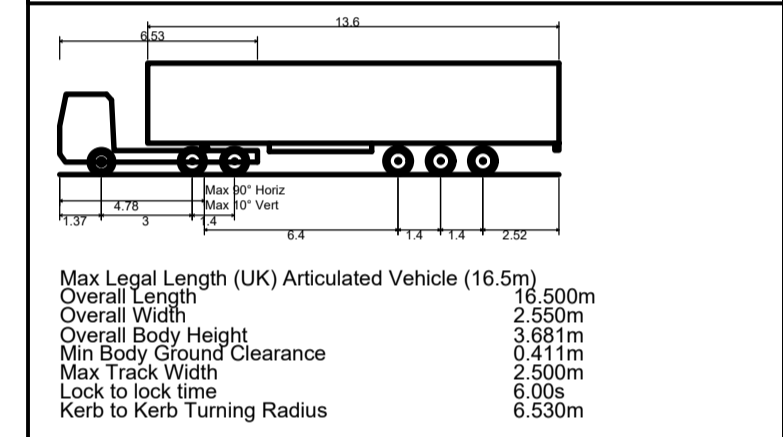

P01	14.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**


Drawing Title

**VEHICLE TRACKING ROUNDABOUT 3**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	10.11.23
Scale@A1:	1:500		
Drawing Status	<b>PRELIMINARY</b>		

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW06-DR-CH-0115	S2	P01



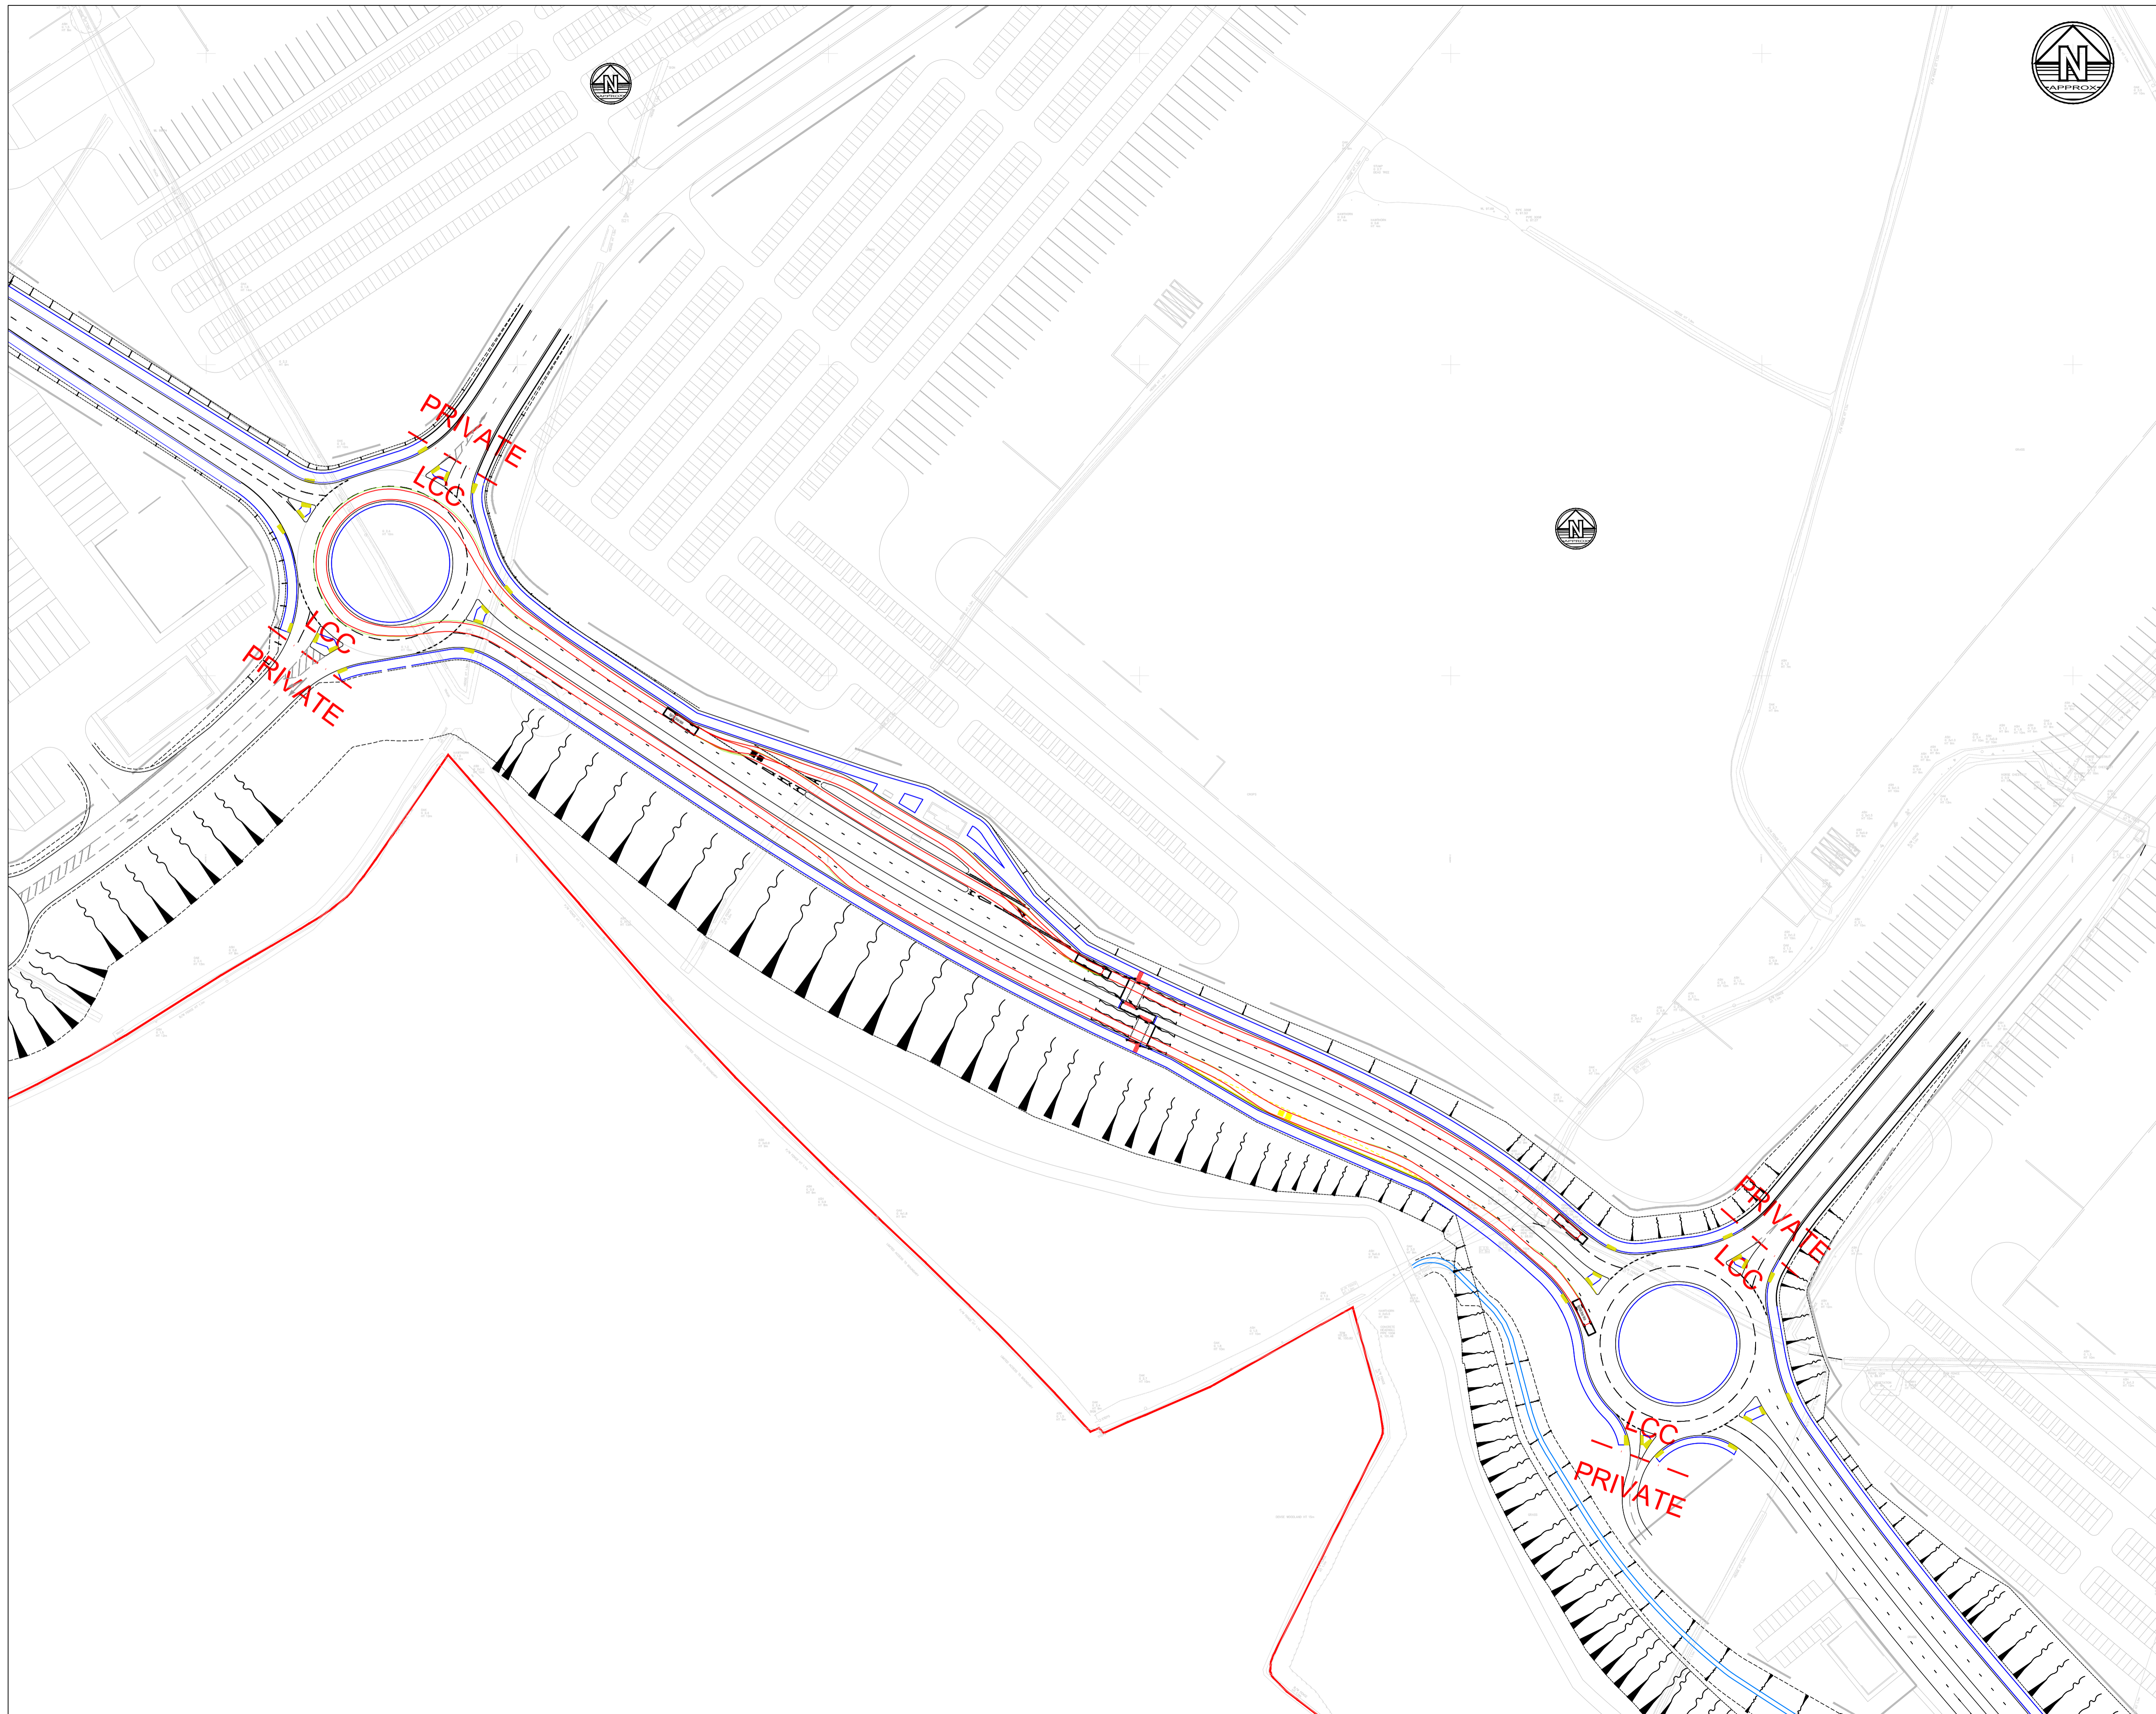

**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately

**Legend**

P02	07.12.23	Updated due to relocated bus laybys	JM	SC
P01	14.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Draw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title  
**HINKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title  
**VEHICLE TRACKING BUS INTERCHANGE**


Drawn:	J.Manifold	Reviewed:	S.Carter
--------	------------	-----------	----------

BWB Ref:	NTT2814	Date:	10.11.23	Scale@A1:	1:500
----------	---------	-------	----------	-----------	-------

Drawing Status  
**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW07-DR-CH-0115	S2	P02




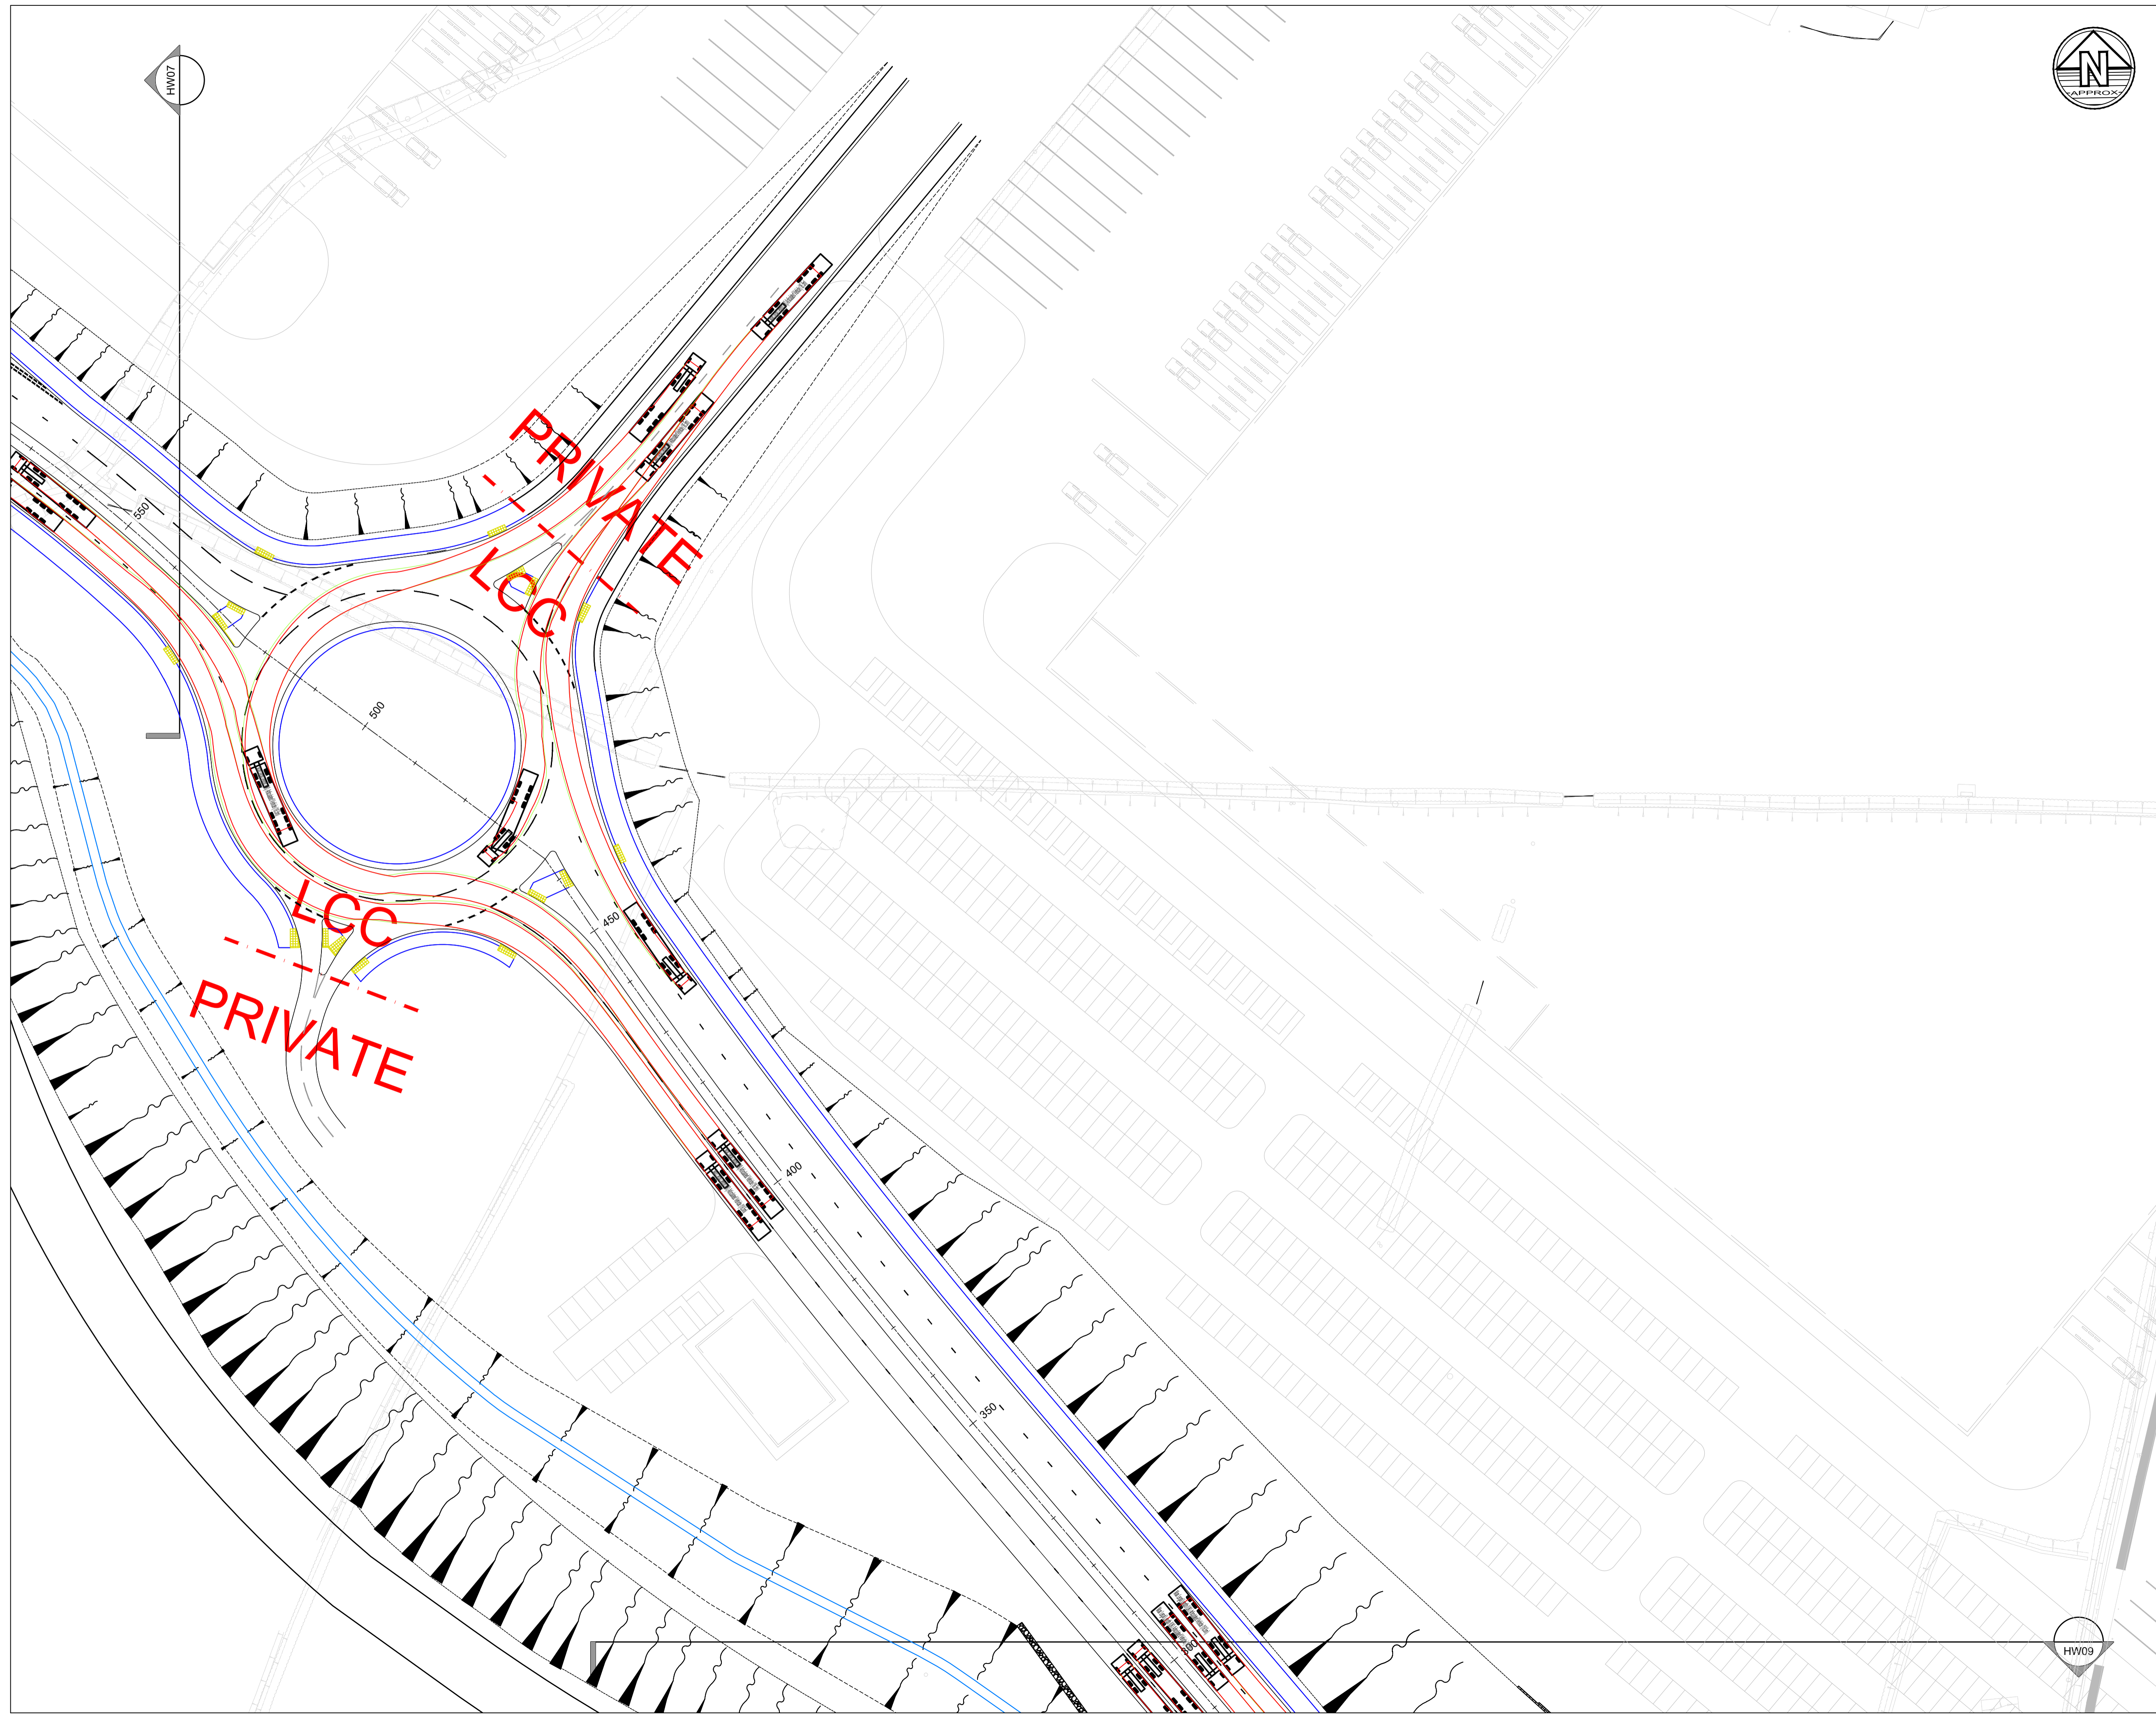


**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately

**Key Plan**

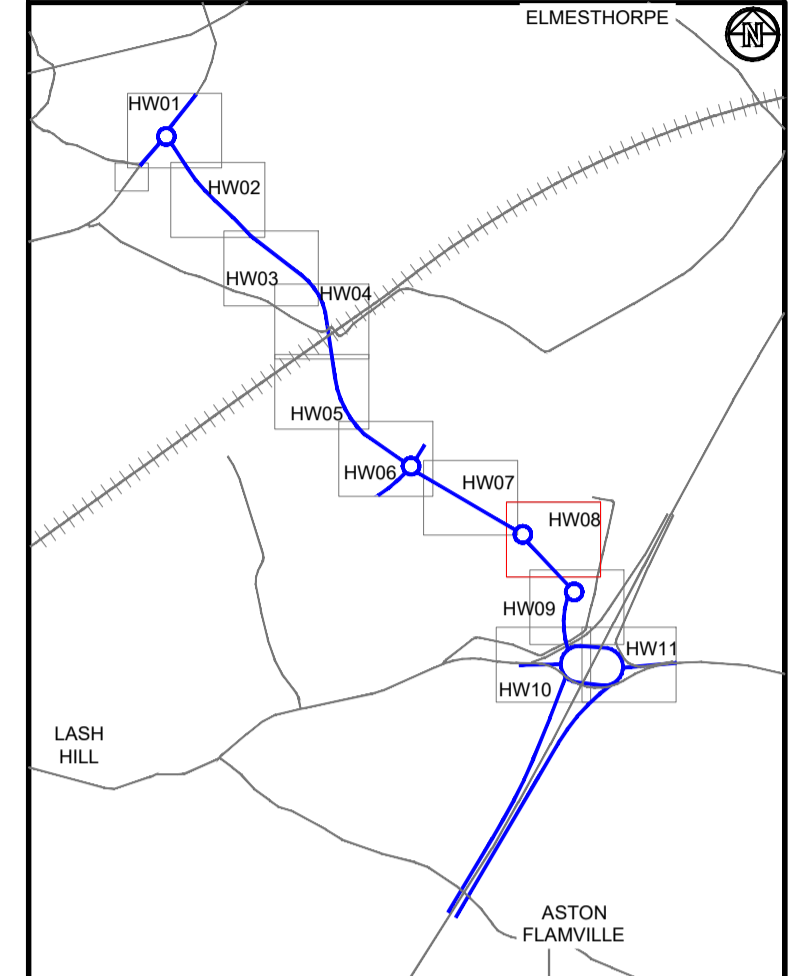

**Legend**

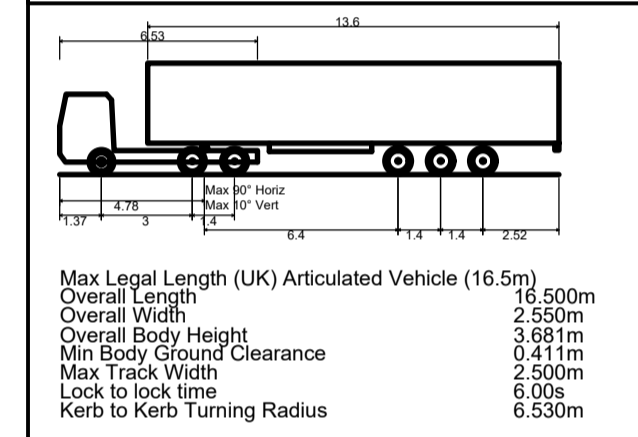

P01	10.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

**HINKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

**VEHICLE TRACKING ROUNDABOUT 2**


Drawn:	J.Manifold	Reviewed:	S.Carter
--------	------------	-----------	----------

BWB Ref:	NTT2814	Date:	10.11.23	Scale@A1:	1:500
----------	---------	-------	----------	-----------	-------

**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW08-DR-CH-0115	S2	P01




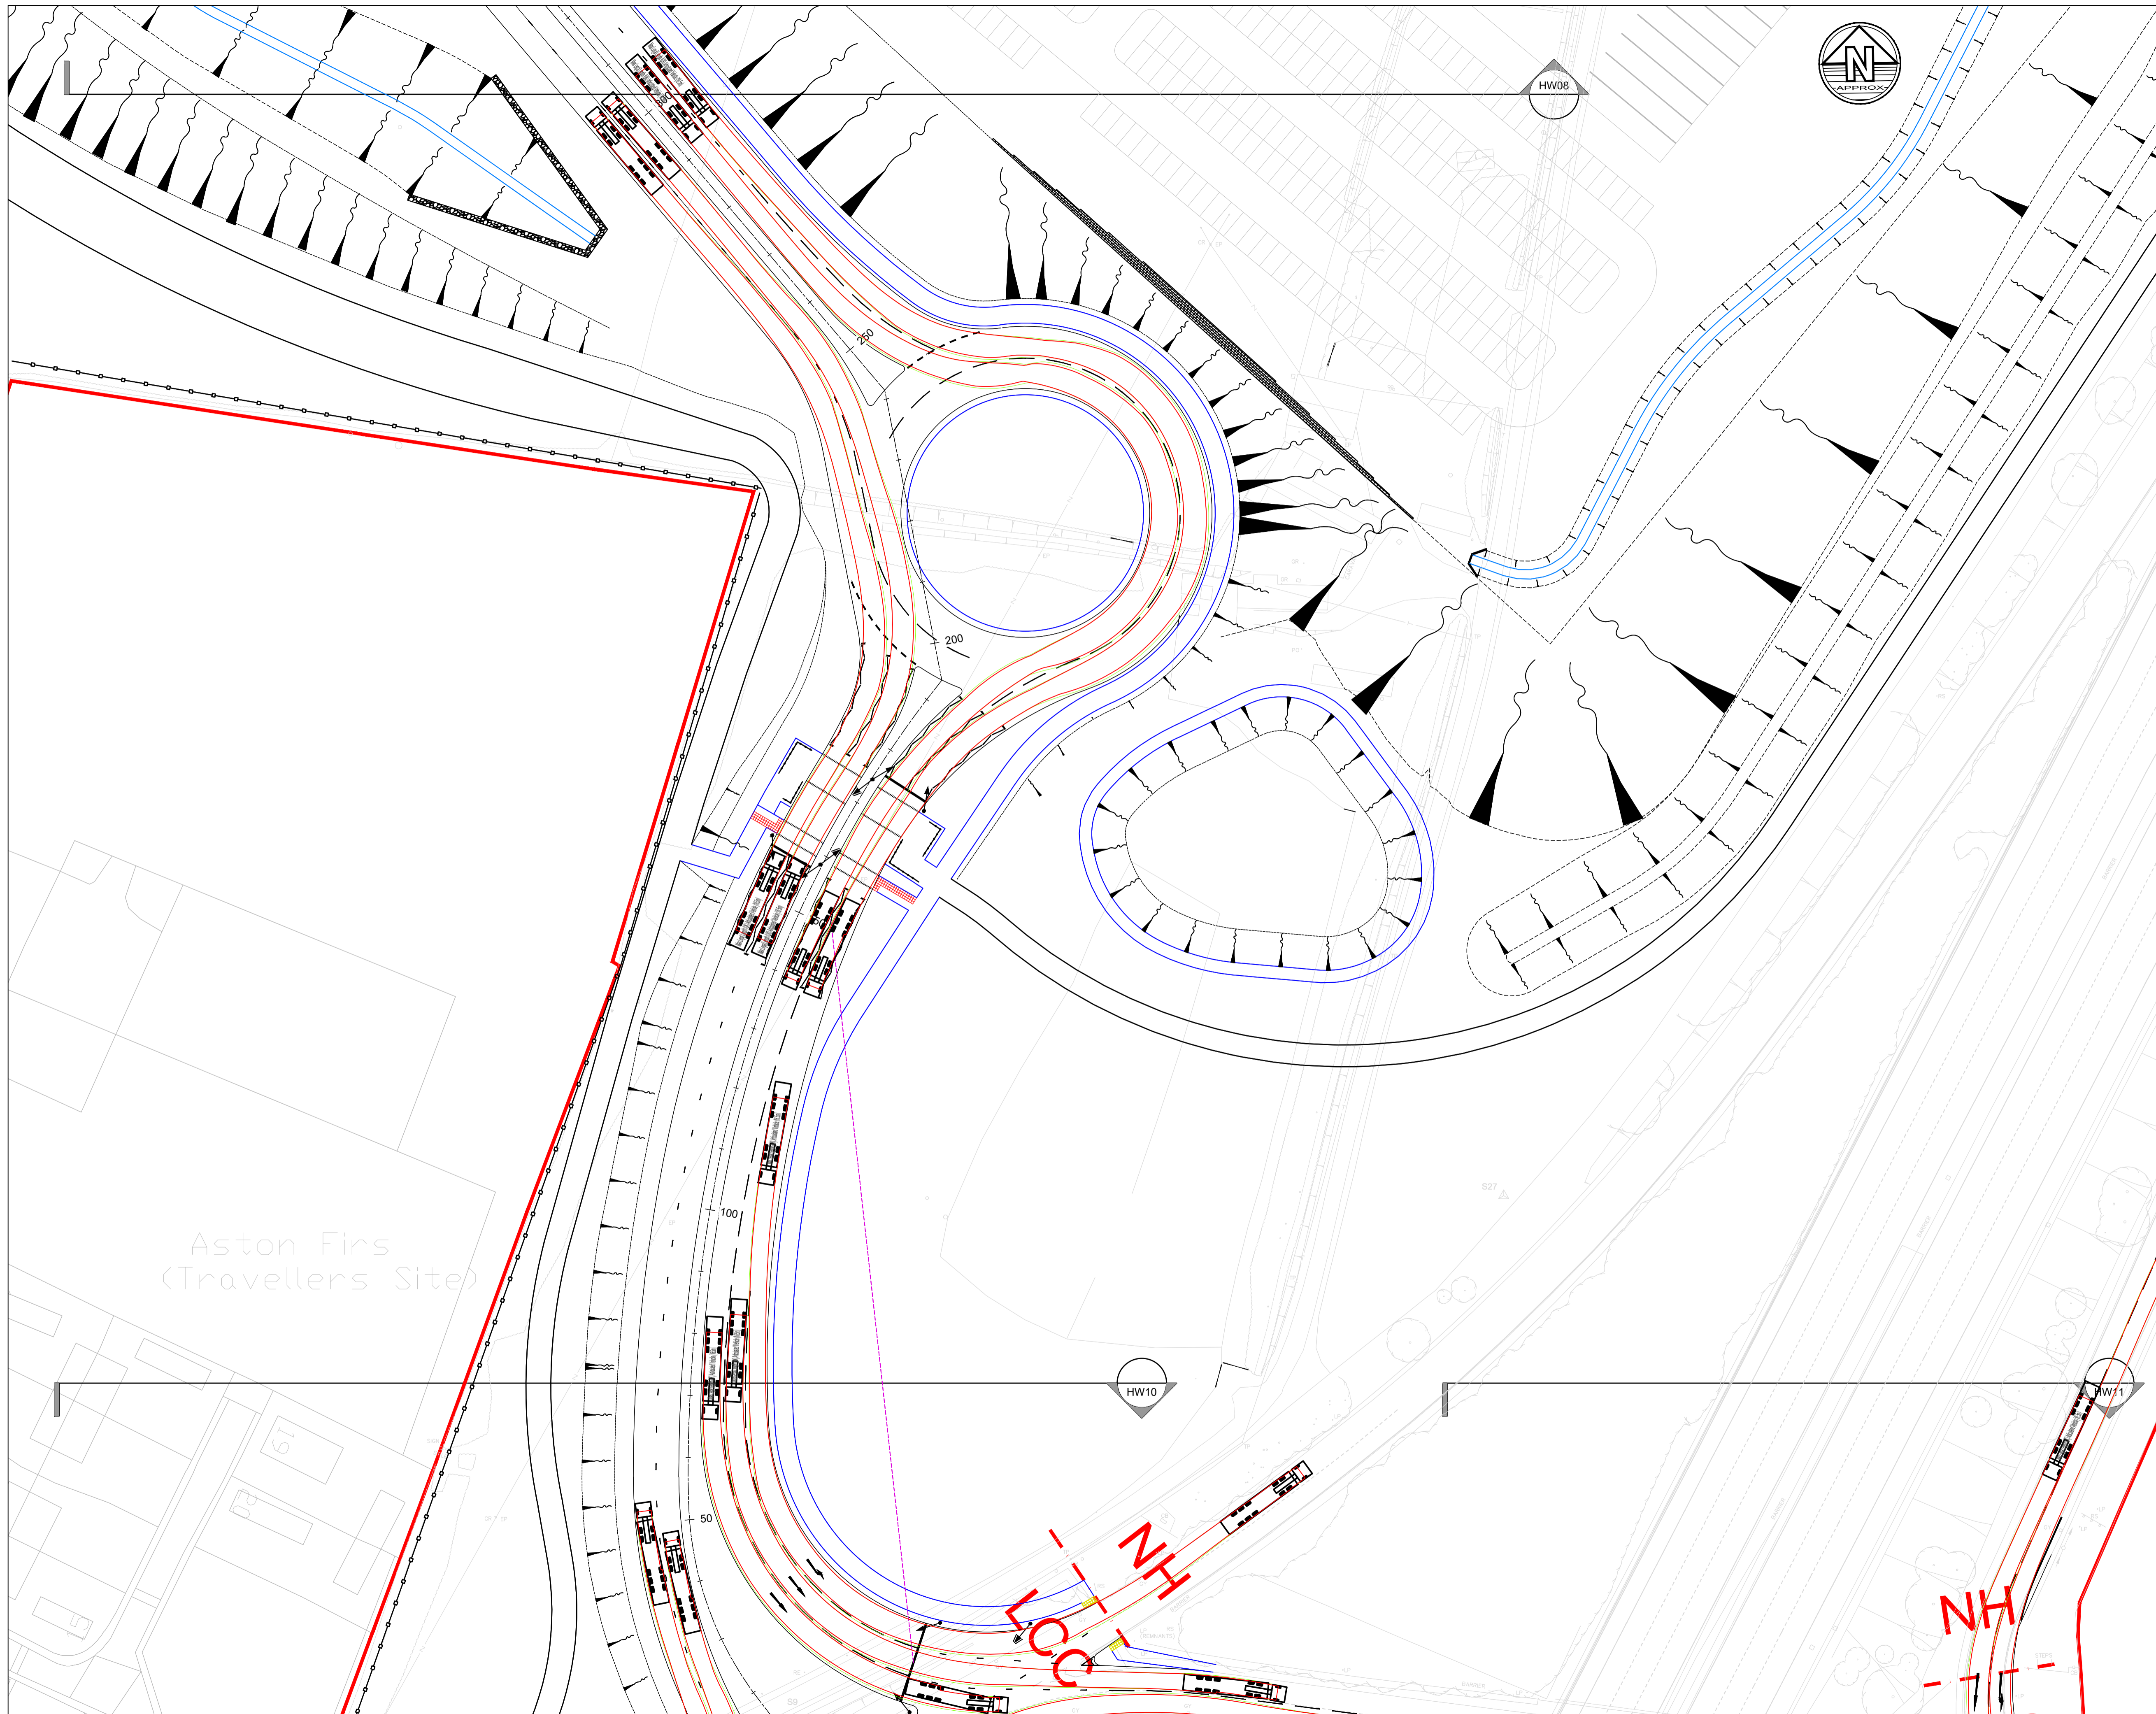


**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately

**Key Plan**

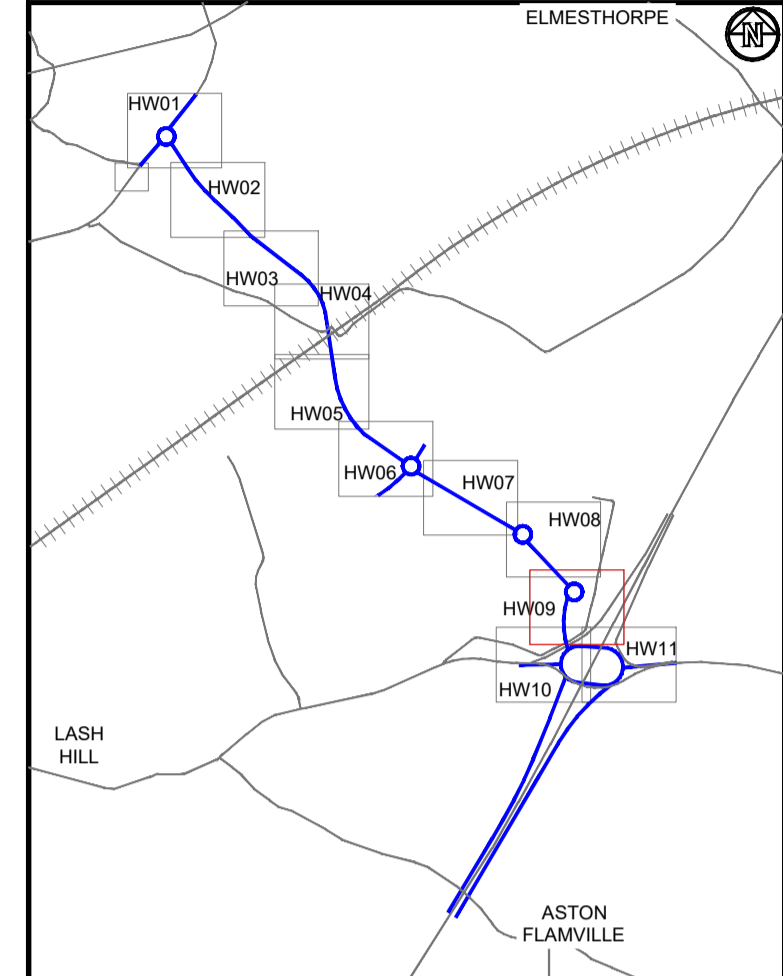

**Legend**

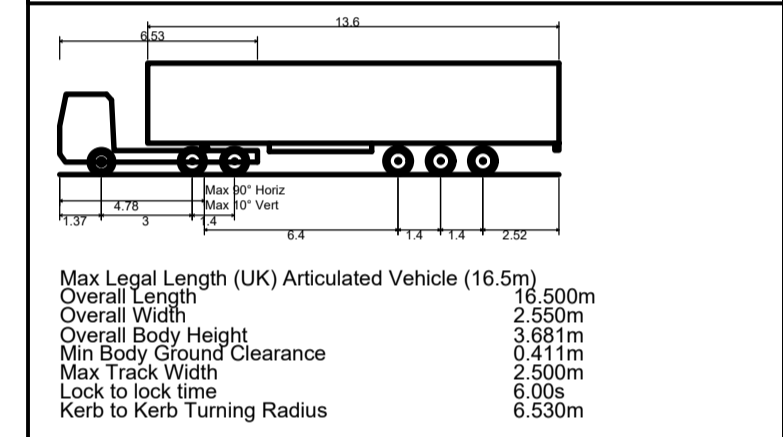

P01	14.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB** A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title


**VEHICLE TRACKING ROUNDABOUT 1**

Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	10.11.12
Scale@A1:	1:500		

**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW09-DR-CH-0115	S2	P01




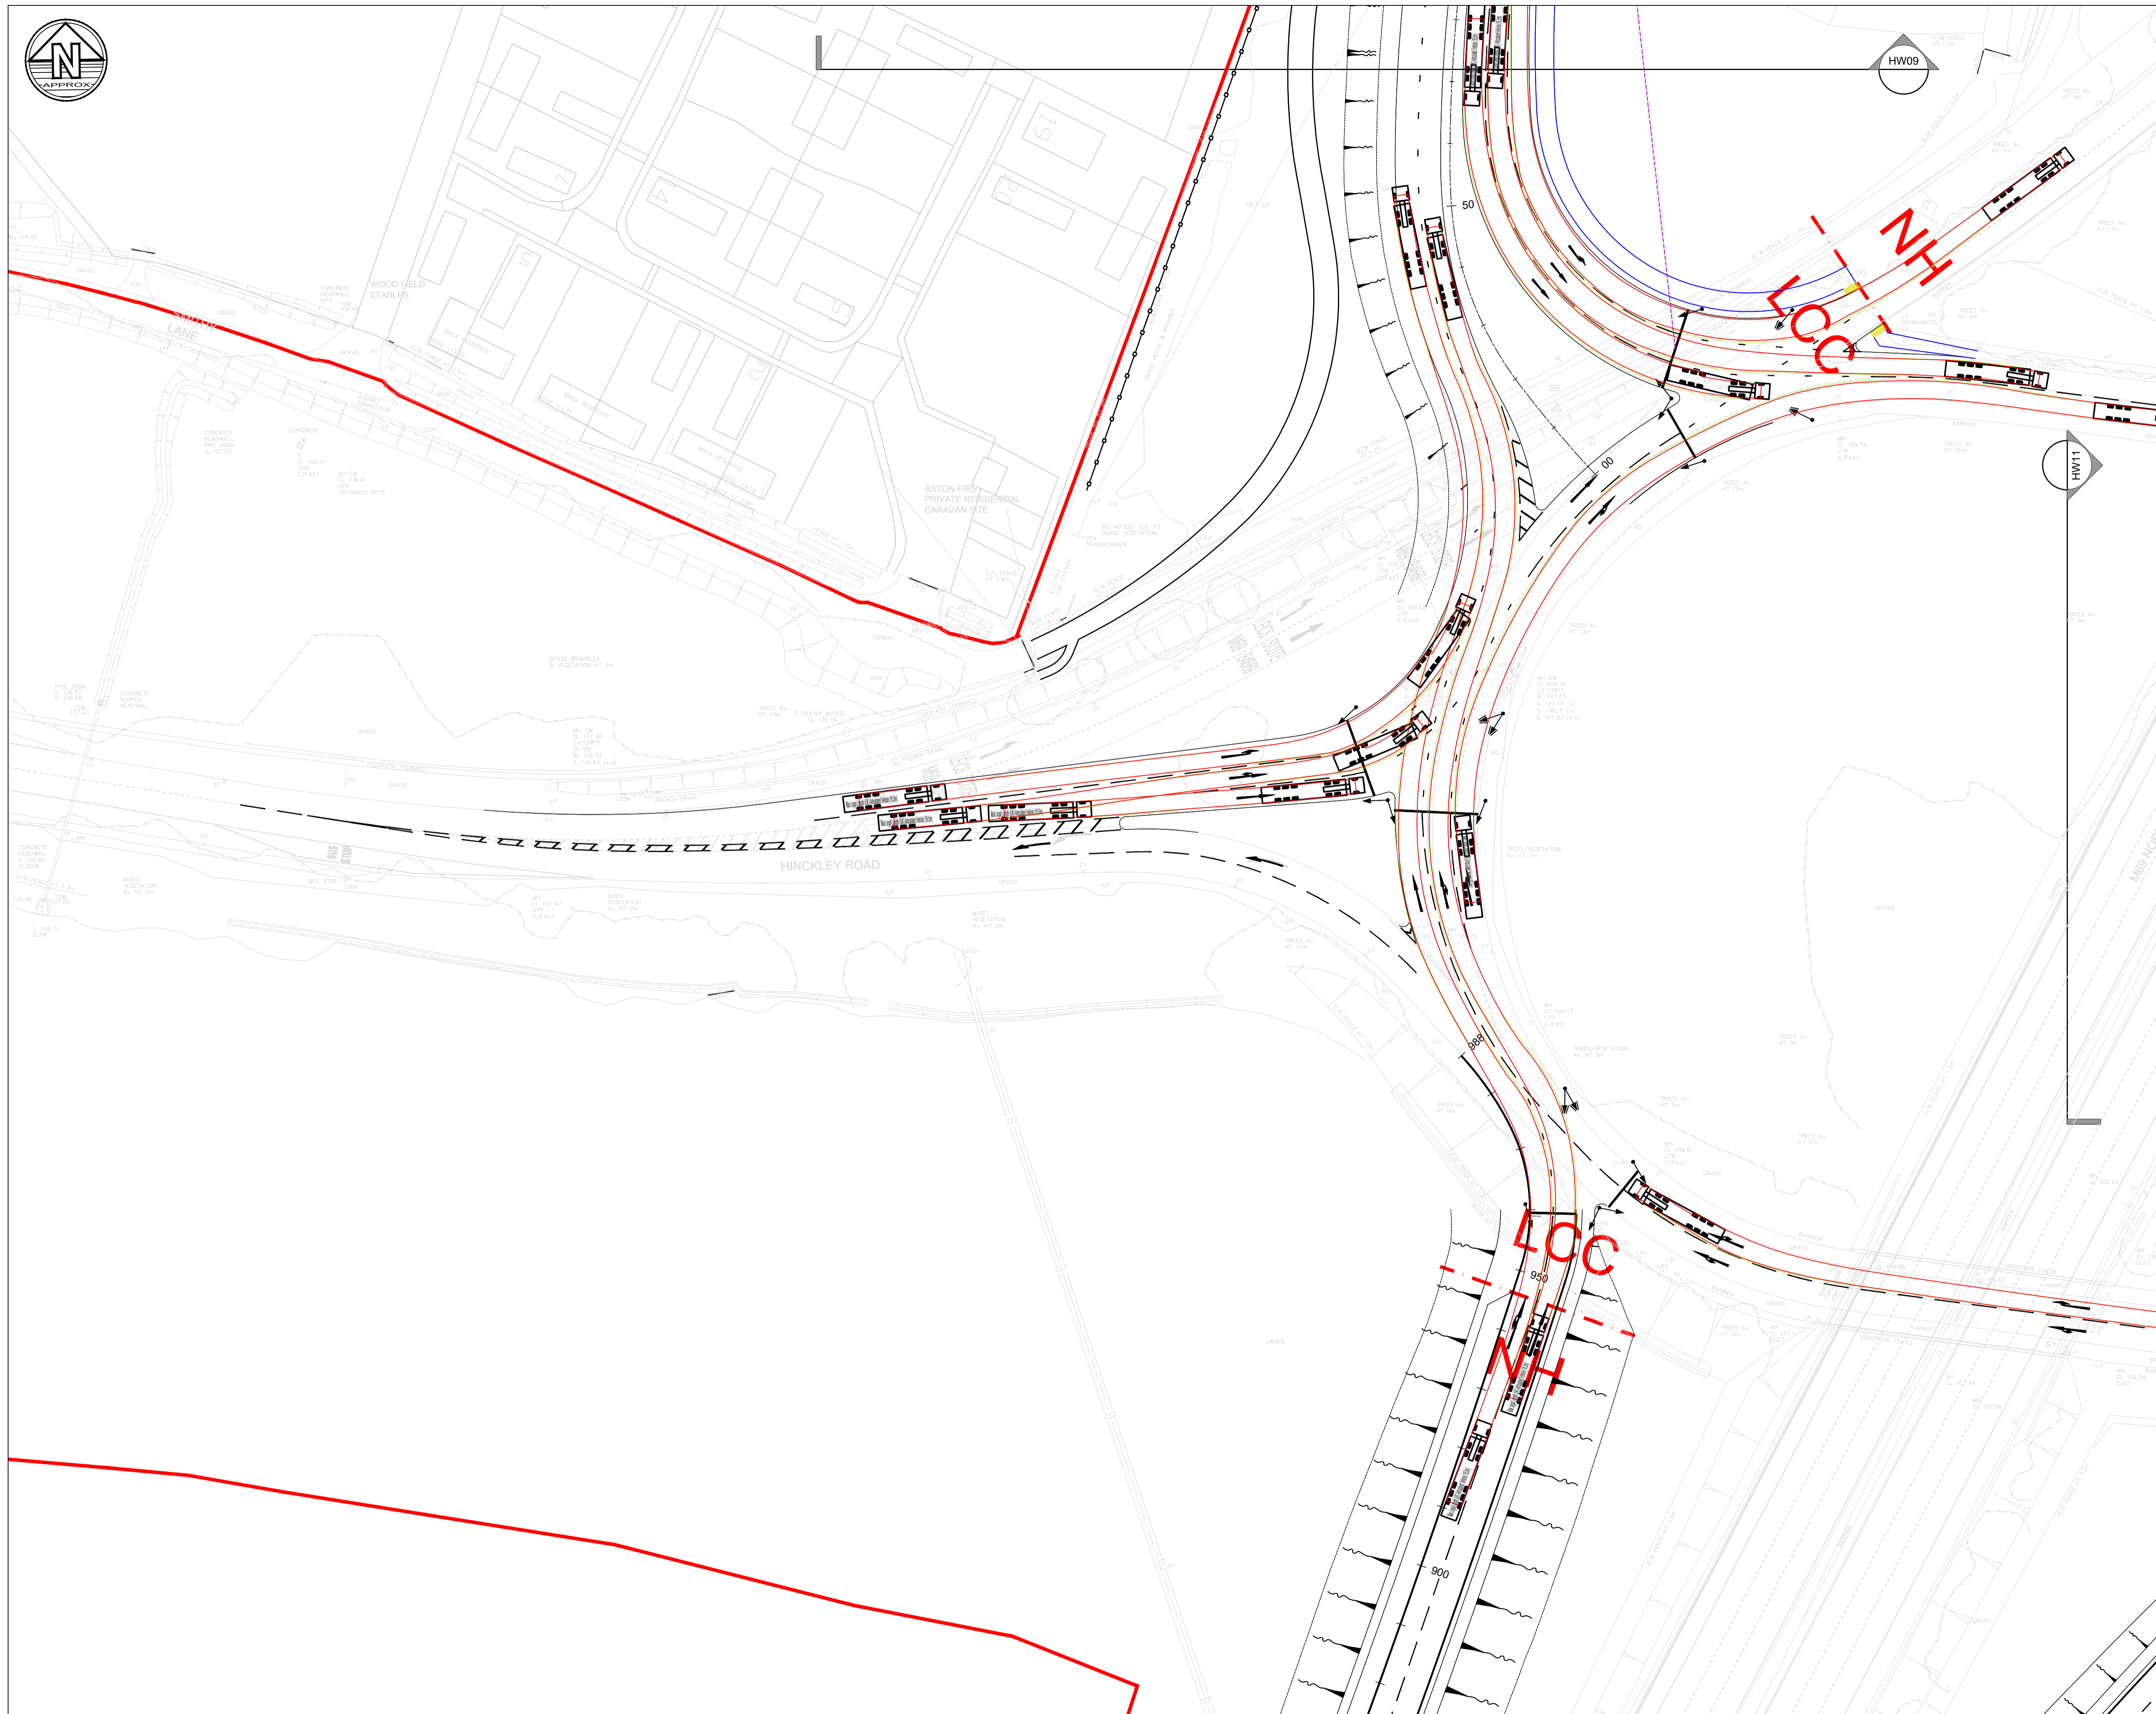


**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately

**Key Plan**

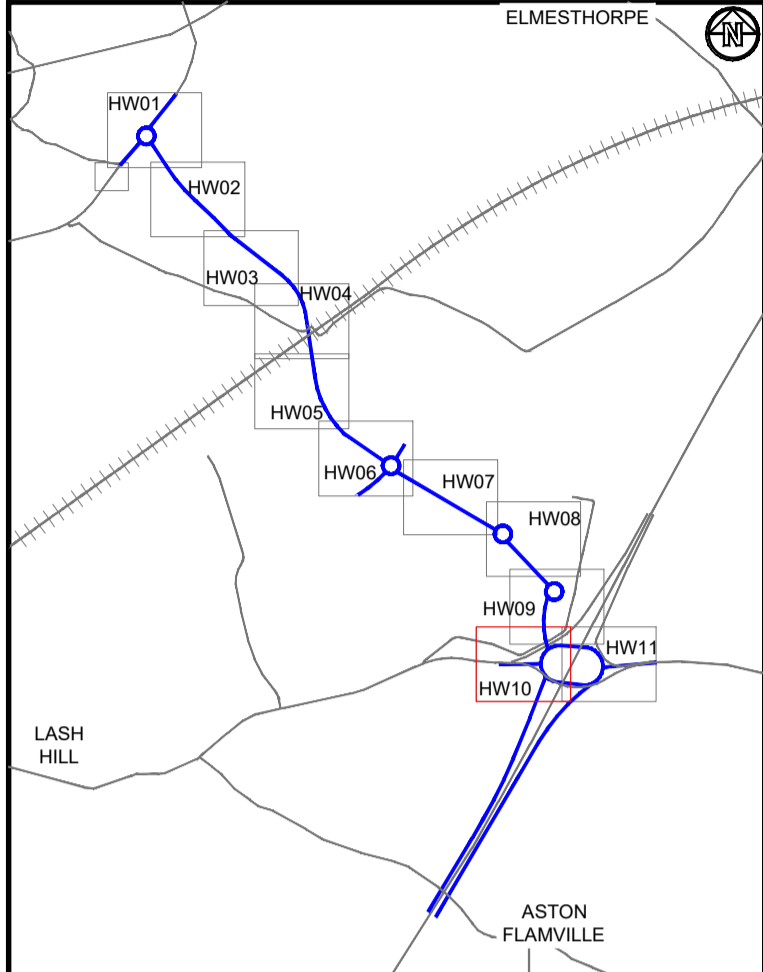

**Legend**

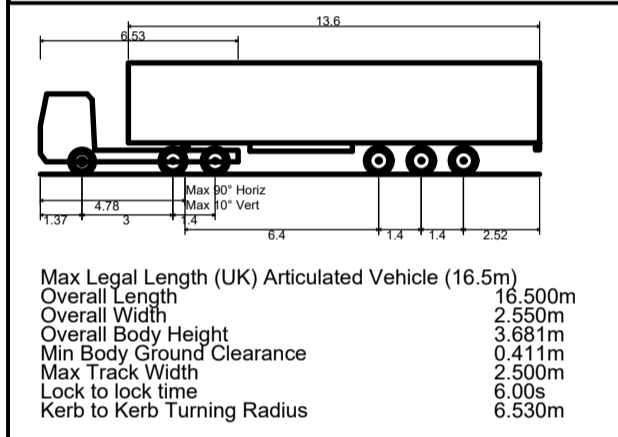

P01	14.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB** A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title

**VEHICLE TRACKING JUNCTION 2 WEST**


Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	10.11.23
Scale@A1:	1:500		

Drawing Status

**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW10-DR-CH-0115	S2	P01




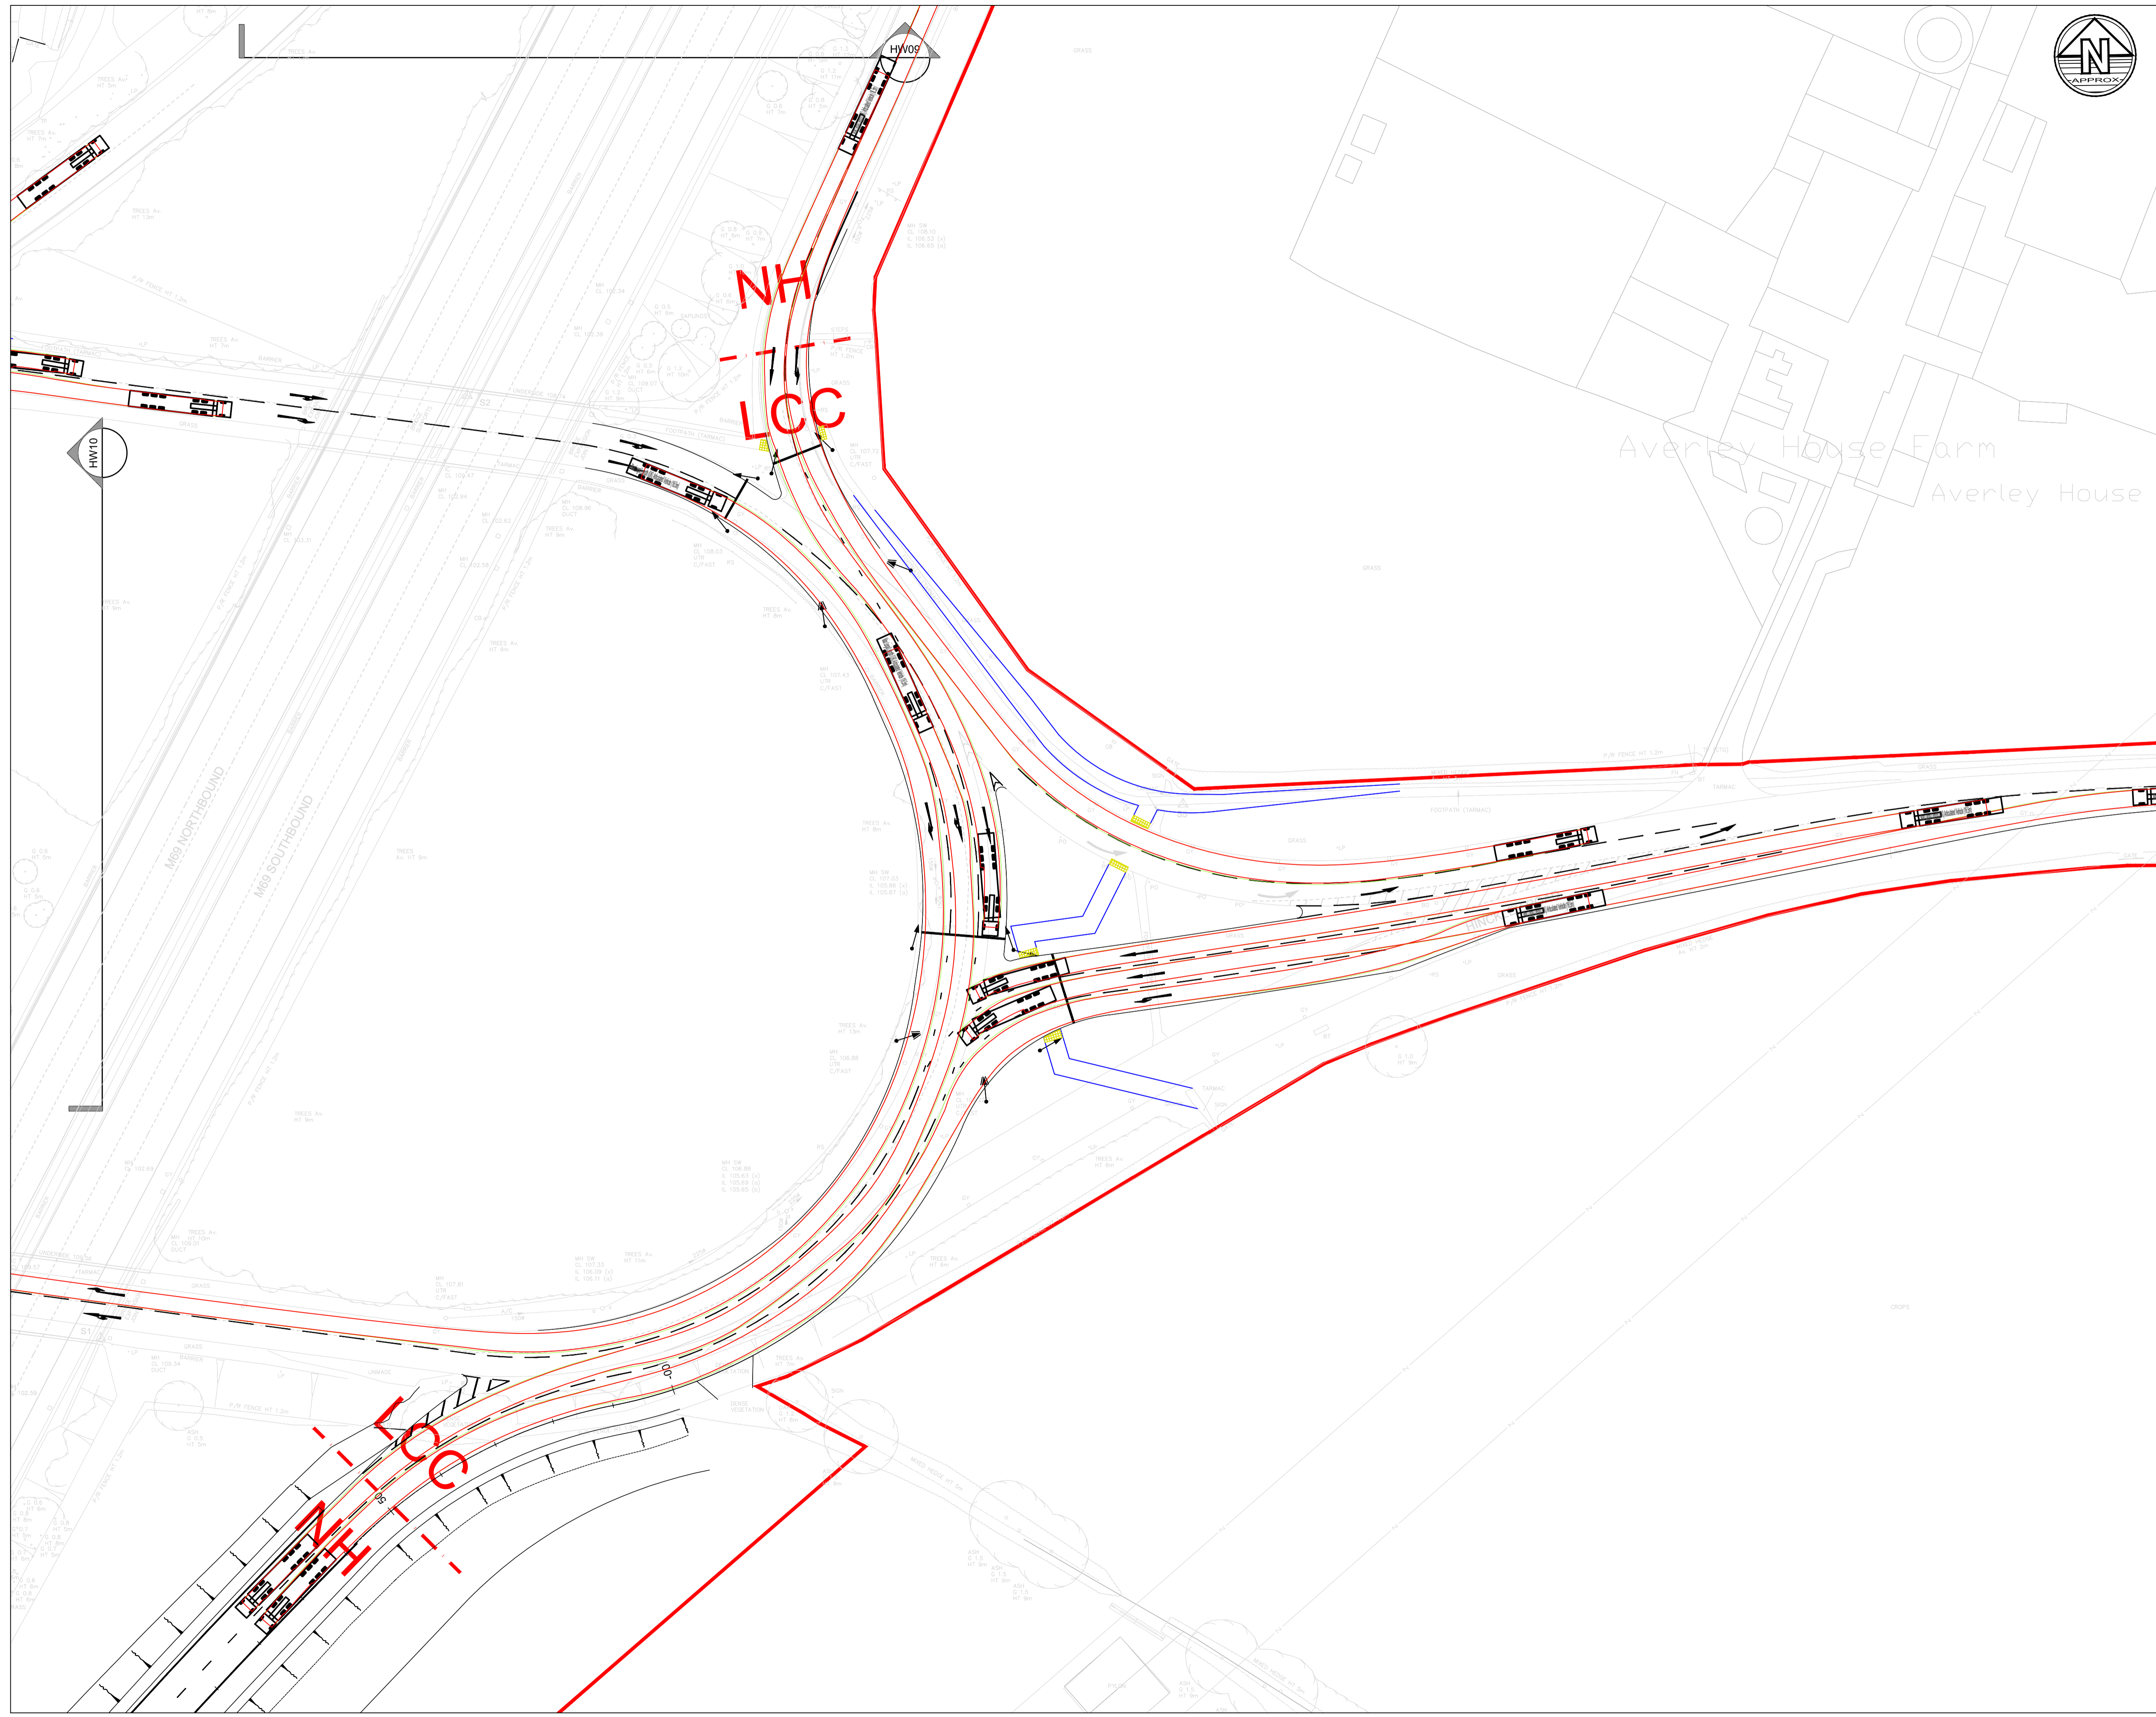


**Notes**

1. Do not scale from this drawing. All dimensions must be checked/verified on site. If in doubt, ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications
3. All dimensions in metres unless noted otherwise. All levels in metres unless noted otherwise
4. Any discrepancies noted on site are to be reported to the engineer immediately

**Key Plan**

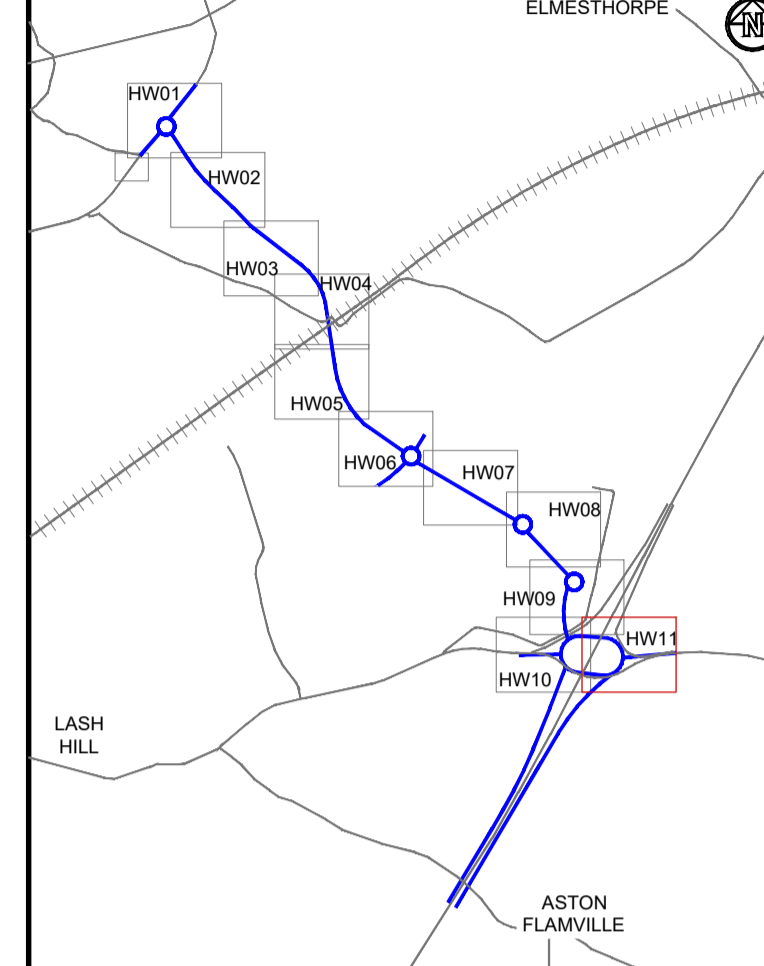

**Legend**

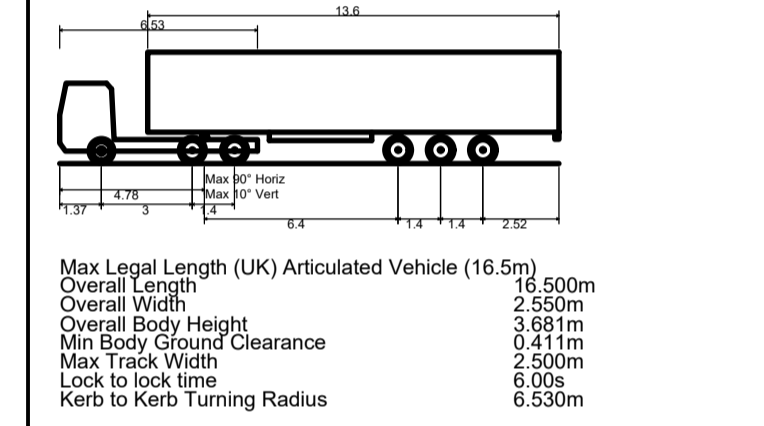

P01	14.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100
- www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title

**HINCKLEY NATIONAL RAIL  
FREIGHT INTERCHANGE**

Drawing Title

**VEHICLE TRACKING  
JUNCTION 2 EAST**





Drawn:	J.Manifold	Reviewed:	S.Carter
BWB Ref:	NTT2814	Date:	10.11.23
Scale@A1:	1:500		

Drawing Status

**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-HGN-HW11-DR-CH-0115	S2	P01



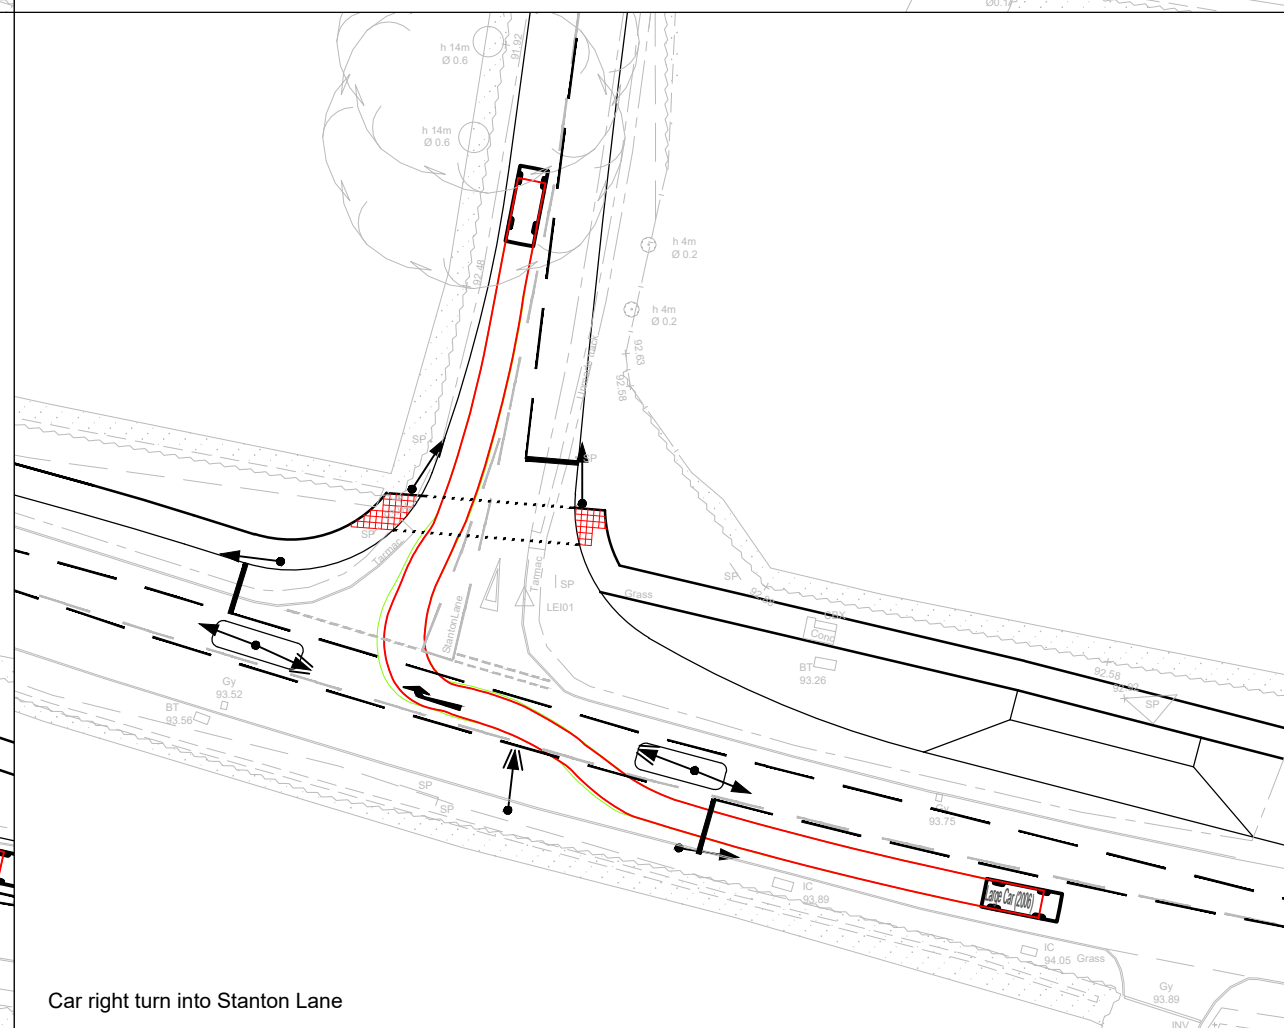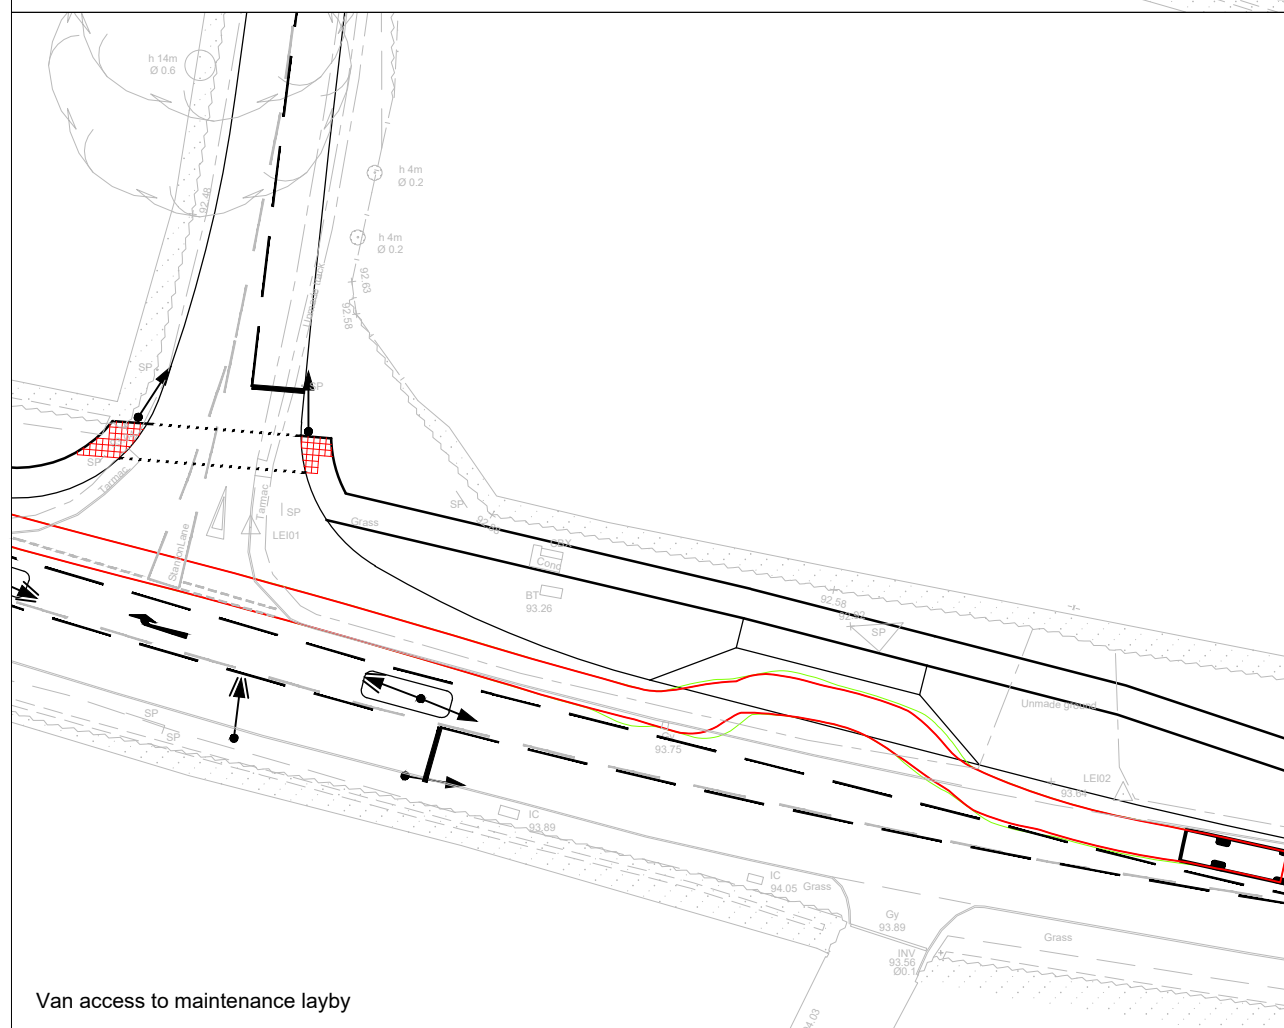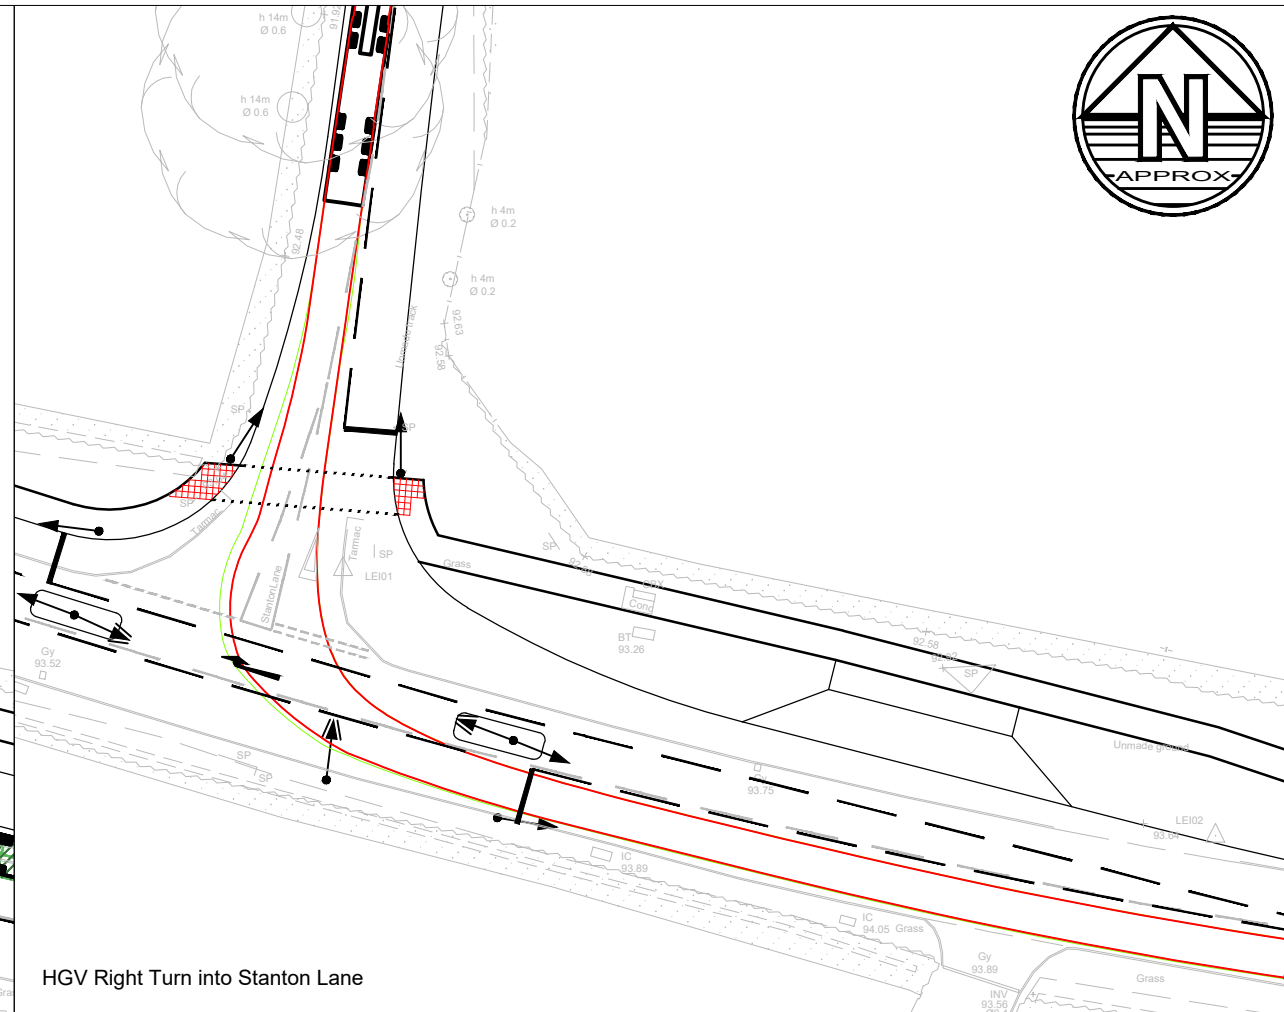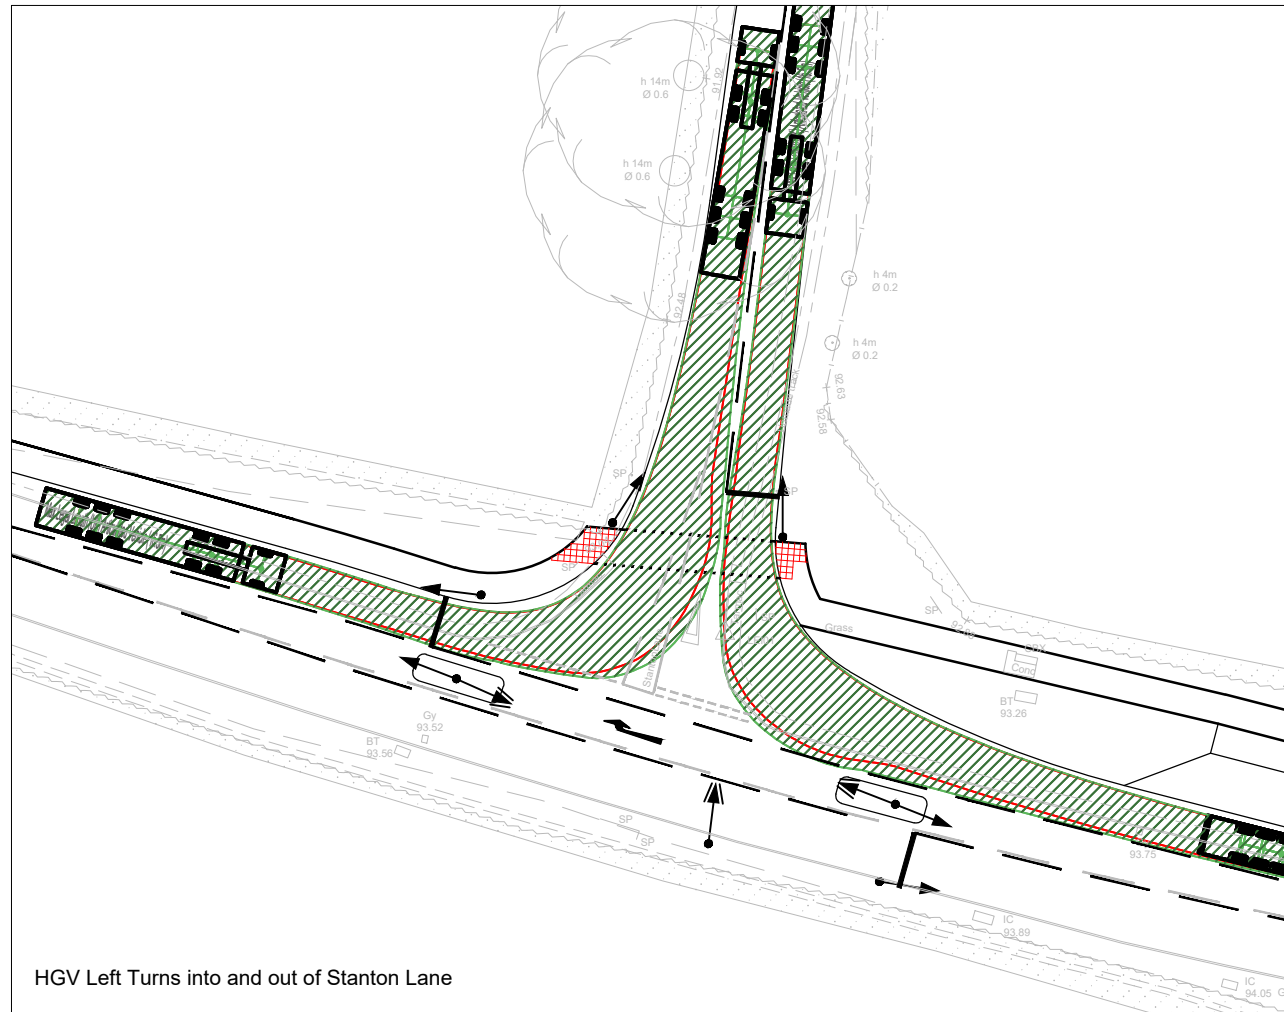

- Notes**
1. Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
  3. All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
  4. Any discrepancies noted on site are to be reported to the engineer immediately.

**Legend**

	8.010m
Overall Length	2.100m
Overall Width	3.550m
Overall Body Height	0.381m
Min Body Ground Clearance	2.064m
Track Width	4.030
Lock to lock time	7.400m
Kerb to Kerb Turning Radius	

	16.500m
Overall Length	2.550m
Overall Width	3.861m
Overall Body Height	0.310m
Min Body Ground Clearance	2.500m
Max Track Width	6.000
Lock to lock time	6.530m
Kerb to Kerb Turning Radius	

	5.079m
Overall Length	1.872m
Overall Width	1.525m
Overall Body Height	0.310m
Min Body Ground Clearance	1.831m
Max Track Width	4.000
Lock to lock time	5.900m
Kerb to Kerb Turning Radius	

PO2	14.12.23	Updated to suit topo survey	JM	SC
P1	20.09.23	PRELIMINARY ISSUE	AJ	MA
Rev	Date	Details of issue / revision	Dnw	Rev

**Issues & Revisions**

**BWB**  
CONSULTANCY | ENVIRONMENT  
INFRASTRUCTURE | BUILDINGS

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7234 9122
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client  
**TRITAX SYMMETRY  
(HINCKLEY) LIMITED**


Project Title  
**HINCKLEY RAIL FREIGHT  
INTERCHANGE**

Drawing Title  
**B4669 / STANTON LANE  
PROPOSED MITIGATION  
(SWEEP PATHS)**




Drawn:	AJ Oakes	Reviewed:	Malcolm Ash
BWB Ref:	NTT 2814	Date:	20.09.23
Scale:	A3	Scale:	1:1000

Drawing Status  
**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number      Status      Rev  
**HRF-BWB-GEN-XX-DR-TR-109      S2      P02**

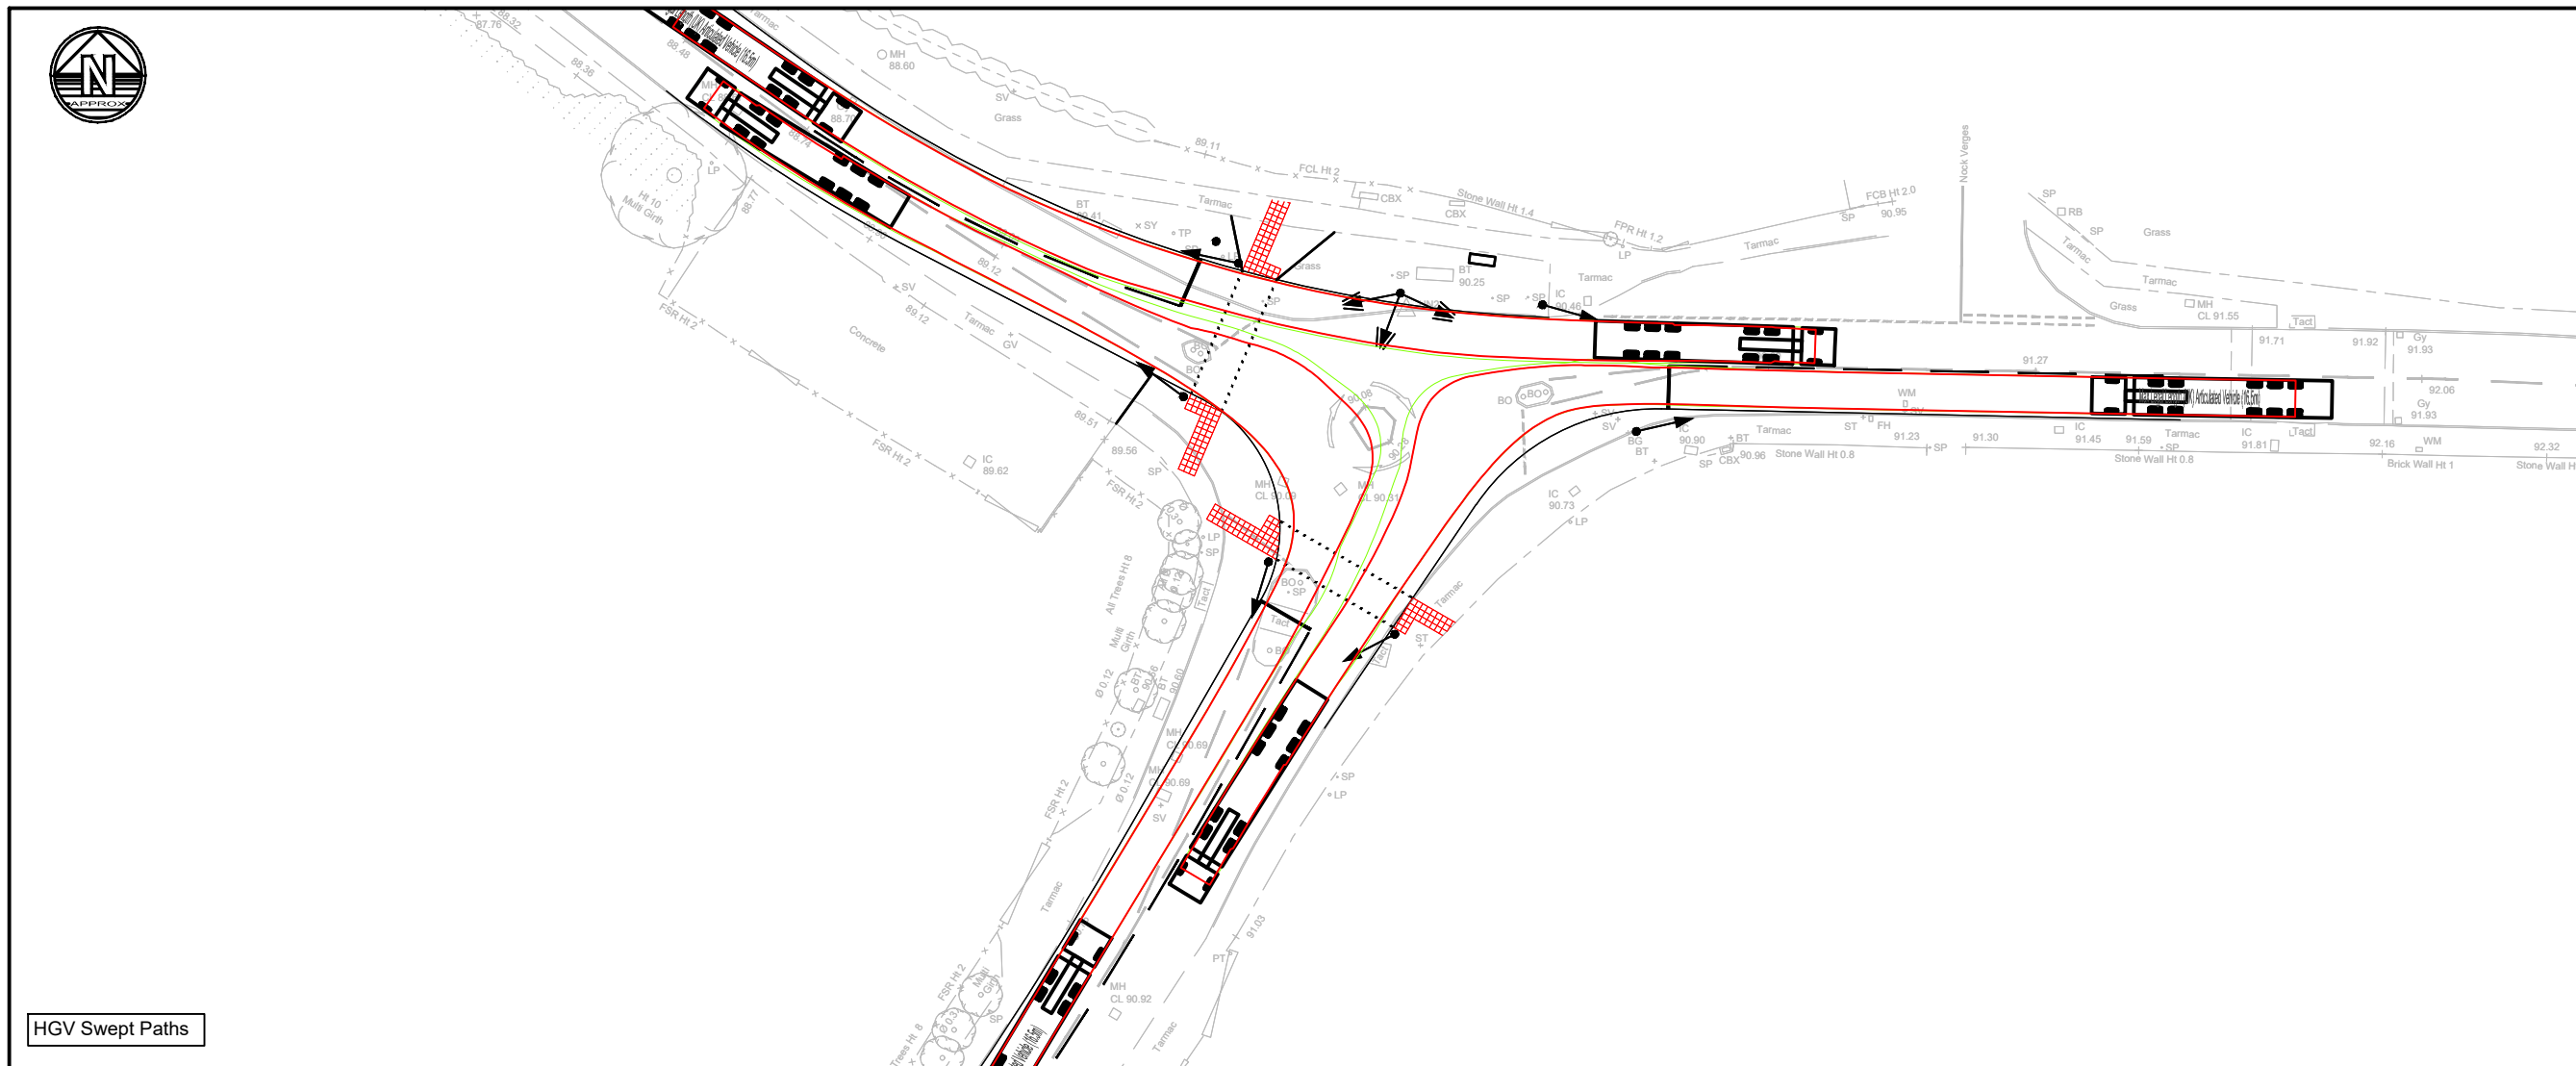

HGV Swept Paths

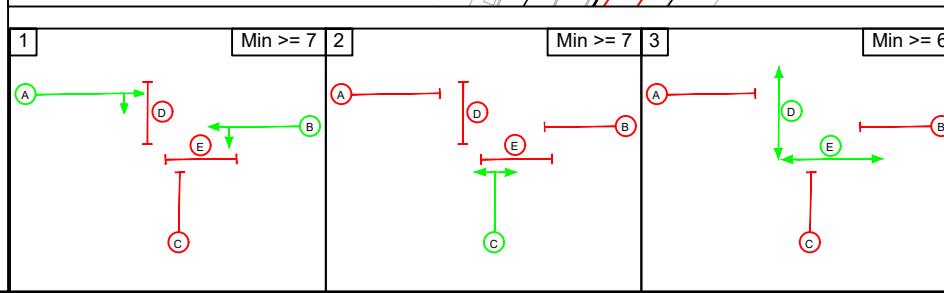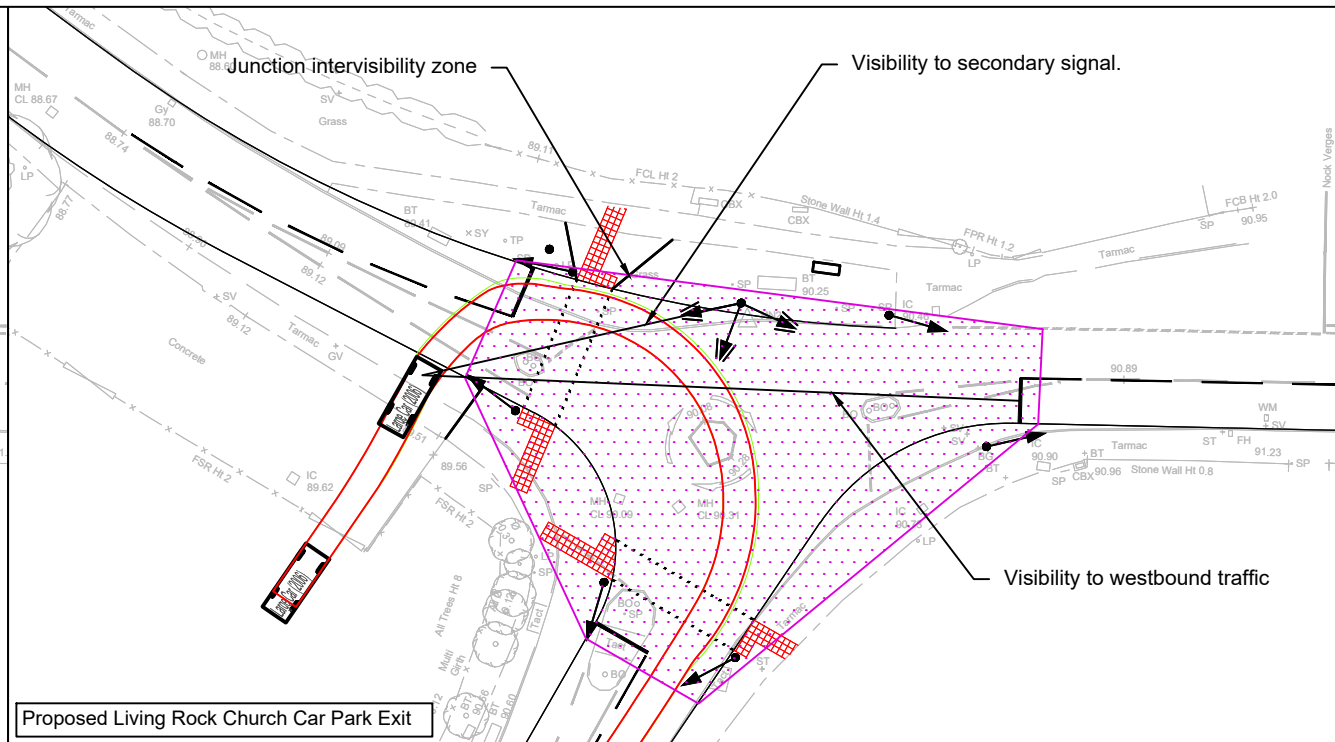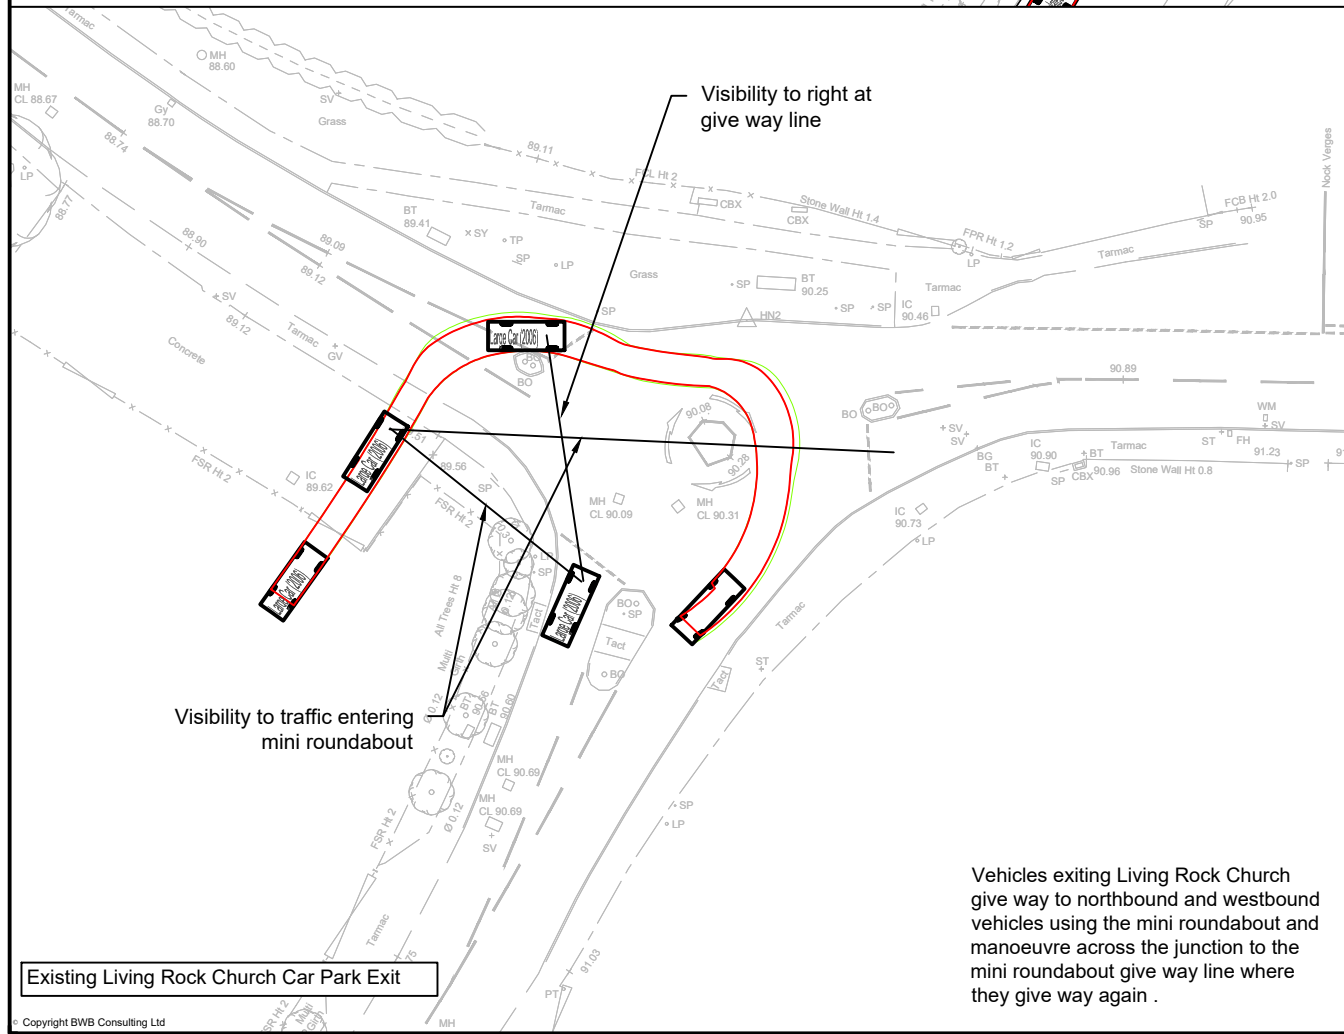

Signal Stage 1: Vehicles exiting Living Rock Church do so on the green signal for eastbound traffic which is visible from the exit. Vehicles then give way to westbound traffic only.

Signal Stage 2: Vehicles exiting Living Rock Church see a red signal and do not exit

Signal Stage 3: Vehicles exiting Living Rock Church see a red signal and do not exit

**Notes**

- Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
- This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
- All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
- Any discrepancies noted on site are to be reported to the engineer immediately.

**Legend**

Max Legal Articulated Vehicle (16.5m)	16.500m
Overall Length	2.500m
Overall Width	3.632m
Min Body Height	0.366m
Min Body Ground Clearance	2.500m
Max Track Width	6.036m
Lock to lock time	6.870m
Kerb to Kerb Turning Radius	

PO3	14.12.23	Living Rock Church details added	JM	SC
PO2	07.12.23	Updated to suit topo survey	JM	SC
P1	20.09.23	PRELIMINARY ISSUE	AJ	MA
Rev	Date	Details of issue / revision	Dnw	Rev

**Issues & Revisions**

**BWB**  
CONSULTANCY | ENVIRONMENT  
INFRASTRUCTURE | BUILDINGS

Client

**TRITAX SYMMETRY  
(HINCKLEY) LIMITED**

Project Title

**HINCKLEY RAIL FREIGHT  
INTERCHANGE**

Drawing Title

**B581 / HINCKLEY ROAD /  
NEW ROAD PROPOSED  
SIGNALS  
(SWEEP PATHS)**

Drawn: AJ Oakes      Reviewed: Malcolm Ash

BWB Ref: NTT 2814      Date: 20.09.23      Scale: A3: 1:500


Drawing Status

**PRELIMINARY**


Project - Originator - Zone - Level - Type - Role - Number      Status      Rev

HRF-BWB-GEN-XX-DR-TR-124      S2      P03




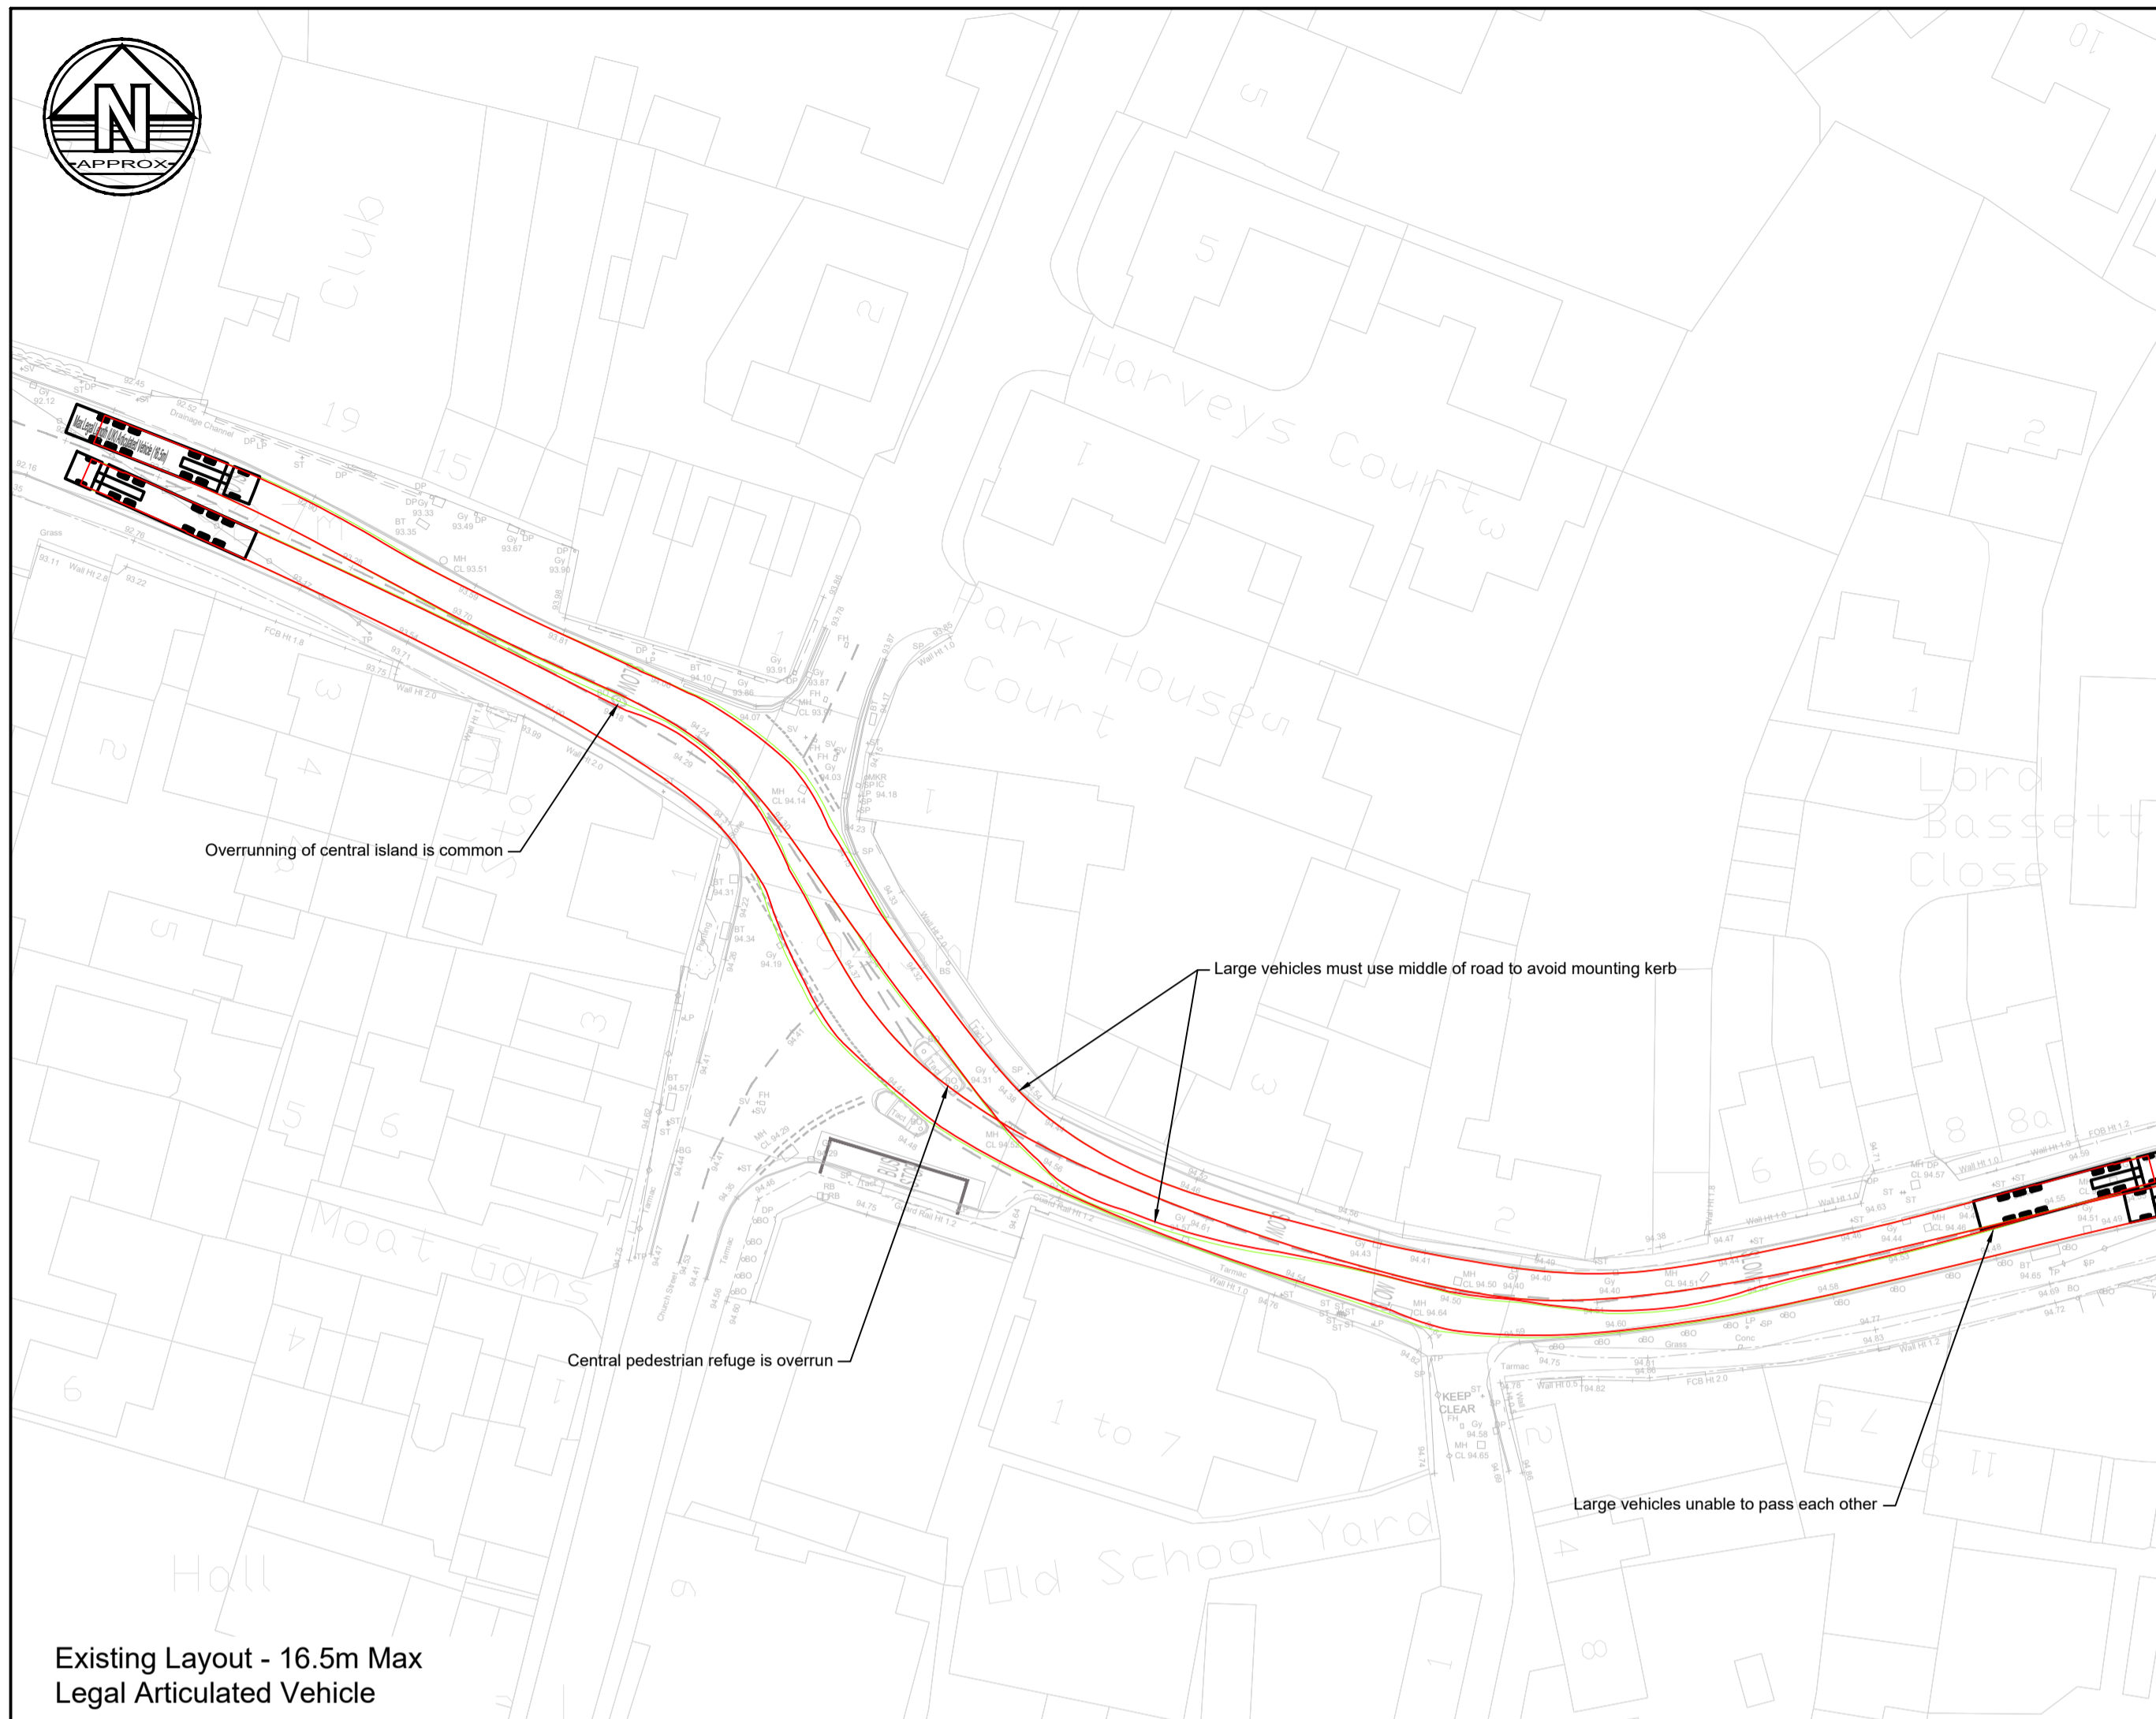


Existing Layout - 16.5m Max Legal Articulated Vehicle

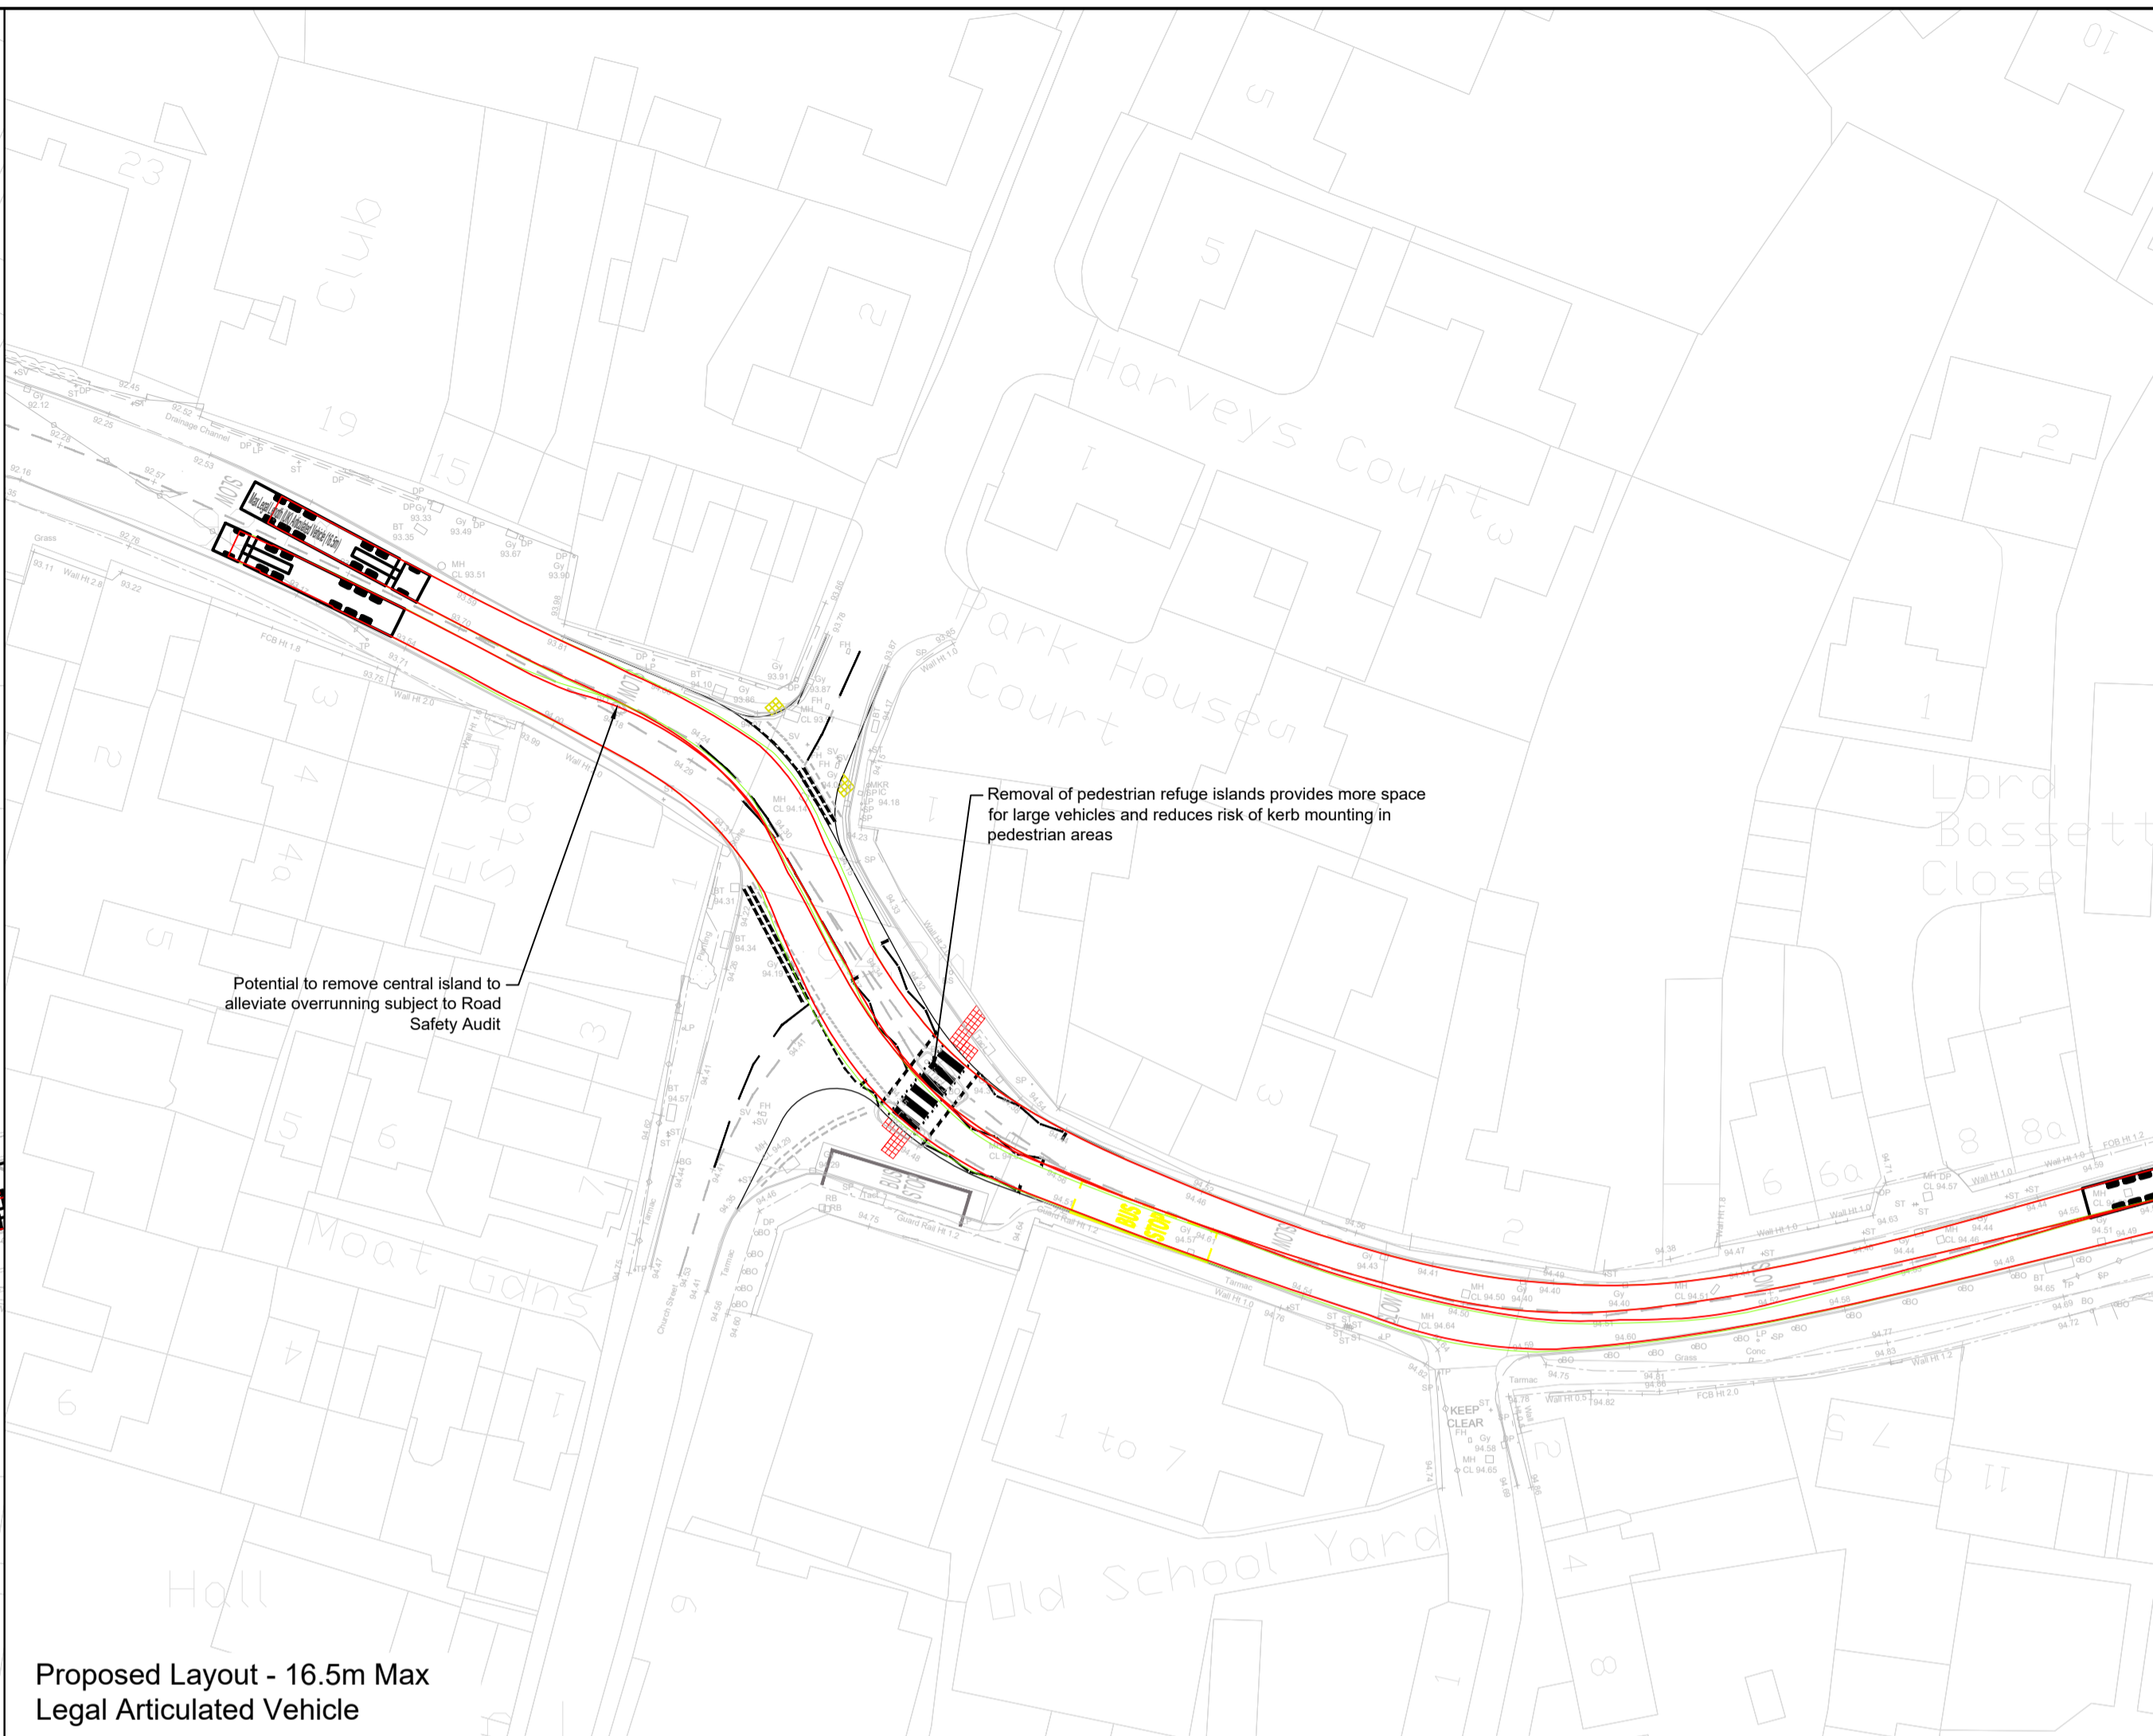

Proposed Layout - 16.5m Max Legal Articulated Vehicle

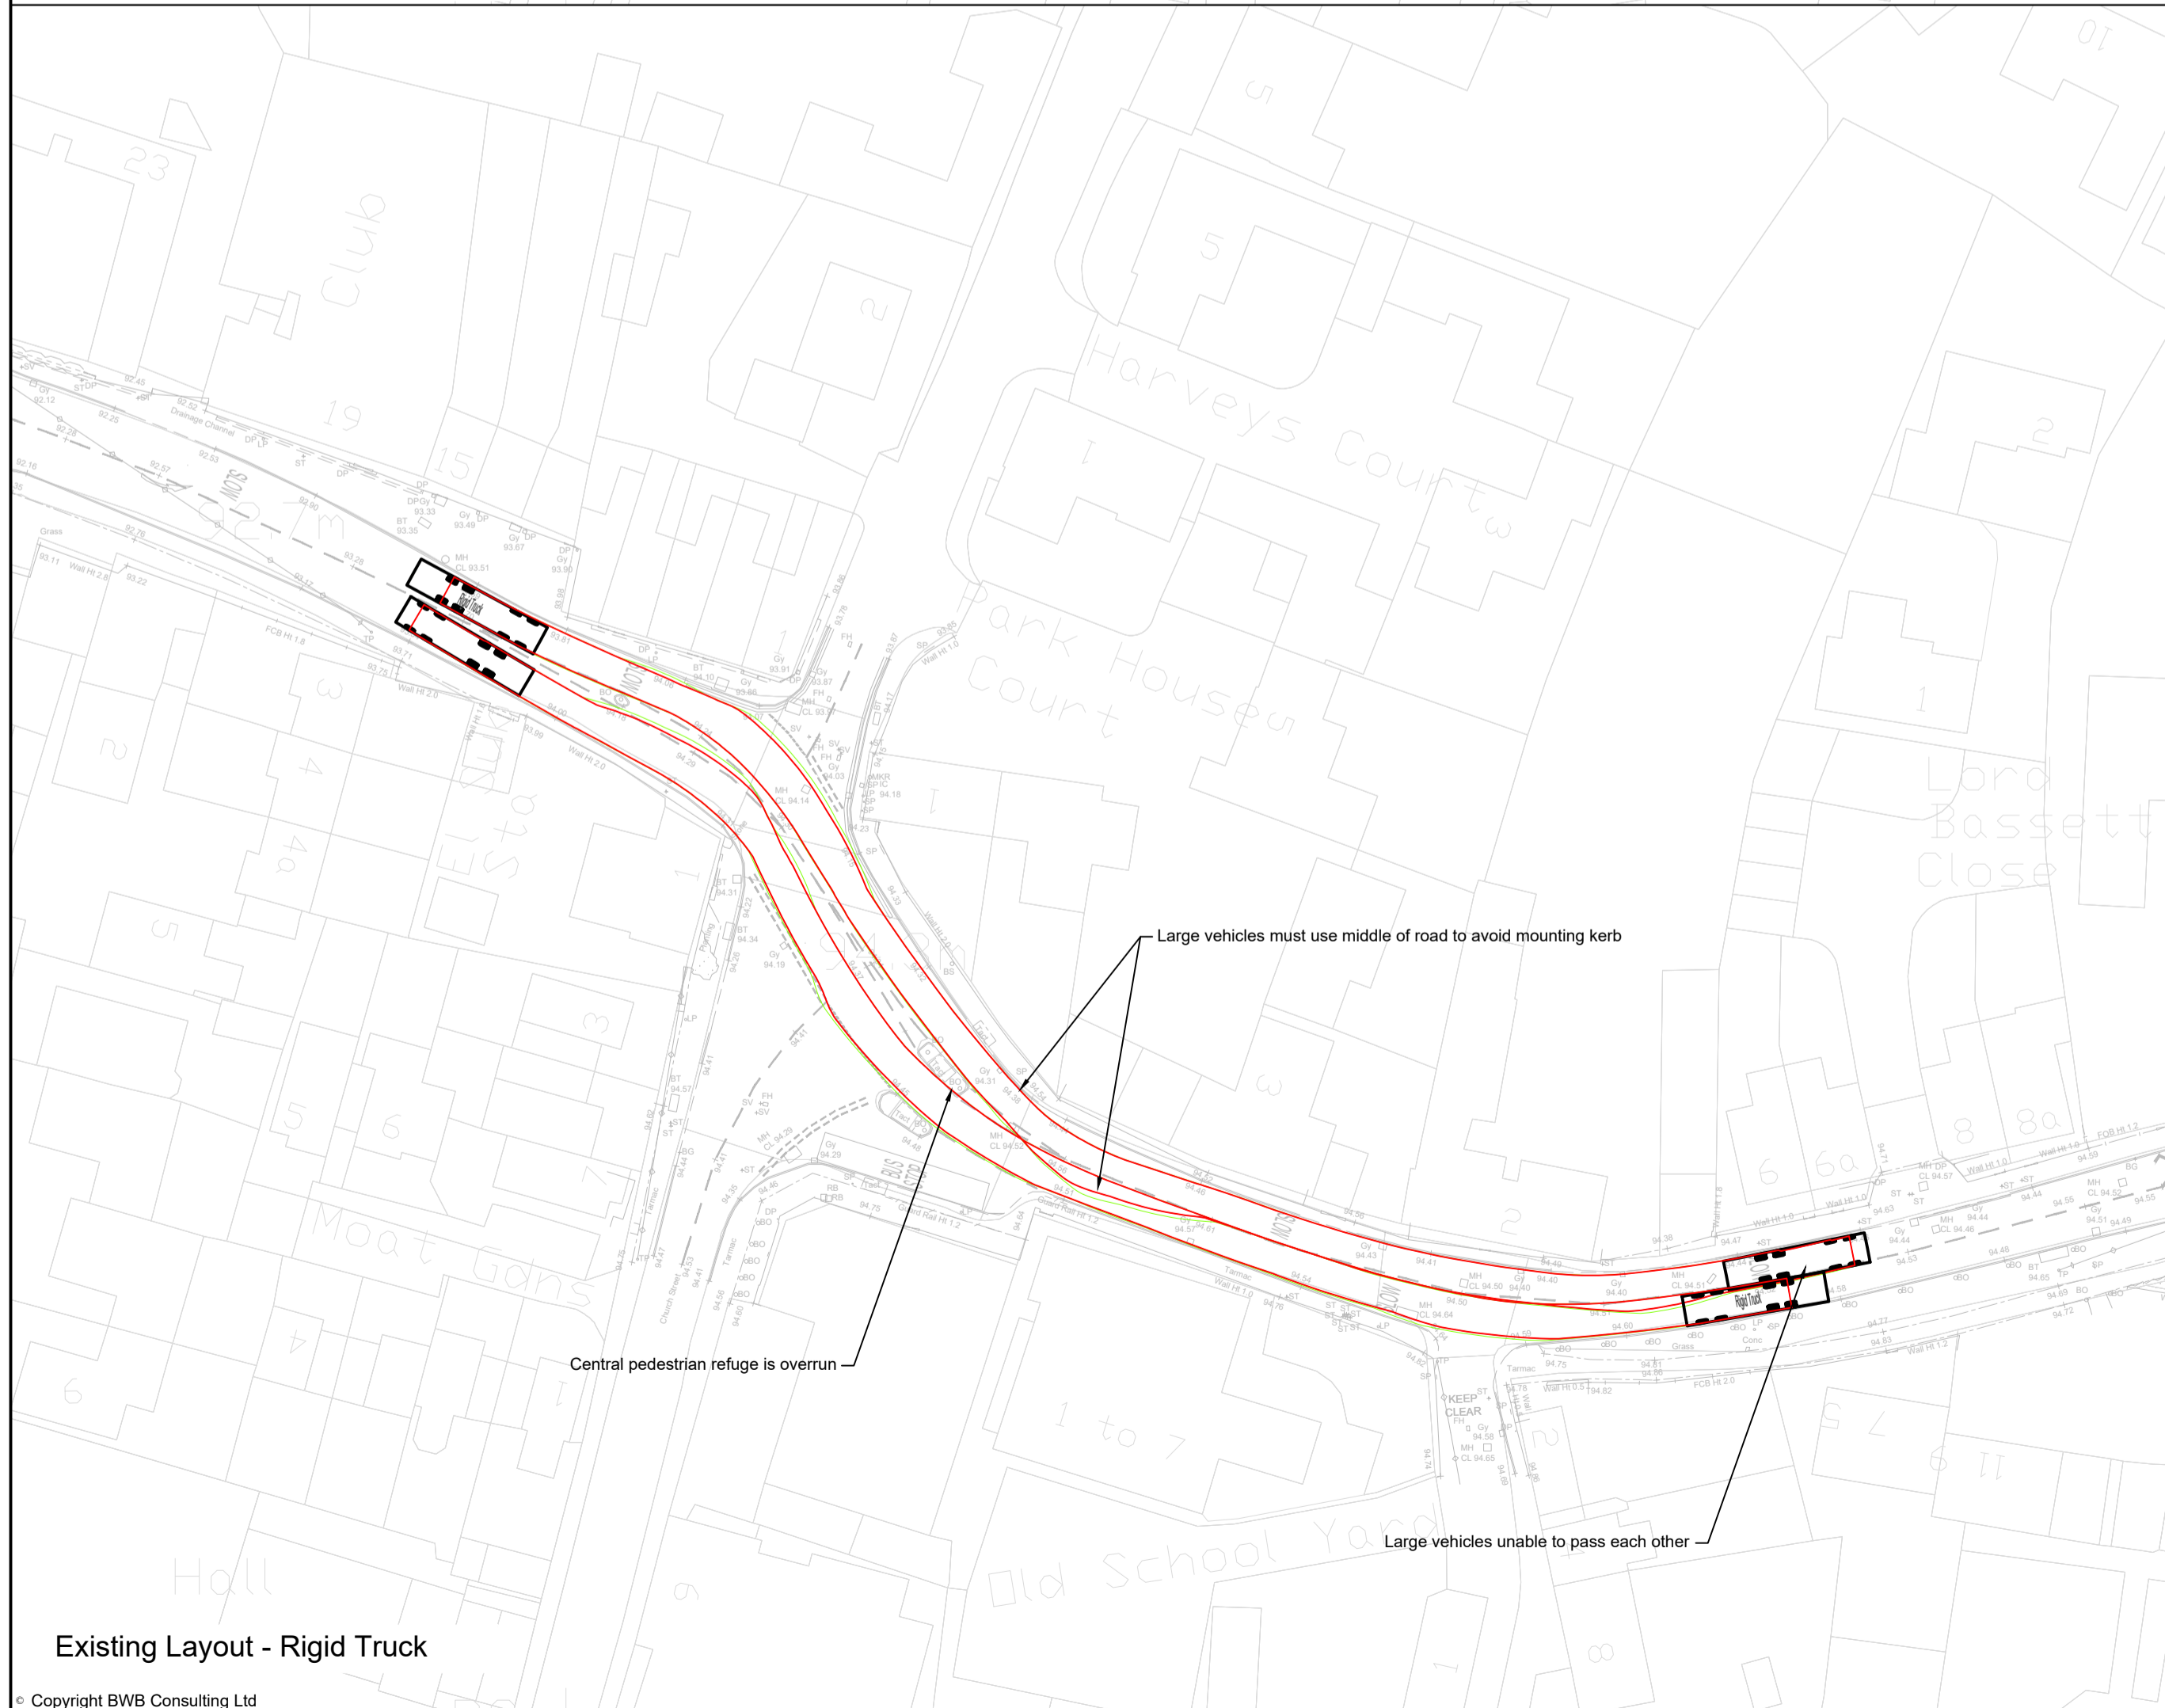


Existing Layout - Rigid Truck

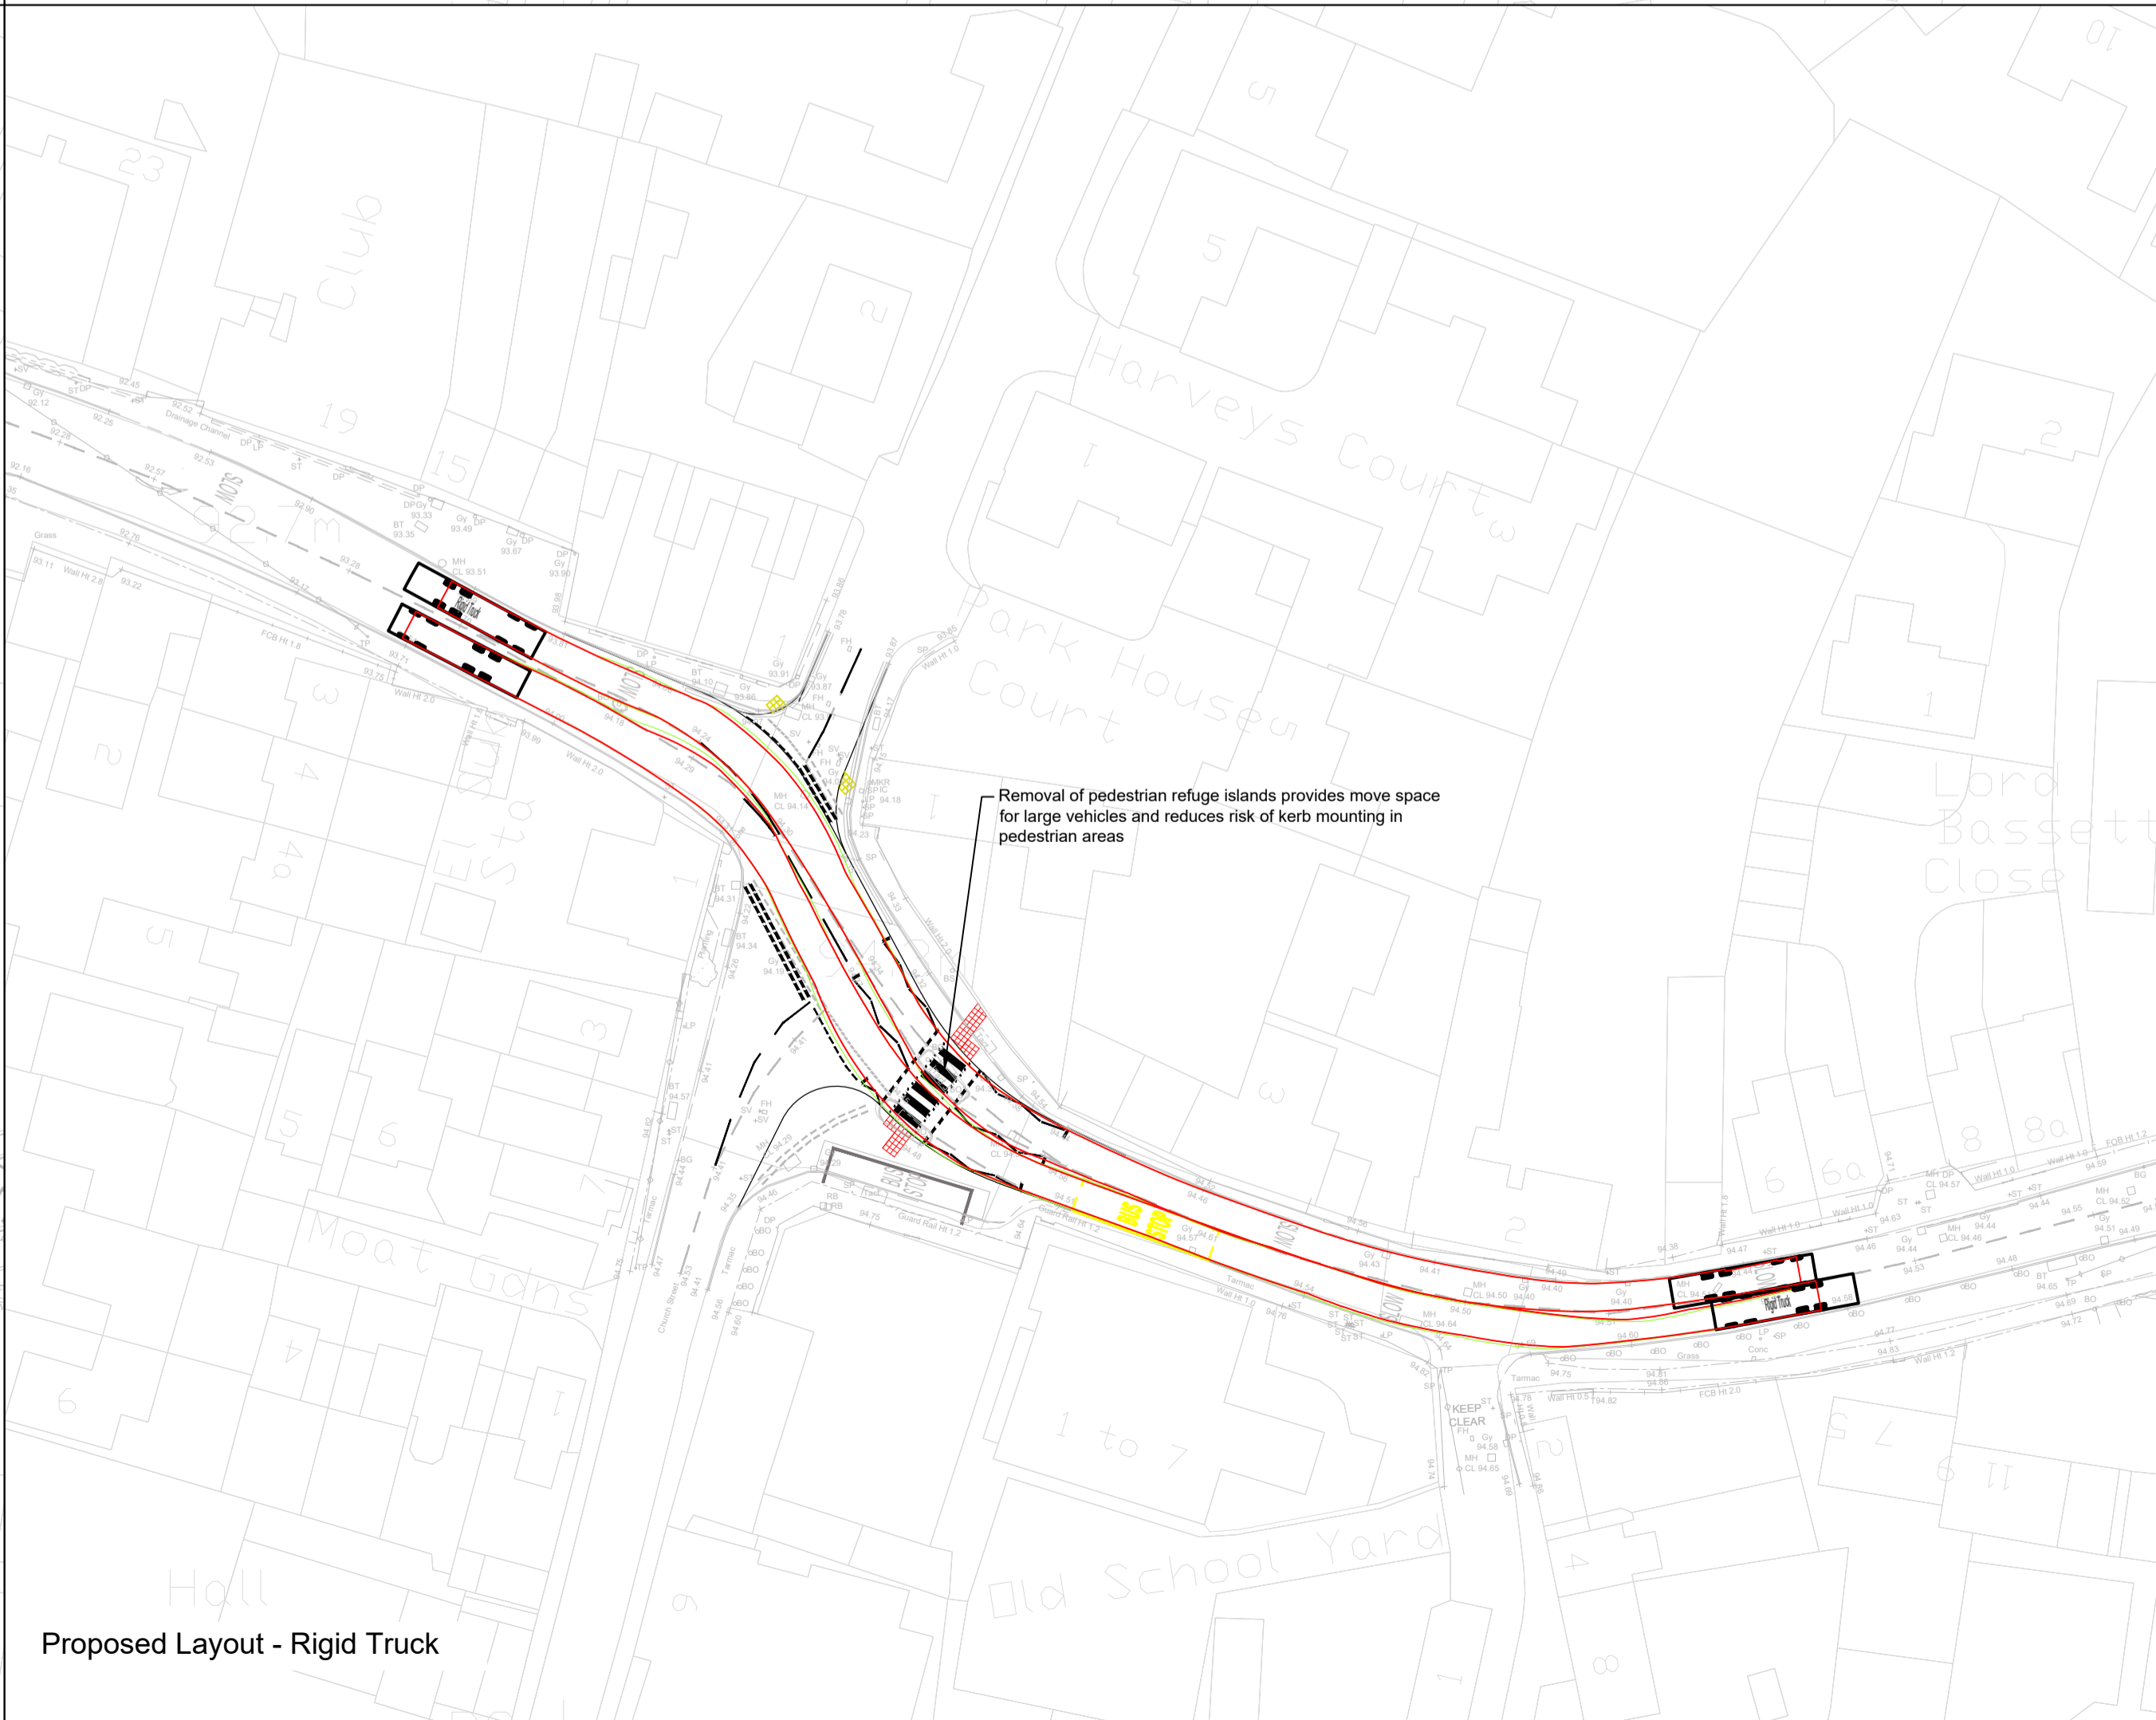

Proposed Layout - Rigid Truck

- Notes**
- Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
  - This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
  - All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
  - Any discrepancies noted on site are to be reported to the engineer immediately.

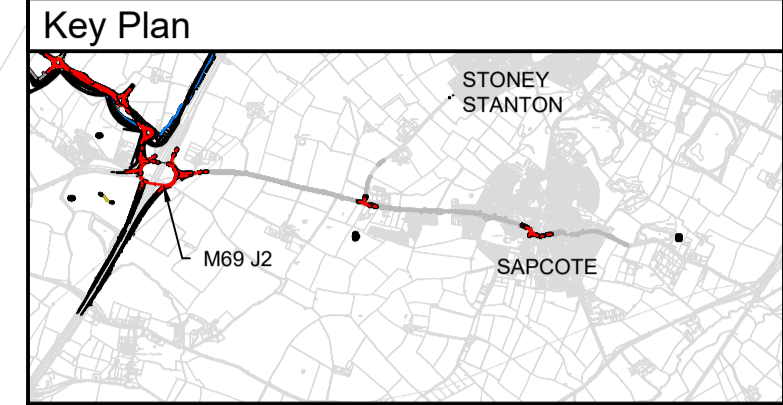

**Legend**

Max Legal Length (UK) Articulated Vehicle (16.5m)  
 Overall Length 16.500m  
 Overall Width 2.550m  
 Overall Body Height 3.681m  
 Min Body Ground Clearance 0.411m  
 Max Track Width 2.500m  
 Lock to lock time 6.00s  
 Kerb to Kerb Turning Radius 6.530m

Rigid Truck  
 Overall Length 12.000m  
 Overall Width 2.500m  
 Overall Body Height 3.328m  
 Min Body Ground Clearance 0.412m  
 Track Width 2.471m  
 Lock to lock time 6.00s  
 Kerb to Kerb Turning Radius 11.900m

PO2	04.01.24	Updated to suit revised layout	SC	SRH
P01	04.11.23	Preliminary Issue	JM	SC
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100
- www.bwbconsulting.com

Client


**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

Project Title  
**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title  
**SAPCOTE VEHICLE TRACKING SHEET 1**

Drawn:	S Carter	Reviewed:	S Hilditch
BWB Ref:	NTT2814	Date:	04.11.23
Scale@A1:	1:500		
<b>PRELIMINARY</b>			
Project - Originator - Zone - Level - Type - Role - Number	Status	Rev	
HRF-BWB-GEN-XX-DR-TR-135	S2	P02	




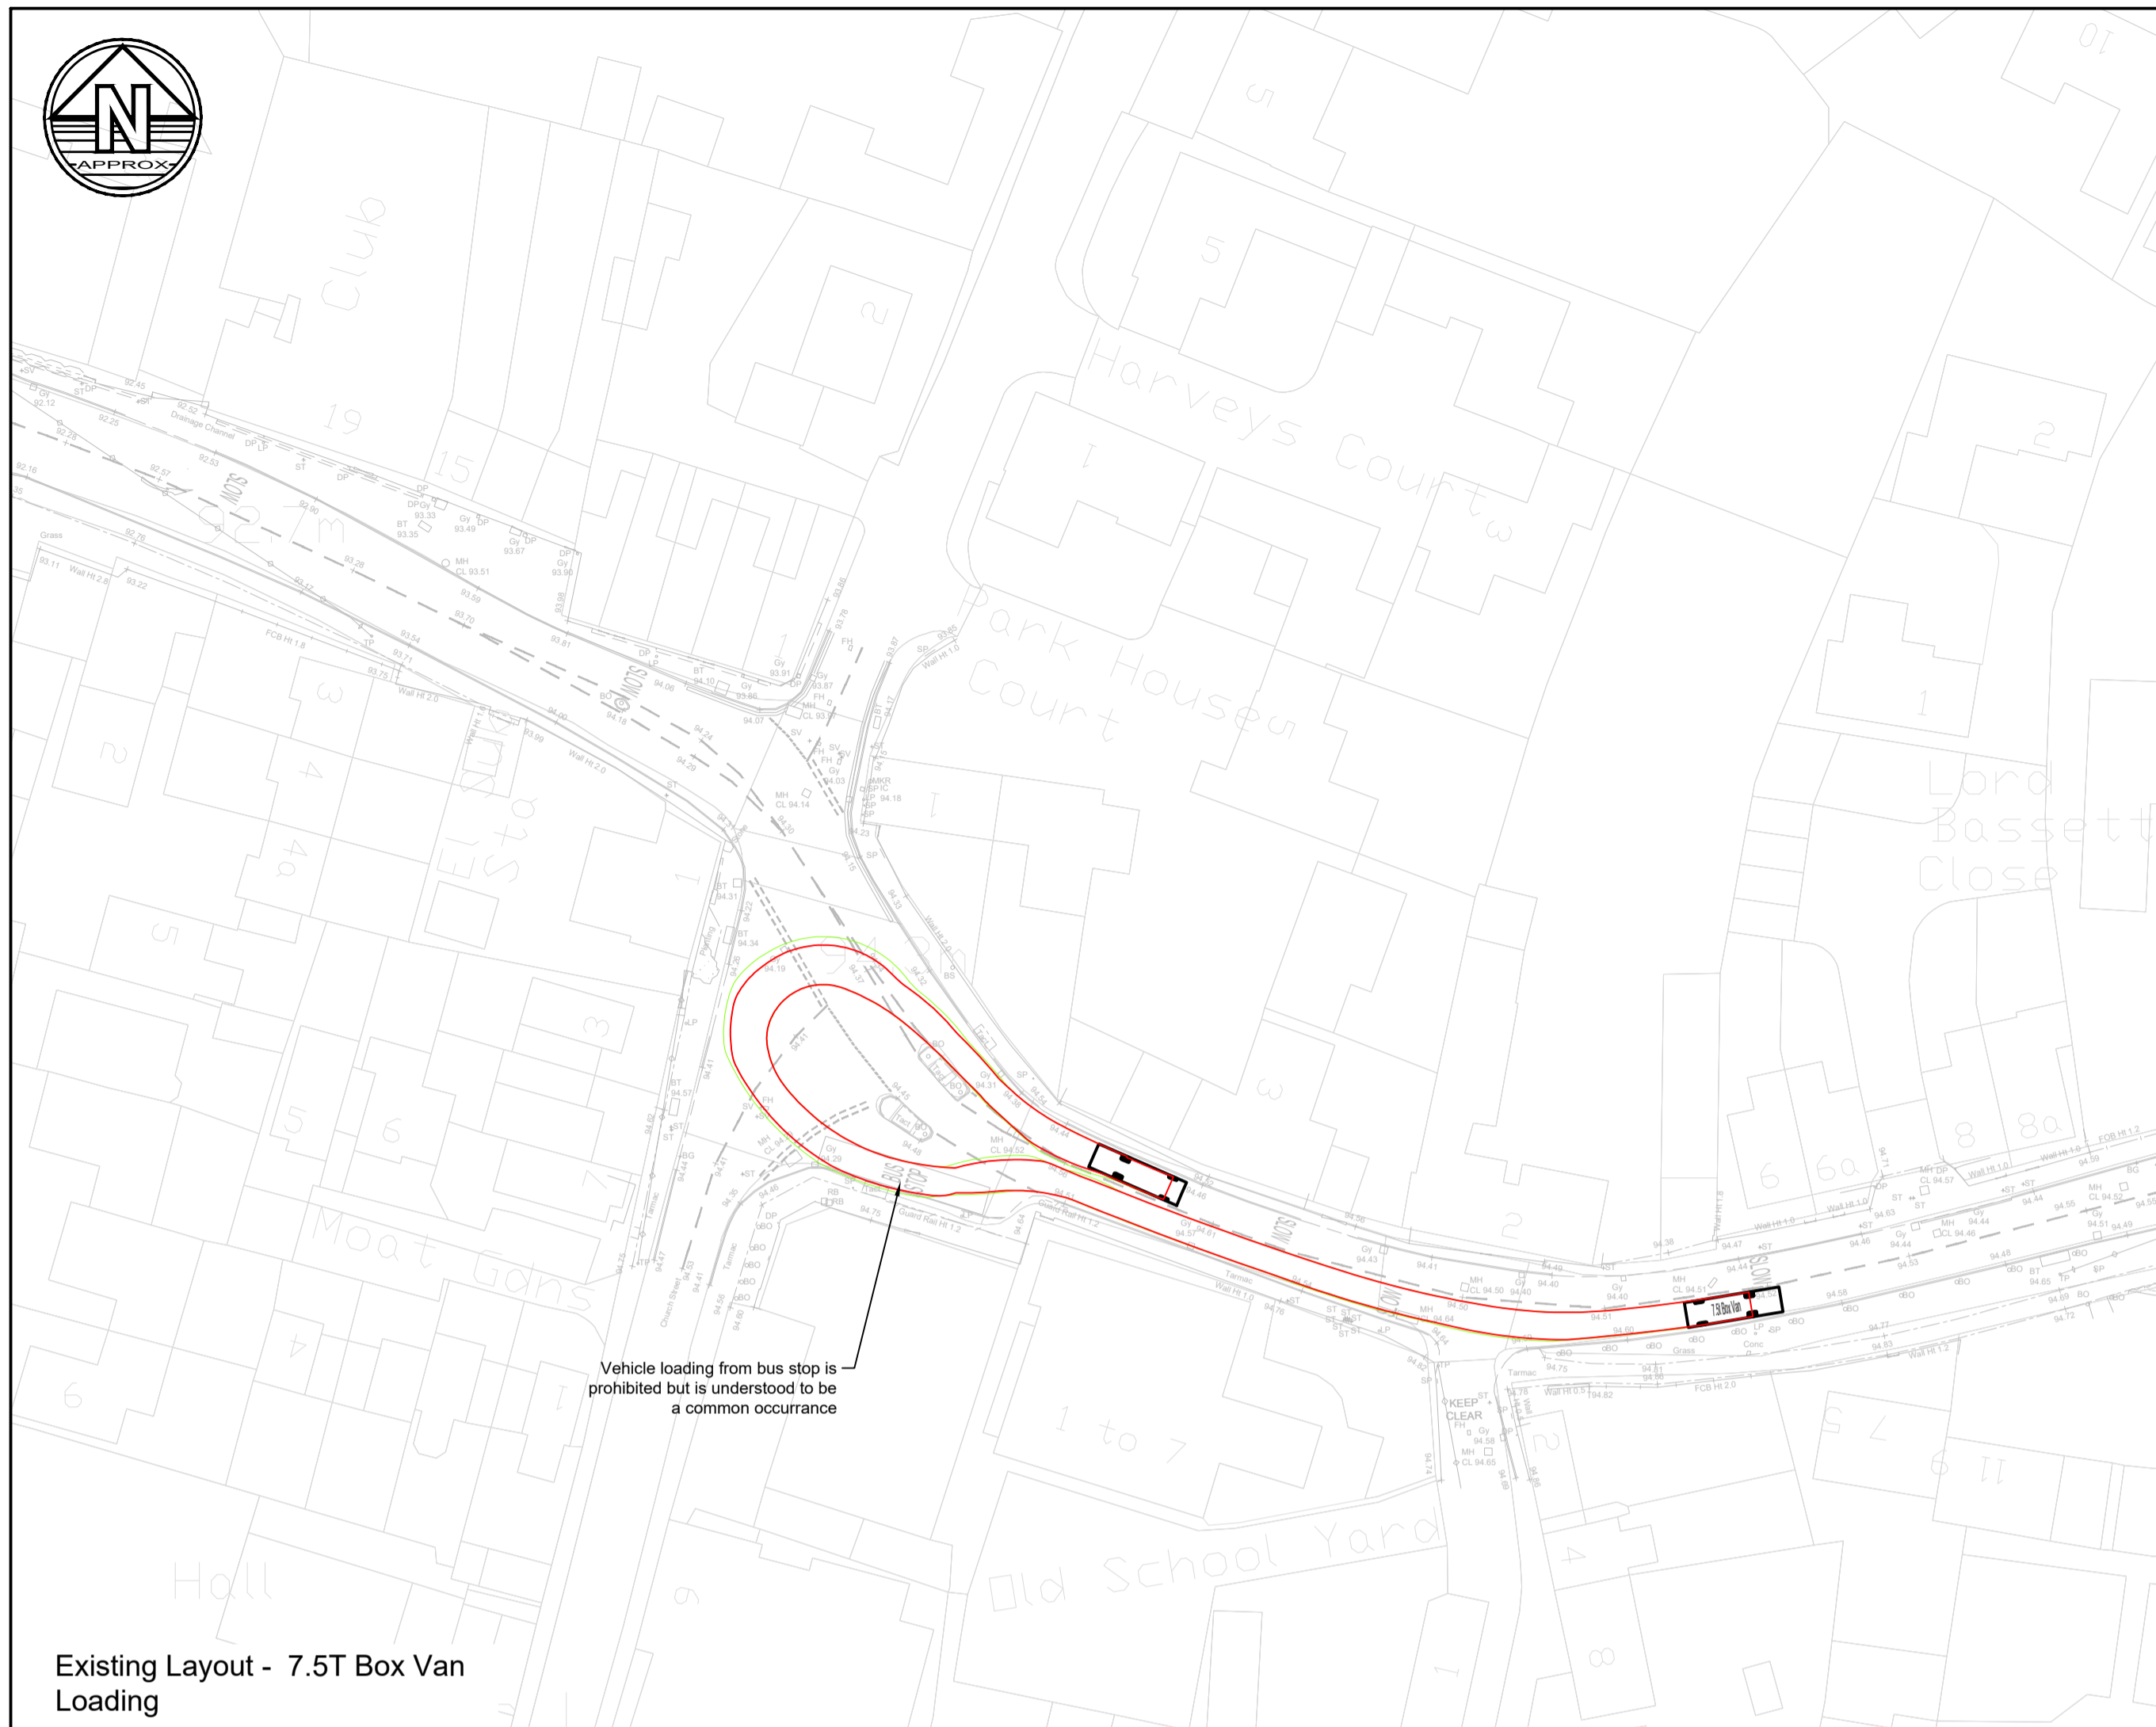


Existing Layout - 7.5T Box Van Loading



Proposed Layout - 7.5T Box Van Loading

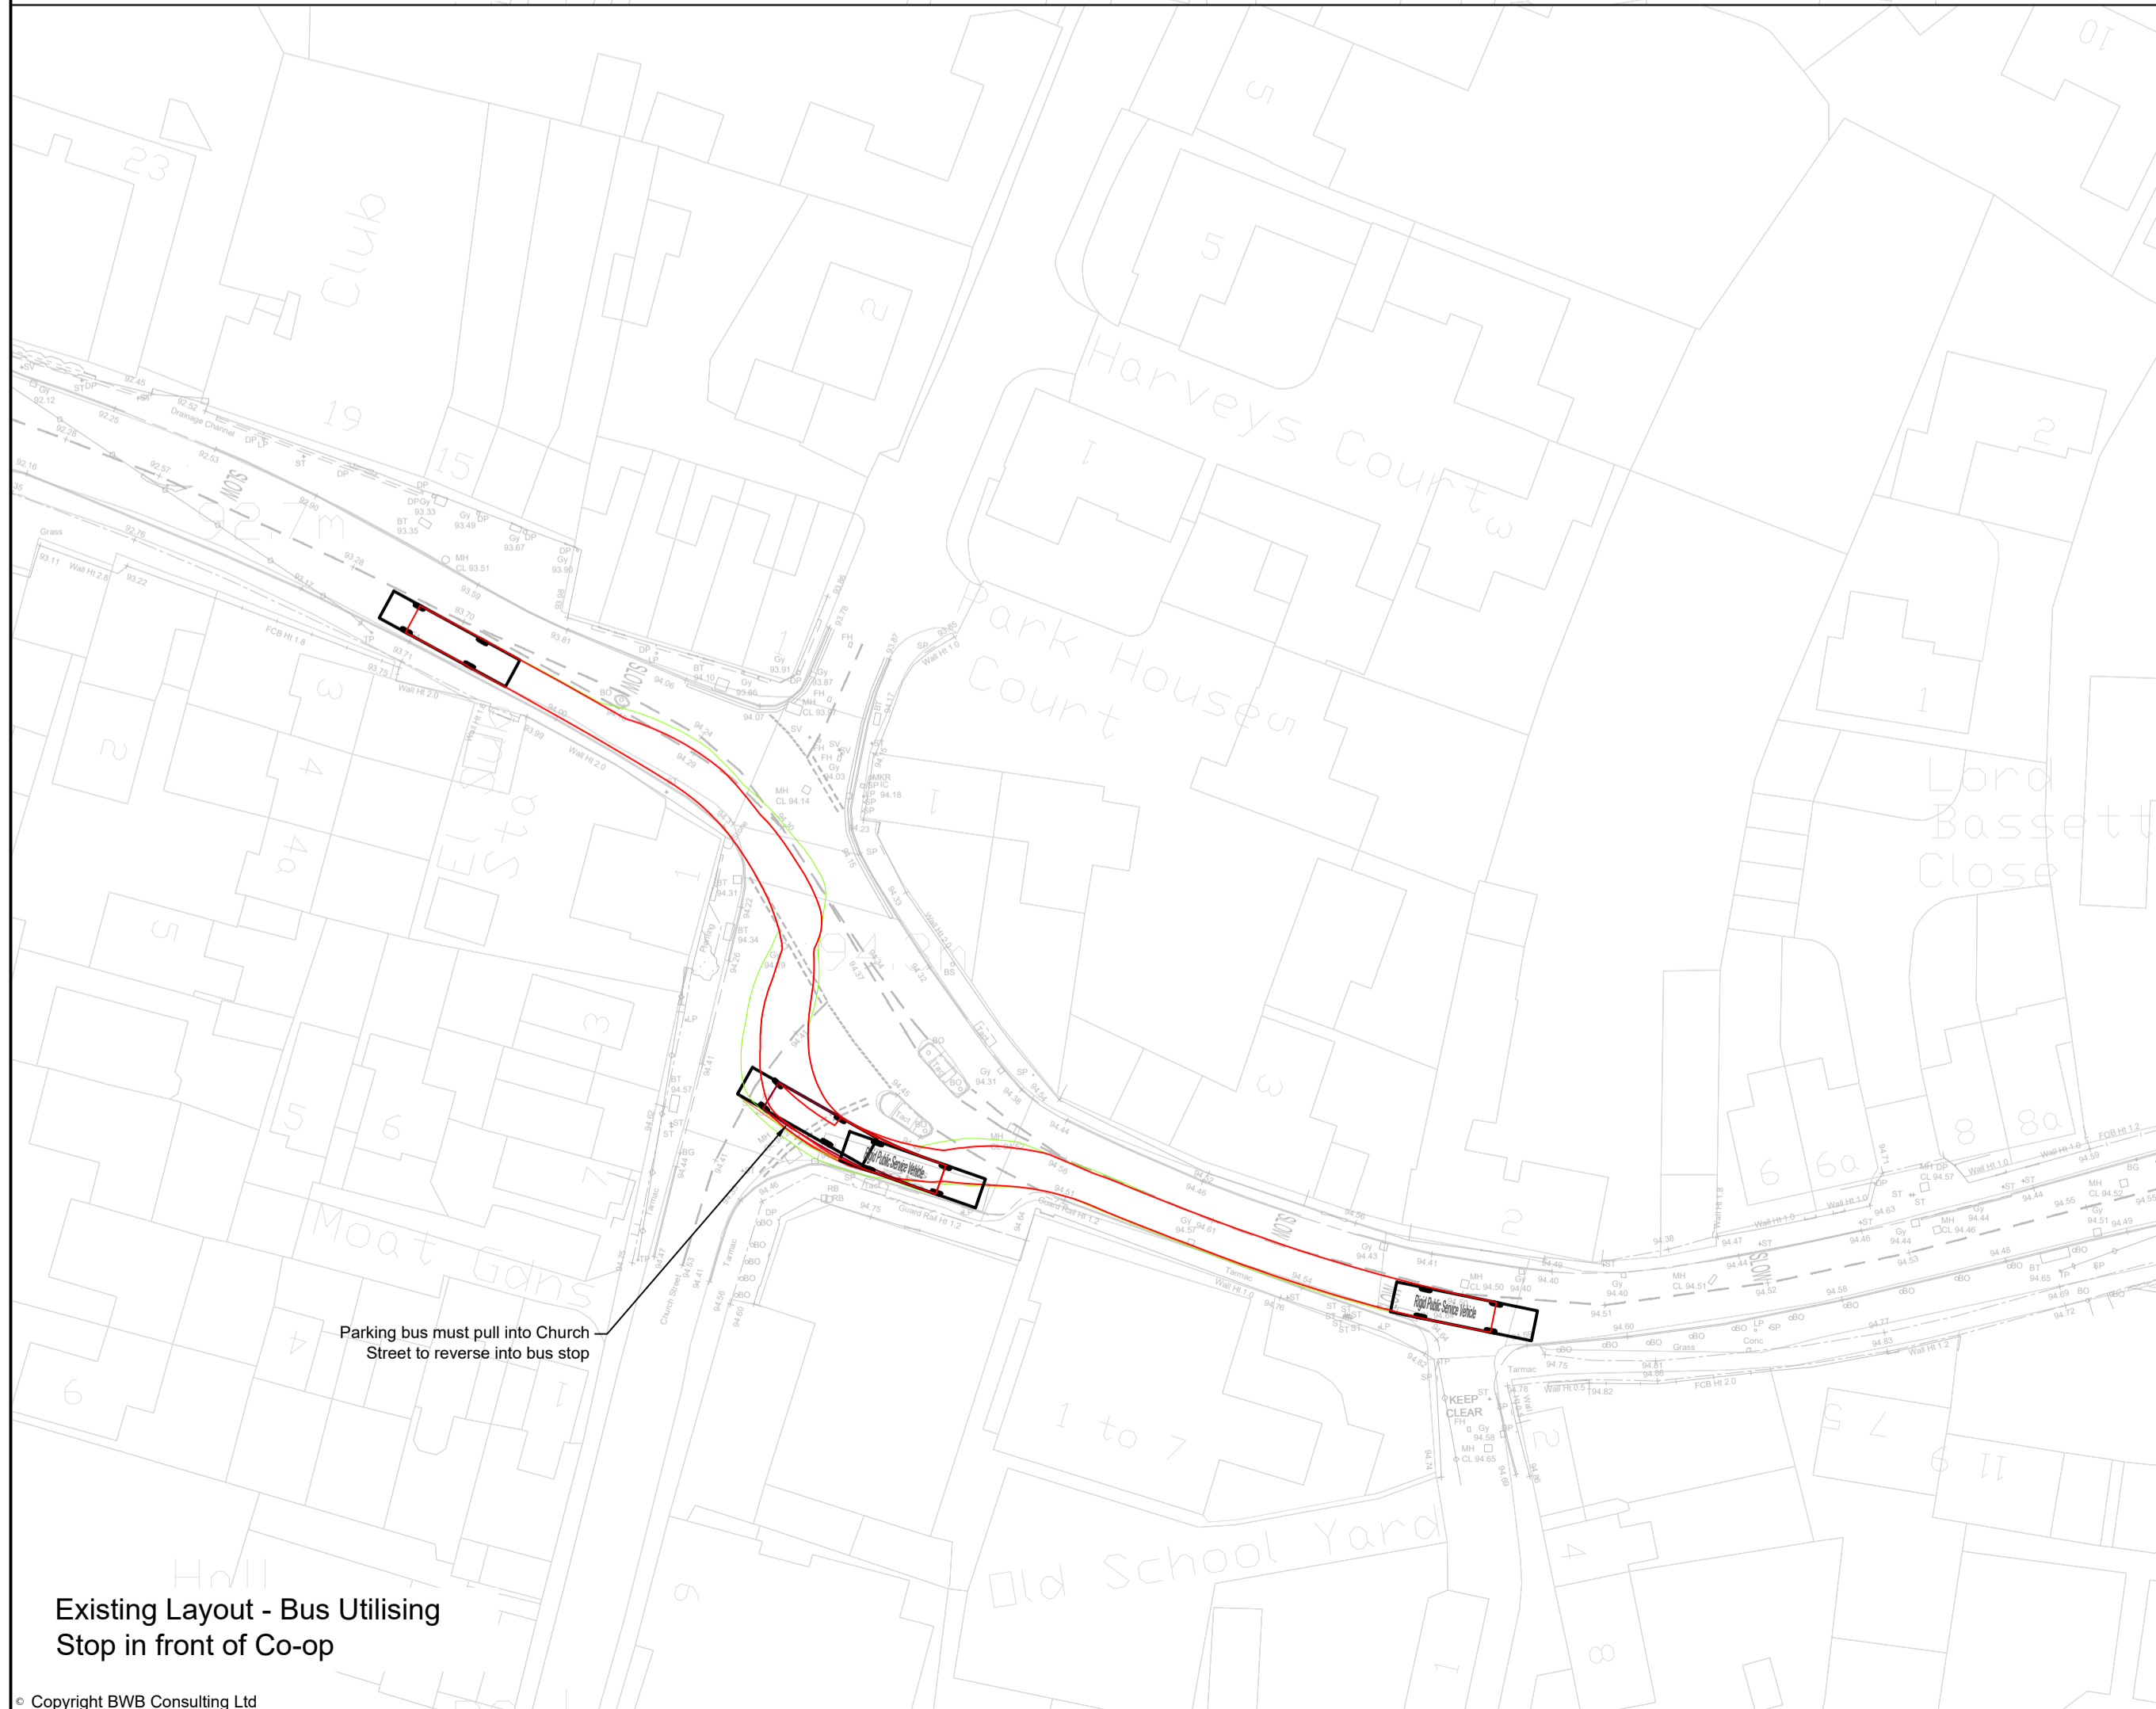

Existing Layout - Bus Utilising Stop in front of Co-op

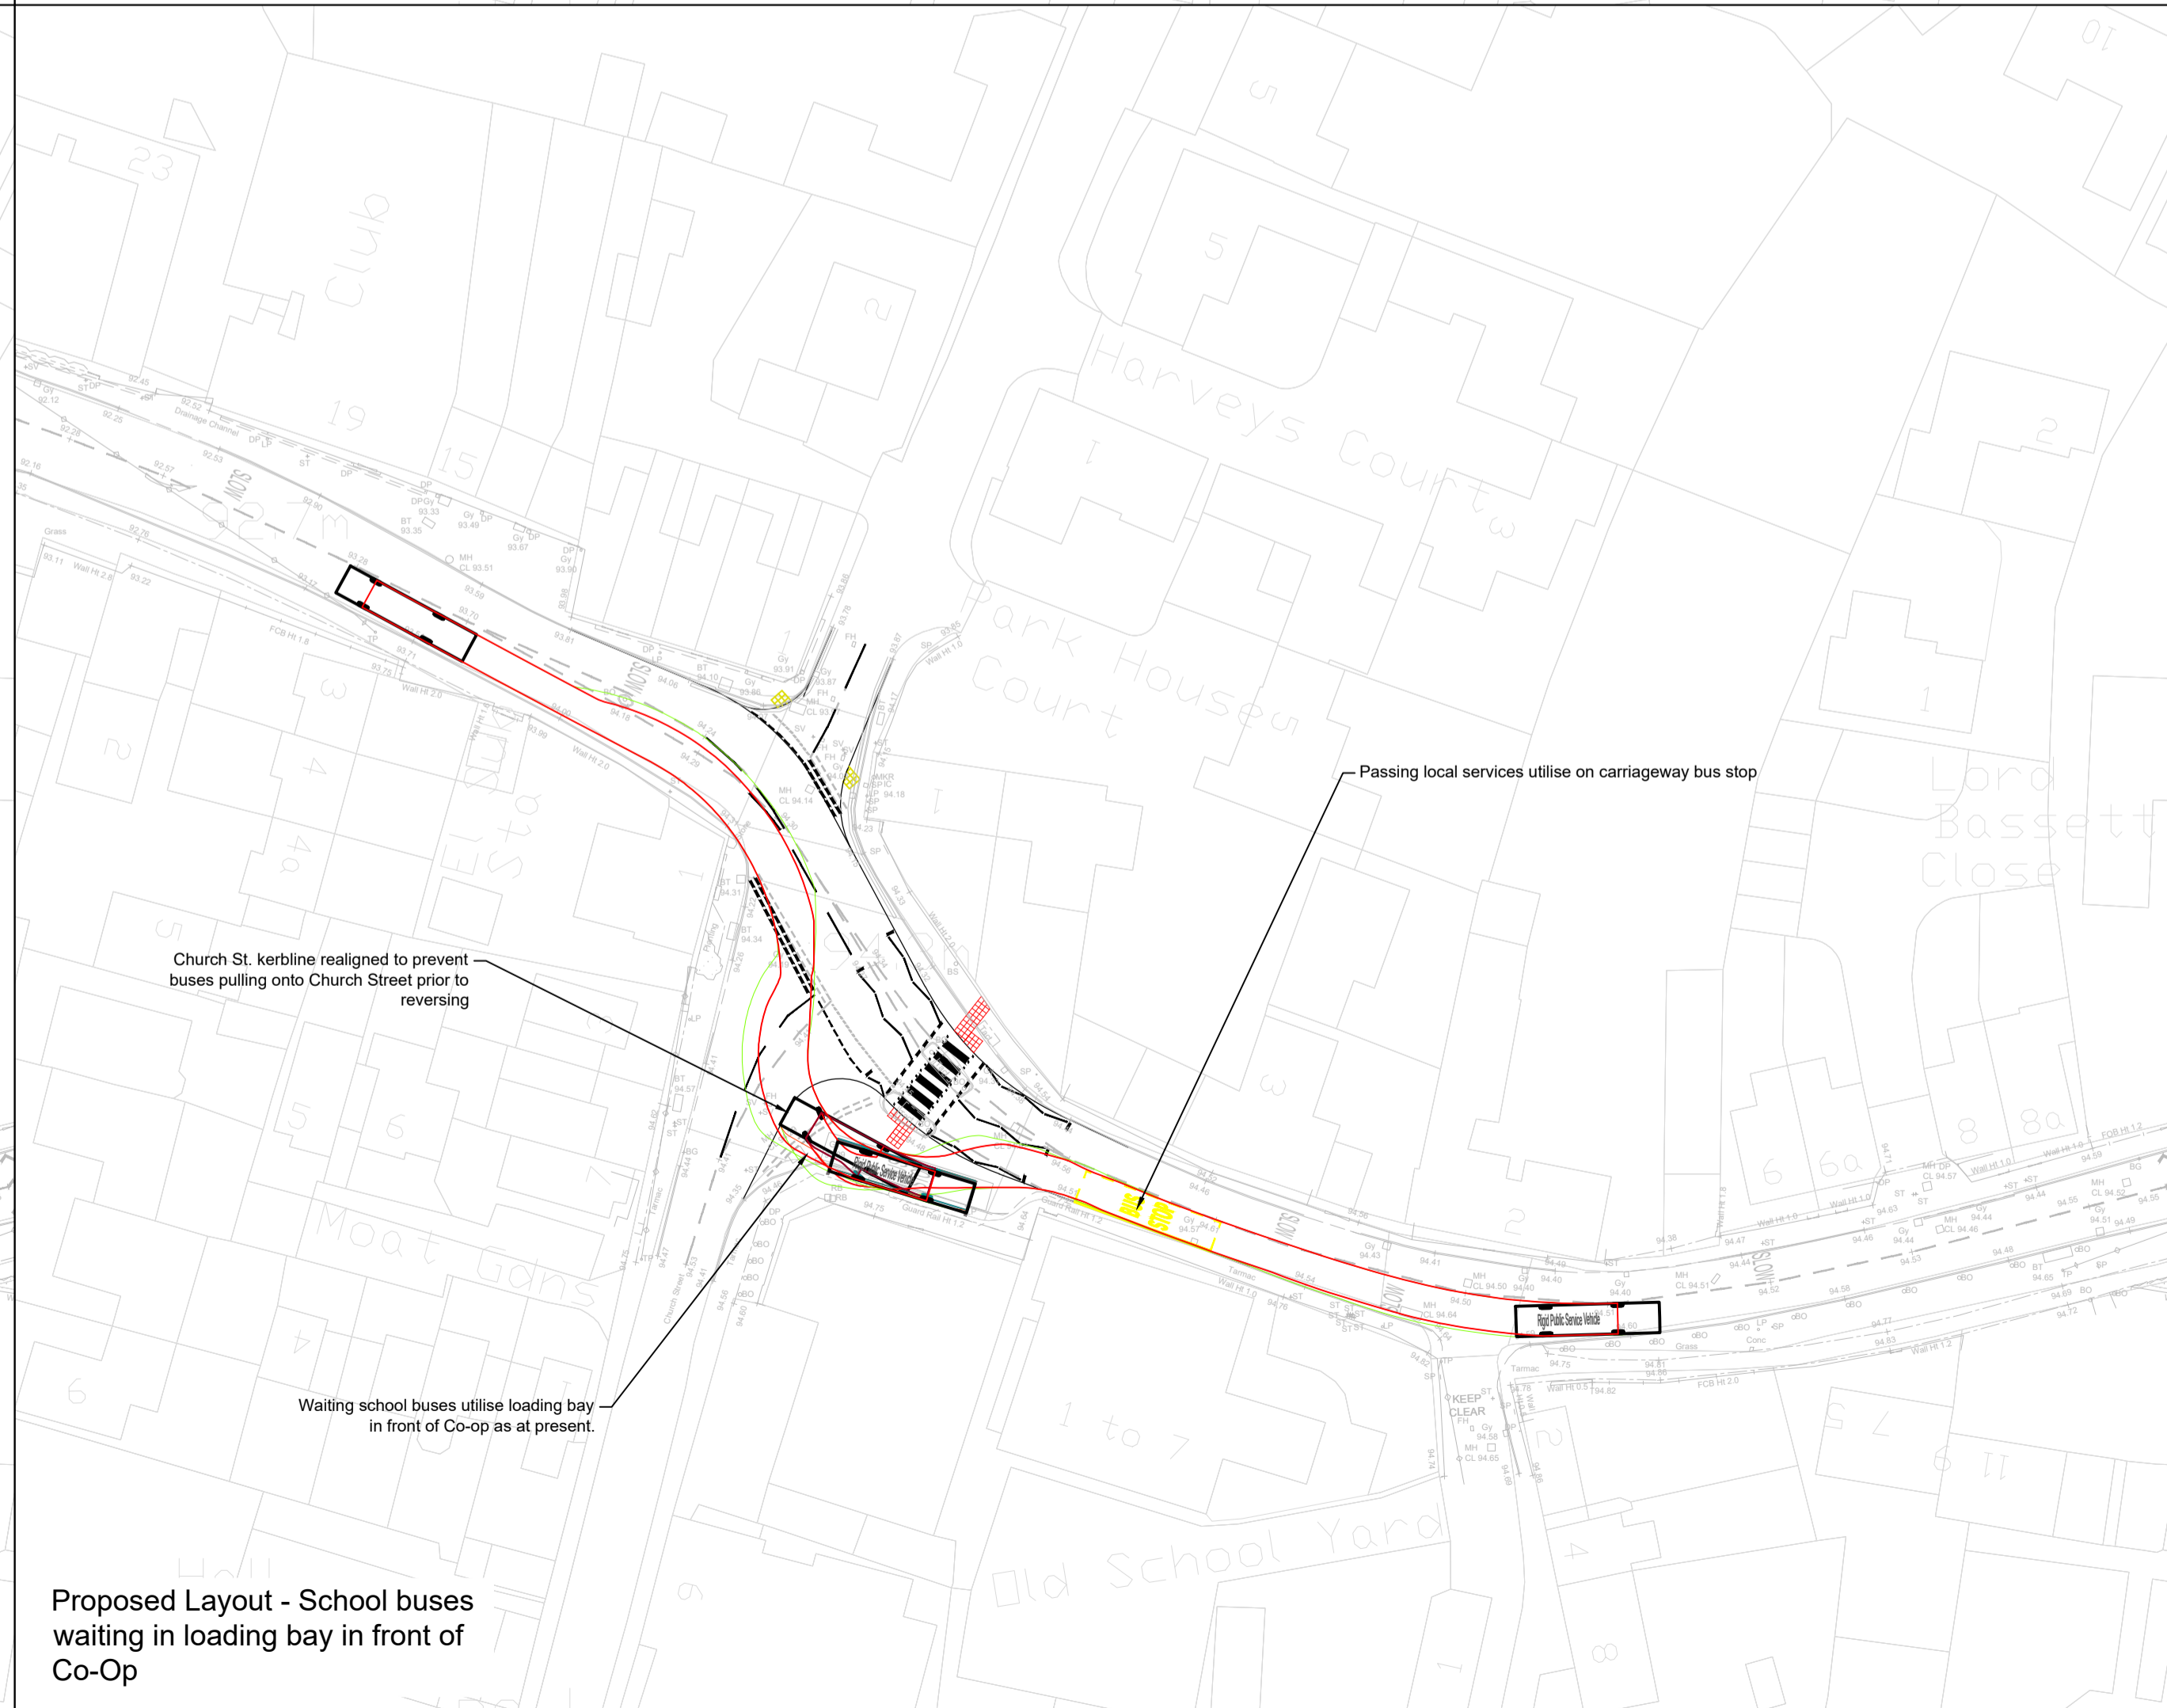

Proposed Layout - School buses waiting in loading bay in front of Co-Op

**Notes**

- Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
- This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
- All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
- Any discrepancies noted on site are to be reported to the engineer immediately.

**Key Plan**

**Legend**

	8.010m
Overall Length	2.100m
Overall Width	3.356m
Overall Body Height	0.351m
Min Body Ground Clearance	2.064m
Track Width	4.00m
Lock to lock time	7.400m
Kerb to Kerb Turning Radius	

	12.000m
Overall Length	2.550m
Overall Width	4.173m
Overall Body Height	0.344m
Min Body Ground Clearance	2.550m
Track Width	4.00m
Lock to lock time	10.500m
Kerb to Kerb Turning Radius	

P01	04.01.24	Preliminary Issue	SC	SRH
Rev	Date	Details of issue / revision	Drw	Rev

**Issues & Revisions**

**BWB**  
A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100
- www.bwbconsulting.com

**Client**

**TRITAX SYMMETRY**  
A TRITAX BIG BOX COMPANY

**Project Title**

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

**Drawing Title**

**SAPCOTE VEHICLE TRACKING SHEET 2**

Drawn:	S Carter	Reviewed:	S Hilditch
BWB Ref:	ntt2814	Date:	04.01.24
Scale@A1:	1:500		


**Drawing Status**

**PRELIMINARY**


Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-GEN-XX-DR-TR-136	S2	P01

© Copyright BWB Consulting Ltd  
X:\NTT\NTT2814\_Hinckley Rail Freight Interchange\02\_Preliminary\01\_WIP\Drawings\Other drawings\HRF-BWB-GEN-XX-DR-TR-136 - Sapcote Swept paths.dwg



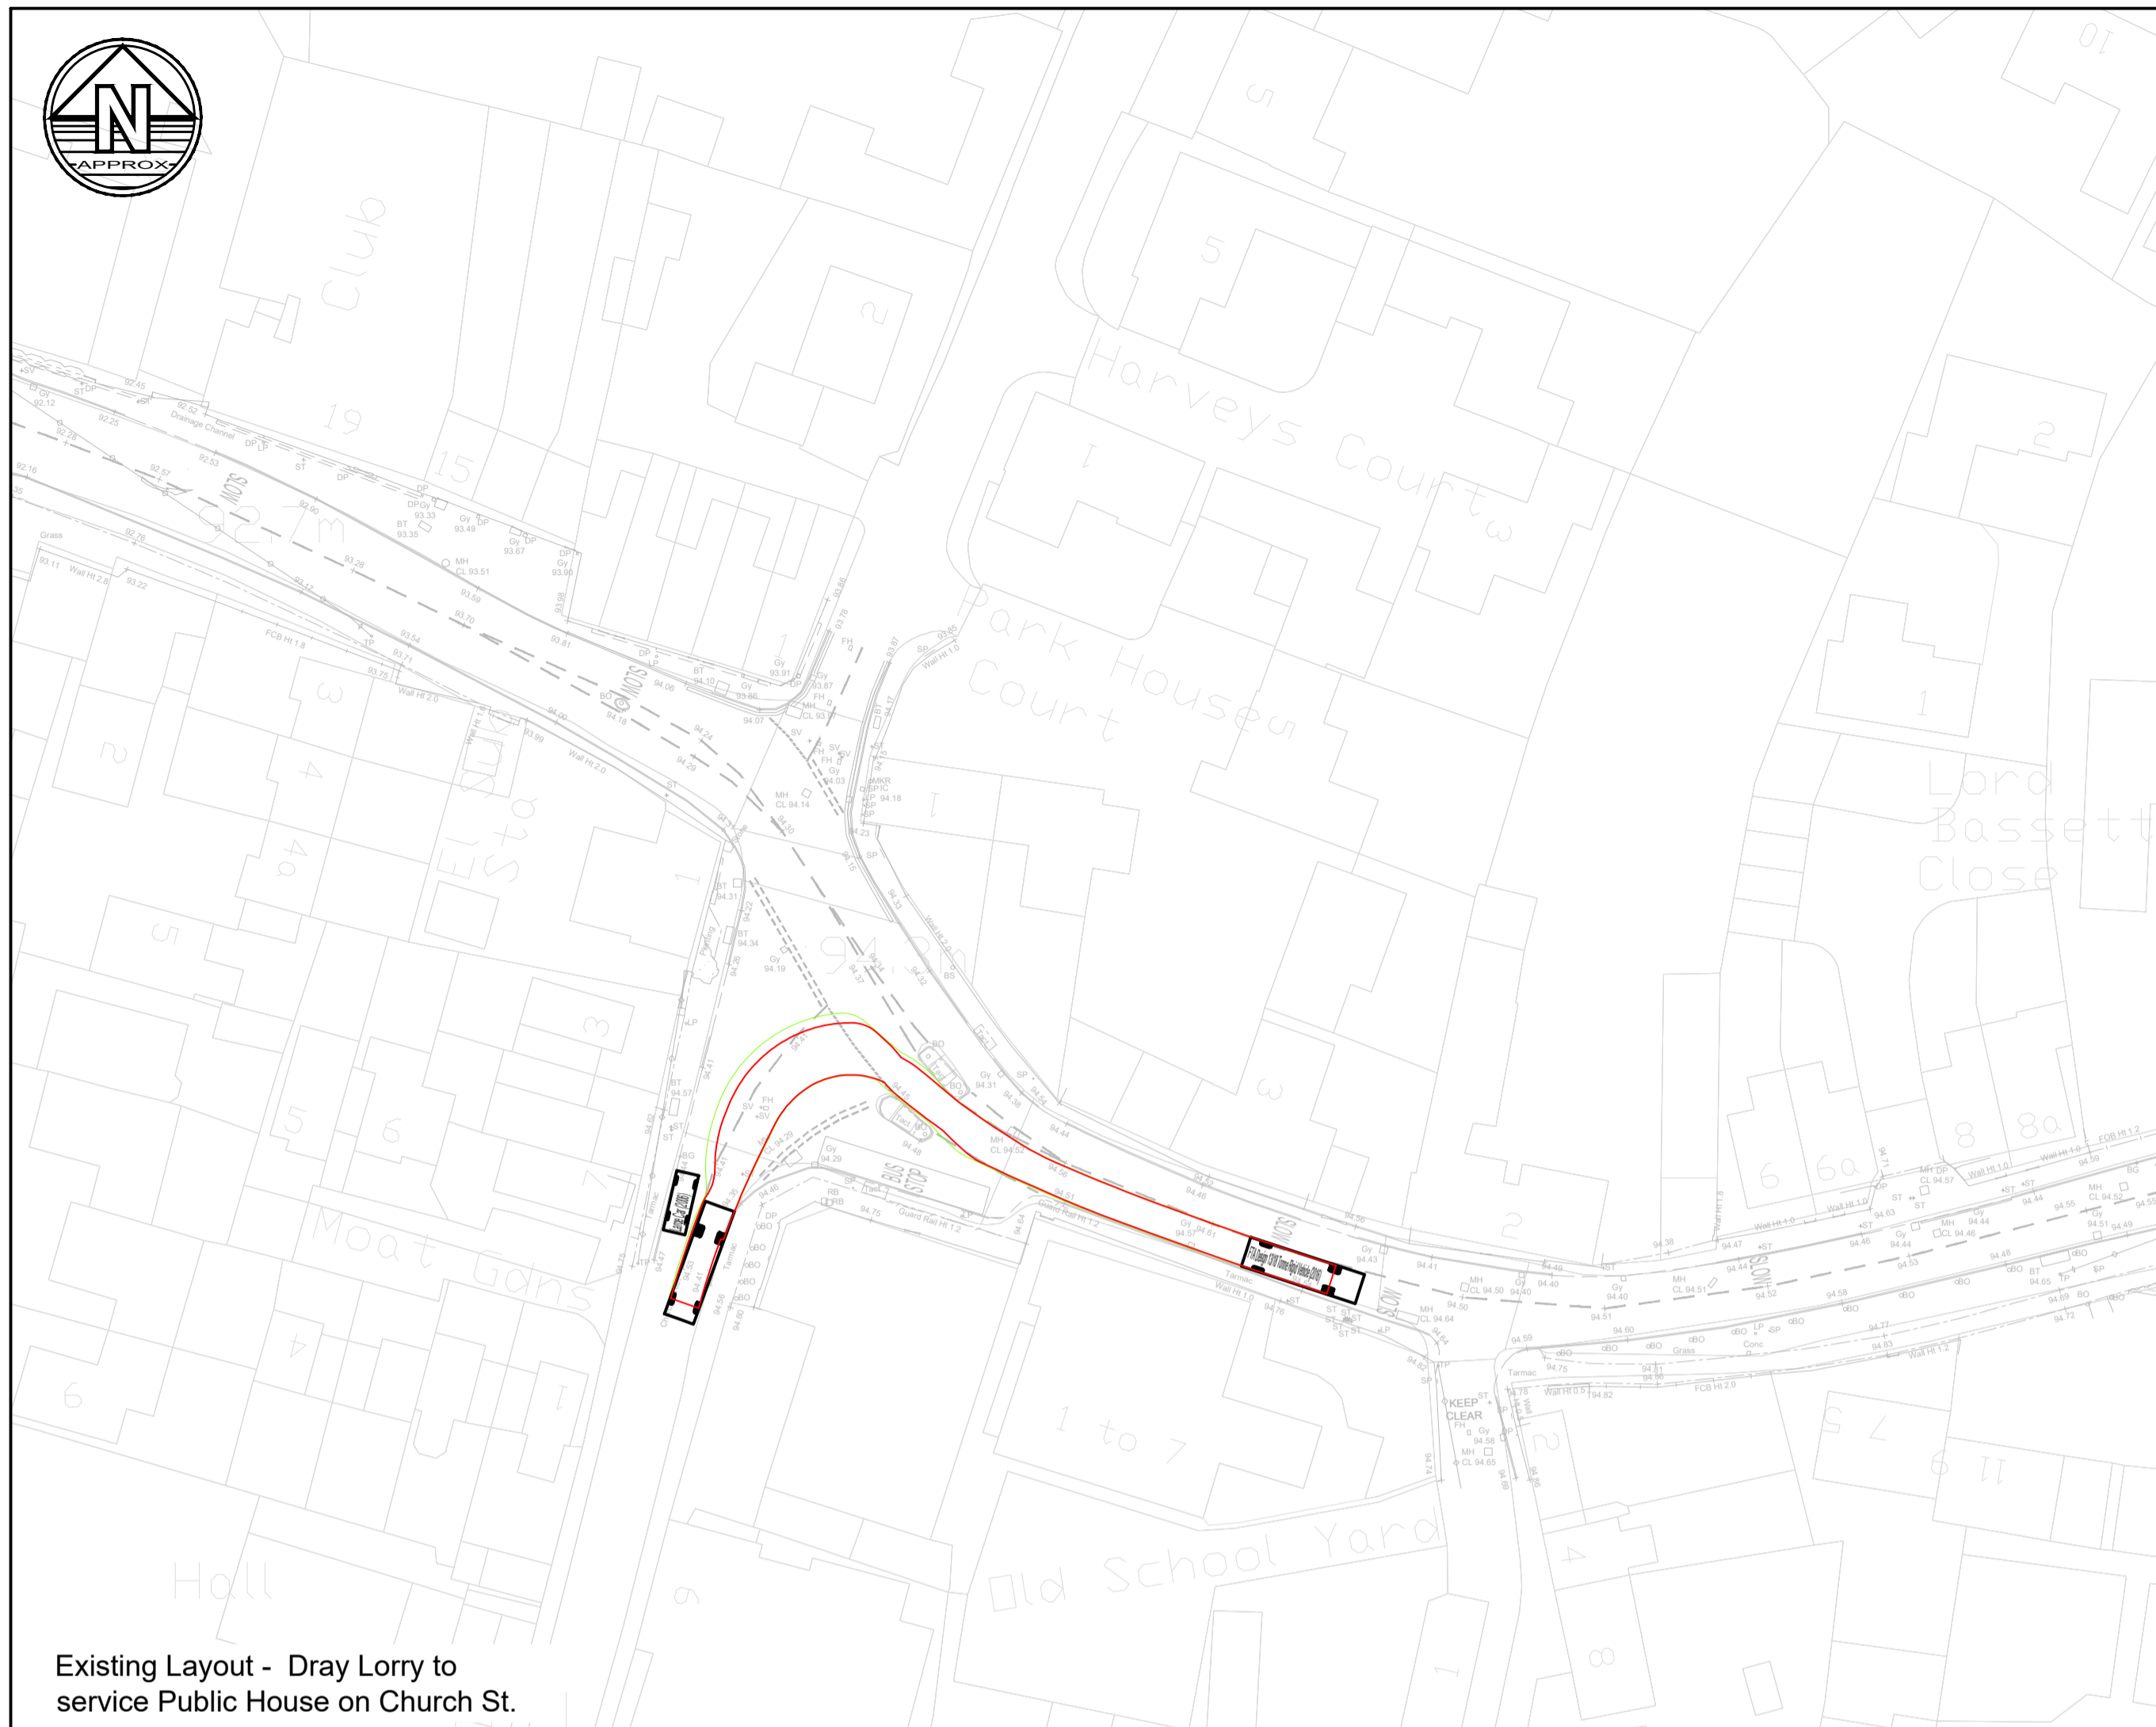

Existing Layout - Dray Lorry to service Public House on Church St.

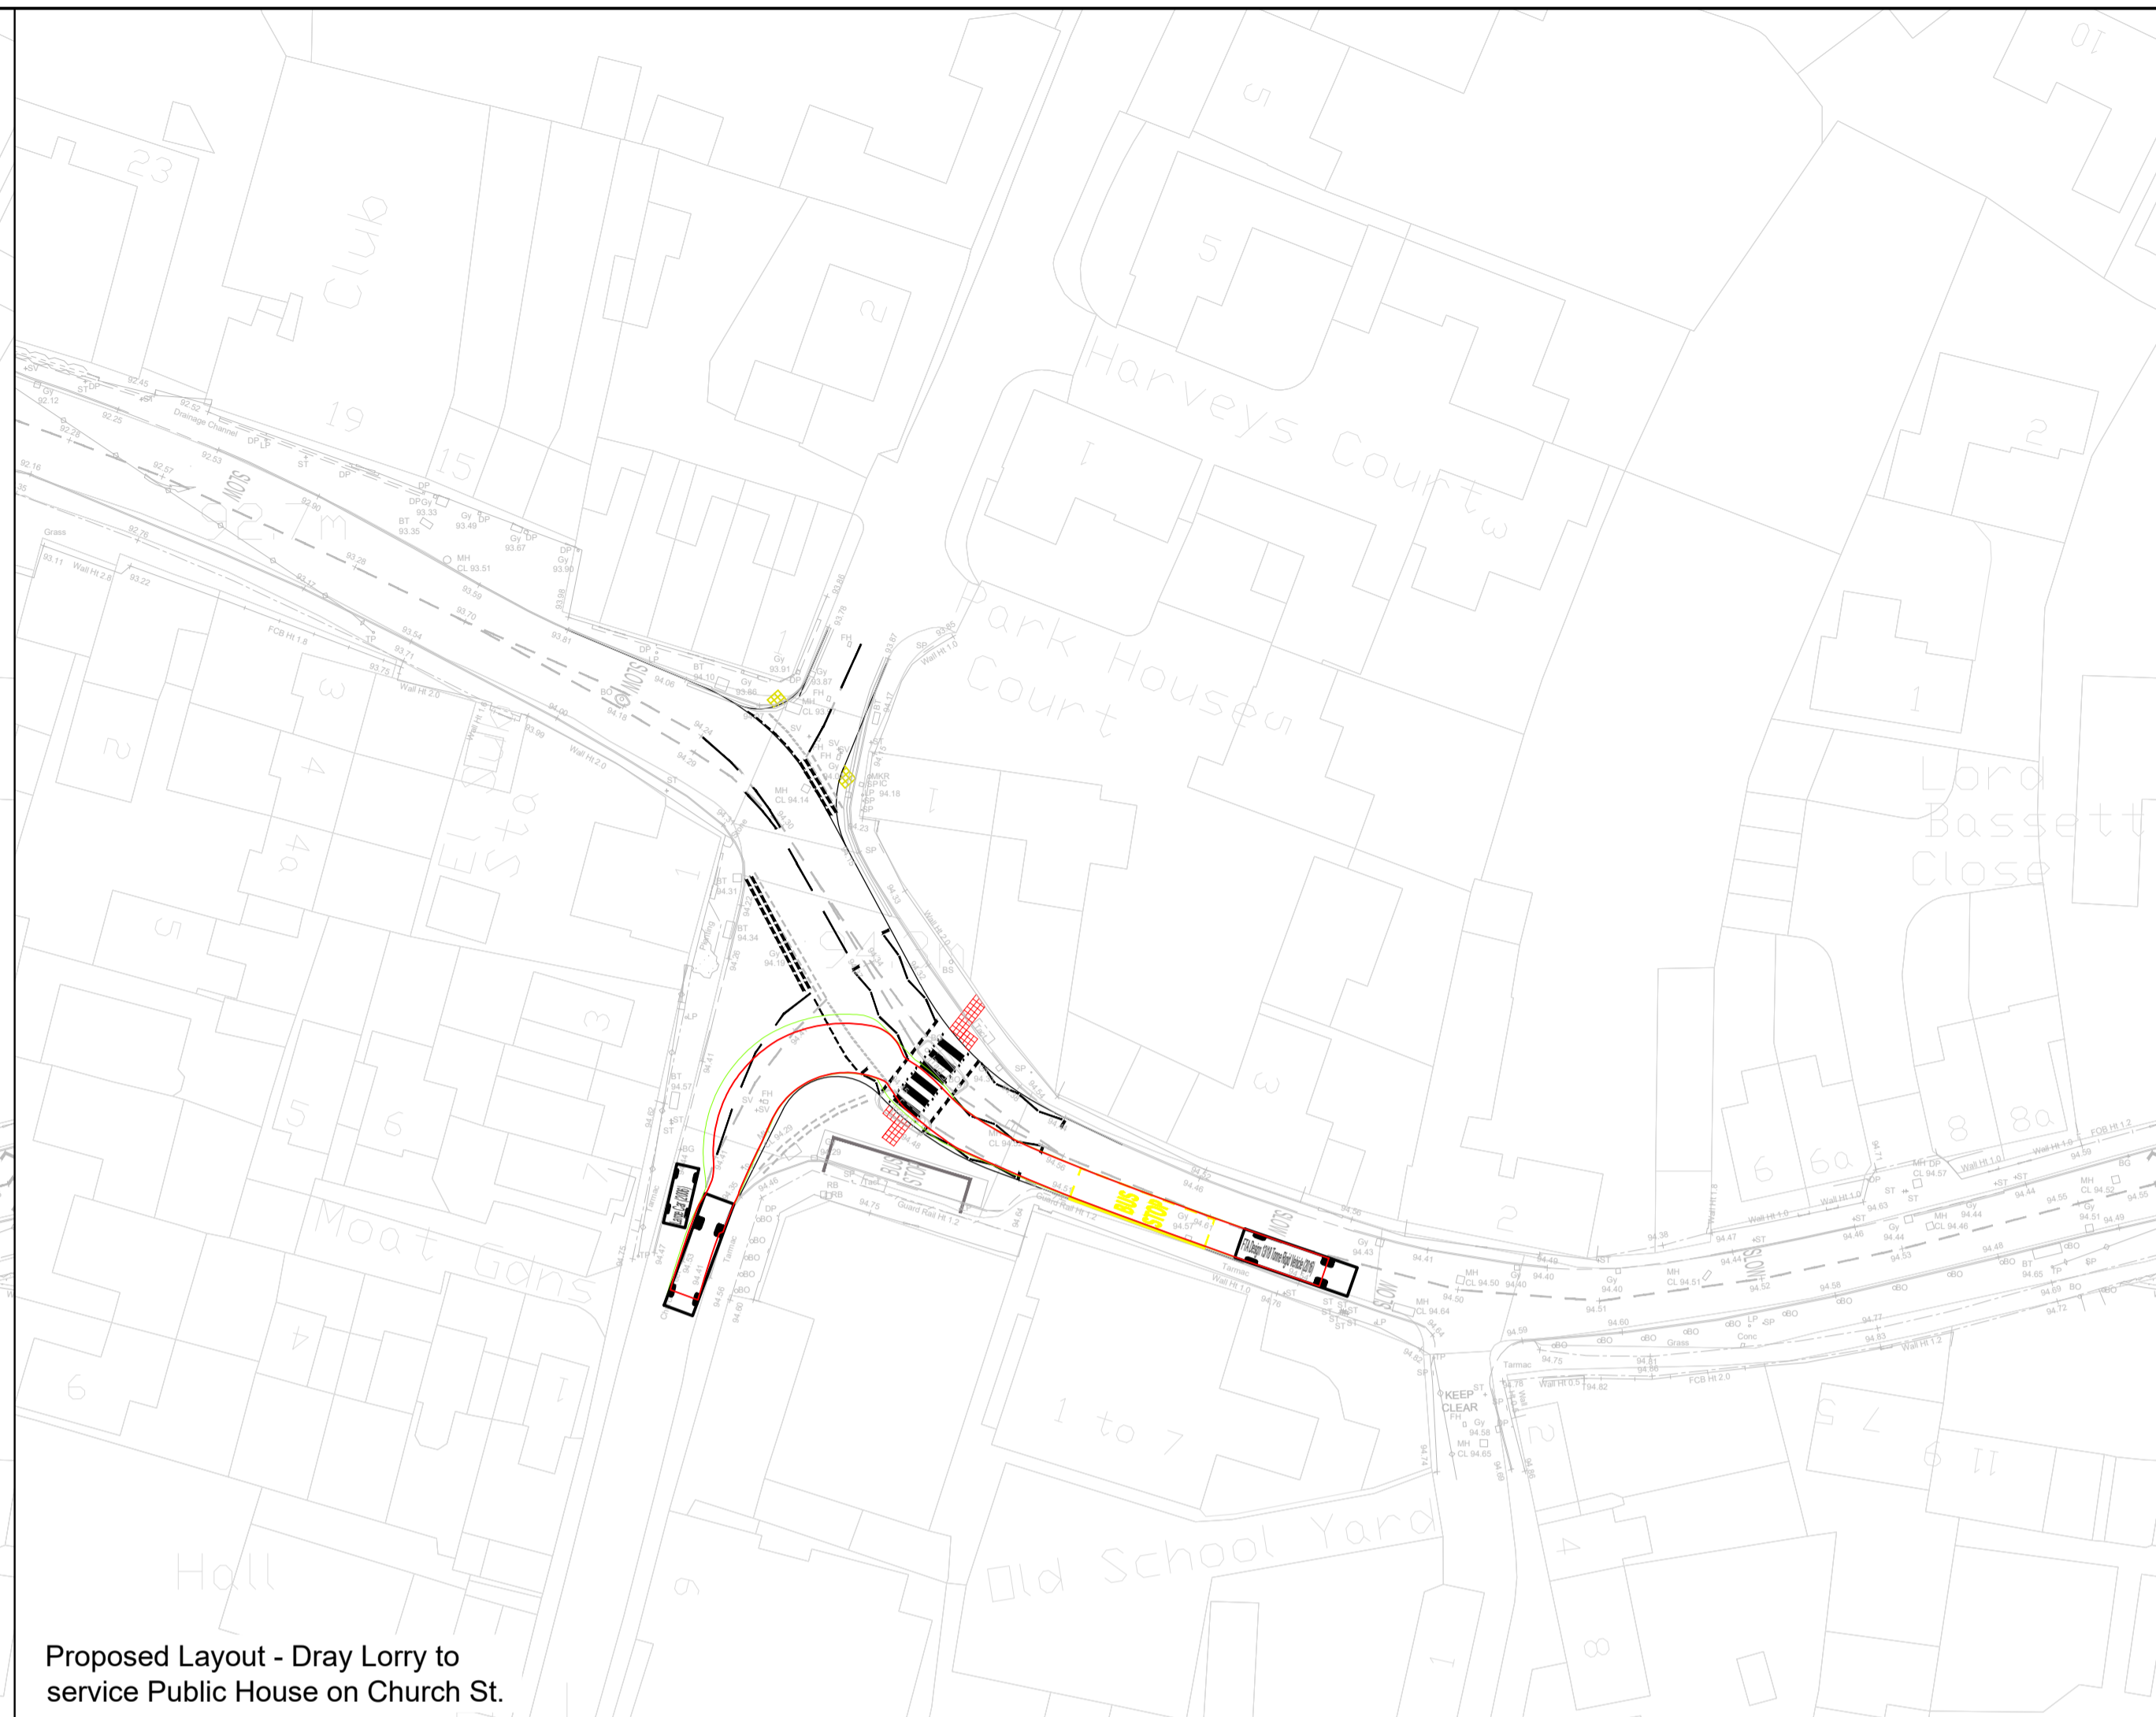


Proposed Layout - Dray Lorry to service Public House on Church St.


Notes

1. Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
3. All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
4. Any discrepancies noted on site are to be reported to the engineer immediately.

Key Plan

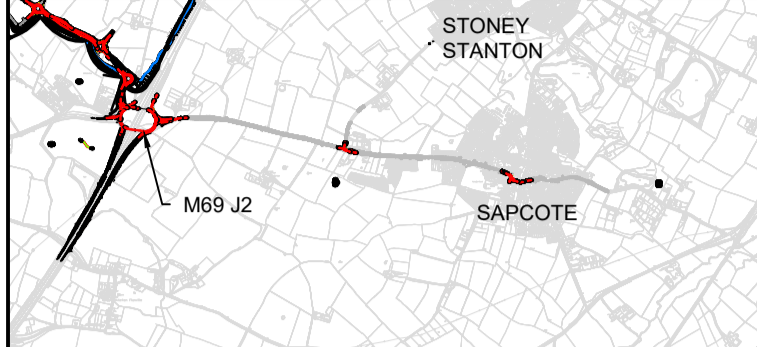

Legend

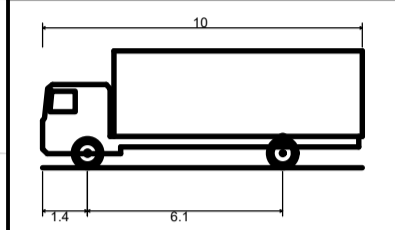

FTA Design 13/18 Tonne Rigid Vehicle (2016)  
 Overall Length 10.000m  
 Overall Width 2.550m  
 Overall Body Height 3.845m  
 Min Body Ground Clearance 0.443m  
 Track Width 2.470m  
 Lock to lock time 3.00s  
 Kerb to Kerb Turning Radius 11.000m

P01	04.01.24	Preliminary Issue	SC	SRH
Rev	Date	Details of issue / revision	Dw	Rev

Issues & Revisions

**BWB** A CAF GROUP COMPANY

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7407 3879
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client

**TRITAX SYMMETRY**  
 A TRITAX BIG BOX COMPANY

Project Title

**HINCKLEY NATIONAL RAIL FREIGHT INTERCHANGE**

Drawing Title

**SAPCOTE VEHICLE TRACKING SHEET 3**

Drawn:	S Carter	Reviewed:	S Hilditch
BWB Ref:	ntt2814	Date:	04.01.24
Scale@A1:	1:500		

Drawing Status


**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-GEN-XX-DR-TR-137	S2	P01





- Notes**
1. Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
  3. All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
  4. Any discrepancies noted on site are to be reported to the engineer immediately.

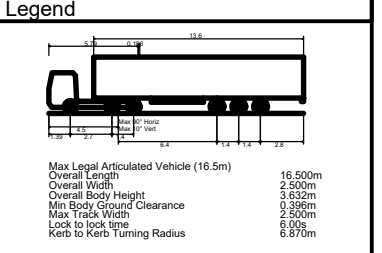

P1	19.09.23	PRELIMINARY ISSUE	AJ	MA
Rev	Date	Details of issue / revision	Dwn	Rev

**Issues & Revisions**

**BWB**  
CONSULTANCY | ENVIRONMENT  
INFRASTRUCTURE | BUILDINGS

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7234 9122
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client  
**TRITAX SYMMETRY  
(HINCKLEY) LIMITED**

Project Title  
**HINCKLEY RAIL FREIGHT  
INTERCHANGE**

Drawing Title  
**A47 NORMANDY WAY /  
ASHBY ROAD PROPOSED  
MITIGATION (SWEEP PATHS)**


Drawn:	AJ Oakes	Reviewed:	Malcolm Ash
BWB Ref:	NTT 2814	Date:	19.09.23
Scale:	A3	Scale:	1:1000

Drawing Status  
**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number  
**HRF-BWB-GEN-XX-DR-TR-128**

Status Rev  
**S2 P1**



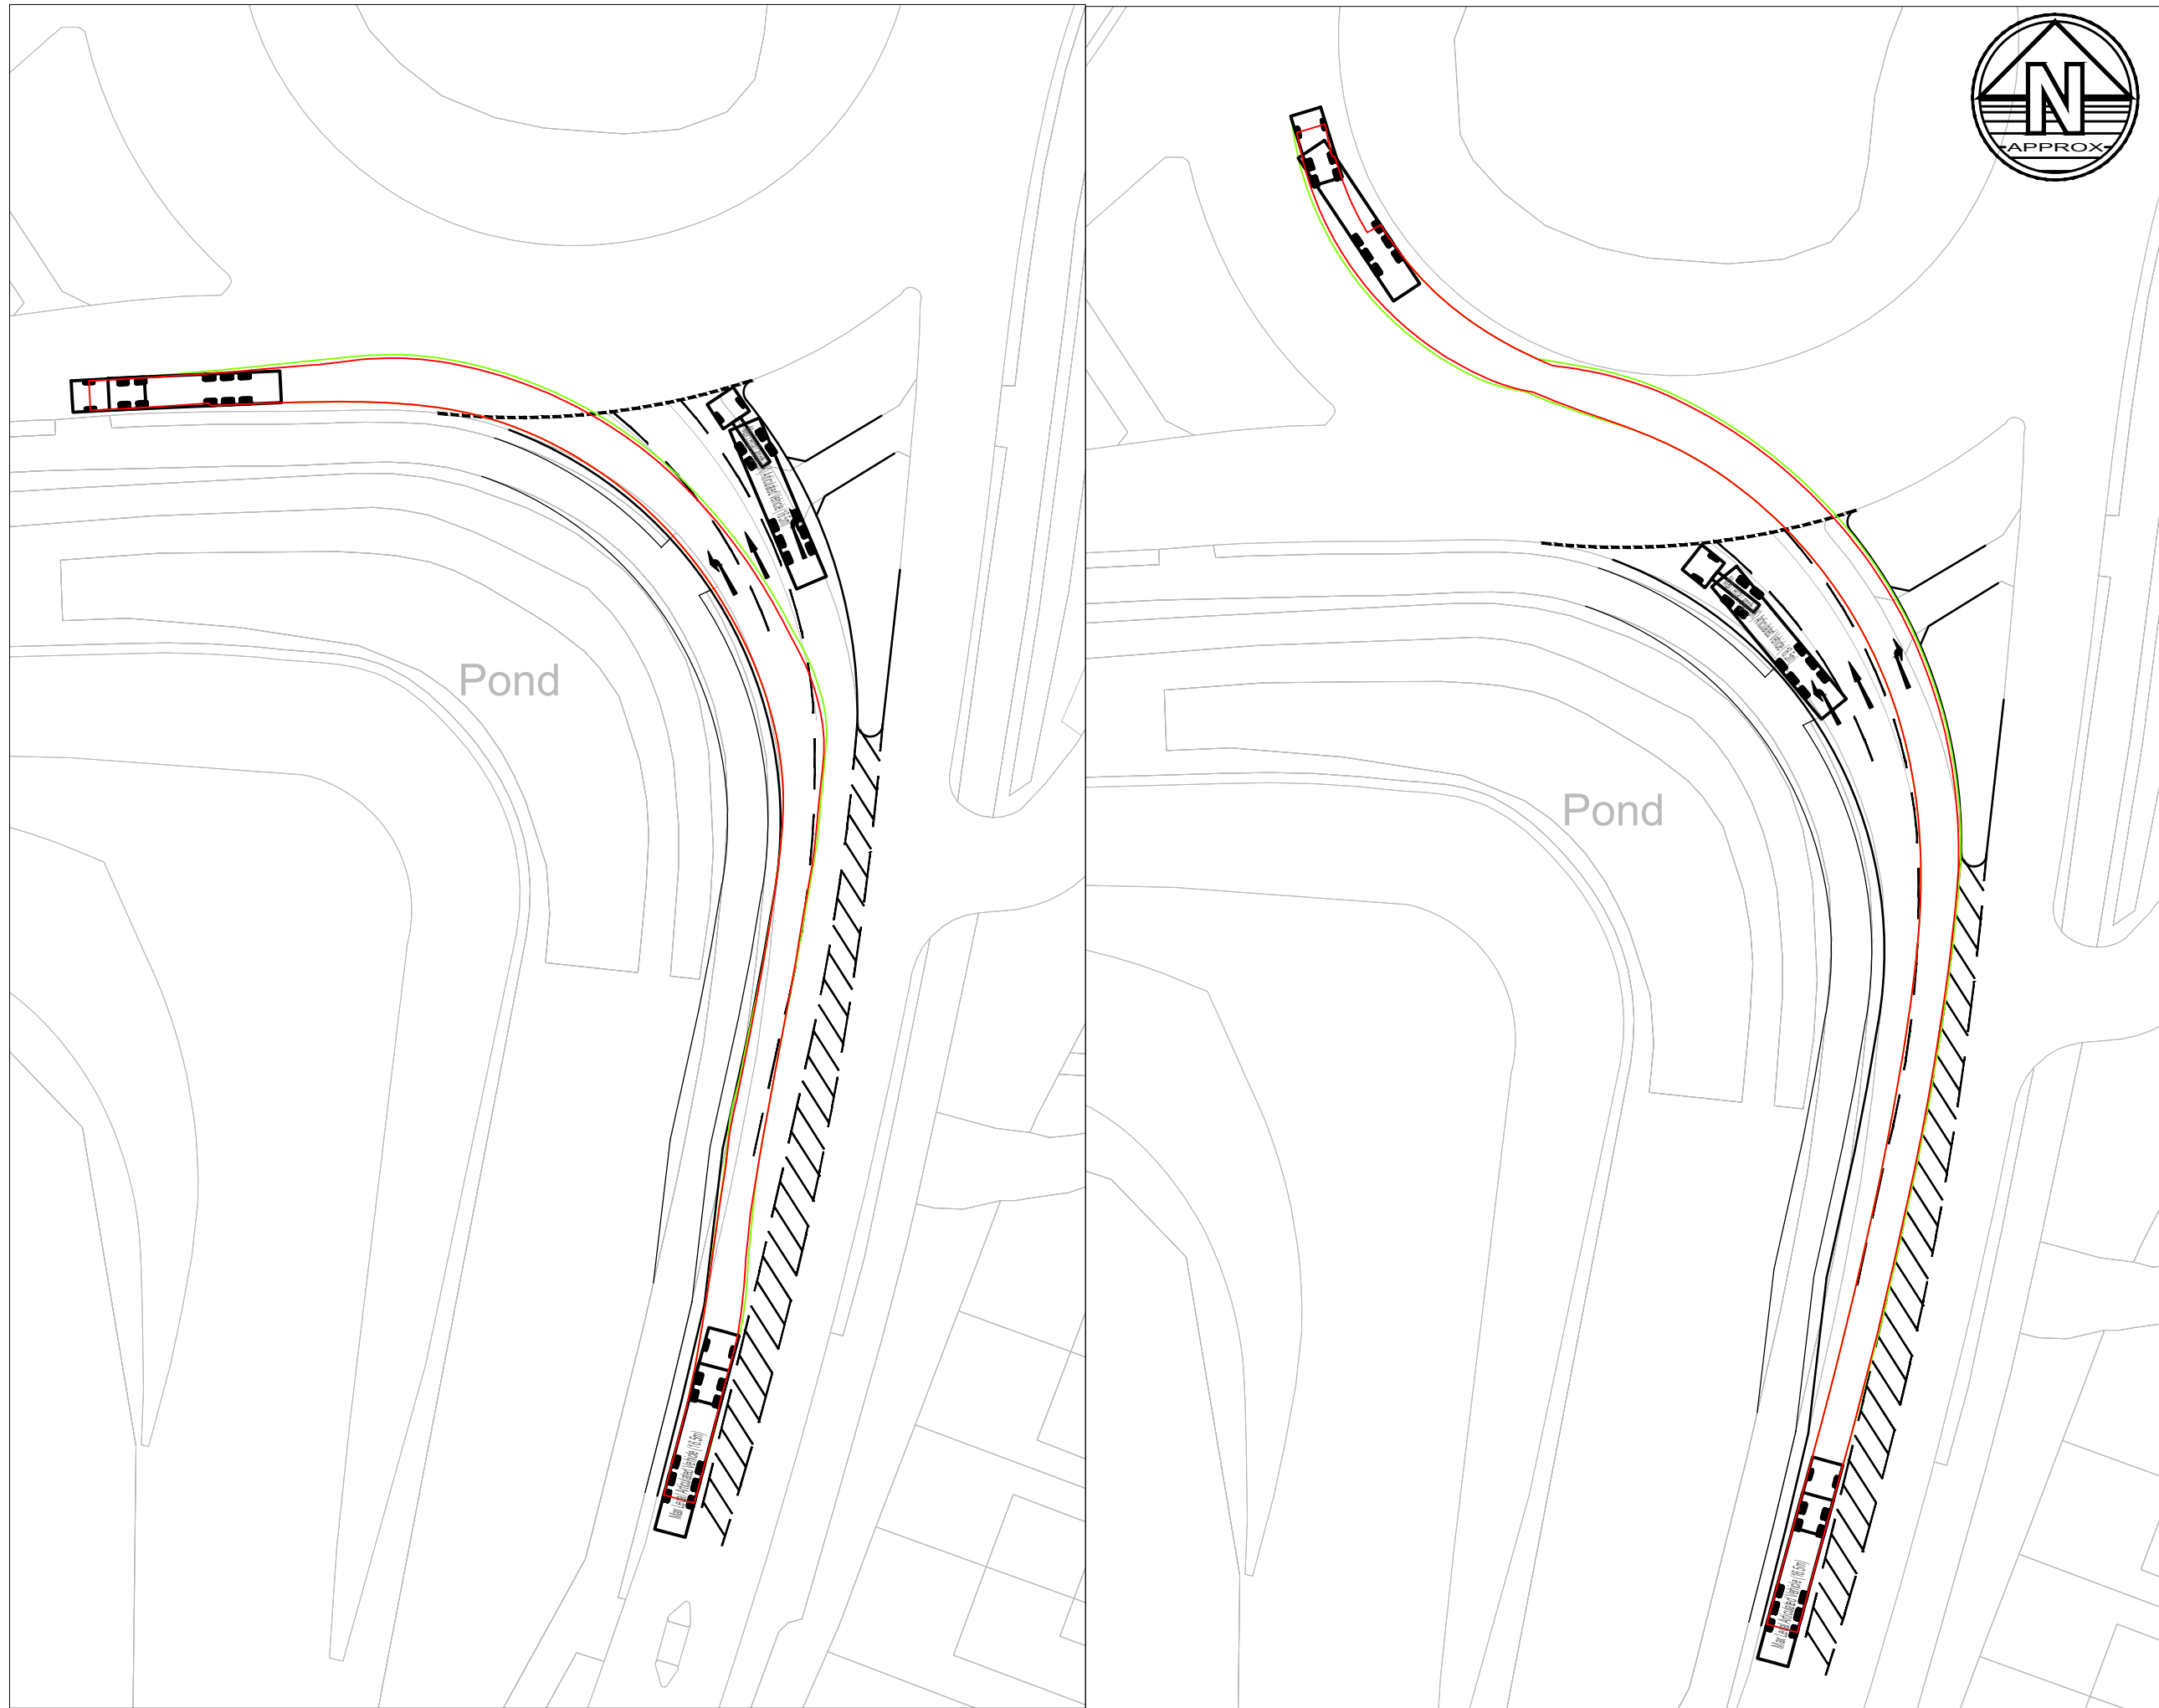


**Notes**

1. Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
3. All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
4. Any discrepancies noted on site are to be reported to the engineer immediately.

**Key Plan**



**Legend**

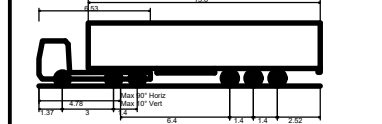

Max Legal Length (UK) Articulated Vehicle (16.5m)	16.500m
Overall Length	2.550m
Overall Width	3.681m
Min Body Ground Clearance	0.411m
Max Track Width	2.500m
Lock to lock time	6.00s
Kerb to Kerb Turning Radius	6.530m

P1	20.09.23	PRELIMINARY ISSUE	AJ	MA
Rev	Date	Details of issue / revision	Dwn	Rev

**Issues & Revisions**

**BWB**  
CONSULTANCY | ENVIRONMENT  
INFRASTRUCTURE | BUILDINGS

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7234 9122
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client  
**TRITAX SYMMETRY  
(HINCKLEY) LIMITED**

Project Title  
**HINCKLEY RAIL FREIGHT  
INTERCHANGE**

Drawing Title  
**A47 / THE COMMON /  
LEICESTER ROAD  
PROPOSED MITIGATION  
(SWEEP PATH)**

Drawn:	AJ Oakes	Reviewed:	Malcolm Ash
BWB Ref:	NTT 2814	Date:	20.09.23
		Scale@A3:	1:500


Drawing Status  
**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-GEN-XX-DR-TR-125	S2	P1





- Notes**
1. Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
  2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
  3. All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
  4. Any discrepancies noted on site are to be reported to the engineer immediately.

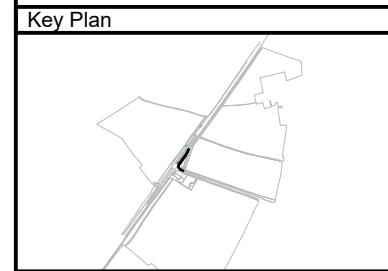

**Legend**

<p>Max Legal Articulated Vehicle (16.5m)</p>	<p>Overall Length: 16.500m          Overall Width: 2.500m          Overall Body Height: 3.820m          Min Body Ground Clearance: 0.396m          Max Track Width: 2.300m          Lock to lock time: 6.00s          Kerb to Kerb Turning Radius: 6.670m</p>
<p>Oil Tanker</p>	<p>Overall Length: 15.280m          Overall Width: 2.500m          Overall Body Height: 2.704m          Min Body Ground Clearance: 0.419m          Track Width: 2.450m          Lock to lock time: 4.00s          Kerb to Kerb Turning Radius: 6.670m</p>
<p>7.5t Box Van</p>	<p>Overall Length: 8.610m          Overall Width: 2.100m          Overall Body Height: 3.556m          Min Body Ground Clearance: 0.351m          Track Width: 2.064m          Lock to lock time: 4.00s          Kerb to Kerb Turning Radius: 7.400m</p>

P1	20.09.23	PRELIMINARY ISSUE	AJ	MA
Rev	Date	Details of issue / revision	Dwn	Rev

**Issues & Revisions**

**BWB**  
 CONSULTANCY | ENVIRONMENT  
 INFRASTRUCTURE | BUILDINGS  
 www.bwbconsulting.com

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7234 9122
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

Client  
**TRITAX SYMMETRY  
 (HINCKLEY) LIMITED**

Project Title  
**HINCKLEY RAIL FREIGHT  
 INTERCHANGE**

Drawing Title  
**COVENTRY ROAD / CROFT  
 ROAD PROPOSED  
 MITIGATION  
 (SWEEP PATHS)**


Drawn:	AJ Oakes	Reviewed:	Malcolm Ash
BWB Ref:	NTT 2814	Date:	20.09.23
		Scale@A3:	1:500
Drawing Status <b>PRELIMINARY</b>			
Project - Originator - Zone - Level - Type - Role - Number	Status	Rev	
HRF-BWB-GEN-XX-DR-TR-127	S2	P1	



Notes

1. Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
3. All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
4. Any discrepancies noted on site are to be reported to the engineer immediately.

Legend

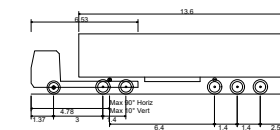

Max Legal Length (UK) Articulated Vehicle (16.5m)  
 Overall Length 16.500m  
 Overall Width 2.550m  
 Overall Body Height 3.581m  
 Min Body Ground Clearance 0.411m  
 Max Track Width 2.500m  
 Lock to lock time 6.00s  
 Kerb to Kerb Turning Radius 6.530m

P02	09.02.24	Updated following 2023 update and RSA1	AJ	SC
P1	20.09.23	PRELIMINARY ISSUE	AJ	MA
Rev	Date	Details of issue / revision	Dnw	Rev

Issues & Revisions

**BWB**  
 CONSULTANCY | ENVIRONMENT  
 INFRASTRUCTURE | BUILDINGS  
 Birmingham | 0121 233 3322  
 Leeds | 0113 233 8000  
 London | 020 7234 9122  
 Manchester | 0161 233 4260  
 Nottingham | 0115 924 1100  
 www.bwbconsulting.com

Client  
**TRITAX SYMMETRY  
 (HINCKLEY) LIMITED**

Project Title  
**HINCKLEY RAIL FREIGHT  
 INTERCHANGE**

Drawing Title  
**A5 / A4303 / COAL PIT LANE  
 PROPOSED MITIGATION  
 (SWEEP PATHS)**

Drawn: AJ Oakes Reviewed: Malclom Ash


BWB Ref: NTT 2814 Date: 05.03.21 Scale@A3: 1:1000

Drawing Status  
**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number Status Rev  
**HRF-BWB-GEN-XX-DR-TR-126 S2 P02**





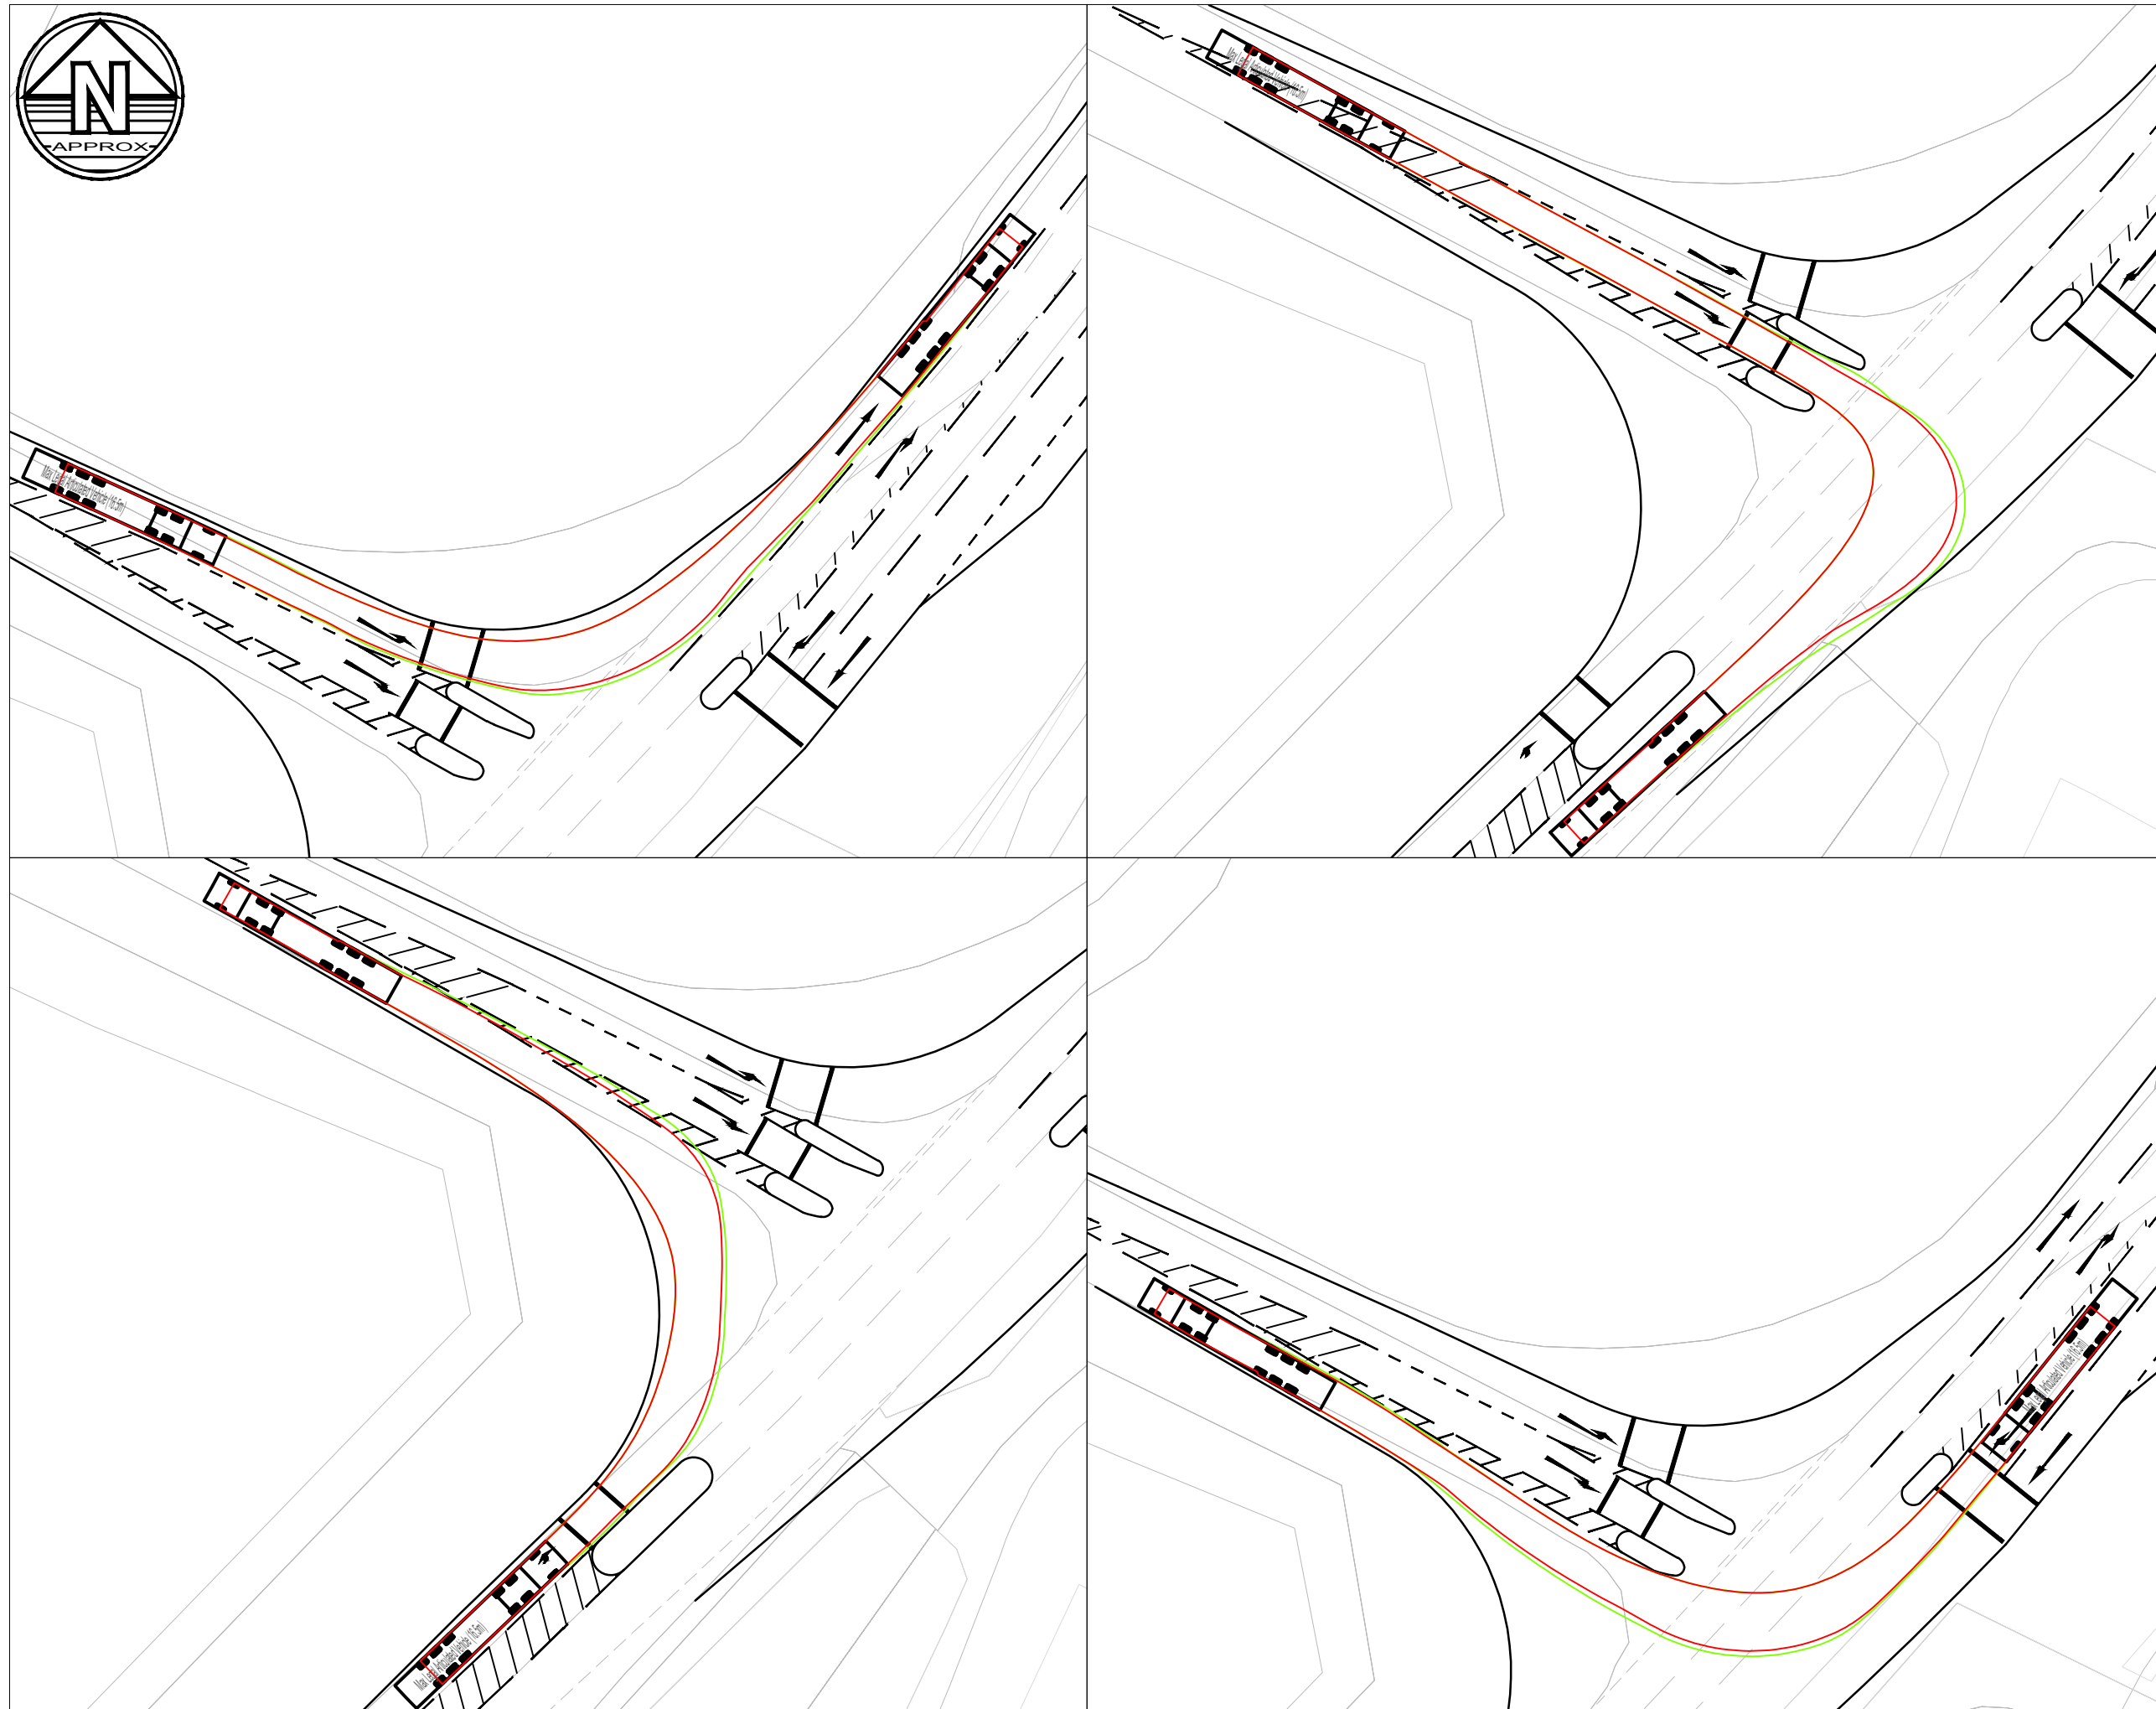


**Notes**

1. Do not scale this drawing. All dimensions must be checked/ verified on site. If in doubt ask.
2. This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
3. All dimensions in millimetres unless noted otherwise. All levels in metres unless noted otherwise.
4. Any discrepancies noted on site are to be reported to the engineer immediately.

**Key Plan**



**Legend**

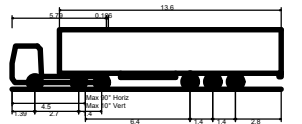

Max Legal Articulated Vehicle (16.5m)	16.500m
Overall Length	2.500m
Overall Width	3.632m
Overall Body Height	0.396m
Min Body Ground Clearance	2.500m
Max Track Width	6.00s
Lock to lock time	6.870m
Kerb to Kerb Turning Radius	

P1	20.09.23	PRELIMINARY ISSUE	AJ	MA
Rev	Date	Details of issue / revision	Dwn	Rev

**Issues & Revisions**

**BWB**  
CONSULTANCY | ENVIRONMENT  
INFRASTRUCTURE | BUILDINGS

- Birmingham | 0121 233 3322
- Leeds | 0113 233 8000
- London | 020 7234 9122
- Manchester | 0161 233 4260
- Nottingham | 0115 924 1100

www.bwbconsulting.com

Client  
**TRITAX SYMMETRY  
(HINCKLEY) LIMITED**

Project Title  
**HINCKLEY RAIL FREIGHT  
INTERCHANGE**

Drawing Title  
**B4114 / B581 BROUGHTON  
ROAD PROPOSED  
MITIGATION  
(SWEEP PATHS)**

Drawn:	AJ Oakes	Reviewed:	Malcolm Ash
BWB Ref:	NTT 2814	Date:	20.09.23
Scale:	A3	Scale@A3:	1:500

Drawing Status  
**PRELIMINARY**

Project - Originator - Zone - Level - Type - Role - Number	Status	Rev
HRF-BWB-GEN-XX-DR-TR-133	S2	P1



A **CAF** GROUP COMPANY

