

Thames Tideway Tunnel
Thames Water Utilities Limited



Application for Development Consent

Application Reference Number: WWO10001

Code of Construction Practice Part B

Doc Ref: **7.19.2**

Victoria Embankment Foreshore

APFP Regulations 2009: Regulation **5(2)(q)**

Hard copy available in

Box **56** Folder **B**
January 2013

**Thames
Tideway Tunnel**



Creating a cleaner, healthier River Thames

This page is intentionally blank

Thames Tideway Tunnel

Code of Construction Practice Part B

Victoria Embankment Foreshore

List of contents

	Page number
1 Victoria Embankment Foreshore	1
1.1 General.....	1
2 General requirements	2
3 Communications and community/stakeholder liaison	2
4 Site operation	3
5 Public access, highway and river transport	3
6 Noise and vibration.....	4
7 Air quality	5
8 Water resources	5
9 Land quality.....	5
10 Waste management and resource use.....	5
11 Ecology (aquatic and terrestrial)	6
12 Historic environment	6
13 Other	6

List of figures

	Page number
Figure 1.1 Victoria Embankment Foreshore: Site context and location plan	2


This page intentionally left blank

1 Victoria Embankment Foreshore

1.1 General

- 1.1.1 All works covered within this document are to be managed and performed to the culture within the Thames Tideway Tunnel vision of 'Zero Accidents, Zero Harm, Zero Compromise'.
- 1.1.2 The *Code of Construction Practice (CoCP)* comprises two parts:
- a. Part A: General requirements. These measures are applicable project-wide.
 - b. Part B: Site-specific requirements. These are site-specific measures, where there are deviations from the general requirements indicated in Part A.
- 1.1.3 This document comprises the *CoCP* Part B for the Thames Tideway Tunnel project works at Victoria Embankment Foreshore site and identifies the detailed site-specific measures including working hours, site set up and servicing arrangements, taking into account the environmental issues and consultations with the Westminster City Council and other stakeholders.
- 1.1.4 For ease of reference the *CoCP* Part B mirrors the headings in Part A. The *CoCP* Part B sets out site-specific issues and deviations from Part A so where there are no site-specific measures reference should be made to the measures set out in Part A.
- 1.1.5 A plan showing the location of the site is shown in Figure 1.1 below.

Figure 1.1 Victoria Embankment Foreshore: Site context and location plan

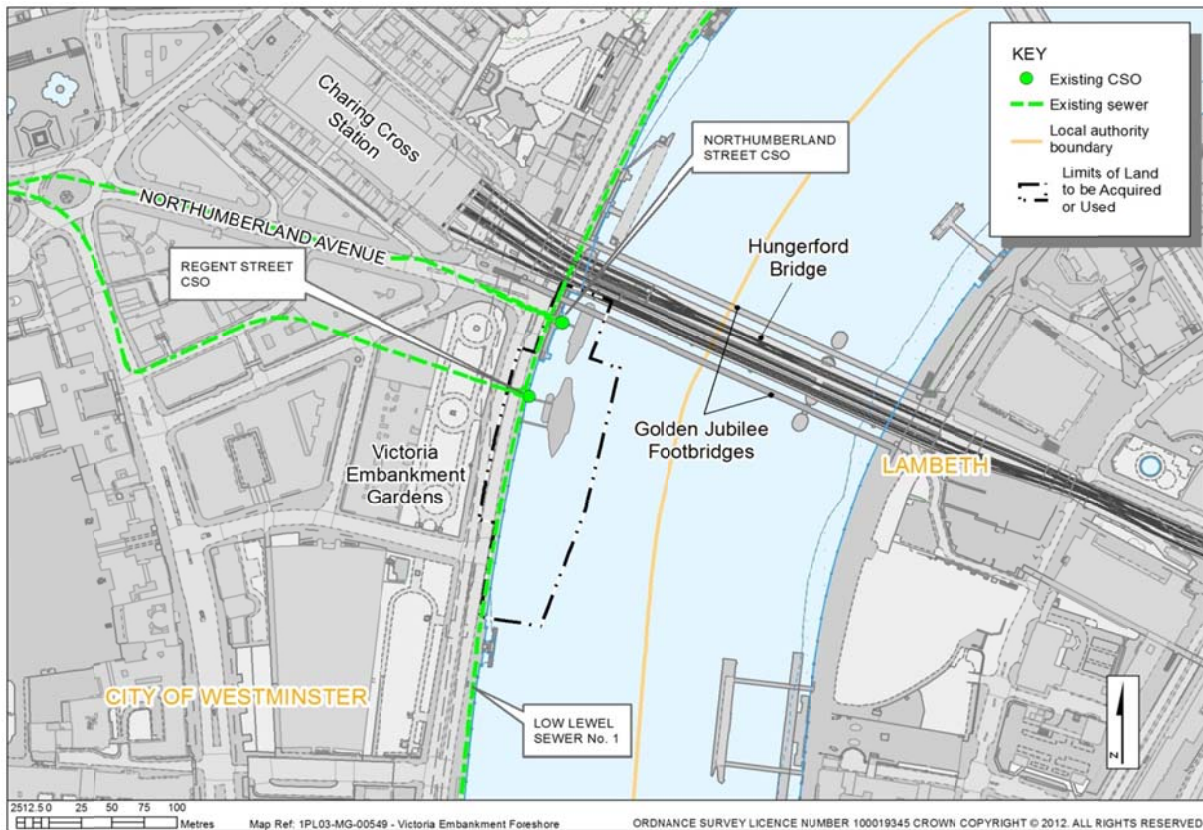

Note: For detailed Limits of Land to be Acquired or Used, refer to drawings in the Book of Plans.

2 General requirements

2.1.1 As per text in CoCP Part A.

3 Communications and community/stakeholder liaison

3.1.1 As per text in CoCP Part A.

4 Site operation

Topic	Site-specific requirement
Working hours	<p>This site will adhere to the following working hours:</p> <ol style="list-style-type: none"> standard continuous for duration of the Regent Street connection tunnel construction. <p>Other working hours are subject to agreement with the local authority.</p>
Site layout	<p>Temporary works construction within the river will be limited within the navigational channel. The detailed methods are to be agreed with the PLA, EA and MMO and subject to required licenses navigational risk assessments and consents.</p>
Site security / hoarding requirements	<p>Hoarding on western boundary to increase from 2.4m to 3.6m.</p> <p>The hoarding is to be as defined in <i>CoCP</i> Part A para 4.3.4a and b incorporating suitable art work and viewing windows.</p>
Other items	<p>A site-specific lighting plan is required. The lighting will address the impact on terrestrial and aquatic ecology and include the use of low level directional lighting where possible whilst meeting safe work requirements.</p>

5 Public access, highway and river transport

Topic	Site-specific requirement
Site access and gates	<p>Access to the site will be from Victoria Embankment with left turn into the site. Egress from the site will be left turn out travelling south.</p>
Traffic management	<p>Site areas to be designed to maintain two-way flow for traffic along Victoria Embankment.</p> <p>Construction works to maintain two lanes on both carriageways, except for short durations during utility diversions where only one lane on the west bound carriageway will be maintained.</p> <p>Coach parking spaces would be relocated to Albert Embankment (A3036) between Tinworth Street and Black Prince Road, Millbank (A3212) between Thorney Street and Atterbury Street, or Lambeth Palace Road (A3036) to the north of Lambeth Road (A3203) / Lambeth Bridge (A3203) / Albert</p>

Topic	Site-specific requirement
	<p>Embankment (A3036) / Lambeth Palace Road (A3036) roundabout.</p> <p>The minimum width of traffic lanes along Victoria Embankment to be retained is one outer lane of 3.0m in each direction, and a second inner lane (where applicable) of 3.25m. Suitable central safety barrier to be installed between alternate direction lanes.</p> <p>Site areas impact into traffic lanes extent and duration to be minimised. Traffic barriers to be moved in and out as construction progresses as Transport for London require minimum land take within highway.</p>
Event restrictions	<p>To be confirmed in consultations with local authority and Transport for London.</p> <p>The London Marathon. Contractor to take appropriate measures prior to and for the duration of the event including items such as minimising extent of works within the highway.</p>
River transport	<p>Access to the existing Embankment Pier to be maintained for both pedestrians and services. Liaison with London River Services (Transport for London) is required.</p>
Other	<p>The diversion of the Thames Path is to be clearly signed.</p>

6 Noise and vibration

Topic	Site-specific requirement
Control measures	<p>See hoarding requirements above.</p> <p>2.4m noise barrier on the northern and southern boundary of the temporary cofferdam, to screen receptors on the water.</p> <p>The loading and unloading of barges will only be carried out during standard working hours.</p> <p>Baseline noise studies will be required for the worksite. Agreement of action levels and permanent noise monitoring locations will be required with the local authority as part of the Section 61 process.</p>
Other	<p>As per text in <i>CoCP</i> Part A.</p>

7 Air quality

Topic	Site-specific requirement
Vehicle and plant emissions	As per text in <i>CoCP</i> Part A.
Dust emissions/control	As per text in <i>CoCP</i> Part A.
Odour	As per text in <i>CoCP</i> Part A.
Other	As per text in <i>CoCP</i> Part A.

8 Water resources

Topic	Site-specific requirement
Control of pollution: surface water / groundwater	As per text in <i>CoCP</i> Part A.
Control on abstraction	As per text in <i>CoCP</i> Part A.
Ground treatment / dredging	As per text in <i>CoCP</i> Part A.
Other	As per text in <i>CoCP</i> Part A.

9 Land quality

Topic	Site-specific requirement
Site works	As per text in <i>CoCP</i> Part A.
Site-specific issues / mitigation	As per text in <i>CoCP</i> Part A.

10 Waste management and resource use

Topic	Site-specific requirement
Excavated material	As per text in <i>CoCP</i> Part A.
Resource usage	As per text in <i>CoCP</i> Part A.
Other	As per text in <i>CoCP</i> Part A.

11 Ecology (aquatic and terrestrial)

Topic	Site-specific requirement
Protection of habitats	<p>Membrane to be installed between river bed and temporary back fill material to prevent contamination of habitat and benefits in preserving potential archaeology.</p> <p>Areas of foreshore used for temporary works will be restored to similar condition and material as was present prior to the works.</p>
Protection of trees	Specification for replacement trees to be agreed with Transport for London and includes species, size, source, pit design and finish.
Other	As per text in <i>CoCP</i> Part A.

12 Historic environment

Topic	Site-specific requirement
Other	<p>Intrusive structural investigations to the Listed river wall beyond the area of proposed fabric removal will be required.</p> <p>Existing granite blocks are to be used to make up the joint between new and old river wall sections.</p> <p>The sturgeon lamp stands will be removed and their reuse sought in accordance with the procedures set out in the Heritage Statement.</p>

13 Other

Topic	Site-specific requirement
Other	As per text in <i>CoCP</i> Part A.

This page is intentionally blank

Copyright notice

Copyright © Thames Water Utilities Limited January 2013.
All rights reserved.

Any plans, drawings, designs and materials (materials) submitted by Thames Water Utilities Limited (Thames Water) as part of this application for Development Consent to the Planning Inspectorate are protected by copyright. You may only use this material (including making copies of it) in order to (a) inspect those plans, drawings, designs and materials at a more convenient time or place; or (b) to facilitate the exercise of a right to participate in the pre-examination or examination stages of the application which is available under the Planning Act 2008 and related regulations. Use for any other purpose is prohibited and further copies must not be made without the prior written consent of Thames Water.

Thames Water Utilities Limited

Clearwater Court, Vastern Road, Reading RG1 8DB

The Thames Water logo and Thames Tideway Tunnel logo are © Thames Water Utilities Limited. All rights reserved.

DCO-DT-000-ZZZZ-071902

