

Rampion 2 Wind Farm Category 8:

Examination Documents

Applicant's Post Hearing Submission – Issue Specific Hearing 1

Appendix 9 - Further information for Action Points 38 and 39 - Underwater Noise (tracked changes)

Date: June 2024

Revision B

Application Reference: 8.25.1
Pursuant to: The Infrastructure Planning (Examination Procedure)
Rules 2010, Rule 8(1)(c)(i)
Ecodoc number: 005104558-02

Document revisions

Revision	Date	Status/reason for issue	Author	Checked by	Approved by
Α	28/02/2024	Deadline 1	WSP	WSP	RED
В	03/06/2024	Deadline 4	WSP	WSP	RED



Contents

1.	Introduction	on	3
1.1	Overview		3
1.2	Purpose of	this Document	3
2.	Action Poi	int 35	5
2.1	Operationa	Il Worst Case Scenario	5
3.	Action Poi	int 38 Habitat Suitability	6
3.1	Sandeel Ha	abitat Suitability Assessment (Latto et al, 2013)	6
3.2	Herring Ha	bitat Suitability Assessment (Reach et al., 2013)	13
	Piling mitig	ation for sensitive features	21
4.	Action Poi	int 39	27
4.1	Potential in	npacts on spawning herring from underwater noise	27
4.2	Potential in	npacts on herring eggs and larvae from underwater noise	37
5.	Seahorse		38
5.1	Clarification	ns on impacts to seahorse from underwater noise	38
6.	Black Sea	bream	46
6.1	Clarification noise	ns on recoverable injury impacts to black seabream from underwater	46
7.	Reference	s	49
List of	Tables		
	Table 3-1 Table 3-2	Sandeel spawning habitat data sources. Data parameters used to inform the confidence assessment of	7
	1 abic 3-2	individual data layers, and assigned weightings (taken from Latto <i>et al.</i> , 2013))	t 8
	Table 3-3	Confidence assessment for individual sandeel spawning habitat data	
	T.11. 0.4	sources.	8
	Table 3-4 Table 3-5	Combined confidence score classifications Herring spawning habitat data sources.	11 14
	. 45.5 6 6		



16

Table 3-7		Confidence assessment for individual herring spawning data sources 16				
	Table 3-8	Combined confidence score classifications	19			
List o	f Figures					
	Figure 3.1	Indicative Sandeel Spawning Data	10			
	Figure 3.2	·	12			
	Figure 3.3	Indicative Herring Spawning Data	18			
	Figure 3.4		20			
	Figure 3.5	Mitigated (DBBC) Behavioural Response Impact Ranges for Spawn				
		Herring from the Piling of Monopile Foundations (141dB SELss)	23			
	Figure 3.6	Mitigated (DBBC) Behavioural Response Impact Ranges for Spawn	_			
	F: 0. 7	Herring from the Piling of Multileg Foundations (141dB SELss)	24			
	Figure 3.7	Mitigated (DBBC) Behavioural Response Impact Ranges for Spawn	_			
	Figure 3.8	Herring from the Piling of Monopile Foundations (135dB SELss)	25			
	rigule 3.6	Mitigated (DBBC) Behavioural Response Impact Ranges for Spawn Herring from the Piling of Multileg Foundations (135dB SELss)	26			
	Figure 4.1	Predicted Worst Case Impact Ranges from the Simultaneous Piling				
	rigure 4.1	Monopile Foundations	31			
	Figure 4.2	Predicted Worst Case Impact Ranges from the Simultaneous Piling				
	r igaro 4.2	Multileg Foundations	32			
	Figure 4.3	•	<u></u>			
	19	Spawning Herring from the Piling of Monopile Foundations (141db				
		SELss)	33			
	Figure 4.4	,				
	J	Spawning Herring from the Piling of Multileg Foundations (141dB				
		SELss)	34			
	Figure 5.1	The predicted worst case TTS impact ranges from the simultaneous	3			
		piling of monopile foundations in relation to MCZs of which seahorse	es			
		are a protected feature	40			
	Figure 5.2	· · · · · · · · · · · · · · · · · · ·				
		piling of multileg foundations in relation to MCZs of which seahorses				
	F: 0.1	are a protected feature	41			
	Figure 6.1	Predicted Worst Case Recoverable Injury Impact Ranges from the				
		Sequential Piling of Monopile Foundations at the Northwest Location				
		in Relation to the Kingmere MCZ	47			

Figure 6.2 Predicted Worst Case Recoverable Injury Impact Ranges from the

Sequential Piling of Multileg Foundations at the Northwest Location in

Table 3-6 Data parameters used to inform the confidence assessment of

al., 2013)

individual data layers, and assigned weightings (taken from Reach et

Relation to the Kingmere MCZ



1. Introduction

1.1 Overview

- Rampion Extension Development Limited (hereafter referred to as 'RED') (the 'Applicant') is developing the Rampion 2 Offshore Wind Farm Project ('Rampion 2') located adjacent to the existing Rampion Offshore Wind Farm Project ('Rampion 1') in the English Channel.
- Rampion 2 will be located between 13km and 26km from the Sussex Coast in the English Channel and the offshore array area will occupy an area of approximately 160km². A detailed description of the Proposed Development is set out in Chapter 4: The Proposed Development, Volume 2 [APP-076] of the Environmental Statement (ES), submitted with the DCO Application.

1.2 Purpose of this Document

- This document provides further information requested in response to the following Action Points arising from Issue Specific Hearing 1:
 - Action Point 35: Applicant to provide a justification supported by figures and calculations for the worst-case operational noise scenario;
 - Action Point 38: To consider the submission of herring and sandeel heatmaps using the MarineSpace Latto et al. (2013) and Reach et al. (2013) methods;
 - Action Point 39: If there would be potential noise impacts having a behavioural effect on herring, what would be the effect on this species during spawning.
- 1.2.2 In addition, this document also presents the following:
 - Further information on the potential for Temporary Threshold Shift (TTS) from underwater noise immissions on spawning Downs stock herring (requested by Natural England in its Relevant Representation [RR-265]);
 - Further information on the potential for TTS from underwater noise immissions on seahorse as protected features at relevant designated Marine Conservation Zone (MCZ) sites (requested by Natural England in its Relevant Representation [RR-265]); and
 - Further information on the potential for recoverable injury from underwater noise immissions on black seabream as a protected feature of the Kingmere MCZ (requested by Natural England in its Relevant Representation [RR-265]).
- The Applicant has committed to the use of double big bubble curtain (DBBC) noise abatement technology throughout the piling campaign. This commitment is secured in the In Principle Sensitive Features Mitigation Plan [REP3-046] (updated at Deadline 4), with Commitment C-265 being updated accordingly to reflect this proposed mitigation. The updated commitment is as follows:



- 1.2.4 C-265: "Double big bubble curtains will be deployed as the minimum single offshore piling noise mitigation technology to deliver underwater noise attenuation for all foundation installations throughout the construction of the Proposed Development where percussive hammers are used in order to reduce predicted impacts to:
 - sensitive receptors at relevant Marine Conservation Zone (MCZ) sites and reduce the risk of significant residual effects on the designated features of these sites;
 - spawning herring; and
 - marine mammals."
- The implementation of this mitigation will further reduce the impact ranges of underwater noise (including behavioural effect ranges) to outside any areas of high-density herring eggs and larvae (as defined by the IHLS data), herring spawning grounds (as defined by Coull et al., 1998), and MCZs within the vicinity of the Proposed Development of which seahorse are a qualifying feature.
- 1.2.6 Following the Applicant's commitment to implement DBBC noise abatement technology throughout the piling campaign at Deadline 4, this document has been revised to incorporate the additional noise reductions offered by this mitigation where appropriate. The implementation of DBBC throughout the piling campaign, supersedes the noise abatement previously detailed in this document (a minimal abatement of 6dB, from the use of low noise installation hammers) in Appendix 9

 Further information for Action Points 38 and 39 Underwater Noise [REP1-020], submitted at Deadline 1, this has also been updated in line with the revised predicted decibel reduction that is likely to be achieved by different noise abatement measures, as set out in Information to support efficacy of noise mitigation / abatement techniques with respect to site conditions at Rampion 2 Offshore Windfarm (Document Reference 8.40).



2. Action Point 35

2.1 Operational Worst Case Scenario

- In Agenda Item 11, Point 35, it has been requested to justify the Worst Case for the number of wind turbines in respect of underwater noise during operation. Although up to 90 turbines are proposed for the Rampion 2 development, the development scenario comprising the smaller number (65) of the largest wind turbines was determined to represent the Worst Case in terms of underwater noise, based on the size of turbines. The wind turbines for the 65 turbine option are [18 MW], the largest generation capacity model assessed, although it should be noted that turbines of this scale are not yet in production.
- Using the methodology defined in Appendix 11.3: Underwater noise assessment technical report, Volume 4 [APP-149], a source level of 162.7 dB SPL_{RMS} at 1 m was estimated, based on a linear extrapolation (itself worst case) from smaller turbines, although it should be noted that this is theoretical as the actual noise at 1 m from the turbine will be highly variable and complex. This value is only used to estimate the noise at greater distances from the turbine.
- The value is 11.1 dB greater than the estimate for a 10 MW turbine (151.6 dB SPL_{RMS}), based on a highly precautionary extrapolation from noise data of existing, smaller turbines as no data is currently available for operational underwater noise of turbines of this scale.
- Although the smaller turbines would be greater in number, the spacing of both the larger and smaller turbine options -means options means that any interaction between adjacent turbines would be negligible. For the maximum predicted noise level, based on the larger turbines, the noise from a turbine at mid-point between turbines (assuming a nominal separation of 1130 m) would be 121.4 dB SPL_{RMS}, which is of the order of background noise; the smaller turbines would be much lower (with a minimum separation of 830 m), around 112.3 dB SPL_{RMS}. The only significant effect from the operational turbines is focused on the individual turbines rather than any in-combination effect and so the loudest turbine defines the worst case scenario: thus the 65 WTG turbine layout, with larger turbines, is appropriate as the worst case.



3. Action Point 38 Habitat Suitability

3.1 Sandeel Habitat Suitability Assessment (<u>Latto et al</u>, <u>MarineSpace</u>, 2013)

- As detailed in paragraph 8.6.34 *et seq.* of **Chapter 8: Fish and shellfish ecology**, **Volume 2 [APP-049]**, sandeel are often associated with sandy substrates, into which they deposit their eggs and burrow into when threatened. They spawn in coarse sediments, preferring habitats composed of sand to gravelly sand but will tolerate sandy gravels as a marginal spawning habitat.
- As stated in paragraph 8.6.37 of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], areas of preferred sandeel habitat were identified through the interpretation of broadscale habitat mapping, predictive habitat modelling (OEL, 2020) and the classification of particle size analysis (PSA) data (EUNIS and Folk, 1954; Stephens and Diesing, 2015; UKSeaMap; 2018, BGS; 2015) in accordance to the methodologies described in Latto *et al.* (2013).
- As set out within paragraph 8.5.14 of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], the use of PSA data and broadscale habitat mapping only provides a proxy for the presence of sandeel in these locations (based on suitability of habitats; i.e. the potential for spawning rather than actual contemporary spawning activity). These data were therefore reviewed alongside other datasets presented within Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049] to determine the location and relative importance of sandeel habitats. These are shown in Figure 8.9 of Chapter 8: Fish and shellfish ecology, Volume 3 [APP-081].
- Following the submission of the DCO application, the MMO has requested that a sandeel habitat suitability assessment is undertaken following the methodology as detailed in Latto et al. (2013), as adapted from MarineSpace et al., (2013a). This has was subsequently also been requested by the Examining Authority (ExA) in its list of Action Points arising from Issue Specific Hearing 1 of the Rampion 2 Examination. This was submitted to the Rampion 2 Examination, at Deadline 1, and with feedback provided by the MMO and its advisors Cefas at Deadline 3. Revisions have subsequently been made and are reflected in this document, submitted to Examination at Deadline 4.
- To this end, and following the Latto et al. (2013) MarineSpace et al., (2013a) methodology, potential sandeel habitat has been further assessed through the overlapping of data layers that are deemed indicative of spawning sandeel activity. In accordance with the feedback provided by the MMO and its advisors Cefas, data from the Eastern Sea Fisheries Joint Committee (ESFJC) Fisheries Mapping Project (ESFJC, 2010), and Vessel Monitoring Systems (VMS) data (MMO, 2024) have been incorporated into the heatmapping assessment. The data sources used to generate the habitat suitability heatmap are summarised in Table 3-1 below, and are presented spatially in Figure 3.1.



Table 3-1	Sandeel	spawning	habitat	data	sources.
-----------	---------	----------	---------	------	----------

<u>Data</u> <u>Theme</u>	Data source	Summary of data set
Habitat data	EMODnet Seabed Substrate based on British Geological Survey (BGS) – 1:250,000 scale.	Dataset showing the distribution of seabed substrate types of the UK and some of its adjacent waters at 1:250,000 scale. Data were categorised into sediment types according to Folk (1954) classifications and into 'preferred' and 'marginal' habitat classes for sandeel spawning based on Latto et al. (2013) guidance.
Spawning grounds	Identified historic spawning grounds for sandeel in UK waters (Coull et al,1998).	'Fisheries Sensitivity Maps in British Waters' includes maps of the main spawning and nursery grounds for commercially important species, including sandeel.
Fishing activity	Sandeel fishing Grounds (Jensen et al. 2011)	These data include the mapping of sandeel habitats based on global positioning system (GPS) and VMS records of sandeel fishing vessels, and maps provided by fishers.
	ESFJC Fisheries Mapping Project (2009-2010).	Dataset specifically provides boundaries of sandeel fishery regions, together with month and season present, fishing gear used, and importance of any area to the fishers
	VMS data (2016 – 2017) (MMO, 2024)	VMS data, showing fishing activity for UK Vessels >15m. These data show the position, time at a position, and course and speed of fishing vessels. Fishing by demersal gears is considered an indicator of sandeel habitat.

A confidence assessment of the individual data layers, was undertaken in accordance with Latto et al. (2013) MarineSpace et al., (2013a) Confidence Assessment Protocol and Methodology (Appendix B), and considered the following parameters: method, vintage, positioning, resolution, quality standards and indicator of spawning (summarised in Table 3-2).

The parameter 'indicator of spawning' does not specifically relate to the data, but instead relates to the confidence in the data indicating potential spawning grounds. For instance, in the absence of direct data on spawning measurements (for example seabed sediments), what is the confidence that these data will inform or indicate the location of spawning grounds for sandeel (Latto et al. (2013)MarineSpace et al., 2013a). As this indicator parameter is fundamental to the outcome of the assessment, a greater weighting is assigned when assigning confidence scores.



3.1.6 The justification for the individual data layer confidence scores are provided in Table 3-2.

Table 3-2 Data parameters used to inform the confidence assessment of individual data layers, and assigned weightings (taken from <u>Latto et al.</u>, <u>2013)MarineSpace et al.</u>, <u>2013a</u>)

Parameter	Considerations	Weighting
Method	Technique to gather, process and interpret the data, robustness and reliability, best practice, publication	1
Vintage	Age of data and suitability of age to intended use	1
Positioning	Accuracy of locations provided.	1
Resolution	Resolution of the data in terms of what is included, density of points, time series length and interval, gaps in data. Note this does not assess spatial coverage.	1
Quality Standards	Quality control information provided, review internally, externally.	1
Indicator of Spawning	Suitability of the dataset to inform spawning potential.	5

The confidence scores of the individual data layers, and the justification of the scoring are provided in **Table 3-3** below.

Table 3-3 Confidence assessment for individual sandeel spawning habitat data sources.

Data source	Confidence Score ¹	Justification of confidence score
EMODnet 1:250,000 seabed	Preferred sediment - 4	As detailed in Latto <i>et al.</i> (2013), sandeel is known to prefer Sand and gravelly Sand
sediment maps	Marginal sediment - 2	substrates for spawning; and also have a marginal habitat sediment class of sandy Gravel. The Folk sediment classification therefore provides a spatially variable indicator to spawning and hence the level of confidence is

¹ Confidence scores derived from Latto et al. (2013) Marine Space et al. (2013a)




Data source	Confidence Score ¹	Justification of confidence score
		also variable (Latto et al., 2013)(MarineSpace, 2013a).
Sandeel Fishing Grounds (Jensen et al <u>et al</u> . 2011)	2	This dataset has been developed with the aim to identify sandeel fishing grounds. These data have therefore been used as a proxy for the presence of sandeel aggregations, lowering the confidence score assigned. In addition, this is a relatively old dataset.
Identified historic spawning grounds (Coull et alet al,1998)	3	Whilst the Coull <i>et al.</i> (1998) layer has specifically been developed to show spawning grounds, the methods reported do not detail what types of data were used, lowering the confidence score assigned. In addition, this is a relatively old dataset.
ESFJC Fisheries Mapping Project (2009-2010).	<u>3</u>	As the ESFJC datasets are specifically for herring, sprat and sandeel they are very relevant to inform spawning grounds. Data produced using the best available data and fishermen's knowledge. Best available data is not defined and a caveat is given detailing that the data should be considered illustrative only.
VMS data (2016 – 2017) (MMO, 2024)	2	VMS data only provide differentiation between fishing locations by gear types, and therefore it is the gear types that have been used to inform spawning areas. As one gear type will target a number of species and not just sandeel, the probability of it informing spawning grounds or habitat is very low.

The combined confidence of the data sources listed in **Table 3-3** represents the sum of the confidence scores of data sources at any one location. These data are presented spatially in **Figure 3.1** as a heatmap of the combined confidence scores. The greater the number of overlapping data layers then the greater the combined confidence score, and the greater the 'heat' mapped. Areas of higher 'heat' in **Figure 3.2**, therefore indicate a higher confidence that the seabed may be suitable for sandeel spawning.



Figure 3.1 Indicative Sandeel Spawning Data

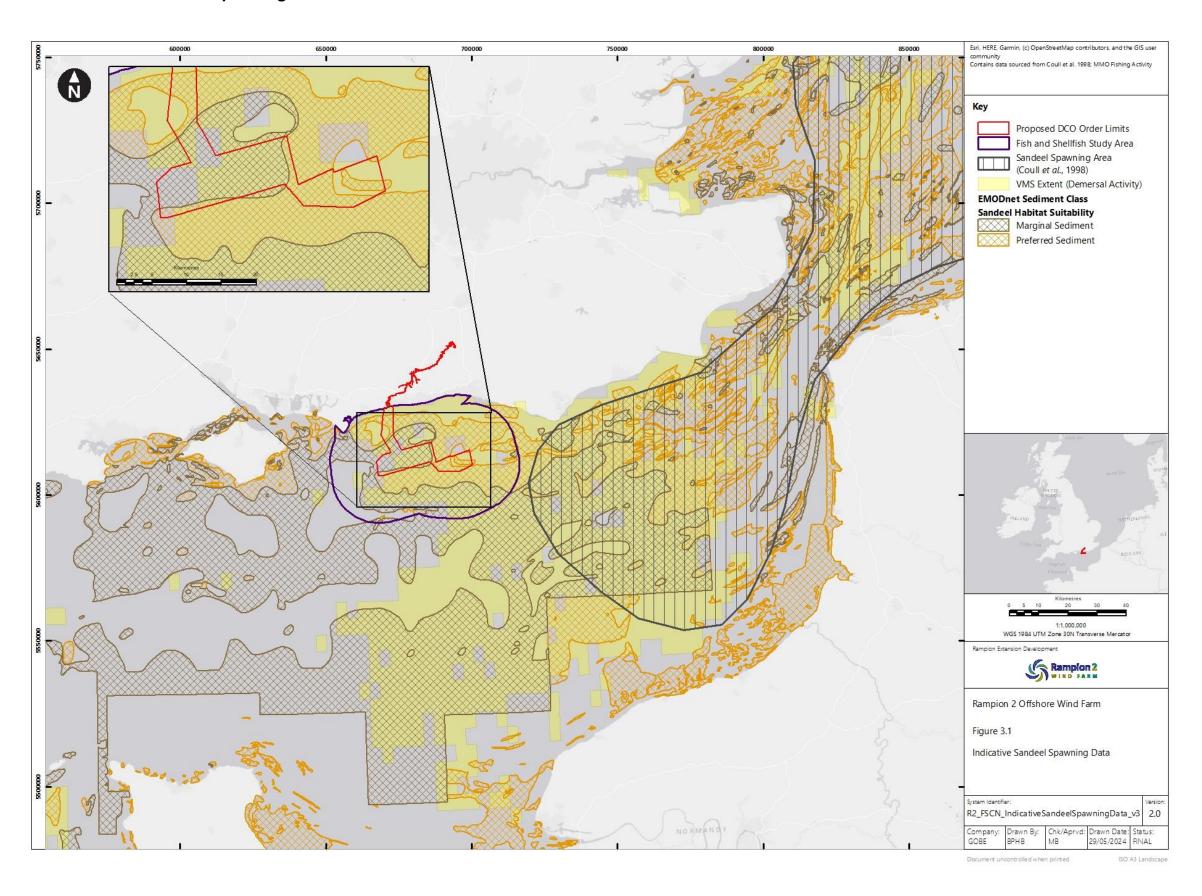




To aid the interpretation of heatmapping exercise in **Figure 3.2**, the combined confidence scores are -classified into the following qualitative categories: low, medium, high and very high (in accordance with the methodology defined by Latto et al. (2013). These categories are provided in **Table 3-4** below, with their respective combined confidence scores.

Table 3-4 Combined confidence score classifications

Combined confidence score	Qualitative category
1 – <u>4</u> 3	Low
<u>5</u> 4 – <u>8</u> 6	Medium
<u>9</u> 7 – <u>12</u> 9	High
1 <u>3</u> 0 – 1 <u>6</u> 4	Very High



Figure 3.2 Sandeel Spawning Habitat Suitability Assessment

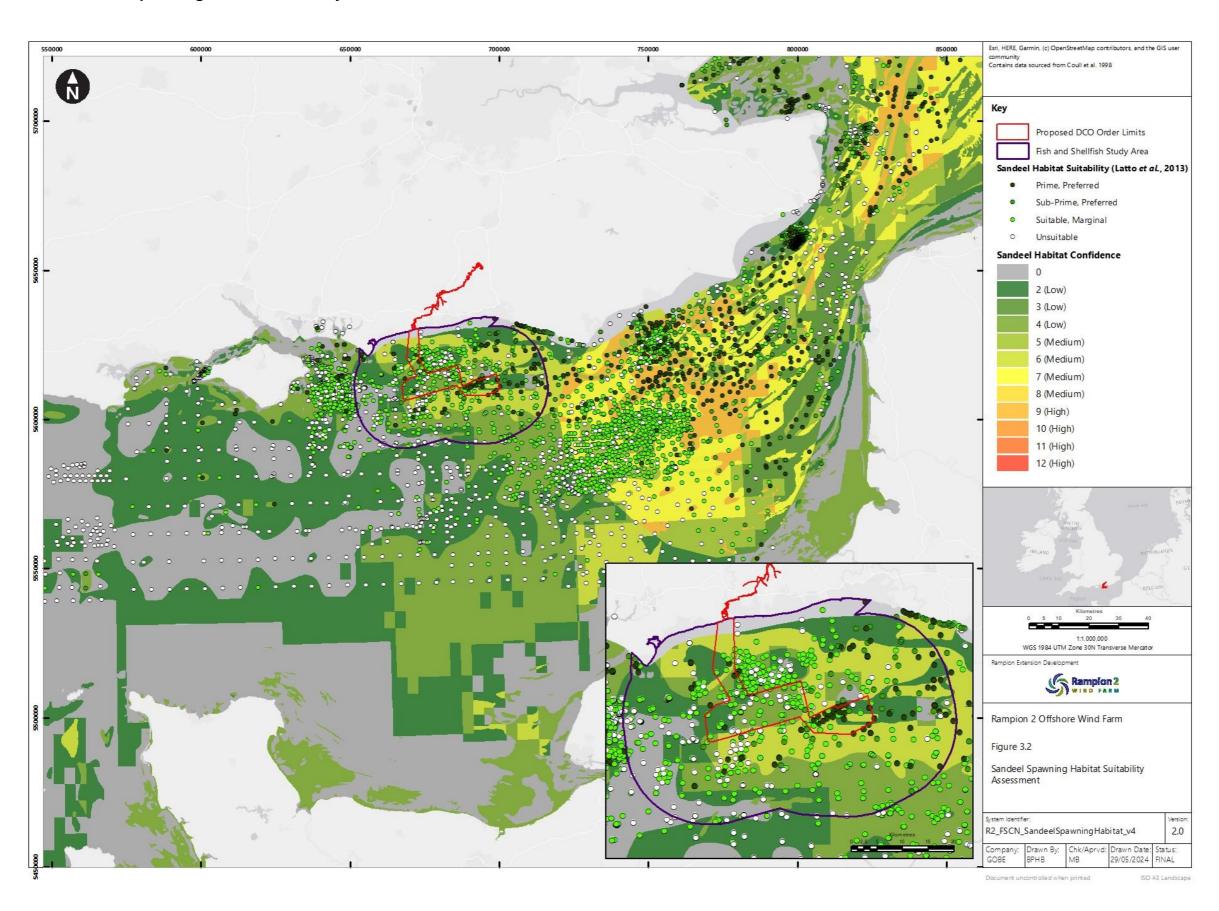



- and Export Cable Corridor (ECC) lie within an area of low to medium confidence that sandeel spawning habitats are present (score 2-6) due to the presence of 'Marginal' and 'Preferred' spawning substrates, demersal fishing activity (of a range of species, not just sandeel), and the absence of sandeel fishing grounds (Jensen et al., 2011; (ESFJC., 2010) and historic spawning grounds (Coull et alet al., 1998).
- Areas of medium to high confidence (score 7-9) are located to the east of Rampion 2, within the Dover Strait. This combined confidence score results from the presence of 'Marginal' and 'Preferred' spawning substrates, demersal fishing activity, and the presence of a historic sandeel spawning ground (as defined by Coull et al., 1998), indicative of a higher confidence that the seabed may be suitable for sandeel spawning.
- To ground-truth the heatmapping exercise, point source PSA data from EUNIS and Folk, (1954) Stephens and Diesing (2015) UKSeaMap (2018) and the British Geological Survey (BGS, 2015) (classified in accordance with Latto *et al.* (2013) categories to indicate the suitability of spawning substrates for sandeel), are overlaid over the heatmap in Figure 3.2. As evident in Figure 3.2, the presence of 'Prime, Preferred' sandeel habitats (identified in PSA data sources) broadly align with the area of medium to high confidence that suitable spawning substrates are present (identified in the heatmapping exercise) in the Dover Strait.
- Therefore, based on the available evidence outlined above, Rampion 2 is not considered to be a key area for sandeel spawning activity, when compared to the Dover Strait, where a sandeel spawning hotspot has been identified based on the presence of spawning substrates and a historic spawning ground.

3.2 Herring Habitat Suitability Assessment (Reach et al., MarineSpace,_-2013)

- Within the fish and shellfish ecology assessment of Rampion 2 (Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049]) herring were identified as a key receptor, with this species being recognised to have important spawning grounds within the English Channel region.
- As set out in paragraph 8.6.30 of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], herring are demersal spawners, and have specific requirements in terms of spawning grounds, with seabed sediment being the primary determinant (Maravelias et al., 2000). Paragraph 8.6.31 et seq. of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049] identifies the preferred sediment habitat for herring spawning as being well-oxygenated gravel and sandy gravel (Ellis et al., 2012), with some tolerance of more sandy sediments, although these are primarily on the edge of any spawning grounds (Stratoudakis et al., 1998).
- As stated in paragraph 8.5.14 of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], areas of preferred spawning habitat were identified through the interpretation of broadscale habitat mapping, predictive habitat modelling (OEL, 2020) and the classification of PSA data (EUNIS and Folk, 1954; Stephens and



- Diesing, 2015; UKSeaMap; 2018, BGS; 2015) in accordance to the methodologies described in Reach *et al.* (2013).
- As detailed in paragraph 8.5.14 of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], the use of PSA data and broadscale habitat mapping only provides a proxy for the presence of herring in these locations (based on suitability of habitats; i.e. the potential for spawning rather than actual contemporary spawning activity). These data were therefore reviewed alongside other datasets presented within Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049] to determine the location and relative importance of herring spawning habitats. These are shown in Figure 8.10 of Chapter 8: Fish and shellfish ecology, Volume 3 [APP-081].
- Following the submission of the DCO Application, the MMO has requested that a herring habitat suitability assessment is undertaken following the methodology as detailed in Reach et al. (2013) as adapted from MarineSpace et al., (2013b). This was subsequently also been requested by the ExA in its list of Action Points arising from Issue Specific Hearing 1 of the Rampion 2 Examination. This assessment was therefore undertaken, with the aim of reaching agreement with the MMO regarding the conclusions made in Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049] on the potential for population level effects on Downs stock herring. The heatmapping exercise was submitted to the Rampion 2 Examination, at Deadline 1 in Appendix 9 Further information for Action Points 38 and 39 Underwater Noise [REP1-020]. Feedback was provided by the MMO and its advisors Cefas at Deadline 3, and revisions have subsequently been made and are reflected in this document, submitted to Examination at Deadline 4.
- Following the Reach et al. (2013) methodology, potential herring spawning substrates and active spawning areas have been assessed through the overlapping of data layers deemed to be indicative of herring spawning habitats and activity. In accordance with the feedback provided by the MMO and its advisors Cefas, data from the ESFJC Fisheries Mapping Project (ESFJC, 2010), and VMS data (MMO, 2024) have been incorporated into the heatmapping assessment.
- The data sources used to generate the habitat suitability heatmap are summarised in <u>Table 3-5 below</u>, and are presented spatially in <u>Figure 3.3</u>.

Table 3-5 Herring spawning habitat data sources.

<u>Data</u> <u>Theme</u>	Data source	Summary of data set
Habitat data	EMODnet Seabed Substrate based on British Geological Survey (BGS) – 1:250,000 scale.	Dataset showing the distribution of seabed substrate types of the UK and some of its adjacent waters at 1:250,000 scale. Data were categorised into sediment types according to Folk (1954) classifications and into 'preferred' and 'marginal' habitat classes for



<u>Data</u> <u>Theme</u>	Data source	Summary of data set
		herring spawning based on Reach et al. (2013) guidance.
Spawning grounds	Identified historic spawning grounds for herring in UK waters (Coull et al,1998)	Fisheries Sensitivity Maps in British Waters' which includes maps of the main spawning and nursery grounds for commercially important species, including herring.
Herring larval abundances	International Herring Larvae Survey (IHLS) data (2007 – 2020) (ICES, 2024).	These data provide information regarding the number of larvae present within the areas surveyed during the IHLS survey campaigns. Larval densities, (0-11 mm length) recorded over period 2007 - 2020 for each survey station, are used to inform this assessment.
Fishing activity	Eastern Sea Fisheries Joint Committee Fisheries Mapping Project (2009-2010	Dataset specifically provides boundaries of herring fishery regions, together with month and season presence, fishing gear used, and importance of any area to the fishers.
	VMS data (2016 – 2017) (MMO, 2024)	VMS data, showing fishing activity for UK Vessels >15m. These data show the position, time at a position, and course and speed of fishing vessels. Fishing by pelagic gears is considered an indicator of herring spawning habitat.

A confidence assessment of the individual data layers (summarised in **Table 3-5**) was undertaken in accordance with Reach et al. (2013) Confidence Assessment Protocol and Methodology (Appendix B), and considered the following parameters: method, vintage, positioning, resolution, quality standards and indicator of spawning (summarised in **Table 3-6**). The parameter 'indicator of spawning' does not specifically relate to the data, but instead relates to the confidence in the data indicating spawning grounds. For instance, in the absence of direct data on spawning measurements (for example seabed sediments), what is the confidence that these data will inform or indicate spawning grounds for herring (Reach et al., 2013) MarineSpace et al., 2013b). As this indicator parameter is fundamental to the outcome of the assessment, a greater weighting is assigned when assigning confidence scores.



Table 3-6 Data parameters used to inform the confidence assessment of individual data layers, and assigned weightings (taken from MarineSpace et al., 2013bReach et al., 2013)

Parameter	Considerations	Weighting
Method	Technique to gather, process and interpret the data, robustness and reliability, best practice, publication	1
Vintage	Age of data and suitability of age to intended use	1
Positioning	Accuracy of locations provided.	1
Resolution	Resolution of the data in terms of what is included, density of points, time series length and interval, gaps in data. Note this does not assess spatial coverage.	1
Quality Standards	Quality control information provided, review internally, externally.	1
Indicator of Spawning	Suitability of the dataset to inform spawning potential.	5

3.2.63.2.8 The confidence scores of the individual data layers, and the justification of the scoring are provided in **Table 3-7** below.

Table 3-7 Confidence assessment for individual herring spawning data sources

Data source	Confidence Score ²³	Justification of confidence score
EMODnet 1:250,000 seabed sediment maps	Preferred sediment – 3 Marginal sediment - 2	As detailed in Reach <i>et al.</i> (2013), herring are known to prefer Gravel and sandy Gravel substrates for spawning; and also have a marginal habitat sediment class of gravelly Sand. The Folk sediment classification therefore provides a spatially variable indicator to spawning and hence the level of confidence is also variable (MarineSpace, 2013bReach <i>et al.</i> , 2013).

² Confidence scores derived from Reach *et al.* (2014).

³ Confidence scores derived from MarineSpace et al., 2013a)




Data source	Confidence Score ²³	Justification of confidence score
IHLS data IHLS (ICES, 2007-2020)	5_4	Highest score assigned as it is a direct indicator of presence/absence of larvae at the surface of the spawning habitat.
Identified historic spawning grounds (Coull et alet al, 1998)	3	Whilst the Coull et alet al. (1998) layer has specifically been developed to show spawning grounds, the methods reported do not detail what types of data were used, lowering the confidence score assigned. In addition, this is a relatively old dataset.
ESFJC identified fishing grounds	<u>33</u>	As the ESFJC datasets are specifically for herring, sprat and sandeel they are very relevant to inform spawning grounds. Data produced using the best available data and fishermen's knowledge. Best available data is not defined and a caveat is given detailing that the data should be considered illustrative only.
VMS dataVMS	<u>22</u>	VMS data only provide differentiation between fishing locations by gear types, and therefore it is the gear types that have been used to inform spawning areas. As one gear type will target a number of species and not just herring, the probability of it informing spawning grounds or habitat is very low.

The combined confidence of the data sources listed in **Table 3-7** is the sum of the confidence scores of data sources at any one location. These data are presented spatially in **Figure 3.4** as a heatmap of the combined confidence scores. The greater the number of overlapping data layers then the greater the combined confidence score, and the greater the 'heat' mapped. Areas of higher 'heat' in **Figure 3.4** therefore indicate a higher confidence that the seabed may be suitable for spawning herring.

⁴ Score applied within contoured area with >600 larvae per m2. This approach has been used in accordance with herring habitat suitability assessments undertaken for other offshore wind DCO Applications.



Figure 3.3 Indicative Herring Spawning Data

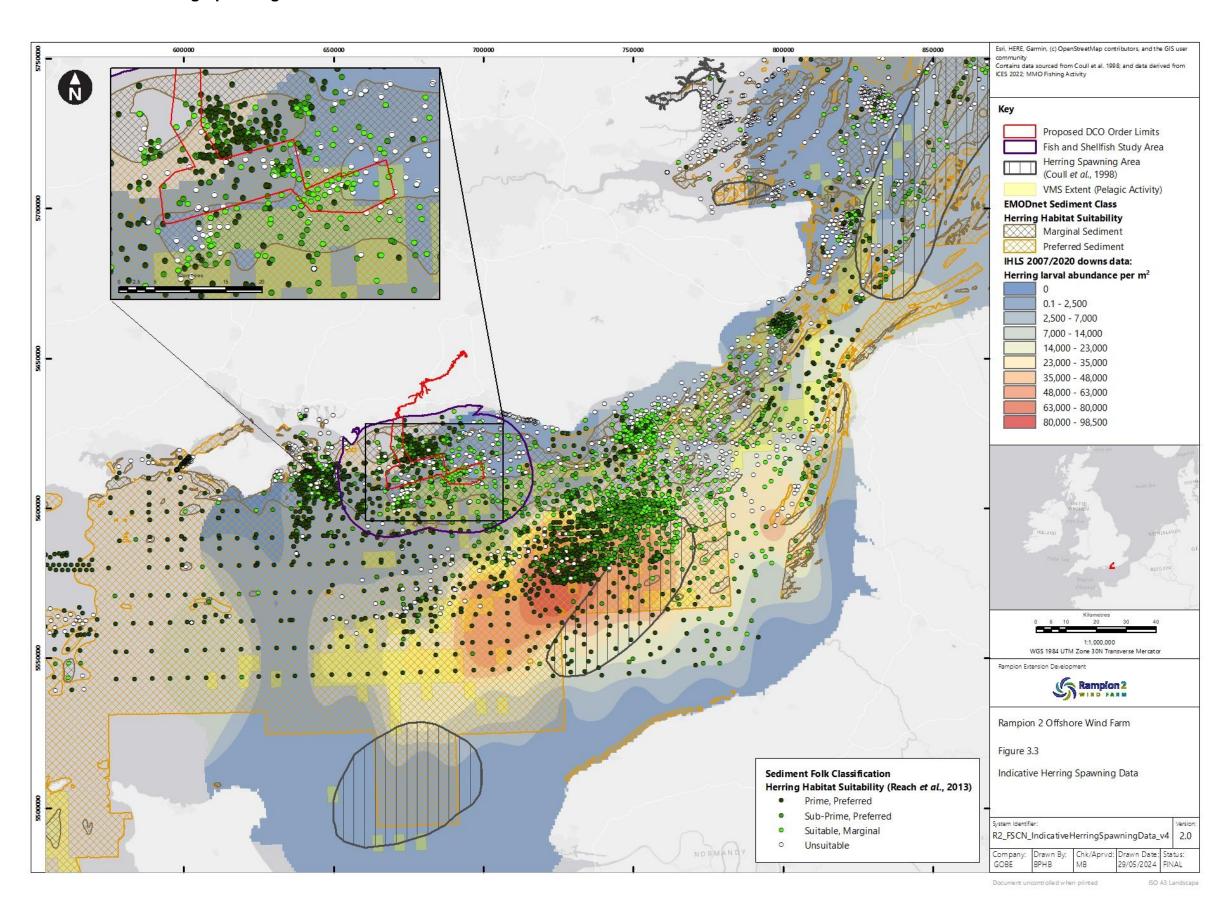




3.2.83.2.10 To aid the interpretation of heatmapping exercise in Figure 3.4, the combined confidence scores have been classified into the following qualitative categories: low, medium and high.
These categories are provided in Table 3-8 below, with their respective combined confidence scores.

Table 3-8 Combined confidence score classifications

Combined confidence score	Qualitative category
1-4	Low
<u>5 – 8</u>	<u>Medium</u>
9-12	<u>High</u>
<u>13 – 16</u>	Very High



Figure 3.4 Herring Spawning Habitat Suitability Assessment

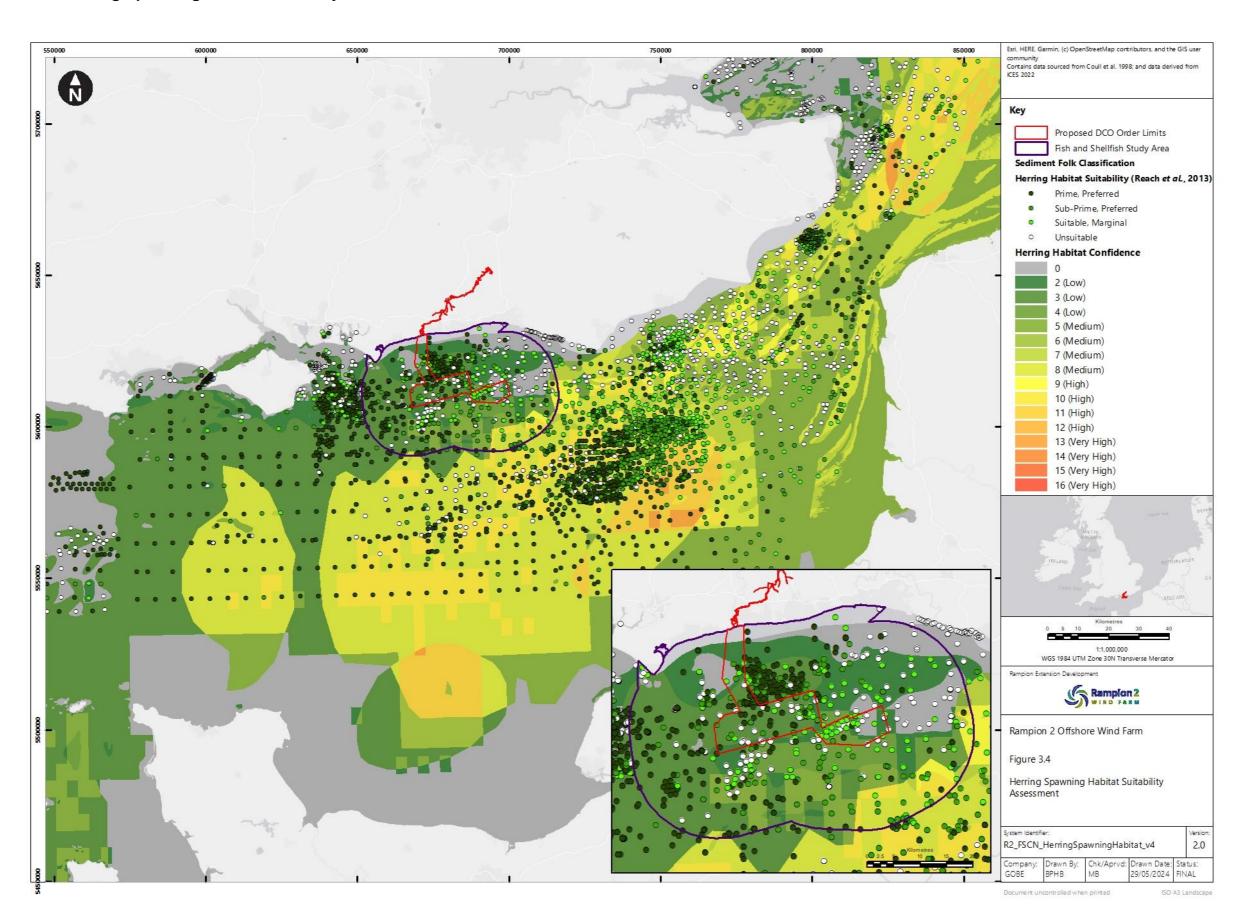



- 3.2.93.2.11 The outputs of the heatmapping exercise indicates that the Rampion 2 ECC and array area are located in an area of very low to low confidence that herring spawning habitats are present (score 0-43) due to the presence of 'Marginal' and 'Preferred' spawning substrates, pelagic fishing activities (of a range of species, not just herring), low densities of herring larvae present (<600 larvae m²), and the absence of a historic herring spawning ground (as defined by Coull et al.,1998), and herring fishing grounds (as defined by ESFJC., 2010).
- Areas of medium to high confidence (score 8-98) that suitable spawning substrates are present, are located approximately 8km southeast of the array area, due to the presence of 'Preferred' spawning substrates, pelagic fishing activities, densities of >600 herring larvae per m² present (with larval densities ranging from 14,000 (approximately 8 km southeast of the array area) to 98,500 larvae per m² (approximately 45 km southeast of the array area)), and the absence of a historic herring spawning ground (as defined by Coull et al.,1998) and herring fishing grounds (as defined by ESFJC., 2010).
- Areas of very high confidence (score 124) that suitable spawning substrates are located are located 47km southeast of the array area; this is due to the presence of a herring spawning ground (as defined by Coull et alet al., 1998), 'Preferred' spawning substrates, pelagic fishing activities and densities of >600 herring larvae per m² (with larval densities peaking at 63,000 larvae per m²).
- To ground-truth the heatmapping exercise, point source PSA data from EUNIS and Folk, (1954) Stephens and Diesing (2015) UKSeaMap (2018) and the British Geological Survey (BGS, 2015) (classified in accordance with Reach et alet al. (2013) categories to indicate the suitability of spawning substrates for herring), are overlaid over the heatmap in Figure 3.4. As evident in Figure 3.4, 'Prime, Preferred' herring spawning substrates are widespread across the English Channel, and broadly align with the EMODNet broadscale marine habitat mapping. 'Prime, Preferred' habitats, as identified in the point source PSA data also align with areas of very high confidence (score 124) that suitable spawning substrates are present (as identified in the heatmapping exercise) which were identified within the herring spawning ground (as defined by Coull et al., 1998).
- The location of high confidence score areas (score 11), indicative of suitable spawning habitats, offshore of the array area (Figure 3.4) correspond to the predicted locations of spawning herring used to inform the assessment within Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049].
- Therefore, based on the available evidence outlined above, the location of very high confidence score areas (score 124), indicative of suitable spawning habitats, is located approximately 47km southeast of the array area (Figure 3.4Figure 3-4).

Piling mitigation for sensitive features

As detailed in Section 1.2 of this document, the Applicant has committed to the use of DBBC noise abatement technology throughout the piling campaign. This commitment is secured in the In Principle Sensitive Features Mitigation Plan [REP3-046] (updated at Deadline 4), wherein with additional noise mitigation measures as proposed from March through to July are also detailed.



- The implementation of this mitigation will further reduce the impact ranges of underwater noise (including behavioural effect ranges) to sensitive features such as spawning herring. The additional noise abatement offered by the implementation of DBBC, and its benefits to spawning herring, are therefore captured within this document, as a revision to Appendix 9 Further information for Action Points 38 and 39 Underwater Noise [REP1-020], submitted at Deadline 1.
- The mitigated impact ranges from the implementation of DBBC (as defined using the 141dB SELss disturbance threshold) are presented in **Figure 3.5** and **Figure 3.6**, relative to areas of high confidence that spawning herring may be present (as informed by the heatmapping exercise). As evident, the use of DBBC further mitigate the underwater noise contours away from areas of key importance to spawning herring. Therefore, the use of DBBC throughout the piling campaign, will ensure there are no population level effects on the Downs herring stock.
- As detailed in Volume 2 Chapter 8 Fish and shellfish ecology [APP-049], a threshold of 135dB SELss, based on a study by Hawkins et al. (2014) has been suggested by the MMO as a suitable threshold for behavioural responses of sensitive fish receptors. It is important in this context to note that the use of the 135 dB SELss threshold in an open water receiving environment characterised by shipping is highly precautionary and very unlikely to elicit a comparable response to that observed by Hawkins et al. (2014.). The use of this threshold is also not supported in the literature for use in impact assessments. It is on this basis, that the Applicant does not support the use of this threshold, to determine potential behavioural effects of noise sensitive species such as herring.
- 3.2.143.2.21 Notwithstanding this, the Applicant has presented the 135 dB SELss threshold, with the implementation of mitigation in the form of DBBC, relative to areas of high confidence that spawning herring may be present. As evident in Figure 3.7 and Figure 3.8, the mitigated impact ranges, as defined using the overly precautionary 135dB SELss threshold, do not overlap with any areas of key importance to spawning herring.



Figure 3.5 Mitigated (DBBC) Behavioural Response Impact Ranges for Spawning Herring from the Piling of Monopile Foundations (141dB SELss)

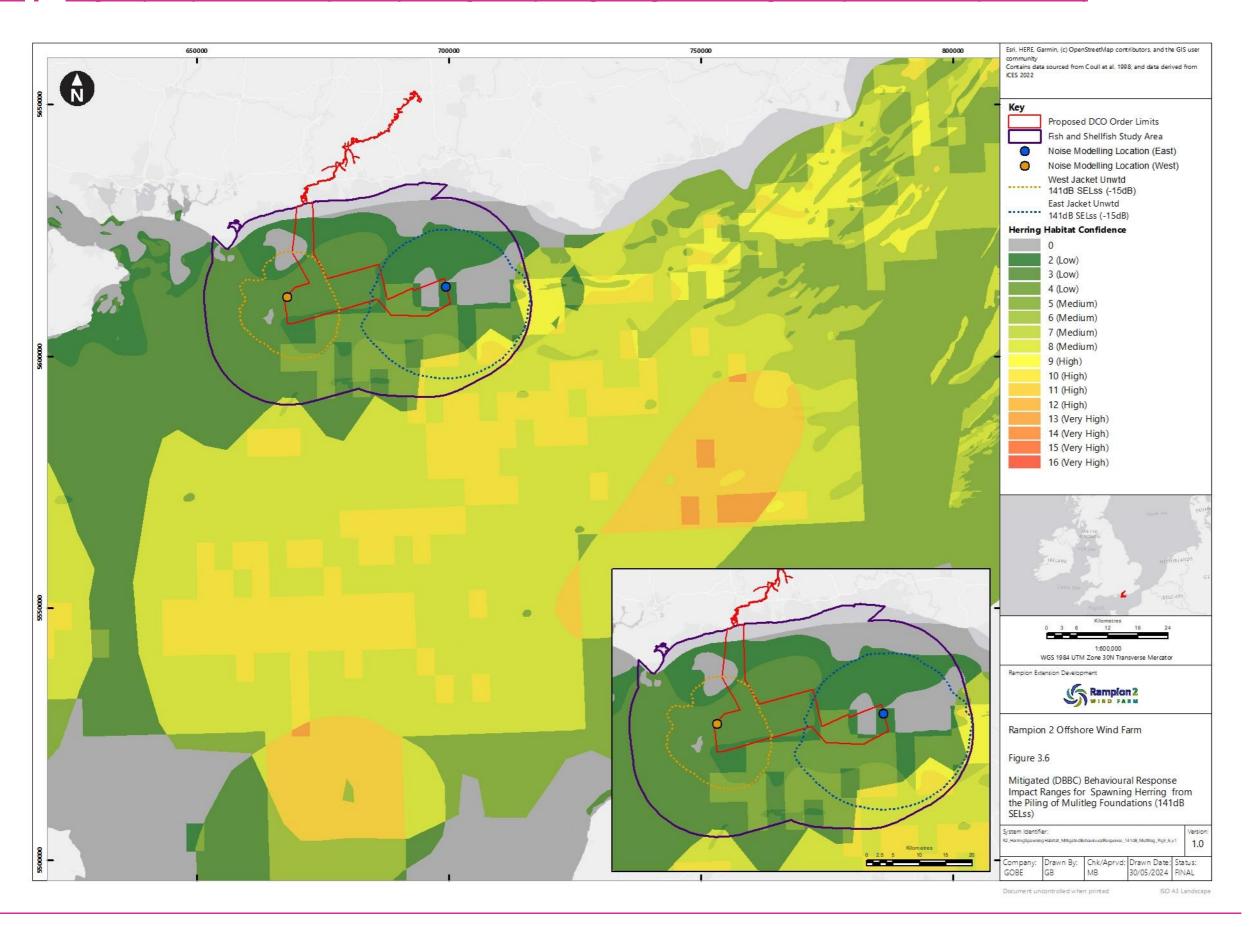




Figure 3.6 Mitigated (DBBC) Behavioural Response Impact Ranges for Spawning Herring from the Piling of Multileg Foundations (141dB SELss)

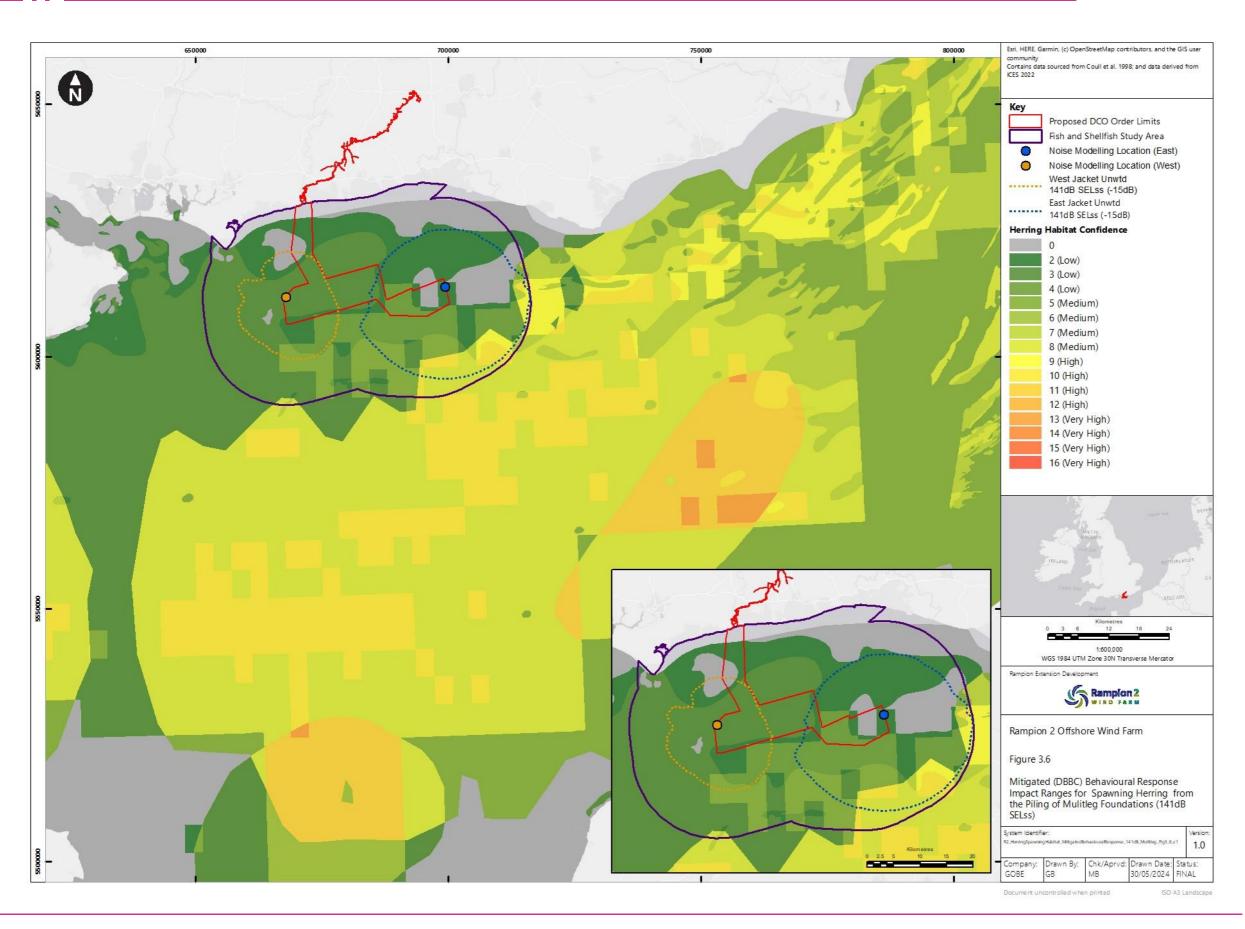




Figure 3.7 Mitigated (DBBC) Behavioural Response Impact Ranges for Spawning Herring from the Piling of Monopile Foundations (135dB SELss)


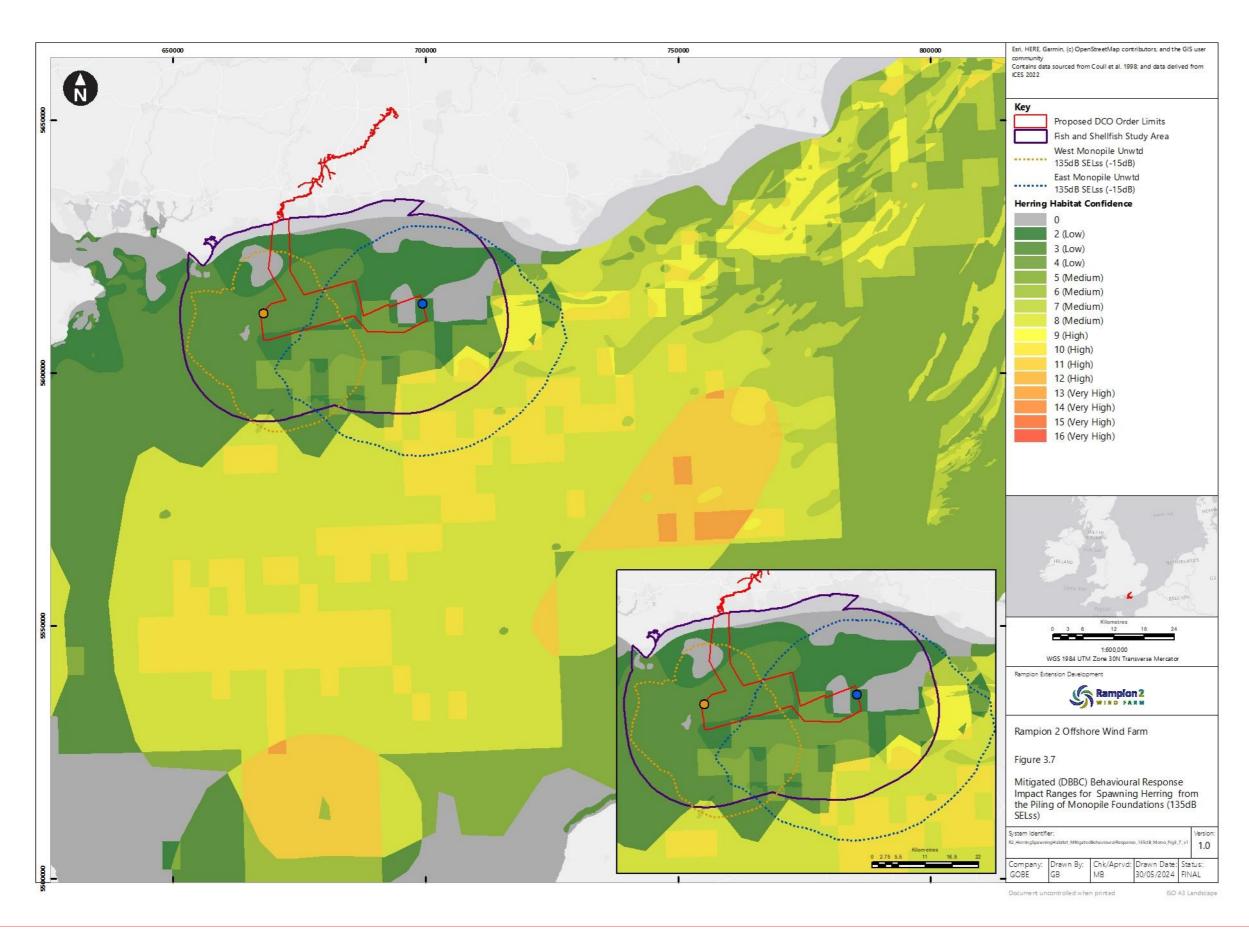




Figure 3.8 Mitigated (DBBC) Behavioural Response Impact Ranges for Spawning Herring from the Piling of Multileg Foundations (135dB SELss)



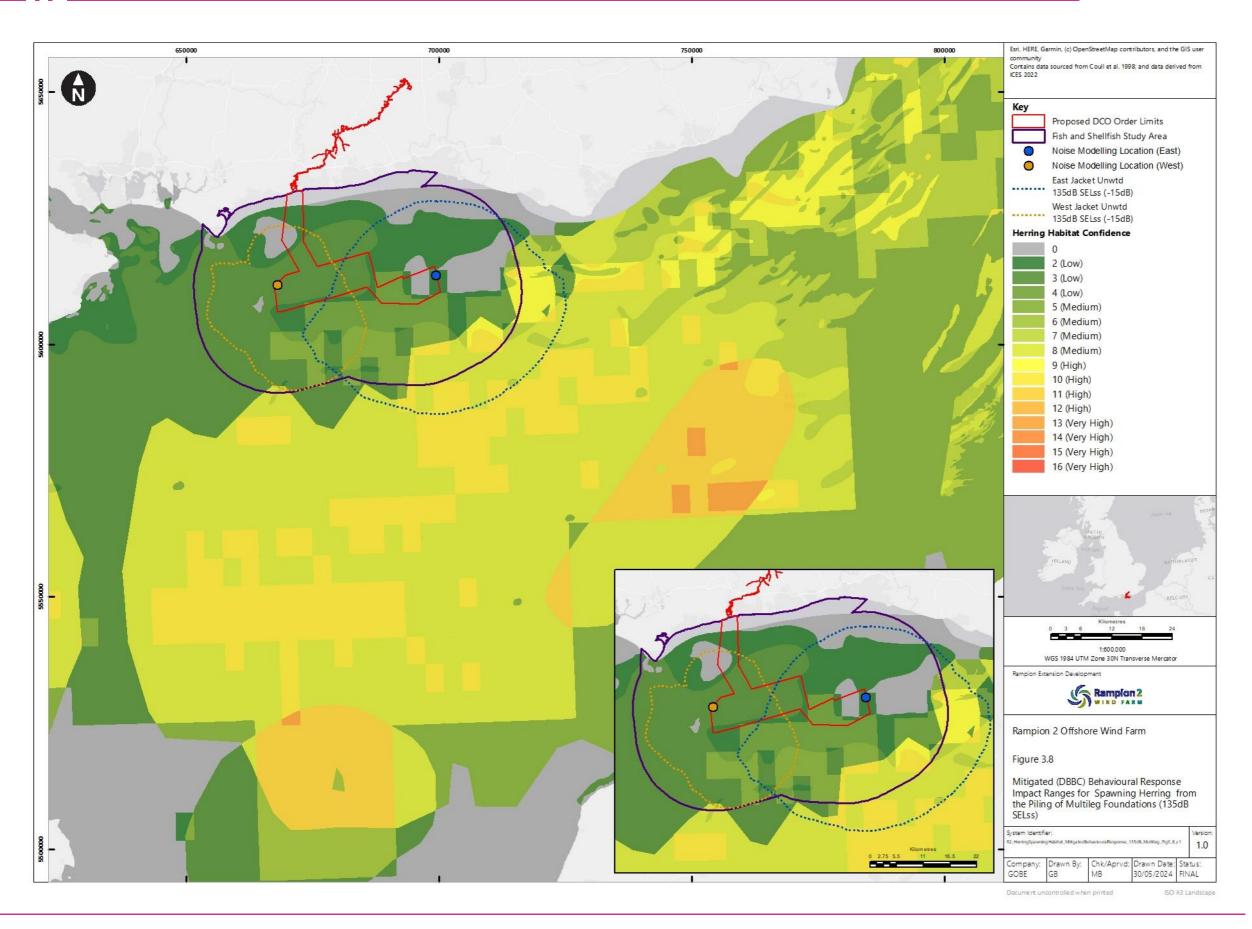

4. Action Point 39

4.1 Potential impacts on spawning herring from underwater noise

- As set out within the fish and shellfish ecology assessment of Rampion 2 (Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049]), herring have been identified as a key receptor, with this species being recognised as having important spawning grounds within the English Channel region. As detailed in paragraph 8.6.31 et seq. of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], two herring spawning grounds (as defined by Coull et alet al., 1998) are located within the English Channel; one in French waters (Baie de Seine) and one due south of the Sussex coast, approximately 47km from the Rampion 2 array area. The herring stocks that reside in the eastern channel and southern North Sea are known as the Downs stock (Vause and Clark, 2011).
- A comprehensive assessment of the potential for impacts from underwater noise on spawning herring from Rampion 2 was undertaken and reported in **Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049**] of the ES. No significant population level effects were therefore concluded on the Downs stock herring from the construction, operation and maintenance, and decommissioning of Rampion 2, due to the localised extent of the impact area, and the distance between the herring spawning ground and Rampion 2 (47km).
- Following the submission of the DCO application, the Examining Authority (ExA) has requested further information in the list of Action Points arising from Issue Specific Hearing 1 of the Rampion 2 Examination, on the potential effects on spawning herring, in the event that potential noise impacts result in a behavioural effect.
- 4.1.44.1.3 In addition, further information on the potential for TTS from underwater noise immissions on spawning Downs stock herring was also requested by Natural England in its Relevant Representation.
- There are a range of possible scales of effect arising on fish as a result of exposure to noise; from mortality or injury at high noise levels, through recoverable injury and TTS and down to potential behavioural (disturbance) impacts at lower noise levels. Whilst confidence and supporting data is widely accepted and threshold levels can be relied upon with respect to the impacts of high noise levels, noise immission thresholds that elicit behavioural level effects are subject to debate and uncertainty. In addition, the sensitivity of fish is variable according to the species' hearing ability.
- 4.1.64.1.5 As detailed in paragraph 8.9.197 of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], herring have a swim bladder that is involved in hearing and are therefore known to be sensitive to underwater noise. TTS is a temporary reduction in hearing sensitivity caused by exposure to intense sound, resulting from temporary changes in sensory hair cells of the inner ear and/or damage to auditory nerves. The maximum impact ranges for TTS have been presented in



Figures 8.18 to 8.21 in Chapter 8: Fish and shellfish ecology, Volume 3 [APP-081]); as evident in the figures, there is no spatial overlap of the TTS impact contours with the herring spawning ground (as defined by Coull et alet al., 1998), or areas of high confidence that suitable spawning habitats are present (as informed by a heatmapping exercise detailed in Section 3.2 and presented in Figure 3.4 of this Clarification Note).

- 4.1.74.1.6 As detailed in the In Principle Sensitive Features Mitigation Plan [REP3-046] (updated at Deadline 4) the Applicant has committed to the implementation of at least one offshore piling DBBC noise mitigation technology throughout the piling campaign, therefore mitigating against potential impacts from underwater noise to spawning herring. Figure 4.1 and Figure 4.2 illustrate the further reduced TTS impact ranges from the implementation of the proposed mitigation during the Downs herring spawning period (November through to January (Coull et alet al., 1998)), relative to the Downs stock herring spawning ground. To ensure a precautionary approach, the minimum noise abatement offered by the proposed mitigation has been modelled and presented in and (-6dB reduction from a low noise hammer). As evident in Figure 4.1 and Figure 4.2 there is no overlap of mitigated piling noise at a level that will disturb spawning adults (186 dB SELcum) with the Downs stock herring spawning ground of mitigated piling noise at a level that will disturb spawning adults (186 dB SEL_{cum}) at the recognised spawning ground (as defined by Coull et al., 1998, or areas of key importance to herring as identified in and a heatmapping exercise detailed in **Section 3.2** and presented spatially in **Figure 3.4** of this Clarification Note).
- As detailed in paragraph 8.9.247 et seq. of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], behavioural effects of fish in response to construction related underwater noise includes a range of responses including startle response (C-turn), strong avoidance behaviour, changes in swimming or schooling behaviour, or changes of position in the water column (Hawkins et alet al., 2014). These behavioural responses to underwater noise are also highly dependent on factors such as the type of fish/shellfish, sex, age and condition, as well as other stressors to which the fish/shellfish have been exposed. A comprehensive literature review of the range of responses exhibited by sensitive fish receptors is detailed in paragraph 8.9.247 et seq. of Chapter 8: Fish and shellfish Ecology, Volume 2 [APP-049].
- The mitigated behavioural response impact ranges from the implementation of DBBC (as defined using the 141dB SELss disturbance threshold, based on a study by Kastelein et al. (2017) are presented relative to the Downs herring stock spawning ground as defined by Coull et al. (1998) in Figure 4.3 and Figure 4.4. As evident, the implementation of DBBC noise abatement technology, during the Downs stock spawning period provides a significant reduction in the behavioural effect impact ranges as defined using the 141dB SELss threshold (based on the Kastelein et al. (2017), with no interaction of the noise contours with the herring spawning ground (as defined by Coull et al., 1998).
- Kastelein et al. (2017), reported a 50% initial startle response (sudden short-lived changes in swimming speed) at an SELss of 131 dB re 1 mPa2 s for 31 cm seabass and 141 dB re 1 mPa2 s for 44 cm seabass. Based on the findings, the Applicant is confident that a threshold of 141 dB re 1 mPa2 is an appropriate behavioural response threshold to inform the assessment of potential impacts on



spawning herring from underwater noise. As reported by Kastelein *et al.* (2017), the thresholds are based on startle responses of seabass, (a brief change in swimming speed, direction, or body posture), as opposed to a full abandonment of the ensonified area. Furthermore, there was no evidence of any consistent sustained response to sound exposure by the study animals (changes in school cohesion, swimming depth, and speed) at levels up to 166 dB SELss.


- As detailed in Volume 2 Chapter 8 Fish and shellfish ecology [APP-049], a threshold of 135dB SELss, based on a study by Hawkins et al. (2014) has been suggested by the MMO as a suitable threshold for behavioural responses of sensitive fish receptors. It is important in this context to note that the use of the 135 dB SELss threshold in an open water receiving environment characterised by shipping is highly precautionary and very unlikely to elicit a comparable response to that observed by Hawkins et al. (2014.). Furthermore, Hawkins et al. (2014) explicitly state within the publication that the data presented should not be used to define sound exposure criteria, specifically as it is not representative of the receiving environment of open sea conditions.
- 4.1.84.1.11 Notwithstanding this, the Applicant has <u>also</u> presented the behavioural impacts threshold based on the Hawkins *et al.* (2014) study, relative to the Downs herring stock spawning ground as defined by Coull <u>et al.</u> (1998). <u>Figure 4.5 and Figure 4.6 and present the unmitigated impact ranges, and the reduced impact contours from the minimal noise abatement offered by the mitigation proposed (-156dB reduction from the use of <u>a low noise hammerDBBC</u>) during the Downs herring spawning period (November through to January (Coull *et al.*, 1998)), relative to the spawning ground.</u>
- 4.1.94.1.12 As evident in Figure 4.5 and Figure 4.6, the implementation of the proposed mitigation during the Downs stock spawning period provides a significant reduction in the behavioural effect impact ranges as defined using the 135dB SEL_{ss} threshold (based on the Hawkins *et al.*, (2014) study), with no interaction of the noise contours with the herring spawning ground (as defined by Coull., 1998). Furthermore, as informed by a heatmapping exercise (the outputs of which are detailed in Section 3.2 and presented spatially in Figure 3.4 of this document), the areas of highest confidence that suitable herring spawning substrates are present, are located within the spawning ground as defined by Coull *et al.*, (1998), outside of the range of behavioural effects. This area of high confidence was defined based on broadscale habitat mapping, larval density data from the IHLS (201107-20204), the locations of fishing grounds, and fishing activity using pelagic gear, and historic mapping of spawning grounds (Coull *et al.*, 1998).
- Population level effects on Downs stock herring will only occur if substantial changes in behaviour are apparent for a large proportion of the animals exposed to underwater noise. Such behavioural changes include the displacement of individuals from preferred sites for spawning, this would subsequently have an impact on breeding success at the specific Downs herring stock spawning ground. Any population level effects from displacement from a spawning ground, have the potential to last up to several weeks (Engas et al. 1996; Slotte et al. 2004; Lokkeborg et al. 2012 a,b, as cited in Popper et al, 2014). However, as evident in Figure 4.5 and Figure 4.6, which present the over precautionary 135dB behavioural impacts threshold based on the Hawkins et al. (2014) study, there is no pathway for behavioural effects on spawning herring, as there is no significant



infringement of the contour with the herring spawning ground (as defined by Coull et al. (1998), or areas of key importance to herring as defined in a heatmapping exercise detailed in **Section 3.2** of this Clarification Note). Furthermore, due to the short term and intermittent nature of piling operations, no sustained behavioural responses will occur, with any effects therefore likely to be temporary.

Rampion 2
WIND FARM

Figure 4.1 Predicted Worst Case Impact Ranges from the Simultaneous Piling of Monopile Foundations

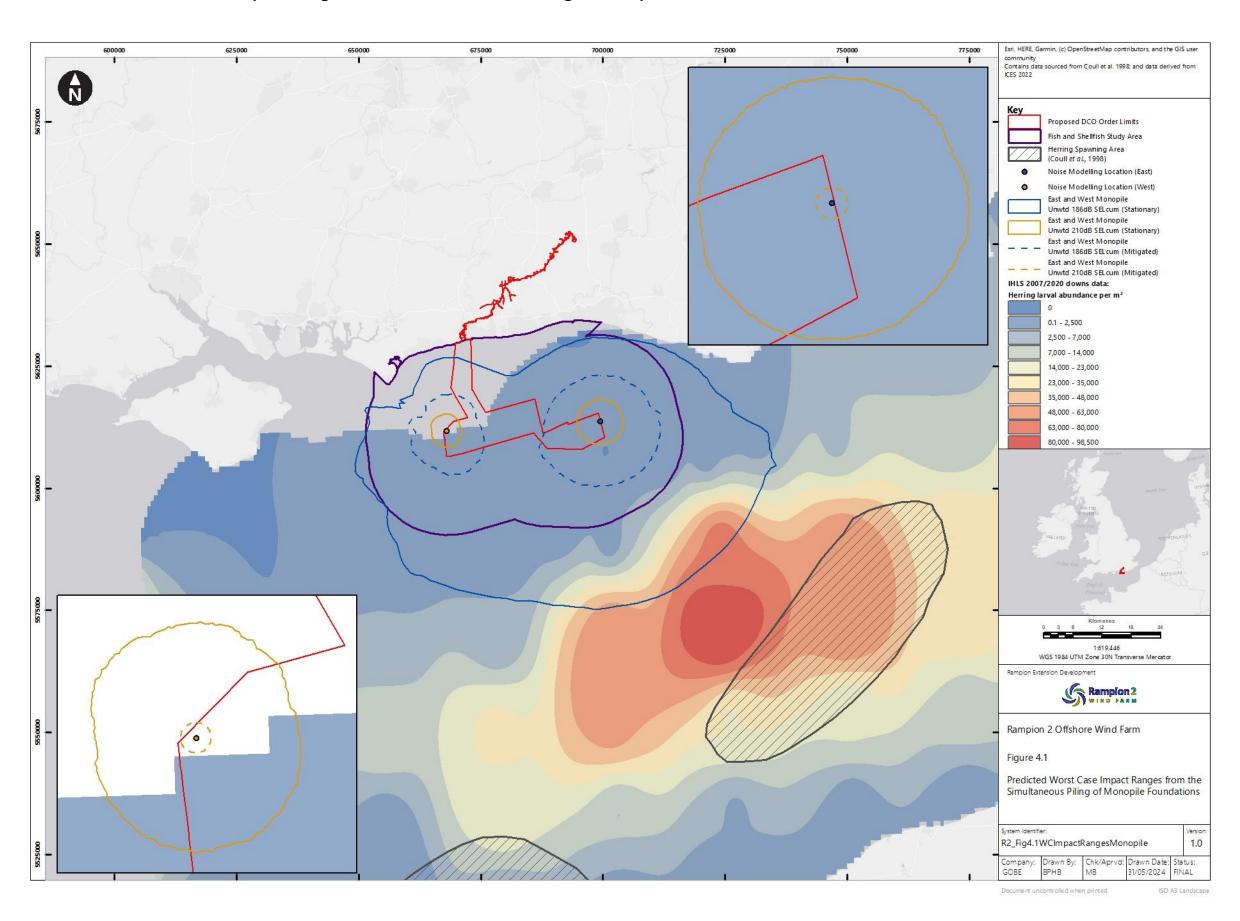

Rampion 2
WIND FARM

Figure 4.2 Predicted Worst Case Impact Ranges from the Simultaneous Piling of Multileg Foundations

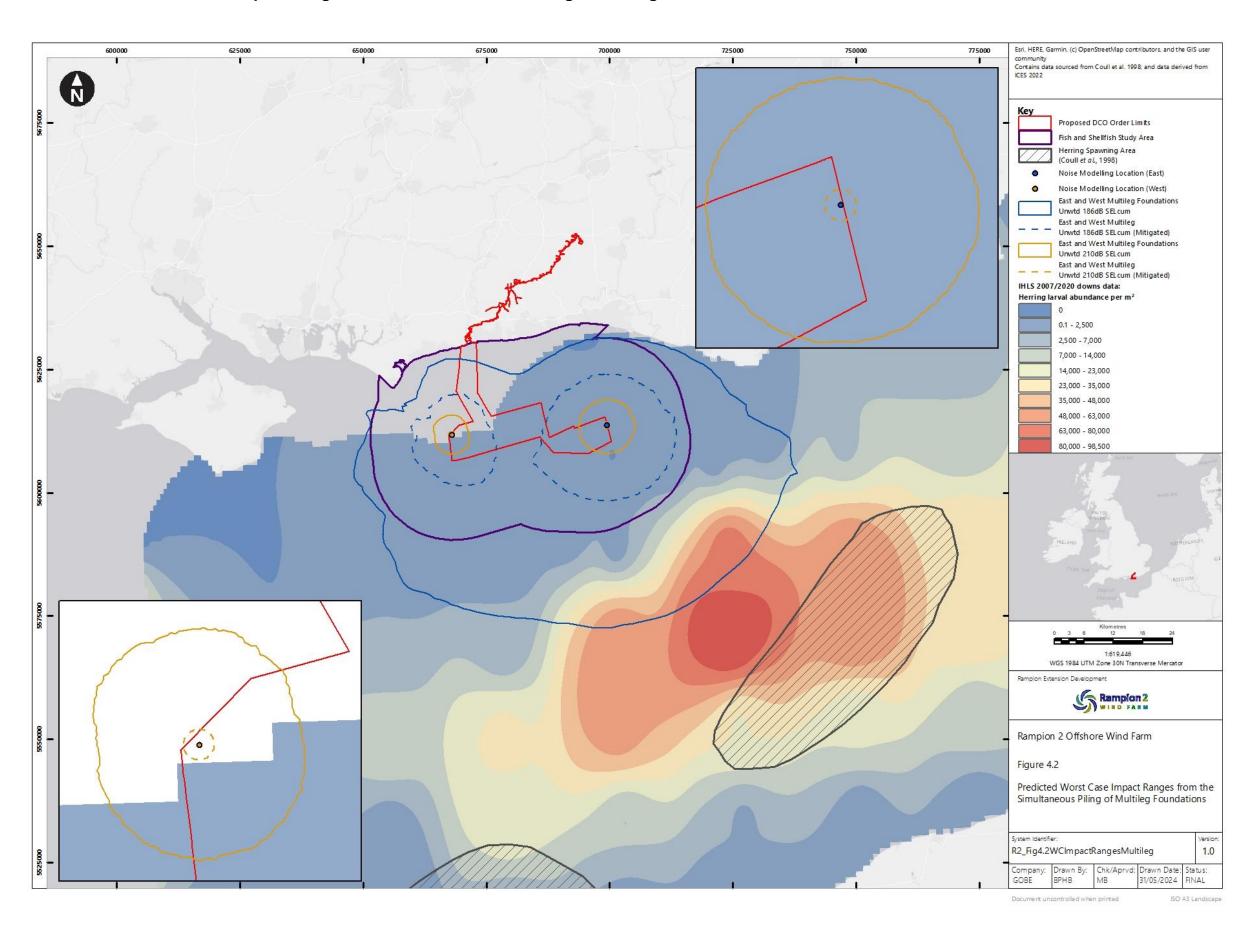




Figure 4.3 Predicted Worst Case Behavioural Response Impact Ranges for Spawning Herring from the Piling of Monopile Foundations (141db SELss)

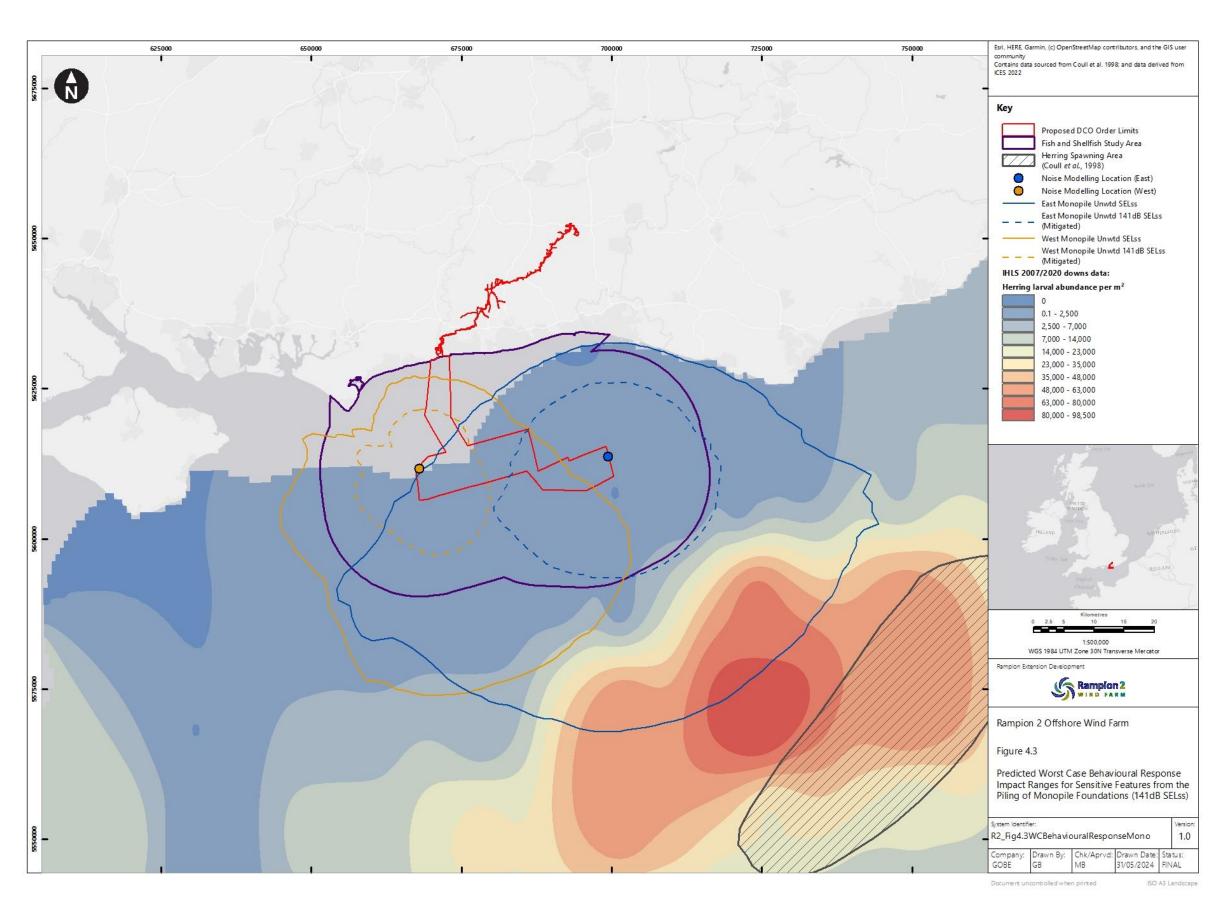




Figure 4.4 Predicted Worst Case Behavioural Response Impact Ranges for Spawning Herring from the Piling of Multileg Foundations (141dB SELss)

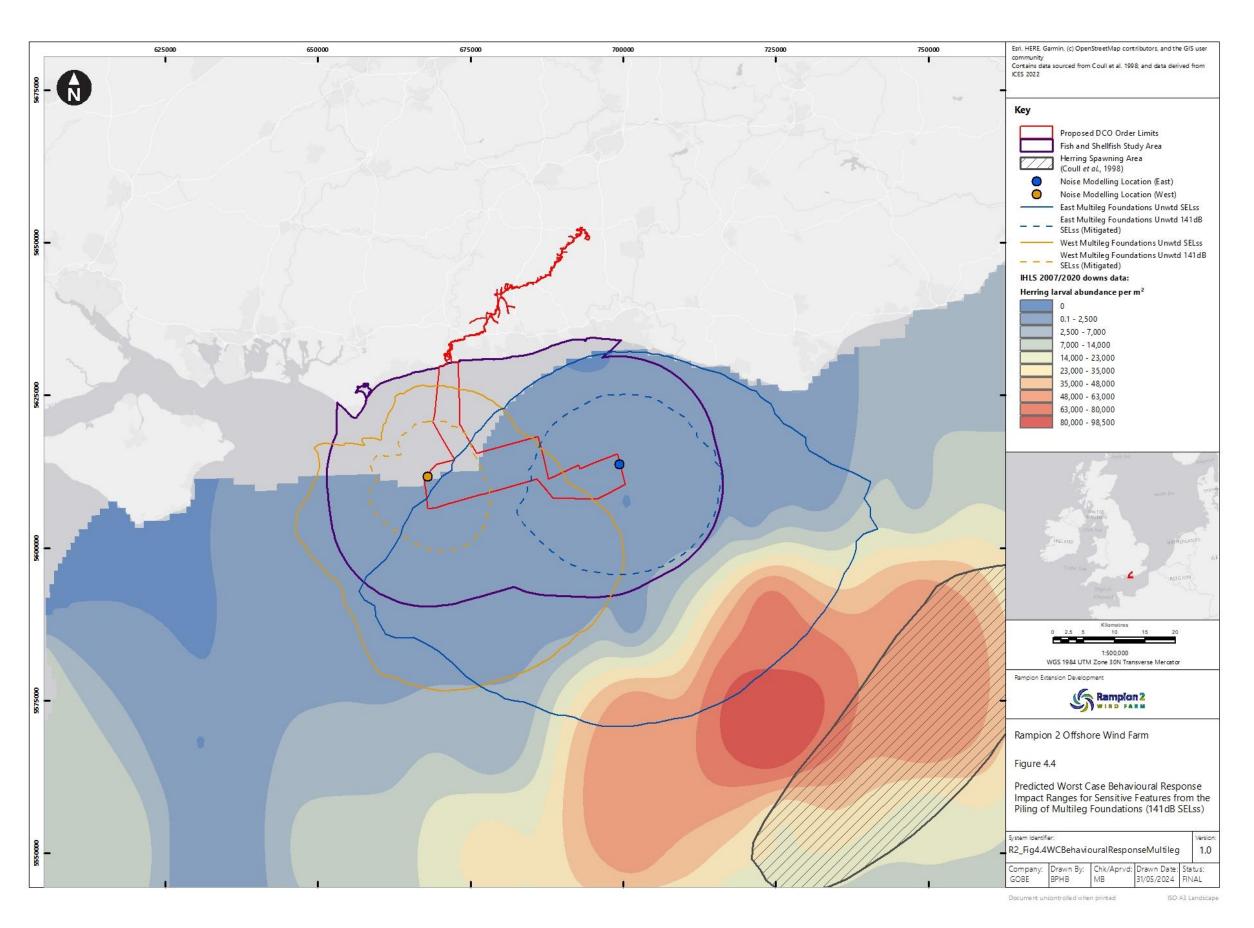




Figure 4.5 Predicted Worst Case Behavioural Response Impact Ranges for Spawning Herring from the Piling of Monopile Foundations (135db SELss)


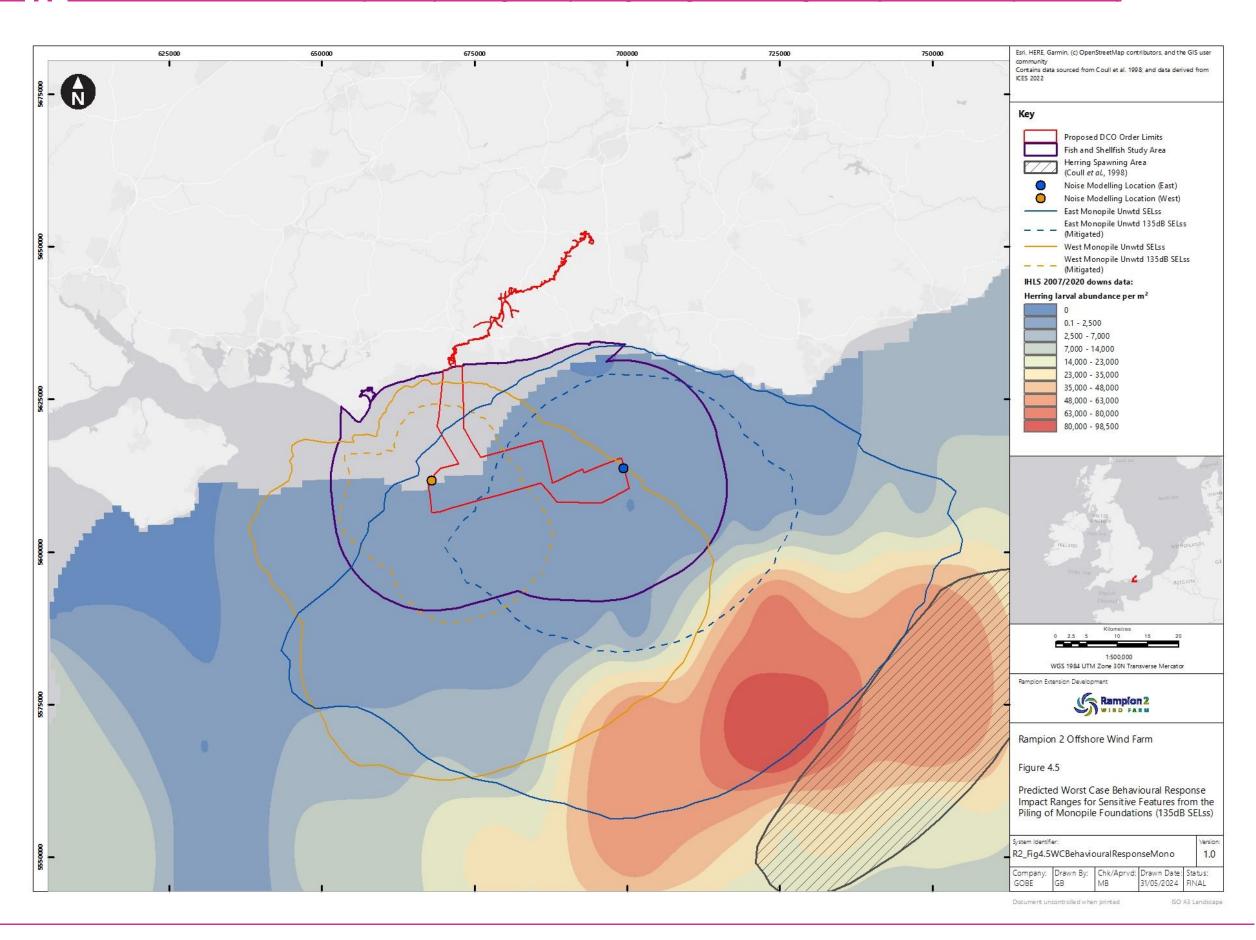




Figure 4.6 Predicted Worst Case Behavioural Response Impact Ranges for Spawning Herring from the Piling of Multileg Foundations (135dB SELss)



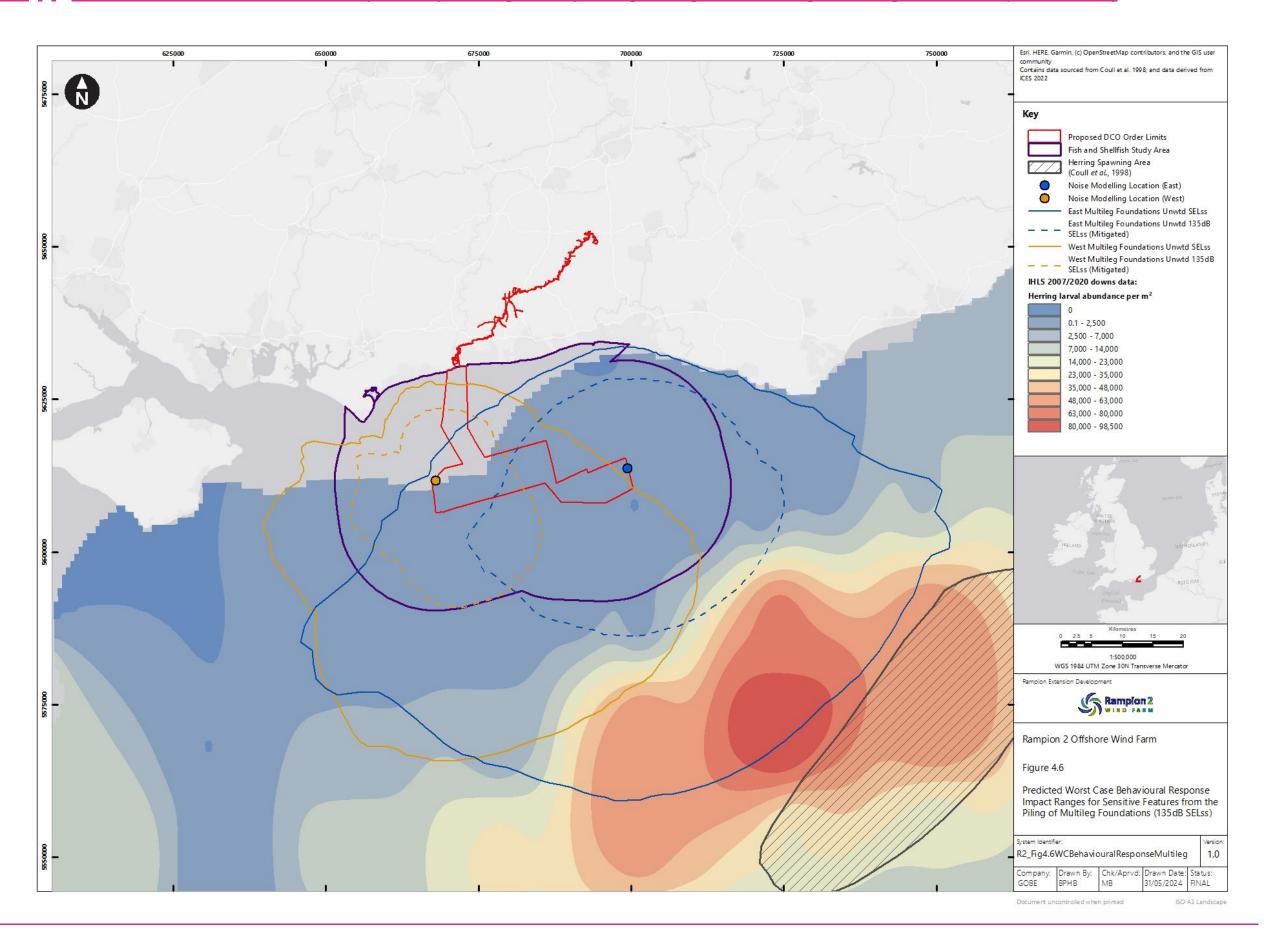

4.2 Potential impacts on herring eggs and larvae from underwater noise

- As detailed in paragraph 8.6.33 *et seq.* Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], reference has been made to the <u>IHLS</u> data, to inform the fish and shellfish baseline characterisation and assessment. Densities of herring larvae ≤ 11mm caught from 2007-2020 have been presented in Figure 8.8 of Chapter 8: Fish and shellfish ecology, Volume 3 [APP-081].
- As evident in Figure 8.8 of Chapter 8: Fish and shellfish ecology, Volume 3 [APP-081], high densities of herring larvae are located to the southeast of the Rampion 2, with the highest densities of herring larvae located approximately 45km from the array area.
- At the larval stage of development, the connection between the swim bladder and 4.2.3 the inner ear has not yet formed, therefore larvae are considered to be less sensitive to underwater noise. The underwater noise contour for the potential mortality and potential mortal injury of eggs and larvae threshold as defined by Popper et al. (2014) (210 dB SEL_{cum}) has been presented relative to the larval densities as shown in Figure 4.1 and Figure 4.2. As evident in Figure 4.1 and Figure 4.2, due to the highly localised impact ranges for mortality and potential mortal injury from simultaneous piling operations, there is no overlap of this contour with any areas of high larval abundance. Given the stationary nature of eggs and larvae, the potential for behavioural impacts is considered limited. therefore the worst-case impact ranges for effects on larvae is considered to relate to the potential for TTS. As detailed in paragraph 8.9.238 et seq. of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049], given the low degree of disturbance at intermediate (100s of metres) and far (1,000s of metres) of larvae (in accordance with the Popper et al., (2014) criteria) and the distance of areas of high-density herring larvae from the Rampion 2 array area there will be no population level effects on Downs stock herring from impacts on eggs and larvae.
- As detailed in the In Principle Sensitive Features Mitigation Plan [REP3-046] (updated at Deadline 4), the Applicant has committed to the implementation of DBBC at least one offshore piling noise mitigation technology throughout the piling campaign, therefore mitigating against potential impacts from underwater noise to herring eggs and larvae from spawning in November through to January (Coull et al., 1998). Figure 4.1 and Figure 4.2 illustrate the reduced mortality and potential mortal injury impact ranges (210 dB SELcum) from the mitigation proposed relative to areas of high densities of herring larvae. The implementation of mitigation further reduces the impact ranges from underwater noise, ensuring no overlap with areas of high densities of herring eggs and larvae of mitigated piling noise at a level that will cause mortality or potential mortal injury (210 dB SELcum) or TTS of herring larvae.



5. Seahorse

5.1 Clarifications on impacts to seahorse from underwater noise

- This section provides further information on the potential for TTS from underwater noise immissions on seahorse as protected features at relevant designated MCZ sites as requested by Natural England in its Relevant Representation [RR-265].
- As detailed in paragraph 8.6.66 *et seq.* of **Chapter 8: Fish and shellfish ecology**, **Volume 2 [APP-049]** both short-snouted and spiny/long-snouted seahorses are of conservation importance in UK waters and are protected under Schedule 5 of the Wildlife and Countryside Act, 1981. As summarised in Table 8-11 of **Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049]**, there are several nature conservation designations within the vicinity of Rampion 2 of which short snouted seahorse is a feature; these are Selsey Bill and the Hounds MCZ, Beachy Head West MCZ and Beachy Head East MCZ and Bembridge MCZ.
- A comprehensive assessment of the potential for direct and indirect impacts on seahorse from Rampion 2 was undertaken in **Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049]** of the ES. Due to the limited extent of potential impacts arising from the Proposed Development and the separation distance of grounds from the proposed DCO Order Limits (Selsey Bill and the Hounds MCZ is the closest site), located 12 km north-west of the array area) (Figure 8.11 of **Chapter 8: Fish and shellfish ecology, Volume 3 [APP-081]**) no significant effects were concluded on seahorse from the construction, operation and maintenance, and decommissioning of Rampion 2.
- Following the submission of the DCO application, Natural England have requested further information on the potential for TTS on seahorse as a protected feature of the above mentioned MCZs. This information has been produced to meet Natural England's request for further information, with an aim to provide reassurance that there will be no hindrance to the Conservation Objectives of the MCZs.
- As detailed in the In Principle Sensitive Features Mitigation Plan [REP3-046] (updated at Deadline 4), the Applicant has committed to the implementation of various noise abatement measures, inclusive of a piling restriction from March through to June (in the Western area), the implementation of a piling sequencing plan in July, and the use of at least one offshore piling DBBC noise mitigation technology throughout the piling campaign and further noise mitigation measures if piling is undertaken between March and July. Figure 5.1 and Figure 5.2 illustrate the unmitigated TTS impact ranges (186dB SELcum), and the further reduced impact ranges from the proposed mitigation (15dB noise reduction from DBBC), relative to the MCZs of which seahorse are a feature. To ensure a precautionary approach, the minimum noise abatement offered by the proposed mitigation has been modelled (-6dB reduction, from low noise hammers) and presented in and. As evident in Figure 5.1 and Figure 5.2, with the implementation of DBBC throughout the the minimal proposed mitigation throughout the piling campaign, there is no interaction of the TTS impact contours with the MCZs.



- The implementation of DBBC will also further reduce the behavioural response impact ranges of underwater noise to seahorse as features of MCZs in the vicinity of the Proposed Development.
- The mitigated impact ranges from the implementation of DBBC (as defined using the 141dB SELss disturbance threshold (based on a study by Kastelein et al. (2017)) are presented in **Figure 5.3** and **Figure 5.4** relative to the Beachy Head East and West MCZs, the Selsey Bill and the Hounds MCZ and the Bembridge MCZ. As evident, the use of DBBC further mitigate the underwater noise contours away from the MCZs designated for seahorse.
- As detailed in Volume 2 Chapter 8 Fish and shellfish ecology [APP-049], a threshold of 135dB SELss, based on a study by Hawkins et al. (2014) has been suggested by the MMO as a suitable threshold for behavioural responses of sensitive fish receptors. It is important in this context to note that the use of the 135 dB SELss threshold in an open water receiving environment characterised by shipping is highly precautionary and very unlikely to elicit a comparable response to that observed by Hawkins et al. (2014.). The use of this threshold is also not supported in the literature for use in impact assessments. It is on this basis, that the Applicant does not support the use of this threshold, to determine potential behavioural effects of noise sensitive species.
- Notwithstanding this, the Applicant has presented the 135 dB SELss threshold, with the implementation of mitigation in the form of DBBC, relative to the MCZs of which seahorse are a qualifying feature. As evident in **Figure 5.5** and **Figure 5.6** the mitigated impact ranges, as defined using the overly precautionary 135dB SELss threshold, also do not overlap with any of the MCZs.
- 5.1.55.1.10 The Applicant is therefore confident that the proposed mitigation measures, will ensure that there is no hindrance of the conservation objectives of any of the MCZs from underwater noise impacts.



Figure 5.1 The predicted worst case TTS impact ranges from the simultaneous piling of monopile foundations in relation to MCZs of which seahorses are a protected feature

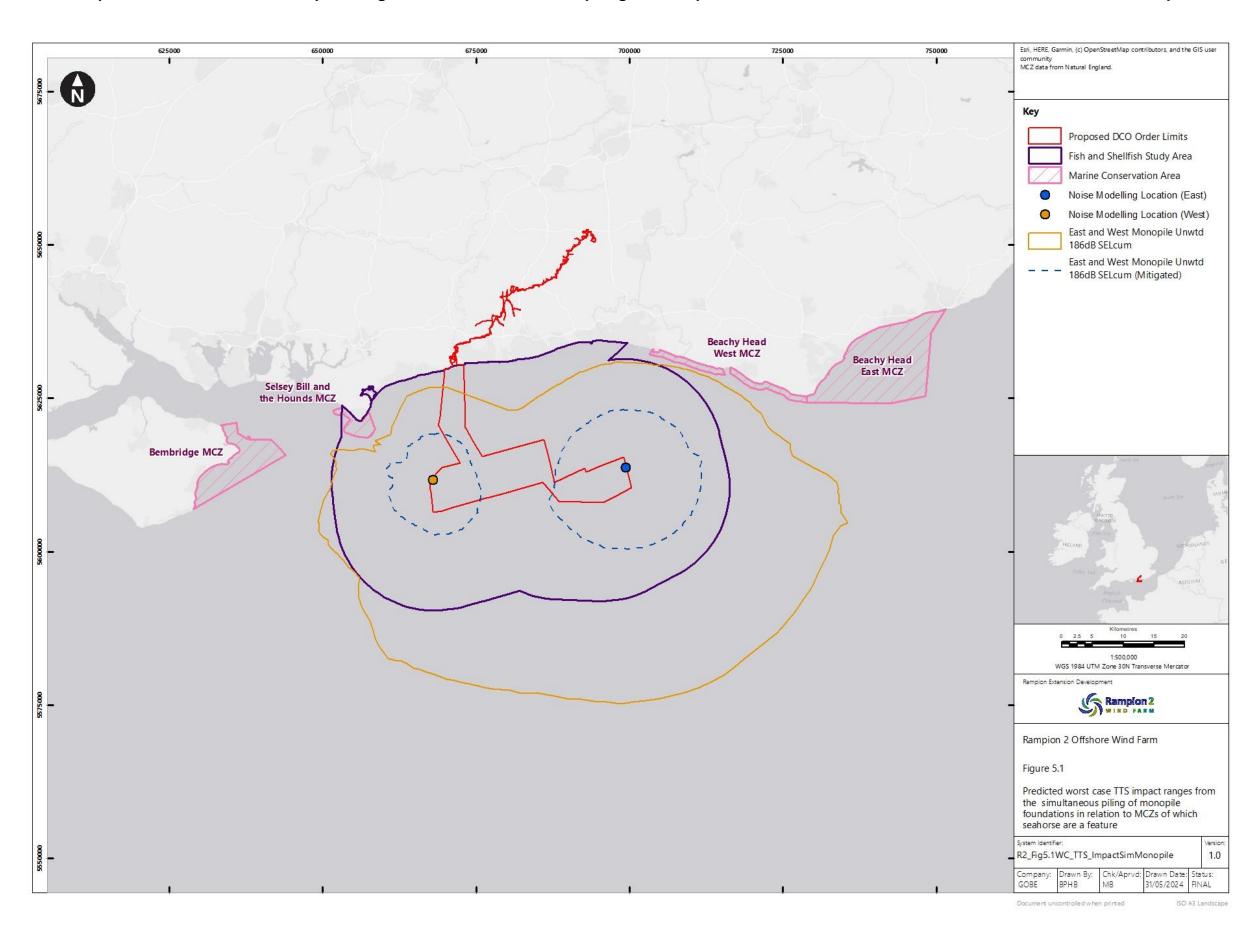




Figure 5.2 The predicted worst case TTS impact ranges from the simultaneous piling of multileg foundations in relation to MCZs of which seahorses are a protected feature

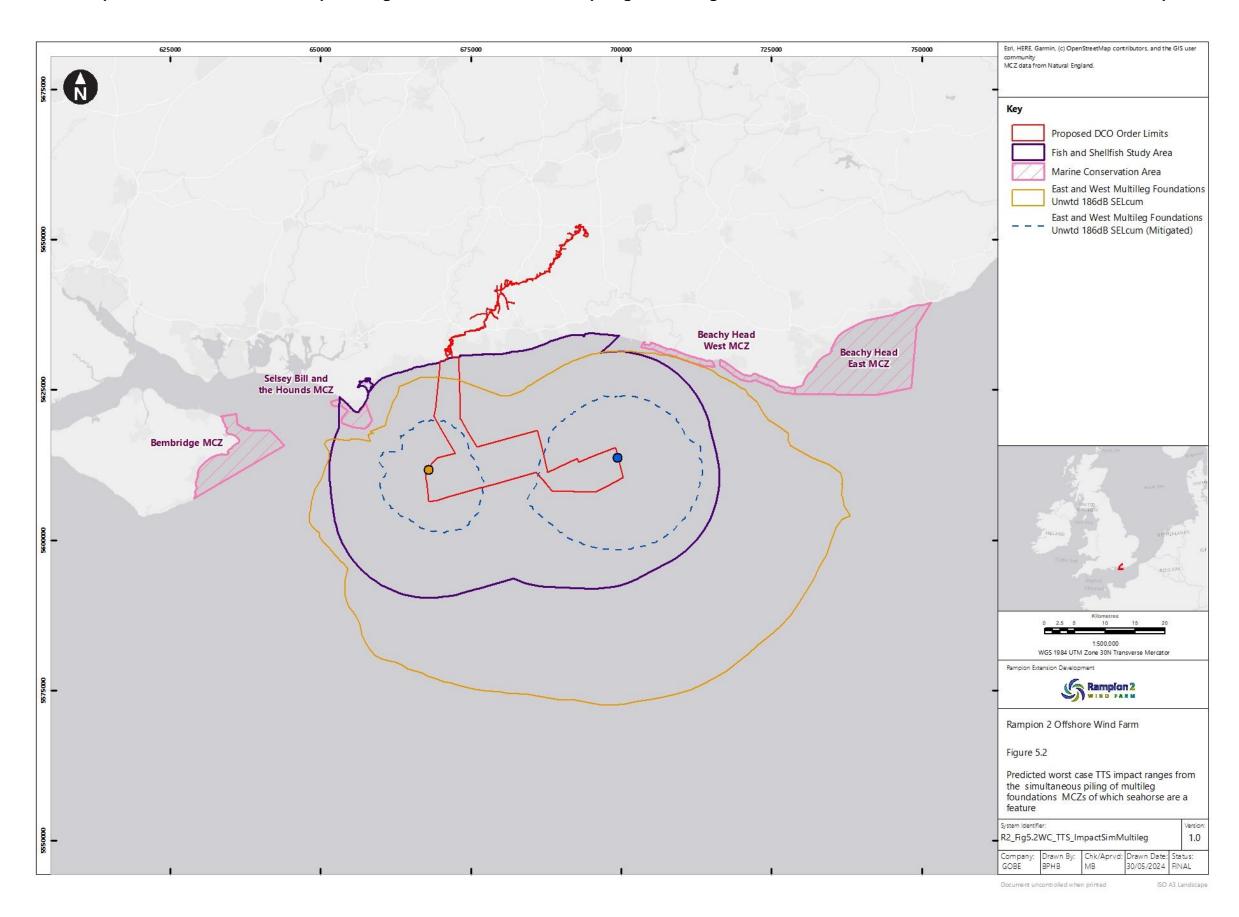




Figure 5.3 Predicted Worst Case and Mitigated (DBBC) Behavioural Response Impact ranges for Sensitive Features from the Piling of Monopile Foundations (141dB SELss)

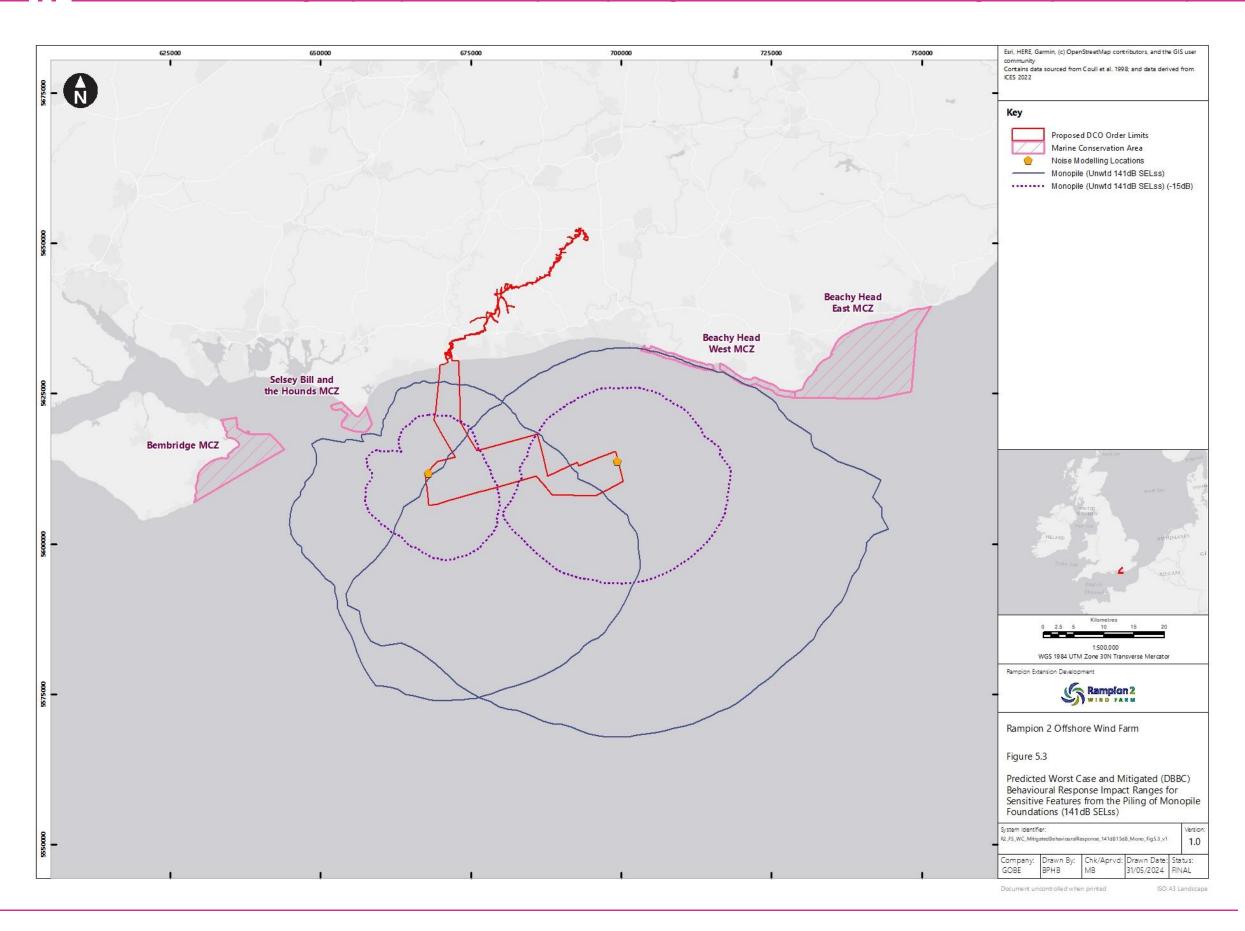




Figure 5.4 Predicted Worst Case and Mitigated (DBBC) Behavioural Response Impact ranges for Sensitive Features from the Piling of Multileg Foundations (141dB SELss)

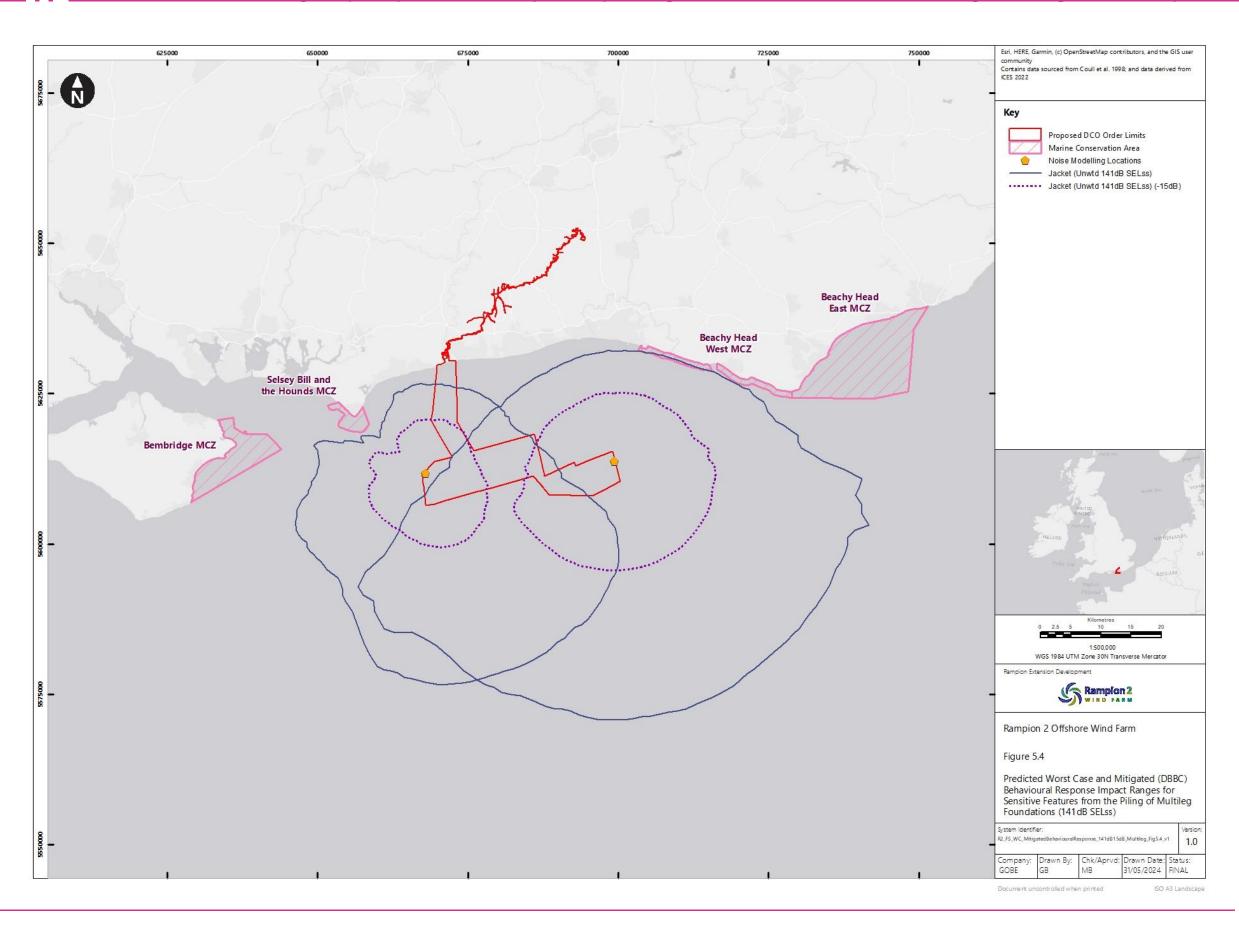




Figure 5.5 Predicted Worst Case and Mitigated (DBBC) Behavioural Response Impact ranges for Sensitive Features from the Piling of Monopile Foundations (135dB SELss)


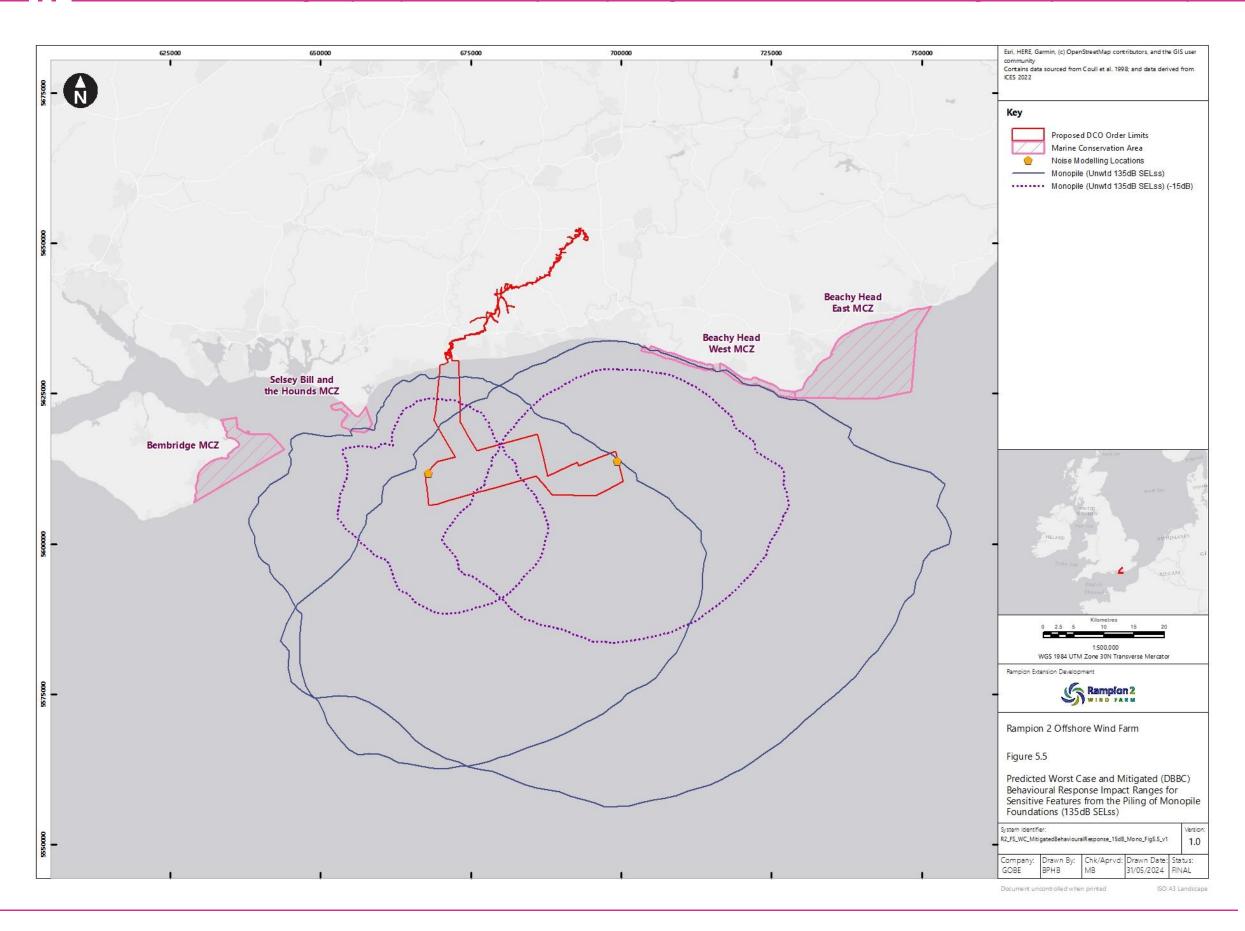




Figure 5.6 Predicted Worst Case and Mitigated (DBBC) Behavioural Response Impact ranges for Sensitive Features from the Piling of Multileg Foundations (135dB SELss)



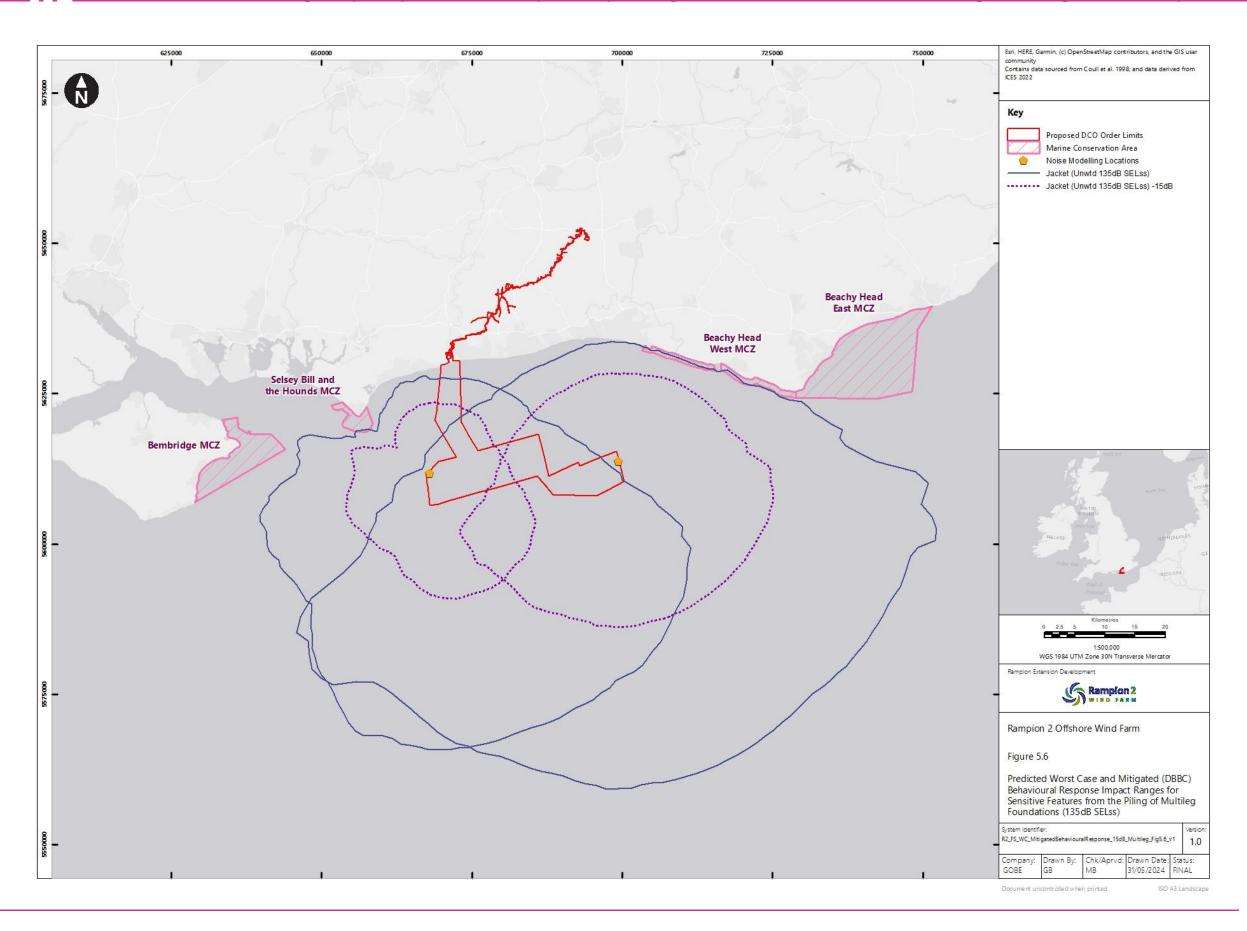

6. Black Seabream

6.1 Clarifications on recoverable injury impacts to black seabream from underwater noise

- This section provides further information on the potential for recoverable injury from underwater noise immissions on black seabream as a protected feature of the Kingmere MCZ as requested by Natural England in its Relevant Representation [RR-265].
- Within the fish and shellfish ecology assessment of Rampion 2 (Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049]) black seabream were identified as a key receptor, with this species being a feature of the Kingmere MCZ.
- A comprehensive assessment of the potential for impacts from underwater noise on black seabream from Rampion 2 was undertaken in Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049] of the ES, and various embedded mitigation measures committed to (as summarised in Table 8-13 of Chapter 8: Fish and shellfish ecology, Volume 2 [APP-049]) and set out in detail within the In Principle Sensitive Features Mitigation Plan [REP3-046] (updated at Deadline 4)) to ensure that the conservation objectives of the Kingmere MCZ are not hindered.
- Following the submission of the DCO application, Natural England have requested further information on the potential for recoverable injury of black seabream as a protected feature of the Kingmere MCZ. This information has been produced to meet Natural England's request for further information, with an aim to provide reassurance that there will be no hindrance to the Conservation Objectives of the MCZ.
- As detailed in the In Principle Sensitive Features Mitigation Plan [REP3-046] 6.1.5 (updated at Deadline 4), the Applicant has committed to the implementation of various noise abatement measures, inclusive of a piling restriction from March through to June (in the Western area), the implementation of a piling sequencing plan in July, and the use of at least one offshore piling noise DBBC noise abatement mitigation technology throughout the piling campaign. Figure 6.1 and Figure 6.2 illustrate unmitigated recoverable injury impact ranges (203dB SEL_{cum}), and the further reduced impact ranges from the proposed mitigation (15dB noise abatement from DBBC), relative to the Kingmere MCZ of which black seabream are a feature. To ensure a precautionary approach, the minimum noise abatement offered by the proposed mitigation has been modelled and presented (-6dB reduction, low noise hammer). As evident in Figure 6.1 and Figure 6.2, with the implementation of the minimal proposed mitigation throughout the piling campaign, there is no interaction of the recoverable injury impact contours with the MCZ. The Applicant is therefore confident that with the proposed mitigation measures there will be no hindrance of the conservation objectives of the Kingmere MCZs due to recoverable injury from underwater noise immissions on black seabream.



Figure 6.1 Predicted Worst Case Recoverable Injury Impact Ranges from the Sequential Piling of Monopile Foundations at the Northwest Location in Relation to the Kingmere MCZ


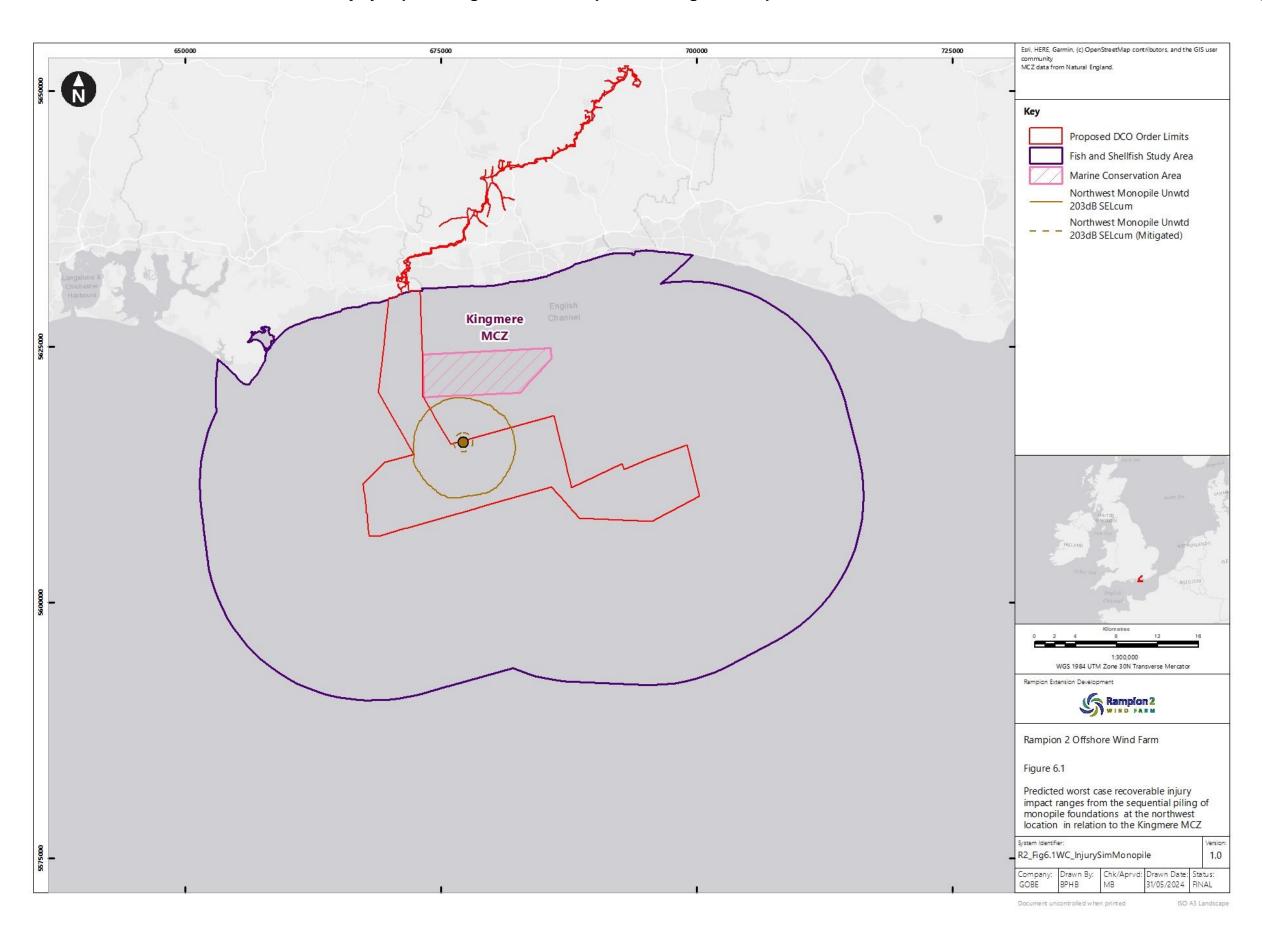




Figure 6.2 Predicted Worst Case Recoverable Injury Impact Ranges from the Sequential Piling of Multileg Foundations at the Northwest Location in Relation to the Kingmere MCZ



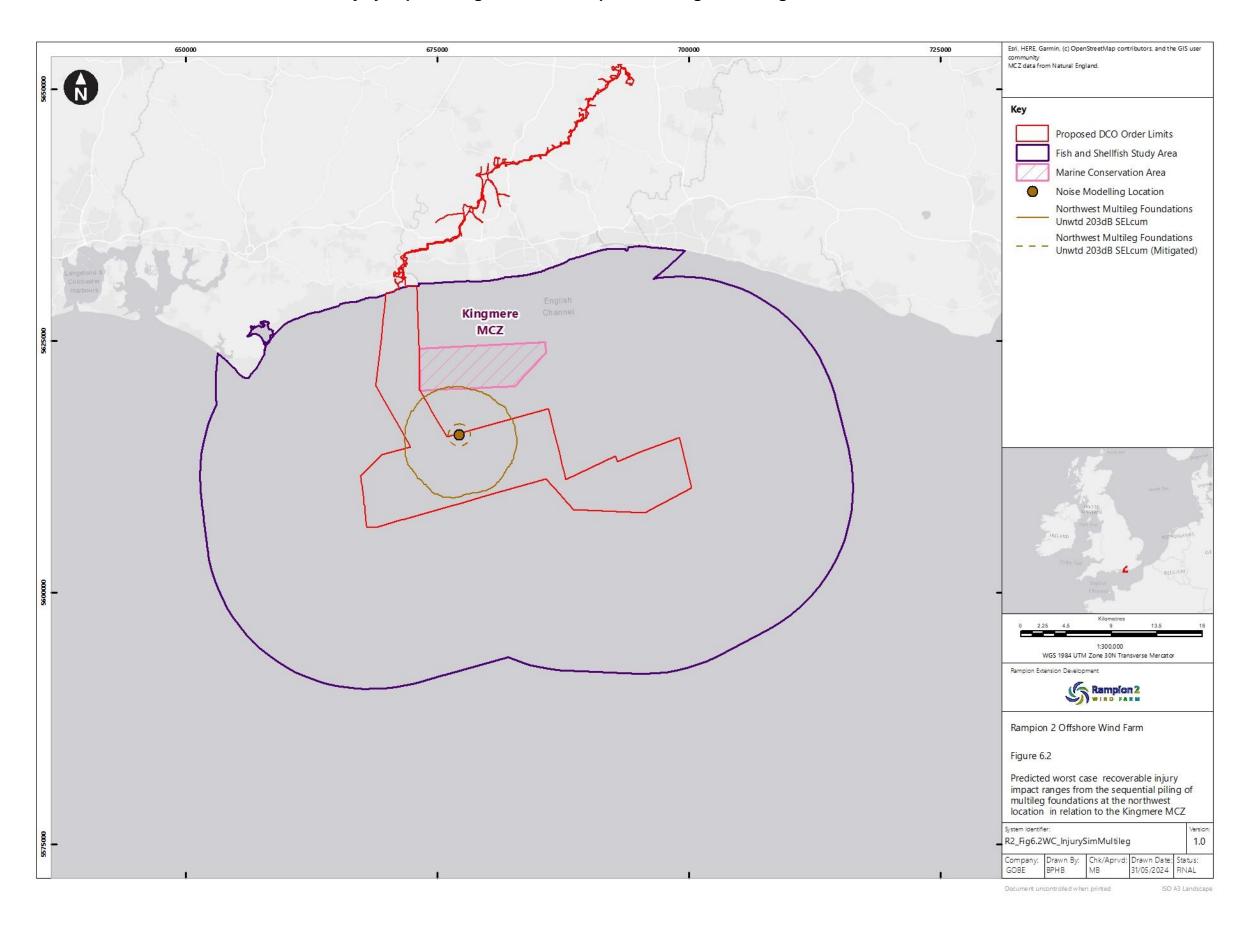

7. References

Coull, K.A., Johnstone, R. and Rogers, S.I. (1998). Fisheries Sensitivity Maps in British Waters. Aberdeen; UKOOA Ltd.

Ellis, J.R., Milligan, S.P., Readdy, L., Taylor, N. and Brown, M.J. (2012). *Spawning and nursery grounds of selected fish species in UK waters*. Cefas Science Series Technical Report. Lowestoft; Cefas 147, pp.1–56

Hawkins, A.D., Roberts, L. and Cheesman, S. (2014). *Responses of free-living coastal pelagic fish to impulsive sounds*. Journal of the Acoustic Society of America, 135(5), pp.3101–3116.

Latto, P. L. Reach, I.S. Alexander, D. Armstrong, S. Backstrom, J. Beagley E. Murphy, K. Piper, R. and Seiderer, L.J. (2013) *Screening spatial interactions between marine aggregate application areas and sandeel habitat.* A Method Statement produced for BMAPA

Maravelias, C.D., Reid, D.G. and Swartzman, G. (2000). Seabed substrate, water depth and zooplankton as determinants of the prespawning spatial aggregation of North Atlantic herring. Marine Ecology Progress Series 195: 249-259.

MarineSpace Ltd, ABPmer Ltd, ERM Ltd, Fugro EMU Ltd and Marine Ecological Surveys Ltd, (2013a). *Environmental Effect Pathways between Marine Aggregate Application Areas and Sandeel Habitat: Regional Cumulative Impact Assessments*. A report for British Marine Aggregates Producers Association.

MarineSpace Ltd, ABPmer Ltd, ERM Ltd, Fugro EMU Ltd and Marine Ecological Surveys Ltd, (2013b). *Environmental Effect Pathways between Marine Aggregate Application Areas and Atlantic Herring Potential Spawning Habitat: Regional Cumulative Impact Assessments. Version 1.0.* A report for the British Marine Aggregates Producers Association.

Perianez, R. & Elliot, A.J. (2002). *A particle-tracking method for simulating the dispersion of non-conservative radionuclides in coastal waters*. Journal of Environmental Radioactivity, 58: 13-33.

Ocean Ecology Limited (OEL) (2020a). Rampion Offshore Wind Farm: Year 1 Post Construction Fish Monitoring Report 2020. Report No. OEL_EONRAM0619_TCR_FM. Gloucester; OEL.

Popper, A.N., Hawkins, A.D., Fay, R.R., Mann, D., Bartol, S., Carlson, Th., Coombs, S., Ellison, W. T., Gentry, R., Hal vorsen, M.B., Lokkeborg, S., Rogers, P., Southall, B.L., Zeddies, D.G. and Tavolga, W.N. (2014). ASA S3/SC1.4 TR-2014 Sound Exposure Guidelines for Fishes and Sea Turtles: A Technical Report prepared by ANSI-Accredited Standards Committee S3/SC1 and registered with ANSI. Cham, Switzerland; Springer and ASA Press. pp.1–21.

Reach, I.S., Latto P., Alexander, D., Armstrong, S., Backstrom, J., Beagley, E., Murphy, K., Piper, R. and Seiderer, L.J. (2013). *Screening Spatial Interactions between Marine Aggregate Application Areas and Atlantic Herring Potential Spawning Areas*. A Method Statement produced for the British Marine Aggregates Producers Association



Stephens, D. and Diesing, M. (2015). *Towards quantitative spatial models of seabed sediment composition*. PLoS ONE, 10(11), e0142502.

Stratoudakis, Yorgos & Gallego, A. & Morrison, JA. (1998). *Spatial distribution of developmental egg ages within a herring Clupea harengus spawning ground.* Marine Ecology-progress Series - MAR ECOL-PROGR SER. 174. 27-32. 10.3354/meps174027.

Tiessen, M.C.H., Fernard, L., Gerkema, T., van der Molen, J., Ruardij, P., van der Veer, H.W. (2014). *Numerical modelling of physical processes governing larval transport in the southern North Sea.* Ocean Science, 10: 357-376

Vause, B.J. and Clarke, R.W.E. (2011). Sussex Inshore Fisheries and Conservation Authority Species Guide. Shoreham-on-Sea; Sussex IFCA, pp.1–33.



