Item 1: 2 firefighters die in battling Beijing's power station fire

News Item, *China Daily* 17 April 2021

Attached as PDF; accessed 8 November 2022 from

Item 2: Two firefighters killed after Beijing battery blaze

News Item, *PV magazine* 21 April 2021

Attached as PDF; accessed 8 November 2022 from

Item 3: Accident analysis of the Beijing lithium battery explosion which killed two firefighters

Authors: not named

Institution: CTIF
(*Comité Technique International de prevention et d'extinction de Feu*)
or "International Association of Fire and Rescue Services"

the UK is a current Ordinary Member, via the Fire Sector Federation

Date: 25 May 2021

Attached as single "long page" PDF as available 8 November 2022 from

Item 4: Accident analysis of Beijing Jimei Dahongmen 25 MWh DC solar-storage-charging integrated station project

Translation from Chinese, prepared and released by CTIF, dated April 2021, released 25 May, per above report.

Prepared by the HyResponder network, of which CTIF "are active members". HyResponder is a training organization for responders to accidents in commercial Hydrogen and Fuel Cell technologies.

f

Item 5: Report on lithium-ion battery explosion that killed two China firemen proves inconclusive

Report in *Best* (Batteries and Energy Storage Technology) magazine 9 July 2021

Attached as PDF accessed 8 November 2022 from

2 firefighters die in battling Beijing's power station fire

Xinhua | Updated: 2021-04-17 15:44

Firefighters work in the accident site in an energy storage power station in Fengtai District of Beijing, April 16, 2021. [Xinhua/Peng Ziyang]

BEIJING -- Two firefighters died when they were putting out a fire in an energy storage power station in Fengtai District of Beijing on Friday.

The municipal fire and rescue department said on its official website on Saturday morning that it dispatched 235 firefighters with 47 fire engines to put out the fire that broke out at Friday noon time.

The northern part of the station exploded all of a sudden in the course of fire-fighting operation, resulting in the death of two firefighters and the injury of another. One employee of the station remained missing, the department said.

The fire was put out at 11:40 pm Friday.

Photo

In Jilin, quality oat grass harvested for animals

First floating hybrid wind-solar project underway

China Daily reporters on the road

Xi's speech to CIIE inspires confidence

Xi shows nation's firm resolve on opening-up

Latest

Experts plan to set up 'space hospital' to serve astronauts

More than half of China's mangroves effectively protected: official

Xi inspects CMC joint operations command center, stressing troop training, combat preparedness

Top scientists urge openness, international cooperation

Former Liaoning official sentenced for bribery

AirShow China 2022 | Opening Day

Exclusive

'Common prosperity not robbing the rich to help the poor'

Wetland preservation: China in action

Xi, Scholz exchange views on Ukraine

Ten photos from across China: Oct 28 - Nov 3

Summit, visits Kazakhstan, Uzbekistan

BACK TO THE TOP

HOME CHINA WORLD BUSINESS LIFESTYLE CULTURE TRAVEL WATCHTHIS SPORTS OPINION REGIONAL FORUM NEWSPAPER MOBILE

CHINADAILY.com.cn

Copyright 1995 - 2022 . All rights reserved. The content (including but not limited to text, photo, multimedia information, etc) published in this site belongs to China Daily Information Co (CDIC). Without written authorization from CDIC, such content shall not be republished or used in any form. Note: Browsers with 1024*768 or higher resolution are suggested for this site.

Registration Number: 130349

About China Daily
Advertise on Site
Contact Us
Job Offer
Expat Employment

FOLLOW US

140,000 TONS OF METAL
40,000 KILOMETRES OF CABLES
9,300,000 SOLAR PANELS

+1,400 users worldwide

IBERDROLA SENS ENGIE BayWa r.e.

Two firefighters killed after Beijing battery blaze

An explosion occurred as firefighters were dealing with a fire in a 25 MWh lithium-iron phosphate battery associated with a 1.4 MW rooftop array at a shopping mall in the Chinese capital on Friday.

APRIL 21, 2021 VINCENT SHAW

COMMERCIAL & INDUSTRIAL PV | UTILITY SCALE STORAGE | CHINA

The fire occurred in the Chinese capital on Friday afternoon.

Image: wuwow/Pixabay

Share

MDMCloud PROFESSIONAL PLANT MANAGEMENT ONE PLATFORM TO COVER IT ALL Free demo

Beijing Fire Station is investigating the cause of a fire at a lithium-iron phosphate (LFP) battery which claimed the lives of two firefighters at a shopping mall in the Chinese capital on Friday.

The city fire station said it received reports of a fire at the Jimei Home Dahongmen store at 12:17 p.m. and dispatched 235 firefighters with 47 fire trucks from 15 fire stations.

The 25 MWhdc battery facility, developed by Beijing Gotion Full-Service Co Ltd and commissioned in March 2019, featured northern and southern sections and the fire station said, while dealing with the blaze at the southern section of the battery, at 14:15 p.m., an explosion occurred in the north section, killing two firefighters and wounding a third. A member of staff of Beijing Gotion Full-Service has been described as missing since the incident.

The battery was part of a system which also featured 1.4 MW of solar generation capacity on the roof of the shopping mall and 94 electric vehicle (EV) parking places with associated charging points. At the time of its commissioning, Beijing Gotion Full-Service described the system as the world's largest user-facing energy storage system; the biggest EV charging station in Beijing city center; the first project to combine PV, storage and EV charging; and the first regional, direct-current, incremental-grid set-up.

Beijing Fire Station said the blaze was extinguished at 23:40 p.m. on Friday and cooling treatment was then carried out.

Popular content

Weekend read: Rise of the robot (cleaners)
5 NOVEMBER 2022
A first-of-its-kind survey has revealed the extent to which automation and robot module cleaning is being adopted by large-scale PV project owners an...

Hefei-based, Shenzhen-listed battery company Gotion High-tech – the controlling shareholder of Beijing Gotion Full-Service – on Saturday expressed "deep sorrow for the firemen who died in the accident," to local media, and said it did not participate in the daily operation and management of the battery developer.

Gotion High-tech is ranked among China's five biggest battery suppliers and in 2019 shipped 3.2 GWh of products, to claim 5.2% of the market.

This copy was amended on 22/04/21 to reflect the person described as missing since the incident is a member of staff of Beijing Gotion Full-Service, not a member of the fire service, as previously written.

This content is protected by copyright and may not be reused. If you want to cooperate with us and would like to reuse some of our content, please contact: editors@pv-magazine.com.

Share

VINCENT SHAW

Since 2014, Vincent Shaw has been reporting on the Chinese solar market for pv magazine. Based in Shanghai, he covers the latest market developments, company news, and industry trends in Greater China.
More articles from Vincent Shaw

vincent.shaw@pv-magazine.com

ZONERGY ZONERGY EUROPE S.R.L. Clean Energy,Everywhere

Related content

UK battery energy storage acquisitions heating up

German developers move forward on plans for 21 MW floating solar array

Stream: Researchers identify light-triggered coupled oxygen evolution mechanism

Elsewhere on pv magazine...

'Just not going to happen': big fails from hydrogen in Australia
PV-MAGAZINE-AUSTRALIA.COM

Azure Power places order for 600 MW of First Solar modules
PV-MAGAZINE-INDIA.COM

Pepsi to trial hydrogen trucks at Brisbane facility
PV-MAGAZINE-AUSTRALIA.COM

10 comments

Pingback: Grid-Scale Lithium-ion Batteries – the Next Grenfell? - The Faversham Society

Pingback: Lithium-ion batteries are fueling the fire on a burning cargo ship full of Porches - Techio

Pingback: Electric vehicles make it harder to quell fire on Felicity Ace cargo ship — Quartz- Vigour Times

Pingback: Electric vehicles make it harder to quell fire on Felicity Ace cargo ship — Quartz - Elite News

Pingback: Electric vehicles make it harder to quell fire on Felicity Ace cargo ship — Quartz- webtodays.us

Pingback: YeoPaper - Your Source Of Daily World News Crypto Business Technology & Sports News

Pingback: Losses Estimated at $334M For Cargo Ship Fire, as Lithium-Ion Batteries Burned More Than a Week - BBC Business Update

Pingback: Losses Estimated at $334M For Cargo Ship Fire, as Lithium-Ion Batteries Burned More Than a Week - DZTECHNO

Pingback: Losses Estimated at $334M For Cargo Ship Fire, as Lithium-Ion Batteries Burned More Than a Week – Audi Cars News and Updates

Pingback: Lithium-ion batteries are fueling the fire on a burning cargo ship full of Porsches - Quartz - Ecargyan.com

Leave a Reply

Please be mindful of our community standards.

Your email address will not be published. Required fields are marked *

Comment

Name *

Email *

Website

Save my name, email, and website in this browser for the next time I comment.

Post Comment

By submitting this form you agree to pv magazine using your data for the purposes of publishing your comment.

Your personal data will only be disclosed or otherwise transmitted to third parties for the purposes of spam filtering or if this is necessary for technical maintenance of the website. Any other transfer to third parties will not take place unless this is justified on the basis of applicable data protection regulations or if pv magazine is legally obliged to do so.

You may revoke this consent at any time with effect for the future, in which case your personal data will be deleted immediately. Otherwise, your data will be deleted if pv magazine has processed your request or the purpose of data storage is fulfilled.

Further information on data privacy can be found in our Data Protection Policy.

Powered by nature. Read more STÄUBLI

Newsletter

By subscribing to our newsletter you'll be eligible for a 10% discount on magazine subscriptions!

Email *

Select Edition(s) *
Hold Ctrl or Cmd to select multiple editions.

Global (English, daily)
Germany (German, daily)
U.S. (English, daily)
Australia (English, daily)

Read our Data Protection Policy.

Submit

FTC SOLAR Experience Pioneer at All Energy Australia Click Here to Schedule a Meeting fcsolar.com

Subscribe to our global magazine

Subscribe

Our events and webinars

Reduce LCOE and long-term O&M costs in utility-scale installations

Utility market 2022 and 2023: Sungrow's highlights, hydrogen update

Insight Australia 2022

pv magazine print

Results are in: robotic uprising underway

Add batteries for electrolyzer viability

Renewable solutions

Deye Stock Code:605117 Three Phase Hybrid Inverter SUN-25-50K-SG01HP3-EU

- 150% oversized output for each photo-Mac. scored up to 33% rated power
- DC-couple and AC-couple to photo-existing solar system
- Max. 10 pcs parallel for on-grid and off-grid operation; Support multi-pcs three-phase
- Max. 40A/50A PV charging current of 50A/60A
- High voltage battery of 160-800V, higher efficiency
- 6 time periods for battery charging/discharging
- Support storing energy from diesel generator

KEY ENERGY THE MEDITERRANEAN ENERGY EXPO 8-11 NOVEMBER 2022 RIMINI EXPO CENTRE ITALY Organized by ITALIAN EXHIBITION GROUP Promoting the future JOIN US

Calculating Solar Fuse Sizes for Optimum Protection

Learn how to calculate the correct solar fuse size for maximum performance, reliability and safety.

DOWNLOAD TECHNICAL PAPER

Littelfuse

VSUN 550W 550W Power Output 21.52% Module Efficiency Engineered in Japan LEARN MORE

ORDER NOW

Mehr erfahren

This website uses cookies to anonymously count visitor numbers. View our privacy policy.

Exposed

Important information on the European Working Time Directive

Read more

The Nordic CTIF National Committees meet in Helsinki for meeting in Kuopio

Read more

The extraordinary story of fire protecting Kevlar® and how it targeted antique motorcarts

Read more

Read more

Share

Accident analysis of Beijing Jimei Dahongmen 25 MWh DC solar-storage-charging integrated station project

Institute of energy storage and novel electric technology, China Electric Power Technology Co., Ltd.

April 2021

1. General information of the project

Jimei Dahongmen 25 MWh DC photovoltaic-storage-charging integrated station project was reported to the Development and Reform Commission (DRC) of Fengtai district of Beijing city in April 2018. This project was developed and operated by Beijing Fuweisi Oil & Gas Co., Ltd. The 1st phase of the project includes a 1.4 MWh roof-based solar photovoltaic energy system, 94 parking lots equipped with 150 KW single highly powerful DC fast charging piles. Among the 25 MWh capacity, 12.5 MWh is used to charge external EV cars (including 4.0 MWh for private vehicles in the south area + 8.5 MWh for public buses in the north area) and 12.5 MWh for indoor electricity supply.

This project was commercialized in March 2019, which was the biggest commercial energy storage station for customers in central Beijing city, the largest scale public charging station, the first MWh-level solar photovoltaic energy storage-charging station, the first user side new energy DC incremental distribution network, the largest demonstration project of solar photovoltaic energy storage-charging. The project layout is shown in Fig. 1.

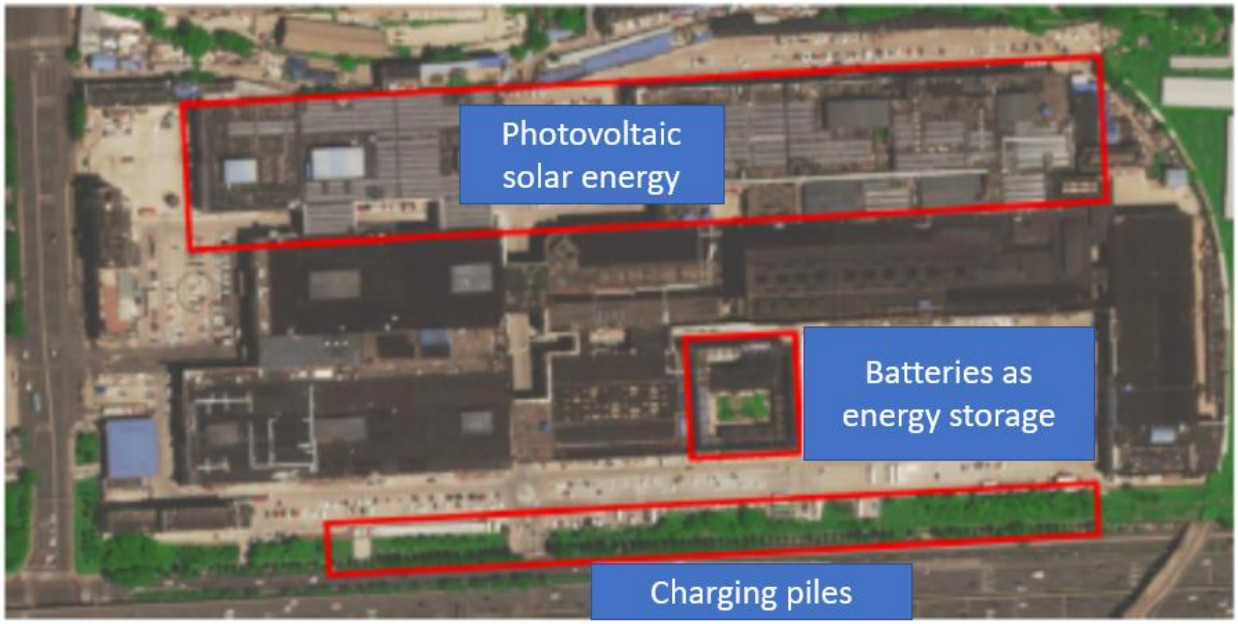

Fig. 1 The layout of the 25 MWh solar-storage-charging project

The batteries are provided by Guoxuan High-Tech Co., Ltd (3.2 V 10.5 Ah lithium iron phosphate square shell). The single cells were connected in parallel firstly and then in series by 225S18P mode (225 single cells connected in series to form a string, then 18 strings were connected in parallel) to construct a battery module with 720 V of voltage and 189 Ah current. The battery cluster was finally made by connect several battery modules in parallel. Details can be found in Fig. 2.

Fig. 2 Battery cluster

Monocrystalline silicon photovoltaic panels were installed on the rooftop idle space of Jimei Furnishing plaza to construct the photovoltaic electricity generation system, as shown in Fig. 3. Charging piles were installed for electric vehicles, see Fig. 4. The solar storage-charging system was made by integrating the sub-systems of photovoltaic electricity generation, AI charging piles and energy storage. For the energy storage system, handheld

firefighting equipment was equipped near the battery clusters for the emergency treatment of early accidents.

Fig. 3 Photovoltaic electricity generation system

Fig. 4 EV charging piles

In the integrated solar energy storage and charging project, the sub-system of battery-based energy storage station largely differs from traditional centralized energy storage system with respect to electrical structures. In traditional EV charging stations, the output current is AC, which must be converted to DC and then charge the electric vehicles. Thus, the AC-DC converts are required. The project considered the feature of battery cascade, which directly generate DC as the output. Therefore, the AC-DC converts are removed. Batteries were connected in series to achieve voltage of 750 V, after multi-stage parallel, to deliver power of 150 kW, current of 250 A and voltage of 750 V for each charging pile. The output KPIs correspond to the highest values of national standards of charging piles. Due to the absence of AC-DC converts, the size of the energy storage sub-system is reduced. However, the requirement of current homogenization of battery clusters and on-off ability of the DC switch became higher.

2. Report of the accident

At 12:17 pm on 16th April 2021, the Fire Command Center of Beijing received a report of the fire accident occurred on the Beijng Jimei Dahongmen power station (located in the south area). 47 fire trucks and 235 fire fighters from 15 local fire brigades were sent to the fire site.

Around 14:15 pm, when the fire fighters were dealing with the fire of the power station in the south area, a sudden explosion occurred in the power station in the north area without a warning, **leading to the death of 2 fire fighters, injury of 1 fire fighter and missing of 1 employee of the power station.**

Fig. 5-7 are not translated. Please read the original report.
https://wemp.app/posts/547dac6a-171c-4389-b735-8951c0e8bcd8

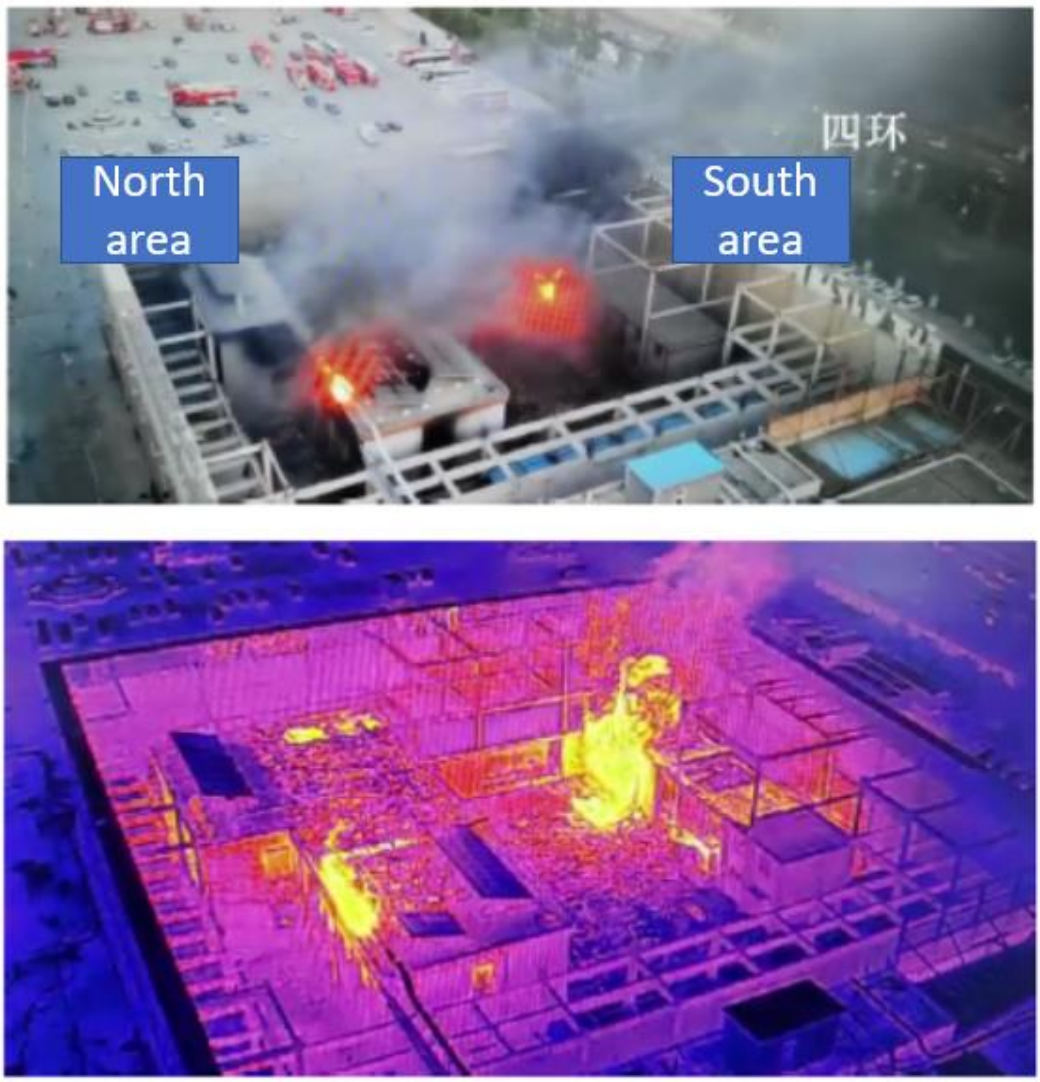

Fig. 8 Aerial photography of the accident scene

It was learnt through preliminary investigation that on-site debugging was undertaken prior to the accident. At 23:40 pm on 16th April 2021, the naked fire was extinguished. However, the cooling-down was still in process. The reasons and property loss were under investigation.

Fig. 9 The power station after fire fighting

3. Analysis of technical reasons

The sudden explosion of the power station in the north area could be explained by the safety accident induction mechanism of lithium batteries, which is the thermal failure of the batteries in the extreme conditions when they were significantly affected by internal and external sources. The safety of battery-based energy storage system is complicated because it involves batteries, battery management systems, cables, system electrical topology, early warning, monitoring and firefighting systems et al. Due to the limitation of accidental information, it is hard to determine the fire accident was initiated by the poor quality of the batteries or the overloading input to the batteries which exceeds the limitation of the batteries. Several possible reasons are proposed as follow.

3.1 The quality of batteries

According to the on-site situation, combustion and explosion occurred on the lithium batteries of the energy storage system, along with heavy smoke. The reason of lithium batteries' combustion and explosion is due to the failure of thermal control inside the batteries, which is triggered by two main reasons: 1. the internal problem of lithium batteries, e. g. the internal short circuit due

to the deficiency of electrode materials, and/or the formation of dendrite lithium during long-term operation. 2. The external reasons, e. g. the irreversible exothermic reaction caused by electric and thermal shock. During the integration of batteries to form the battery clusters, if the selection of batteries' model did not meet the safety requirement, the out-of-control heat is prone to occur due to the low tolerance to the turbulence of temperature during charging-discharging process. In present, the safety test basis of lithium batteries for energy storage purpose is the GB/T36276, the national standard officially started in January 2019. The difference of this national standard, in comparison with the previous standard of lithium batteries as vehicle's power source, is the new technical requirement of heat management and the associated safety performance. Whether the selected batteries in the accidental battery clusters meet the GB/T36276 is unknown. If they did not meet the requirement of GB/T36276, a safety risk is foreseen.

3.2 Electrical topology of energy storage

The electrical topology of the project is DC distribution network structure. The battery cluster was connected to the high-power charging piles and photovoltaic system through the DC/DC converts based on a shared DC bus. The safety risk of this type of electrical topology are:

(1) When the performance of various battery clusters is nonuniform, a circulation of current can be formed during operation. When the circulated current is large, overloading occurs on a single battery cluster, accelerating the aging and degradation of battery clusters.

(2) When short circuit occurs on the DC bus, the short circuit current moves to battery clusters through the DC bus. This instantaneous short-circuit high current may lead to a significant temperature increase within the batteries, leading to a fire as a consequence.

(3) Due to the higher insulation requirements for DC bus, the deficiency of insulation materials potentially causes an arc spark. Since DC current has no zero-crossing point, the arc spark is hard to be extinguished.

Therefore, it is easier for the high temperature arc spark to ignite the batteries and cables.

(4) DC switches are more complicated and the arc spark within the DC switches is harder to be extinguished than that of the AC switches. The switch off time of DC switches is longer and the DC switches are more expensive. In some projects, expensive DC switches were occasionally replaced by cheap AC switches. When AC switches were used in DC systems, these AC switches may not be switched off in case of overload accident, leading to a safety risk.

(5) The lack of adequate electrical isolation measures for power electronic equipment in DC distribution. If the grounding work in the DC power distribution system is not properly handled, electromagnetic circulation problems can easily cause leakage current when the system is running. The accumulated heat due to the leakage current in battery cabinets, cables et al. may cause local high temperatures, leading to potential fire of the batteries as a safety risk.

(6) View from the scene, the fire accident occurred in the south area first. The sudden explosion in the north area happened without warning while fire fighters dealing with the accident in the south area. In this situation, the reason maybe the shared DC bus in the north and south areas. When an accident occurred in the south area, the DC bus in the south area is short-circulated. However, because the DC protection system failed to detect the short circulate current, the DC protection system did not take an action. Thus, the batteries in the north area were over-discharged instantaneously and the current increased, causing the accident.

3.3 Battery management system

In addition to battery cells, battery energy storage systems also include BMS, PCS, transformers and related relay protection equipment, communication equipment and a series of primary and secondary equipment. The equipment may directly or indirectly cause safety problems in the energy

storage system due to quality defects, irregular installation and commissioning processes, unreasonable settings, and inadequate insulation. On 7th March 2017, a fire accident occurred in the lithium battery energy storage system of a power station in Shanxi province, China. According to the investigation report, it is determined that the cause of the fire accident of the energy storage system is the excessive voltage and current caused by the surge effect during the system recovery and startup process, and it is not effectively protected by the BMS system. The battery management system may have a long data collection cycle and an unreasonable threshold setting. The charging and discharging process exacerbates the risk of battery out of control.

3.4 Arrangement of cables and wires

Judging from the public information, the cables of this project were laid by pipe bridges, which were close to the safety distance of the battery cabinet. If the above circuit is short-circulated, the cable will burn or explode, which will easily cause a chain reaction, causing the battery to catch fire or explosion.

The wiring harness in the battery module is also the source of the accident. If all the wiring harnesses are not fireproofed, or the collection wiring harness and the communication wiring harness are not clearly distinguished, it is easy to cause interference between the wiring harnesses and cause inaccurate battery management system information. When an accident occurs, if it is not handled in time, the wiring harness is not fireproof, and it is easy to become a flammable source.

3.5 Power station fire protection design

After the lithium-ion battery fails thermally, on the one hand, it will have a strong thermal shock on the surrounding batteries. On the other hand, the thermal out of control of the battery will generate a large amount of alkane combustible gas. Under the effects of external electrical shock caused by external load short-circuit, thermal shock after battery thermal failure, etc., if

the energy storage system lacks effective protective measures, it may cause the expansion of battery accidents. If the energy storage device is arranged indoors, when the flammable gas reaches a certain concentration, it will explode in case of a naked fire, and more serious situation is the chain explosion accident.

According to the media description, the project has two substations, one main and one attached. The grid-connected end passed through the cable after the DC bus on the low voltage side. When short circulation occurred, fire fighters have already been on-site. Because there is no isolation of the battery energy storage system, explosion occurred just when fire fighters arrived (at 13:30 pm it is the discharging time). It is inferred from this that the fire protection design of the power station is insufficient. The fire protection design on site has no firewall design, lack of isolation and energy absorption facilities, and does not play an effective protective role in the event of an explosion of the energy storage batteries.

3.6 Fire monitoring, alarming and extinguishing system of power station and fire water

According to the site situation, an explosion occurred in the north area. According to this phenomenon, it may be due to the high temperature generated by the fire in the south area. The battery pressure relief valve of the energy storage system in the north area was opened to release the flammable gas generated by the decomposition of the electrolyte, leading to a deflagration. There may be a lack of flammable gas detection devices or failure of the detection devices, failing to effectively detect flammable gases, and failing to make timely warnings, resulting in an explosion. The large fire spread of the energy storage power station indicates that the on-site firefighting system failed to control the fire in the first time, and the hand-held fire extinguishing device installed on the site cannot functionate, which does not meet the fire extinguishing needs of the lithium-ion battery energy storage power stations.

Judging from the accident pictures, when firefighters used firefighting water to extinguish the fire of the energy storage system in the south area, an explosion suddenly occurred in the north area. Due to the close distance between the south and north areas, the firefighting water may touch the energy storage system in the north area when spraying the south area. Since the energy storage system is a high voltage charged body, water spraying may cause a short circuit of the charged body and the cables and induce fire or extended electrical accident. Therefore, in the early stage of the energy storage system fire, when a large number of energy storage batteries have not been affected, the use of water as fire extinguishing medium still requires careful consideration.

3.7 Meteorological environmental factors

It can be seen from the investigation and analysis repot on fire accidents of energy storage power stations in South Korea that environmental factors are the possible causes of fires in energy storage systems. On April 15th, Beijing issued a yellow warning for gale, bule warning for sand dust, and orange warning for forest fires. The meteorological environment of strong wind and sand dust may cause dust accumulation in the energy storage system. On the one hand, it is not conducive to the heat dissipation of the energy storage system and increase the operating temperature of the system. On the other hand, the presence of sand and dust will adversely affect the insulation of the system. Insulation failure can easily cause electrical breakdown of electrical equipment and local high temperature, which will induce thermal failure of energy storage batteries.

3.8 Personnel on-site operation and management system

According to media reports, when the energy storage power station accident occurred, there were workers on site to debug the energy storage system. The energy storage system is a high voltage, high energy live system. There are many cables and wires at the construction site and the commissioning site. If the operation is incorrect or the site is not handled properly, safety problems are prone to occur. From the battery body, integration, engineering

design, construction, operation and maintenance, et al., there are currently relevant standards. If they are not implemented in accordance with the standards, problems such as irregular field operations, lack of supervision, and insufficient understanding of operators will occur, which may lead to serious safety consequences.

4. Suggestions of future work

(1) To strengthen the safe operation management and enhance the technical supervision system of energy storage power station in operation. Clarify management responsibilities and responsible entities. In view of the hidden dangers of different types of energy storage accidents, designate failure emergency plans and fire protection measures to ensure the safety of personnel and property.

(2) To strengthen the application of energy storage technology standards, build a quality management system for energy storage construction, operation and maintenance, implement relevant standard requirements into all aspects of energy storage technology supervision, and ensure the safety and reliability of energy storage equipment connected to the grid.

(3) To accelerate the construction of failure and fire simulation platforms of large-capacity energy storage systems, carry out research on the fire evolution mechanism and preventive control of energy storage systems, build fire hazard level and protection evaluation system of the energy storage systems, verify and improve the adaptation of the energy storage safety system to different environment.

(4) To strengthen safety technology research on energy storage, study energy storage system safety technology in their life cycle application, study energy storage system safety status online perception and diagnosis technology, study energy storage power station safety early warning, flame retardant, heat insulation, fire fighting technology, etc. Take practical and effective measures to accelerate the popularization and application of new technological achievements.

Location of Beijing Jimei Furnishings Dahongmen Charging Station

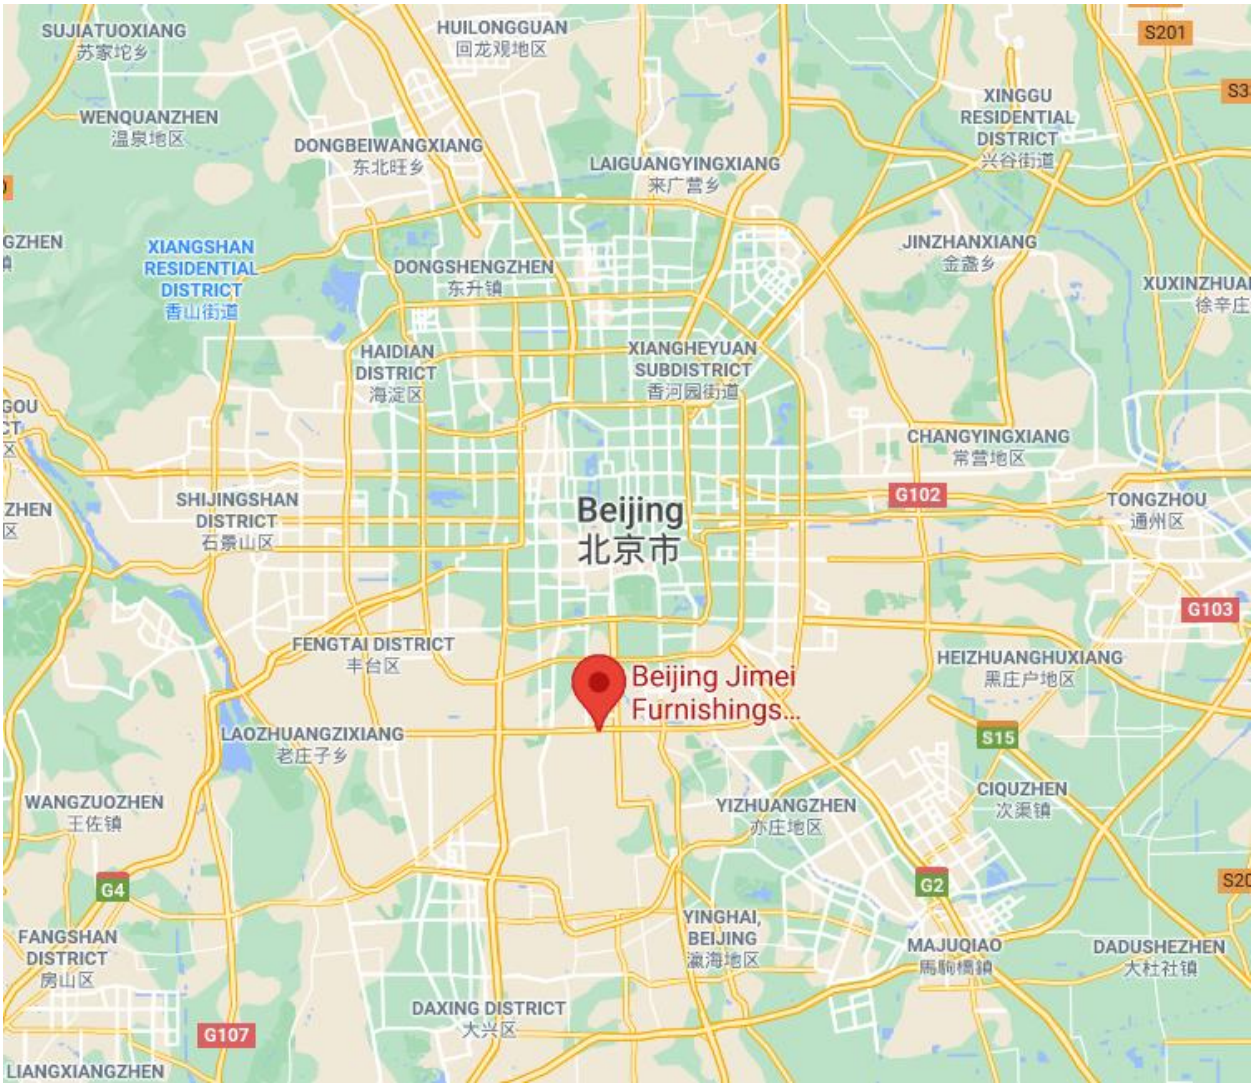

LITHIUM

Report on lithium-ion battery explosion that killed two China firemen proves inconclusive

09 Jul 2021 News By Paul Crompton

The cause of a lithium-ion energy storage system explosion that killed two firemen in China earlier this year has proved inconclusive.

A report by Beijing Fire Station noted that cell quality, battery management, electrical topology, external dust storms, and even wire arrangement could have led to the fire.

The lithium–ion phosphate battery formed a 25MWh system connected to 1.4MW photovoltaic array used at a public electric vehicle charging station Beijing Gotion Full-Service, in Beijng.

The fire happened on 16 April, and took 47 fire trucks and 235 fire fighters from 15 local fire brigades to control the blaze. A sudden explosion happened in the early hours of the next morning, killing two fire fighters and injuring one.

The report into the fire can be found here.

The report noted: "The sudden explosion of the power station in the north area could be explained by the safety accident induction mechanism of lithium batteries, which is the thermal failure of the batteries in the extreme conditions when they were significantly affected by internal and external sources.

"Due to the limitation of accidental information, it is hard to determine the fire accident was initiated by the poor quality of the batteries or the overloading input to the batteries which exceeds the limitation of the batteries. Several possible reasons are proposed."

The project was developed and operated by Beijing Fuweisi Oil & Gas Co and commissioned in 2019.

The batteries were supplied by Guoxuan High-Tech Co, with 225 single cells connected in parallel and then in series to form a string, then 18 strings were connected in parallel to construct a 720V and 189Ah battery module.

The report follows news that China is on the verge of banning the use of second-life lithium-ion batteries in large-scale energy storage systems (ESS) until a "breakthrough in battery consistency management technology and a sound power battery performance testing and evaluation system" is developed.

Last week, BEST reported how toxic fumes and smoke from a fire involving up to 100 tons of lithium-ion batteries prompted emergency services to evacuate up to 4,000 people in Illinois, US.

Firefighters battled for more than three days to bring the fire involving around 180,000 to 200,000 pounds of lithium batteries under control.

Paul Crompton

09 Jul 2021 News

TRENDING

LITHIUM
Delhi High Court refuses use of lead-acid batteries in e-rickshaws
28 Oct 2022 News

LITHIUM
Nidec ASI wins 5.4GWh ESS contract
28 Oct 2022 News

NO TECHNOLOGY
'Home batteries aren't economical'
26 May 2017 News

More articles

LEAD

Hybrid battery systems and their role the world's journey to net zero

During last year's UN Climate Change Conference of the Parties (COP26) in Glasgow, Scotland countries were asked to offer ambitious 2030 emissions reduction targets that align with reaching net zero...

05 May 2022 Industry Insight

Subscribe to bestmag

Find a wealth of information on the energy storage and battery industries with BEST Magazine. From all the latest news to in-depth technical articles, we have everything you need in print and online.

VIEW SUBSCRIPTION OPTIONS

Subscribe to bestmag
All the latest news and articles on Batteries & Energy Storage Technology
VIEW SUBSCRIPTION OPTIONS

protected by reCAPTCHA
Privacy • Terms

Copyright 2022 © Energy Storage Publishing Ltd.